TERMINAL REPLACEMENT

These steps **must** be followed when replacing a terminal.

Step 1. Identify the connector and the terminal type.

↓

Step 2. Disconnect the terminal from the connector.

↓

Step 3. Replace the terminal.

↓

Step 4. Install the terminal into the connector.

FOREWORD

This manual has been prepared for use when performing terminal repairs, wire repairs, or connector repairs on vehicles.

A step–by–step section on connector repair and terminal repair is included.

There is a section of charts with terminal and connector illustrations, part numbers, and notes on terminal removal.

By using this guide, a satisfactory repair of the wiring harness and connectors in Toyota vehicles will be easy to achieve.

All information in this manual is based on the latest product information at the time of publication. However, specifications and procedures are subject to change without notice.

TOYOTA MOTOR CORPORATION

● 2002 TOYOTA MOTOR CORPORATION
All rights reserved. This book may not be reproduced or copied, in whole or in part, without the written permission of Toyota Motor Corporation.

GENERAL INFORMATION

This manual provides instruction in the following repairs:

- How to Inspect for System Inspection
- Circuit Protection
- Terminal and Connector Repair Procedure

NOTICE:
When inspecting or repairing the SRS AIRBAG, be sure to carefully read the precautionary instructions and procedure in the Repair Manual for the applicable model.

A

After any electrical repair is made, always test the circuit by operating the devices in the circuit. This confirms not only that the repair is correct, but also that the cause of the complaint was correctly identified.

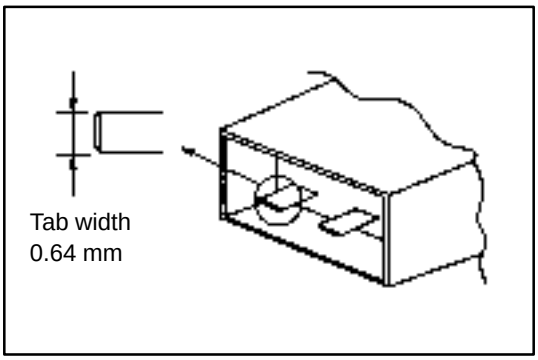

Terminal type number name

The terminal type number naming system has changed: the metric system will be used in place of the inch system. To be more specific, male tab width ”in millimeters” will be used as terminal type number from now on — in place of male tab width in inches which has been in use so far.

Below is a table of comparison:

Old terminal type No. (inch)		New terminal type No. (mm)
025	→	0.64
040 (II, III, IV)	→	1.0 (II, III, IV)
050	→	1.3
070 (II)	→	1.8 (II)
090 (II)	→	2.3 (II)
187	→	4.8
250 (II)	→	6.3 (II)
305	→	7.7
312	→	8.0
375	→	9.5

For those connectors which are not shown above, the terminal type numbers remain unchanged.

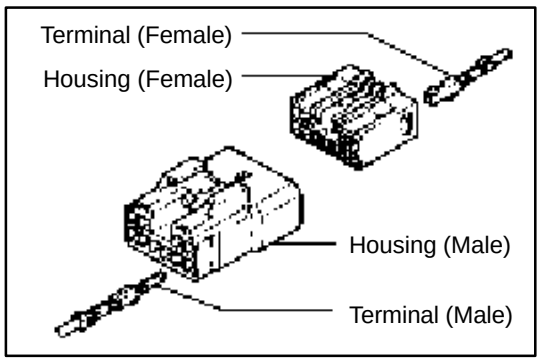

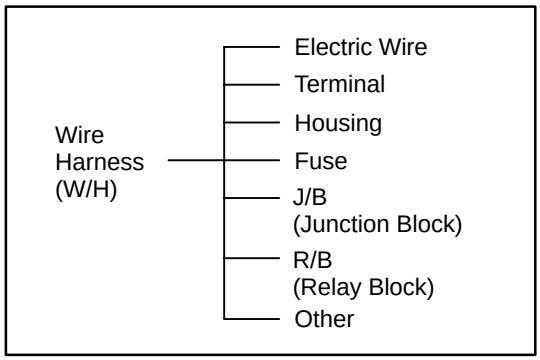

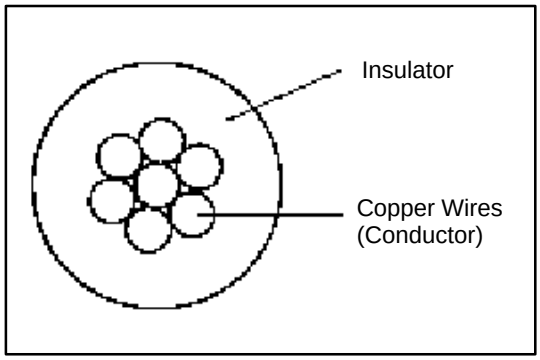

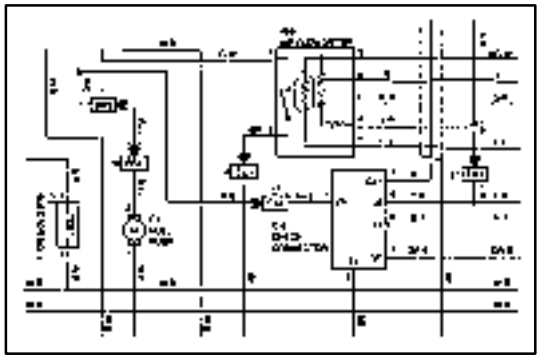

B	=	Black	W	=	White
L	=	Blue	BR	=	Brown
V	=	Violet	SB	=	Sky Blue
R	=	Red	G	=	Green
P	=	Pink	LG	=	Light Green
Y	=	Yellow	GR	=	Gray
O	=	Orange			

What is Wire Harness?

The wire harness (W/H) is systems of electric wires for automobiles to connect all the electronics parts in automobile electrically and work them. As more electronics parts are introduced in automobiles recently, the electric wires used for the wire harness are increasing in number and the structure is becoming more complicated. As a result of that, there are hundreds of connectors, which is the parts which connects wires mechanically and electrically, in one vehicle. Therefore, numbers of the connector terminal (Terminal) or the connector housing (Housing) are designed to meet many kinds of uses of circuits. Various components have been improved to ensure the product reliability or realize a wider space in the vehicles.

Wire Harness Components

Wire harness mainly consists of wires, terminals, or housings.
There are various components are designed for many parts of vehicles, such as one with high heat–resistance, water–resistance, or bending ability, ones have different current capacities, or ones are hardly influenced by electromagnetic noise.

Electric Wire

The electric wires used for the wire harness consists of the conductor made from numbers of twisted mild copper wire with a diameter of less than 0.5 mm and the insulator surrounding the conductor.
The insulator is generally made from vinyl chloride and covers the conductor with even thickness. The insulators are color–coded in order to distinguish each wire. The base colors or the stripe patterns is used to make difference between insulators. Each color of wires is indicated by the abbreviation in the repair manual and the electrical wiring diagram.

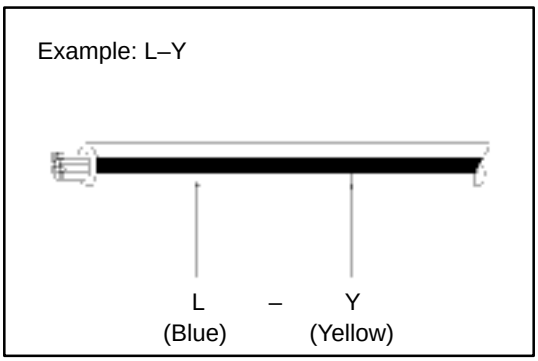

The first letter indicates the basic wire color and the second letter indicates the color of the stripe.

A

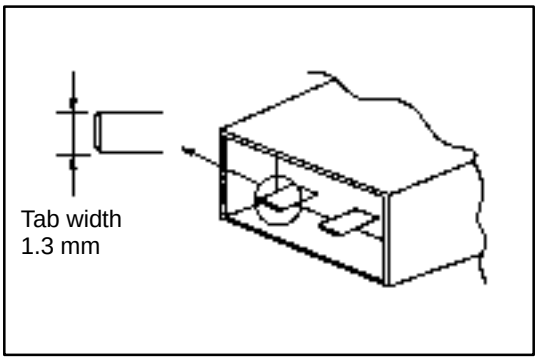

Terminal and housing

Terminal connects wires and housing insulates connecting parts.

There are the male terminal and the female terminal. The types of terminals are decided by tab width of male terminal. And the terminal with the rubber plug or the rubber ring is used in the part, such as the engine compartment, which become wet. For the circuit with slight current at EFI system or ABS system, the gold–plated terminal is introduced for ensuring reliabilities.

As the number of the circuit is increasing recently, there are new types of parts introduced. For example, there is the hybrid type housing, which is a combination of terminals with different tab width, such as the power source terminal or the signal terminal. Also, new type of connector such as the double lock housing, which is designed with the retainer in addition to the lance to prevent terminal from slipping off, is available. The new type of connectors are produced to realize higher product reliabilities and utilized widely recently. The major characteristics of these new connectors are shown in the table 1.

There are two types of lances: housing lance, which is inside the housing and terminal lance, which is inside the terminal.

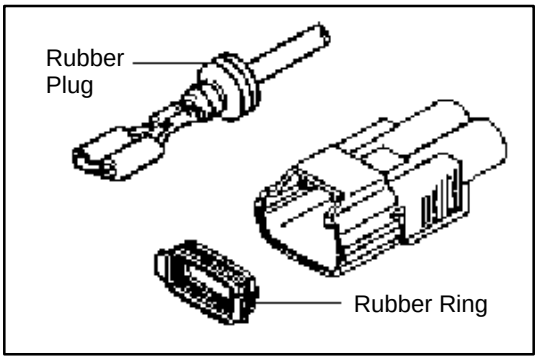

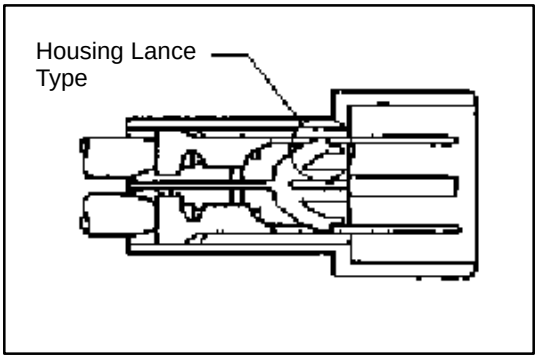

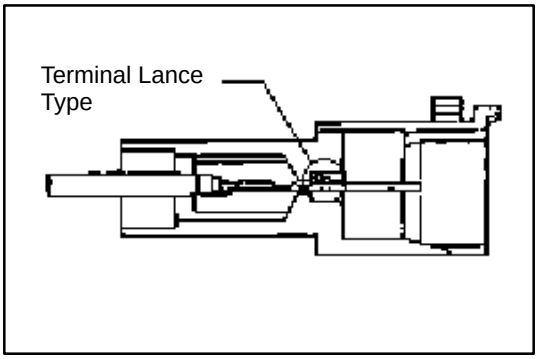

Table 1 : Characteristics of the new types of connector (Improvement)

Characteristics (Improvement)	Note
1. Double Lock 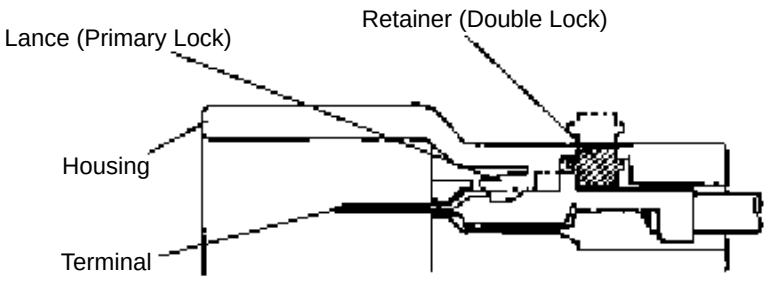	If terminal is not inserted to housing correctly, the retailer does not fit.
2. Extension of Housing 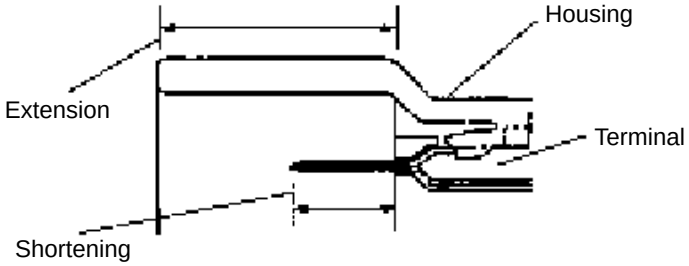	This is to prevent deformation of the terminal when it is inserted diagonally.
3. Change of Contact Structure and Introduction of Box–Shaped Structure	Expansion of contact section Stabilization of contact pressure
4. Change of Locking Shape 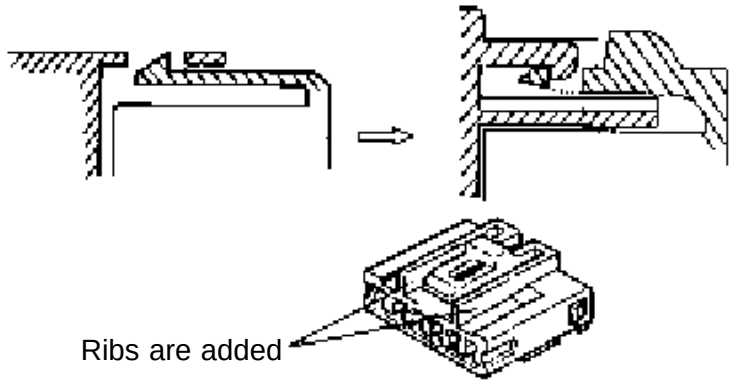	This improves the close fit of locking and you can hear the click sound and feel that the connector is completely installed.

HOW TO PERFORM FOR SYSTEM INSPECTION

This inspection procedure is a simple troubleshooting which should be carried out on the vehicle during system operation and is based on the assumption of system component trouble

Always inspect the trouble taking the following items into consideration:

- Ground point fault
- Open or short circuit of the wire harness
- Connector or terminal connection fault
- Fuse or fusible link fault

A

NOTICE:

- **This is an on–vehicle inspection during system operation. Therefore, inspect the trouble with due regard for safety.**
- **If connecting the battery directly, be careful not to cause a short circuit, and select the applicable voltage.**

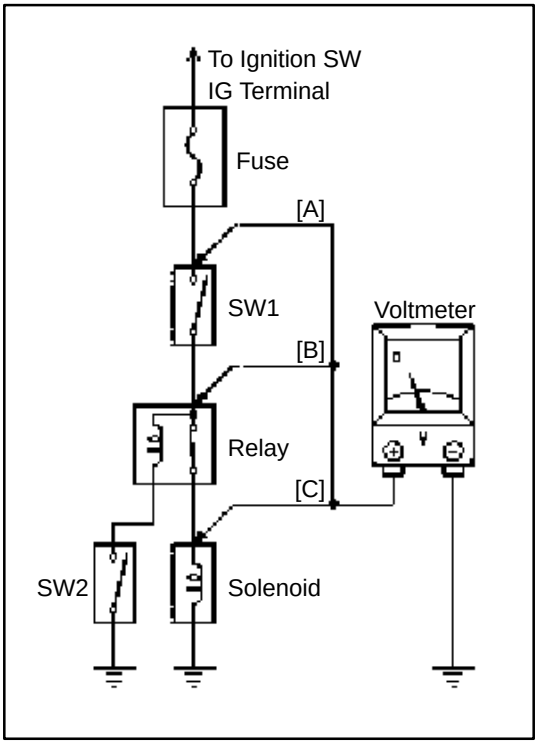

1. Voltage Check

(a) Establish conditions in which voltage is present at the check point.

Example:
[A] – Ignition SW on
[B] – Ignition SW and SW 1 on
[C] – Ignition SW, SW 1 and Relay on (SW 2 off)

(b) Using a voltmeter, connect the negative (–) lead to a good ground point or negative (–) battery terminal and the positive (+) lead to the connector or component terminal. This check can be done with a test bulb instead of a voltmeter.

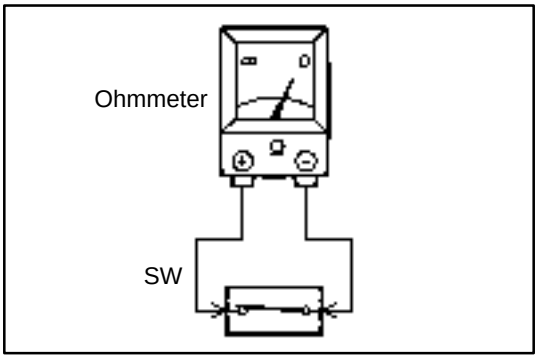

2. Continuity and Resistance Check

(a) Disconnect the battery terminal or wire so there is no voltage between the check points.

(b) Contact the two leads of an ohmmeter to each of the check points.

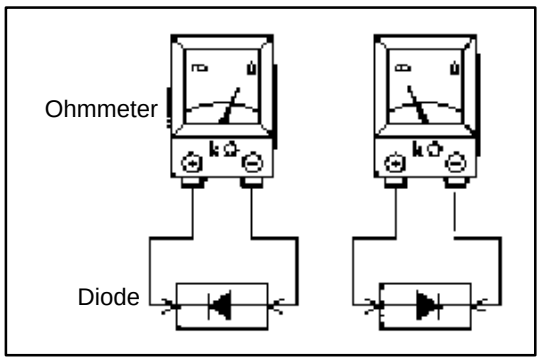

If the circuit has diodes, reverse the two leads and check again.
When touching the negative (–) lead to the diode positive (+) side and the positive (+) lead to the negative (–) side, there should be continuity. When touching the two leads in reverse, there should be no continuity.

HINT: Specifications may vary depending on the type of tester, so refer to the tester's instruction manual before performing the inspection.

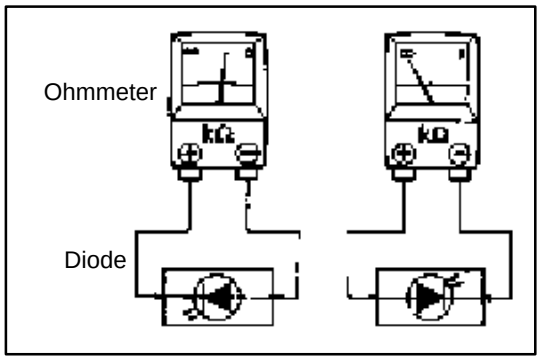

Check LED (Light Emitting Diode) in the same manner as that for diodes.

HINT:
- Use a tester with a power source of 3V or greater to overcome the circuit resistance.
- If a suitable tester is not available, apply battery voltage and check that the LED lights up.

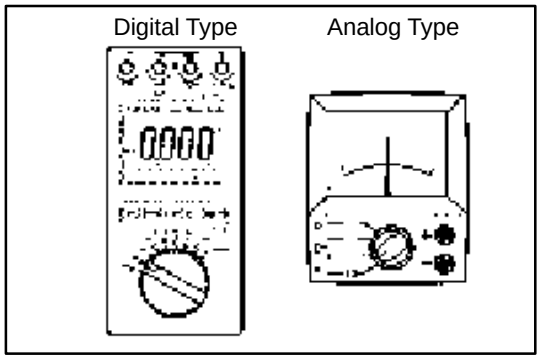

(c) Use a volt/ohmmeter with high impedance (10kΩ/V minimum) for troubleshooting of the electrical circuit.

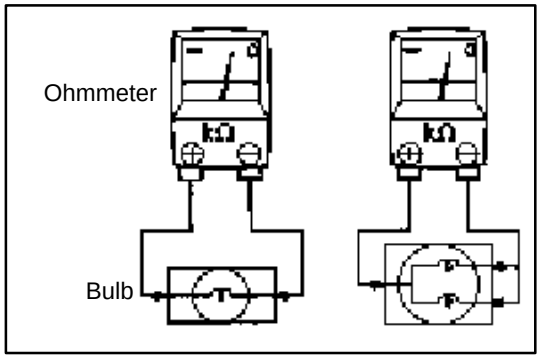

3. Bulb Check

(a) Remove the bulb.

(b) There should be continuity between the respective terminals of the bulb together with a certain amount of resistance.

(c) Apply the two leads of the ohmmeter to each of the terminals.

(d) Apply battery voltage and check that the bulb light up.

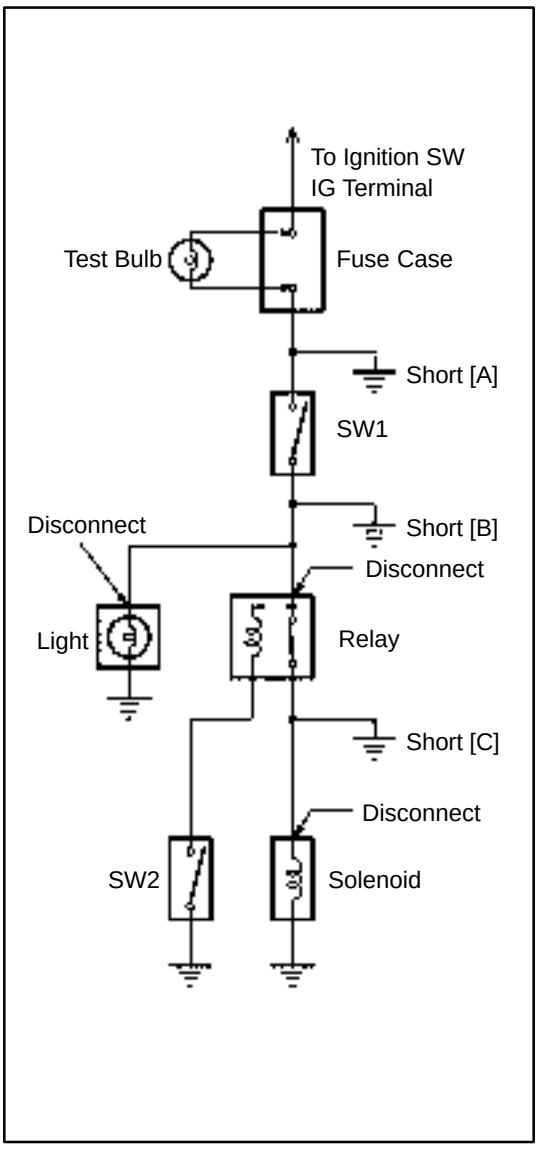

4. Finding a Short Circuit

(a) Remove the blown fuse and eliminate all loads from the fuse.

(b) Connect a test bulb in place of the fuse.

(c) Establish conditions in which the test bulb comes on.

Example:
[A] – Ignition SW on
[B] – Ignition SW and SW 1 on
[C] – Ignition SW, SW 1 and Relay on (Connect the Relay) and SW 2 off (or disconnect SW 2)

(d) Disconnect and reconnect the connectors while watching the test bulb. The short lies between the connector where the test bulb stays lit and the connector where the bulb goes out.

(e) Find the exact location of the short by lightly shaking the problem wire along the body.

CAUTION:

(a) **Do not open the cover or the case of the ECU unless absolutely necessary. (If the IC terminals are touched, the IC may be destroyed by static electricity.)**

(b) **When replacing the internal mechanism (ECU part) of the digital meter, be careful that no part of your body or clothing comes in contact with the terminals of leads from the IC, etc. of the replacement part (spare part).**

CIRCUIT PROTECTION

All electrical circuits are protected against excessive loads which might occur because of shorts or overloads in the wiring system. Such protection is provided by a fuse, circuit breaker, or fusible link, A short circuit may cause a fuse to blow or a circuit breaker to open.

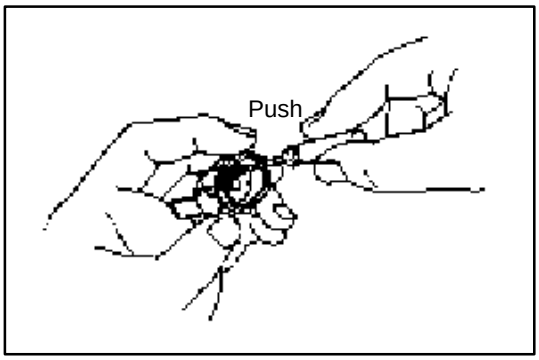

RESET CIRCUIT BREAKER

1. Remove Circuit Breaker

(a) Disconnect the negative (–) cable from the battery.

(b) Remove the circuit breaker.

2. Reset Circuit Breaker

(a) Insert the needle into the reset hole and push it.

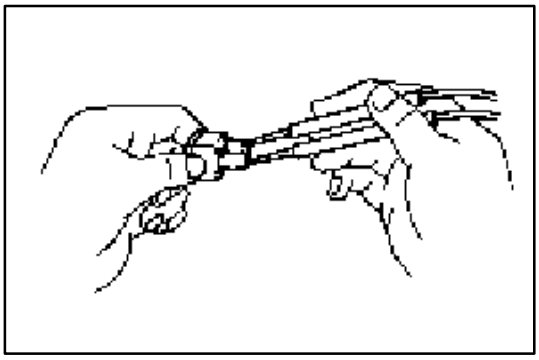

(b) Using an ohmmeter, check that there is continuity between both terminals of the circuit breaker.

If continuity is not as specified, replace the circuit breaker.

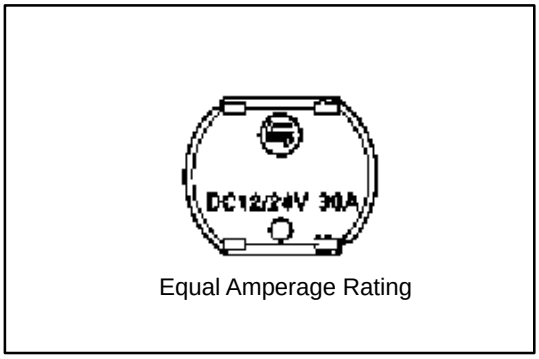

Equal Amperage Rating

HINT: If replacing the circuit breaker, be sure to replace it with a breaker with an equal amperage rating.

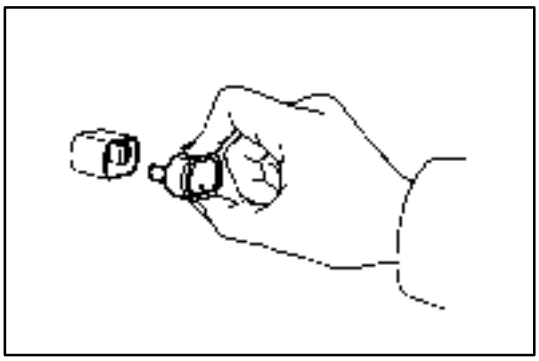

3. Install Circuit Breaker

(a) Install the circuit breaker.

(b) Connect the negative (–) cable to the battery.

HINT: If a circuit breaker continues to cut out, a short circuit is indicated. Have the system checked by a qualified technician.

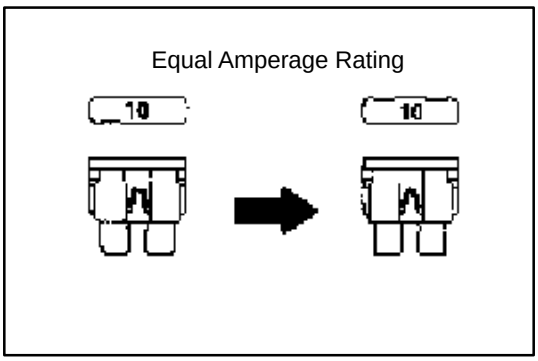

REPLACEMENT OF FUSE AND FUSIBLE LINK

HINT: If replacing the fuse or fusible link, be sure to replace it with a fuse or fusible link with an equal amperage rating.

A

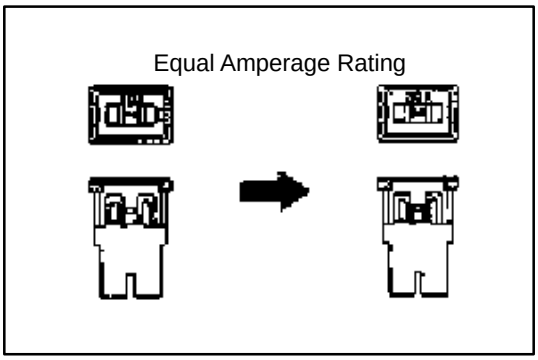

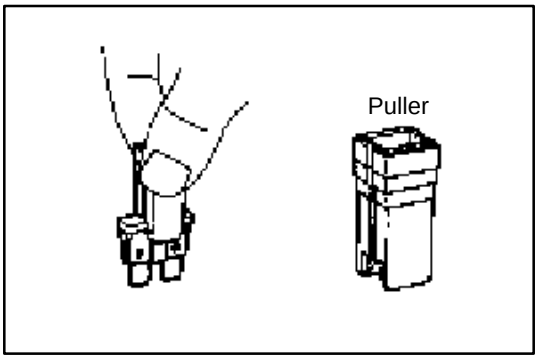

NOTICE:

1. **Turn off all electrical components and the ignition switch before replacing a fuse or fusible link. Do not exceed the fuse or fusible link amperage rating.**
2. **Always use a fuse puller for removing and inserting a fuse. Remove and insert straight in and out without twisting. Twisting could force open the terminals too much, resulting in a bad connection.**

If a fuse or fusible link continues to blow, a short circuit is indicated. The system must be checked by a qualified technician.

HINT: The puller is located at Junction Block No.2.

PREPARATORY ITEMS

Tool	Crimping tool	AMP Part No. 169060	For caulking press sleeves
	Special tool	Refer to the following illustration	To remove the terminal
	SST	09991–00500	To remove the 0.64 connector terminal
Gauge	Caliper	0–150 mm	To measure the diameter of the core
Others	Press sleeve	82999–12010 (Red) 82999–12020 (Blue) 82999–12030 (Yellow)	To connect wires
	Silicon tape	08231–00045	To waterproof the connected section

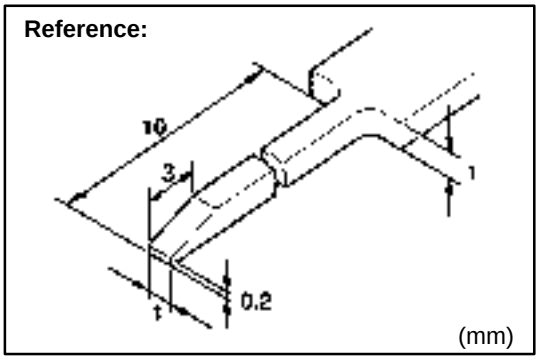

Special Tool

HINT: To remove the terminal from the connector, please construct and use the special tool or like object shown on the left.

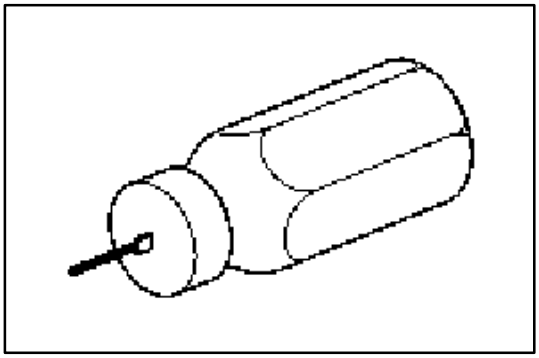

Preparation of the SST to release the 0.64 connector terminal.
SST 09991–00500

HINT:
This is a SST for releasing terminals from 0.64 connectors.

CONNECTOR REPAIR

The repair parts now in supply are limited to those connectors having common shapes and terminal cavity numbers. Therefore, when there is no available replacement connector of the same shape or terminal cavity number, please use one of the alternative methods described below. Make sure that the terminals are placed in the original order in the connector cavities, if possible, to aid in future diagnosis.

1. When a connector with a different number of terminals than the original part is used, select a connector having more terminal cavities than required, and replace both the male and female connector parts.

   EXAMPLE: You need a connector with six terminals, but the only replacement available is a connector with eight terminal cavities. Replace both the male and female connector parts with the eight terminal part, transferring the terminals from the old connectors to the new connectors.

2. When several different type terminals are used in one connector, select an appropriate male and female connector part for each terminal type used, and replace both male and female connector parts.

   EXAMPLE: You need to replace a connector that has two different types of terminals in one connector. Replace the original connector with two new connectors, one connector for one type of terminal, another connector for the other type of terminal.

3. When a different shape of connector is used, first select from available parts a connector with the appropriate number of terminal cavities, and one that uses terminals of the same size as, or larger than, the terminal size in the vehicle. The wire lead on the replacement terminal must also be the same size as, or larger than, the nominal size of the wire in the vehicle. (”Nominal” size may be found by looking at the illustrations in the section F or by direct measurement across the diameter of the insulation). Replace all existing terminals with the new terminals, then insert the terminals into the new connector.

   EXAMPLE: You need to replace a connector that is round and has six terminal cavities. The only round replacement connector has three terminal cavities. You would select a replacement connector that has six or more terminal cavities and is not round, then select terminals that will fit the new connector. Replace the existing terminals, then insert them into the new connector and join the connector together.

Step 1. Identify the connector and the terminal type.

Confirm whether the connector you require is the non–waterproof, waterproof or combined terminal type connector from the pictures provided in the following charts.

Connector	Description
Non–Waterproof Type	Those connectors which are not of the waterproof or combined terminal type.
Waterproof Type	Waterproof material (hole plug or terminal packing) is provided on the terminal/connector body.
Combined Terminal Type	Terminals of different shape/size are located in one connector.

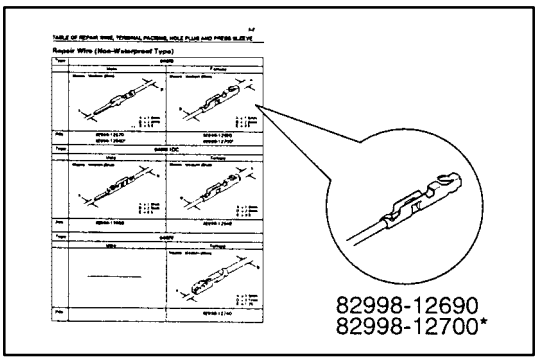

1. Terminal with Wire

Identify the part number of the terminal with wire by picking out the corresponding illustration from the pictures provided on the following charts.

HINT: In some of the illustrations, there are two part numbers for the same illustration of terminal with wire, because although the shapes of the terminals are completely the same, there is a difference in with /without gold–plating (gilded).

Remark: The length of the wire connected to the terminal is approximately 150 mm.

NOTICE:

- **When the terminal used is gold plated, be sure to replace it with a gold plated terminal when marking repairs.**
- **Do not use male and female terminals which are made of different materials from each other.**

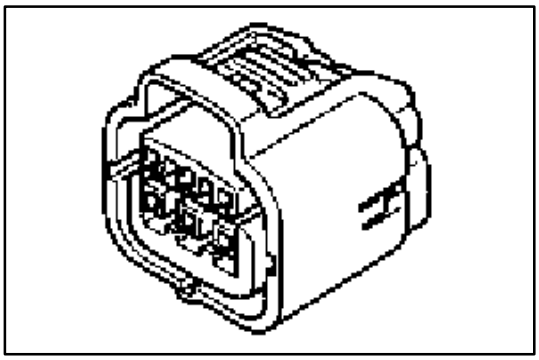

2. Connector Body

(a) Identify the part number of the corresponding terminal with wire according to the above–mentioned 1.

(b) Identify the part number of the connector body by picking out the correct one from the illustrations according to the number of terminals and the shape.

HINT:

(a) If you can find no connector which matches the type you require, pick out male and female connector bodies as a set which have more terminals than you require.

For the combined terminal type connector body, pick out and appropriate connector body for each terminal being used.

Example:
When two types of terminal are used in one connector body, pick out a male and female for two different connector bodies.

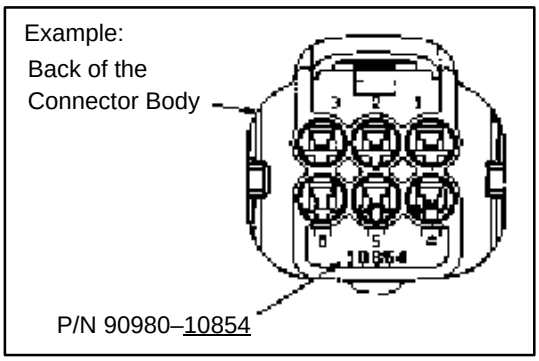

(b) The part number has been stamped on the back of the connector body. (This will continue to be done to new types of connector.)

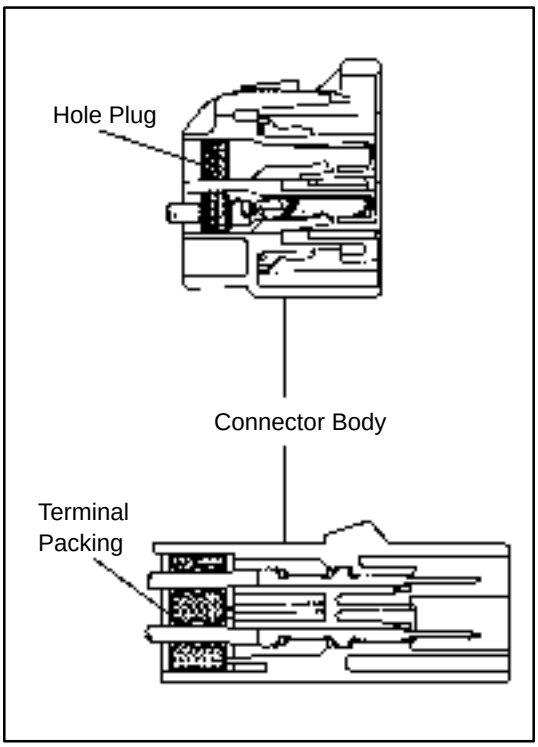

3. Hole Plug/Terminal Packing

(a) Identify the part number of the appropriate terminal with wire/connector body from the illustrations of waterproof type connector according to the above–mentioned 1 and 2.

(b) Identify the part number of the hole plug/terminal packing from the corresponding illustration.

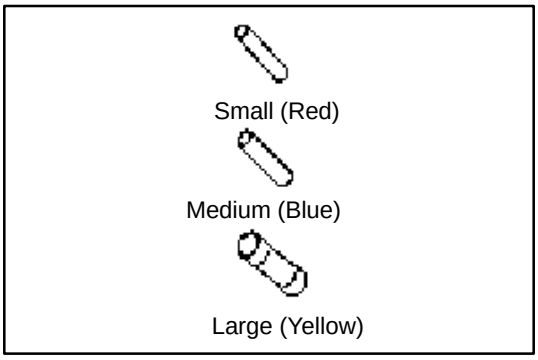

4. Sleeve

When connecting two wires using a sleeve, select the sleeve according to the following table.

Wire Outside Diameter	Sleeve Size (Color)
0.2–1.0 mm	Small (Red)
1.0–2.0 mm	Medium (Blue)
3.0–5.0 mm	Large (Yellow)

(a) When size is based on the <u>outside diameter</u> of the wire.

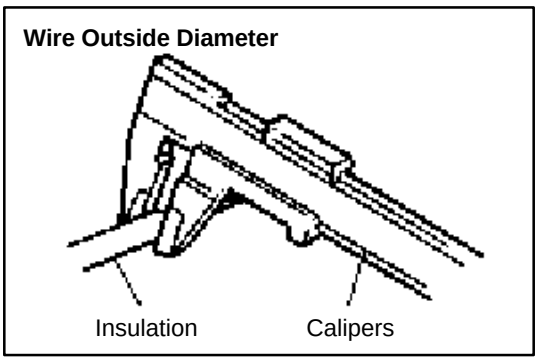

* \ *	0.3	0.5	0.85	1.25	2	3	5
0.3	S	M	M	M	M	L	L
0.5	M	M	M	M	M	L	L
0.85	M	M	M	M	L	L	L
1.25	M	M	M	M	L	L	L
2	M	M	L	L	L	L	—
3	L	L	L	L	L	L	—
5	L	L	L	L	—	—	—

∗ Nominal size of the wire

(b) When size is based on the nominal size of the wire.

Sleeve size

S : Small (Red)
M : Medium (Blue)
L : Large (Yellow)

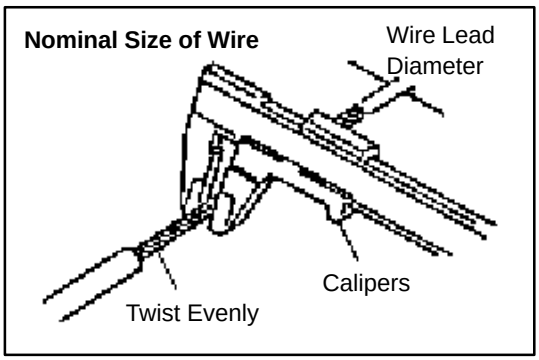

HINT: To calculate the ”Nominal Size” of the wire.

Nominal size =

$$\frac{3.14 \times (\text{Diameter of stripped wire harness})^2}{4}$$

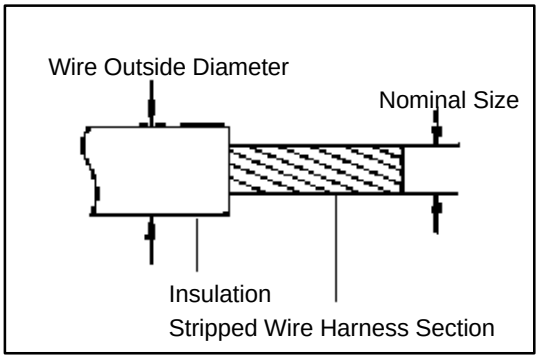

HINT: Outside Diameter and Nominal Size

B

Step 2. Disconnect the Terminal from the Connector.

1. Disconnect Connector

To pull apart the connectors, pull on the connector itself, not the wire harness.

HINT: Check to see what kind of connector you are disconnecting before pulling apart.
Press down type is mainly used.

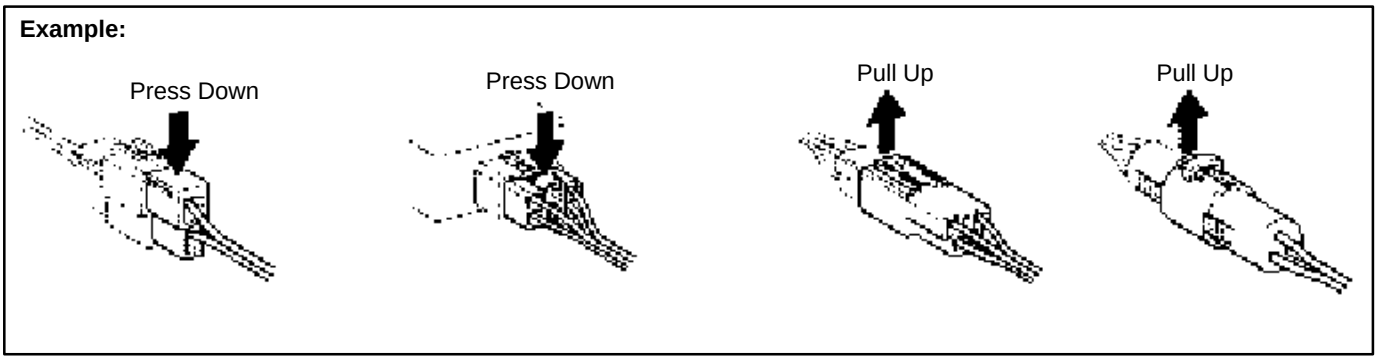

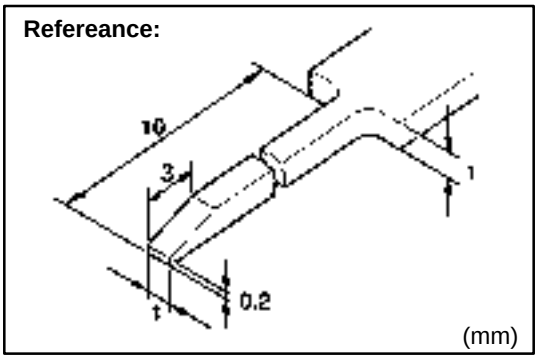

2. Prepare the Special Tool

HINT: To remove the terminal from the connector, please construct and use the special tool or like object shown on the left.

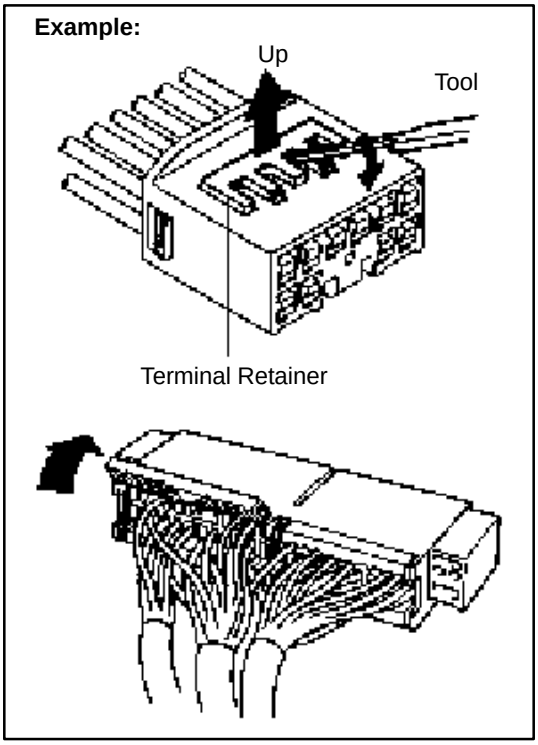

3. Disengage the double locking device or terminal retainer.

(a) Locking device must be disengaged before the terminal locking clip can be released and the terminal removed from the connector.

(b) Use a special tool or the terminal pick to unlock the double locking device.

NOTICE:
Do not remove the terminal retainer from connector body.

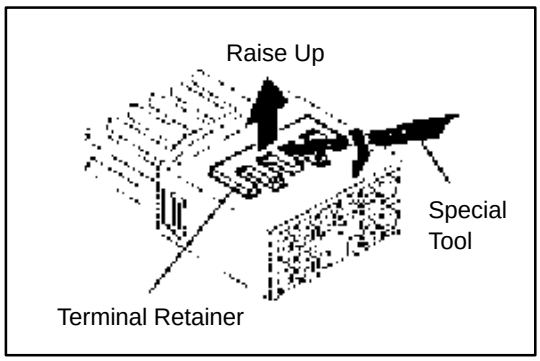

Type A (For 1.0II, 1.8, 2.3II, 4.8 and 8.0 of Non–Waterproof Type Connector)

(1) Using the special tool, raise the retainer up to the temporary lock position.

HINT: The needle insertion position varies according to the connector's shape (number of terminals, etc.), so check the position before inserting it.

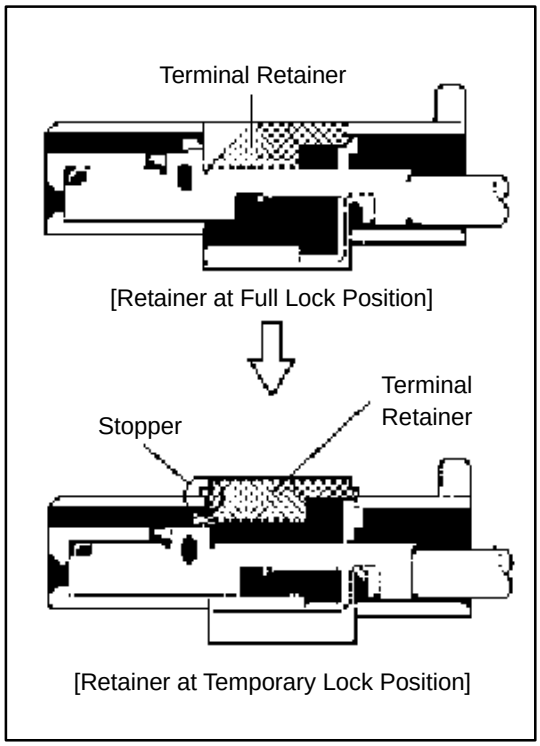

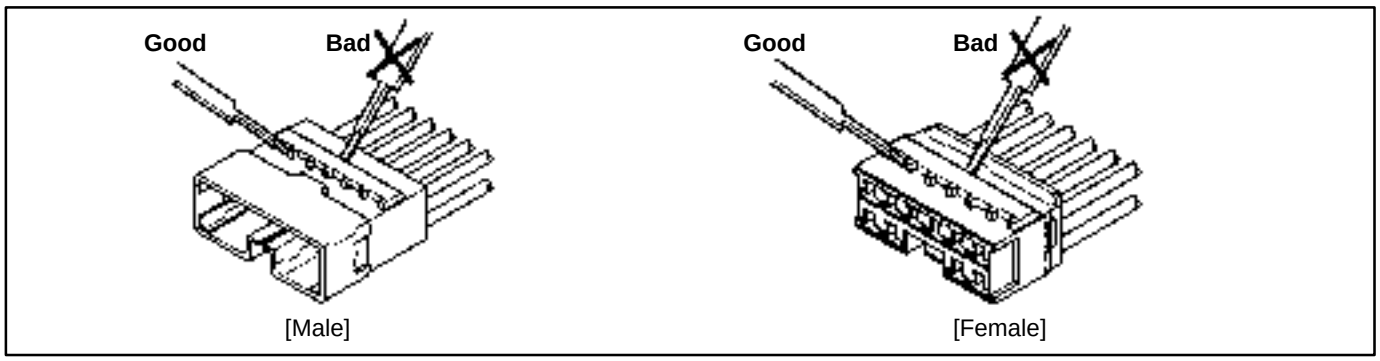

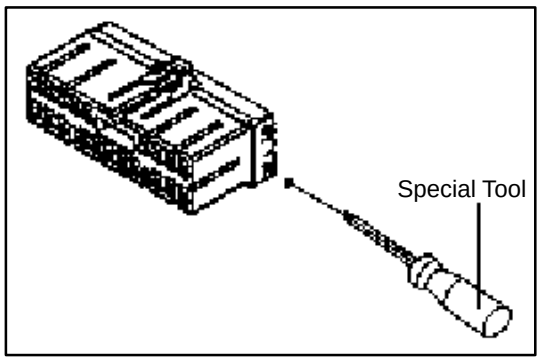

Type B (For 1.8, 1.0 and TLC of Non–Waterproof Type Connector)

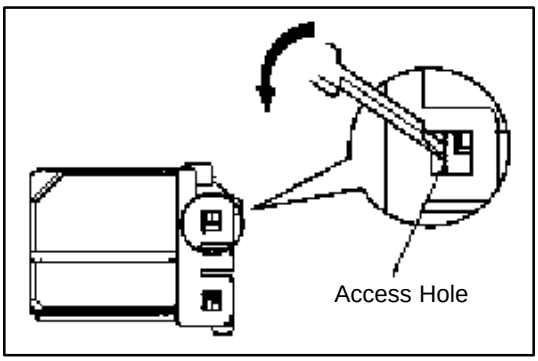

(1) Press the special tool at a 45° angle into the locking lug access hole as shown.

Raise the double locking device up as far as possible.

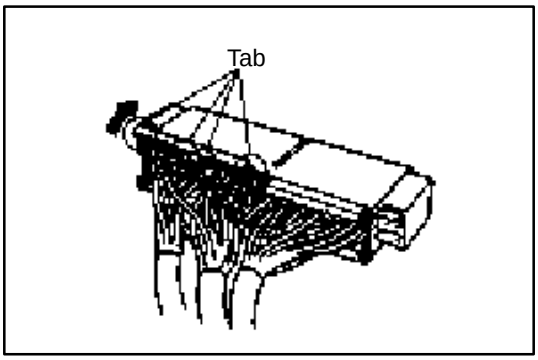

(2) Remove the special tool and open the double locking device

NOTICE:
TLC housing is not be reusable. Please replace it with the new one after replacement of the terminal.

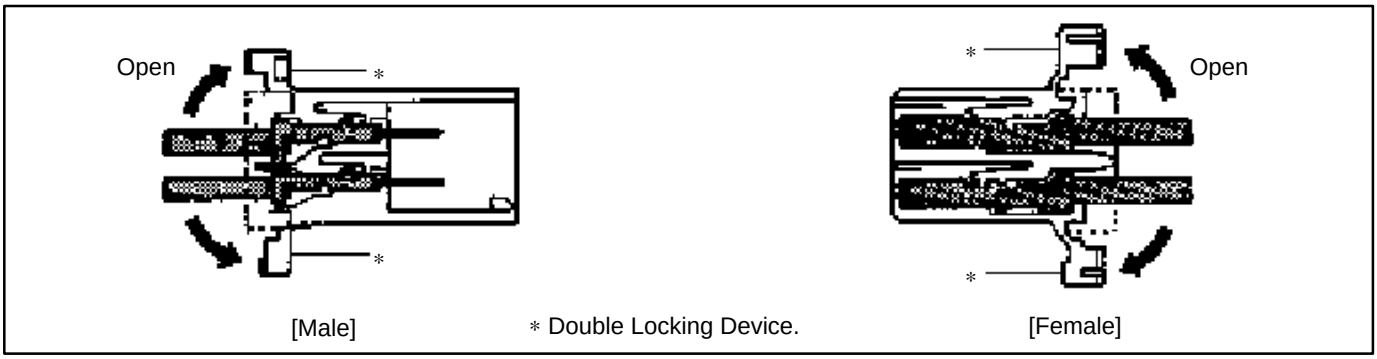

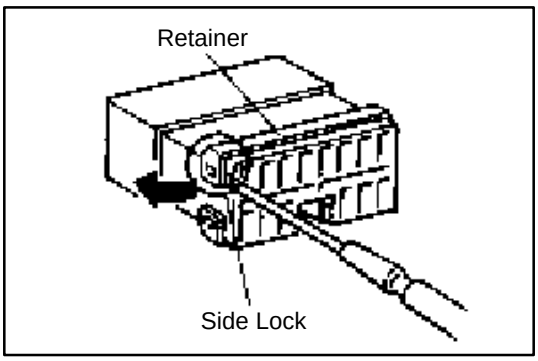

Type C (For TNS, FTC Type Connector)

(1) Widen the side lock part of the retainer from side to side using the special tool.

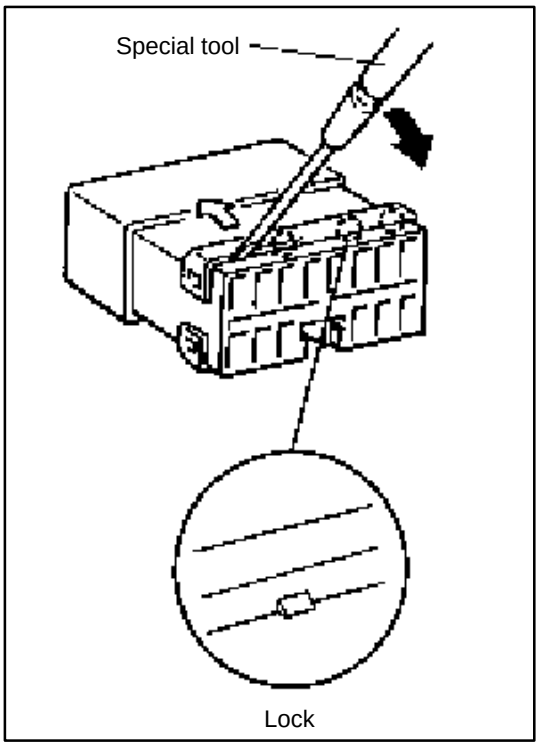

(2) Inset the special tool into the chink between the retainer and the terminal itself. Then pry it to the direction of the arrow shown in the illustration and push the retainer up to release the lock.

NOTICE:

- **Do not insert the special tool too much. It may cause damage on the fit section of the terminal and the wire harness.**
- **TNS housing is not reusable. Please replace it with the new one after replacement of the terminal.**

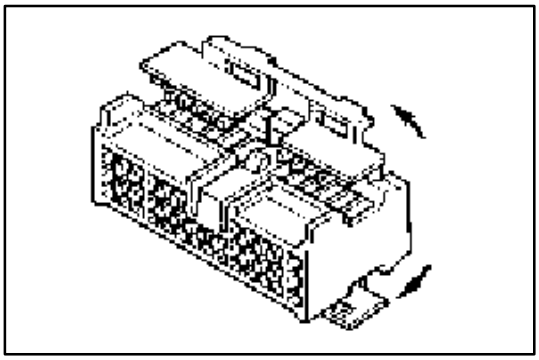

Type D (For 1.3 of Non–Waterproof Type Connector)

[Case 1]

(1) Use the special tool to unlock the double locking device.

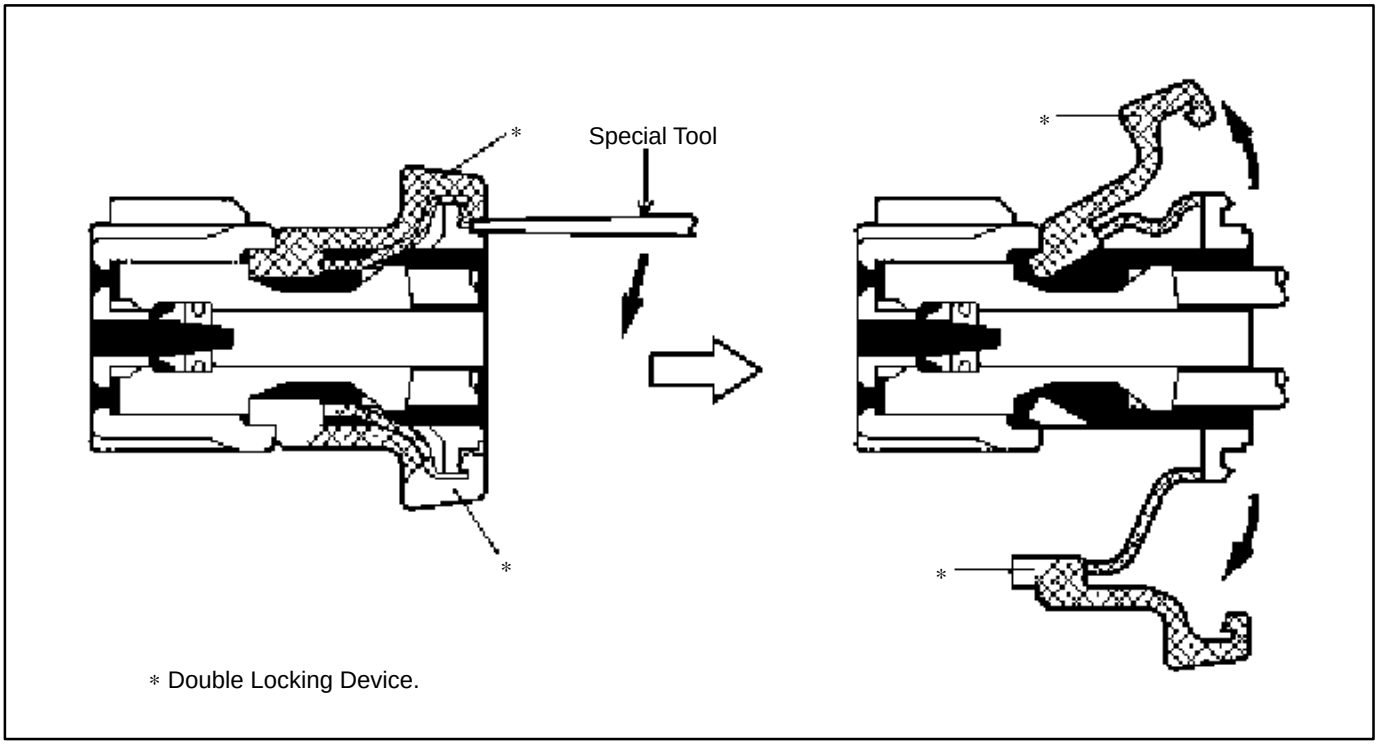

* Double Locking Device.

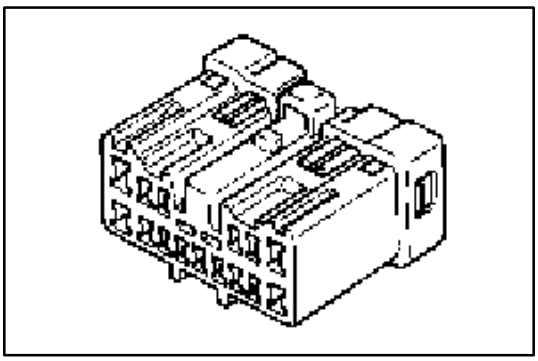

[Case 2]

(1) Using the special tool, push the terminal retainer locking lug (clip) and pull the terminal retainer up to the temporary lock position.

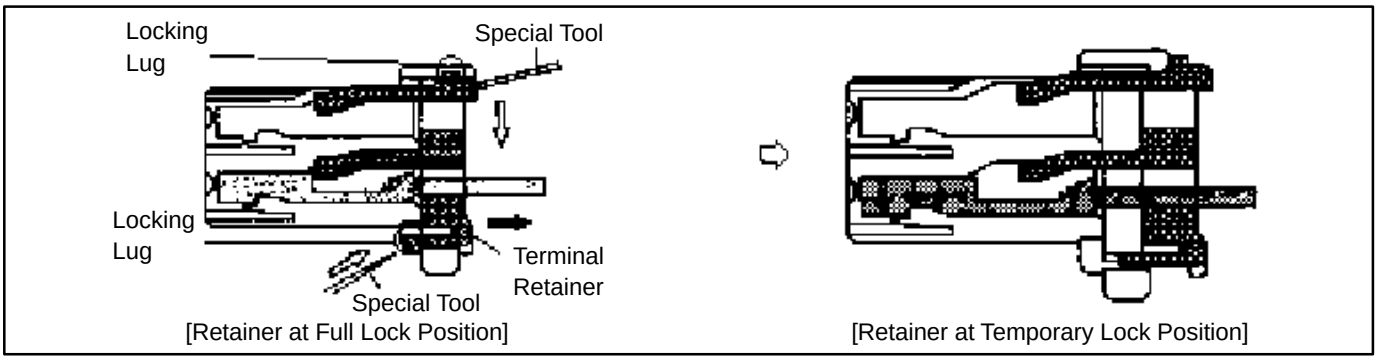

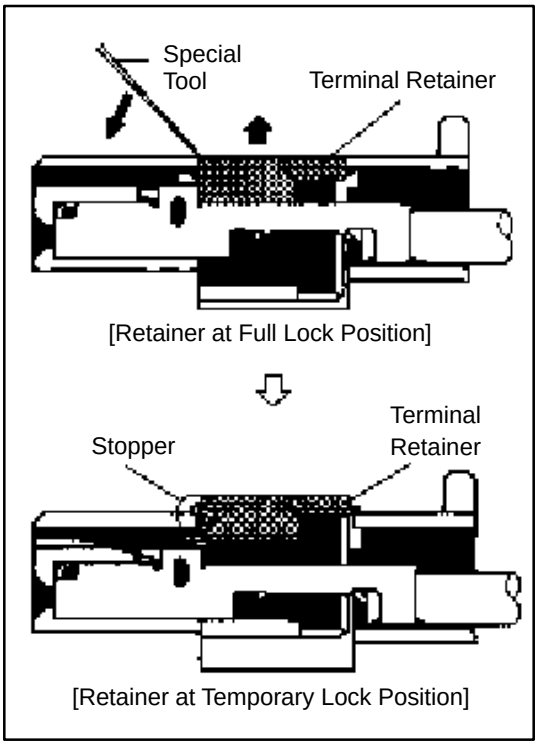

[Case 3]

(1) Using the special tool, raise the retainer up to the temporary lock position.

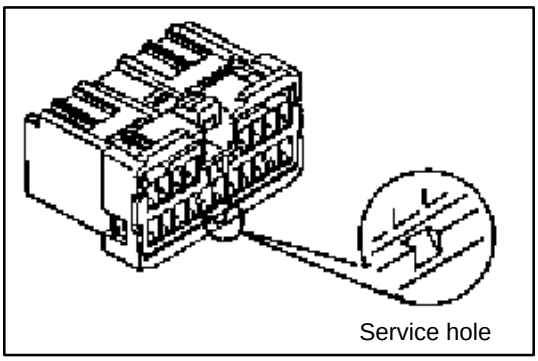

[Case 4]

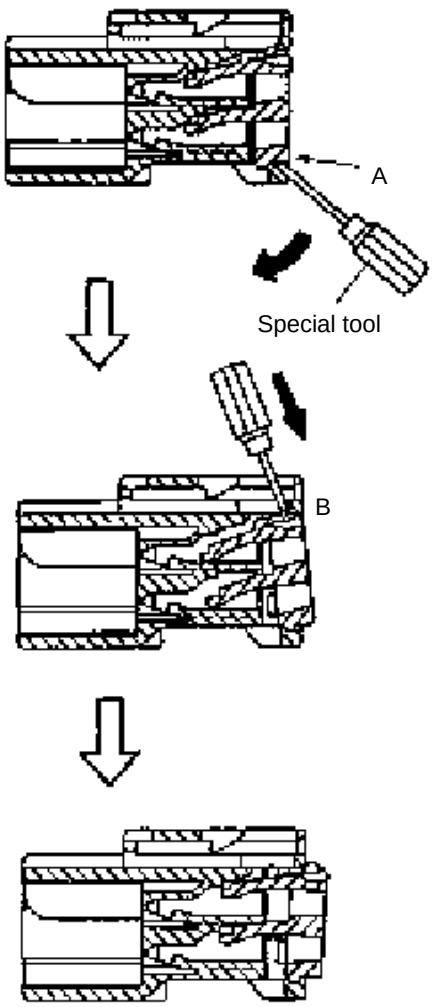

Appearance when the double locking is released

(1) Insert the special tool into the service hole and move it to the direction of the arrow to release the lock on the side A.

(2) Push the lock on the side B up by the special tool and release the lock. Then pull the retainer forward.

Type E (For 1.8, 2.3, 2.3II, 4.8, 6.3 and 8.0 of Waterproof Type Connector)

HINT: Terminal retainer color is different according to connector body.
Example:

Terminal Retainer	:	Connector body
Black or White	:	Gray
Black or White	:	Dark Gray
Gray or White	:	Black

[Case 1]
Type where terminal retainer is pulled up to the temporary lock position (Pull Type).

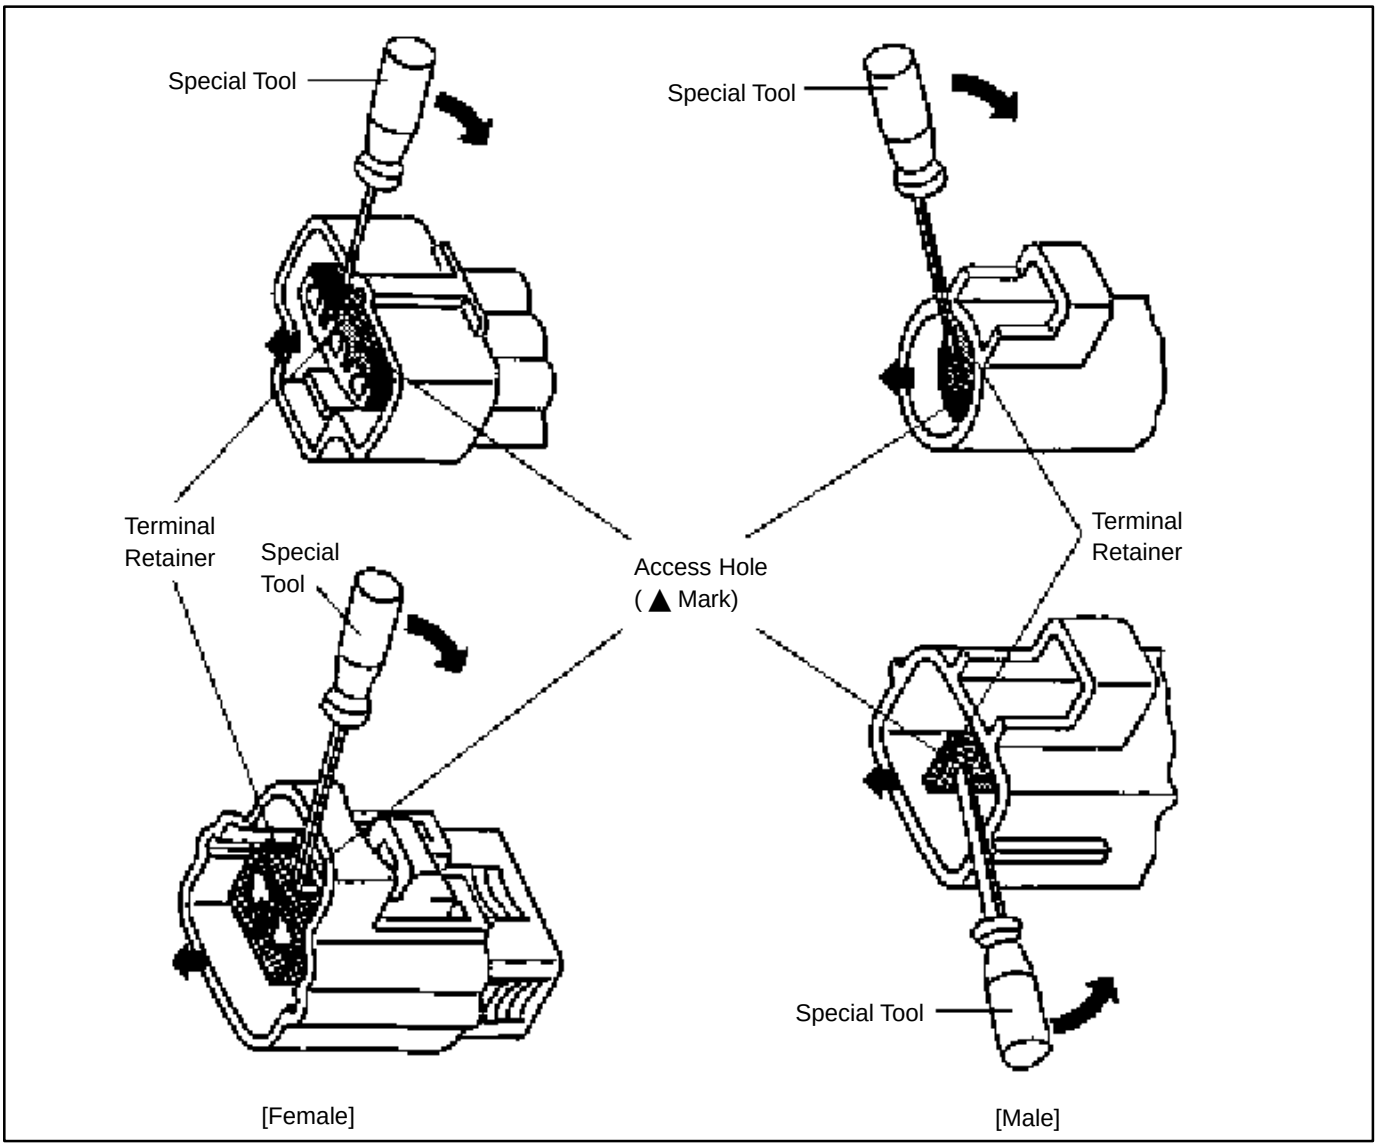

(1) Insert the special tool into the terminal retainer access hole (▲ Mark) and pull the terminal retainer up to the temporary lock position.

HINT: The needle insertion position varies according to the connector's shape (Number of terminals etc.), so check the position before inserting it.

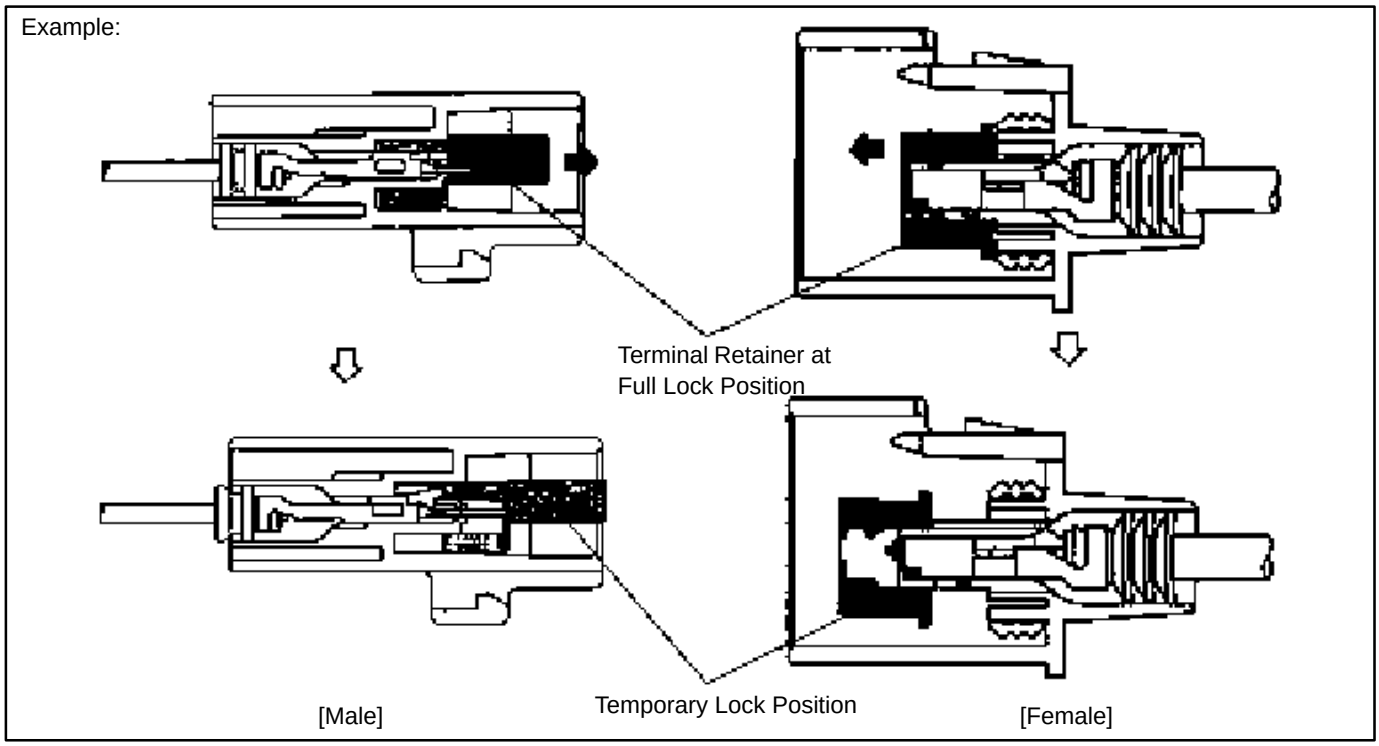

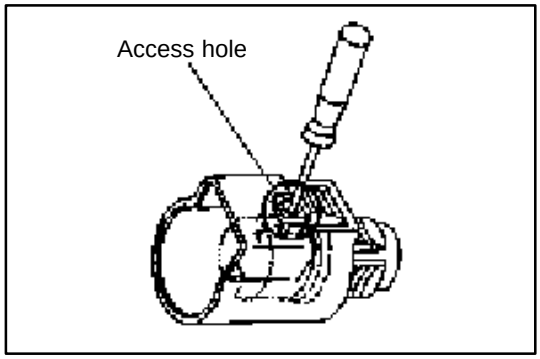

HINT: In some cases insert the special tool from the access hole on the flank of the housing.

[Case 2]

Type which cannot be pulled as far as Power Lock

HINT: There are few cases of this type of connector

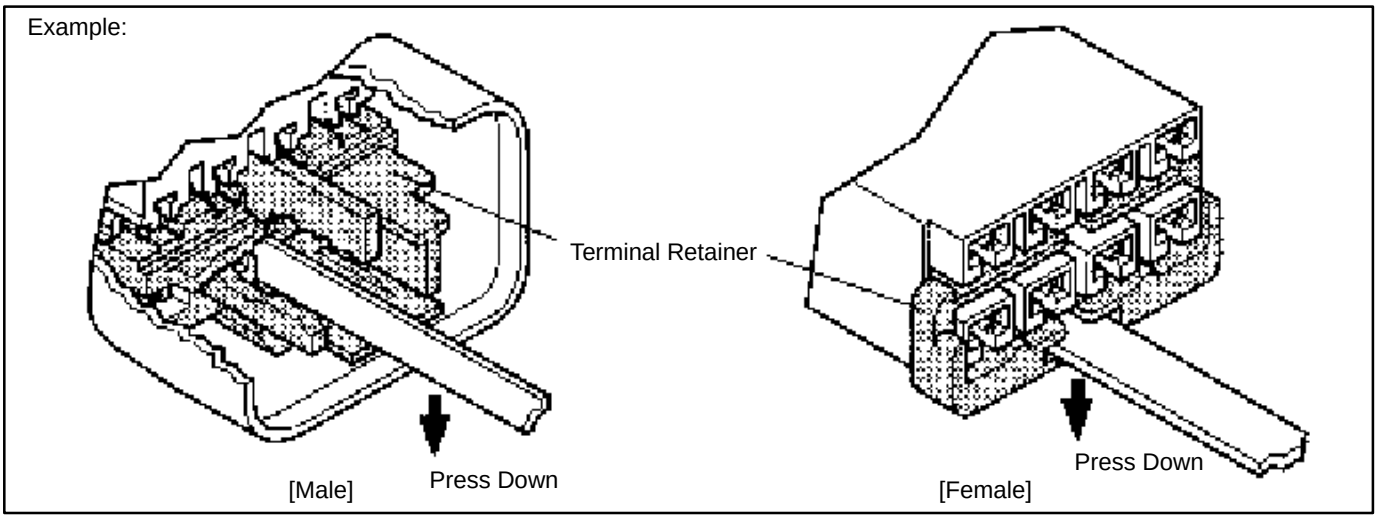

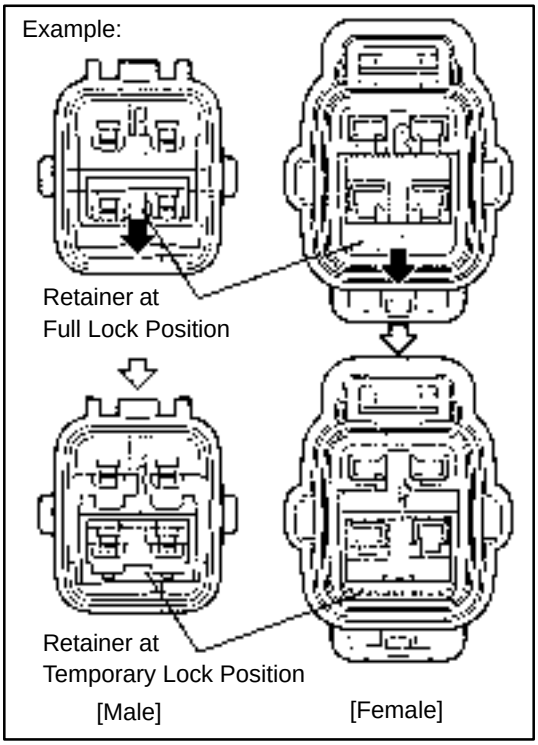

(1) Insert the tool straight into the access hole of terminal retainer as shown.

Push the terminal retainer down to the temporary lock position.

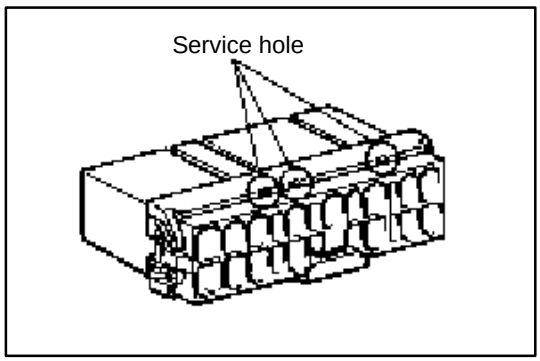

Type F (For C–Type Connector)

(1) Insert the special tool into the service hole.

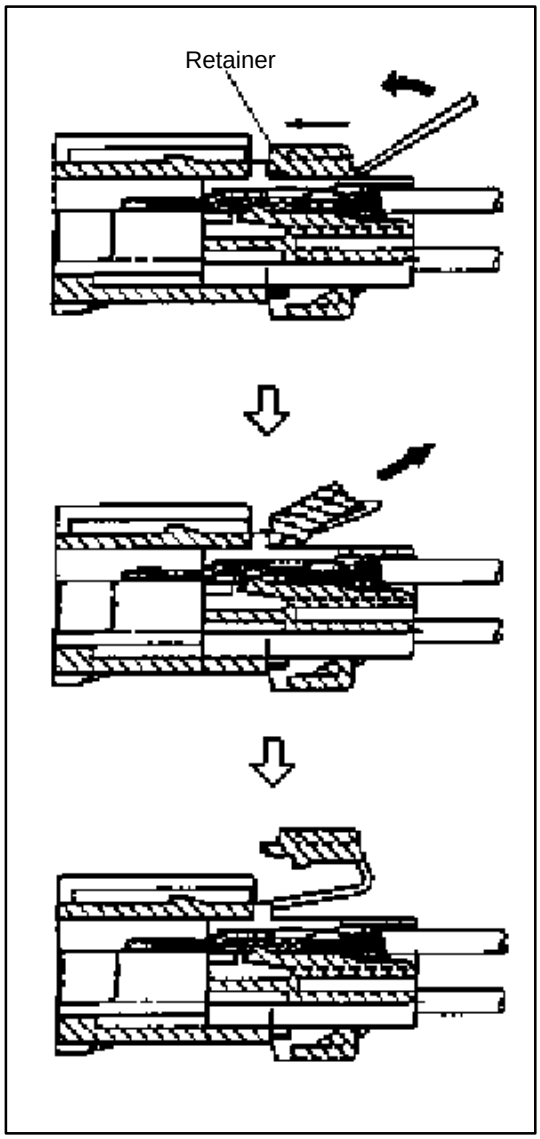

(2) Move the special tool to the direction of the arrow and release the lock.

HINT: Lift the retainer up after moving it to the direction of the thin arrow shown in the illustration.

(3) Pull the retainer forward by hand and remove the retainer from the housing.

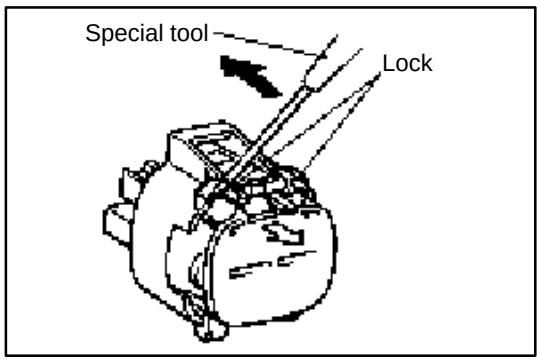

Type G

- Insert the special tool into the position shown in the illustration. Pry it to the direction of the arrow and push the lock up to release it.

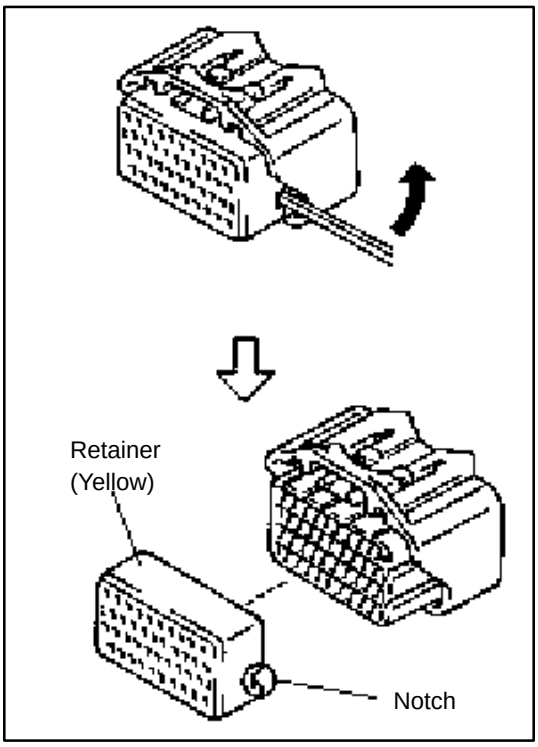

Type H (For 1.0II Type Connector)

(1) Move the special tool into the notch of the retainer to the direction of the arrow with the edge of the housing as the fulcrum. Then the pull the retainer out.

NOTICE:
Do not insert the special tool into areas except notches. (This may damage the seal ring that is attached behind the retainer.)

(2) As same as the procedure (1), pull the retainer straight out using hand after releasing the lock on the other side.

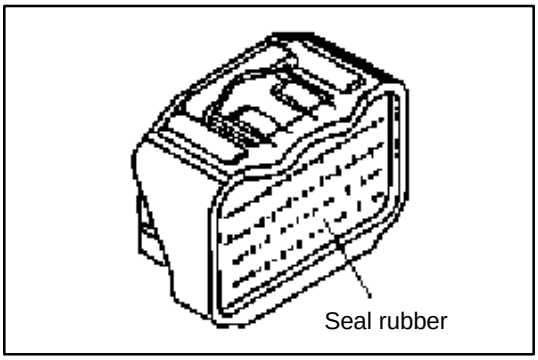

NOTICE:
- **Do not remove the seal rubber when pulling the terminal out.**
- **If the seal rubber is peeled off when puling the terminal out, press it down to stick it to the original condition.**
- **Be sure and not fit the connector when the retainer is not installed**.

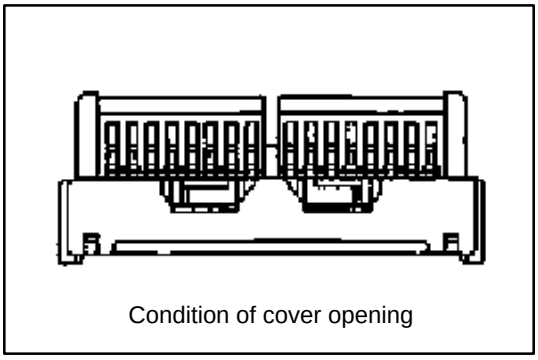

Type I (For SFPC Type Connector)

(1) Open the cover (white)

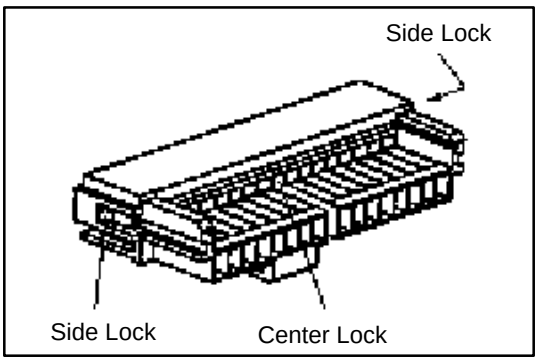

(2) Remove the side lock of the retainer. (One side)

(3) Remove the center lock of the housing.

(4) Remove the side lock of the retainer. (The other side)

NOTICE:
- **Following the above order is not required.**
- **No center lock on the housing with ten poles.**

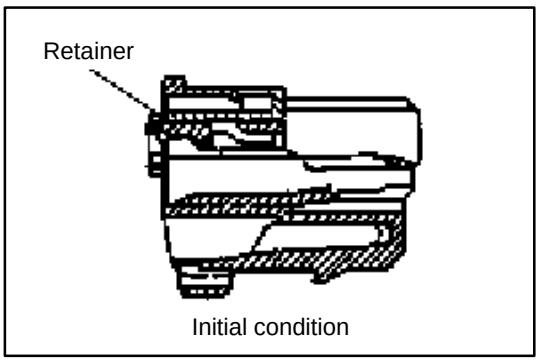

(5) Move the retainer until it becomes the initial condition.

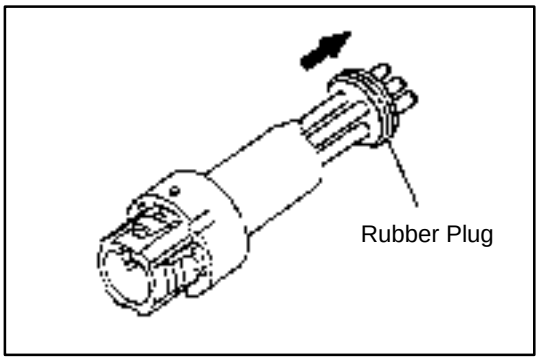

Type J

[Male]

(1) Remove the rubber plug.

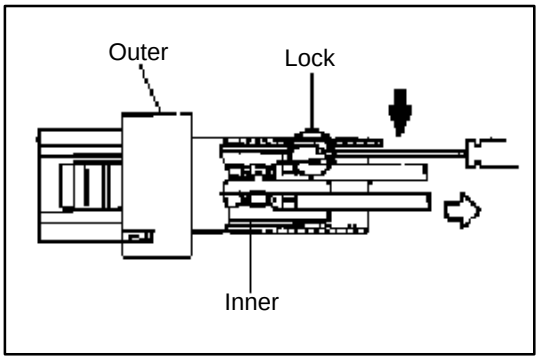

(2) Push the lock of the inner using the special tool.

(3) Pull the wire to the direction of the arrow pushing the lock up and remove the inner from the outer.

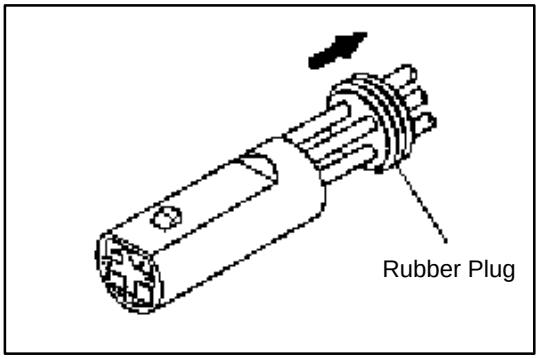

[Female]

(1) Remove the rubber plug.

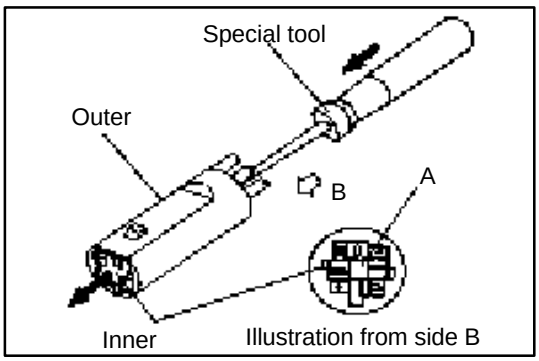

(2) Insert the special tool into the outer shown in the illustration. Then push the area A of the inner and remove the inner from the outer.

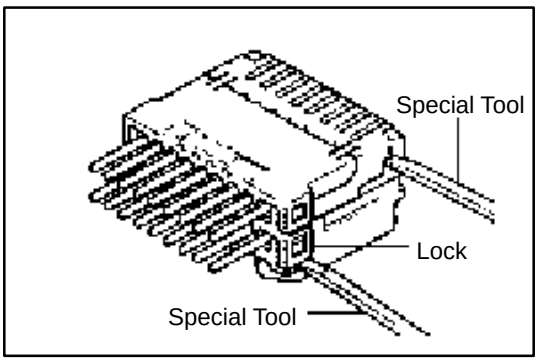

Type J (For Insulation Displacement Connector)

(1) Separate Connector

Using a special tool, release the lock and separate the connector into 2.

NOTICE:
Do not apply too muck force to the lock arm.

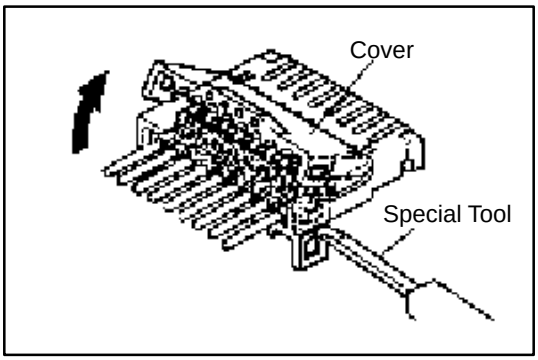

(2) w/ Cover : Open Connector Cover

Using a special tool, release the lock and open the cover.

NOTICE:
Do not apply too much force to the lock arm.

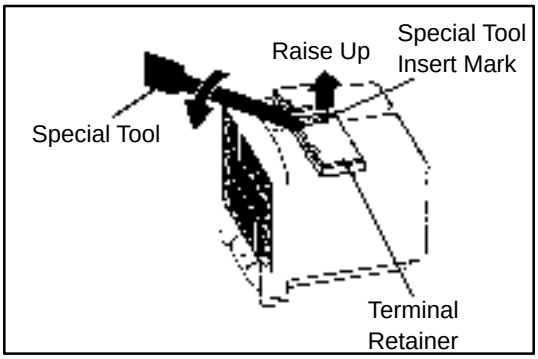

Type K (0.64 Type Connector)

(1) Using the special tool, raise the retainer up to the temporary lock position.

HINT: The needle insertion position varies according to the connector's shape (number of terminals, etc.), so check the position before inserting it.

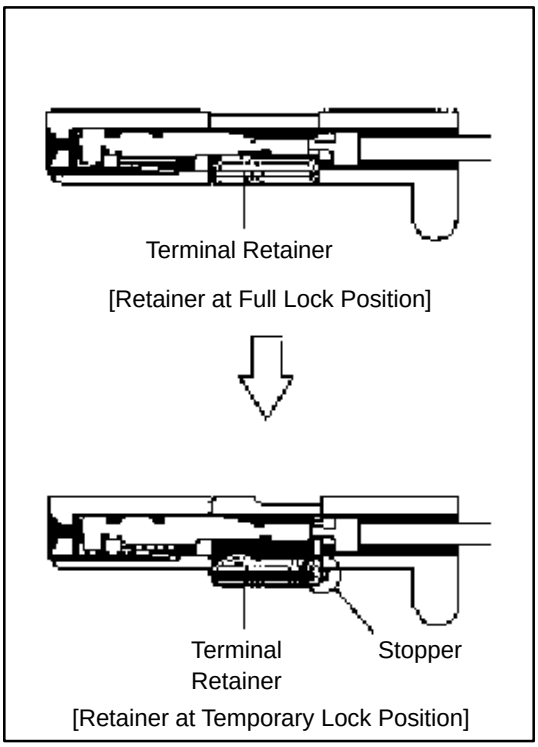

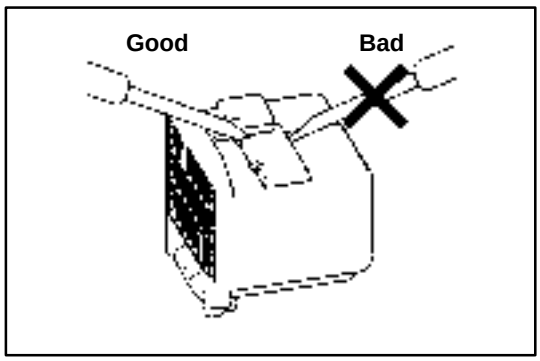

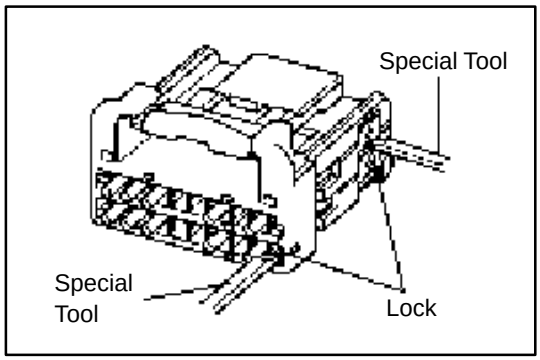

Type L (0.64 of Insulation Displacement Connector (IDC) Type)

(1) Remove the Lower Housing

Using a special tool, release the lock and remove the lower housing.

NOTICE:

- **Do not apply too much force to the lock arm.**
- **Mark the upper housing and lower housing to prevent mistakes when putting them together.**

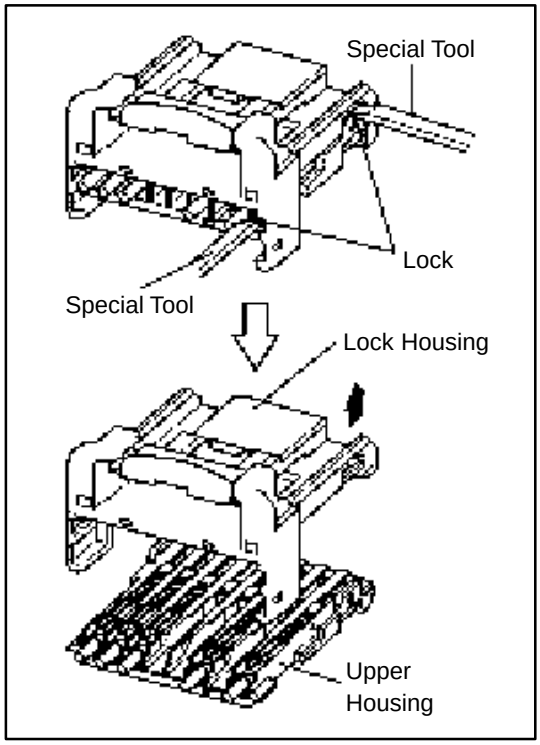

(2) Remove the Upper Housing

Using a special tool, release the lock and remove the upper housing from the lock housing.

NOTICE:

- **Do not apply too much force to the lock arm.**
- **Mark the upper housing and lower housing to prevent mistakes when putting them together.**

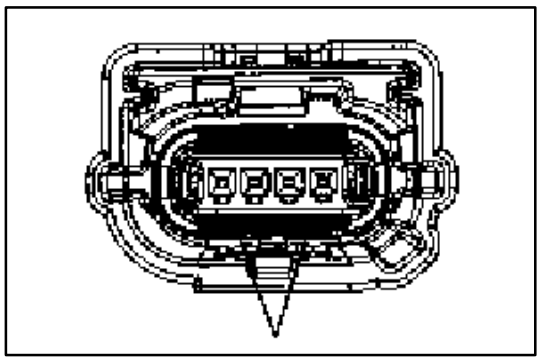

Type M (0.64 of Splash Proof Connector)

(1) Release Terminal retainer.
Insert Special Tool at the location shown in the figure left.

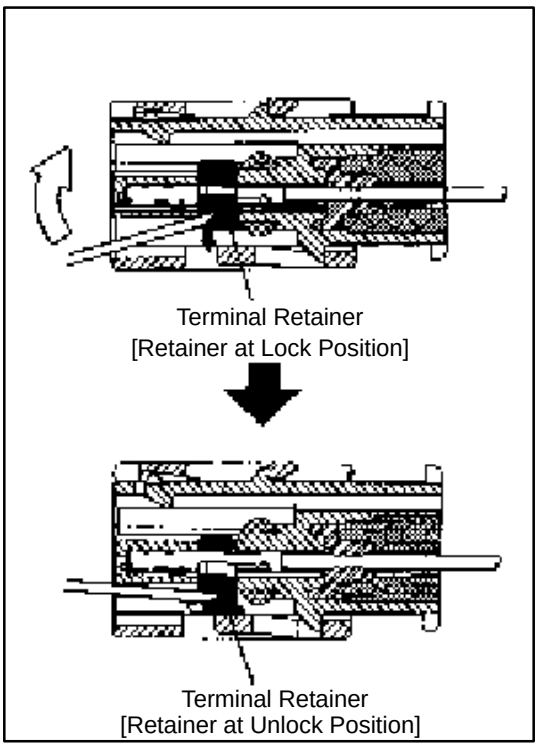

Move Special Tool in the direction of arrow.

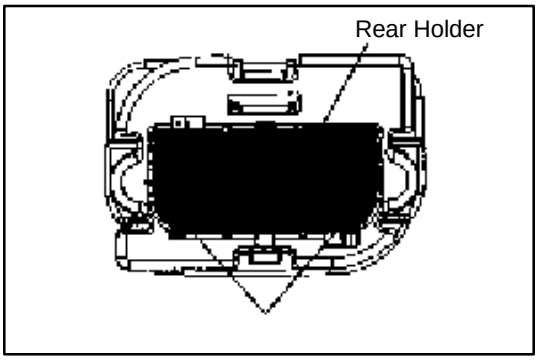

(2) Release Rear holder.
Insert Special Tool at the location shown in the figure left.

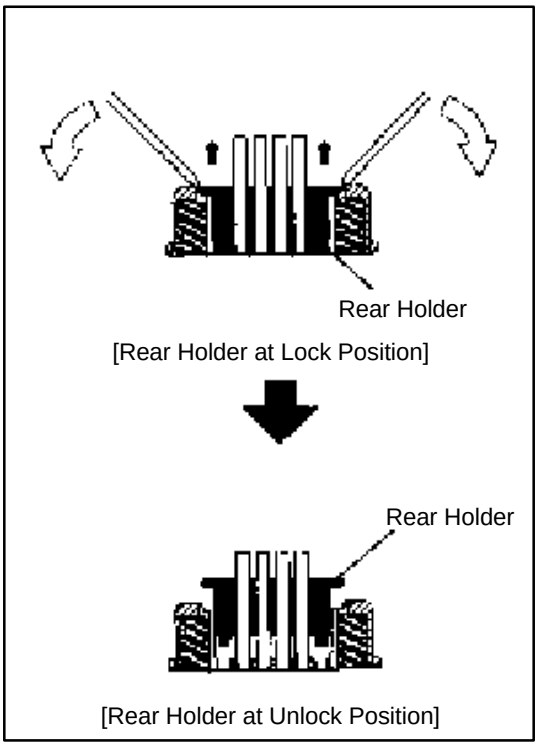

Move Special Tool in the direction of arrow.

NOTICE:

- **Do not remove Rear holder from Connector housing.**
- **If Rear holder completely comes off the housing, replace Connector with a new one.**

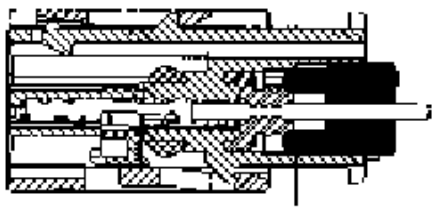

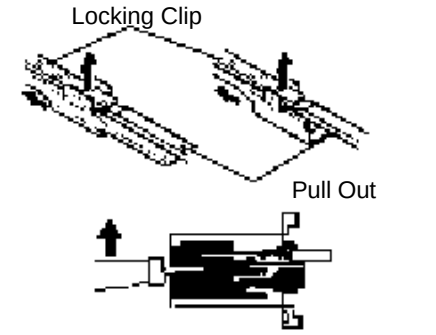

4. Disconnect Terminal from Connector

(a) Determine the primary locking system from the charts.
1. Lock Located on terminal
2. Lock Located on connector
3. Method of entry and operation

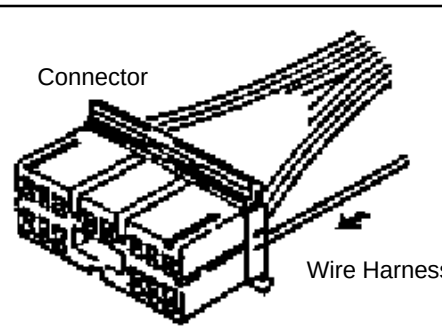

(b) Push the terminal gently into the connector and hold it in this position.

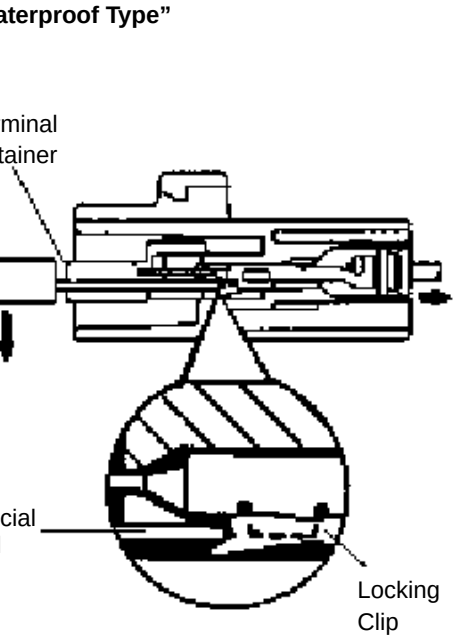

(c) Insert the special tool into the connector in the direction shown in the chart.

(d) Move the locking clip to the unlock position and hold it there.

NOTE: Do not apply excessive force to the terminal. Do not pry on the terminal with the special tool.

(e) Carefully withdraw the terminal from the connector by pulling the lead toward the rear of the connector.

NOTE: Do not use too much force. If the terminal does not come out easily, repeat steps (a) through (e).

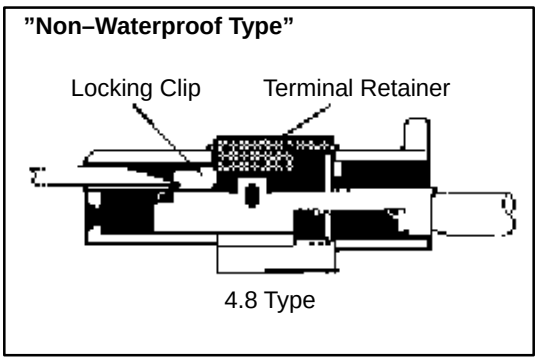

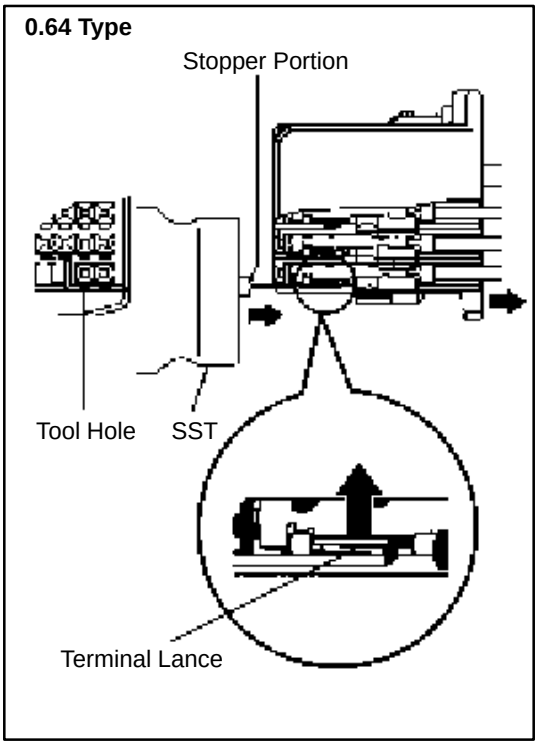

(f) Insert the SST into the connector in the direction shown in the chart.

(g) Insert the SST fully to the tool hole, and push the terminal lance.

NOTICE:

- **The terminal has a lance shape, therefore, the housing may be damaged and the terminal may get stuck if forcibly pried by wires etc.**
- **Insert the SST so that the stopper portion surface is facing up.**

(h) Carefully withdraw the terminal from the connector by pulling the lead toward the rear of the connector.

NOTICE:
Removal of the terminal from housing cavity will cause damage to the wire seal section, deteriorating waterproofing performance. Replace the connector with a new one.

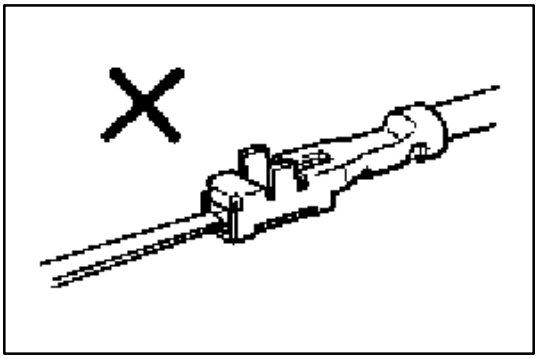

NOTICE:
Do not insert the special tool into the female terminal box. If you do so, replace the terminal with the new one whether the terminal is broken or not.

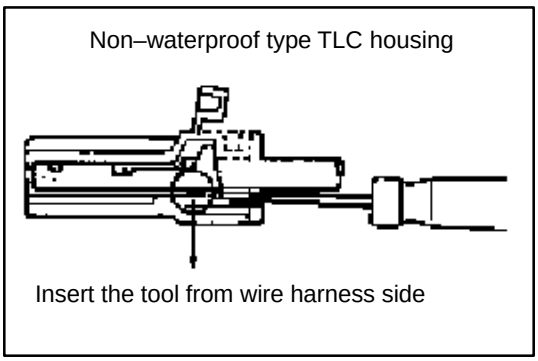

NOTICE:
As for Non–waterproof type TLC housing, insert the special tool into the housing from wire harness side.

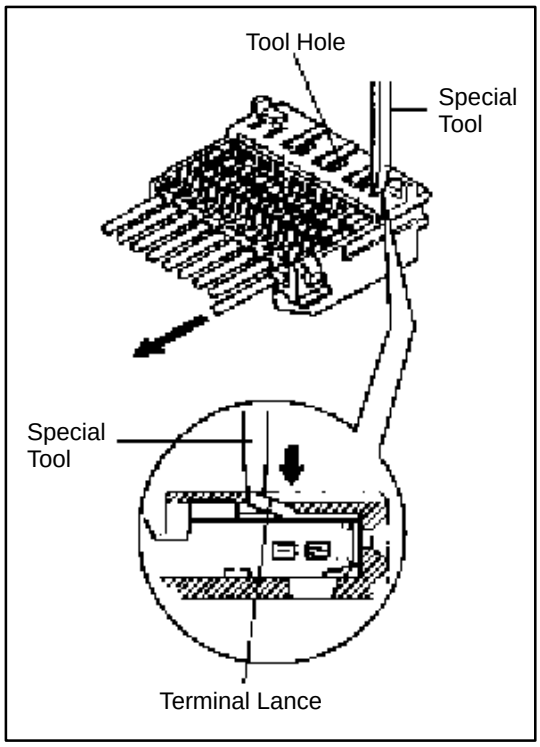

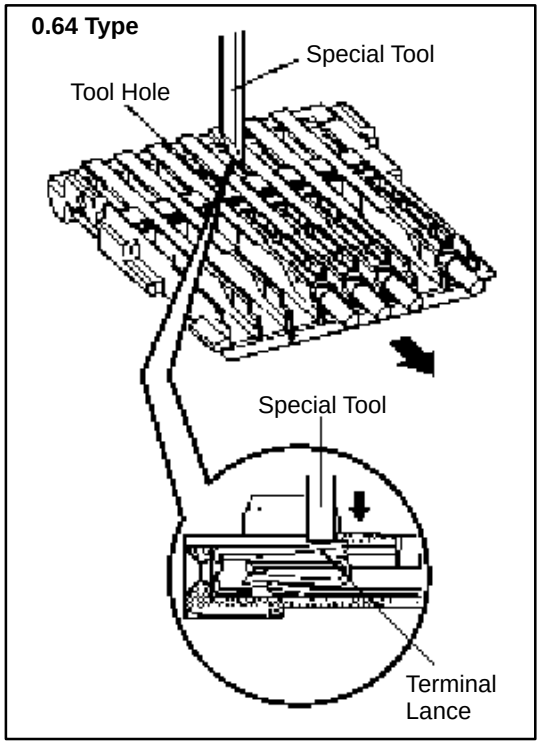

Insulation Displacement Connector Type

(a) Using a special tool, push the terminal lance from the tool hole.

(b) Carefully withdraw the terminal from the connector by pulling the lead toward the rear of the connector.

NOTICE:

- **Do not use too much force. If the terminal does not come out easily, repeat step (a).**
- **Always change the wire with the repair wire, in accordance with page B–27.**

Terminal Deformation

(1) Terminal Bending in Vertical Direction



1° or less



1° or less

(2) Terminal Bending in Horizontal Direction

3° or less

5. Inspect the terminal and the connector for damage.

NOTE:
- The locking clip is easily damaged.
- Do not reuse the damaged part.

Step 3. Replace the terminal.

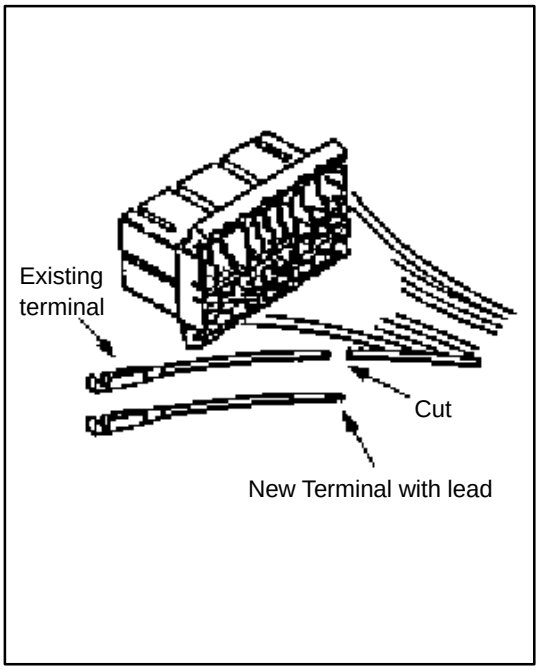

1. Cut the Old Terminal from the Harness.

(a) Use the new wire lead as a guide for proper length.

NOTE: If the length of wire removed is not approximately the same length as the new piece, the following problems may develop:

- Too short — tension on the terminal, splice, or the connector, causing and open circuit.
- Too long — excessive wire near the connector, may get pinched or abraded, causing a short circuit.

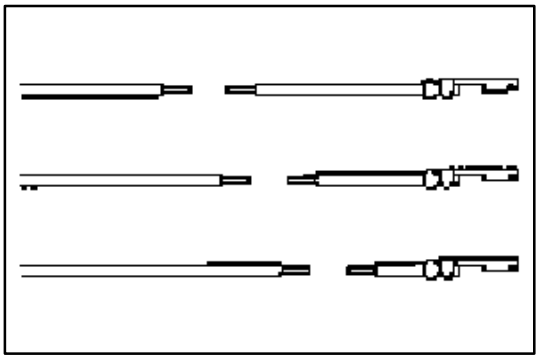

HINT: When connecting a wire harness at there or more spots to the same connector, cut the wire harness as shown on the left.

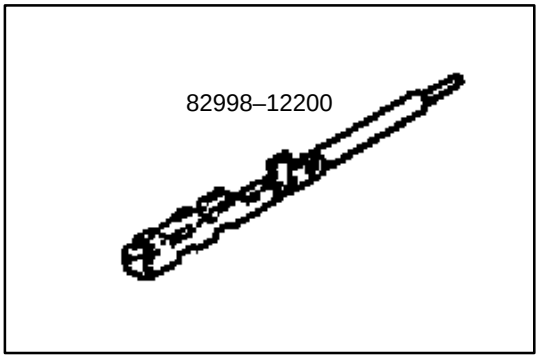

2. Select the correct replacement terminal with lead, from the supply parts.

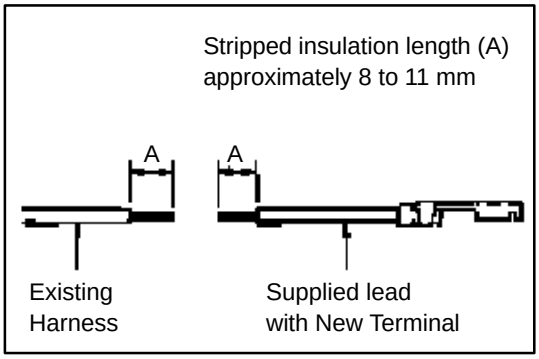

3. Strip insulation from wire on the harness and replacement terminal lead.

Start stripping at least 8 mm (0.31 in.) to 11 mm (0.43 in.) away from the end of the existing harness at vehicle side and also from the end of the repair wire.

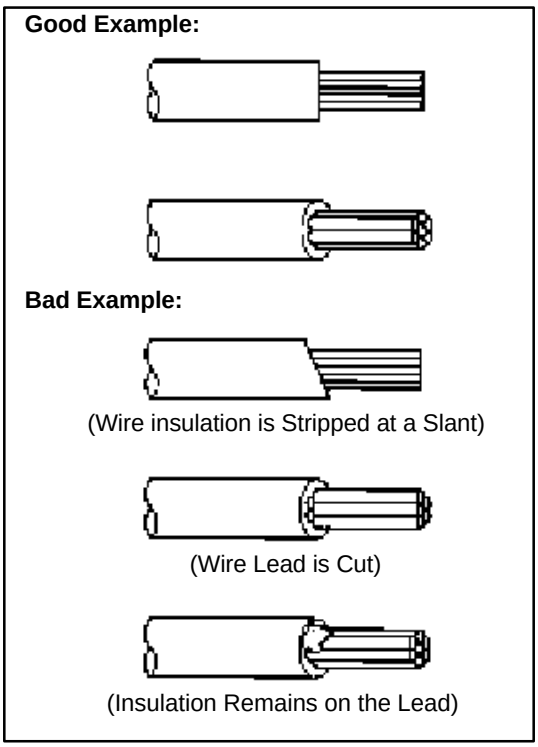

NOTICE:
Take care not to damage the wire when stripping the wire harness lead. After finishing the operation, visually inspect the wire. If there is any damage, perform the operation again.

HINT:
If the wire size is not known, start with largest stripper hole and work down until a clean strip of the insulation is removed without nicking or cutting the wire lead.

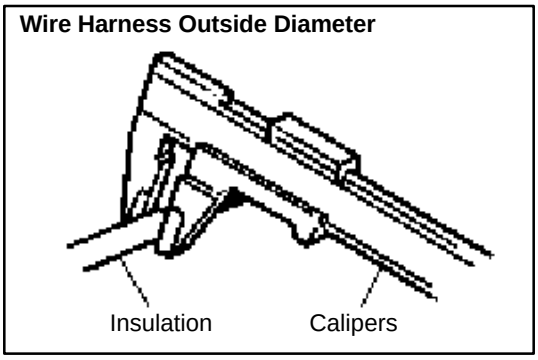

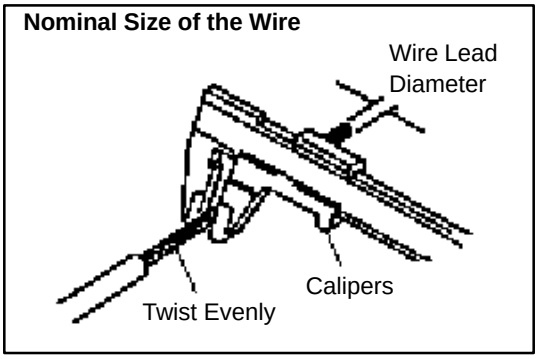

4. Select Correct Size of Sleeve from the Supply Parts.

(a) Measure the diameter of wire by using the measuring device as following:

- When size is based on the outside diameter of the wire harness

  Measure the outside diameter of the wire harness by placing a measuring device, such as a micrometer or Vernier Caliper, across the diameter of the insulation on the lead and taking a reading.

- When size is based on the nominal size of the wire lead.

  Measure the diameter of the wire lead by placing a measuring device, such as a micrometer or Vernier Caliper, across the diameter of the wire lead and taking a reading.

HINT:
To calculate the ”nominal size” of wire

$$\text{Nominal size} = \frac{3.14 \times (\text{Diameter of wire lead})^2}{4}$$

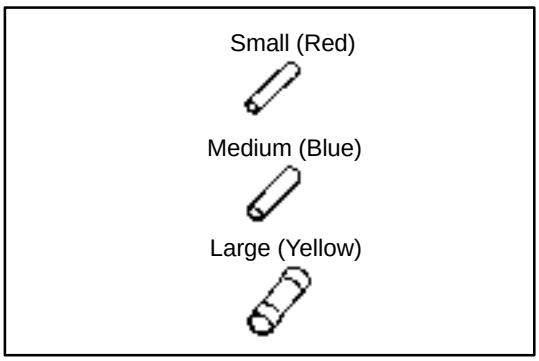

(b) Use the table to determine proper sleeve size

	Part Number	Nominal size of wire (Outside Diameter of wire)
Small	82999–12010	0.3 or less (1.0 – 0.2 mm)
Medium	82999–12020	0.5 – 1.25 (2.0 – 1.0 mm)
Large	82999–12030	2 or more (5.0 – 3.0 mm)

NOTE: For details, refer to sleeve size table on item 4 of STEP 1

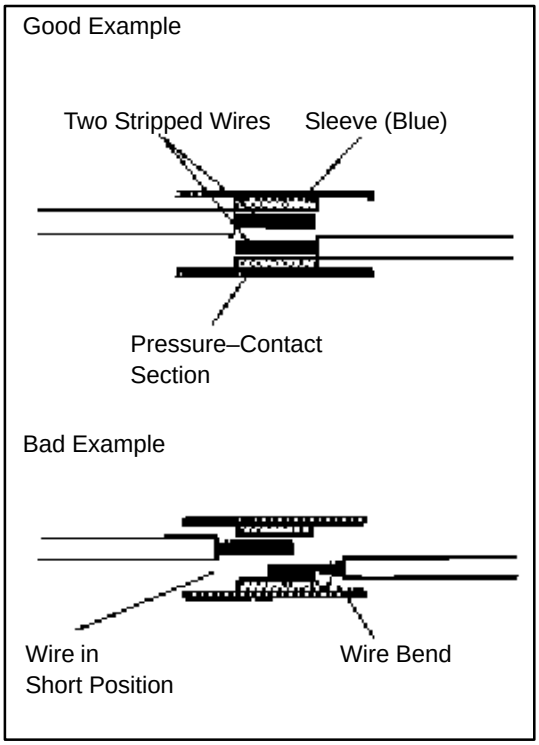

5. Crimp the Replacement Terminal Lead to the Harness Lead.

(a) Overlap the two stripped wire ends inside the sleeve as illustrated on the left.

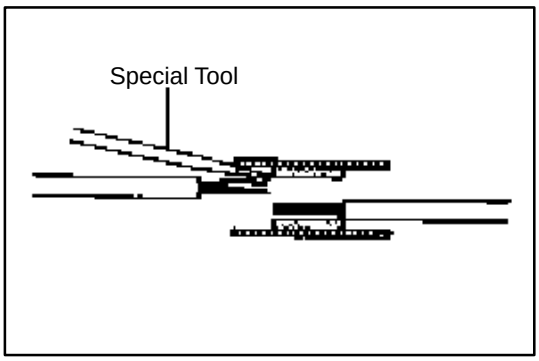

HINT: You might find it easier if you use a miniature special tool as a guide as you insert wires into the sleeve.

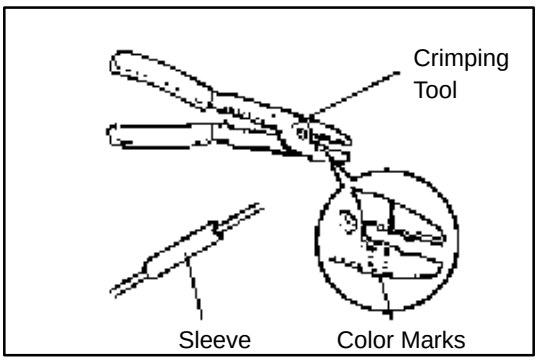

(b) The crimping tool (AMP Part No. 169060) has color marks on it. Place the sleeve in the correct section of the tool according to the color of the sleeve itself.

HINT: For the crimping tool, AMP ”Part No. 169060” is convenient to use.

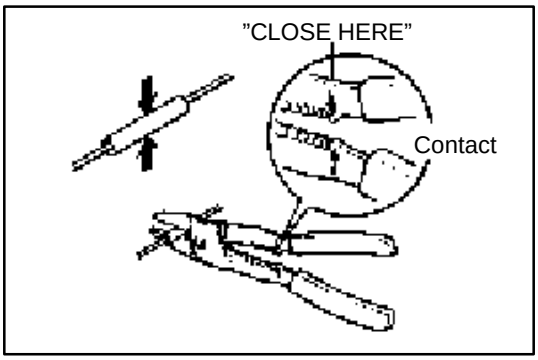

(c) With the center of the sleeve correctly placed between the crimping jaws, squeeze the crimping tool until either end comes into contact at the section marked by ”CLOSE HERE”.

HINT: Check to see that the sleeve and wires are still in the correct position before closing the crimping tool ends with steady pressure.

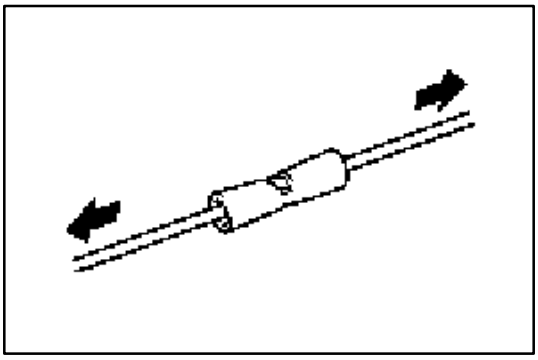

(d) Pull the joined wires to either end. Make sure that they are joined firmly by the sleeve.

NOTICE:
If the joined wires come loose the splice is defective, so replace the sleeve and repeat the procedure.

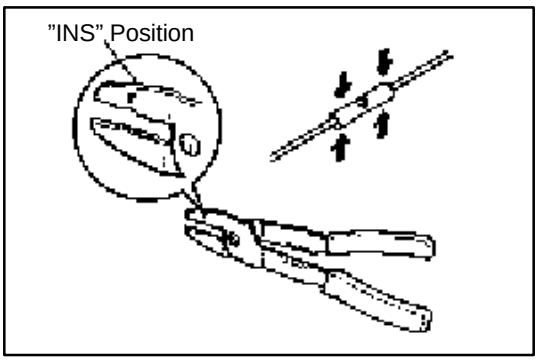

(e) Crimp both ends of the sleeve with the crimping tool at the ”INS” position.

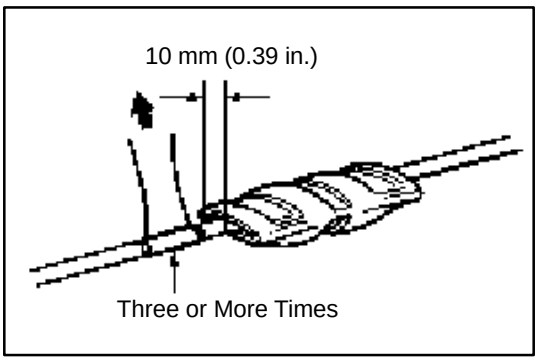

6. Protect Joined Section

Wrap silicon tape around the joins to protect them from moisture.

NOTE: This job is required in repairs of the engine compartment, under the floor and other moisture entry positions.

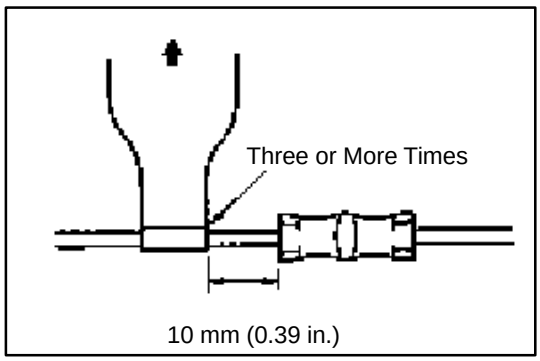

HINT:

- Before starting the operation, thoroughly wipe dirt and grease off the sections to be joined.
- If the adhesive surfaces of two tapes come in contact they will stick together and will not come apart, so do not remove the backing film except when using the tape.
- Do not let oil and dust, etc. get on the tape surface.

(a) Ready about 100 mm (3.94 in.) of silicon tape (Part No. 08231–00045) and peel off the film.

(b) Stretch the silicon tape until its width is reduced by half.

(c) About 10 mm (0.39 in.) from the end of the sleeve, wrap the silicon tape around the sleeve three or more times while stretching the tape.

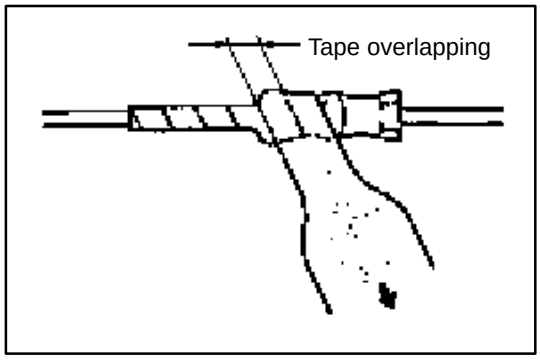

(d) Wrap the remaining part of the sleeve with half of the tape overlapping at each turn.

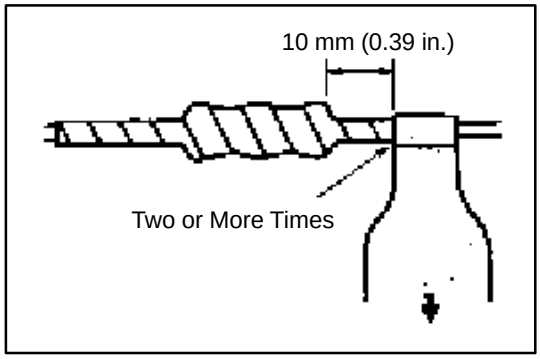

(e) Firmly wrap the tape two times or more about 10 mm (0.39 in.) from the other end of the sleeve, then wrap the tape back towards the start again and firmly finish winding the tape around the center of the sleeve.

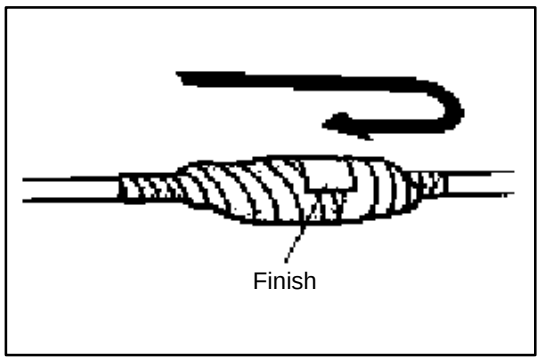

Step 4. Install the terminal into the connector.

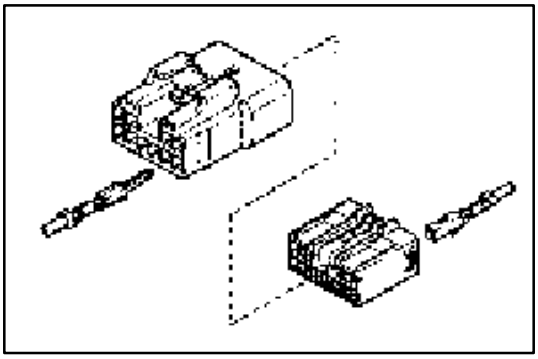

HINT:

(a) Make sure the terminal is positioned correctly.

(b) Insert the terminal until the locking clip locks firmly.

(c) Insert the terminal with terminal retainer in the temporary lock position, if equipped.

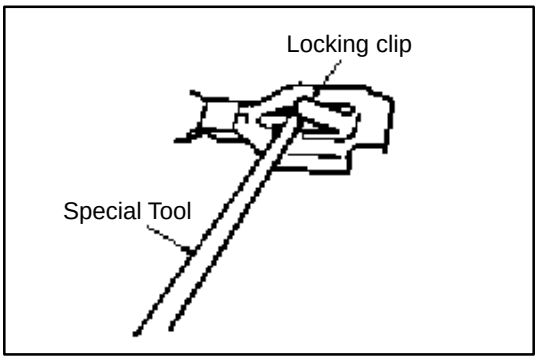

NOTE: If reusing a terminal, check that the locking clip is still in good condition and in the proper position.

(a) If it is on the terminal and not in the proper position, use the special tool to gently bend the locking clip back to the original shape.

(b) Check that the other parts of the terminal are in their original shape.

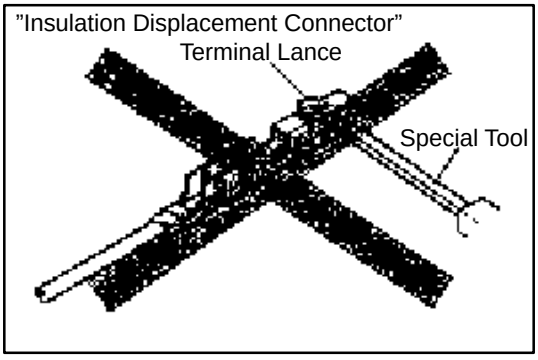

NOTICE:
Do not readjust or reuse the terminal lance of the insulation displacement connector type terminal. Always change the wire with the repair wire.

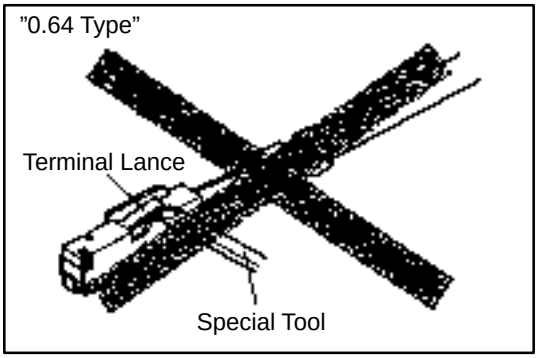

NOTICE:
As for 0.64 type terminal, do not adjust the terminal lance with the special tool.

Splash Proof Type Connector

NOTICE:

- **Removal of the terminal from housing cavity will cause damage to rubber plug material (the wire seal), deteriorating waterproofing performance. Be sure to replace the housing with a new one.**
- **Check the withdrawn terminal for the following if trying to use it again.**
  - **It is free of deformation and damage**
  - **It is free of adherents such as rubber plug material (wire seal)**
  - **Replace any deformed terminal.**

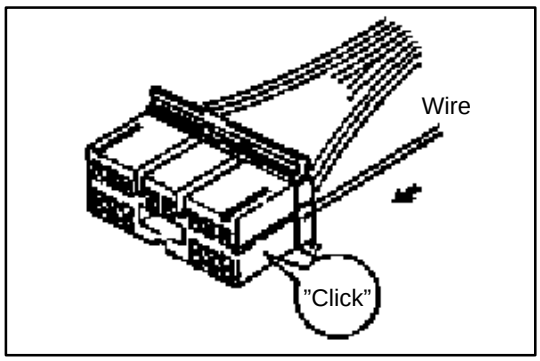

1. **Push the Terminal into the Connector until you hear a ”click”.**

   NOTE: Not all terminals will give and audible ”click”.

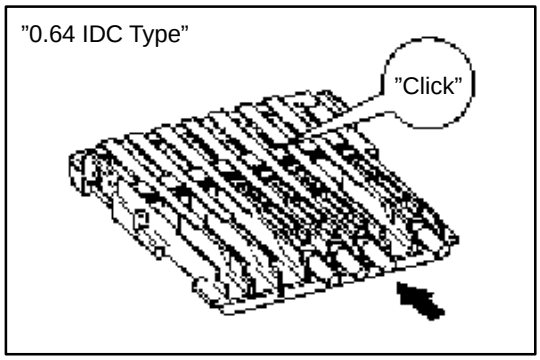

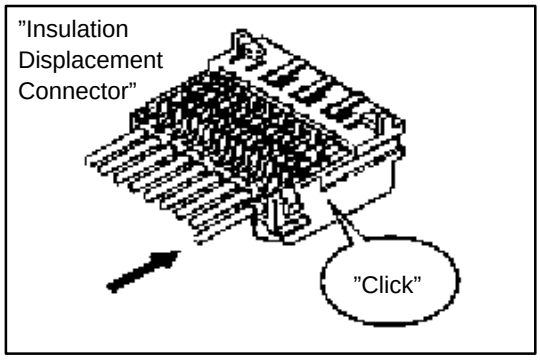

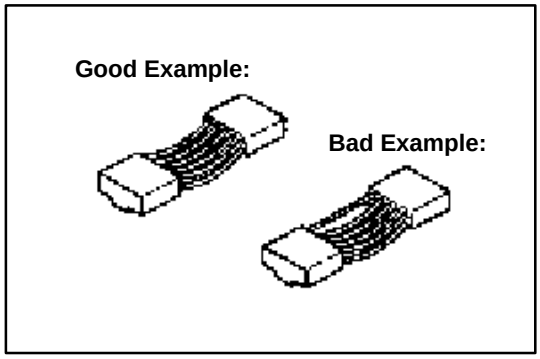

NOTICE:

- **After repairing, never let only one harness stretch.**
- **In cese that it becomes short, do over again using the repair wire.**

2. Double Locking Type Connector (with terminal retainer or double locking device)

The connector is fitted with a terminal retainer, or a double locking device, it is in the temporary lock position at insert the terminal.

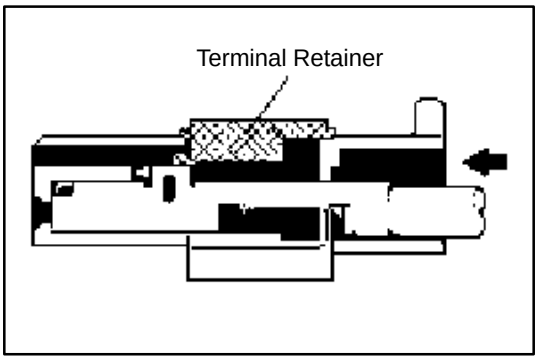

Type A (For 1.0, 1.0II, 1.3, 1.8, 2.3II 4.8 and 8.0 of Non–Waterproof Type Connector)

(a) Insert the terminal.

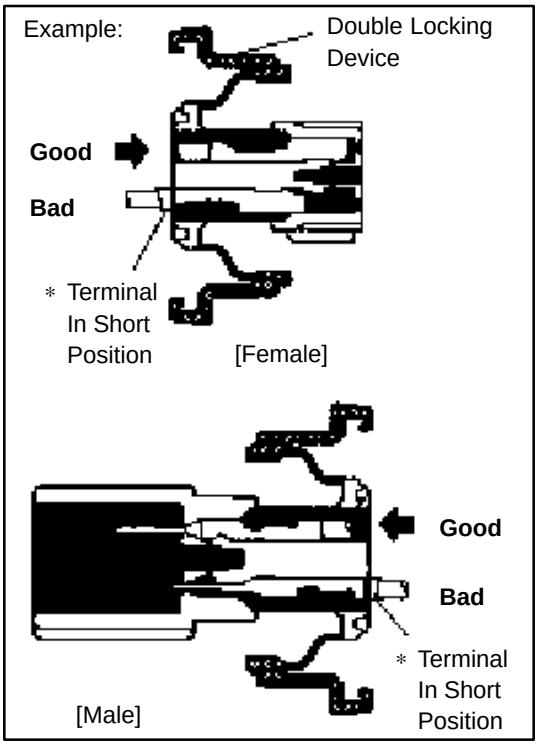

HINT:
1. Make sure the terminal is positioned correctly.
2. Insert the terminal with terminal retainer in the temporary lock position.

(b) Insert the terminal until the locking clip locks firmly.

HINT:
1. Pull the terminal back gently to check whether it is locked correctly.
2. If it cannot be inserted easily, check the terminal and the connector for damage.

NOTE: If the terminal to locking clip does not lock firmly, the double locking device cannot lock or terminal retainer does not lock at full lock position so the terminal backs out from connector.

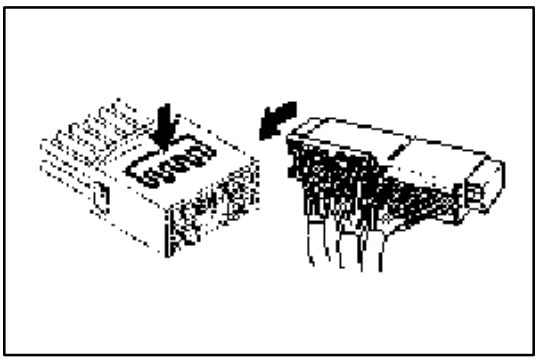

(c) Close terminal retainer or double locking device.

The connector is fitted with a terminal retainer, or a double locking device, return it to the full lock position.

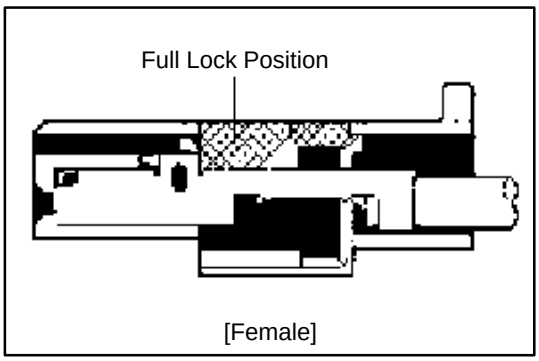

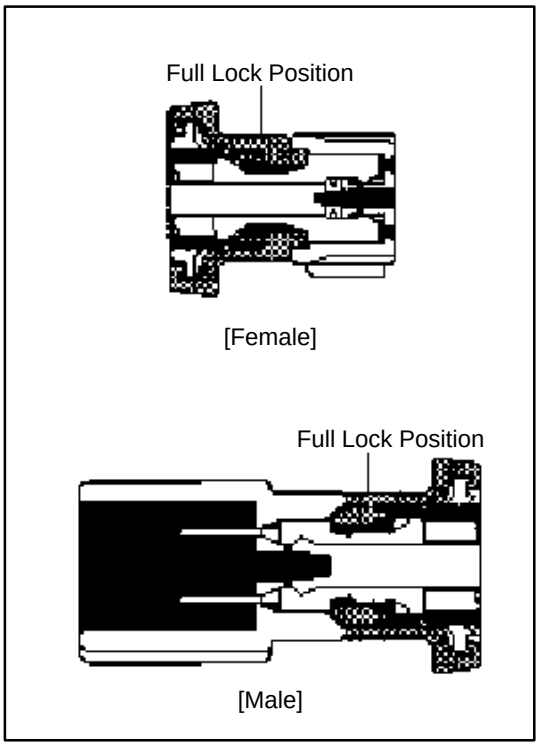

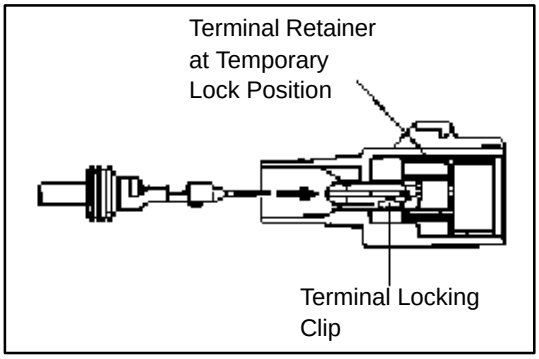

Type B (For 1.8, 2.3, 2.3II, 4.8, 6.3 and 8.0 of Waterproof Type)
(For Male Connector)

(a) Insert the terminal.

HINT:

1. Make sure the terminal is positioned correctly.
2. Insert the terminal with terminal retainer in the temporary lock position.

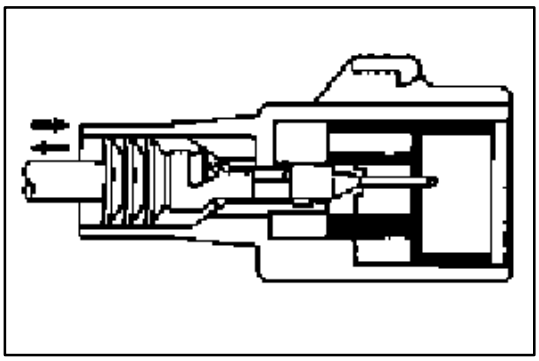

(b) Insert the terminal until the locking clip locks firmly.

HINT:

1. Pull the terminal back gently to check whether it is locked correctly.
2. If it cannot be inserted easily, check the terminal and the connector for damage.

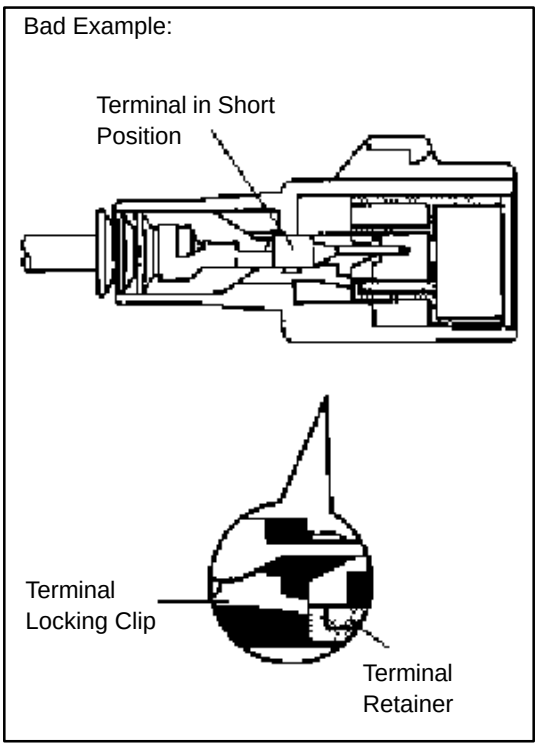

NOTE: If the terminal to locking clip does not lock firmly, terminal retainer can not lock at full lock position so the terminal backs out from connector.

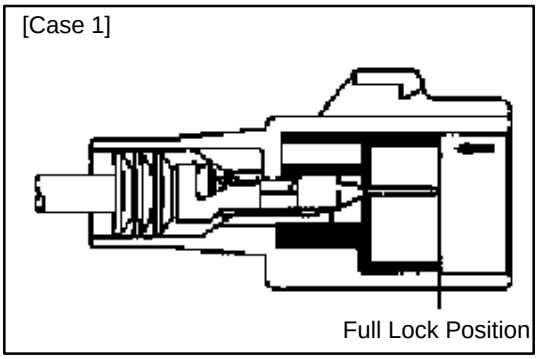

(c) ”For Case 1”
Push the terminal retainer in to the full lock position.

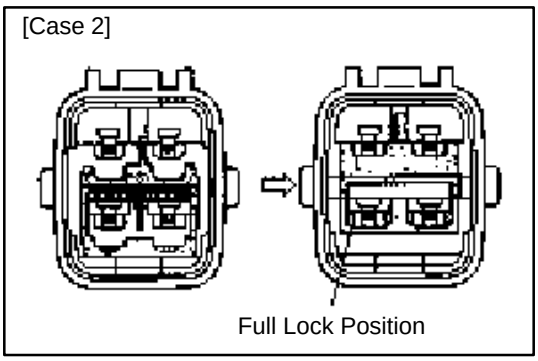

”For Case 2”
Raise the terminal retainer up to the full lock position.

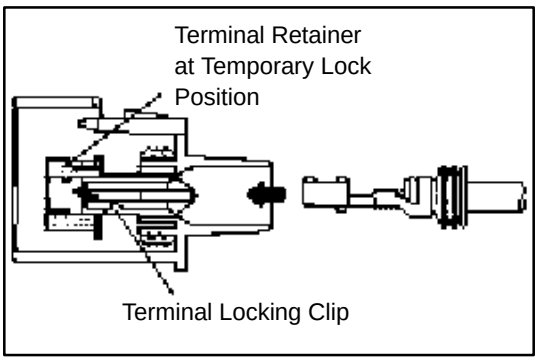

(For Female Connector)

(a) Insert the terminal.

HINT:

1. Make sure the terminal is positioned correctly.
2. Insert the terminal with terminal retainer in the temporary lock position.

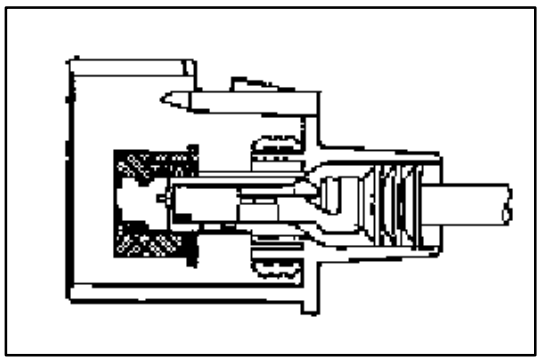

(b) Insert the terminal until the locking clip locks firmly.

HINT:

1. Pull the terminal back gently to check whether it is locked correctly.
2. If it cannot be inserted easily, check the terminal and the connector for damage.

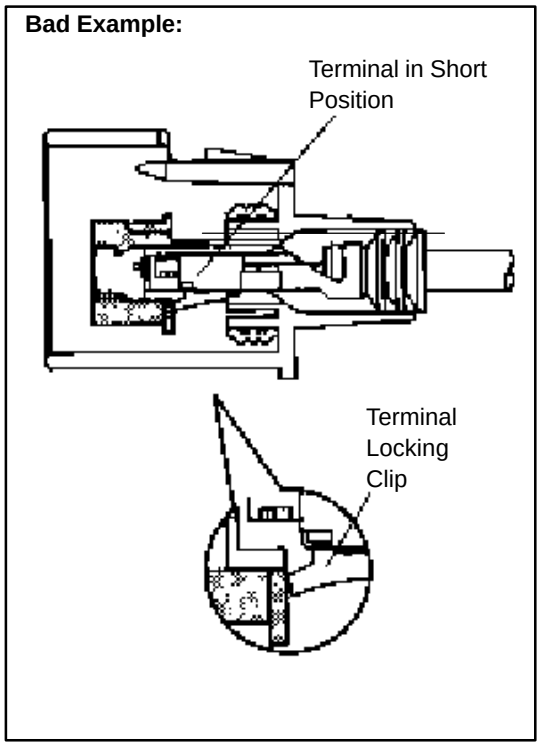

NOTE: If the terminal to locking clip does not lock firmly, terminal retainer can not lock at full lock position so the terminal backs out from connector.

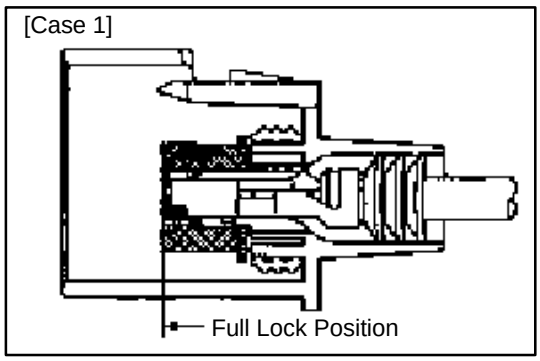

(c) ”For Case 1”
Push the terminal retainer in to the full lock position.

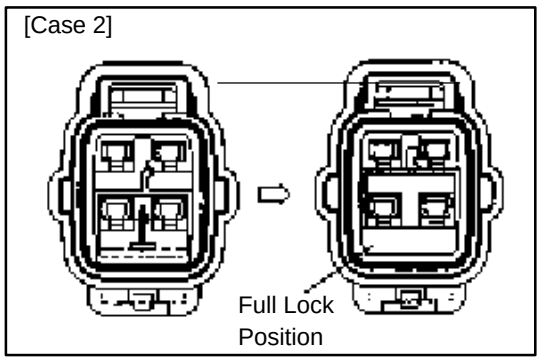

”For Case 2”
Raise the terminal retainer up to the full lock position.

Temporary Lock Position

Type C (For 0.64 Type Connector)

(a) Insert the terminal.

HINT:
1. Make sure the terminal is positioned correctly.
2. Insert the terminal with terminal retainer in the temporary lock position.

(b) Insert the terminal until the terminal lance locks firmly.

HINT:
1. Pull the terminal back gently to check whether it is locked correctly.
2. If it cannot be inserted easily, check the terminal and the connector for damage.

NOTE: If the terminal to terminal lance does not lock firmly, the double locking device cannot lock or terminal retainer does not lock at full lock position so the terminal backs out from connector.



(c) Close terminal retainer.

The connector is fitted with a terminal retainer, return it to the full lock position.

Full Lock Position

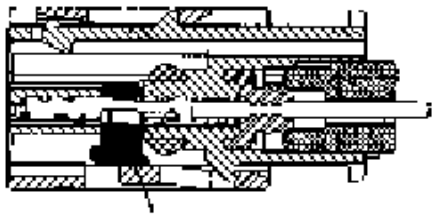

Terminal Retainer

Type D (For 0.64 Splash Proof Type Connector)

(a) Verify that the terminal retainer is at unlocked position.

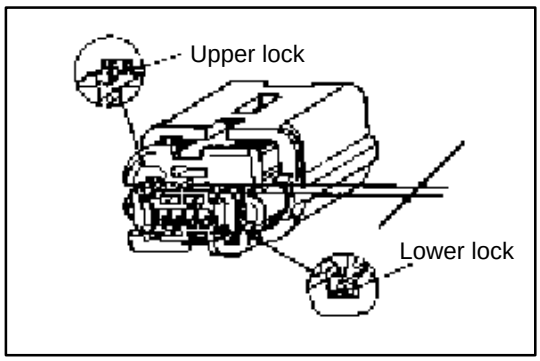

(b) Verify that Rear Holder is at unlocked position.

NOTICE:
If Rear holder or wire seal has been removed, replace it with new one.

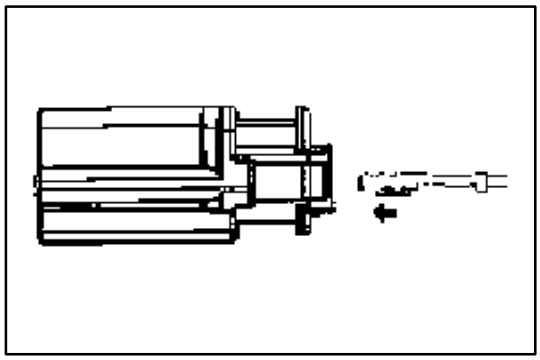

(c) Insert the terminal fully into the housing until it is locked.

HINT: The terminal has a longer insertion stroke than conventional ones.

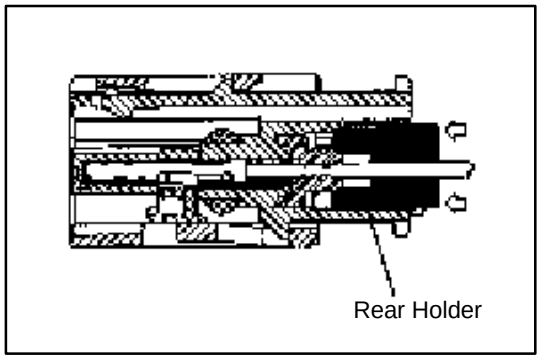

(d) Set Rear holder to locked position.
Push Rear holder in the direction of arrow until it is locked.

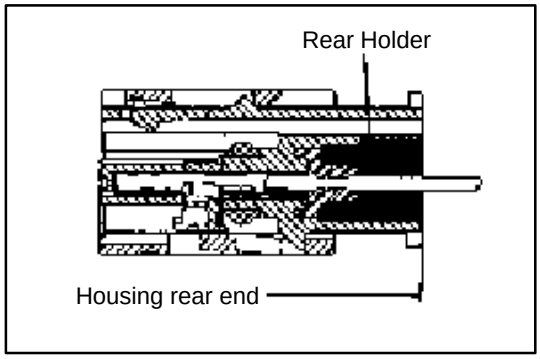

(e) Verify that Rear holder is at the specified position.
The rear end of Rear holder is flush with the rear end of Housing.



Lock check position, upper

Lock normal engagement position

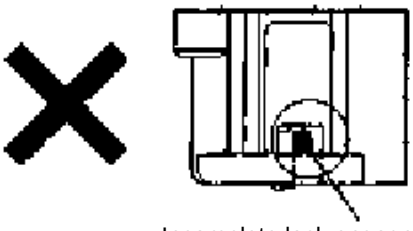

Incomplete lock engagement

Verify that the lock (upper side) is at the specified position under locked status.

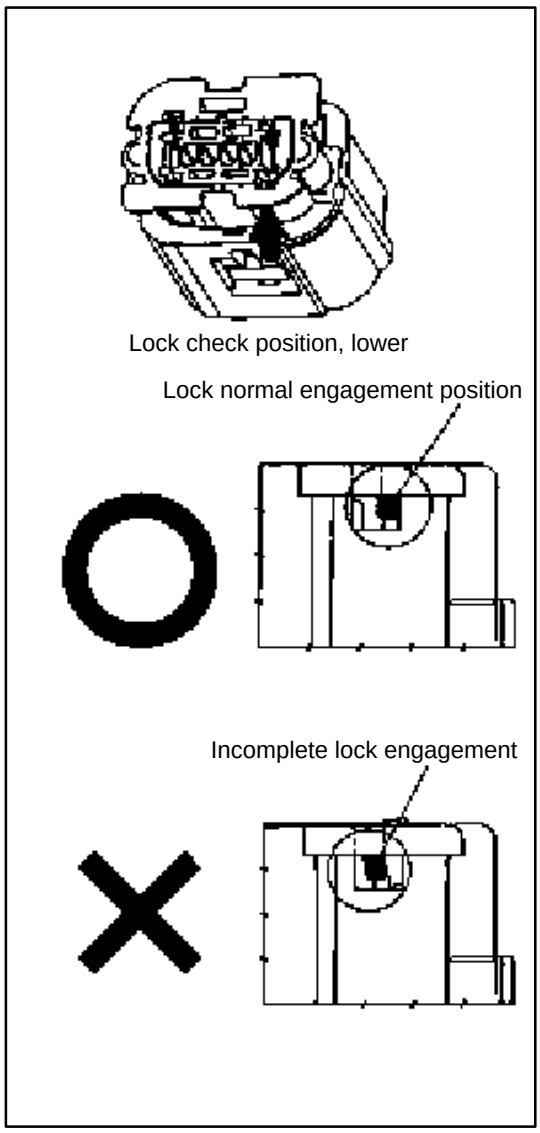

Verify that the lock (lower side) is at the specified position under the locked status.

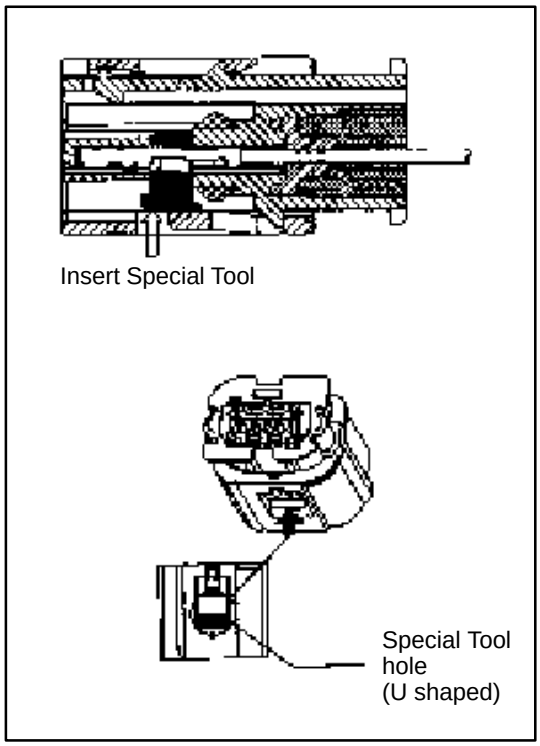

(f) Set Terminal retainer to Lock position.
Insert Special tool into the hole specified in the left and push Terminal retainer.

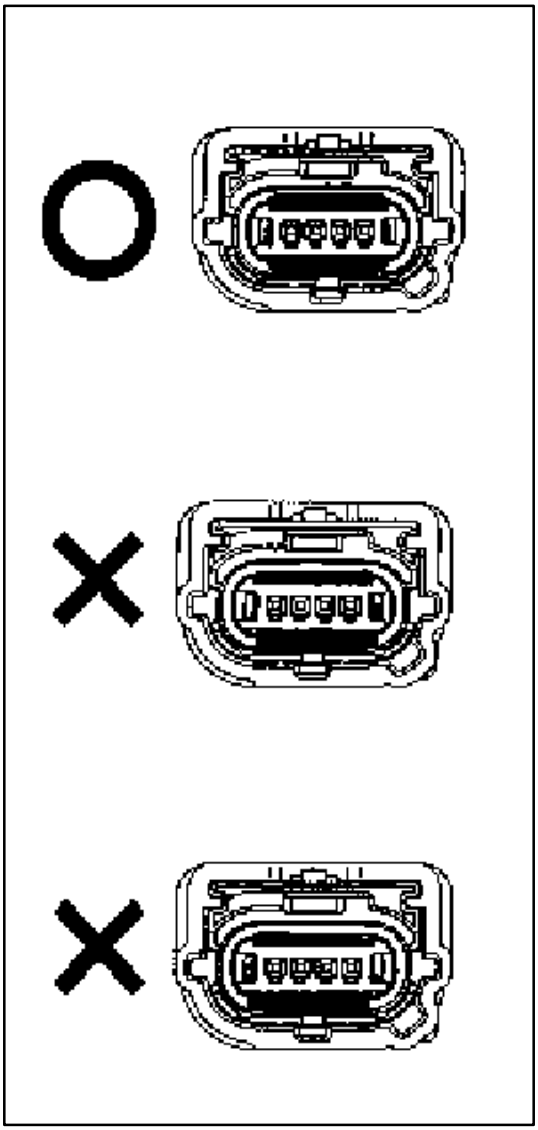

(g) Verify that Terminal retainer is inserted to the specified position.

NOTICE:
If Terminal retainer is stopped at its middle of insertion, holding wire, push Terminal to help it for full insertion.

SPECIAL EXAMPLE

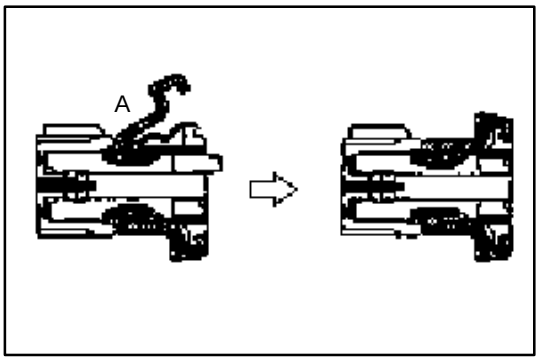

- First fit the section A.

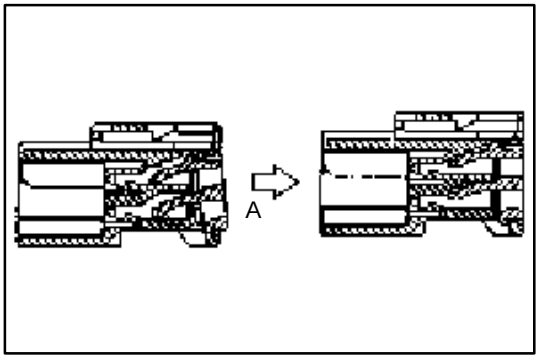

- Install the lock of the section A first.

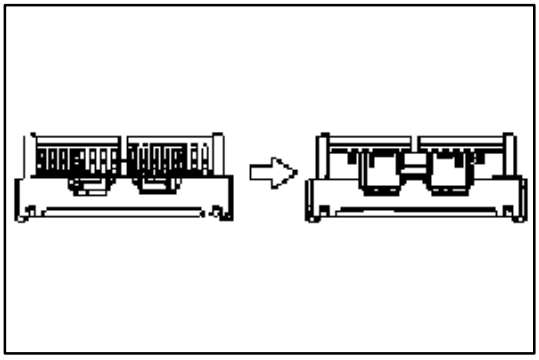

- Install the lock of the retainer and pull the white cover until you hear a click sound.

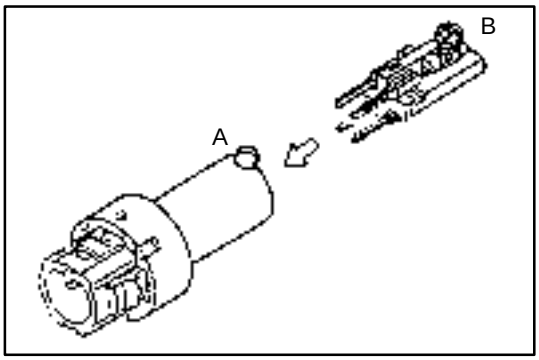

- Install the convex part (A) of the outer part correctly to the section B of the inner part.

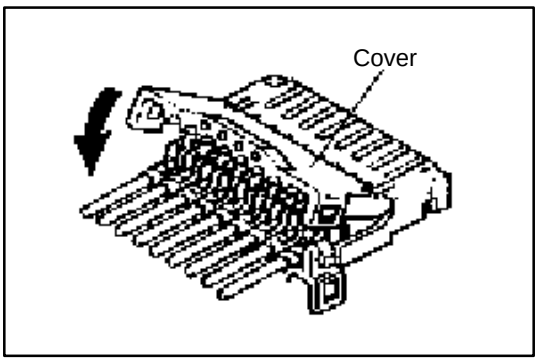

Insulation Displacement Connector

w/ Cover : CLOSE COVER

NOTICE:
Securely lock it

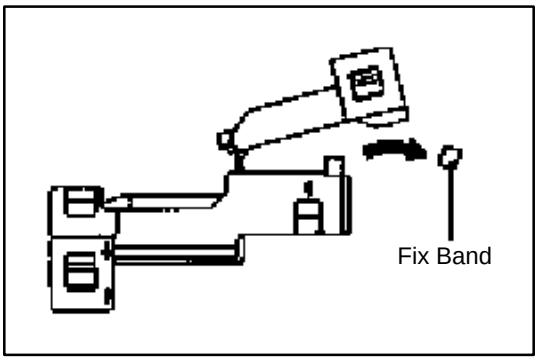

HINT:
When replacing it to a new connector, cut off the fixing band without leaving it.

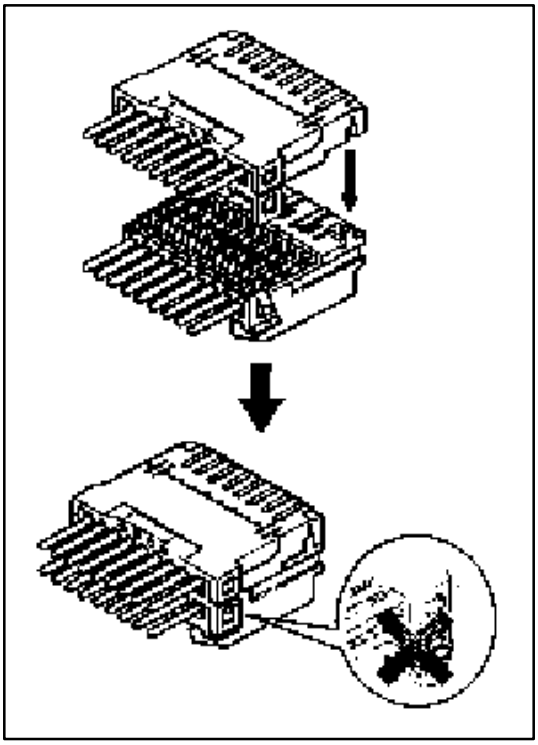

UNITE CONNECTOR

Make the projection of the front lock of the upper housing meet the ditch of the front lock of the lower housing and fix the rear lock.

NOTICE:

- **After uniting, securely lock it for not leaving the rear lock arm deformed.**
- **Make sure that the terminals will not become loose by pulling the wires lightly.**

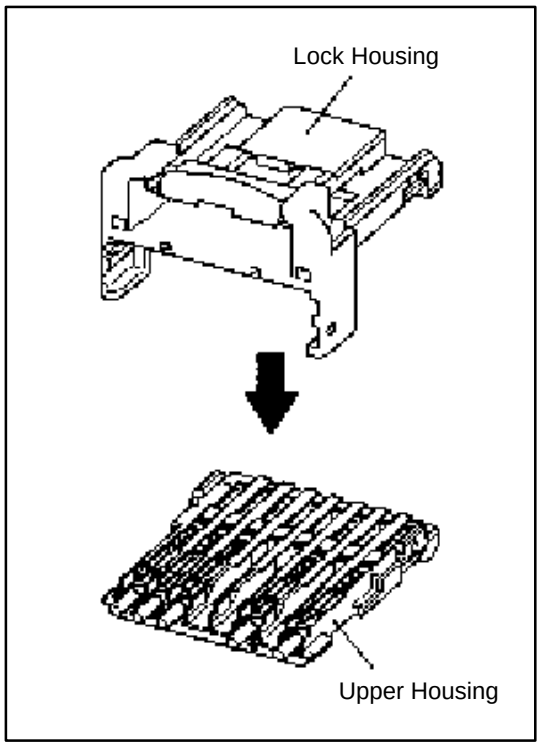

Insulation Displacement Connector (0.64 Type)

(a) Install the upper housing to the lock housing.

NOTICE:
- **Securely Lock it.**
- **Be careful not to mistake the upper housing and lower housing when putting together.**

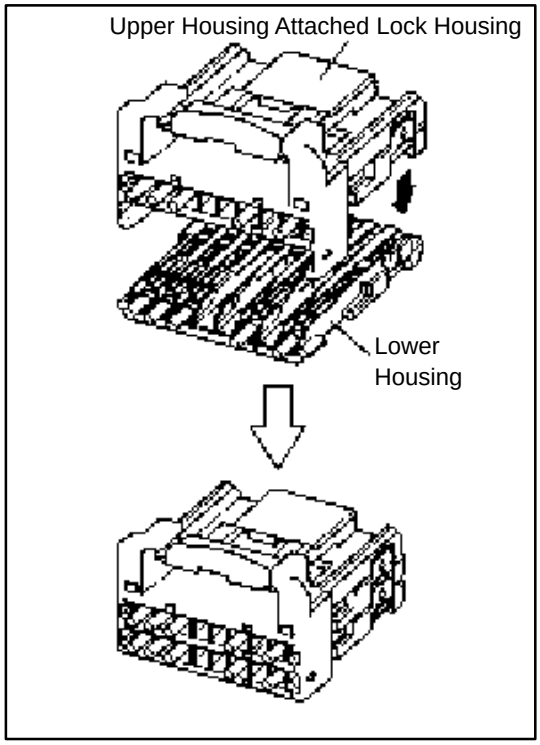

(b) Make the projection of the front lock of the upper housing attached lock housing meet the ditch of the front lock of the lower housing and fix the rear lock.

NOTICE:
- **Afteruniting, securely lock it for not leaving the rear lock arm deformed.**
- **Make sure that the terminals will not become loose by pulling the wires lightily.**
- **Be careful not to mistake the upper housing and lower housing when putting together.**

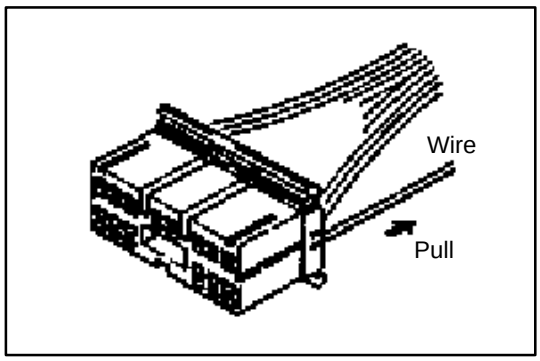

3. When properly installed, pulling gently on the wire lead will prove the terminal is locked in the connector.

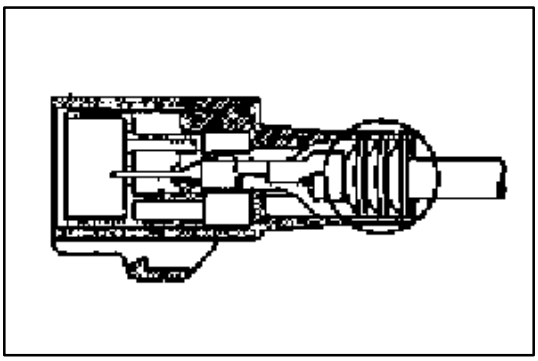

NOTICE:
If you working on the waterproof type, make sure that a rubber plug or a terminal gasket is inserted into the housing securely.

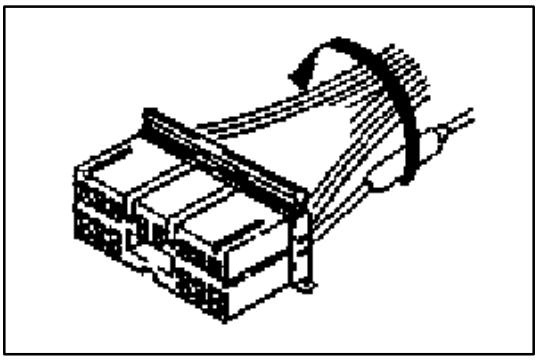

4. Secure the Repaired Wire to the Harness

If the wire is not in the conduit, or secured by other means, wrap vinyl tape around the bundle to keep it together with the other wires.

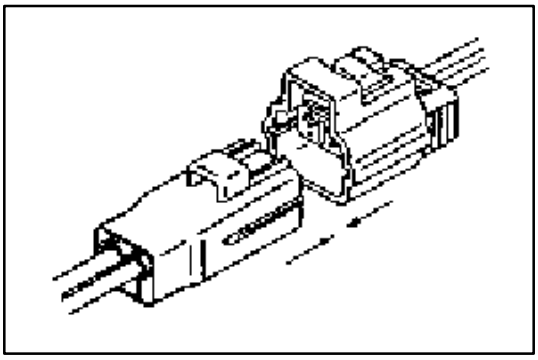

5. Connect Connector

- Fit the male connector to the female terminal.

NOTICE:
- **Do not twist the connector when fitting.**
- **Insert it until fully locked.**

HOW TO INSTALL AND REMOVE SPECIAL CONNECTORS

Low Fit and Lever Type Connector

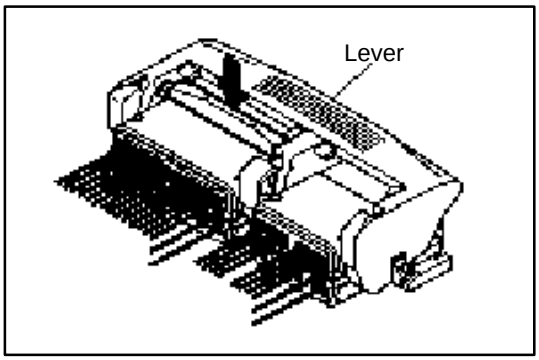

[Case 1]

1. Cut the connection of the connector

(1) Push the place indicated by the arrow.

(2) The lock is released and lever is lifted up.

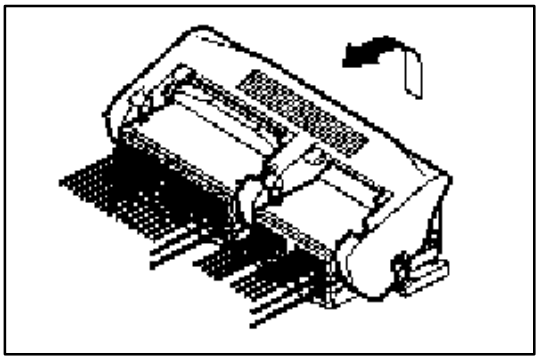

(3) Lift the lever up until it stops.

an

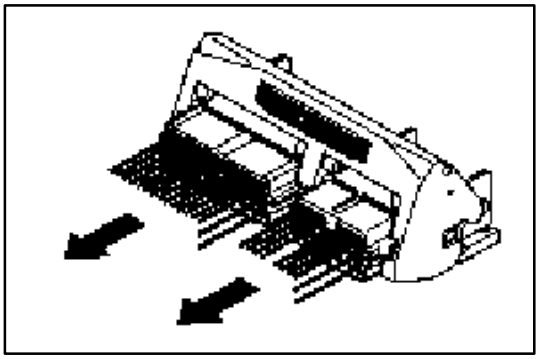

(4) Cut the connection of the connector.

NOTICE:
Do not hold the wire harness to pull it.

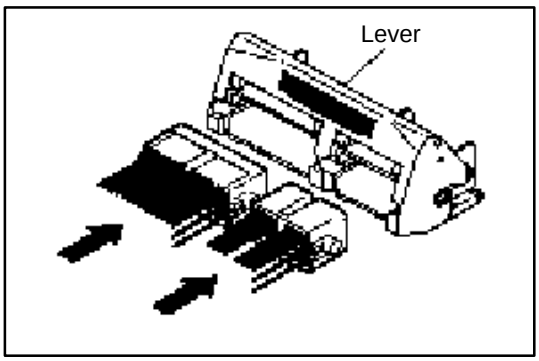

2. Connect the connector

(1) Connect the connector in the condition that the lever is fully lifted up.

HINT: If the lever is locked at the lower position, follow the procedure [Case 1]. (1) to (3) and lift the lever up fully.

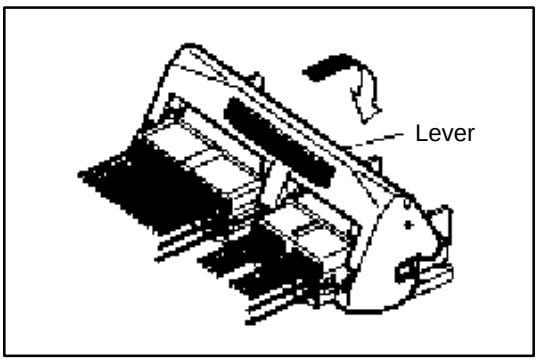

(2) Hold the connector to prevent it from slip off and push it down until you hear a click to lock it.

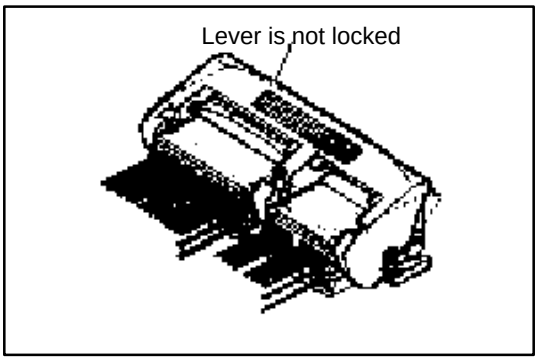

(3) Confirm that the lever is securely locked.

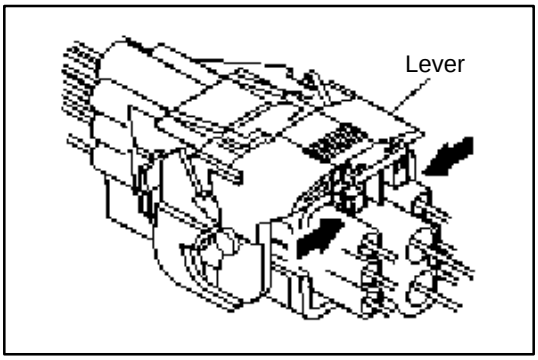

[Case 2]

1. Cut the connection of the connector

(1) Hold the area indicated by the arrow in the illustration

(2) The lock is released and the lever is lifted up.

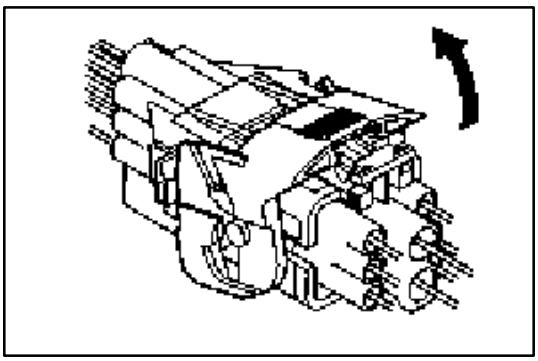

(3) Lift the lever up fully.

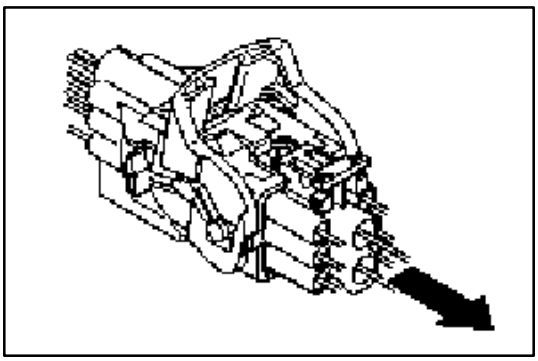

(4) Cut the connection of the connector.

NOTICE:
Do not hold the wire harness to pull it.

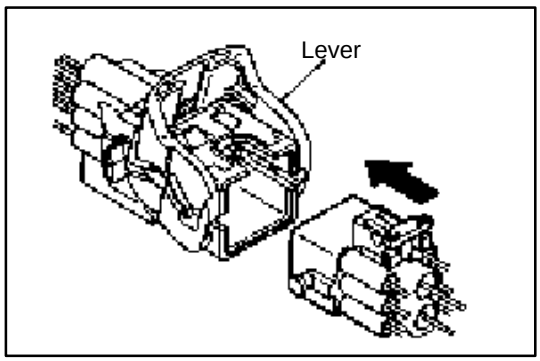

2. Connect the connector

(1) Connect the connector in the condition that the lever is fully lifted up.

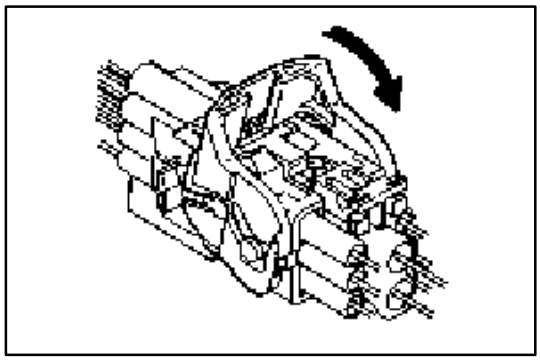

(2) Hold the connector to prevent it from slip off and push it down until you hear a click to lock it.

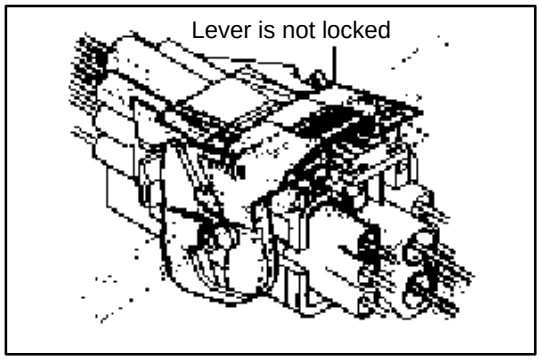

(3) Confirm that the lever is securely locked.

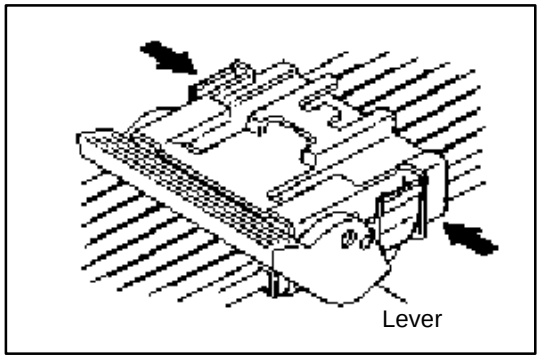

[Case 3]

1. Cut the connection of the connector

(1) Pick the part indicated in the illustration by fingers.

(2) The lock is released and the lever is lifted up.

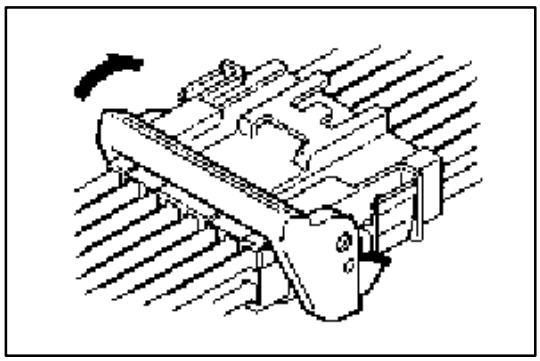

(3) Lift the lever up fully.

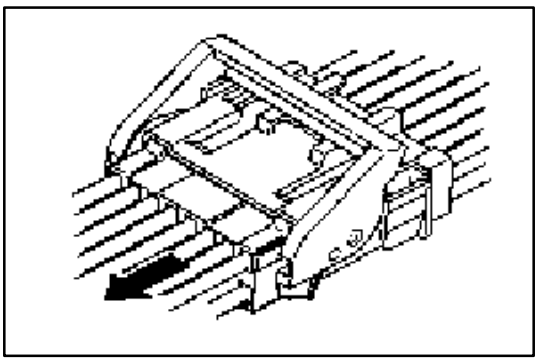

(4) Cut the connection of the connector.

NOTICE:
Do not hold the wire harness to pull it.

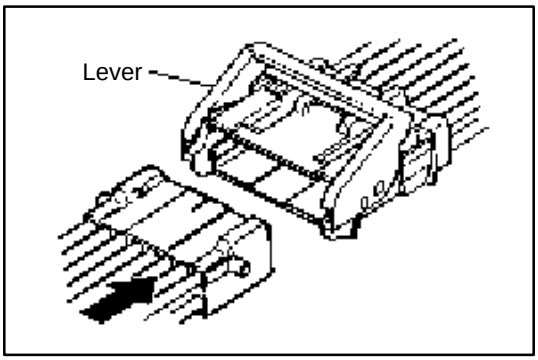

2. Connect the connector

(1) Connect the connector in the condition that the lever is fully lifted up.

HINT: If the lever is locked at the lower position, follow the procedure [Case 3]. (1) to (3) and lift the lever up fully.

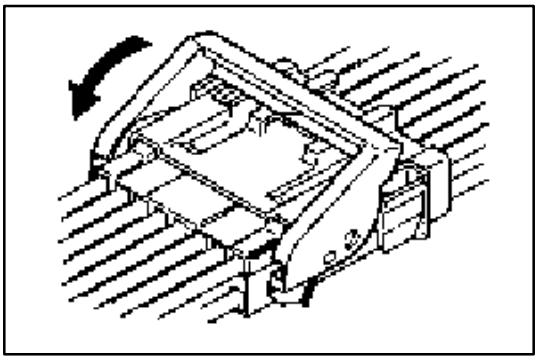

(2) Hold the connector to prevent it from slip off and push it down until you hear a click to lock it.

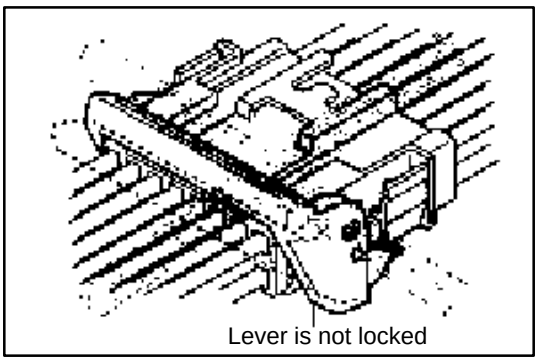

(3) Confirm that the lever is securely fitted

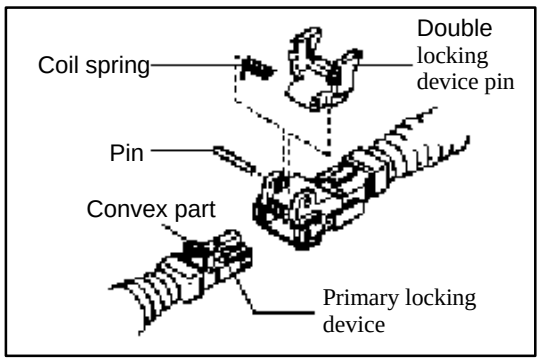

The connector with secondary locking device

1. Area used

- Wire harness for SRS airbag deployment

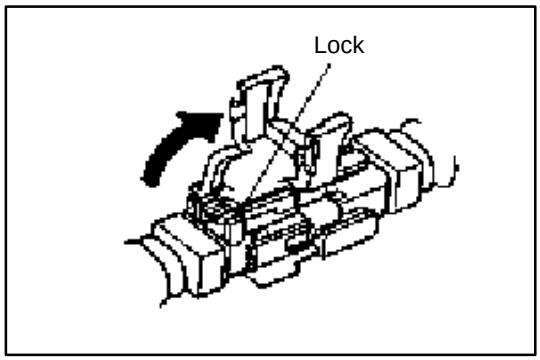

2. Cut the connection of the connector.

(1) Release the double locking.

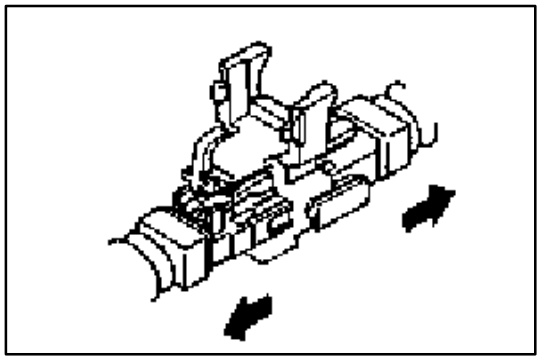

(2) Release the primary locking and separate the connector.

NOTICE:
Do not hold the wire harness to pull it.

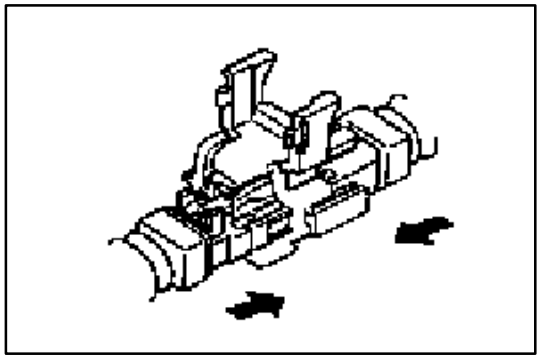

3. Connect the connector

(1) Install the primary locking device and connect the connector.

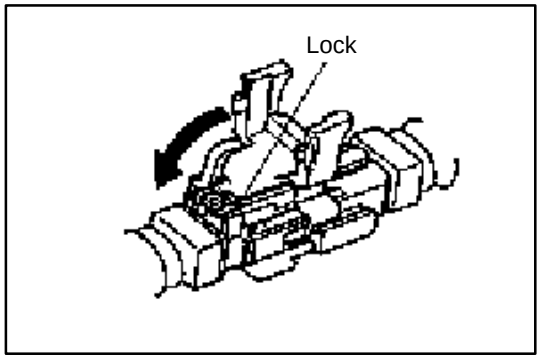

(2) Install the double locking device.

NOTICE:
The double locking device can not be installed unless the primary locking device is installed.

Connector fixed by bolts

1. Area used

- Engine control computer harness

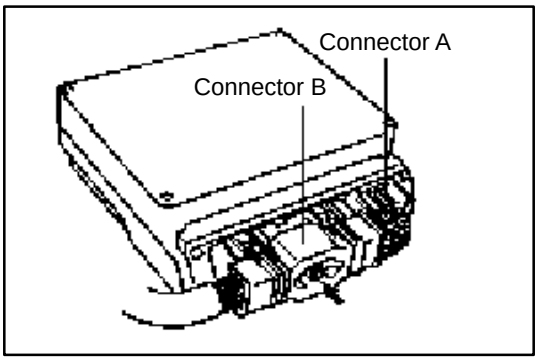

2. Cut the connection of the connector.

(1) Remove the connector A.

(2) Loose the bolt using a tool like driver until the connector B can be removed by hand and separate the connector.

HINT: If the bolt can not be removed, roll it while pulling forward.

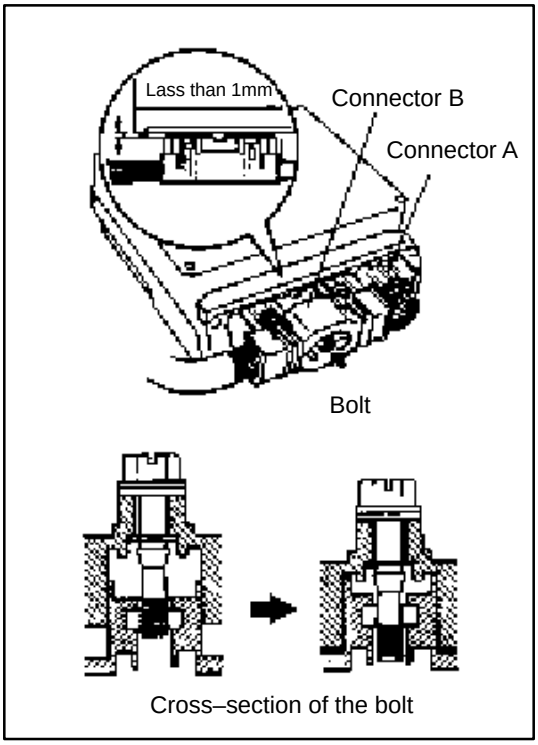

3. Connection of the connector

(1) Temporarily fit the connector B.

(2) Tighten the bolt by using tool like driver and fit the connector B completely.

NOTICE:

- **Tighten the bolt until feeling it lighter. Then confirm that the width of chink of the connector B is less than 1mm.**
- **The bolt can be rolled after it is fitted.**
- **If the impact wrench is used, do not let it rolling more than three seconds. (The housing may be deformed by generated heat)**
- **Be sure and connect the connector B straight. Do not incline it while connecting.**

(3) Connect the connector A.

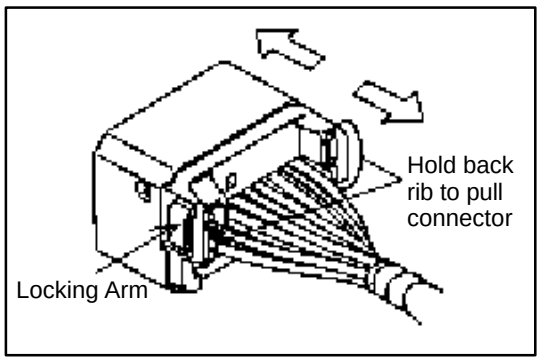

1. Cut the connection of the connector

(1) Push down on locking arm to unlock. Then hold the back ribs of connector to remove connector.

(2) Cut the Connection of the connector.

NOTICE:
Do not hold the wire harness to pull it.

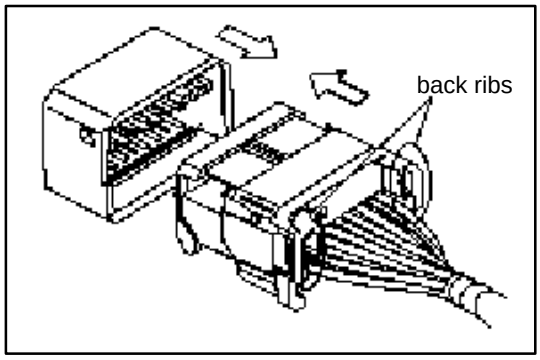

2. Connect the Connector

(1) Align the direction of locking feature in same direction and mate the connector holding the back ribs in straight direction.

(2) Insert it until a lock securely locks, and pull the connector lightly after the insertion, and confirm that a lock is enabled.

TABLE OF HOUSING CROSS SECTION

Type	○ : Position of the lance ↑ : Direction of lock released ➡ : Direction of the special tool inserted	
	Male	Female
0.64		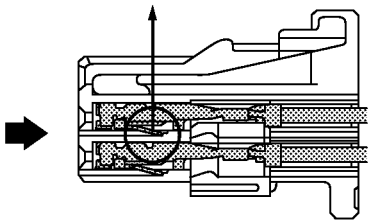 (Double Lock Type) [Terminal Lance]
0.64 IDC		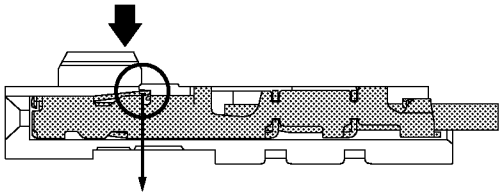 [Terminal Lance]
1.0		 (Double Lock Type) [Housing Lance]
1.0II Non–waterproof Type	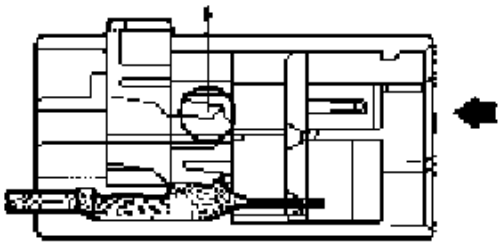 (Double Lock Type) [Housing Lance]	 (Double Lock Type) [Housing Lance]

TABLE OF HOUSING CROSS SECTION

Type	○ : Position of the lance ↑ : Direction of lock released ⬆ : Direction of the special tool inserted	
	Male	Female
1.0II Waterproof Type		 [Housing Lance]
1.0III 1.0IV Non–waterproof Type	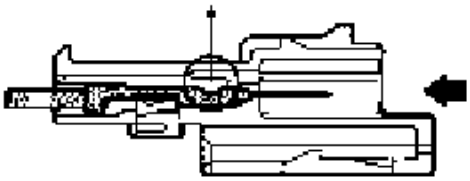 (Double Lock Type) [Housing Lance]	 (Double Lock Type) [Housing Lance]
1.0III IDC	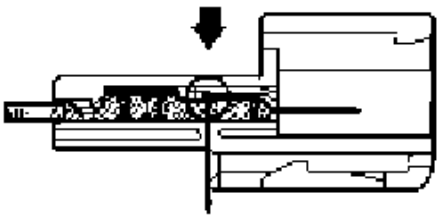 [Terminal Lance]	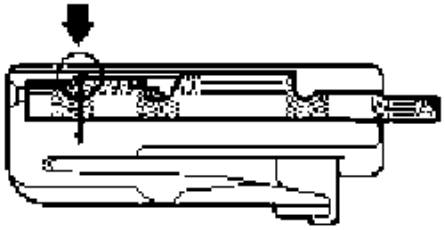 [Terminal Lance]
1.0III Waterproof Type	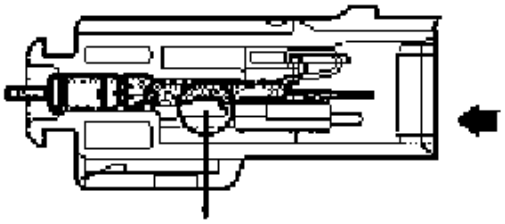 (Double Lock Type) [Housing Lance]	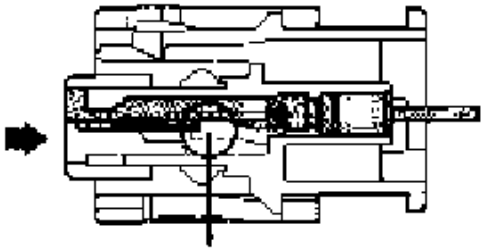 (Double Lock Type) [Housing Lance]

C

TABLE OF HOUSING CROSS SECTION

Type	○ : Position of the lance ↑ : Direction of lock released ⬆ : Direction of the special tool inserted	
	Male	Female
1.3 Non–waterproof Type	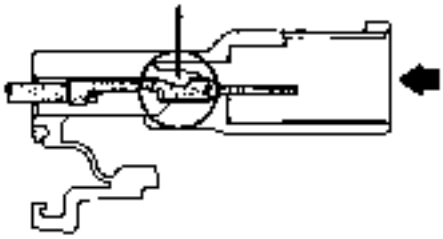 (Double Lock Type) [Housing Lance]	 (Double Lock Type) [Housing Lance]
1.3 Non–waterproof Type	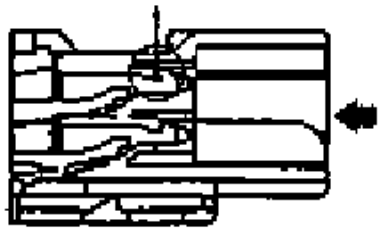 (Double Lock Type) [Housing Lance]	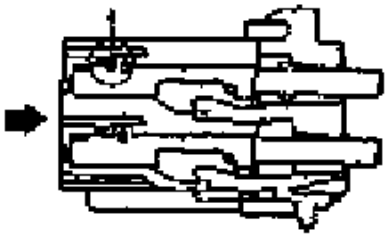 (Double Lock Type) [Housing Lance]
1.3 Non–waterproof Type	—	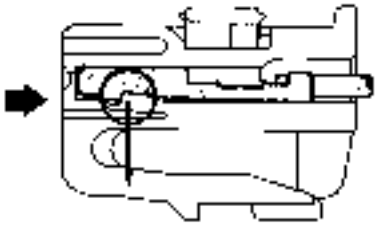 (Double Lock Type) [Housing Lance]
1.3 Waterproof Type	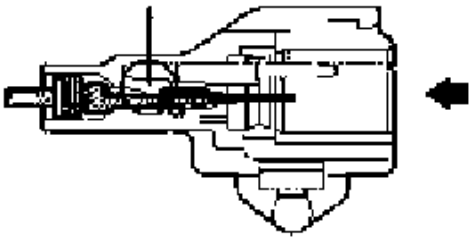 (Double Lock Type) [Housing Lance]	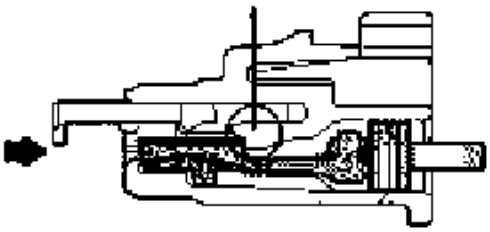 (Double Lock Type) [Housing Lance]

TABLE OF HOUSING CROSS SECTION

Type	○ : Position of the lance ↑ : Direction of lock released ⬆ : Direction of the special tool inserted	
	Male	Female
1.8 Non–waterproof Type	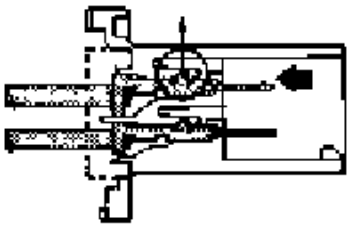 (Double Lock Type) [Housing Lance]	 (Double Lock Type) [Housing Lance]
1.8 Waterproof Type	—	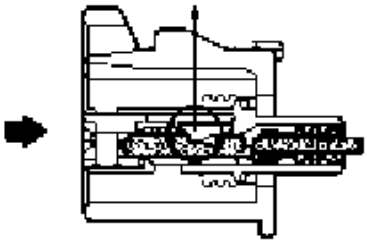 (Double Lock Type) [Housing Lance]
1.8II	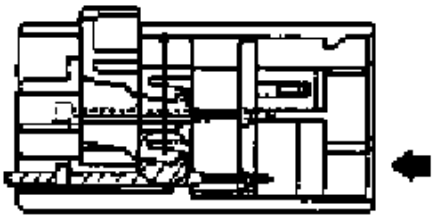 (Double Lock Type) [Housing Lance]	 (Double Lock Type) [Housing Lance]
2.3 Non–waterproof Type	 [Housing Lance]	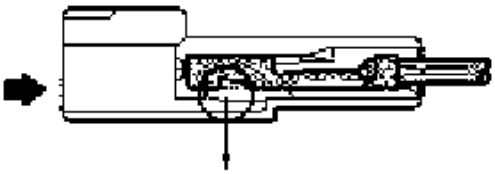 [Housing Lance]

C

TABLE OF HOUSING CROSS SECTION

Type	○ : Position of the lance ↑ : Direction of lock released ⬆ : Direction of the special tool inserted	
	Male	Female
2.3 Waterproof Type	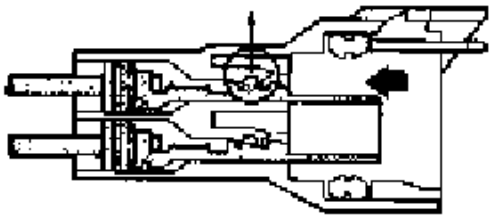 [Housing Lance]	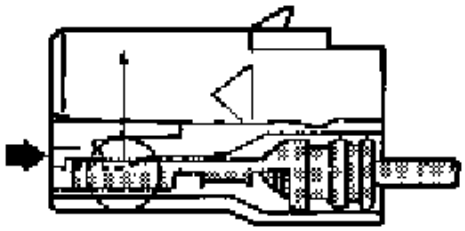 [Housing Lance]
2.3II Non–waterproof Type	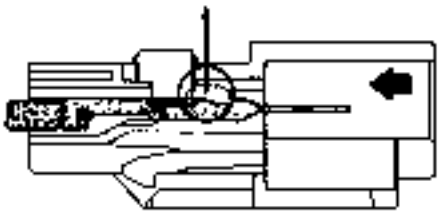 (Double Lock Type) [Housing Lance]	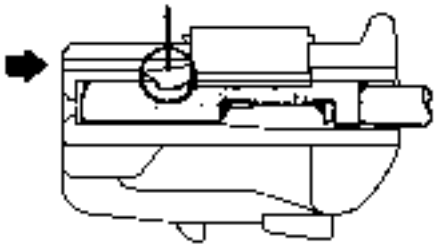 (Double Lock Type) [Housing Lance]
2.3II IDC	—	 [Terminal Lance]
2.3II Waterproof Type	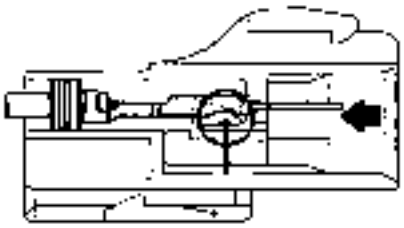 (Double Lock Type) [Housing Lance]	 (Double Lock Type) [Housing Lance]

TABLE OF HOUSING CROSS SECTION

Type	○ : Position of the lance ↑ : Direction of lock released ⬆ : Direction of the special tool inserted	
	Male	Female
4.8 Non–waterproof Type	 (Double Lock Type) [Housing Lance]	 (Double Lock Type) [Housing Lance]
4.8 Waterproof Type	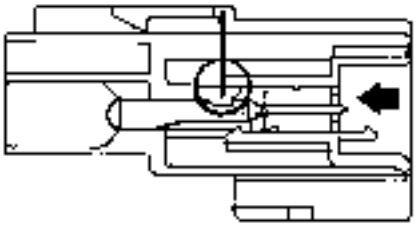 (Double Lock Type) [Housing Lance]	 (Double Lock Type) [Housing Lance]
6.3 Non–waterproof Type	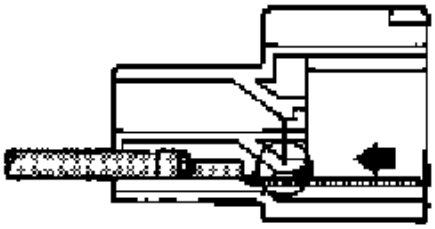 [Housing Lance]	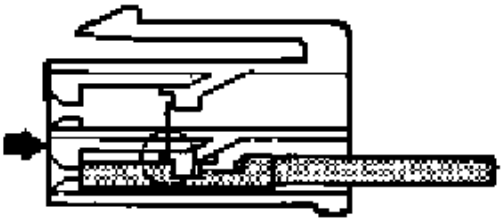 [Housing Lance]
6.3 Single Terminal	—	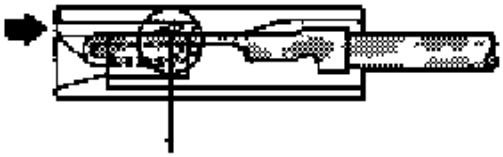 [Terminal Lance]

TABLE OF HOUSING CROSS SECTION

Type	○ : Position of the lance ↑ : Direction of lock released ⬆ : Direction of the special tool inserted	
	Male	Female
8.0 Non–waterproof Type	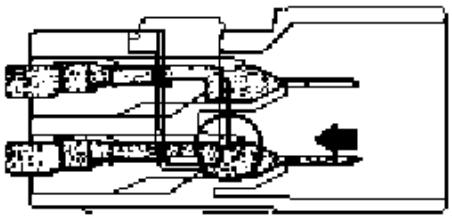 (Double Lock Type) [Housing Lance]	 (Double Lock Type) [Housing Lance]
8.0 Waterproof Type	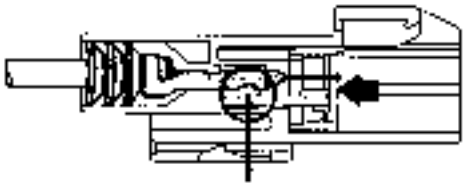 (Double Lock Type) [Housing Lance]	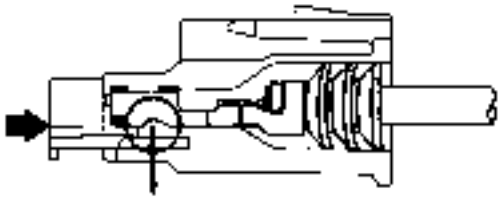 (Double Lock Type) [Housing Lance]
BLADE FUSE	—	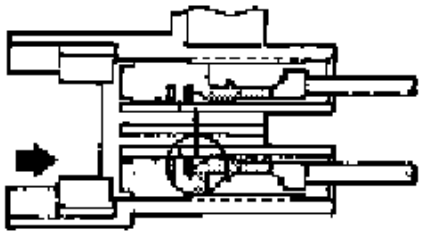 [Housing Lance]
C–Type	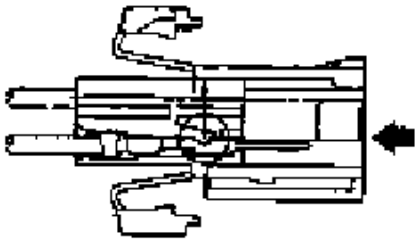 (Double Lock Type) [Housing Lance]	 (Double Lock Type) [Housing Lance]

TABLE OF HOUSING CROSS SECTION

Type	○ : Position of the lance ↑ : Direction of lock released ⬆ : Direction of the special tool inserted	
	Male	Female
6.3 Waterproof Type	—	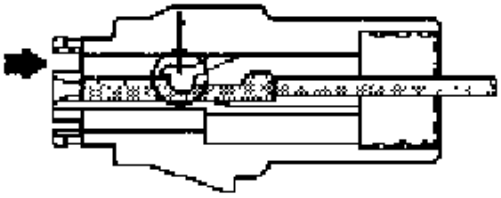 [Housing Lance]
6.3 Waterproof Type	—	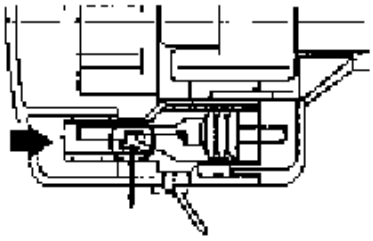 [Housing Lance]
7.7	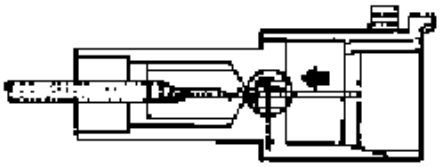 [Terminal Lance]	 [Terminal Lance]
7.7	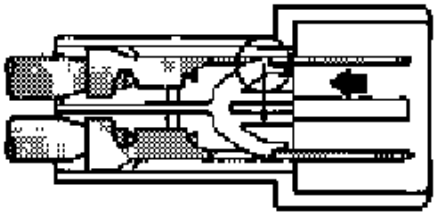 [Housing Lance]	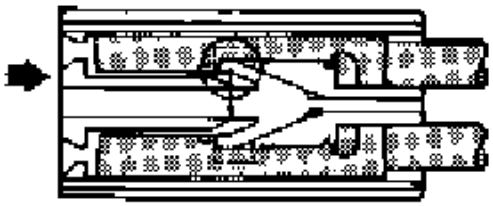 [Housing Lance]

C

TABLE OF HOUSING CROSS SECTION

Type	○ : Position of the lance ↑ : Direction of lock released ⬆ : Direction of the special tool inserted	
	Male	Female
FOG–LP	———	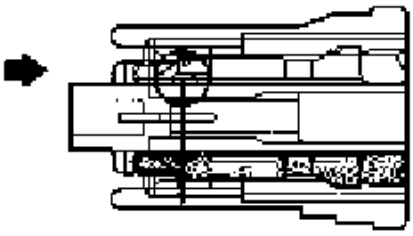 (Double Lock Type) [Housing Lance]
FTC	———	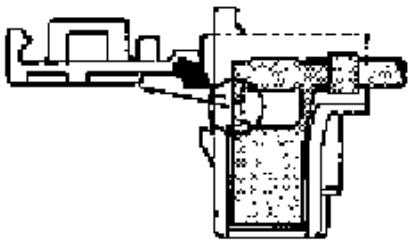 (Double Lock Type) [Housing Lance]
HEAD LAMP Waterproof Type	———	 [Housing Lance]
HB3 HB4	———	 [Housing Lance]

C

TABLE OF HOUSING CROSS SECTION

Type	○ : Position of the lance ↑ : Direction of lock released ⬆ : Direction of the special tool inserted	
	Male	Female
LAC	 [Housing Lance]	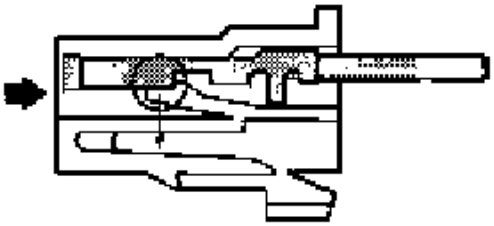 [Housing Lance]
MFPC	—	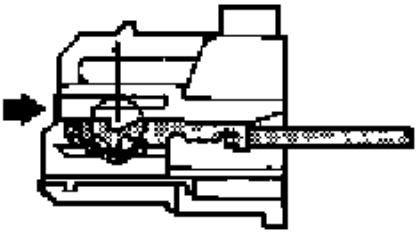 [Housing Lance]
MIC	—	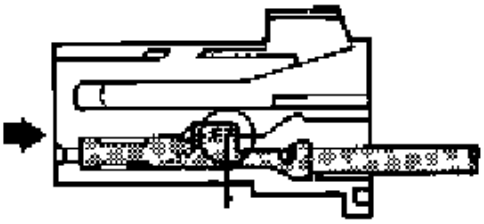 [Terminal Lance]
PULSE LOCK	—	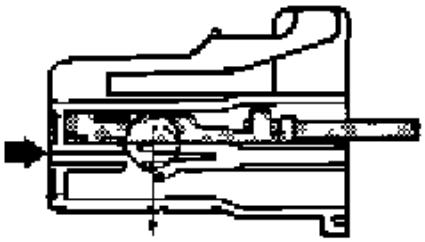 [Housing Lance]

TABLE OF HOUSING CROSS SECTION

Type	○ : Position of the lance ↑ : Direction of lock released ⬆ : Direction of the special tool inserted	
	Male	Female
SFPC	—	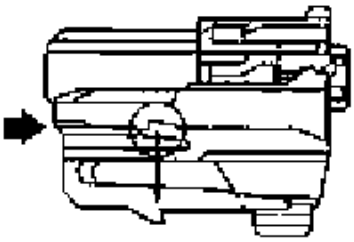 [Housing Lance]
SL	—	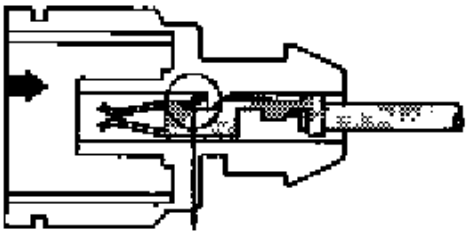 [Terminal Lance]
SP	—	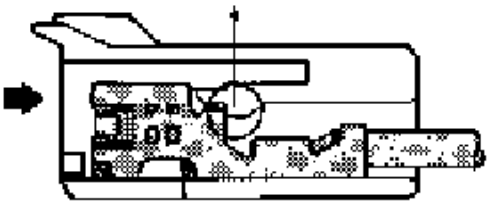 [Housing Lance]
TLC Non–waterproof Type	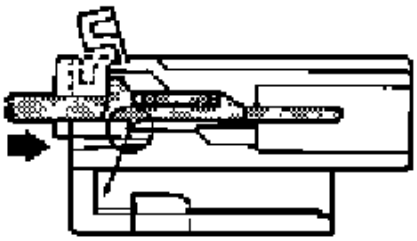 (Double Lock Type) [Housing Lance]	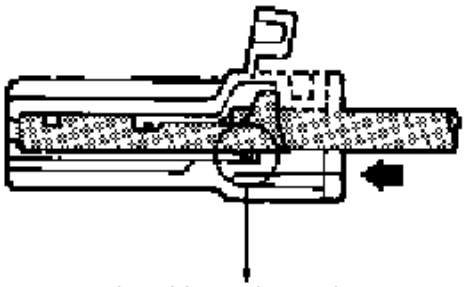 (Double Lock Type) [Housing Lance]

TABLE OF HOUSING CROSS SECTION

Type	○ : Position of the lance ↑ : Direction of lock released ⬆ : Direction of the special tool inserted	
	Male	Female
TLC Waterproof Type	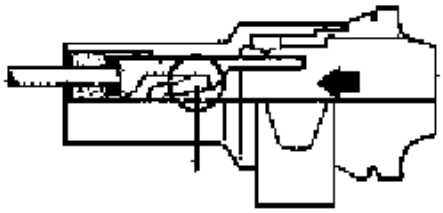 [Housing Lance]	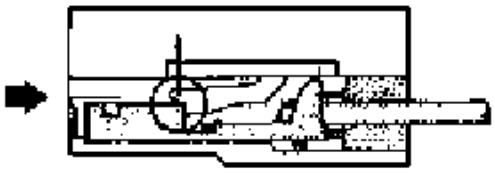 [Housing Lance]
TNS	 (Double Lock Type) [Housing Lance]	 (Double Lock Type) [Housing Lance]
TODC	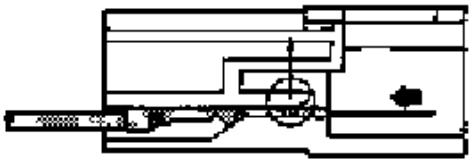 [Housing Lance]	 (Double Lock Type) [Housing Lance]

<FEMALE> 1P Waterproof Type

90980–10090	 90980–10115	90980–10197	90980–10201
90980–10241	90980–10247 90980–10705	90980–10439	90980–10837
 90980–10893	90980–10983	 90980–11007	90980–11166
90980–11184	90980–11243	90980–11252	90980–11271
90980–11282	90980–11363	90980–11400	90980–11428

D

<FEMALE> 1P Waterproof Type

 90980–11941	 90980–11942	90980–11943	90980–11944
 90980–11963	90980–12125	 90980–12129 90980–12136	

<FEMALE> 2P Waterproof Type

 90980–10092	 90980–10123	 90980–10157	 90980–10184
90980–10193	90980–10243	90980–10474	90980–10496
90980–10498 90980–10706	90980–10532	90980–10534	90980–10556
90980–10567	90980–10572	90980–10576	90980–10578
90980–10581	90980–10583	90980–10593	90980–10595

<FEMALE> 2P Waterproof Type

90980–10598	90980–10609	90980–10617	90980–10622
90980–10623	90980–10626	90980–10702	90980–10720
90980–10734	90980–10735	90980–10736	90980–10737
90980–10748 90980–10846	 90980–10839	 90980–10843	90980–10847
 90980–10853	90980–10887	90980–10899	90980–10901

D

<FEMALE> 2P Waterproof Type

 90980–10923	 90980–10928	90980–10947	90980–10949
90980–10974	90980–11003	 90980–11005	 90980–11009
 90980–11019	 90980–11025 90980–11401	90980–11030	90980–11032
90980–11038	 90980–11051	90980–11061	90980–11062
 90980–11068	90980–11070	90980–11075	90980–11095

<FEMALE> 2P Waterproof Type

90980–11096	 90980–11140	 90980–11142	 90980–11149
90980–11153	90980–11154 90980–11284	 90980–11156	90980–11162
90980–11163	90980–11176	90980–11189	90980–11207
90980–11235	90980–11237	 90980–11246	 90980–11248
 90980–11250	90980–11255	90980–11273	90980–11285

D

<FEMALE> 2P Waterproof Type

 90980–11286	90980–11410	90980–11448	 90980–11467
 90980–11659	 90980–11660	90980–11773	 90980–11790
 90980–11856	90980–11859	90980–11864	 90980–11875
 90980–11898	90980–11900	 90980–12028	 90980–12068
90980–12117	90980–12188	 90980–12195	

D

<FEMALE> 3P Waterproof Type

 90980–10088	 90980–10110	 90980–10191	 90980–10199
 90980–10239	90980–10245	 90980–10249	 90980–10341 90980–11491
 90980–10353	90980–10395	90980–10494	90980–10501
90980–10554	90980–10574	 90980–10579	90980–10629
90980–10683	90980–10690 90980–11157	90980–10695	 90980–10834

D

<FEMALE> 3P Waterproof Type

 90980–10841	 90980–10845	90980–10902	 90980–10919
 90980–10981	 90980–11016	 90980–11020	90980–11045
90980–11108	90980–11132	90980–11143	90980–11145
90980–11161	90980–11170	90980–11245	90980–11261
 90980–11294	 90980–11349	 90980–11451	 90980–11860

<FEMALE> 3P Waterproof Type

 90980–11907	 90980–12058	 90980–12095	 90980–12168
 90980–12228			

D

<FEMALE> 4P Waterproof Type

 90980–10095	 90980–10140 90980–10220	 90980–10203	90980–10218
 90980–10373	90980–10476	 90980–10549	90980–10551
90980–10591	 90980–10649	 90980–10663 90980–10664	90980–10685
90980–10701	 90980–10711	 90980–10831	90980–10844
90980–10869	 90980–10929	90980–10940	90980–10942

<FEMALE> 4P Waterproof Type

 90980–10943	90980–10990	 90980–11028	90980–11036
 90980–11037	 90980–11065 90980–11066	90980–11139	90980–11150
90980–11152	 90980–11178	90980–11269	90980–11283
90980–11288	90980–11292	90980–11304	90980–11329 90980–11330
 90980–11569	 90980–11640	 90980–11857	 90980–11885

<FEMALE> 4P Waterproof Type

 90980–11930	90980–11964	90980–12005	90980–12057

<FEMALE> 5P Waterproof Type

 90980–10162	 90980–10393	90980–10550	 90980–10558
90980–10624	 90980–10710	 90980–10712	 90980–10946
 90980–11022	 90980–11024	 90980–11049	90980–11077
90980–11182	 90980–11232	 90980–11317	 90980–11413
90980–11599	 90980–11904	90980–11960	

<FEMALE> 6P Waterproof Type

 90980–10097	90980–10195	 90980–10478	 90980–10597
 90980–10643	 90980–10651	 90980–10854	 90980–10939
90980–10988	90980–11034	90980–11144	 90980–11194
90980–11197	90980–11290	 90980–11663	 90980–11858

<FEMALE> 7P, 8P Waterproof Type

 90980–10628	 90980–10931	90980–11172	 90980–10205
90980–10891	 90980–10895	 90980–10897	 90980–11190
 90980–11242	 90980–11461	 90980–11592	 90980–11593
 90980–12080	 90980–12164		

<FEMALE> 9P Waterproof Type

 90980–10380 90980–10381	 90980–10678	 90980–10686
 90980–10776	 90980–11192	 90980–11643
 90980–11784		

<FEMALE> 10P Waterproof Type



90980–11231



90980–11332

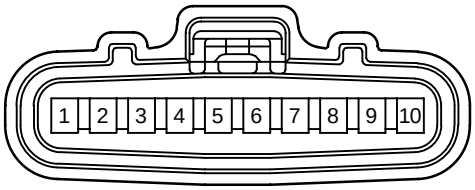

90980–11653



90980–11658

<FEMALE> 11P Waterproof Type

 90980–11174	 90980–11240
 90980–11257	 90980–11612

<FEMALE> 12P Waterproof Type



90980–10548



90980–10569

90980–11087



90980–11151



90980–11664



90980–11698

<FEMALE> 13P, 15P Waterproof Type

 90980–10654	 90980–11089
 90980–11677	

<FEMALE> 16P, 17P, 23P Waterproof Type



90980–10101



90980–10288



90980–11463

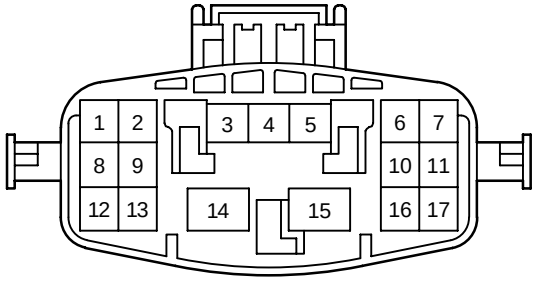

90980–11601

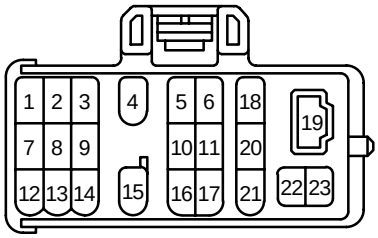

90980–11195

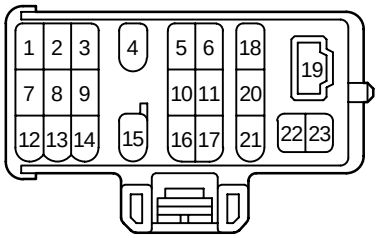

90980–11323

<FEMALE> 24P, 25P Waterproof Type

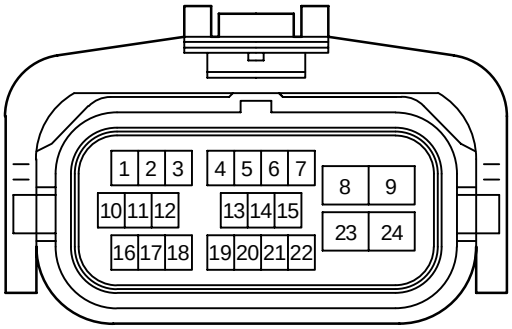

90980–11851

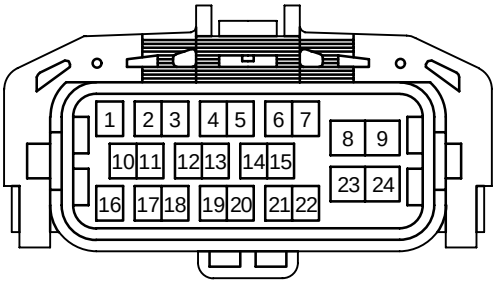

90980–11882

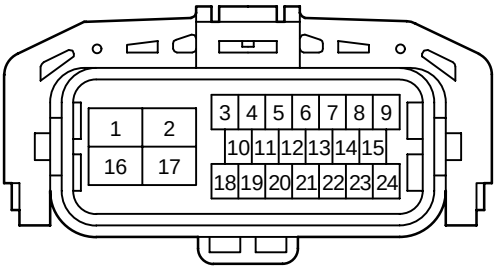

90980–11893

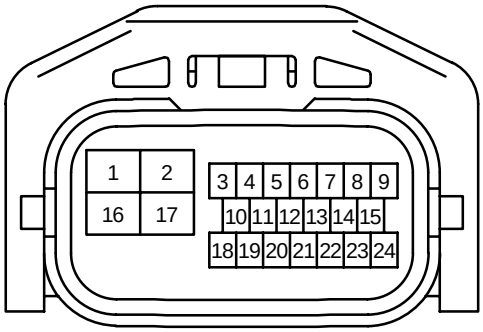

90980–12116

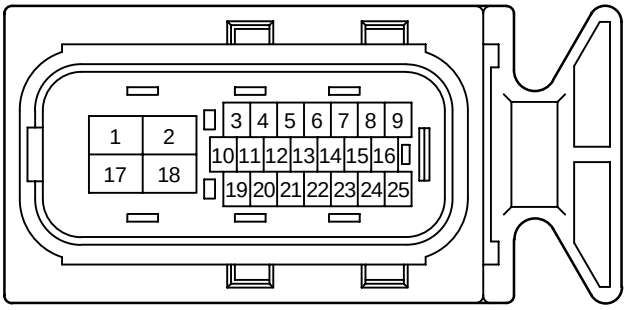

90980–11861

<FEMALE> 34P, 40P Waterproof Type

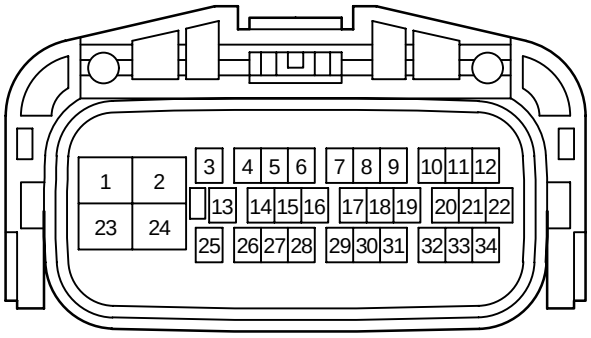

90980–12020

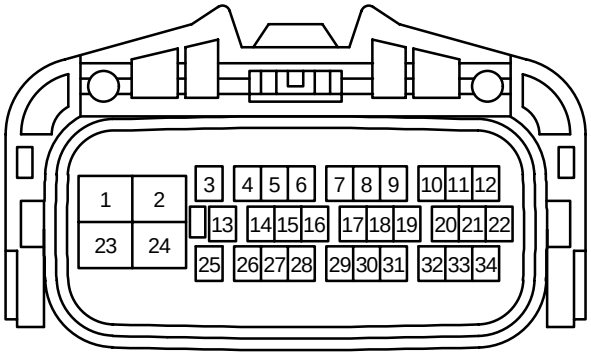

90980–12021
90980–12022



90980–11215

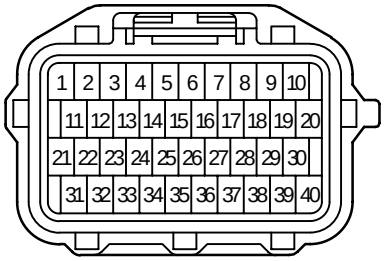

90980–11566

<FEMALE> 80P Waterproof Type

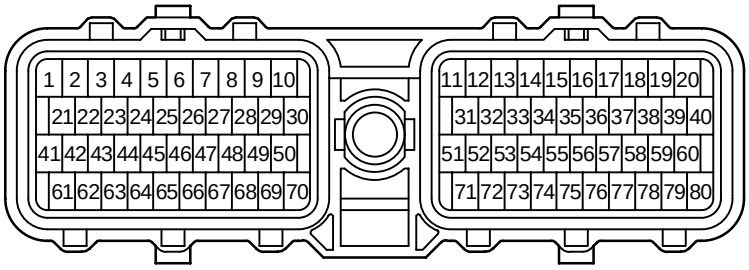

90980–11214

<FEMALE> 1P Non–waterproof Type

90980–10165	90980–10179	90980–10183	 90980–10229
90980–10250	90980–10252	90980–10254	90980–10332
90980–10343	90980–10359	90980–10363	90980–10398
90980–10435	 90980–10619	90980–10652	 90980–10688
90980–10703	90980–10782	90980–10786	90980–10792

<FEMALE> 1P Non–waterproof Type

90980–10871	90980–10911	90980–10912	90980–10913
90980–10914	 90980–10995	90980–11147	 90980–11259
90980–11315	90980–11703	 90980–11738	 90980–11775
 90980–11853	 90980–11881		

<FEMALE> 2P Non–waterproof Type

90980–10012	90980–10039	 90980–10069	 90980–10108
 90980–10109	 90980–10121	 90980–10124	 90980–10141
 90980–10185	 90980–10214	 90980–10256	90980–10298
90980–10320	90980–10333	90980–10345	 90980–10348
90980–10355	90980–10357	 90980–10362	 90980–10385

<FEMALE> 2P Non–waterproof Type

90980–10423	 90980–10425	 90980–10426	90980–10465
90980–10481	90980–10482	90980–10491	90980–10511
90980–10512	90980–10559	90980–10621	90980–10637
90980–10679	90980–10760	90980–10783	 90980–10823
 90980–10825	 90980–10835	 90980–10850	 90980–10855

<FEMALE> 2P Non–waterproof Type

 90980–10860	 90980–10903	 90980–10906	 90980–10916
90980–10935	90980–10960	90980–10962	 90980–11080
 90980–11094	 90980–11098	90980–11148	 90980–11212
 90980–11227	90980–11278	90980–11306	 90980–11369
 90980–11386	90980–11388	90980–11396	 90980–11429

<FEMALE> 2P Non–waterproof Type

 90980–11436	 90980–11579	90980–11608	 90980–11684
 90980–11687	 90980–11736	 90980–11769	 90980–11824
 90980–11839	90980–11840	 90980–11862	 90980–11884
 90980–11886	 90980–11890	 90980–11918	90980–11919
 90980–11996	 90980–12014	 90980–12039	 90980–12063

<FEMALE> 2P Non–waterproof Type

90980–12088	 90980–12089	 90980–12109	 90980–12110
 90980–12111	 90980–12120	 90980–12138	 90980–12191
 90980–12219 90980–12242	 90980–12224 90980–12243	 90980–12241	 90980–12253

<FEMALE> 3P Non–waterproof Type

90980–10056	 90980–10070	 90980–10072	 90980–10111
 90980–10143	 90980–10189	 90980–10216	90980–10222
 90980–10228	90980–10232	 90980–10234	 90980–10258
90980–10365	 90980–10420	 90980–10428	90980–10464
90980–10483	 90980–10489	 90980–10490	 90980–10618

<FEMALE> 3P Non–waterproof Type

90980–10638 90980–10660	 90980–10704	 90980–10747	 90980–10784
 90980–10908	 90980–10956	 90980–10980	90980–11053
 90980–11071	 90980–11079	 90980–11251	 90980–11296
 90980–11314	 90980–11336	 90980–11387	 90980–11471
 90980–11485	 90980–11490	 90980–11667	 90980–11685

<FEMALE> 3P Non–waterproof Type

 90980–11731	 90980–11764	 90980–11777	 90980–11880
 90980–11938	 90980–11987	 90980–12197	

<FEMALE> 4P Non–waterproof Type

 90980–10002	90980–10127	 90980–10142	90980–10171
 90980–10196	 90980–10221	 90980–10260	90980–10307
 90980–10378	 90980–10400	90980–10467	 90980–10484
90980–10504	90980–10514	 90980–10515	90980–10601
 90980–10645	 90980–10692	90980–10716	90980–10717

<FEMALE> 4P Non–waterproof Type

 90980–10759	 90980–10795	 90980–10867	 90980–10904
 90980–11013	 90980–11090	 90980–11107	 90980–11118
 90980–11136	 90980–11187	 90980–11313	 90980–11398
 90980–11427	 90980–11494	 90980–11495	 90980–11606
 90980–11662	 90980–11676	 90980–11742	 90980–11766

<FEMALE> 4P Non–waterproof Type

 90980–11771	 90980–11792	 90980–11799	 90980–11841
 90980–11842	 90980–11892	 90980–11950	90980–11988
 90980–12017	 90980–12018	90980–12019	 90980–12160
 90980–12211	 90980–12225		

<FEMALE> 5P Non–waterproof Type

 90980–10041	 90980–10262	 90980–10274	 90980–10339
 90980–10340	 90980–10376	 90980–10487	 90980–10488
 90980–10509	90980–10520	 90980–10610	90980–10631
 90980–10644	 90980–10659	 90980–10713	 90980–10718
 90980–10789	 90980–10888	 90980–10986	 90980–11319

<FEMALE> 5P Non–waterproof Type

 90980–11603	 90980–11772	 90980–11908	 90980–11909
 90980–11921	 90980–12190		

<FEMALE> 6P Non–waterproof Type

 90980–10004	 90980–10029	 90980–10173	 90980–10224
 90980–10313	 90980–10334	 90980–10335	90980–10367
 90980–10382	 90980–10402	 90980–10414	 90980–10447
 90980–10604	90980–10605	90980–10672	 90980–10673
 90980–10766	 90980–10785	 90980–10797	 90980–10889

<FEMALE> 6P Non–waterproof Type

 90980–10910	 90980–10933	 90980–10957	 90980–10964
 90980–10976	90980–10996	 90980–11001	 90980–11011
 90980–11091	 90980–11280	 90980–11297	90980–11326
 90980–11488	 90980–11493	 90980–11552	 90980–11583
 90980–11616	 90980–11617	 90980–11697	 90980–11778

<FEMALE> 6P Non–waterproof Type

 90980–11780	 90980–11820	 90980–11879	 90980–11986
 90980–12012	 90980–12056	 90980–12067	 90980–12199
 90980–12209			

<FEMALE> 7P Non–waterproof Type

 90980–10043	 90980–10071	 90980–10264	 90980–10311
 90980–10452	 90980–10460	 90980–10729 90980–10772	 90980–11165
 90980–11340	 90980–11529	 90980–11740	 90980–11794
 90980–12060			

<FEMALE> 8P Non–waterproof Type

 90980–10019	 90980–10112	 90980–10113	 90980–10119
 90980–10148	 90980–10175	 90980–10209	 90980–10280
 90980–10301	 90980–10321	 90980–10336	 90980–10358
 90980–10404	 90980–10419	 90980–10431	 90980–10449
 90980–10463	 90980–10517	 90980–10523	 90980–10799

<FEMALE> 8P Non–waterproof Type

 90980–10877 90980–11439	 90980–10926	 90980–11092	 90980–11130
 90980–11279	 90980–11321	 90980–11354	 90980–11362
 90980–11397	 90980–11459	 90980–11533	 90980–11615
 90980–11630	 90980–11633	 90980–11686	 90980–11701
 90980–11989	 90980–12091	 90980–12113	 90980–12217

<FEMALE> 8P Non–waterproof Type

 90980–12221			

<FEMALE> 9P Non–waterproof Type

 90980–10045	 90980–10133	 90980–10152	 90980–10266
 90980–10318	 90980–10386	 90980–10536	 90980–11277
 90980–11302	 90980–11479	 90980–11535	 90980–11710
 90980–12026			

<FEMALE> 10P Non–waterproof Type

 90980–10158	 90980–10159	 90980–10177
 90980–10282	 90980–10294	 90980–10302
 90980–10304	 90980–10322	 90980–10377
 90980–10469	 90980–10528	 90980–10669

<FEMALE> 10P Non–waterproof Type

 90980–10721	 90980–10801	 90980–10822
 90980–10862	 90980–10965	 90980–10993
 90980–10997	 90980–11116	 90980–11276
 90980–11366	 90980–11450	 90980–11527

<FEMALE> 10P Non–waterproof Type

 90980–11537	 90980–11581	 90980–11614
 90980–11642	 90980–11657	 90980–11781
 90980–11817	 90980–11923	90980–11924
 90980–11948	 90980–12008	90980–12135

<FEMALE> 10P Non–waterproof Type

 90980–12162	 90980–12226	 90980–12272

<FEMALE> 11P Non–waterproof Type

 90980–10319	 90980–10337	 90980–10338
 90980–10450	 90980–10537	 90980–10723
90980–10727	 90980–10781	 90980–10830
 90980–10873	 90980–10966	 90980–11041

<FEMALE> 11P Non–waterproof Type

 90980–11083	 90980–11539	 90980–12003

<FEMALE> 12P Non–waterproof Type

 90980–10006	 90980–10150	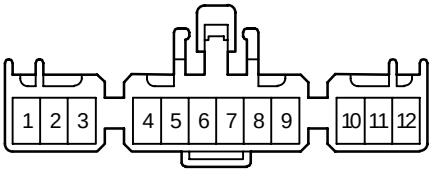 90980–10153
 90980–10303	 90980–10351	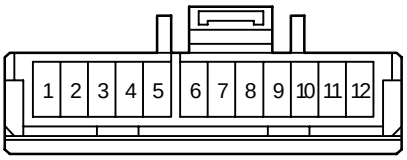 90980–10372
 90980–10397	 90980–10406	 90980–10408
 90980–10421	 90980–10432	 90980–10524

<FEMALE> 12P Non–waterproof Type

 90980–10565	 90980–10632	 90980–10658
 90980–10714	 90980–10724	 90980–10725
 90980–10743	 90980–10803	 90980–10879
 90980–10932	 90980–10967	 90980–10968

<FEMALE> 12P Non–waterproof Type

 90980–10973	 90980–11121	 90980–11129
 90980–11311	 90980–11408	 90980–11424
 90980–11453	 90980–11475	 90980–11531
 90980–11626	 90980–11649	 90980–11656

<FEMALE> 12P Non–waterproof Type

 90980–11661	 90980–11693	 90980–11720
 90980–11782	 90980–11847	 90980–11867
 90980–11869	 90980–11871	 90980–11873
 90980–11947	 90980–12032	 90980–12090

<FEMALE> 12P Non–waterproof Type

 90980–12183	 90980–12222	 90980–12273

<FEMALE> 13P Non–waterproof Type

 90980–10033	 90980–10062	 90980–10132
 90980–10324	 90980–10480	 90980–10805
 90980–11114	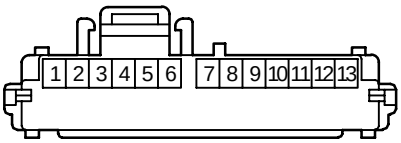 90980–11115	 90980–11199
 90980–11350	 90980–11394	 90980–11478

<FEMALE> 13P Non–waterproof Type

 90980–11542	 90980–11604	 90980–11695
 90980–11714	 90980–11827	 90980–11848
 90980–11952	 90980–12007	 90980–12027

<FEMALE> 14P Non–waterproof Type

 90980–10330	 90980–10368
 90980–10369	 90980–10371
 90980–10471	 90980–10507

<FEMALE> 14P Non–waterproof Type

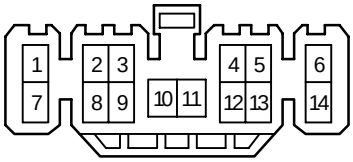

90980–10538



90980–10608



90980–10633



90980–10634



90980–10807
90980–11437



90980–10813

<FEMALE> 14P Non–waterproof Type

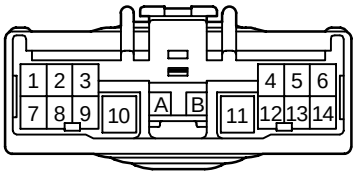

90980–10852



90980–11225



90980–11383



90980–11433



90980–11465



90980–11511

<FEMALE> 14P Non–waterproof Type



90980–11556



90980–11591



90980–11791



90980–11805



90980–11911



90980–11925

<FEMALE> 14P Non–waterproof Type

 90980–12082	

<FEMALE> 15P Non–waterproof Type



90980–10066



90980–10331



90980–10443



90980–10563



90980–10815



90980–10828

<FEMALE> 15P Non–waterproof Type



90980–11042



90980–11056



90980–11179



90980–11264



90980–11372

<FEMALE> 16P Non–waterproof Type



90980–10008



90980–10028



90980–10454



90980–10486



90980–10522



90980–10525

<FEMALE> 16P Non–waterproof Type

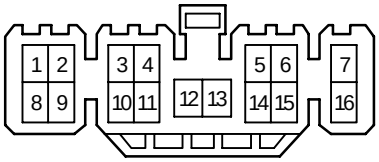

90980–10539



90980–10543



90980–10561



90980–10611



90980–10613



90980–10614

<FEMALE> 16P Non–waterproof Type



90980–10635



90980–10636



90980–10740



90980–10764



90980–10809
90980–11445



90980–10848

<FEMALE> 16P Non–waterproof Type



90980–10885



90980–11082

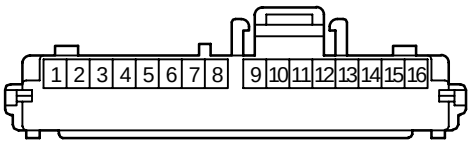

90980–11113



90980–11219



90980–11391



90980–11416

<FEMALE> 16P Non–waterproof Type



90980–11425



90980–11435

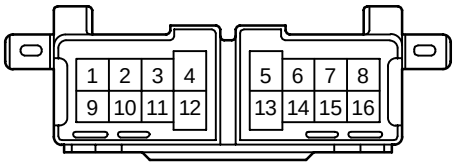

90980–11547

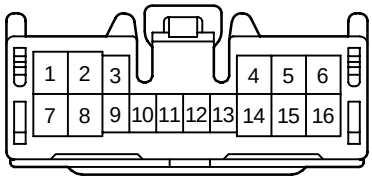

90980–11562



90980–11565



90980–11574

<FEMALE> 16P Non–waterproof Type



90980–11648

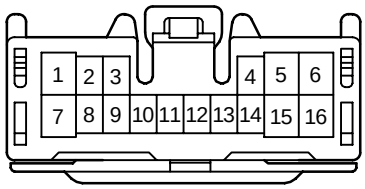

90980–11652

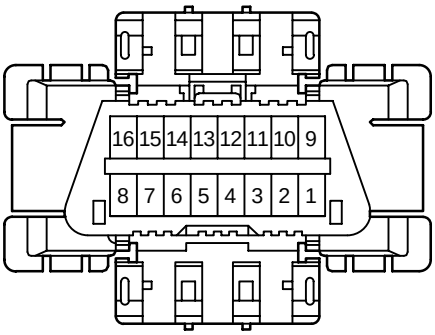

90980–11665
90980–11978

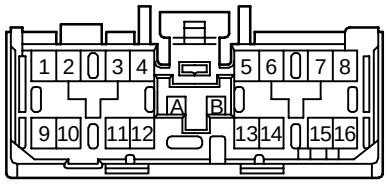

90980–11681

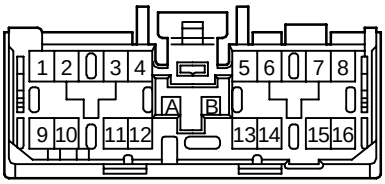

90980–11683



90980–11787

<FEMALE> 16P Non–waterproof Type



90980–12093



90980–12094

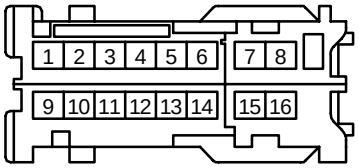

90980–12101



90980–12104



90980–12105



90980–12155

<FEMALE> 16P Non–waterproof Type

 90980–12156	

<FEMALE> 17P Non–waterproof Type

 90980–10031	 90980–10037
 90980–10731 90980–11417 90980–11420	 90980–11203
 90980–11310	 90980–11335

<FEMALE> 17P Non–waterproof Type



90980–11506



90980–11560



90980–11586



90980–11671



90980–11672



90980–11954

<FEMALE> 18P Non–waterproof Type



90980–10285



90980–10295

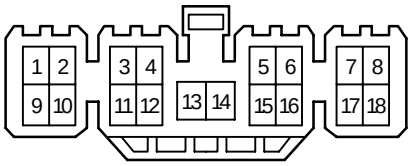

90980–10326



90980–10350



90980–10530



90980–10656

<FEMALE> 18P Non–waterproof Type



90980–10778



90980–10819



90980–11224



90980–11226



90980–11497



90980–11594

<FEMALE> 18P Non–waterproof Type



90980–11595



90980–11913



90980–11914



90980–11973

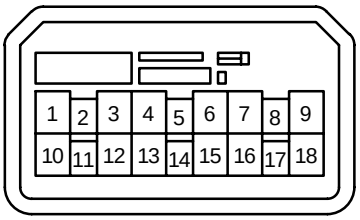

90980–12122



90980–12174

<FEMALE> 19P Non–waterproof Type



90980–10675



90980–10857



90980–10883



90980–11205



90980–11308



90980–11377

<FEMALE> 19P Non–waterproof Type

 90980–11571	 90980–11955

<FEMALE> 20P Non–waterproof Type



90980–10327



90980–10589



90980–10607

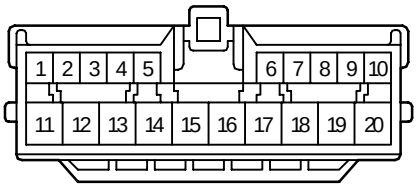

90980–10612



90980–10640



90980–10811
90980–11441

<FEMALE> 20P Non–waterproof Type



90980–10817



90980–10821



90980–10952



90980–11260

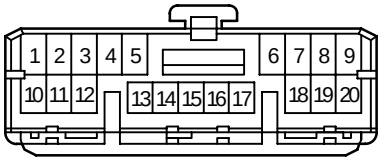

90980–11432

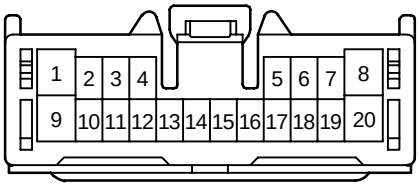

90980–11469

<FEMALE> 20P Non–waterproof Type



90980–11499

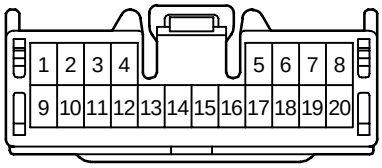

90980–11558



90980–11868



90980–11971



90980–11974

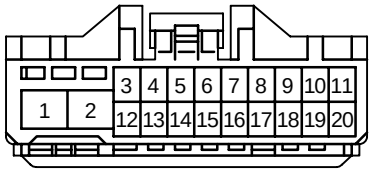

90980–12034

<FEMALE> 20P Non–waterproof Type



90980–12038

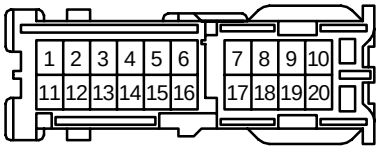

90980–12106



90980–12166



90980–12259

<FEMALE> 21P Non–waterproof Type



90980–10064



90980–10207

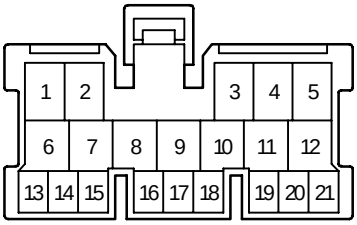

90980–10473



90980–11125



90980–11379



90980–11956

<FEMALE> 21P Non–waterproof Type

 90980–11957	

<FEMALE> 22P Non–waterproof Type



90980–10010

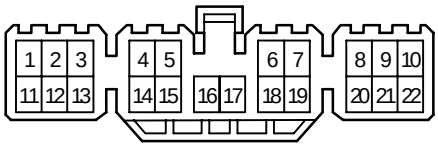

90980–10328

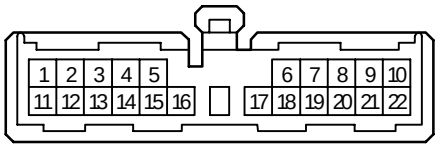

90980–10456



90980–10458

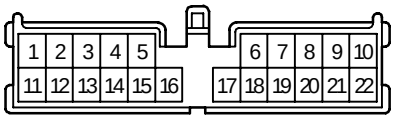

90980–10526



90980–10741

<FEMALE> 22P Non–waterproof Type



90980–10765

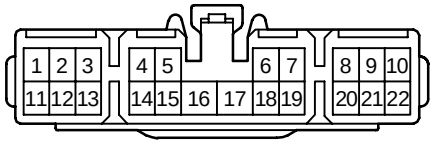

90980–10875



90980–10953



90980–11220

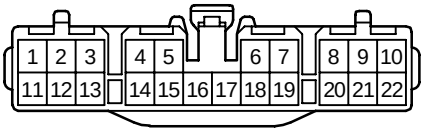

90980–11238



90980–11392

<FEMALE> 22P Non–waterproof Type



90980–11502

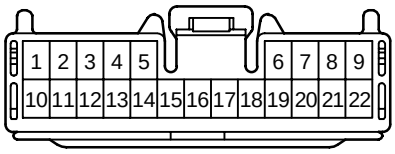

90980–11628



90980–11638



90980–11788



90980–11915



90980–11927

<FEMALE> 23P Non–waterproof Type

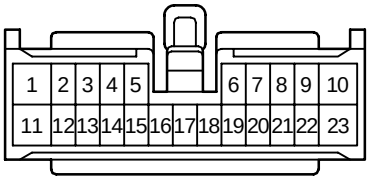

90980–10921

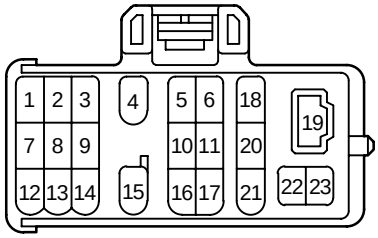

90980–11195

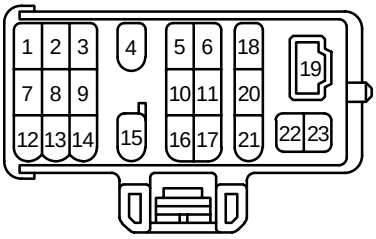

90980–11323

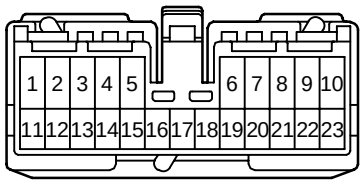

90980–11381

<FEMALE> 24P Non–waterproof Type



90980–10296

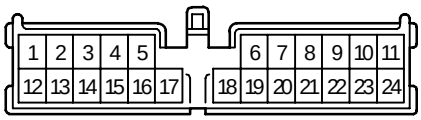

90980–10585



90980–10881



90980–10955

<FEMALE> 24P Non–waterproof Type



90980–11476



90980–11509

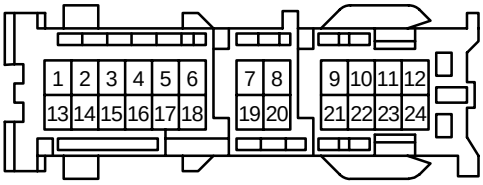

90980–12070



90980–12079

<FEMALE> 24P Non–waterproof Type



90980–12149

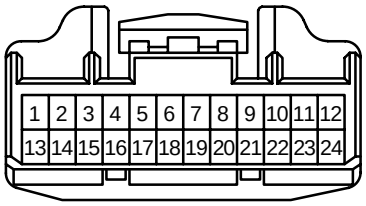

90980–12200

<FEMALE> 25P Non–waterproof Type

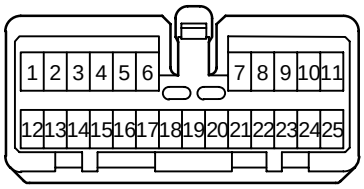

90980–11043



90980–11055

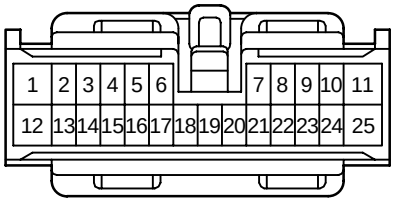

90980–11058



90980–11375

<FEMALE> 25P Non–waterproof Type

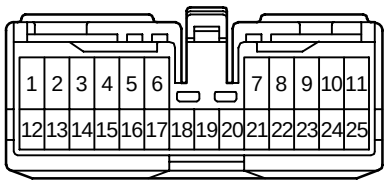

90980–11404

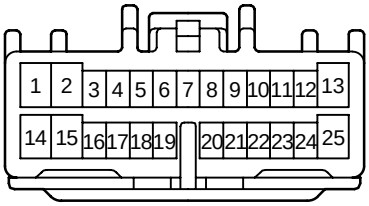

90980–11877

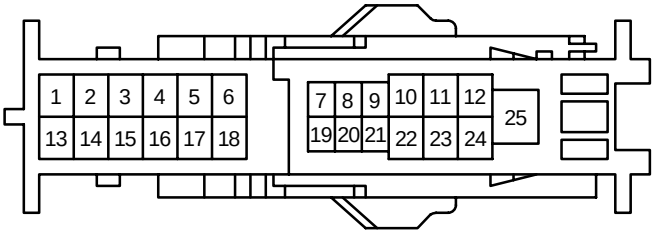

90980–12278

<FEMALE> 26P Non–waterproof Type



90980–10587



90980–10739



90980–10763



90980–10918

<FEMALE> 26P Non–waterproof Type



90980–10925

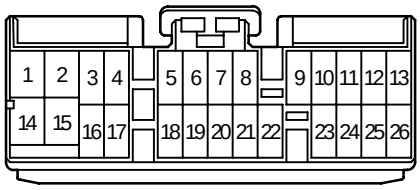

90980–11234

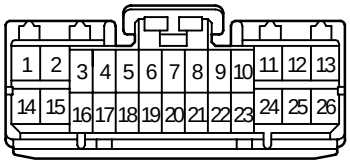

90980–11390

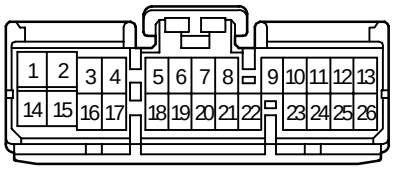

90980–11406

<FEMALE> 26P Non–waterproof Type

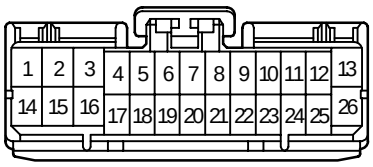

90980–11422



90980–11423

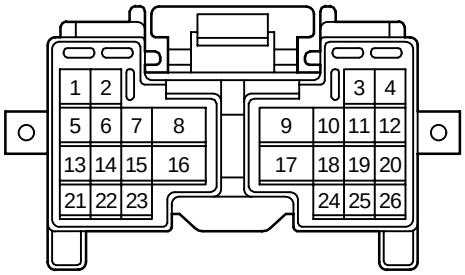

90980–11611

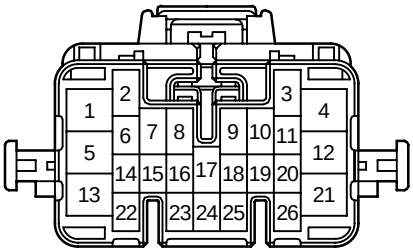

90980–11632

<FEMALE> 26P Non–waterproof Type

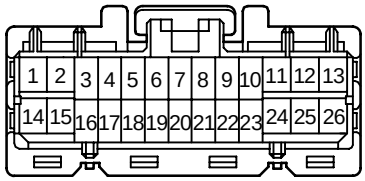

90980–11786



90980–12150

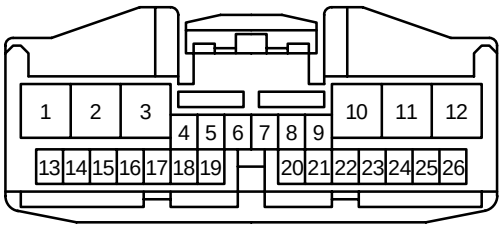

90980–12203

<FEMALE> 27P Non–waterproof Type

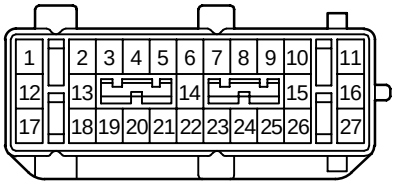

90980–11670

<FEMALE> 28P Non–waterproof Type



90980–11218



90980–11637



90980–11872

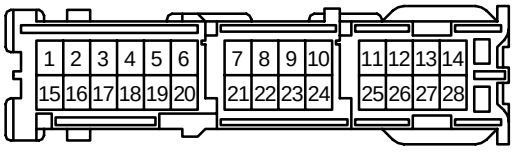

90980–12102

<FEMALE> 30P Non–waterproof Type



90980–12151

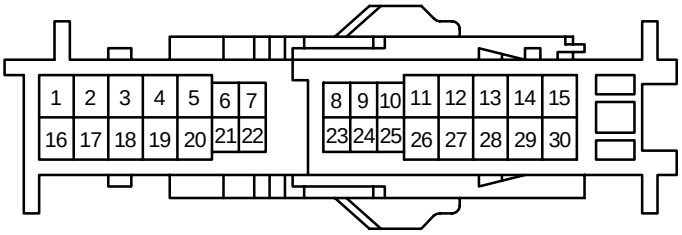

90980–12277

<FEMALE> 31P Non–waterproof Type



90980–11421



90980–11935



90980–12142

<FEMALE> 32P Non–waterproof Type

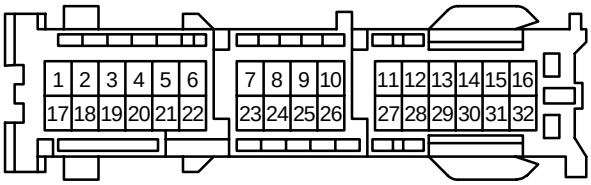

90980–12071

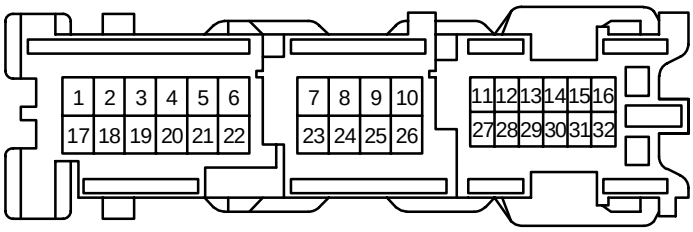

90980–12096



90980–12143

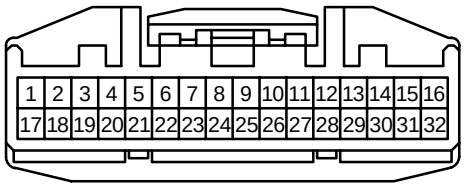

90980–12153

<FEMALE> 32P Non–waterproof Type

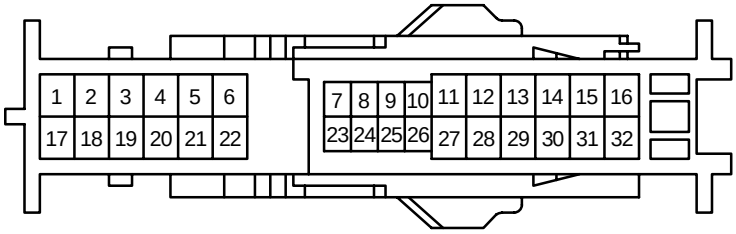

90980–12275

<FEMALE> 34P Non–waterproof Type



90980–11221

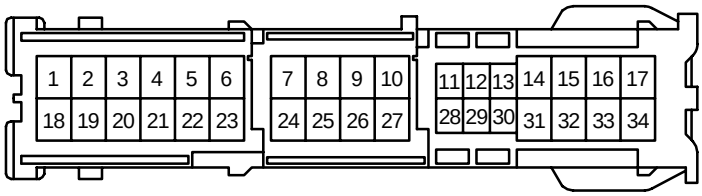

90980–12114



90980–12144

<FEMALE> 35P, 36P Non–waterproof Type



90980–12145



90980–12146

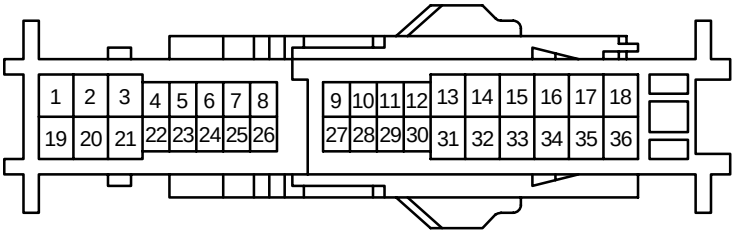

90980–12274

<FEMALE> 38P Non–waterproof Type

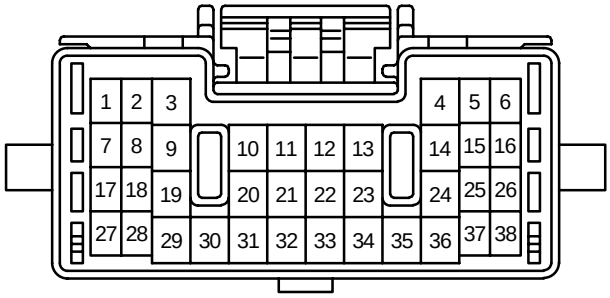

90980–11555

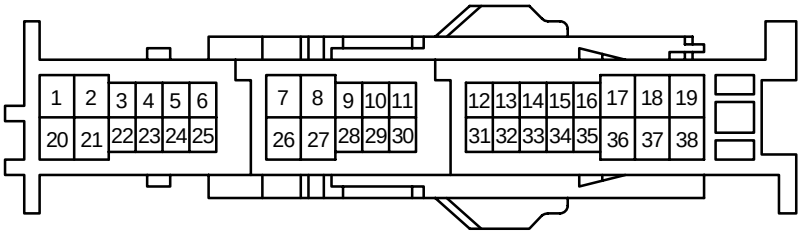

90980–12276

<FEMALE> 40P Non–waterproof Type

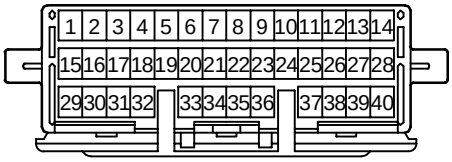

90980–11508

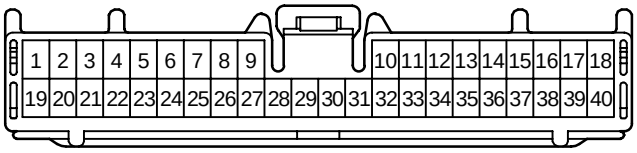

90980–11618

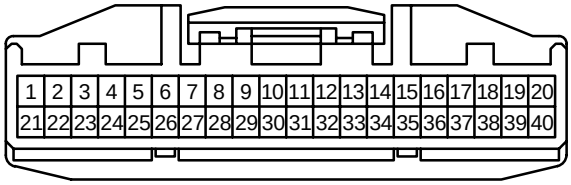

90980–12169

<FEMALE> 40P Non–waterproof Type

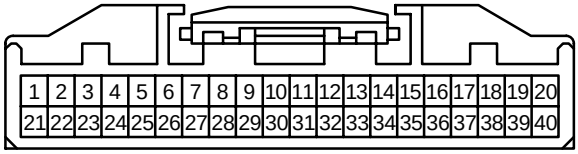

90980–12170

<FEMALE> 42P, 43P, 46P Non–waterproof Type

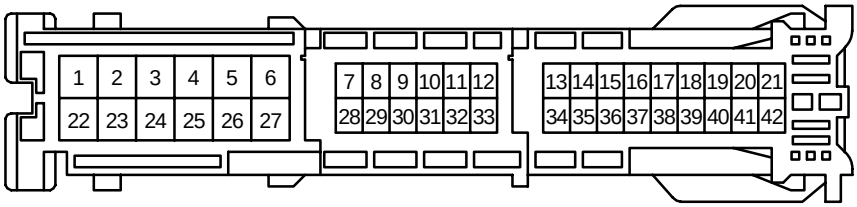

90980–12184

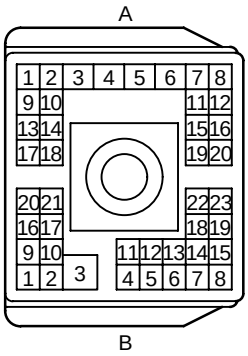

90980–11360

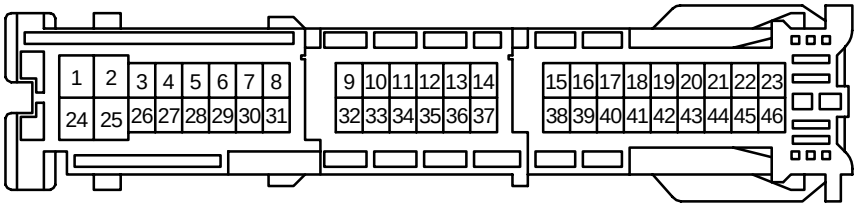

90980–12179

<FEMALE> 49P, 55P, 83P Non–waterproof Type

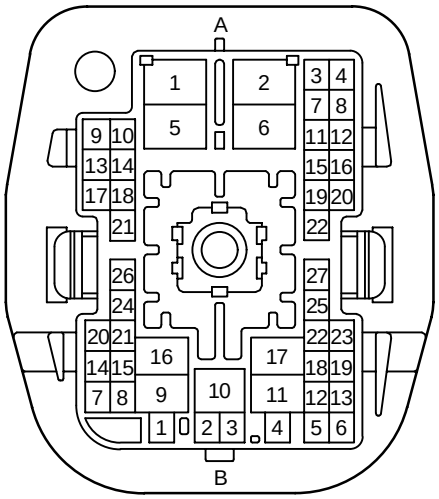

90980–11431

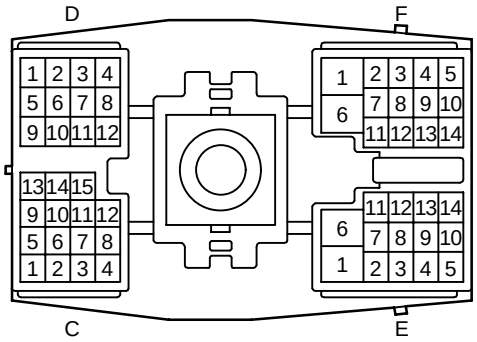

90980–11359

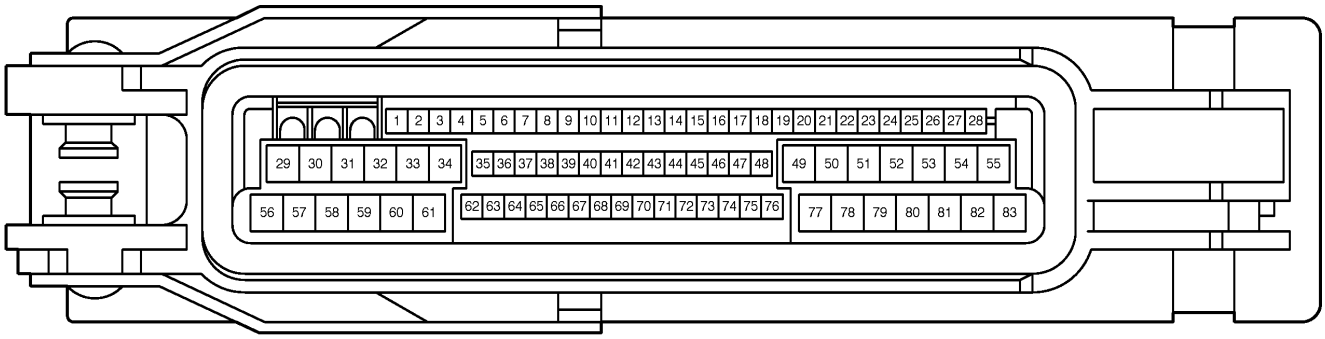

90980–11906

<FEMALE> 88P Non–waterproof Type

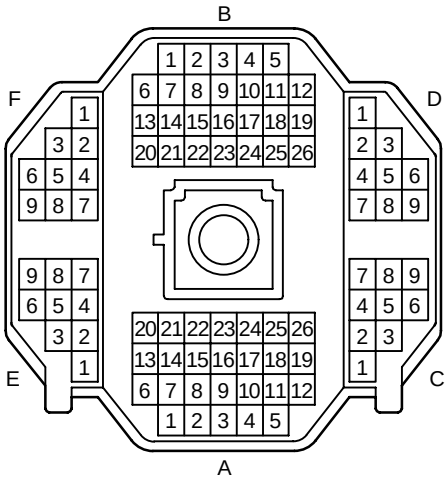

90980–10950

<FEMALE> 10P Non–waterproof Type

 90980–10158	 90980–10159	 90980–10177
 90980–10282	 90980–10294	 90980–10302
 90980–10304	 90980–10322	 90980–10377
 90980–10469	 90980–10528	 90980–10669

<FEMALE> 10P Non–waterproof Type

 90980–10721	 90980–10801	 90980–10822
 90980–10862	 90980–10965	 90980–10993
 90980–10997	 90980–11116	 90980–11276
 90980–11366	 90980–11450	 90980–11527

<FEMALE> 10P Non–waterproof Type

 90980–11537	 90980–11581	 90980–11614
 90980–11642	 90980–11657	 90980–11781
 90980–11817	 90980–11923	 90980–11924
 90980–11948	 90980–12008	 90980–12135

<FEMALE> 10P Non–waterproof Type

 90980–12162	 90980–12226	 90980–12272

<FEMALE> 11P Non–waterproof Type

 90980–10319	 90980–10337	 90980–10338
 90980–10450	 90980–10537	 90980–10723
90980–10727	 90980–10781	 90980–10830
 90980–10873	 90980–10966	 90980–11041

<FEMALE> 11P Non–waterproof Type

 90980–11083	 90980–11539	 90980–12003

<FEMALE> 12P Non–waterproof Type

 90980–10006	 90980–10150	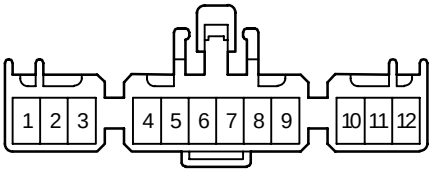 90980–10153
 90980–10303	 90980–10351	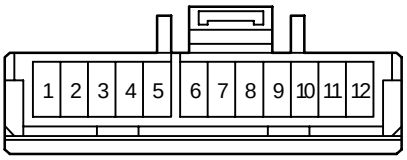 90980–10372
 90980–10397	 90980–10406	 90980–10408
 90980–10421	 90980–10432	 90980–10524

<FEMALE> 12P Non–waterproof Type

 90980–10565	 90980–10632	 90980–10658
 90980–10714	 90980–10724	 90980–10725
 90980–10743	 90980–10803	 90980–10879
 90980–10932	 90980–10967	 90980–10968

<FEMALE> 12P Non–waterproof Type

 90980–10973	 90980–11121	 90980–11129
 90980–11311	 90980–11408	 90980–11424
 90980–11453	 90980–11475	 90980–11531
 90980–11626	 90980–11649	 90980–11656

<FEMALE> 12P Non–waterproof Type

 90980–11661	 90980–11693	 90980–11720
 90980–11782	 90980–11847	 90980–11867
 90980–11869	 90980–11871	 90980–11873
 90980–11947	 90980–12032	 90980–12090

<FEMALE> 12P Non–waterproof Type

 90980–12183	 90980–12222	 90980–12273

<FEMALE> 13P Non–waterproof Type

 90980–10033	 90980–10062	 90980–10132
 90980–10324	 90980–10480	 90980–10805
 90980–11114	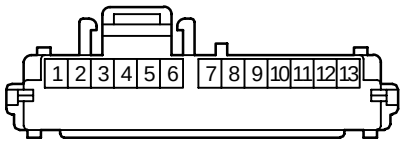 90980–11115	 90980–11199
 90980–11350	 90980–11394	 90980–11478

<FEMALE> 13P Non–waterproof Type

 90980–11542	 90980–11604	 90980–11695
 90980–11714	 90980–11827	 90980–11848
 90980–11952	 90980–12007	 90980–12027

<FEMALE> 14P Non–waterproof Type



90980–10330



90980–10368



90980–10369



90980–10371



90980–10471



90980–10507

<FEMALE> 14P Non–waterproof Type

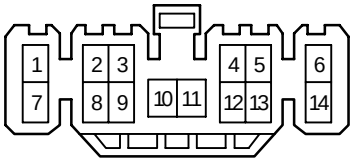

90980–10538



90980–10608



90980–10633



90980–10634



90980–10807
90980–11437



90980–10813

<FEMALE> 14P Non–waterproof Type

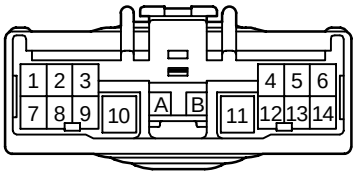

90980–10852



90980–11225

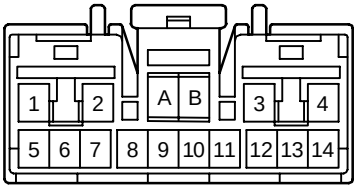

90980–11383



90980–11433

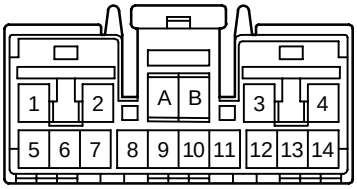

90980–11465



90980–11511

<FEMALE> 14P Non–waterproof Type



90980–11556



90980–11591



90980–11791



90980–11805



90980–11911



90980–11925

<FEMALE> 14P Non–waterproof Type

 90980–12082	

<FEMALE> 15P Non–waterproof Type



90980–10066



90980–10331



90980–10443



90980–10563



90980–10815



90980–10828

<FEMALE> 15P Non–waterproof Type



90980–11042



90980–11056



90980–11179



90980–11264



90980–11372

<FEMALE> 16P Non–waterproof Type



90980–10008



90980–10028



90980–10454



90980–10486



90980–10522



90980–10525

<FEMALE> 16P Non–waterproof Type

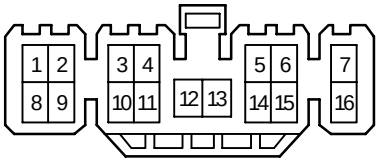

90980–10539



90980–10543



90980–10561



90980–10611



90980–10613



90980–10614

<FEMALE> 16P Non–waterproof Type



90980–10635



90980–10636



90980–10740



90980–10764



90980–10809
90980–11445



90980–10848

<FEMALE> 16P Non–waterproof Type



90980–10885



90980–11082

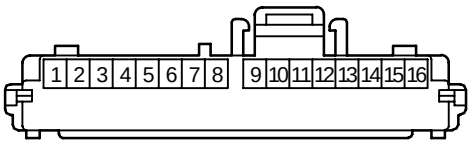

90980–11113



90980–11219



90980–11391



90980–11416

<FEMALE> 16P Non–waterproof Type



90980–11425



90980–11435

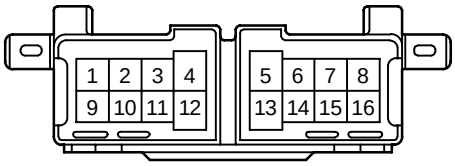

90980–11547

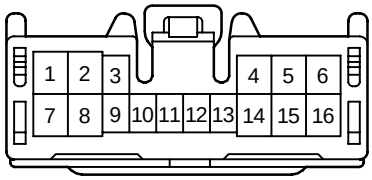

90980–11562



90980–11565



90980–11574

<FEMALE> 16P Non–waterproof Type



90980–11648

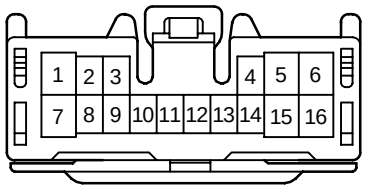

90980–11652

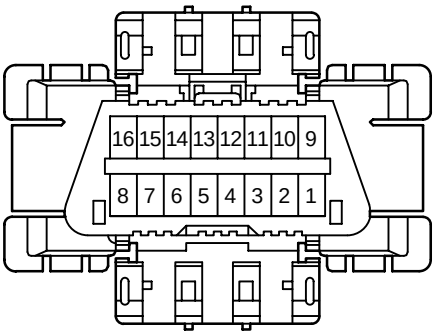

90980–11665
90980–11978

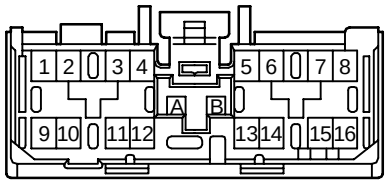

90980–11681

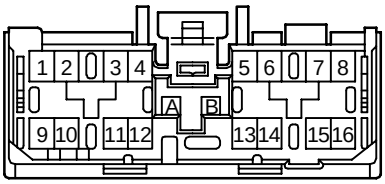

90980–11683



90980–11787

<FEMALE> 16P Non–waterproof Type



90980–12093



90980–12094

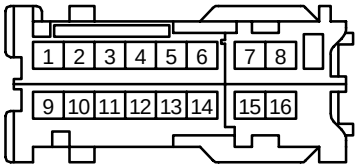

90980–12101



90980–12104



90980–12105



90980–12155

<FEMALE> 16P Non–waterproof Type

 90980–12156	

<FEMALE> 17P Non–waterproof Type

 90980–10031	 90980–10037
 90980–10731 90980–11417 90980–11420	 90980–11203
 90980–11310	 90980–11335

<FEMALE> 17P Non–waterproof Type



90980–11506



90980–11560



90980–11586



90980–11671



90980–11672



90980–11954

<FEMALE> 18P Non–waterproof Type



90980–10285



90980–10295

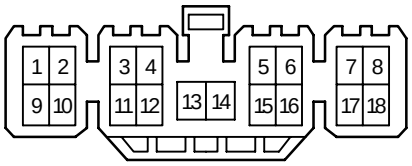

90980–10326



90980–10350



90980–10530



90980–10656

<FEMALE> 18P Non–waterproof Type



90980–10778



90980–10819



90980–11224



90980–11226



90980–11497



90980–11594

<FEMALE> 18P Non–waterproof Type



90980–11595



90980–11913



90980–11914



90980–11973

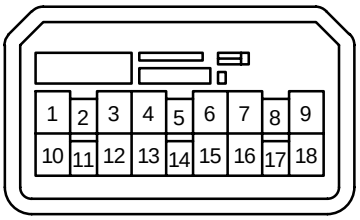

90980–12122



90980–12174

<FEMALE> 19P Non–waterproof Type



90980–10675



90980–10857



90980–10883



90980–11205



90980–11308



90980–11377

<FEMALE> 19P Non–waterproof Type

 90980–11571	 90980–11955

<FEMALE> 20P Non–waterproof Type



90980–10327



90980–10589



90980–10607

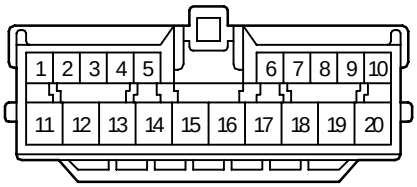

90980–10612



90980–10640



90980–10811
90980–11441

<FEMALE> 20P Non–waterproof Type



90980–10817



90980–10821



90980–10952



90980–11260

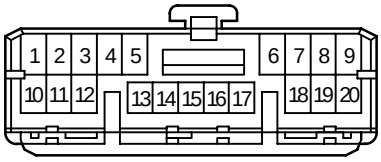

90980–11432

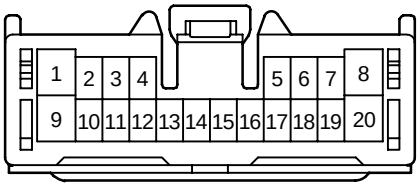

90980–11469

<FEMALE> 20P Non–waterproof Type



90980–11499

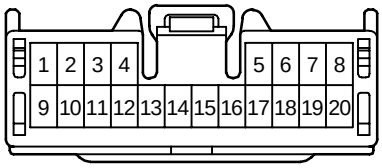

90980–11558



90980–11868



90980–11971



90980–11974

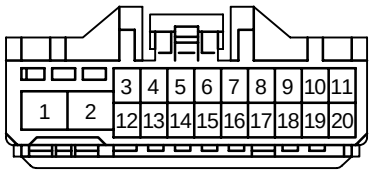

90980–12034

<FEMALE> 20P Non–waterproof Type



90980–12038

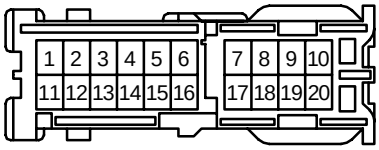

90980–12106



90980–12166



90980–12259

<FEMALE> 21P Non–waterproof Type



90980–10064



90980–10207

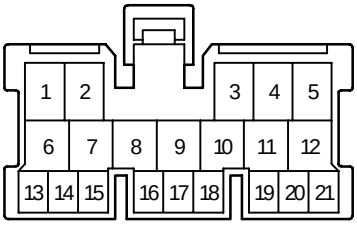

90980–10473



90980–11125



90980–11379



90980–11956

<FEMALE> 21P Non–waterproof Type

 90980–11957	

<FEMALE> 22P Non–waterproof Type



90980–10010

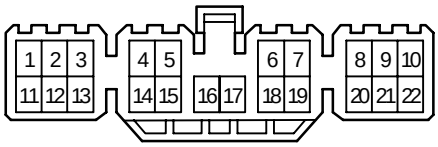

90980–10328

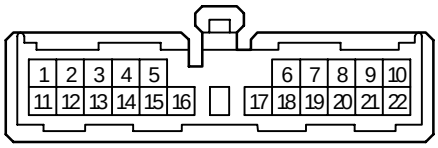

90980–10456



90980–10458

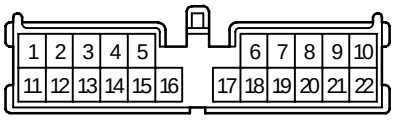

90980–10526



90980–10741

<FEMALE> 22P Non–waterproof Type



90980–10765

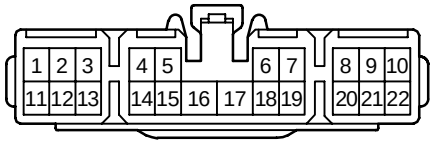

90980–10875



90980–10953



90980–11220

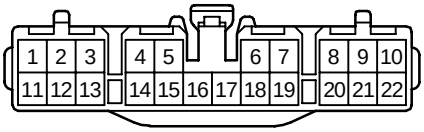

90980–11238



90980–11392

<FEMALE> 22P Non–waterproof Type



90980–11502

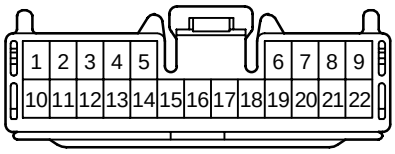

90980–11628



90980–11638



90980–11788



90980–11915



90980–11927

<FEMALE> 23P Non–waterproof Type

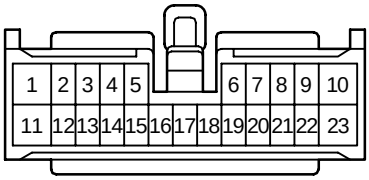

90980–10921

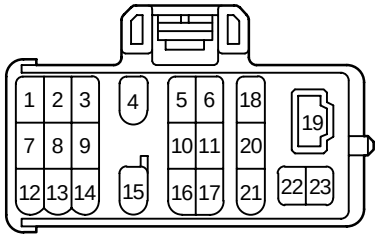

90980–11195

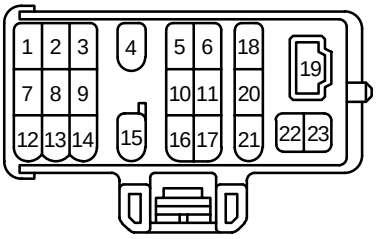

90980–11323

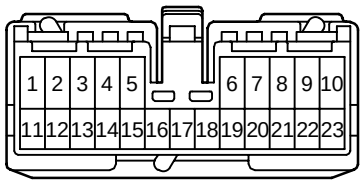

90980–11381

<FEMALE> 24P Non–waterproof Type



90980–10296

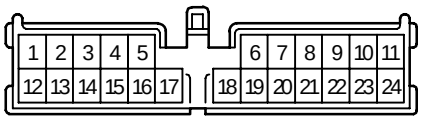

90980–10585



90980–10881



90980–10955

<FEMALE> 24P Non–waterproof Type



90980–11476



90980–11509

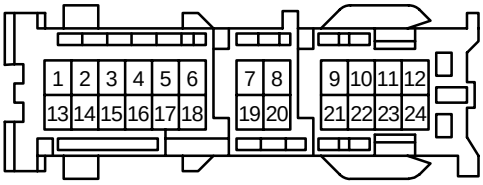

90980–12070



90980–12079

<FEMALE> 24P Non–waterproof Type



90980–12149

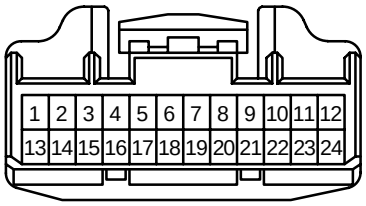

90980–12200

<FEMALE> 25P Non–waterproof Type

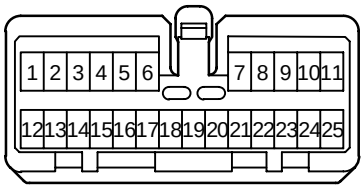

90980–11043



90980–11055

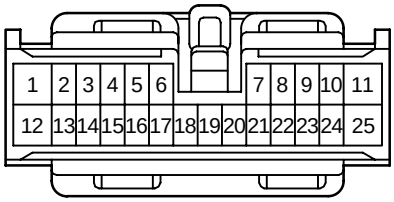

90980–11058



90980–11375

<FEMALE> 25P Non–waterproof Type

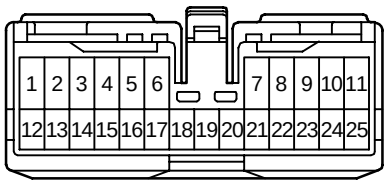

90980–11404

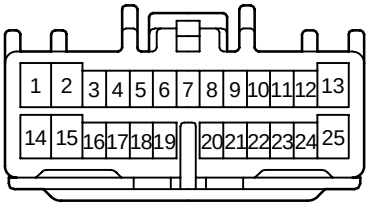

90980–11877

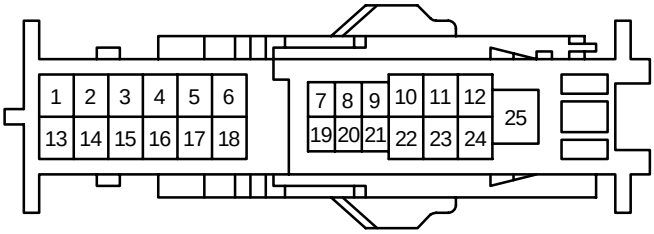

90980–12278

<FEMALE> 26P Non–waterproof Type



90980–10587



90980–10739



90980–10763



90980–10918

<FEMALE> 26P Non–waterproof Type



90980–10925

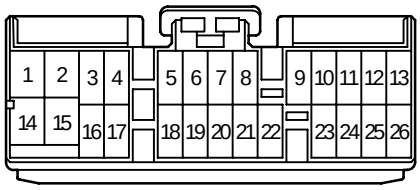

90980–11234

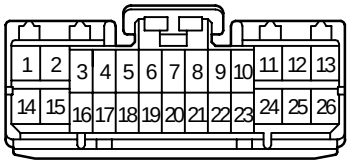

90980–11390

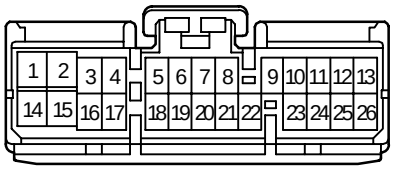

90980–11406

<FEMALE> 26P Non–waterproof Type

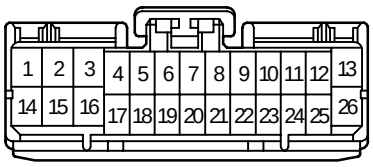

90980–11422



90980–11423

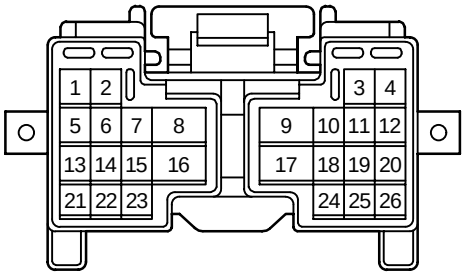

90980–11611

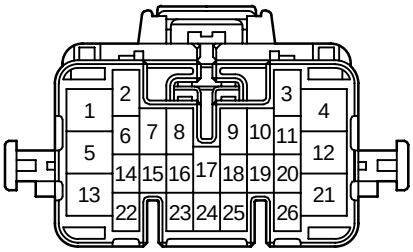

90980–11632

<FEMALE> 26P Non–waterproof Type

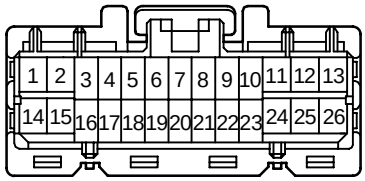

90980–11786



90980–12150

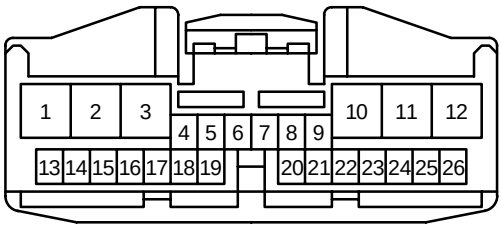

90980–12203

<FEMALE> 27P Non–waterproof Type

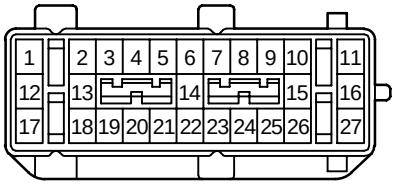

90980–11670

<FEMALE> 28P Non–waterproof Type



90980–11218



90980–11637



90980–11872

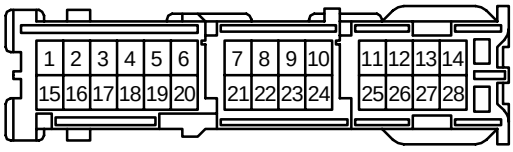

90980–12102

<FEMALE> 30P Non–waterproof Type



90980–12151

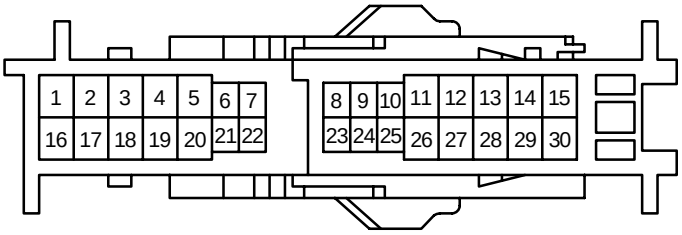

90980–12277

<FEMALE> 31P Non–waterproof Type



90980–11421



90980–11935



90980–12142

<FEMALE> 32P Non–waterproof Type

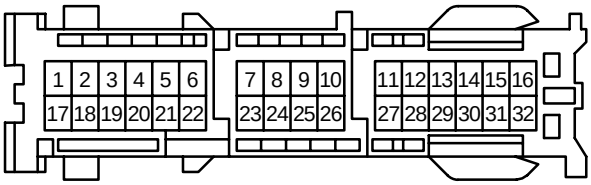

90980–12071

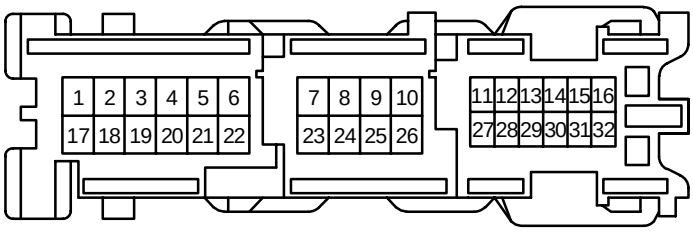

90980–12096



90980–12143

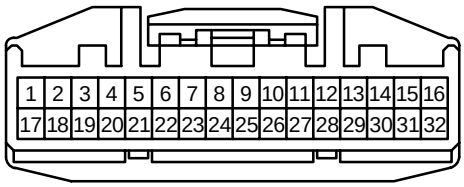

90980–12153

<FEMALE> 32P Non–waterproof Type

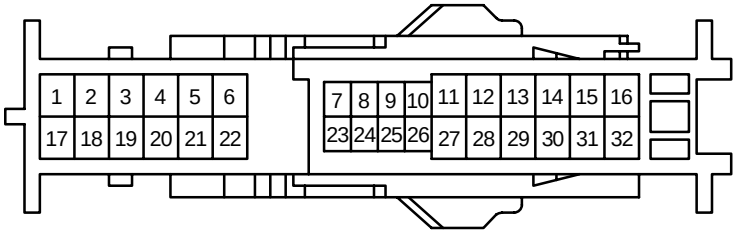

90980–12275

<FEMALE> 34P Non–waterproof Type



90980–11221

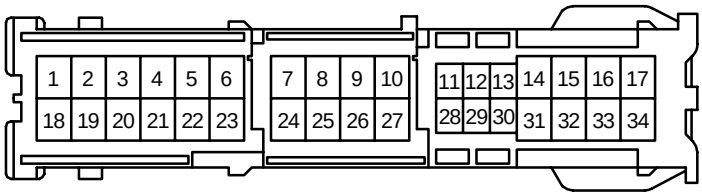

90980–12114



90980–12144

<FEMALE> 35P, 36P Non–waterproof Type



90980–12145



90980–12146

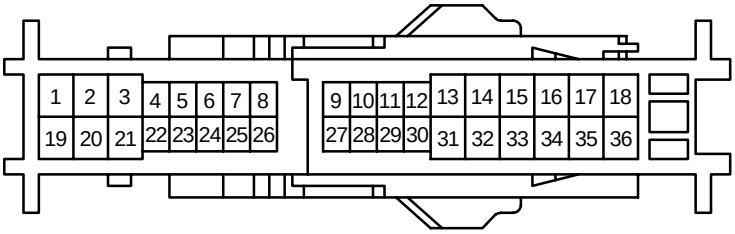

90980–12274

<FEMALE> 38P Non–waterproof Type

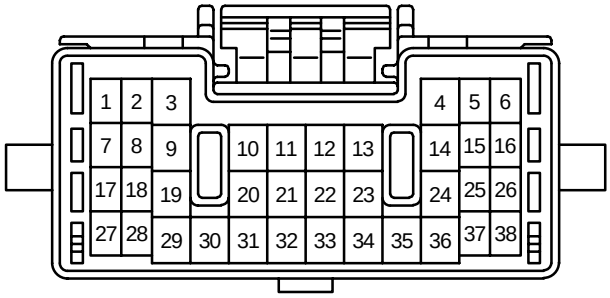

90980–11555

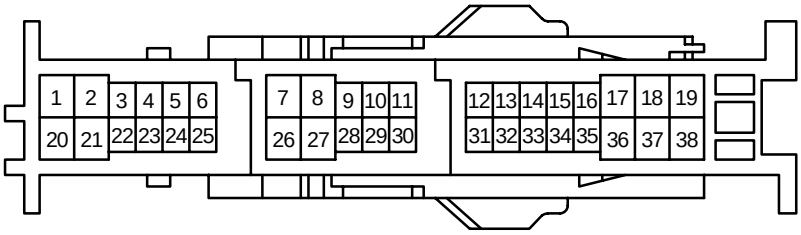

90980–12276

<FEMALE> 40P Non–waterproof Type

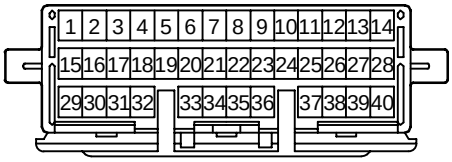

90980–11508

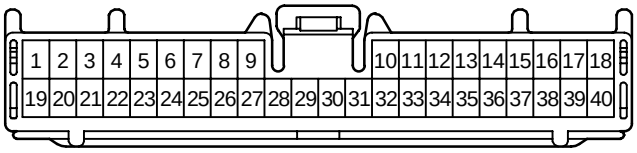

90980–11618

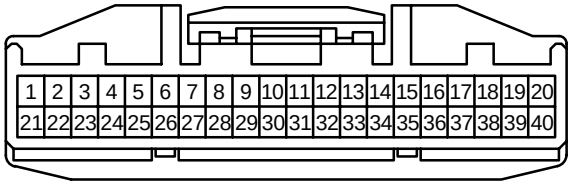

90980–12169

<FEMALE> 40P Non–waterproof Type

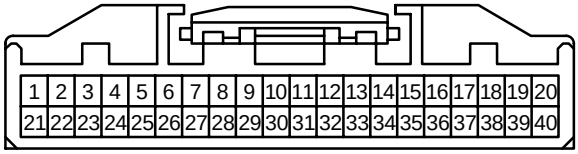

90980–12170

<FEMALE> 42P, 43P, 46P Non–waterproof Type

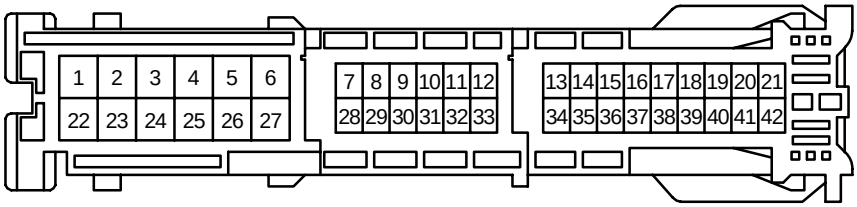

90980–12184

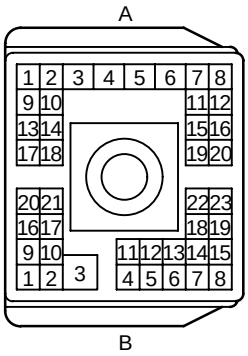

90980–11360

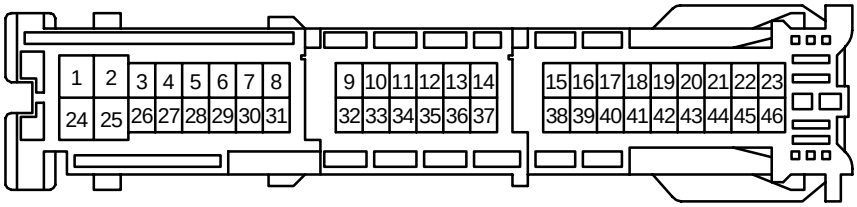

90980–12179

<FEMALE> 49P, 55P, 83P Non–waterproof Type

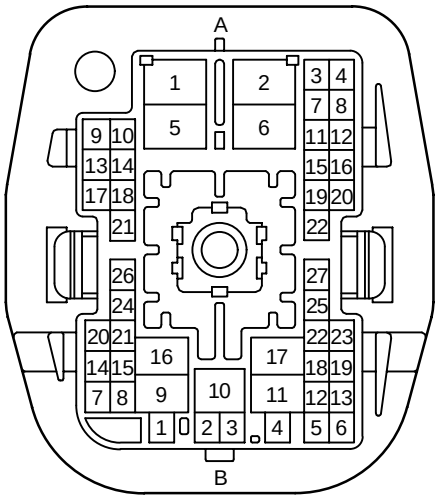

90980–11431

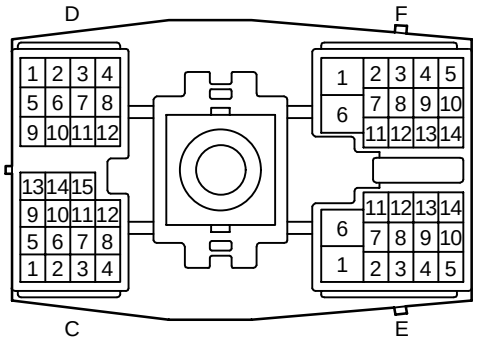

90980–11359

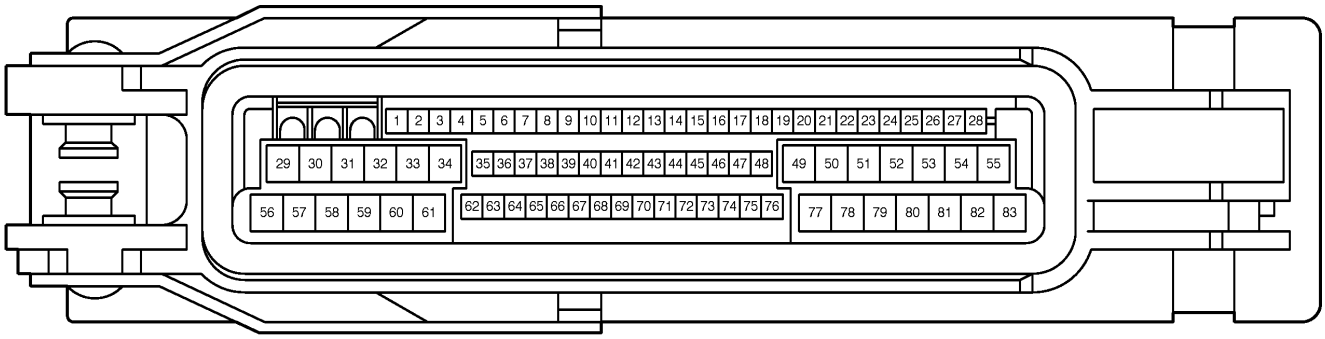

90980–11906

<FEMALE> 88P Non–waterproof Type

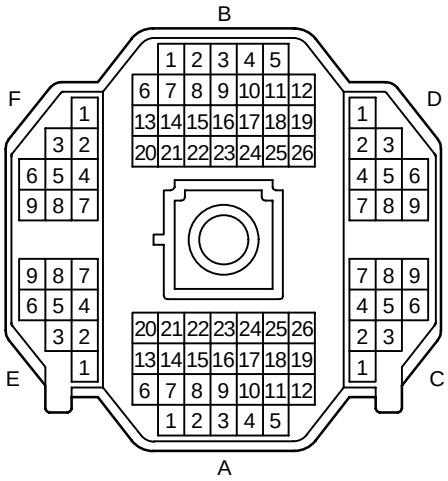

90980–10950

<MALE> 1P Waterproof Type

90980–10114	 90980–10125	90980–10200	90980–10240
90980–10246	90980–10438	90980–10836	90980–10892
90980–10982	 90980–11006	90980–11183	90980–11270
90980–11962			

<MALE> 2P Waterproof Type

 90980–10091	90980–10122	 90980–10156 90980–10412	90980–10192
90980–10242	 90980–10374	90980–10495	90980–10497
90980–10533	90980–10555 90980–10707	90980–10566	90980–10571
90980–10575	90980–10580	90980–10582	90980–10592
90980–10594	90980–10625 90980–10788	90980–10665	 90980–10838

<MALE> 2P Waterproof Type

90980–10842	90980–10886	90980–10898	90980–10900
 90980–10927	90980–10948	90980–10959	90980–10970
90980–11002	 90980–11004	90980–11008	 90980–11029
 90980–11031	 90980–11050	90980–11069	 90980–11072
90980–11073 90980–11074	90980–11137	90980–11141	90980–11155

<MALE> 2P Waterproof Type

90980–11168	 90980–11175	90980–11188	90980–11236
90980–11247	90980–11249	90980–11254	 90980–11272
90980–11303	 90980–11322	90980–11409	90980–11447
 90980–11466	90980–11486	 90980–11789	 90980–11854
90980–11863	 90980–11865	 90980–11901	 90980–11945

<MALE> 2P Waterproof Type

 90980–12194			

<MALE> 3P Waterproof Type

 90980–10093	90980–10190	90980–10235	 90980–10244
90980–10248 90980–10347	90980–10394 90980–10444	90980–10492 90980–10493 90980–10774 90980–10787	90980–10500
90980–10553 90980–10577 90980–10777	 90980–10682	90980–10689	 90980–10698
 90980–10840	 90980–10944	 90980–11015	90980–11044
90980–11131	 90980–11160	90980–11169	90980–11244 90980–11295 90980–11407

<MALE> 3P Waterproof Type

90980–11293	90980–11341	 90980–11348	 90980–11607
90980–11622	 90980–12131		

<MALE> 4P Waterproof Type

 90980–10094	 90980–10139	 90980–10202	 90980–10217
90980–10475	 90980–10510 90980–11076	90980–10590	 90980–10648
 90980–10662	90980–10749	90980–10751 90980–10768	90980–10868
 90980–10941	90980–10989	 90980–11027	90980–11035
90980–11063 90980–11064	 90980–11122	 90980–11138	90980–11177

<MALE> 4P Waterproof Type

 90980–11262 90980–11328	 90980–11268	 90980–11287	 90980–11291
 90980–11929	 90980–12177		

<MALE> 5P Waterproof Type

 90980–10161	 90980–10392	 90980–10557 90980–10570	 90980–10642
90980–10709	90980–10945	90980–11021	 90980–11078
90980–11181	90980–11412	90980–11598	 90980–11689

<MALE> 6P, 7P Waterproof Type

 90980–10194	 90980–10477	 90980–10596	 90980–10650 90980–10984
 90980–10987	 90980–11033	 90980–11193	 90980–11196
 90980–11267	 90980–11289	 90980–10627	 90980–10930
 90980–11171			

<MALE> 8P, 9P Waterproof Type

 90980–10204	 90980–10890	 90980–10894
 90980–10896	 90980–11241	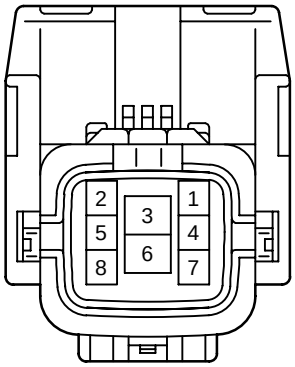 90980–11460
 90980–10379	 90980–10677	 90980–10775
 90980–10826	 90980–11191	

<MALE> 11P, 12P, 13P, 15P Waterproof Type

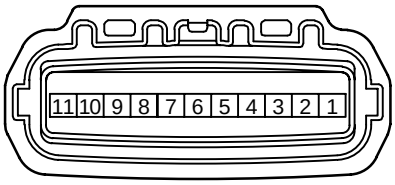 90980–11173	 90980–11239	 90980–11256
 90980–11609	 90980–10568	90980–11086
 90980–10653	 90980–11088	

<MALE> 16P, 17P Waterproof Type



90980–10287

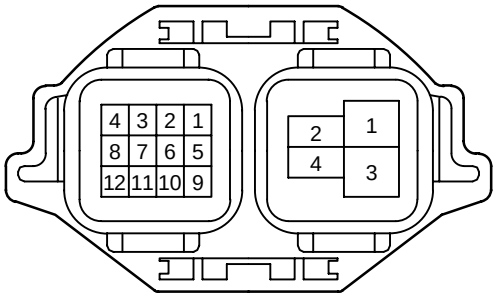

90980–10547



90980–11462

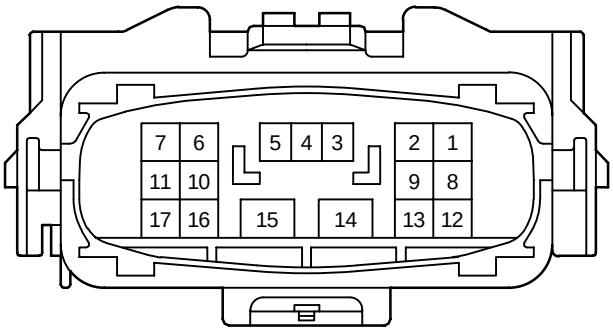

90980–11600

<MALE> 120P Waterproof Type

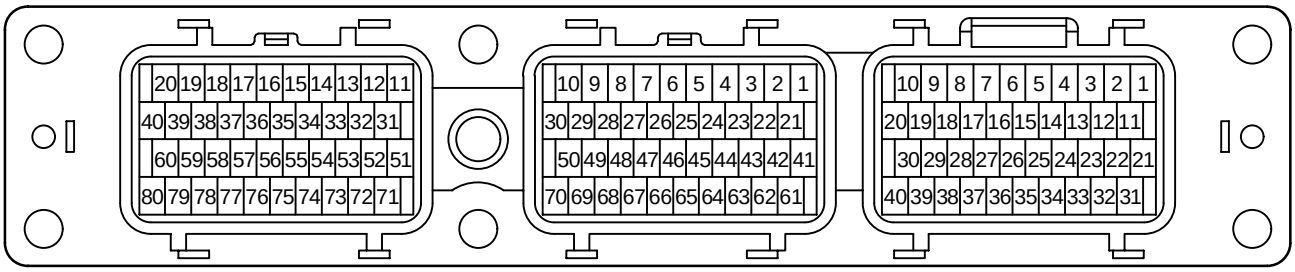

90980–11213

<MALE> 1P Non–waterproof Type

90980–10160	90980–10178	90980–10182	90980–10251
90980–10253	90980–10342	90980–10396	90980–10433 90980–10434
90980–10870 90980–11026 90980–11097	90980–10994	90980–11146	90980–11258
90980–11737	 90980–11774	90980–12041	

<MALE> 2P Non–waterproof Type

90980–10011	90980–10038	 90980–10213 90980–10305	 90980–10255
 90980–10286	 90980–10297	90980–10344 90980–10346	90980–10354 90980–10437
90980–10356	 90980–10424	90980–10620	90980–10687
90980–10824	 90980–10833 90980–11299	 90980–10849	 90980–10859
90980–10905	 90980–10915	 90980–10934	 90980–10958

<MALE> 2P Non–waterproof Type

 90980–11014	 90980–11060	90980–11093	 90980–11159
90980–11211	90980–11300	90980–11305	90980–11367
 90980–11368	90980–11395	 90980–11545	90980–11589
 90980–11655	 90980–11724	90980–11735	 90980–11883
 90980–11889	 90980–11917	 90980–11933	 90980–11967

<MALE> 2P Non–waterproof Type

 90980–11992	 90980–12062		

<MALE> 3P Non–waterproof Type

 90980–10055 90980–10163	 90980–10188	 90980–10215 90980–10283 90980–10299	90980–10231
 90980–10257 90980–10300 90980–10410	90980–10364 90980–10573	90980–10544	90980–10907
 90980–10979	90980–11052	 90980–11229	90980–11298
90980–11385	90980–11470	 90980–11484	 90980–11489
 90980–11620	90980–11763	 90980–11874	 90980–11936

<MALE> 3P Non–waterproof Type

 90980–11937	 90980–11994	 90980–12196	

<MALE> 4P Non–waterproof Type

 90980–10001	 90980–10126	 90980–10144	 90980–10170
 90980–10219	 90980–10237	 90980–10259	 90980–10306
 90980–10399	90980–10466	90980–10502	 90980–10503
90980–10600	 90980–10691	 90980–10794	 90980–10858
 90980–10866	 90980–11012	 90980–11023	 90980–11100

<MALE> 4P Non–waterproof Type

90980–11106	 90980–11126	 90980–11135	 90980–11186
 90980–11301	90980–11399	 90980–11426	 90980–11605
 90980–11765	 90980–11779	 90980–11809	 90980–11812
 90980–11878	 90980–11891	 90980–11965	 90980–11985
 90980–12016	 90980–12123	 90980–12159	 90980–12212

<MALE> 5P Non–waterproof Type

 90980–10040	 90980–10261	 90980–10308	 90980–10518
 90980–10519	 90980–10762	 90980–10790	 90980–10985
 90980–11085	 90980–11318	 90980–11327	 90980–11602
 90980–11843	 90980–11920	 90980–11968	 90980–12036
 90980–12050	 90980–12189		

<MALE> 6P Non–waterproof Type

 90980–10003	 90980–10027	 90980–10172	 90980–10223
 90980–10289	 90980–10312	 90980–10366 90980–10505	 90980–10384 90980–10416 90980–10641
 90980–10401	 90980–10446	 90980–10602	 90980–10603
 90980–10671	 90980–10694	 90980–10793	 90980–10796
 90980–10909	 90980–10975	 90980–10998	 90980–11010

<MALE> 6P Non–waterproof Type

 90980–11067	 90980–11099	 90980–11101	 90980–11110
 90980–11452	90980–11487	90980–11492	 90980–11587
 90980–11696	 90980–11814	 90980–12004	 90980–12013
 90980–12064	 90980–12198	 90980–12204	

<MALE> 7P Non–waterproof Type

 90980–10042	 90980–10263	 90980–10310	 90980–10451
 90980–10459	 90980–10728 90980–10771	 90980–11164	 90980–11339
 90980–11402	 90980–11528	 90980–11739	 90980–12059
 90980–12092			

<MALE> 8P Non–waterproof Type

 90980–10018	 90980–10147	 90980–10174
 90980–10208 90980–10210 90980–10383 90980–10411	 90980–10225	 90980–10279
 90980–10360	 90980–10403	 90980–10418
 90980–10430 90980–10546	 90980–10462	 90980–10769

<MALE> 8P Non–waterproof Type

 90980–10798	 90980–10876 90980–11438	 90980–10963
 90980–11123	 90980–11134	 90980–11320
 90980–11353	 90980–11361	 90980–11389
 90980–11532	 90980–11551	 90980–11582

<MALE> 8P Non–waterproof Type

 90980–11588	 90980–11623	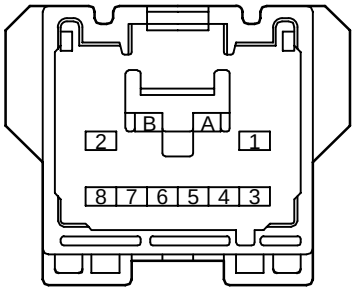 90980–11629
 90980–11636	 90980–12061	 90980–12112
 90980–12220		

<MALE> 9P Non–waterproof Type

 90980–10044	 90980–10265	 90980–10317
 90980–11534	 90980–11543	 90980–11709

<MALE> 10P Non–waterproof Type

 90980–10176	 90980–10281	 90980–10375 90980–10417 90980–10427 90980–10516
 90980–10468	 90980–10527 90980–10719	 90980–10666
 90980–10693	 90980–10800	 90980–10861
 90980–10865 90980–11419	 90980–10961	 90980–10992

<MALE> 10P Non–waterproof Type

 90980–11102	 90980–11325 90980–11331	 90980–11365
 90980–11449	 90980–11526	 90980–11536
 90980–11544	 90980–11580	 90980–11596
 90980–11613	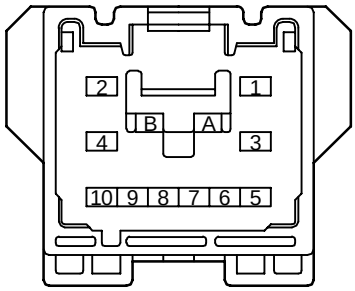 90980–11641	 90980–11752

<MALE> 10P Non–waterproof Type

 90980–11757	 90980–11823	 90980–11922
 90980–11993	 90980–12009	 90980–12023
 90980–12249		

<MALE> 11P Non–waterproof Type

 90980–10531	 90980–10829	 90980–10872
 90980–11200	 90980–11538	 90908–12002
 90980–12250		

<MALE> 12P Non–waterproof Type

 90980–10149	 90980–10405	 90980–10407 90980–10529
 90980–10415	 90980–10436 90980–10440	 90980–10513
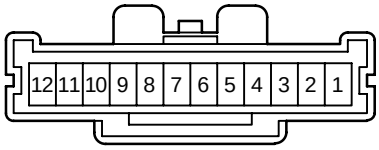 90980–10564	 90980–10802	 90980–10864
 90980–10878	 90980–10938 90980–11105	 90980–11474

<MALE> 12P Non–waterproof Type

 90980–11500	 90980–11530	 90980–11747

<MALE> 13P Non–waterproof Type

 90980–10032	 90980–10061	 90980–10323
 90980–10479	 90980–10804	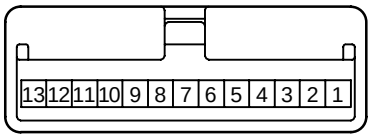 90980–11198
 90980–11393	 90980–11541	 90980–11568
 90980–11635	 90980–11694	 90980–11951

<MALE> 14P Non–waterproof Type



90980–10329



90980–10422



90980–10470



90980–10506
90980–10715



90980–10545

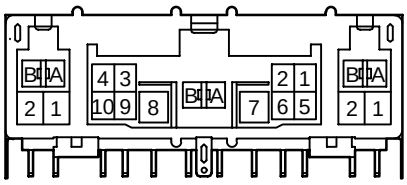

90980–10767

<MALE> 14P Non–waterproof Type



90980–10806



90980–10812

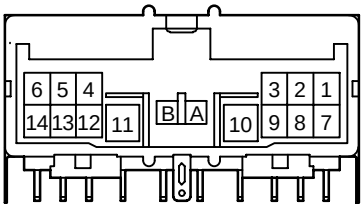

90980–10851



90980–10971
90980–11265

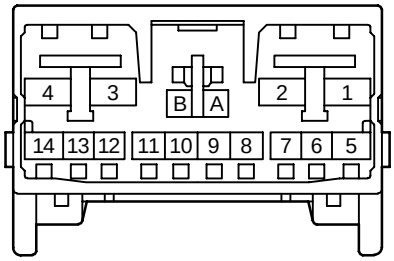

90980–11312



90980–11337

<MALE> 14P Non–waterproof Type

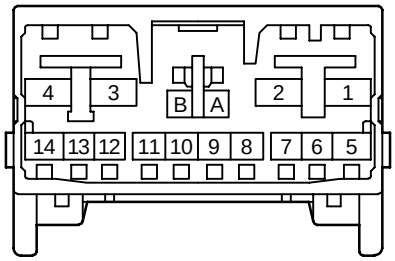

90980–11464



90980–11510

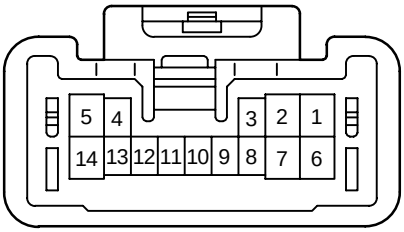

90980–11590



90980–11644
90980–11743
90980–11744



90980–11651



90980–11654

<MALE> 14P Non–waterproof Type

 90980–11753	 90980–11910
 90980–11969 90980–12015	

<MALE> 15P Non–waterproof Type



90980–10065



90980–10442



90980–10461

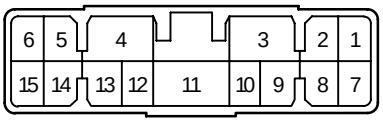

90980–10562



90980–10814



90980–10827

<MALE> 15P Non–waterproof Type



90980–11180



90980–11201



90980–11263

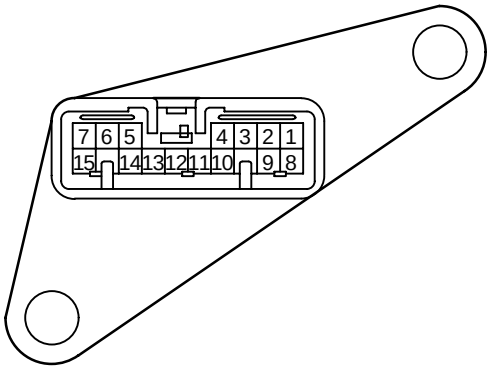

90980–11370

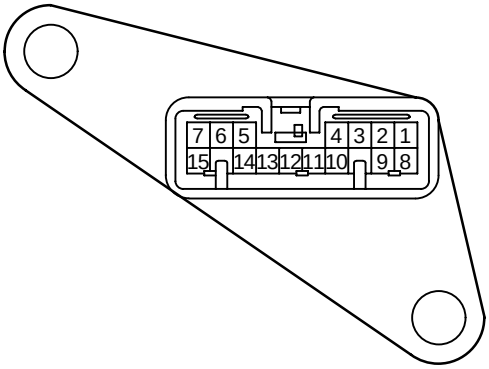

90980–11371

<MALE> 16P Non–waterproof Type



90980–10026



90980–10453



90980–10485



90980–10521



90980–10542



90980–10560

<MALE> 16P Non–waterproof Type



90980–10744



90980–10753



90980–10808
90980–11444

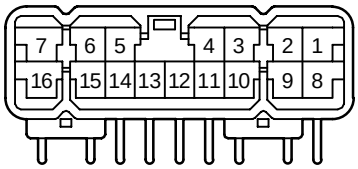

90980–10874



90980–10884

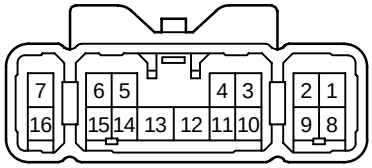

90980–11167

<MALE> 16P Non–waterproof Type



90980–11324

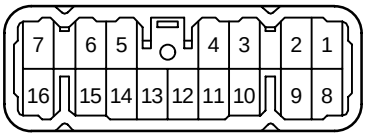

90980–11351



90980–11415



90980–11434

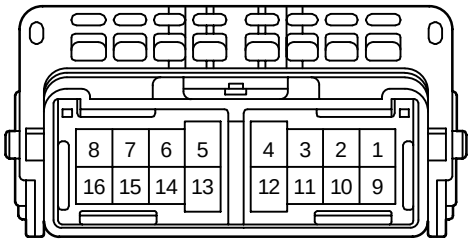

90980–11546

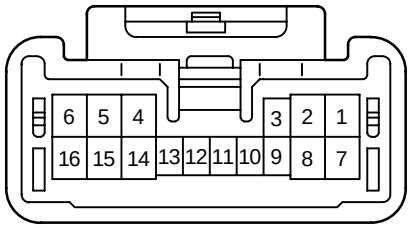

90980–11561

<MALE> 16P Non–waterproof Type



90980–11573

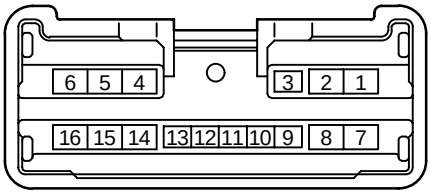

90980–11624

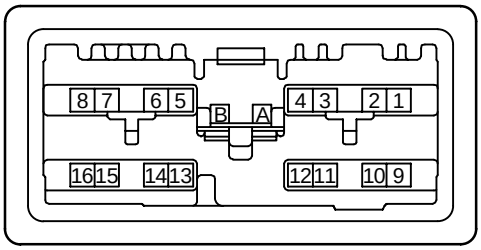

90980–11680

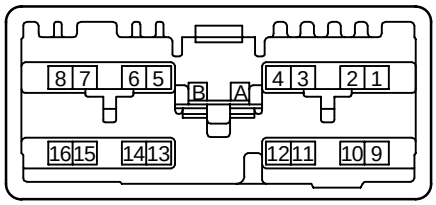

90980–11682



90980–12192

<MALE> 17P Non–waterproof Type



90980–10030



90980–10730



90980–11046



90980–11202



90980–11309



90980–11334

<MALE> 17P Non–waterproof Type



90980–11505



90980–11559



90980–12161

<MALE> 18P Non–waterproof Type



90980–10284

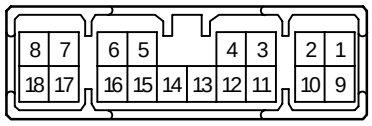

90980–10325



90980–10441



90980–10655
90980–11017

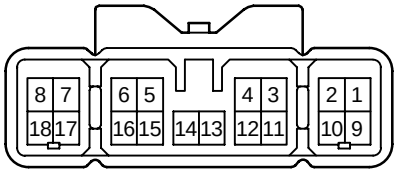

90980–10818

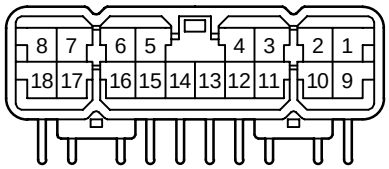

90980–10863

<MALE> 18P Non–waterproof Type

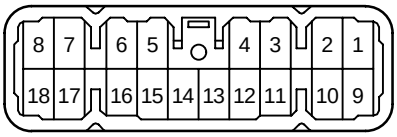

90980–10937
90980–11127



90980–11223

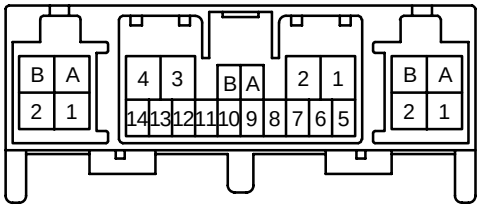

90980–11382



90980–11496



90980–11745

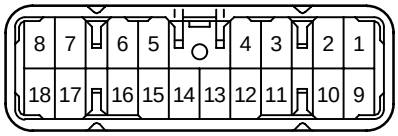

90980–11748

<MALE> 18P Non–waterproof Type

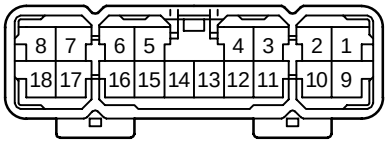

90980–11751



90980–11912



90980–11949



90980–12010

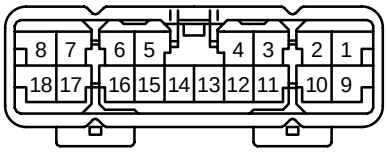

90980–12108

<MALE> 19P Non–waterproof Type



90980–10674



90980–10856



90980–10882

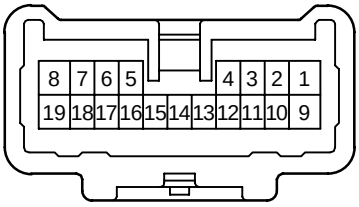

90980–11204

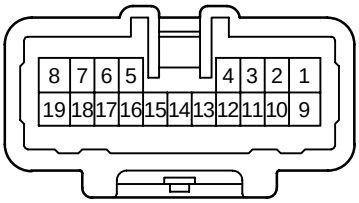

90980–11307



90980–11376

<MALE> 19P Non–waterproof Type

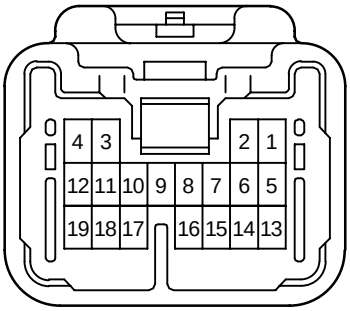 90980–11570	

List of equivalent for the gold and tin–plated repair wire

Repair Wire Part No.	
Tin–plated (Sn)	Gold–plated (Au)
82998–12160 (2.3.M.U)	82998–24050
–12190 (1.8.F.U)	–12300
–12260 (2.3.M.S)	–24070
–12270 (2.3.F.S)	–24080
–12310 (1.0.F.U)	–12320
–12330 (2.3II.M.U)	–12350
–12340 (2.3II.F.U)	–12360
–12430 (2.3II.M.S)	–12450
–12440 (2.3II.F.S)	–12460
–12790 (2.3II.F.S)	–12780
–12670 (1.0III.M.U)	–12680
–12690 (1.0III.F.U)	–12700
–12720 (1.0III.F.S)	–12730
–24020 (1.0II.F.U)	–24110
–24090 (1.8II.M.U)	–24130

HOUSING PART NUMBER LIST

* Example : 82998–24050 indicates the gold–plated 82998–12160.

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
10001	X	BHC	M	4	U	–	–	–	
10002	X	BHC	F	4	U	–	–	–	
10003	X	BHC	M	6	U	–	–	–	
10004	X	BHC	F	6	U	–	–	–	
10006	X	BHC	F	12	U	–	–	–	
10008	X	BHC	F	16	U	–	–	–	
10010	X	BHC	F	22	U	–	–	–	
10011	X	BHC	M	2	U	–	–	–	
10012	X	BHC	F	2	U	–	–	–	
10018	X	BHC	M	8	U	–	–	–	
10019	X	BHC	F	8	U	–	–	–	
10026	X	TODC	M	16	U	12080	–	L,Y	
10027	X	6.3 7.7	M	6 6	U	– 12010	– –	– Y	
10028	X	TODC	F	16	U	12090	–	L,Y	
10029	X	6.3 7.7	F	6 6	U	– 12020	– –	– Y	
10030	X	TODC	M	17	U	12080	–	L,Y	
10031	X	TODC	F	17	U	12090	–	L,Y	
10032	X	TODC	M	13	U	12080	–	L,Y	
10033	X	TODC	F	13	U	12090	–	L,Y	
10037	O	MIC	F	17	U	12120	–	L,Y	
10038	X	TODC	M	2	U	12080	–	L,Y	
10039	X	TODC	F	2	U	12090	–	L,Y	
10040	O	TODC	M	5	U	12080	–	L,Y	
10041	X	TODC	F	5	U	12090	–	L,Y	
10042	X	TODC	M	7	U	12080	–	L,Y	
10043	X	TODC	F	7	U	12090	–	L,Y	
10044	O	TODC	M	9	U	12080	–	L,Y	
10045	O	TODC	F	9	U	12090	–	L,Y	
10055	X	TODC	M	3	U	12080	–	L,Y	
10056	X	TODC	F	3	U	12090	–	L,Y	
10057	X	–	–	–	–	–	–	–	
10061	X	MIC	M	13	U	–	–	–	PCB
10062	O	MIC	F	13	U	12120	–	L,Y	
10063	X	MIC	M	21	U	–	–	–	PCB
10064	X	MIC	F	21	U	12120	–	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
10065	X	TODC	M	15	U	12080	–	L,Y	
10066	X	TODC	F	15	U	12090	–	L,Y	
10068	X	TODC	M	9	U	–	–	–	PCB
10069	X	SL	F	2	U	12130	–	L,Y	
10070	O	SL	F	3	U	12130	–	L,Y	
10071	O	SL	F	7	U	12130	–	L,Y	
10072	X	6.3	F	3	U	12060	12580	Y	
10087	X	TODC	M	9	U	12080	–	L,Y	
10088	X	6.3	F	3	S	–	–	–	
10090	X	6.3	F	1	S	–	–	–	
10091	X	6.3	M	2	S	–	–	–	
10092	X	6.3	F	2	S	–	–	–	
10093	X	6.3	M	3	S	–	–	–	
10094	X	6.3	M	4	S	–	–	–	
10095	X	6.3	F	4	S	–	–	–	
10096	X	TODC	M	6	S	–	–	–	
10097	X	TODC	F	6	S	–	–	–	
10100	X	TODC	M	16	S	–	–	–	
10101	X	TODC	F	16	S	–	–	–	
10106	X	TODC	M	9	U	–	–	–	PCB
10108	X	SL	F	2	U	12130	–	L,Y	
10109	X	SL	F	2	U	12130	–	L,Y	
10110	X	6.3	F	3	S	–	–	–	
10111	X	FPC	F	3	U	–	–	–	
10112	X	FPC	F	8	U	–	–	–	
10113	X	FPC	F	8	U	–	–	–	
10114	O	7.7	M	1	S	–	–	–	
10115	O	7.7	F	1	S	–	–	–	
10116	X	6.3	F	2	S	–	–	–	
10117	X	TODC	M	5	U	12080	–	L,Y	
10119	X	FPC	F	8	U	–	–	–	
10121	X	TODC	F	2	U	12090	–	L,Y	
10122	X	7.7	M	2	S	–	–	–	
10123	X	7.7	F	2	S	–	–	–	
10124	X	6.3	F	2	U	–	–	–	
10125	X	TODC	M	1	S	–	–	–	
10126	X	TODC	M	4	U	12080	–	L,Y	
10127	X	TODC	F	4	U	12090	–	L,Y	
10130	X	TODC	M	5	U	–	–	–	PCB

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 10131	X	LAC	M	22	U	82998– 12100	82998– –	L,Y	
10132	O	LAC	F	13	U	12110	–	L,Y	
10133	X	LAC	F	9	U	12110	–	L,Y	
10138	X	MIC	M	13	U	–	–	–	PCB
10139	X	6.3	M	4	S	–	–	–	
10140	X	6.3	F	4	S	–	–	–	
10141	X	SL	F	2	U	12130	–	L,Y	
10142	X	6.3	F	4	U	–	–	–	
10143	X	FPC	F	3	U	–	–	–	
10144	X	6.3	M	4	U	–	–	–	
10145	X	6.3 7.7	M	3 3	U	– 12010	– –	– Y	
10146	X	6.3 7.7	F	2 1	U	– 12040	– –	– Y	
10147	X	TODC	M	8	U	12080	–	L,Y	
10148	X	TODC	F	8	U	12090	–	L,Y	
10149	X	TODC	M	12	U	12080	–	L,Y	
10150	X	TODC	F	12	U	12090	–	L,Y	
10151	X	MIC	M	22	U	–	–	–	PCB
10152	O	MIC	F	9	U	12120	–	L,Y	
10153	X	2.3	F	12	U	12170	–	L	
10154	X	6.3 7.7	M	3 3	U	– –	– –	– –	
10156	O	6.3	M	2	S	–	–	–	w/o Clamp
10157	O	6.3	F	2	S	–	–	–	
10158	X	FPC	F	10	U	–	–	–	
10159	X	FPC	F	10	U	–	–	–	
10160	X	7.7	M	1	U	12010	–	Y	
10161	X	6.3	M	5	S	–	–	–	w/o Clamp
10162	O	6.3	F	5	S	–	–	–	
10163	X	TODC	M	3	U	12080	–	L,Y	
10164	X	TODC	F	3	U	12090	–	L,Y	
10165	X	7.7	F	1	U	12020	–	Y	
10170	X	6.3	M	4	U	12050	–	Y	w/o Clamp
10171	O	6.3	F	4	U	12060	12580	Y	
10172	O	6.3	M	6	U	12050	–	Y	
10173	O	6.3	F	6	U	12060	12580	Y	
10174	O	6.3	M	8	U	12050	–	Y	
10175	O	6.3	F	8	U	12060	12580	Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 10176	O	6.3	M	10	U	82998– 12050	82998– –	Y	
10177	O	6.3	F	10	U	12060	12580	Y	
10178	O	6.3	M	1	U	12050	–	Y	
10179	O	6.3	F	1	U	12060	12580	Y	
10182	O	TODC	M	1	U	12080	–	L,Y	
10183	O	TODC	F	1	U	12090	–	L,Y	
10184	X	TODC	F	2	S	–	–	–	
10185	X	7.7	F	2	U	12040	–	Y	
10186	X	6.3 7.7	M	2 1	U	12050 12030	– –	Y Y	
10187	X	6.3 7.7	M	2 1	U	12050 12030	– –	Y Y	
10188	X	6.3 7.7	M	2 1	U	12050 12030	– –	Y Y	
10189	X	6.3 7.7	F	2 1	U	12060 12040	12580 –	Y Y	
10190	X	EJ	M	3	S	–	–	–	
10191	X	EJ	F	3	S	–	–	–	
10192	X	EJ	M	2	S	–	–	–	
10193	X	EJ	F	2	S	–	–	–	
10194	X	TODC	M	6	S	–	–	–	
10195	X	TODC	F	6	S	–	–	–	
10196	X	6.3	F	4	U	12060	12580	Y	
10197	X	TODC	F	1	S	–	–	–	
10198	X	6.3 7.7	M	2 1	S	– –	– –	– –	
10199	X	6.3 7.7	F	2 1	S	– –	– –	– –	
10200	X	EJ	M	1	S	–	–	–	
10201	X	EJ	F	1	S	–	–	–	
10202	X	EJ	M	4	S	–	–	–	
10203	X	EJ	F	4	S	–	–	–	
10204	X	EJ	M	8	S	–	–	–	
10205	X	EJ	F	8	S	–	–	–	
10206	X	TODC	M	13	U	–	–	–	PCB
10207	X	TODC	F	21	U	12090	–	L,Y	
10208	X	6.3 TODC	M	8 8	U	– 12080	– –	– L,Y	w/ Flange

E

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
10209	X	6.3	F	2	U	12060	12580	Y	
		TODC		6		12090	–	L,Y	
10210	X	6.3	M	2	U	12050	–	Y	w/o Clamp
		TODC		6		12080	–	L,Y	
10211	X	TODC	M	7	U	12080	–	L,Y	
10212	X	TODC	M	13	U	12080	–	L,Y	
10213	O	6.3	M	2	U	12050	–	Y	w/o Clamp
10214	O	6.3	F	2	U	12060	12580	Y	
10215	X	6.3	M	3	U	12050	–	Y	w/o Clamp
10216	O	6.3	F	3	U	12060	12580	Y	
10217	X	TODC	M	4	S	–	–	–	
10218	X	TODC	F	4	S	–	–	–	
10219	X	6.3	M	4	U	12050	–	Y	
10220	X	6.3	F	4	S	–	–	–	
10221	X	6.3	F	4	U	12060	12580	Y	
10222	X	6.3	F	3	U	12060	12580	Y	
10223	X	6.3	M	6	U	12050	–	Y	
10224	X	6.3	F	6	U	12060	12580	Y	
10225	X	6.3	M	8	U	12050	–	Y	
10228	X	HEAD-LAMP	F	3	U	24140	24200	L,Y	
10229	X	6.3	F	1	U	12060	12580	Y	
10231	X	6.3	M	3	U	12050	–	Y	
10232	X	6.3	F	3	U	12060	12580	Y	
10233	X	6.3	M	25	U	12050	–	Y	
		TODC		25		12080	–	L,Y	
10234	X	6.3	F	3	U	–	–	–	
10235	X	6.3	M	2	S	–	–	–	
		7.7		1		–	–	–	
10236	X	6.3	F	2	S	–	–	–	
		7.7		1		–	–	–	
10237	X	6.3	M	4	U	12050	–	Y	
10238	X	7.7	F	2	U	12020	–	Y	
10239	X	6.3	F	3	S	–	–	–	
10240	O	TODC	M	1	S	–	–	–	
10241	O	TODC	F	1	S	–	–	–	
10242	X	TODC	M	2	S	–	–	–	
10243	X	TODC	F	2	S	–	–	–	
10244	O	TODC	M	3	S	–	–	–	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
10245	X	TODC	F	3	S	–	–	–	
10246	O	6.3	M	1	S	–	–	–	
10247	O	6.3	F	1	S	–	–	–	
10248	X	6.3	M	3	S	–	–	–	w/o Clamp
10249	O	6.3	F	3	S	–	–	–	
10250	X	6.3	F	1	U	12060	12580	Y	
10251	X	6.3	M	1	U	12050	–	Y	w/o Clamp
10252	X	6.3	F	1	U	12060	12580	Y	
10253	X	6.3	M	1	U	12050	–	Y	
10254	X	6.3	F	1	U	12060	12580	Y	
10255	X	6.3	M	2	U	12050	–	Y	
10256	X	6.3	F	2	U	12060	12580	Y	
10257	X	6.3	M	3	U	12050	–	Y	w/o Clamp
10258	X	6.3	F	3	U	12060	12580	Y	
10259	X	6.3	M	4	U	12050	–	Y	
10260	X	6.3	F	4	U	12060	12580	Y	
10261	X	6.3	M	5	U	12050	–	Y	
10262	X	6.3	F	5	U	12060	12580	Y	
10263	X	6.3	M	7	U	12050	–	Y	
10264	X	6.3	F	7	U	12060	12580	Y	
10265	X	6.3	M	9	U	12050	–	Y	
10266	X	6.3	F	9	U	12060	12580	Y	
10267	X	MIC	M	9	U	–	–	–	PCB
10272	X	LC	M	8	U	–	–	–	
10273	X	LC	F	8	U	–	–	–	
10274	O	TODC	F	5	U	12090	–	L,Y	
10275	X	TODC	M	7	U	12080	–	L,Y	
10276	X	6.3	M	5	U	12050	–	Y	
10277	X	6.3	M	7	U	12050	–	Y	
10278	X	6.3	M	9	U	12050	–	Y	
10279	X	TODC	M	8	U	12080	–	L,Y	
10280	X	TODC	F	8	U	12090	–	L,Y	
10281	X	6.3 TODC	M	3 7	U	12050 12080	– –	Y L,Y	
10282	X	6.3 TODC	F	3 7	U	12060 12090	12580 –	Y L,Y	
10283	O	6.3	M	3	U	12050	–	Y	w/ Clamp
10284	X	TODC	M	18	U	12080	–	L,Y	
10285	X	TODC	F	18	U	12090	–	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 10286	X	TODC	M	2	U	82998– 12080	82998– –	L,Y	
10287	X	TODC	M	16	S	–	–	–	
10288	X	TODC	F	16	S	–	–	–	
10289	X	LC	M	6	U	–	–	–	
10290	X	LC	F	6	U	–	–	–	
10291	X	LC	M	14	U	–	–	–	
10292	X	LC	F	14	U	–	–	–	
10293	X	PULSE LOCK	M	52	U	–	–	–	PCB
10294	O	PULSE LOCK	F	10	U	12200	–	L,Y	
10295	O	PULSE LOCK	F	18	U	12210	–	L	
10296	O	PULSE LOCK	F	24	U	12210	–	L	
10297	X	TODC	M	2	U	12080	–	L,Y	
10298	X	TODC	F	2	U	12090	–	L,Y	
10299	X	6.3	M	3	U	12050	–	Y	
10300	X	6.3	M	3	U	12050	–	Y	w/ Flange
10301	X	MFPC	F	8	U	12150	–	L	
10302	O	MFPC	F	10	U	12150	–	L	
10303	O	MFPC	F	12	U	12150	–	L	
10304	X	MFPC	F	10	U	12150	–	L	
10305	X	6.3	M	2	U	12050	–	Y	w/ Clamp
10306	X	6.3 TODC	M	2 2	U	12050 12080	– –	Y L,Y	
10307	X	6.3 TODC	F	2 2	U	12060 12090	12580 –	Y L,Y	
10308	X	MIC	M	5	U	–	–	–	PCB
10309	X	MIC	F	5	U	12120	–	L,Y	
10310	X	MIC	M	7	U	–	–	–	PCB
10311	X	MIC	F	7	U	12120	–	L,Y	
10312	X	TODC	M	6	U	12080	–	L,Y	
10313	X	TODC	F	6	U	12090	–	L,Y	
10314	X	TODC	M	5	U	12080	–	L,Y	
10315	X	MODU	M	26	U	–	–	–	
10316	X	MODU	F	26	U	–	–	–	
10317	X	6.3 TODC	M	1 8	U	12050 12080	– –	Y L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
10318	X	6.3	F	1	U	12060	12580	Y	
		TODC		8		12090	–	L,Y	
10319	X	6.3	F	1	U	12060	12580	Y	
		TODC		10		12090	–	L,Y	
10320	X	2.3	F	2	U	12170	–	L	
10321	X	2.3	F	8	U	12170	–	L	
10322	O	2.3	F	10	U	12170	–	L	
10323	X	2.3	M	13	U	12160*	–	L	
10324	X	2.3	F	13	U	12170	–	L	
10325	O	2.3	M	18	U	12160*	–	L	
10326	O	2.3	F	18	U	12170	–	L	
10327	X	2.3	F	20	U	12170	–	L	
10328	X	2.3	F	22	U	12170	–	L	
10329	X	2.3	M	12	U	12160*	–	L	
		6.3		2		12050	–	Y	
10330	X	2.3	F	12	U	12170	–	L	
		6.3		2		12060	12580	Y	
10331	X	2.3	F	14	U	12170	–	L	
		6.3		1		12060	12580	Y	
10332	X	7.7	F	1	U	12040	–	Y	
10333	X	6.3	F	2	U	12060	12580	Y	
10334	X	6.3	F	6	U	12060	12580	Y	
10335	X	6.3	F	6	U	12060	12580	Y	
10336	X	6.3	F	8	U	12060	12580	Y	
10337	X	6.3	F	11	U	12060	12580	Y	
10338	X	6.3	F	11	U	12060	12580	Y	
10339	X	6.3	F	4	U	12060	12580	Y	
		7.7		1		12040	–	Y	
10340	X	6.3	F	2	U	12060	12580	Y	
		7.7		3		12040	–	Y	
10341	X	6.3	F	3	S	12540	–	Y	
10342	X	7.7	M	1	U	12030	–	Y	
10343	X	7.7	F	1	U	12040	–	Y	
10344	X	6.3	M	2	U	12050	–	Y	w/o Clamp
10345	X	6.3	F	2	U	12060	12580	Y	
10346	X	6.3	M	2	U	12050	–	Y	w/ Clamp
10347	O	6.3	M	3	S	12050	–	Y	w/ Clamp
10348	X	6.3	F	2	U	12060	12580	Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 10349	X	PULSE LOCK	M	30	U	82998– –	82998– –	–	PCB
10350	X	PULSE LOCK	F	18	U	12200	–	L,Y	
10351	O	PULSE LOCK	F	12	U	12200	–	L,Y	
10352	X	TODC	F	2	S	–	–	–	
10353	O	TODC	F	3	S	–	–	–	
10354	X	2.3	M	2	U	12160*	–	L	w/o Clamp
10355	O	2.3	F	2	U	12170	–	L	
10356	O	7.7	M	2	U	12030	–	Y	
10357	O	7.7	F	2	U	12040	–	Y	
10358	X	6.3	F	8	U	12060	12580	Y	
10359	O	6.3	F	1	U	12060	12580	Y	
10360	X	2.3	M	8	U	12160*	–	L	
10361	X	2.3	M	20	U	12160*	–	L	
10362	O	SP	F	2	U	12530	–	L,Y	
10363	X	5.2	F	1	U	–	–	–	
10364	X	2.3	M	3	U	12160*	–	L	w/o Clamp
10365	O	2.3	F	3	U	12170	–	L	
10366	O	2.3	M	6	U	12160*	–	L	w/o Clamp
10367	O	2.3	F	6	U	12170	–	L	
10368	X	MFPC	F	14	U	12150	–	L	
10369	O	MFPC	F	14	U	12150	–	L	
10370	X	PULSE LOCK	M	42	U	–	–	–	PCB
10371	O	PULSE LOCK	F	14	U	12210	–	L	
10372	X	MFPC	F	12	U	12150	–	L	
10373	X	7.7 TODC	F	2 2	S	– –	– –	– –	
10374	X	7.7	M	2	S	–	–	–	
10375	X	2.3	M	10	U	12160*	–	L	w/o Flange
10376	X	SP SP	F	5 5	U	12520 12530	– –	L,Y L,Y	
10377	X	SP	F	10	U	12530	–	L,Y	
10378	O	MIC	F	4	U	12120	–	L,Y	
10379	X	TODC	M	9	S	–	–	–	
10380	X	TODC	F	9	S	–	–	–	w/o Clamp
10381	X	TODC	F	9	S	–	–	–	w/ Clamp

E

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
10382	X	6.3	F	4	U	12060	12580	Y	
		7.7		2		12040	–	Y	
10383	X	6.3	M	2	U	–	–	–	w/ Flange
		TODC		6		12080	–	L,Y	
10384	O	2.3	M	6	U	12160*	–	L	w/o Flange
10385	X	7.7	F	2	U	12040	–	Y	
10386	X	6.3	F	9	U	12060	12580	Y	
10392	X	TLC	M	3	S	12280	–	R	
		TODC		2		–	–	–	
10393	X	TLC	F	3	S	12290	–	R	
		TODC		2		–	–	–	
10394	X	TLC	M	3	S	12280	–	R	w/ Clamp
10395	X	TLC	F	3	S	12290	–	R	
10396	X	TLC	M	1	U	12220	–	L	
10397	X	2.3	F	12	U	12170	–	L	
10398	X	TLC	F	1	U	12230	–	L	
10399	O	TLC	M	4	U	12220	–	L	
10400	X	TLC	F	4	U	12230	–	L	
10401	O	TLC	M	6	U	12220	–	L	
10402	O	TLC	F	6	U	12230	–	L	
10403	X	TLC	M	6	U	12220	–	L	
		TODC		2		12080	–	L,Y	
10404	X	TLC	F	6	U	12230	–	L	
		TODC		2		12090	–	L,Y	
10405	X	2.3	M	6	U	12160*	–	L	
		TLC		6		12220	–	L	
10406	X	2.3	F	6	U	12170	–	L	
		TLC		6		12230	–	L	
10407	X	TLC	M	12	U	12220	–	L	
10408	X	TLC	F	12	U	12230	–	L	
10410	X	6.3	M	3	U	12050	–	Y	w/ Clamp
10411	X	6.3	M	2	U	12050	–	Y	w/ Clamp
		TODC		6		12080	–	L,Y	
10412	X	6.3	M	2	S	–	–	–	w/ Clamp
10413	X	2.3	M	18	U	12160*	–	L	
10414	O	2.3	F	6	U	12170	–	L	
10415	X	2.3	M	10	U	12160*	–	L	
		6.3		2		12050	–	Y	
10416	X	2.3	M	6	U	–	–	–	PCB

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 10417	X	2.3	M	10	U	82998– –	82998– –	–	PCB
10418	X	2.3 TODC	M	6 2	U	12160* 12080	– –	L L,Y	
10419	X	2.3 TODC	F	6 2	U	12170 12090	– –	L L,Y	
10420	X	2.3	F	3	U	12170	–	L	
10421	X	2.3 6.3	F	10 2	U	12170 12060	– 12580	L Y	
10422	X	2.3 6.3	M	12 2	U	12160* 12050	– –	L Y	
10423	X	MIC	F	2	U	12120	–	L,Y	
10424	X	6.3	M	2	U	12050	–	Y	
10425	X	6.3	F	2	U	12060	12580	Y	
10426	X	MIC	F	2	U	12120	–	L,Y	
10427	X	2.3	M	10	U	12160*	–	L	w/ Flange
10428	O	HEAD-LAMP	F	3	U	24140	24200	L,Y	
10429	X	PULSE LOCK	M	24	U	–	–	–	PCB
10430	X	TLC	M	8	U	12220	–	L	
10431	X	TLC	F	8	U	12230	–	L	
10432	O	2.3	F	12	U	12170	–	L	
10433	X	2.3	M	1	U	12160*	–	L	w/o Clamp
10434	X	2.3	M	1	U	12160*	–	L	w/ Clamp
10435	X	2.3	F	1	U	12170	–	L	
10436	X	2.3	M	12	U	–	–	–	PCB
10437	O	2.3	M	2	U	12160*	–	L	w/ Clamp
10438	X	2.3	M	1	S	12260*	–	L	
10439	X	2.3	F	1	S	12270*	12600	L	
10440	X	2.3	M	12	U	–	–	–	PCB
10441	X	2.3	M	18	U	–	–	–	PCB
10442	X	1.8 6.3	M	12 3	U	12180 12050	– –	L Y	
10443	X	1.8 6.3	F	12 3	U	12190* 12060	– 12580	L Y	
10444	X	TLC	M	3	S	12280	–	R	w/o Clamp
10445	X	TODC	M	13	U	–	–	–	PCB
10446	X	6.3 7.7	M	4 2	U	12050 12030	– –	Y Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
10447	O	6.3	F	4	U	12060	12580	Y	
		7.7		2		12040	–	Y	
10448	X	6.3 II	M	4	U	–	–	–	
10449	X	6.3 II	F	8	U	24170	–	Y	
10450	X	6.3 II	F	11	U	24170	–	Y	
10451	X	6.3	M	7	U	12050	–	Y	
10452	X	6.3	F	7	U	12060	12580	Y	
10453	X	2.3	M	12	U	12160*	–	L	
		6.3		4		12050	–	Y	
10454	X	2.3	F	12	U	12170	–	L	
		6.3		4		12060	12580	Y	
10455	X	TLC	M	22	U	12220	–	L	
10456	X	TLC	F	22	U	12230	–	L	
10457	X	2.3	M	19	U	12160*	–	L	
		6.3		3		12050	–	Y	
10458	X	2.3	F	19	U	12170	–	L	
		6.3		3		12060	12580	Y	
10459	X	TLC	M	7	U	–	–	–	PCB
10460	X	TLC	F	7	U	12230	–	L	
10461	X	TODC	M	15	U	12080	–	L,Y	
10462	X	2.3	M	5	U	12160*	–	L	
		6.3		3		12050	–	Y	
10463	O	2.3	F	5	U	12170	–	L	
		6.3		3		12060	12580	Y	
10464	X	TODC	F	3	U	12090	–	L,Y	
10465	X	2.3	F	2	U	12170	–	L	
10466	X	TNS	M	4	U	12240	–	L	
10467	O	TNS	F	4	U	12250	–	L	
10468	X	TNS	M	10	U	12240	–	L	
10469	X	TNS	F	10	U	12250	–	L	
10470	O	TNS	M	14	U	12240	–	L	
10471	O	TNS	F	14	U	12250	–	L	
10472	X	2.3	M	12	U	12160*	–	L	
		TNS		9		12240	–	L	
10473	X	2.3	F	12	U	12170	–	L	
		TNS		9		12250	–	L	
10474	O	2.3	F	2	S	12270*	12600	L	
10475	O	2.3	M	4	S	12260*	–	L	
10476	O	2.3	F	4	S	12270*	12600	L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 10477	X	2.3	M	6	S	82998– 12260*	82998– –	L	
10478	X	2.3	F	6	S	12270*	12600	L	
10479	X	2.3 6.3	M	12 1	U	12160* 12050	– –	L Y	
10480	X	2.3 6.3	F	12 1	U	12170 12060	– 12580	L Y	
10481	O	6.3	F	2	U	12060	12580	Y	
10482	X	2.3	F	2	U	12170	–	L	
10483	X	2.3	F	3	U	12170	–	L	
10484	X	2.3	F	4	U	12170	–	L	
10485	X	2.3 TODC	M	10 6	U	12160* 12080	– –	L L,Y	
10486	X	2.3 TODC	F	10 6	U	12170 12090	– –	L L,Y	
10487	O	FTC	F	5	U	12510	–	L,Y	
10488	O	FTC	F	5	U	12510	–	L,Y	
10489	O	FTC	F	3	U	12510	–	L,Y	
10490	O	FTC	F	3	U	12510	–	L,Y	
10491	X	MIC	F	2	U	12120	–	L,Y	
10492	X	2.3	M	3	S	12260*	–	L	w/o Clamp
10493	X	2.3	M	3	S	12260*	–	L	w/ Clamp
10494	X	2.3	F	3	S	12270*	12600	L	
10495	O	2.3	M	2	S	12260*	–	L	
10496	O	2.3	F	2	S	12270*	12600	L	
10497	X	2.3	M	2	S	12260*	–	L	
10498	O	2.3	F	2	S	12270*	12600	L	
10499	X	6.3	M	1	U	12050	–	Y	w/ Clamp
10500	X	2.3	M	3	S	12260*	–	L	
10501	X	2.3	F	3	S	12270*	12600	L	
10502	X	2.3	M	4	U	12160*	–	L	
10503	X	2.3	M	4	U	12160*	–	L	
10504	O	2.3	F	4	U	12170	–	L	
10505	X	2.3	M	6	U	12160*	–	L	w/ Clamp
10506	X	2.3	M	14	U	–	–	–	PCB
10507	X	2.3	F	14	U	12170	–	L	
10508	X	2.3	M	20	U	–	–	–	PCB
10509	X	TODC	F	5	U	12090	–	L,Y	
10510	X	TNS	M	4	S	–	–	–	w/o Clamp
10511	X	TNS	F	2	U	12250	–	L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–10512	X	TNS	F	2	U	82998–12250	82998– –	L	
10513	O	2.3	M	12	U	12160*	–	L	
10514	X	2.3 6.3	F	2 2	U	12170 12060	– 12580	L Y	
10515	X	2.3	F	4	U	12170	–	L	
10516	X	2.3	M	10	U	–	–	–	PCB
10517	X	2.3 6.3 7.7	F	4 2 2	U	12170 12060 12040	– 12580 –	L Y Y	
10518	X	2.3 6.3	M	4 1	U	12160* 12050	– –	L Y	
10519	X	2.3 6.3	M	4 1	U	12160* 12050	– –	L Y	
10520	X	2.3 6.3	F	4 1	U	12170 12060	– 12580	L Y	
10521	X	2.3 7.7	M	15 1	U	12160* 12030	– –	L Y	
10522	X	2.3 7.7	F	15 1	U	12170 12040	– –	L Y	
10523	X	TNS	F	8	U	12250	–	L	
10524	X	TNS	F	12	U	12250	–	L	
10525	X	TNS	F	16	U	12250	–	L	
10526	O	TNS	F	22	U	12250	–	L	
10527	X	TLC	M	10	U	–	–	–	PCB
10528	O	TLC	F	10	U	12230	–	L	
10529	X	TLC	M	12	U	–	–	–	PCB
10530	X	2.3 6.3	F	17 1	U	12170 12060	– 12580	L Y	
10531	X	2.3	M	11	U	12160*	–	L	
10532	O	2.3	F	2	S	12270*	12600	L	
10533	X	2.3	M	2	S	12260*	–	L	
10534	X	2.3	F	2	S	12270*	12600	L	
10535	X	2.3	M	3	U	–	–	–	PCB
10536	X	2.3 6.3	F	8 1	U	12170 12060	– 12580	L Y	
10537	X	2.3 6.3	F	10 1	U	12170 12060	– 12580	L Y	
10538	X	2.3	F	14	U	12170	–	L	
10539	X	2.3	F	16	U	12170	–	L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 10542	X	2.3	M	16	U	82998– 12160*	82998– –	L	
10543	X	2.3	F	16	U	12170	–	L	
10544	X	2.3	M	3	U	12160*	–	L	
10545	X	2.3 6.3	M	12 2	U	12160* 12050	– –	L Y	
10546	X	TLC	M	8	U	12220	–	L	
10547	X	2.3 6.3 7.7	M	12 2 2	S	12260* – –	– – –	L – –	
10548	X	2.3	F	12	S	12270*	12600	L	
10549	X	6.3 7.7	F	2 2	S	– –	– –	– –	
10550	X	2.3 6.3	F	3 2	S	12270* –	12600 –	L –	
10551	X	6.3	F	4	S	–	–	–	
10552	O	TNS	M	22	U	12240	–	L	
10553	X	TLC	M	3	S	12280	–	R	w/ Clamp
10554	O	TLC	F	3	S	12290	–	R	
10555	X	2.3	M	2	S	12260*	–	L	
10556	X	2.3	F	2	S	12270*	12600	L	
10557	X	TLC	M	5	S	12280	–	R	w/ Clamp
10558	X	TLC	F	5	S	12290	–	R	
10559	X	7.7	F	2	U	12040	–	Y	
10560	X	2.3	M	16	U	12160*	–	L	
10561	X	2.3	F	16	U	12170	–	L	
10562	X	2.3 6.3 7.7	M	12 2 1	U	12160* 12050 12030	– – –	L Y Y	
10563	X	2.3 6.3 7.7	F	12 2 1	U	12170 12060 12040	– 12580 –	L Y Y	
10564	X	1.8	M	12	U	12180	–	L	
10565	X	1.8	F	12	U	12190*	–	L	
10566	X	6.3	M	2	S	–	–	–	
10567	X	6.3	F	2	S	12540	–	Y	
10568	X	TODC	M	12	S	–	–	–	
10569	X	TODC	F	12	S	–	–	–	
10570	X	TLC	M	5	S	12280	–	R	w/o Clamp
10571	X	2.3	M	2	S	12260*	–	L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–10572	O	2.3	F	2	S	82998–12270*	82998–12600	L	
10573	O	2.3	M	3	U	12160*	–	L	w/ Clamp
10574	X	HEAD-LAMP	F	3	S	24150	24190	L,Y	
10575	O	2.3	M	2	S	12260*	–	L	
10576	X	2.3	F	2	S	12270*	12600	L	
10577	O	TLC	M	3	S	12280	–	R	w/ Clamp
10578	X	2.3	F	2	S	12270*	12600	L	
10579	X	HEAD-LAMP	F	3	S	24150	24190	L,Y	
10580	O	2.3	M	2	S	12260*	–	L	
10581	X	2.3	F	2	S	12270*	12600	L	
10582	X	2.3	M	2	S	12260*	–	L	
10583	X	2.3	F	2	S	12270*	12600	L	
10584	X	TNS	M	38	U	–	–	–	PCB
10585	X	TNS	F	24	U	12250	–	L	
10586	X	TNS	M	26	U	–	–	–	PCB
10587	O	TNS	F	26	U	12250	–	L	
10588	X	TNS	M	20	U	–	–	–	PCB
10589	X	TNS	F	20	U	12250	–	L	
10590	O	2.3	M	4	S	12260*	–	L	
10591	X	2.3	F	4	S	12270*	12600	L	
10592	O	2.3	M	2	S	12260*	–	L	
10593	X	2.3	F	2	S	12270*	12600	L	
10594	X	2.3	M	2	S	12260*	–	L	
10595	X	2.3	F	2	S	12270*	12600	L	
10596	X	2.3	M	6	S	12260*	–	L	
10597	X	2.3	F	6	S	12270*	12600	L	
10598	O	2.3	F	2	S	12270*	12600	L	
10599	O	TNS	M	26	U	12240	–	L	
10600	X	2.3	M	4	U	12160*	–	L	
10601	O	2.3	F	4	U	12170	–	L	
10602	X	2.3	M	6	U	12160*	–	L	
10603	X	2.3	M	6	U	12160*	–	L	
10604	X	2.3	F	6	U	12170	–	L	
10605	X	2.3	F	6	U	12170	–	L	
10606	X	1.8	M	34	U	12180	–	L	
10607	X	1.8	F	20	U	12190*	–	L	
10608	X	1.8	F	14	U	12190*	–	L	
10609	O	2.3	F	2	S	12270*	12600	L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
10610	X	2.3	F	1	U	12170	–	L	
		TNS		4		12250	–	L	
10611	X	2.3	F	8	U	12170	–	L	
		TNS		8		12250	–	L	
10612	X	2.3	F	10	U	12170	–	L	
		TNS		10		12250	–	L	
10613	X	TNS	F	16	U	12250	–	L	
10614	X	TNS	F	16	U	12250	–	L	
10615	X	TODC	M	7	U	–	–	–	PCB
10616	X	6.3	F	4	S	12540	–	Y	
10617	X	2.3	F	2	S	12270*	12600	L	
10618	X	6.3	F	2	U	12060	12580	Y	
		7.7		1		12040	–	Y	
10619	O	6.3	F	1	U	12060	12580	Y	
10620	X	TLC	M	2	U	12220	–	L	
10621	X	TLC	F	2	U	12230	–	L	
10622	X	2.3	F	2	S	12270*	12600	L	
10623	X	2.3	F	2	S	12270*	12600	L	
10624	X	2.3	F	5	S	12270*	12600	L	
10625	X	2.3	M	2	S	12260*	–	L	w/ Clamp
10626	X	2.3	F	2	S	12270*	12600	L	
10627	X	TLC	M	7	S	12280	–	R	
10628	X	TLC	F	7	S	12290	–	R	
10629	X	2.3	F	3	S	12270*	12600	L	
10630	X	2.3	M	18	U	–	–	–	PCB
10631	X	2.3	F	5	U	12170	–	L	
10632	X	2.3	F	12	U	12170	–	L	
10633	X	TLC	F	14	U	12230	–	L	
10634	X	TLC	F	14	U	12230	–	L	
10635	X	TLC	F	16	U	12230	–	L	
10636	X	TLC	F	16	U	12230	–	L	
10637	X	2.3	F	2	U	12170	–	L	
10638	X	2.3	F	3	U	12170	–	L	
10639	X	2.3	M	20	U	12160*	–	L	
10640	X	2.3	F	20	U	12170	–	L	
10641	X	2.3	M	6	U	12160*	–	L	w/ Flange
10642	X	2.3	M	5	S	–	–	–	PCB
10643	X	2.3	F	6	S	12270*	12600	L	
10644	X	2.3	F	5	U	12170	–	L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 10645	O	MFPC	F	4	U	82998– 12150	82998– –	L	
10646	X	6.3	M	4	S	–	–	–	
10647	X	6.3	M	5	S	–	–	–	w/ Clamp
10648	O	2.3	M	4	S	12260*	–	L	
10649	X	2.3	F	4	S	12270*	12600	L	
10650	O	2.3	M	6	S	12260*	–	L	w/ Clamp
10651	X	2.3	F	6	S	12270*	12600	L	
10652	X	7.7	F	1	U	12040	–	Y	
10653	X	1.8	M	13	S	–	–	–	
10654	X	1.8	F	13	S	12620	–	L	
10655	X	1.8	M	18	U	–	–	–	PCB
10656	X	1.8	F	18	U	12190*	–	L	
10657	X	1.8	M	30	U	–	–	–	PCB
10658	O	1.8	F	12	U	12190*	–	L	
10659	X	FTC	F	5	U	12510	–	L,Y	
10660	X	2.3	F	3	U	12170	–	L	
10661	X	TNS	M	14	U	–	–	–	PCB
10662	X	TNS	M	4	S	–	–	–	
10663	X	TNS	F	4	S	–	–	–	Outer
10664	X	TNS	F	4	S	–	–	–	Inner
10665	X	2.3	M	2	S	12260*	–	L	
10666	X	2.3	M	10	U	–	–	–	PCB
10667	X	2.3	M	10	U	–	–	–	PCB
10668	X	2.3	M	10	U	–	–	–	PCB
10669	O	2.3	F	10	U	12170	–	L	
10670	X	2.3	M	6	U	–	–	–	PCB
10671	X	2.3	M	6	U	–	–	–	PCB
10672	O	2.3	F	6	U	12170	–	L	
10673	X	6.3 7.7	F	4 2	U	12060 12040	12580 –	Y Y	
10674	X	2.3 6.3	M	18 1	U	12160* 12050	– –	L Y	
10675	X	2.3 6.3	F	18 1	U	12170 12060	– 12580	L Y	
10676	X	TLC	M	7	S	12280	–	R	
10677	X	TLC	M	9	S	12280	–	R	
10678	X	TLC	F	9	S	12290	–	R	
10679	O	2.3	F	2	U	12170	–	L	
10680	X	TLC	M	10	U	–	–	–	PCB

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 10681	X	TNS	M	20	U	82998– –	82998– –	–	PCB
10682	X	TNS	M	3	S	–	–	–	
10683	X	TNS	F	3	S	–	–	–	
10684	X	TNS	F	3	S	–	–	–	
10685	X	2.3 6.3	F	2 2	S	12270* 12540	12600 –	L Y	
10686	O	2.3 6.3	F	7 2	S	12270* 12540	12600 –	L Y	
10687	X	2.3	M	2	U	12160*	–	L	
10688	X	5.2	F	1	U	–	–	–	
10689	X	2.3	M	3	S	12260*	–	L	
10690	X	2.3	F	3	S	12270*	12600	L	
10691	X	TNS	M	4	U	–	–	–	PCB
10692	X	TNS	F	4	U	12250	–	L	
10693	X	2.3	M	10	U	12160*	–	L	
10694	X	2.3	M	6	U	12160*	–	L	
10695	X	2.3	F	3	S	12270*	12600	L	
10696	O	1.8	F	20	U	12190*	–	L	
10697	O	1.8	F	14	U	12190*	–	L	
10698	X	TLC	M	3	S	12280	–	R	
10699	X	TLC	M	10	U	–	–	–	PCB
10700	X	6.3	M	2	U	12050	–	Y	
10701	X	6.3	F	4	S	12540	–	Y	
10702	O	2.3	F	2	S	12270*	12600	L	
10703	X	6.3	F	1	U	12060	12580	Y	
10704	X	6.3	F	3	U	12060	12580	Y	
10705	X	6.3	F	1	S	–	–	–	
10706	O	2.3	F	2	S	12270*	12600	L	
10707	X	2.3	M	2	S	12260*	–	L	
10708	X	6.3	F	3	S	–	–	–	
10709	X	2.3 TLC	M	2 3	S	12260* 12280	– –	L R	
10710	X	2.3 TLC	F	2 3	S	12270* 12290	12600 –	L R	
10711	O	1.8	F	4	S	12620	–	L	
10712	X	2.3	F	5	S	12270*	12600	L	
10713	X	6.3 7.7	F	3 2	U	12060 12040	12580 –	Y Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 10714	X	2.3 6.3	F	9 3	U	82998– 12170 12060	82998– – 12580	L Y	
10715	X	2.3	M	14	U	12160*	–	L	
10716	X	2.3	F	4	U	12170	–	L	
10717	X	2.3	F	4	U	12170	–	L	
10718	X	6.3	F	5	U	12060	12580	Y	
10719	O	TLC	M	10	U	12220	–	L	
10720	O	2.3	F	2	S	12270*	12600	L	
10721	X	2.3	F	10	U	12170	–	L	
10722	X	1.8	M	34	U	12180	–	L	
10723	X	2.3	F	11	U	12170	–	L	
10724	X	2.3	F	12	U	12170	–	L	
10725	X	2.3	F	12	U	12170	–	L	
10726	X	PULSE LOCK	M	30	U	–	–	–	PCB
10727	X	2.3 6.3	F	9 2	U	12170 12060	– 12580	L Y	
10728	X	2.3 6.3	M	5 2	U	– –	– –	– –	PCB
10729	X	2.3 6.3	F	5 2	U	12170 12060	– 12580	L Y	
10730	X	2.3	M	17	U	12160*	–	L	
10731	X	2.3	F	17	U	12170	–	L	
10732	X	TNS	M	14	U	–	–	–	PCB
10733	X	TNS	M	20	U	–	–	–	PCB
10734	X	1.8	F	2	S	12620	–	L	
10735	X	1.8	F	2	S	12620	–	L	
10736	X	1.8	F	2	S	12620	–	L	
10737	O	1.8	F	2	S	12620	–	L	
10738	X	1.8 1.0	M	16 48	U	– –	– –	– –	PCB
10739	X	1.8 1.0	F	10 16	U	12190* 12310*	– –	L L	
10740	X	1.0	F	16	U	12310*	–	L	
10741	X	1.8 1.0	F	6 16	U	12190* 12310*	– –	L L	
10742	X	1.8	M	42	U	–	–	–	PCB
10743	O	1.8	F	12	U	12190*	–	L	
10744	X	2.3	M	16	U	–	–	–	PCB

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 10745	X	2.3	M	6	U	82998– –	82998– –	–	PCB
10747	X	8.0	F	3	U	12400	–	Y	
10748	X	2.3	F	2	S	12270*	12600	L	
10749	O	4.8 2.3 II	M	2 2	S	12470 12430*	– –	Y L,Y	
10750	X	TNS	M	26	U	12240	–	L	
10751	X	2.3	M	4	S	12260*	–	L	w/ Clamp
10752	X	1.8	M	30	U	–	–	–	PCB
10753	X	2.3	M	16	U	–	–	–	PCB
10758	X	6.3	M	4	U	12050	–	Y	w/ Clamp
10759	X	6.3 7.7	F	2 2	U	12060 12040	12580 –	Y Y	
10760	X	5.2 6.3	F	1 1	U	– 12060	– 12580	– Y	
10761	X	1.8 1.0	M	16 48	U	– –	– –	– –	PCB
10762	X	2.3	M	5	U	12160*	–	L	
10763	O	1.8 1.0	F	10 16	U	12190* 12310*	– –	L L	
10764	O	1.0	F	16	U	12310*	–	L	
10765	O	1.8 1.0	F	6 16	U	12190* 12310*	– –	L L	
10766	X	6.3 7.7	F	4 2	U	12060 12040	12580 –	Y Y	
10767	X	2.3 II	M	14	U	–	–	–	PCB
10768	X	2.3	M	4	S	12260*	–	L	w/o Clamp
10769	X	2.3	M	8	U	–	–	–	PCB
10770	X	PULSE LOCK	M	24	U	–	–	–	PCB
10771	X	2.3 6.3	M	5 2	U	– –	– –	– –	PCB
10772	X	2.3 6.3	F	5 2	U	12170 12060	– 12580	L Y	
10773	X	1.8 1.0	M	16 48	U	– –	– –	– –	PCB
10774	X	2.3	M	3	S	12260*	–	L	w/ Clamp
10775	X	TODC	M	9	S	–	–	–	
10776	X	TODC	F	9	S	–	–	–	
10777	X	TLC	M	3	S	12280	–	R	w/ Clamp

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
		2.3		2	S	12270*	12600	L	
10778	X	2.3	F	15	U	12170	–	L	
		6.3		1		12060	12580	Y	
10779	X	TNS	M	24	U	12240	–	L	
10780	X	1.8	M	16	U	–	–	–	PCB
		1.0		48		–	–	–	
10781	X	MIC	F	11	U	12120	–	L,Y	
10782	X	7.7	F	1	U	12040	–	Y	
10783	X	7.7	F	2	U	12040	–	Y	
10784	X	6.3	F	2	U	12060	12580	Y	
		7.7		1		12040	–	Y	
10785	X	2.3	F	6	U	12170	–	L	
10786	O	6.3	F	1	U	12070	–	Y	
10787	X	2.3	M	3	S	12260*	–	L	w/ Clamp
10788	X	2.3	M	2	S	12260*	–	L	w/ Clamp
10789	O	2.3 II	F	5	U	12340*	–	L,Y	
10790	X	2.3 II	M	5	U	–	–	–	PCB
10791	X	2.3	M	2	U	12160*	–	L	
		6.3		2		12050	–	Y	
10792	O	6.3	F	1	U	12060	12580	Y	
10793	X	2.3 II	M	6	U	–	–	–	PCB
10794	O	2.3 II	M	4	U	12330*	–	L,Y	
10795	O	2.3 II	F	4	U	12340*	–	L,Y	
10796	O	2.3 II	M	6	U	12330*	–	L,Y	
10797	O	2.3 II	F	6	U	12340*	–	L,Y	
10798	O	2.3 II	M	8	U	12330*	–	L,Y	
10799	O	2.3 II	F	8	U	12340*	–	L,Y	
10800	O	2.3 II	M	10	U	12330*	–	L,Y	
10801	O	2.3 II	F	10	U	12340*	–	L,Y	
10802	O	2.3 II	M	12	U	12330*	–	L,Y	
10803	O	2.3 II	F	12	U	12340*	–	L,Y	
10804	O	2.3 II	M	13	U	12330*	–	L,Y	
10805	O	2.3 II	F	13	U	12340*	–	L,Y	
10806	O	2.3 II	M	14	U	12330*	–	L,Y	
10807	O	2.3 II	F	14	U	12340*	–	L,Y	
10808	O	2.3 II	M	16	U	12330*	–	L,Y	
10809	O	2.3 II	F	16	U	12340*	–	L,Y	
10810	O	2.3 II	M	20	U	12330*	–	L,Y	
10811	O	2.3 II	F	20	U	12340*	–	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
10812	O	4.8	M	2	U	12370	–	Y	
		2.3 II		12		12330*	–	L,Y	
10813	O	4.8	F	2	U	12380	–	Y	
		2.3 II		12		12340*	–	L,Y	
10814	O	4.8	M	3	U	12370	–	Y	
		2.3 II		12		12330*	–	L,Y	
10815	O	4.8	F	3	U	12380	–	Y	
		2.3 II		12		12340*	–	L,Y	
10816	O	4.8	M	2	U	12370	–	Y	
		2.3 II		18		12330*	–	L,Y	
10817	O	4.8	F	2	U	12380	–	Y	
		2.3 II		18		12340*	–	L,Y	
10818	O	2.3 II	M	18	U	12330*	–	L,Y	
10819	O	2.3 II	F	18	U	12340*	–	L,Y	
10820	O	2.3 II	M	20	U	12330*	–	L,Y	
10821	O	2.3 II	F	20	U	12340*	–	L,Y	
10822	O	2.3 II	F	10	U	12340*	–	L,Y	
10823	O	2.3 II	F	2	U	12340*	–	L,Y	
10824	O	2.3 II	M	2	U	12330*	–	L,Y	
10825	O	2.3 II	F	2	U	12340*	–	L,Y	
10826	X	TLC	M	9	S	12280	–	R	
10827	O	2.3 II	M	15	U	12330*	–	L,Y	
10828	O	2.3 II	F	15	U	12340*	–	L,Y	
10829	O	2.3 II	M	11	U	12330*	–	L,Y	
10830	O	2.3 II	F	11	U	12340*	–	L,Y	
10831	X	2.3	F	4	S	12270*	12600	L	
10833	O	2.3 II	M	2	U	12330*	–	L,Y	w/ Clamp
10834	O	2.3 II	F	3	S	12440*	12590	L,Y	
10835	O	2.3 II	F	2	U	12340*	–	L,Y	
10836	O	8.0	M	1	S	12490	–	Y	
10837	O	8.0	F	1	S	12500	–	Y	
10838	O	8.0	M	2	S	12490	–	Y	
10839	O	8.0	F	2	S	12500	–	Y	
10840	O	4.8	M	3	S	12470	–	Y	
10841	O	4.8	F	3	S	12480	–	Y	
10842	O	2.3 II	M	2	S	12430*	–	L,Y	
10843	O	2.3 II	F	2	S	12440*	12590	L,Y	
10844	O	4.8	F	2	S	12480	–	Y	
		2.3 II		2		12440*	12590	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
10845	O	2.3 II	F	3	S	12440*	12590	L,Y	
10846	X	2.3	F	2	S	12270*	12600	L	
10847	X	2.3	F	2	S	12270*	12600	L	
10848	O	2.3 II	F	16	U	12340*	–	L,Y	
10849	X	2.3 II	M	2	U	12330*	–	L,Y	
10850	O	2.3 II	F	2	U	12340*	–	L,Y	
10851	X	2.3 II	M	14	U	–	–	–	PCB
10852	O	2.3 II	F	14	U	12340*	–	L,Y	
10853	X	2.3 II	F	2	S	12440*	12590	L,Y	
10854	O	2.3 II	F	6	S	12440*	12590	L,Y	
10855	O	2.3 II	F	2	U	12340*	–	L,Y	
10856	O	2.3 II 8.0	M	18 1	U	12330* 12390	– –	L,Y Y	
10857	O	2.3 II 8.0	F	18 1	U	12340* 12400	– –	L,Y Y	
10858	O	2.3 II	M	4	U	12330*	–	L,Y	
10859	O	2.3 II	M	2	U	12330*	–	L,Y	
10860	O	2.3 II	F	2	U	12340*	–	L,Y	
10861	O	4.8	M	10	U	12370	–	Y	
10862	O	4.8	F	10	U	12380	–	Y	
10863	X	2.3 II	M	18	U	–	–	–	PCB
10864	O	2.3 II	M	12	U	–	–	–	PCB
10865	X	2.3 II	M	10	U	–	–	–	PCB
10866	O	8.0	M	4	U	12390	–	Y	
10867	O	8.0	F	4	U	12400	–	Y	
10868	O	2.3 II	M	4	S	12430*	–	L,Y	
10869	O	2.3 II	F	4	S	12440*	12590	L,Y	
10870	O	2.3 II	M	1	U	12330*	–	L,Y	w/o Clamp
10871	O	2.3 II	F	1	U	12340*	–	L,Y	
10872	O	4.8 2.3 II	M	7 4	U	12370 12330*	– –	Y L,Y	
10873	O	4.8 2.3 II	F	7 4	U	12380 12340*	– –	Y L,Y	
10874	O	2.3 II	M	16	U	–	–	–	PCB
10875	O	2.3 II	F	22	U	12340*	–	L,Y	
10876	O	4.8 2.3 II	M	3 5	U	12370 12330*	– –	Y L,Y	
10877	O	4.8 2.3 II	F	3 5	U	12380 12340*	– –	Y L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
10878	O	4.8	M	2	U	12370	–	Y	
		2.3 II		10		12330*	–	L,Y	
10879	O	4.8	F	2	U	12380	–	Y	
		2.3 II		10		12340*	–	L,Y	
10880	O	4.8	M	4	U	12370	–	Y	
		2.3 II		20		12330*	–	L,Y	
10881	O	4.8	F	4	U	12380	–	Y	
		2.3 II		20		12340*	–	L,Y	
10882	O	4.8	M	1	U	12370	–	Y	
		2.3 II		18		12330*	–	L,Y	
10883	O	4.8	F	1	U	12380	–	Y	
		2.3 II		18		12340*	–	L,Y	
10884	O	4.8	M	4	U	12370	–	Y	
		2.3 II		12		12330*	–	L,Y	
10885	O	4.8	F	4	U	12380	–	Y	
		2.3 II		12		12340*	–	L,Y	
10886	O	2.3 II	M	2	S	12430*	–	L,Y	
10887	O	2.3 II	F	2	S	12440*	12590	L,Y	
10888	O	4.8	F	2	U	12380	–	Y	
		8.0		3		12400	–	Y	
10889	O	4.8	F	4	U	12380	–	Y	
		8.0		2		12400	–	Y	
10890	O	2.3 II	M	8	S	12430*	–	L,Y	
10891	O	2.3 II	F	8	S	12440*	12590	L,Y	
10892	O	2.3 II	M	1	S	12430*	–	L,Y	
10893	O	2.3 II	F	1	S	12440*	12590	L,Y	
10894	O	4.8	M	2	S	12470	–	Y	
		2.3 II		6		12430*	–	L,Y	
10895	O	4.8	F	2	S	12480	–	Y	
		2.3 II		6		12440*	12590	L,Y	
10896	O	2.3 II	M	8	S	12430*	–	L,Y	
10897	O	2.3 II	F	8	S	12440*	12590	L,Y	
10898	O	2.3 II	M	2	S	12430*	–	L,Y	
10899	O	2.3 II	F	2	S	12440*	12590	L,Y	
10900	O	2.3 II	M	2	S	12430*	–	L,Y	
10901	O	2.3 II	F	2	S	12440*	12590	L,Y	
10902	O	2.3 II	F	3	S	12440*	12590	L,Y	
10903	O	8.0	F	2	U	12400	–	Y	
10904	O	2.3 II	F	4	U	12340*	–	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
10905	O	2.3 II	M	2	U	12330*	–	L,Y	
10906	O	2.3 II	F	2	U	12340*	–	L,Y	
10907	O	2.3 II	M	3	U	12330*	–	L,Y	
10908	O	2.3 II	F	3	U	12340*	–	L,Y	
10909	O	2.3 II 8.0	M	4 2	U	12330* 12390	– –	L,Y Y	
10910	O	2.3 II 8.0	F	4 2	U	12340* 12400	– –	L,Y Y	
10911	O	4.8	F	1	U	12380	–	Y	
10912	O	4.8	F	1	U	12380	–	Y	
10913	X	6.3	F	1	U	12060	12580	Y	
10914	X	6.3	F	1	U	12060	12580	Y	
10915	O	4.8	M	2	U	12370	–	Y	
10916	O	4.8	F	2	U	12380	–	Y	
10917	X	1.8 1.0	M	8 18	U	– –	– –	– –	PCB
10918	X	1.8 1.0	F	8 18	U	12190* 12310*	– –	L L	
10919	O	2.3 II	F	3	S	12440*	12590	L,Y	
10920	O	1.3 2.3 II	M	19 4	U	12410 12330*	– –	L L,Y	
10921	O	1.3 2.3 II	F	19 4	U	12420 12340*	– –	L L,Y	
10923	O	2.3 II	F	2	S	12440*	12590	L,Y	
10924	X	1.8 1.0	M	16 10	U	– –	– –	– –	PCB
10925	O	1.8 1.0	F	10 16	U	12190* 12310*	– –	L L	
10926	O	4.8	F	8	U	12380	–	Y	
10927	O	4.8	M	2	S	12470	–	Y	
10928	O	4.8	F	2	S	12480	–	Y	
10929	X	1.8	F	4	S	12620	–	L	
10930	O	2.3 II	M	7	S	12430*	–	L,Y	
10931	O	2.3 II	F	7	S	12440*	12590	L,Y	
10932	O	4.8 2.3 II	F	2 10	U	12380 12340*	– –	Y L,Y	
10933	O	2.3 II	F	6	U	12340*	–	L,Y	
10934	O	2.3 II	M	2	U	12330*	–	L,Y	
10935	O	2.3 II	F	2	U	12340*	–	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 10936	X	2.3 II	M	20	U	82998– –	82998– –	–	PCB
10937	X	2.3 II	M	18	U	–	–	–	PCB
10938	X	2.3 II	M	12	U	–	–	–	PCB
10939	O	4.8 2.3 II	F	2 4	S	12480 12440*	– 12590	Y L,Y	
10940	O	4.8 2.3 II	F	2 2	S	12480 12440*	– 12590	Y L,Y	
10941	O	2.3 II	M	4	S	12430*	–	L,Y	
10942	O	2.3 II	F	4	S	12440*	12590	L,Y	
10943	O	2.3 II	F	4	S	12440*	12590	L,Y	
10944	O	4.8	M	3	S	12470	–	Y	
10945	O	4.8 2.3 II	M	2 3	S	12470 12430*	– –	Y L,Y	
10946	O	4.8 2.3 II	F	2 3	S	12480 12440*	– 12590	Y L,Y	
10947	O	2.3 II	F	2	S	12440*	12590	L,Y	
10948	O	2.3 II	M	2	S	12430*	–	L,Y	
10949	O	2.3 II	F	2	S	12440*	12590	L,Y	
10950	X	2.3 II	F	88	U	12340*	–	L,Y	
10951	X	2.3 II	M	52	U	12330*	–	L,Y	
10952	X	4.8 8.0	F	12 8	U	12380 12400	– –	Y Y	
10953	X	4.8 8.0	F	18 4	U	12380 12400	– –	Y Y	
10954	X	4.8 8.0	M	18 6	U	12370 12390	– –	Y Y	
10955	X	4.8 8.0	F	18 6	U	12380 12400	– –	Y Y	
10956	O	8.0	F	3	U	12400	–	Y	
10957	O	2.3 II	F	6	U	12340*	–	L,Y	
10958	O	8.0	M	2	U	12390	–	Y	
10959	O	2.3 II	M	2	S	12430*	–	L,Y	
10960	X	MIR-ROR	F	2	U	–	–	–	
10961	X	2.3 II	M	10	U	–	–	–	PCB
10962	O	2.3 II	F	2	U	12340*	–	L,Y	
10963	O	4.8	M	8	U	12370	–	Y	
10964	O	2.3 II	F	6	U	12340*	–	L,Y	
10965	O	2.3 II	F	10	U	12340*	–	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 10966	O	2.3 II	F	11	U	82998– 12340*	82998– –	L,Y	
10967	O	2.3 II	F	12	U	12340*	–	L,Y	
10968	O	2.3 II	F	12	U	12340*	–	L,Y	
10969	X	1.8 1.0	M	10 32	U	– –	– –	– –	PCB
10970	X	7.7	M	2	S	–	–	–	
10971	X	2.3 II	M	14	U	–	–	–	PCB
10972	X	1.8 1.0	M	22 32	U	– –	– –	– –	PCB
10973	O	1.8	F	12	U	12190*	–	L	
10974	O	2.3 II	F	2	S	12440*	12590	L,Y	
10975	O	4.8	M	6	U	12370	–	Y	
10976	O	4.8	F	6	U	12380	–	Y	
10977	O	2.3 II	M	22	U	12330*	–	L,Y	
10978	O	1.8 1.0	M	16 10	U	– –	– –	– –	PCB
10979	X	4.8	M	3	U	12370	–	Y	
10980	O	4.8	F	3	U	12380	–	Y	
10981	O	2.3 II	F	3	S	12440*	12590	L,Y	
10982	O	4.8	M	1	S	12470	–	Y	
10983	O	4.8	F	1	S	12480	–	Y	
10984	X	2.3	M	6	S	12260*	–	L	w/o Clamp
10985	O	4.8 2.3 II	M	1 4	U	12370 12330*	– –	Y L,Y	
10986	O	4.8 2.3 II	F	1 4	U	12380 12340*	– –	Y L,Y	
10987	O	2.3 II	M	6	S	12430*	–	L,Y	
10988	O	2.3 II	F	6	S	12440*	12590	L,Y	
10989	O	4.8	M	4	S	12470	–	Y	
10990	O	4.8	F	4	S	12480	–	Y	
10991	X	1.8 1.0	M	18 16	U	– –	– –	– –	PCB
10992	X	4.8 2.3 II	M	4 6	U	– –	– –	– –	PCB
10993	O	4.8 2.3 II	F	4 6	U	12380 12340*	– –	Y L,Y	
10994	O	8.0	M	1	U	12390	–	Y	
10995	O	8.0	F	1	U	12400	–	Y	
10996	O	2.3 II	F	6	U	12340*	–	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 10997	O	2.3 II	F	10	U	82998– 12340*	82998– –	L,Y	
10998	O	2.3 II	M	6	U	12330*	–	L,Y	
11001	O	2.3 II	F	6	U	12340*	–	L,Y	
11002	O	2.3 II	M	2	S	12430*	–	L,Y	
11003	O	2.3 II	F	2	S	12440*	12590	L,Y	
11004	O	2.3 II	M	2	S	12430*	–	L,Y	
11005	O	2.3 II	F	2	S	12440*	12590	L,Y	
11006	O	2.3 II	M	1	S	12430*	–	L,Y	
11007	O	2.3 II	F	1	S	12440*	12590	L,Y	
11008	O	2.3 II	M	2	S	12430*	–	L,Y	
11009	O	2.3 II	F	2	S	12440*	12590	L,Y	
11010	O	2.3 II	M	6	U	12330*	–	L,Y	
11011	O	2.3 II	F	6	U	12340*	–	L,Y	
11012	O	2.3 II	M	4	U	12330*	–	L,Y	
11013	O	2.3 II	F	4	U	12340*	–	L,Y	
11014	X	6.3	M	2	U	12050	–	Y	
11015	O	2.3 II	M	3	S	12430*	–	L,Y	
11016	O	2.3 II	F	3	S	12440*	12590	L,Y	
11017	X	1.8	M	18	U	–	–	–	PCB
11018	X	1.8	M	42	U	–	–	–	PCB
11019	O	2.3 II	F	2	S	12440*	12590	L,Y	
11020	O	2.3 II	F	3	S	12440*	12590	L,Y	
11021	O	4.8 2.3 II	M	2 3	S	12470 12430*	– –	Y L,Y	
11022	O	4.8 2.3 II	F	2 3	S	12480 12440*	– 12590	Y L,Y	
11023	O	2.3 II	M	4	U	12330*	–	L,Y	
11024	O	2.3 II	F	5	S	12440*	12590	L,Y	
11025	O	2.3 II	F	2	S	12440*	12590	L,Y	
11026	O	2.3 II	M	1	U	12330*	–	L,Y	w/ Clamp
11027	O	2.3 II	M	4	S	12430*	–	L,Y	
11028	O	2.3 II	F	4	S	12440*	12590	L,Y	
11029	O	2.3 II	M	2	S	12430*	–	L,Y	
11030	O	2.3 II	F	2	S	12440*	12590	L,Y	
11031	O	8.0	M	2	S	12490	–	Y	
11032	O	8.0	F	2	S	12500	–	Y	
11033	O	2.3 II	M	6	S	12430*	–	L,Y	
11034	O	2.3 II	F	6	S	12440*	12590	L,Y	
11035	O	4.8	M	4	S	12470	–	Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11036	O	4.8	F	4	S	82998– 12480	82998– –	Y	
11037	O	2.3 II	F	4	S	12440*	12590	L,Y	
11038	O	2.3 II	F	2	S	12440*	12590	L,Y	
11039	X	1.8 1.0	M	16 18	U	– –	– –	– –	PCB
11040	X	1.3 2.3 II	M	47 4	U	– –	– –	– –	PCB
11041	O	1.3	F	11	U	12420	–	L	
11042	O	1.3 2.3 II	F	11 4	U	12420 12340*	– –	L L,Y	
11043	O	1.3	F	25	U	12420	–	L	
11044	O	4.8 8.0	M	2 1	S	12470 12490	– –	Y Y	
11045	O	4.8 8.0	F	2 1	S	12480 12500	– –	Y Y	
11046	X	2.3 II	M	17	U	12330*	–	L,Y	
11049	O	2.3 II	F	5	S	12440*	12590	L,Y	
11050	O	2.3 II	M	2	S	12430*	–	L,Y	
11051	O	2.3 II	F	2	S	12440*	12590	L,Y	
11052	O	1.3	M	3	U	12410	–	L	
11053	O	1.3	F	3	U	12420	–	L	
11054	X	1.3 2.3 II	M	55 8	U	– –	– –	– –	PCB
11055	O	1.3	F	25	U	12420	–	L	
11056	O	1.3 2.3 II	F	11 4	U	12420 12340*	– –	L L,Y	
11057	X	1.3 2.3 II	M	21 4	U	– –	– –	– –	PCB
11058	O	1.3 2.3 II	F	21 4	U	12420 12340*	– –	L L,Y	
11059	X	1.8 1.0	M	18 16	U	– –	– –	– –	PCB
11060	O	2.3 II	M	2	U	12330*	–	L,Y	
11061	X	1.8	F	2	S	12620	–	L	
11062	O	1.8	F	2	S	12620	–	L	
11063	O	1.3	M	4	S	12630	–	L	Outer
11064	O	1.3	M	4	S	12630	–	L	Inner
11065	O	1.3	F	4	S	12650	–	L	Outer
11066	O	1.3	F	4	S	12650	–	L	Inner

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11067	X	2.3 II	M	6	U	82998– –	82998– –	–	PCB
11068	O	2.3 II	F	2	S	12440*	12590	L,Y	
11069	O	2.3 II	M	2	S	12430*	–	L,Y	
11070	O	2.3 II	F	2	S	12440*	12590	L,Y	
11071	O	2.3 II	F	3	U	12340*	–	L,Y	
11072	O	2.3 II	M	2	S	12430*	–	L,Y	
11073	O	2.3 II	M	2	S	12430*	–	L,Y	w/o Clamp
11074	O	2.3 II	M	2	S	12430*	–	L,Y	w/ Clamp
11075	O	2.3 II	F	2	S	12440*	12590	L,Y	
11076	X	TNS	M	4	S	–	–	–	w/ Clamp
11077	O	2.3 II	F	5	S	12440*	12590	L,Y	
11078	O	2.3 II	M	5	S	12430*	–	L,Y	
11079	O	2.3 II	F	3	U	12340*	–	L,Y	
11080	O	2.3 II	F	2	U	12340*	–	L,Y	
11081	X	1.8 1.0	M	10 32	U	– –	– –	– –	PCB
11082	X	1.0	F	16	U	12310*	–	L	
11083	O	1.3	F	11	U	12420	–	L	
11084	X	1.3 2.3 II	M	30 4	U	– –	– –	– –	PCB
11085	O	2.3 II	M	5	U	12330*	–	L,Y	
11086	O	2.3 II	M	12	S	12430*	–	L,Y	
11087	O	2.3 II	F	12	S	12440*	12590	L,Y	
11088	O	1.3	M	15	S	12630	–	L	
11089	O	1.3	F	15	S	12650	–	L	
11090	O	2.3 II	F	4	U	12340*	–	L,Y	
11091	O	4.8	F	6	U	12380	–	Y	
11092	O	4.8	F	8	U	12380	–	Y	
11093	O	4.8	M	2	U	12370	–	Y	
11094	O	4.8	F	2	U	12380	–	Y	
11095	O	HEAD-LAMP	F	2	S	24150	24190	L,Y	
11096	O	HEAD-LAMP	F	2	S	24150	24190	L,Y	
11097	O	2.3 II	M	1	U	12330*	–	L,Y	w/ Clamp
11098	O	2.3 II	F	2	U	12340*	–	L,Y	
11099	O	2.3 II	M	6	U	12330*	–	L,Y	
11100	O	2.3 II	M	4	U	12330*	–	L,Y	
11101	O	2.3 II	M	6	U	12330*	–	L,Y	
11102	O	2.3 II	M	10	U	12330*	–	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11103	X	1.8 1.0	M	8 18	U	82998– – –	82998– – –	– –	PCB
11104	X	2.3 II	M	20	U	–	–	–	PCB
11105	X	2.3 II	M	12	U	–	–	–	PCB
11106	X	1.3	M	4	U	–	–	–	PCB
11107	O	1.3	F	4	U	12420	–	L	
11108	X	HEAD-LAMP	F	3	S	24150	24190	L,Y	
11110	O	2.3 II	M	6	U	12330*	–	L,Y	
11111	O	–	–	–	–	–	–	–	
11113	O	SFPC	F	16	U	24180	–	L	
11114	O	SFPC	F	13	U	24180	–	L	
11115	O	SFPC	F	13	U	24180	–	L	
11116	O	SFPC	F	10	U	24180	–	L	
11117	X	2.3 II	M	20	U	–	–	–	PCB
11118	O	4.8 2.3 II	F	2 2	U	12380 12340*	– –	Y L,Y	
11119	X	1.3	M	21	U	–	–	–	PCB
11120	X	1.3 2.3 II	M	19 4	U	– –	– –	– –	PCB
11121	O	2.3 II	F	12	U	12340*	–	L,Y	
11122	O	2.3 II	M	4	S	12430*	–	L,Y	
11123	X	2.3 II	M	8	U	–	–	–	PCB
11124	X	1.8	M	30	U	–	–	–	PCB
11125	O	1.3	F	21	U	12420	–	L	
11126	O	4.8 2.3 II	M	2 2	U	12370 12330*	– –	Y L,Y	
11127	O	2.3 II	M	18	U	–	–	–	PCB
11128	X	1.8 1.0	M	16 60	U	– –	– –	– –	PCB
11129	O	1.0	F	12	U	12310*	–	L	
11130	O	4.8 2.3 II	F	2 6	U	12380 12340*	– –	Y L,Y	
11131	O	2.3 II	M	3	S	12430*	–	L,Y	
11132	O	2.3 II	F	3	S	12440*	12590	L,Y	
11133	O	1.3	M	25	U	12410	–	L	
11134	O	2.3 II	M	8	U	–	–	–	PCB
11135	O	4.8	M	4	U	12370	–	Y	
11136	O	4.8	F	4	U	12380	–	Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11137	O	2.3 II	M	2	S	82998– 12430*	82998– –	L,Y	
11138	O	4.8 8.0	M	2 2	S	12470 12490	– –	Y Y	
11139	O	4.8 8.0	F	2 2	S	12480 12500	– –	Y Y	
11140	O	2.3 II	F	2	S	12440*	12590	L,Y	
11141	O	2.3 II	M	2	S	12430*	–	L,Y	
11142	O	2.3 II	F	2	S	12440*	12590	L,Y	
11143	O	2.3 II	F	3	S	12440*	12590	L,Y	
11144	O	2.3 II	F	6	S	12440*	12590	L,Y	
11145	O	2.3 II	F	3	S	12440*	12590	L,Y	
11146	O	2.3 II	M	1	U	12330*	–	L,Y	
11147	O	2.3 II	F	1	U	12340*	–	L,Y	
11148	O	2.3 II	F	2	U	12340*	–	L,Y	
11149	O	2.3 II	F	2	S	12440*	12590	L,Y	
11150	O	2.3 II	F	4	S	12440*	12590	L,Y	
11151	O	2.3 II	F	12	S	12440*	12590	L,Y	
11152	O	2.3 II	F	4	S	12440*	12590	L,Y	
11153	O	2.3 II	F	2	S	–	12790*	L,Y	
11154	O	2.3 II	F	2	S	–	12790*	L,Y	
11155	O	2.3 II	M	2	S	12430*	–	L,Y	
11156	O	2.3 II	F	2	S	12440*	12590	L,Y	
11157	X	2.3 II	F	3	S	12440*	12590	L,Y	
11158	O	1.3 2.3 II	M	21 4	U	12410 12330*	– –	L L,Y	
11159	O	2.3 II	M	2	U	12330*	–	L,Y	
11160	O	4.8 2.3 II	M	1 2	S	12470 12430*	– –	Y L,Y	
11161	O	4.8 2.3 II	F	1 2	S	12480 12440*	– 12590	Y L,Y	
11162	O	2.3 II	F	2	S	12440*	12590	L,Y	
11163	O	2.3 II	F	2	S	12440*	12590	L,Y	
11164	X	1.3	M	7	U	–	–	–	PCB
11165	O	1.3	F	7	U	12420	–	L	
11166	O	2.3 II	F	1	S	12440*	12590	L,Y	
11167	O	2.3 II	M	16	U	12330*	–	L,Y	
11168	O	2.3 II	M	2	S	12430*	–	L,Y	
11169	O	1.3	M	3	S	12630	–	L	
11170	O	1.3	F	3	S	12650	–	L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11171	O	1.3	M	7	S	82998– 12630	82998– –	L	
11172	O	1.3	F	7	S	12650	–	L	
11173	O	1.3	M	11	S	12630	–	L	
11174	O	1.3	F	11	S	12650	–	L	
11175	O	2.3 II	M	2	S	12430*	–	L,Y	
11176	O	2.3 II	F	2	S	12440*	12590	L,Y	
11177	O	2.3 II	M	4	S	12430*	–	L,Y	
11178	O	2.3 II	F	4	S	12440*	12590	L,Y	
11179	O	1.3	F	15	U	12420	–	L	
11180	X	1.3	M	15	U	–	–	–	PCB
11181	O	1.3	M	5	S	12630	–	L	
11182	O	1.3	F	5	S	12650	–	L	
11183	O	8.0	M	1	S	12490	–	Y	
11184	O	8.0	F	1	S	12500	–	Y	
11186	O	1.3	M	4	U	12410	–	L	
11187	O	1.3	F	4	U	12420	–	L	
11188	O	1.3	M	2	S	12630	–	L	
11189	O	1.3	F	2	S	12650	–	L	
11190	O	2.3 II	F	8	S	12440*	12590	L,Y	
11191	O	1.3	M	9	S	12630	–	L	
11192	O	1.3	F	9	S	12650	–	L	
11193	O	2.3 II	M	6	S	12430*	–	L,Y	
11194	O	2.3 II	F	6	S	12440*	12590	L,Y	
11195	O	2.3 II 2.3 II 6.3 II	F	22 22 1	S U S	12440* 12340* 24160	12590 – –	L,Y L,Y L	
11196	O	2.3 II	M	6	S	12430*	–	L,Y	
11197	O	2.3 II	F	6	S	12440*	12590	L,Y	
11198	X	1.3	M	13	U	–	–	–	PCB
11199	X	1.3	F	13	U	12420	–	L	
11200	X	1.3	M	11	U	12410	–	L	
11201	X	1.3	M	15	U	12410	–	L	
11202	X	1.3	M	17	U	12410	–	L	
11203	X	1.3	F	17	U	12420	–	L	
11204	X	1.3 2.3 II	M	15 4	U	12410 12330*	– –	L L,Y	
11205	X	1.3 2.3 II	F	15 4	U	12420 12340*	– –	L L,Y	
11206	X	1.3	M	21	U	12410	–	L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11207	O	2.3 II	F	2	S	82998– 12440*	82998– 12590	L,Y	
11208	O	1.3 2.3 II	M	19 4	U	12410 12330*	– –	L L,Y	
11211	O	1.3	M	2	U	12410	–	L	
11212	O	1.3	F	2	U	12420	–	L	
11213	X	1.0	M	120	S	–	–	–	PCB
11214	O	1.0	F	80	S	–	–	–	
11215	O	1.0	F	40	S	–	–	–	
11216	O	–	–	–	–	–	–	–	
11217	X	1.0 II	M	100	U	–	–	–	PCB
11218	O	1.0 II	F	28	U	24020*	–	L	
11219	O	1.0 II	F	16	U	24020*	–	L	
11220	O	1.0 II	F	22	U	24020*	–	L	
11221	O	1.0 II	F	34	U	24020*	–	L	
11222	O	1.0 II 1.8 II 1.8 II	M	18 14 14	U	24010 24030 24090	– – –	L L,Y L,Y	
11223	O	1.0 II 1.8 II 1.8 II	M	12 6 6	U	24010 24030 24090	– – –	L L,Y L,Y	
11224	O	1.0 II 1.8 II 1.8 II	F	12 6 6	U	24020* 24040 24100*	– – –	L L,Y L,Y	
11225	O	1.0 II 1.8 II 1.8 II	F	6 8 8	U	24020* 24040 24100*	– – –	L L,Y L,Y	
11226	O	1.0 II 1.8 II 1.8 II	F	12 6 6	U	24020* 24040 24100*	– – –	L L,Y L,Y	
11227	O	2.3 II	F	2	U	12340*	–	L,Y	
11228	O	1.8 1.0	M	18 16	U	– –	– –	– –	PCB
11229	X	2.3 II	M	3	U	–	–	–	PCB
11230	X	2.3 II	M	5	U	–	–	–	PCB
11231	O	2.3 II	F	10	S	12440*	12590	L,Y	
11232	O	2.3 II	F	5	S	12440*	12590	L,Y	
11233	X	1.8 1.0	M	4 22	U	– –	– –	– –	PCB

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
11234	X	1.8	F	4	U	12190*	–	L	
		1.0		22		12310*	–	L	
11235	O	2.3 II	F	2	S	12440*	12590	L,Y	
11236	X	4.8	M	2	S	12470	–	Y	
11237	O	4.8	F	2	S	12480	–	Y	
11238	X	2.3 II	F	22	U	12340*	–	L,Y	
11239	O	4.8	M	3	S	12470	–	Y	
		2.3 II		8		12430*	–	L,Y	
11240	O	4.8	F	3	S	12480	–	Y	
		2.3 II		8		12440*	12590	L,Y	
11241	O	2.3 II	M	6	S	12430*	–	L,Y	
		8.0		2		12490	–	Y	
11242	O	2.3 II	F	6	S	12440*	12590	L,Y	
		8.0		2		12500	–	Y	
11243	O	2.3 II	F	1	S	12440*	12590	L,Y	
11244	O	2.3 II	M	3	S	12430*	–	L,Y	w/ Clamp
11245	O	2.3 II	F	3	S	12440*	12590	L,Y	
11246	O	2.3 II	F	2	S	12440*	12590	L,Y	
11247	O	2.3 II	M	2	S	12430*	–	L,Y	
11248	O	2.3 II	F	2	S	12440*	12590	L,Y	
11249	X	2.3 II	M	2	S	12430*	–	L,Y	
11250	O	2.3 II	F	2	S	12440*	12590	L,Y	
11251	X	2.3 II	F	3	U	12340*	–	L,Y	
11252	O	2.3 II	F	1	S	12440*	12590	L,Y	
11253	X	1.0 III	M	5	U	–	–	–	PCB
		1.0 III		52		–	–	–	
11254	X	2.3 II	M	2	S	12430*	–	L,Y	
11255	O	2.3 II	F	2	S	12440*	12590	L,Y	
11256	X	1.3	M	11	S	12630	–	L	
11257	X	1.3	F	11	S	12650	–	L	
11258	O	4.8	M	1	U	12370	–	Y	
11259	O	4.8	F	1	U	12380	–	Y	
11260	X	2.3 II	F	20	U	12340*	–	L,Y	
11261	O	2.3 II	F	3	S	12440*	12590	L,Y	
11262	X	1.3	M	4	S	12630	–	L	Outer
11263	X	1.3	M	15	U	–	–	–	PCB
11264	O	1.3	F	15	U	12420	–	L	
11265	X	2.3 II	M	14	U	–	–	–	PCB

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
11266	X	1.8 1.0	M	10 32	U	– –	– –	– –	PCB
11267	X	4.8 2.3 II	M	2 4	S	12470 12430*	– –	Y L,Y	
11268	X	2.3 II	M	4	S	12430*	–	L,Y	
11269	X	2.3 II	F	4	S	12440*	12590	L,Y	
11270	O	2.3 II	M	1	S	12430*	–	L,Y	
11271	O	2.3 II	F	1	S	12440*	12590	L,Y	
11272	O	2.3 II	M	2	S	12430*	–	L,Y	
11273	O	2.3 II	F	2	S	12440*	12590	L,Y	
11274	O	–	–	–	–	–	–	–	
11276	X	4.8	F	10	U	12380	–	Y	
11277	X	4.8 2.3 II	F	1 8	U	12380 12340*	– –	Y L,Y	
11278	O	2.3 II	F	2	U	12340*	–	L,Y	
11279	O	4.8 2.3 II	F	2 6	U	12380 12340*	– –	Y L,Y	
11280	O	2.3 II	F	6	U	12340*	–	L,Y	
11281	X	1.0 III 1.0 IV	M	98 24	U	– –	– –	– –	PCB
11282	X	2.3 II	F	1	S	12440*	12590	L,Y	
11283	X	4.8 2.3 II	F	2 2	S	12480 12440*	– 12590	Y L,Y	
11284	O	2.3 II	F	2	S	–	12790*	L,Y	
11285	O	2.3 II	F	2	S	–	12790*	L,Y	
11286	X	2.3 II	F	2	S	12440*	12590	L,Y	
11287	X	2.3 II 8.0	M	2 2	S	12430* 12490	– –	L,Y Y	
11288	X	2.3 II 8.0	F	2 2	S	12440* 12500	12590 –	L,Y Y	
11289	O	2.3 II	M	6	S	12430*	–	L,Y	
11290	O	2.3 II	F	6	S	12440*	12590	L,Y	
11291	O	2.3 II	M	4	S	12430*	–	L,Y	
11292	O	2.3 II	F	4	S	12440*	12590	L,Y	
11293	X	2.3 II	M	3	S	12430*	–	L,Y	
11294	O	2.3 II	F	3	S	12440*	12590	L,Y	
11295	O	2.3 II	M	3	S	12430*	–	L,Y	w/ Clamp
11296	X	2.3 II	F	3	U	12340*	–	L,Y	
11297	X	4.8	F	6	U	12380	–	Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11298	X	2.3 II	M	3	U	82998– 12330*	82998– –	L,Y	
11299	O	2.3 II	M	2	U	12330*	–	L,Y	w/ Clamp
11300	O	2.3 II	M	2	U	12330*	–	L,Y	
11301	X	2.3 II	M	4	U	12330*	–	L,Y	
11302	X	4.8	F	9	U	12380	–	Y	
11303	X	2.3 II	M	2	S	12430*	–	L,Y	
11304	O	4.8 2.3 II	F	2 2	S	12480 12440*	– 12590	Y L,Y	
11305	X	1.3	M	2	U	12410	–	L	
11306	X	1.3	F	2	U	12420	–	L	
11307	X	1.3 2.3 II	M	15 4	U	12410 12330*	– –	L L,Y	
11308	X	1.3 2.3 II	F	15 4	U	12420 12340*	– –	L L,Y	
11309	X	1.3 2.3 II	M	13 4	U	12410 12330*	– –	L L,Y	
11310	X	1.3 2.3 II	F	13 4	U	12420 12340*	– –	L L,Y	
11311	O	2.3 II	F	12	U	12340*	–	L,Y	
11312	X	2.3 II	M	14	U	–	–	–	PCB
11313	X	2.3 II	F	4	U	12340*	–	L,Y	
11314	O	HEAD-LAMP	F	3	U	24140	24200	L,Y	
11315	X	2.3 II	F	1	U	12340*	–	L,Y	
11316	X	2.3 II 6.3 II	M	20 1	U	12330* –	– –	L,Y –	
11317	O	2.3 II	F	5	S	12440*	12590	L,Y	
11318	X	1.3	M	5	U	–	–	–	PCB
11319	O	1.3	F	5	U	12420	–	L	
11320	X	1.3	M	8	U	–	–	–	PCB
11321	X	1.3	F	8	U	12420	–	L	
11322	X	2.3 II	M	2	S	12430*	–	L,Y	
11323	O	2.3 II 2.3 II 6.3 II	F	22 22 1	S U S	12440* 12340* 24160	12590 – –	L,Y L,Y L	
11324	X	2.3 II	M	16	U	–	–	–	PCB
11325	X	2.3 II	M	10	U	–	–	–	PCB
11326	X	2.3 II	F	6	U	12340*	–	L,Y	
11327	X	2.3 II	M	5	U	12330*	–	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11328	X	1.3	M	4	S	82998– 12630	82998– –	L	Inner
11329	X	1.3	F	4	S	12650	–	L	Outer
11330	X	1.3	F	4	S	12650	–	L	Inner
11331	X	2.3 II	M	10	U	–	–	–	PCB
11332	O	4.8 2.3 II	F	2 8	S	12480 12440*	– 12590	Y L,Y	
11333	X	1.8 1.0	M	4 22	U	12180 –	– –	L –	
11334	X	1.3	M	17	U	12410	–	L	
11335	X	1.3	F	17	U	12420	–	L	
11336	X	1.3	F	3	U	12420	–	L	
11337	X	2.3 II	M	14	U	–	–	–	PCB
11338	X	1.0	M	80	S	–	–	–	
11339	X	1.3	M	7	U	–	–	–	PCB
11340	X	1.3	F	7	U	12420	–	L	
11341	X	2.3 II	M	3	S	12430*	–	L,Y	
11342	X	1.0	M	40	U	–	–	–	
11343	X	1.0	M	28	U	–	–	–	PCB
11344	X	1.0	M	16	U	–	–	–	
11345	X	1.0	M	22	U	–	–	–	
11346	X	1.0	M	34	U	–	–	–	
11347	X	LA	F	40	U	–	–	–	
11348	O	2.3 II	M	3	S	12430*	–	L,Y	
11349	O	2.3 II	F	3	S	12440*	12590	L,Y	
11350	X	1.3	F	13	U	12420	–	L	
11351	X	2.3 II	M	16	U	–	–	–	PCB
11352	X	1.0 II 1.8 II	M	60 16	U	– –	– –	– –	PCB
11353	X	2.3 II	M	8	U	12330*	–	L,Y	
11354	X	2.3 II	F	8	U	12340*	–	L,Y	
11355	X	4.8 2.3 II 8.0	M	4 38 1	U	12370 12330* 12390	– – –	Y L,Y Y	
11356	X	4.8 2.3 II	M	4 24	U	12370 12330*	– –	Y L,Y	
11357	X	2.3 II	M	27	U	12330*	–	L,Y	
11359	X	4.8 2.3 II	F	4 51	U	12380 12340*	– –	Y L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11360	X	4.8 2.3 II 8.0	F	4 38 1	U	82998– 12380 12340* 12400	82998– – – –	 Y L,Y Y	
11361	X	4.8 2.3 II	M	4 4	U	– –	– –	– –	PCB
11362	X	4.8 2.3 II	F	4 4	U	12380 12340*	– –	Y L,Y	
11363	O	2.3 II	F	1	S	12440*	12590	L,Y	
11364	O	1.0 III 1.0 IV	M	81 24	U	– –	– –	– –	PCB
11365	X	4.8 2.3 II	M	2 8	U	– –	– –	– –	PCB
11366	X	4.8 2.3 II	F	2 8	U	12380 12340*	– –	Y L,Y	
11367	X	1.3	M	2	U	12410	–	L	
11368	O	1.3	M	2	U	12410	–	L	
11369	O	1.3	F	2	U	12420	–	L	
11370	X	2.3 II	M	15	U	12330*	–	L,Y	
11371	X	2.3 II	M	15	U	12330*	–	L,Y	
11372	X	2.3 II	F	15	U	12340*	–	L,Y	
11373	X	2.3 II	M	25	U	12330*	–	L,Y	
11374	X	2.3 II	M	25	U	12330*	–	L,Y	
11375	X	2.3 II	F	25	U	12340*	–	L,Y	
11376	X	1.3	M	19	U	12410	–	L	
11377	X	1.3	F	19	U	12420	–	L	
11378	X	1.3	M	21	U	12410	–	L	
11379	X	1.3	F	21	U	12420	–	L	
11380	X	1.3	M	23	U	12410	–	L	
11381	X	1.3	F	23	U	12420	–	L	
11382	X	2.3 II	M	14	U	–	–	–	PCB
11383	X	2.3 II	F	14	U	12340*	–	L,Y	
11384	X	1.3	M	13	U	–	–	–	PCB
11385	X	8.0	M	3	U	12390	–	Y	
11386	X	8.0	F	2	U	12400	–	Y	
11387	X	4.8 8.0	F	1 2	U	12380 12400	– –	Y Y	
11388	X	2.3 II	F	2	U	12340*	–	L,Y	
11389	X	1.3	M	8	U	–	–	–	PCB

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
11390	O	1.0 II	F	16	U	24020*	–	L	
		1.8 II		10		24100*	–	L,Y	
11391	O	1.0 II	F	16	U	24020*	–	L	
11392	O	1.0 II	F	16	U	24020*	–	L	
		1.8 II		6		24100*	–	L,Y	
11393	X	1.3	M	13	U	12410	–	L	
11394	X	1.3	F	13	U	12420	–	L	
11395	X	2.3 II	M	2	U	12330*	–	L,Y	
11396	X	2.3 II	F	2	U	12340*	–	L,Y	
11397	X	2.3 II	F	8	U	12340*	–	L,Y	
11398	X	2.3 II	F	4	U	12340*	–	L,Y	
11399	O	2.3 II	M	4	U	12330*	–	L,Y	
11400	O	4.8	F	1	S	12480	–	Y	
11401	X	2.3 II	F	2	S	12440*	12590	L,Y	
11402	X	1.3	M	7	U	–	–	–	PCB
11403	X	1.3	M	25	U	12410	–	L	
11404	X	1.3	F	25	U	12420	–	L	
11405	X	1.8	M	12	U	–	–	–	PCB
		1.0 II		32		–	–	–	
		1.8 II		10		–	–	–	
11406	X	1.0 II	F	22	U	24020*	–	L	
		1.8 II		4		24100*	–	L,Y	
11407	X	2.3 II	M	3	S	12430*	–	L,Y	w/o Clamp
11408	O	1.0 II	F	12	U	24020*	–	L	
11409	X	4.8	M	2	S	12470	–	Y	
11410	O	4.8	F	2	S	12480	–	Y	
11411	X	1.3	M	21	U	–	–	–	PCB
		2.3 II		4		–	–	–	
11412	O	4.8	M	3	S	12470	–	Y	
		2.3 II		2		12430*	–	L,Y	
11413	O	4.8	F	3	S	12480	–	Y	
		2.3 II		2		12440*	12590	L,Y	
11414	X	SL	F	3	S	–	–	–	
11415	X	2.3 II	M	16	U	12330*	–	L,Y	
11416	X	2.3 II	F	16	U	12340*	–	L,Y	
11417	O	2.3 II	F	17	U	12340*	–	L,Y	
11418	X	1.8	M	12	U	–	–	–	PCB
		1.0 II		16		–	–	–	
		1.8 II		10		–	–	–	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11419	X	2.3 II	M	10	U	82998– –	82998– –	–	PCB
11420	X	2.3	F	17	U	12170	–	L	
11421	O	1.0 III 1.0 IV	F	20 11	U	12690* 12740	– –	L L	
11422	X	1.0 II 1.8 II	F	18 8	U	24020* 24100*	– –	L L,Y	
11423	O	1.0 II 1.8 II	F	16 10	U	24020* 24100*	– –	L L,Y	
11424	O	1.8 II	F	12	U	24100*	–	L,Y	
11425	X	1.0 II	F	16	U	24020*	–	L	
11426	X	2.3 II	M	4	U	–	–	–	PCB
11427	X	2.3 II	F	4	U	12340*	–	L,Y	
11428	O	2.3 II	F	1	S	12440*	12590	L,Y	
11429	X	2.3 II	F	2	U	12340*	–	L,Y	
11430	X	4.8 2.3 II 8.0	M	4 40 5	U	12370 12330* 12390	– – –	Y L,Y Y	
11431	X	4.8 2.3 II 8.0	F	4 40 5	U	12380 12340* 12400	– – –	Y L,Y Y	
11432	X	1.8 II	F	20	U	24100*	–	L,Y	
11433	O	1.8 II 1.8 II	F	14 14	U	24040 24100*	– –	L,Y L,Y	
11434	X	C–TYPE	M	16	U	12560	–	L	
11435	X	C–TYPE	F	16	U	12570	–	L	
11436	O	1.3	F	2	U	12420	–	L	
11437	X	2.3 II	F	14	U	12340*	–	L,Y	
11438	X	4.8 2.3 II	M	3 5	U	12370 12330*	– –	Y L,Y	
11439	X	4.8 2.3 II	F	3 5	U	12380 12340*	– –	Y L,Y	
11440	X	2.3 II	M	20	U	12330*	–	L,Y	
11441	X	2.3 II	F	20	U	12340*	–	L,Y	
11442	X	2.3 II	M	20	U	12330*	–	L,Y	
11443	X	2.3 II	F	20	U	12340*	–	L,Y	
11444	O	2.3 II	M	16	U	12330*	–	L,Y	
11445	X	2.3 II	F	16	U	12340*	–	L,Y	
11447	X	2.3 II	M	2	S	12430*	–	L,Y	
11448	X	2.3 II	F	2	S	12440*	12590	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11449	X	1.3	M	10	U	82998– –	82998– –	–	PCB
11450	O	1.3	F	10	U	12420	–	L	
11451	O	2.3 II	F	3	S	–	12790*	L,Y	
11452	X	2.3 II	M	6	U	12330*	–	L,Y	
11453	X	2.3 II	F	12	U	12340*	–	L,Y	
11459	X	2.3 II	F	8	U	12340*	–	L,Y	
11460	X	4.8 2.3 II	M	2 6	S	12470 12430*	– –	Y L,Y	
11461	X	4.8 2.3 II	F	2 6	S	12480 12440*	– 12590	Y L,Y	
11462	X	1.3	M	16	S	12630	–	L	
11463	X	1.3	F	16	S	12650	–	L	
11464	X	2.3 II	M	14	U	–	–	–	PCB
11465	X	2.3 II	F	14	U	12340*	–	L,Y	
11466	X	2.3 II	M	2	S	12430*	–	L,Y	
11467	O	2.3 II	F	2	S	12440*	12590	L,Y	
11468	X	1.3	M	22	U	–	–	–	PCB
11469	O	1.3 2.3 II	F	16 4	U	12420 12340*	– –	L L,Y	
11470	X	1.3	M	3	U	12410	–	L	
11471	O	1.3	F	3	U	12420	–	L	
11472	X	1.3 2.3 II	M	30 4	U	– –	– –	– –	PCB
11473	X	1.3 2.3 II	M	21 4	U	– –	– –	– –	PCB
11474	X	1.3	M	12	U	–	–	–	PCB
11475	O	1.3	F	12	U	12420	–	L	
11476	O	1.0 III 1.0 IV	F	17 7	U	12690* 12740	– –	L L	
11477	X	LAC	M	22	U	12100	–	L,Y	
11478	X	LAC	F	13	U	12110	–	L,Y	
11479	X	LAC	F	9	U	12110	–	L,Y	
11483	X	1.3 2.3 II	M	21 4	U	– –	– –	– –	PCB
11484	X	2.3 II 8.0	M	1 2	U	12330* 12390	– –	L,Y Y	
11485	X	2.3 II 8.0	F	1 2	U	12340* 12400	– –	L,Y Y	
11486	O	2.3 II	M	2	S	12430*	–	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11487	X	1.3	M	6	U	82998– 12410	82998– –	L	
11488	X	1.3	F	6	U	12420	–	L	
11489	X	1.3	M	3	U	12410	–	L	
11490	O	1.3	F	3	U	12420	–	L	
11491	X	6.3	F	3	S	12540	–	Y	
11492	X	1.3 2.3 II	M	4 2	U	12410 12330*	– –	L L,Y	
11493	X	1.3 2.3 II	F	4 2	U	12420 12340*	– –	L L,Y	
11494	O	1.3	F	4	U	12420	–	L	
11495	X	1.3	F	4	U	12420	–	L	
11496	X	1.3	M	18	U	–	–	–	PCB
11497	X	1.3	F	18	U	12420	–	L	
11498	X	1.3	M	20	U	12410	–	L	
11499	X	1.3	F	20	U	12420	–	L	
11500	X	1.3	M	12	U	12410	–	L	
11501	O	1.3 2.3 II	M	16 4	U	– –	– –	– –	PCB
11502	O	1.3	F	22	U	12420	–	L	
11503	O	1.3	M	22	U	12410	–	L	
11504	O	1.3 2.3 II	M	16 4	U	12410 12330*	– –	L L,Y	
11505	X	1.3	M	17	U	12410	–	L	
11506	X	1.3	F	17	U	12420	–	L	
11507	X	1.3	M	64	U	–	–	–	PCB
11508	X	1.3	F	40	U	12420	–	L	
11509	X	1.3	F	24	U	12420	–	L	
11510	X	1.3	M	14	U	–	–	–	PCB
11511	X	1.3	F	14	U	12420	–	L	
11512	X	ABS	F	2	U	–	–	–	
11514	X	ABS	F	32	U	–	–	–	
11517	X	ABS	F	6	S	–	–	–	
11519	X	ABS	F	2	S	–	–	–	
11520	X	ABS	F	2	S	–	–	–	
11522	X	ABS	F	4	S	–	–	–	
11524	X	ABS	F	12	U	–	–	–	
11526	X	4.8 2.3 II	M	2 8	U	– –	– –	– –	PCB

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
11527	O	4.8	F	2	U	12380	–	Y	
		2.3 II		8		12340*	–	L,Y	
11528	O	2.3 II	M	7	U	12330*	–	L,Y	
11529	O	2.3 II	F	7	U	12340*	–	L,Y	
11530	O	2.3 II	M	12	U	12330*	–	L,Y	
11531	O	2.3 II	F	12	U	12340*	–	L,Y	
11532	O	1.3	M	8	U	12410	–	L	
11533	O	1.3	F	8	U	12420	–	L	
11534	O	2.3 II	M	9	U	12330*	–	L,Y	
11535	O	2.3 II	F	9	U	12340*	–	L,Y	
11536	O	2.3 II	M	10	U	12330*	–	L,Y	
11537	O	2.3 II	F	10	U	12340*	–	L,Y	
11538	O	2.3 II	M	11	U	12330*	–	L,Y	
11539	O	2.3 II	F	11	U	12340*	–	L,Y	
11540	X	2.3 II	F	2	S	12440*	12590	L,Y	
11541	O	2.3 II	M	13	U	12330*	–	L,Y	
11542	O	2.3 II	F	13	U	12340*	–	L,Y	
11543	X	2.3 II	M	9	U	–	–	–	PCB
11544	O	1.3	M	10	U	–	–	–	PCB
11545	X	2.3 II	M	2	U	12330*	–	L,Y	
11546	X	4.8	M	4	U	12370	–	Y	
		2.3 II		12		12330*	–	L,Y	
11547	X	4.8	F	4	U	12380	–	Y	
		2.3 II		12		12340*	–	L,Y	
11548	X	1.8	M	8	U	–	–	–	PCB
		1.0		18		–	–	–	
11549	X	1.8 II	M	34	U	24030	–	L,Y	
		1.8 II		34		24090	–	L,Y	
11550	X	1.8	M	12	U	–	–	–	PCB
11551	X	4.8	M	8	U	12370	–	Y	
11552	O	1.3	F	16	U	12420	–	L	
		2.3 II		22		12340*	–	L,Y	
11553	X	1.3	M	5	U	–	–	–	PCB
11554	X	1.3	M	16	U	12410	–	L	
		2.3 II		22		12330*	–	L,Y	
11555	X	1.3	F	16	U	12420	–	L	
		2.3 II		22		12340*	–	L,Y	
11556	O	1.3	F	14	U	12420	–	L	
11557	X	1.3	M	60	U	–	–	–	PCB

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11558	X	1.3	F	20	U	82998– 12420	82998– –	L	
11559	X	1.3 2.3 II	M	8 9	U	12410 12330*	– –	L L,Y	
11560	X	1.3 2.3 II	F	8 9	U	12420 12340*	– –	L L,Y	
11561	X	1.3 2.3 II	M	6 10	U	12410 12330*	– –	L L,Y	
11562	X	1.3 2.3 II	F	6 10	U	12420 12340*	– –	L L,Y	
11563	O	1.8 1.0	M	10 32	U	– –	– –	– –	PCB
11564	O	1.0 II 1.8 II	M	26 16	U	– –	– –	– –	PCB
11565	O	1.0 II 1.8 II	F	10 6	U	24020* 24100*	– –	L L,Y	
11566	X	1.0 II	F	40	S	24060	–	L	
11567	X	1.0 II	M	40	S	–	–	–	PCB
11568	X	2.3 II	M	13	U	12330*	–	L,Y	
11569	X	2.3 II 8.0	F	2 2	S	12440* 12500	12590 –	L,Y Y	
11570	O	1.3	M	19	U	12410	–	L	
11571	O	1.3	F	19	U	12420	–	L	
11572	O	1.3	M	52	U	–	–	–	PCB
11573	O	1.3	M	16	U	12410	–	L	
11574	O	1.3	F	16	U	12420	–	L	
11575	O	1.8 1.0	M	22 32	U	– –	– –	– –	PCB
11576	O	1.8 1.0	M	16 48	U	– –	– –	– –	PCB
11577	O	1.8 1.0	M	16 60	U	– –	– –	– –	PCB
11578	O	1.0	M	100	U	–	–	–	PCB
11579	O	8.0	F	2	U	12400	–	Y	
11580	X	1.3	M	10	U	12410	–	L	
11581	X	1.3	F	10	U	12420	–	L	
11582	X	1.3	M	8	U	12410	–	L	
11583	O	4.8	F	6	U	12380	–	Y	
11585	X	2.3 II	M	16	U	–	–	–	PCB
11586	X	1.0 III	F	17	U	12640	–	L	IDC

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11587	O	2.3 II	M	6	U	82998– 12330*	82998– –	L,Y	
11588	X	1.3	M	8	U	12410	–	L	
11589	X	1.3	M	2	U	–	–	–	PCB
11590	X	1.3 2.3 II	M	8 6	U	12410 12330*	– –	L L,Y	
11591	X	1.3 2.3 II	F	8 6	U	12420 12340*	– –	L L,Y	
11592	O	2.3 II	F	8	S	12440*	12590	L,Y	
11593	X	2.3 II	F	8	S	12440*	12590	L,Y	
11594	O	1.3 2.3 II	F	10 8	U	12420 12340*	– –	L L,Y	
11595	O	1.3 2.3 II	F	10 8	U	12420 12340*	– –	L L,Y	
11596	O	4.8 2.3 II	M	2 8	U	12370 12330*	– –	Y L,Y	
11597	X	1.8 1.0	M	10 32	U	– –	– –	– –	PCB
11598	O	2.3 II	M	5	S	12430*	–	L,Y	
11599	O	2.3 II	F	5	S	12440*	12590	L,Y	
11600	O	4.8 2.3 II 8.0	M	3 12 2	S	12470 12430* 12490	– – –	Y L,Y Y	
11601	X	4.8 2.3 II 8.0	F	3 12 2	S	12480 12440* 12500	– 12590 –	Y L,Y Y	
11602	X	4.8 2.3 II	M	2 3	U	12370 12330*	– –	Y L,Y	
11603	X	4.8 2.3 II	F	2 3	U	12380 12340*	– –	Y L,Y	
11604	O	2.3 II	F	13	U	12340*	–	L,Y	
11605	X	1.3 2.3 II	M	2 2	U	12410 12330*	– –	L L,Y	
11606	X	1.3 2.3 II	F	2 2	U	12420 12340*	– –	L L,Y	
11607	X	2.3 II	M	3	S	12430*	–	L,Y	
11608	O	2.3 II	F	2	U	12340*	–	L,Y	
11609	X	4.8 2.3 II	M	3 8	S	12470 12430*	– –	Y L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
11610	X	4.8	M	4	U	12370	–	Y	
		2.3 II		22		12330*	–	L,Y	
11611	X	4.8	F	4	U	12380	–	Y	
		2.3 II		22		12340*	–	L,Y	
11612	X	4.8	F	3	S	12480	–	Y	
		2.3 II		8		12440*	12590	L,Y	
11613	O	1.3	M	8	U	12410	–	L	
		2.3 II		2		12330*	–	L,Y	
11614	X	1.3	F	8	U	12420	–	L	
		2.3 II		2		12340*	–	L,Y	
11615	O	4.8	F	8	U	12380	–	Y	
11616	O	1.3	F	6	U	12420	–	L	
11617	X	2.3 II	F	6	U	12340*	–	L,Y	
11618	X	1.3	F	40	U	12420	–	L	
11619	X	1.0 II	M	16	U	–	–	–	PCB
		1.8 II		18		–	–	–	
11620	X	1.3	M	3	U	–	–	–	PCB
11621	X	1.3	M	22	U	–	–	–	PCB
11622	O	2.3 II	M	3	S	12430*	–	L,Y	
11623	O	1.3	M	8	U	12410	–	L	
11624	X	1.3	M	6	U	–	–	–	PCB
		2.3 II		10		–	–	–	
11625	X	1.3	M	5	U	–	–	–	PCB
		4.8		2		–	–	–	
		2.3 II		17		–	–	–	
11626	X	2.3 II	F	12	U	12340*	–	L,Y	
11627	X	1.3	M	20	U	12410	–	L	
11628	O	1.3	F	22	U	12420	–	L	
11629	O	1.3	M	8	U	–	–	–	PCB
11630	O	1.3	F	8	U	12420	–	L	
11631	O	4.8	M	6	U	12370	–	Y	
		2.3 II		20		12330*	–	L,Y	
11632	X	4.8	F	6	U	12380	–	Y	
		2.3 II		20		12340*	–	L,Y	
11633	X	1.3	F	8	U	12420	–	L	
11634	X	1.3	M	12	U	–	–	–	PCB
11635	X	1.3	M	13	U	–	–	–	PCB
11636	X	1.3	M	8	U	–	–	–	PCB
11637	O	1.0 III	F	28	U	12690*	–	L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11638	O	1.0 III 1.0 IV	F	16 6	U	82998– 12690* 12740	82998– – –	 L L	
11639	X	–	–	–	–	–	–	–	
11640	X	6.3 II	F	4	S	24160	–	L	
11641	O	1.3	M	10	U	–	–	–	PCB
11642	O	1.3	F	10	U	12420	–	L	
11643	O	4.8 2.3 II	F	2 7	S	12480 12440*	– 12590	Y L,Y	
11644	X	1.3	M	14	U	–	–	–	PCB
11645	X	1.3 2.3 II	M	60 10	U	– –	– –	– –	PCB
11646	X	1.3 2.3 II	M	36 16	U	– –	– –	– –	PCB
11647	X	1.3 2.3 II	M	20 16	U	– –	– –	– –	PCB
11648	X	1.3	F	16	U	12420	–	L	
11649	O	2.3 II	F	12	U	12340*	–	L,Y	
11650	X	1.8 1.0	M	22 32	U	– –	– –	– –	PCB
11651	X	1.3 2.3 II	M	8 6	U	– –	– –	– –	PCB
11652	X	1.3 2.3 II	F	10 6	U	12420 12340*	– –	L L,Y	
11653	O	2.3 II	F	10	S	12440*	12590	L,Y	
11654	O	1.3	M	14	U	12410	–	L	
11655	O	8.0	M	2	U	12390	–	Y	
11656	O	2.3 II	F	12	U	12340*	–	L,Y	
11657	O	1.3	F	10	U	12420	–	L	
11658	O	2.3 II	F	10	S	12440*	12590	L,Y	
11659	O	HEAD-LAMP	F	2	S	24150	24190	L,Y	
11660	O	HEAD-LAMP	F	2	S	24150	24190	L,Y	
11661	O	2.3 II	F	12	U	12340*	–	L,Y	
11662	X	8.0	F	4	U	12400	–	Y	
11663	X	2.3 II	F	6	S	12440*	12590	L,Y	
11664	X	2.3 II	F	12	S	12440*	12590	L,Y	
11665	O	OBD II	F	16	U	–	–	–	
11666	X	–	–	–	–	–	–	–	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
11667	X	4.8	F	1	U	12380	–	Y	
		8.0		2		12400	–	Y	
11669	X	2.3 II	M	27	U	12330*	–	L,Y	
11670	X	2.3 II	F	27	U	12340*	–	L,Y	
11671	O	1.3	F	8	U	12420	–	L	
		2.3 II		9		12340*	–	L,Y	
11672	X	1.3	F	8	U	12420	–	L	
		2.3 II		9		12340*	–	L,Y	
11676	X	8.0	F	4	U	12400	–	Y	
11677	X	2.3 II	F	15	S	12440*	12590	L,Y	
11680	X	1.3	M	16	U	12410	–	L	
11681	X	1.3	F	16	U	12420	–	L	
11682	X	1.3	M	16	U	12410	–	L	
11683	X	1.3	F	16	U	12420	–	L	
11684	O	8.0	F	2	U	12400	–	Y	
11685	O	8.0	F	3	U	12400	–	Y	
11686	O	4.8	F	8	U	12380	–	Y	
11687	X	6.3	F	2	U	12060	12580	Y	
11688	X	1.3	M	5	S	12630	–	L	
11689	X	1.3	M	5	S	12630	–	L	
11690	X	1.3	F	5	S	12650	–	L	Outer
11691	X	1.3	F	5	S	12650	–	L	Inner
11693	X	2.3 II	F	12	U	12340*	–	L,Y	
11694	X	2.3 II	M	13	U	12330*	–	L,Y	
11695	X	2.3 II	F	13	U	12340*	–	L,Y	
11696	X	1.5	M	6	U	–	–	–	PCB
11697	X	1.5	F	6	U	–	–	–	
11698	O	1.3	F	12	S	12650	–	L	
11700	X	1.0 II	M	32	U	–	–	–	PCB
		1.8 II		10		–	–	–	
11701	O	4.8	F	4	U	12380	–	Y	
		2.3 II		4		12340*	–	L,Y	
11703	X	2.3 II	F	1	U	12340*	–	L,Y	
11709	X	2.3 II	M	9	U	12330*	–	L,Y	
11710	X	2.3 II	F	9	U	12340*	–	L,Y	
11714	X	2.3 II	F	13	U	12340*	–	L,Y	
11716	X	1.3	F	10	U	12420	–	L	
		2.3 II		8		12340*	–	L,Y	
11720	X	2.3 II	F	12	U	12340*	–	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11724	X	2.3 II	M	2	U	82998– 12350*	82998– –	L,Y	
11731	X	HEAD-LAMP	F	3	U	24140	24200	L,Y	
11733	O	1.8 1.0 1.0 II 1.8 II	M	22 16 16 22	U	– – – –	– – – –	– – – –	PCB
11735	X	2.3 II	M	2	U	12330*	–	L,Y	
11736	O	2.3 II	F	2	U	12340*	–	L,Y	
11737	X	2.3 II	M	1	U	12330*	–	L,Y	
11738	X	2.3 II	F	1	U	12340*	–	L,Y	
11739	X	2.3 II	M	7	U	12330*	–	L,Y	
11740	X	2.3 II	F	7	U	12340*	–	L,Y	
11742	O	4.8	F	4	U	12380	–	Y	
11743	X	1.3	M	14	U	–	–	–	PCB
11744	X	1.3	M	14	U	–	–	–	PCB
11745	X	1.3	M	18	U	–	–	–	PCB
11746	X	1.3	M	22	U	–	–	–	PCB
11747	X	2.3 II	M	12	U	–	–	–	PCB
11748	X	2.3 II	M	18	U	–	–	–	PCB
11749	X	2.3 II	M	20	U	–	–	–	PCB
11750	X	2.3 II	M	20	U	–	–	–	PCB
11751	X	2.3 II	M	18	U	–	–	–	PCB
11752	X	2.3 II	M	10	U	–	–	–	PCB
11753	X	2.3 II	M	14	U	–	–	–	PCB
11757	X	2.3 II	M	10	U	12330*	–	L,Y	
11763	X	2.3 II	M	3	U	12330*	–	L,Y	
11764	O	2.3 II	F	3	U	12340*	–	L,Y	
11765	X	2.3 II	M	4	U	12330*	–	L,Y	
11766	X	2.3 II	F	4	U	12340*	–	L,Y	
11767	X	2.3 II	M	1	U	12330*	–	L,Y	
11769	X	2.3 II	F	2	U	12340*	–	L,Y	
11771	X	4.8 2.3 II	F	2 2	U	12380 12340*	– –	Y L,Y	
11772	X	2.3 II	F	5	U	12340*	–	L,Y	
11773	X	2.3 II	F	2	S	12440*	12590	L,Y	
11774	X	9.5	M	1	U	–	–	–	
11775	X	9.5	F	1	U	–	–	–	
11777	X	1.3	F	3	U	12420	–	L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11778	O	4.8	F	6	U	82998– 12380	82998– –	Y	
11779	O	2.3 II	M	4	U	12330*	–	L,Y	
11780	O	2.3 II	F	6	U	12340*	–	L,Y	
11781	X	2.3 II	F	10	U	12340*	–	L,Y	
11782	X	2.3 II	F	12	U	12340*	–	L,Y	
11784	O	4.8 2.3 II	F	2 7	S	12480 12440*	– 12590	Y L,Y	
11785	X	1.0 J 1.8 J	M	48 16	U	– –	– –	– –	PCB
11786	X	1.0 J 1.8 J	F	16 10	U	– –	– –	– –	
11787	X	1.0 J	F	16	U	–	–	–	
11788	X	1.0 J 1.8 J	F	16 6	U	– –	– –	– –	
11789	X	1.0 III	M	2	S	12710	–	L	
11790	X	1.0 III	F	2	S	12720*	–	L	
11791	X	2.3 II	F	14	U	12340*	–	L,Y	
11792	X	2.3 II	F	4	U	12340*	–	L,Y	
11794	X	VH	F	7	U	–	–	–	
11797	X	2.3 II	F	5	U	12340*	–	L,Y	
11799	X	4.8	F	4	U	12380	–	Y	
11800	X	2.3 II	F	10	U	12340*	–	L,Y	
11805	X	2.3 II	F	14	U	12340*	–	L,Y	
11809	X	4.8	M	4	U	12370	–	Y	
11812	X	2.3 II	M	4	U	12330*	–	L,Y	
11814	X	2.3 II	M	6	U	12330*	–	L,Y	
11817	X	2.3 II	F	10	U	12340*	–	L,Y	
11820	X	2.3 II	F	6	U	12340*	–	L,Y	
11823	X	2.3 II	M	10	U	12330*	–	L,Y	
11824	X	8.0	F	2	U	12400	–	Y	
11827	X	2.3 II	F	13	U	12340*	–	L,Y	
11839	X	2.3 II	F	2	U	12340*	–	L,Y	
11840	X	2.3 II	F	2	U	12340*	–	L,Y	
11841	X	2.3 II	F	4	U	12340*	–	L,Y	
11842	X	2.3 II	F	4	U	12340*	–	L,Y	
11843	X	2.3 II	M	5	U	12330*	–	L,Y	
11847	X	2.3 II	F	12	U	12340*	–	L,Y	
11848	X	2.3 II	F	13	U	12340*	–	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11851	X	4.8 2.3 II	F	4 20	S	82998– 12480 –	82998– – 12790*	Y L,Y	
11853	X	6.3	F	1	U	12060	12580	Y	
11854	X	1.0 III	M	2	S	12710	–	L	
11856	O	1.0 III	F	2	S	12720*	–	L	
11857	X	1.0 III	F	4	S	12720*	–	L	
11858	O	2.3 II	F	6	S	12440*	12590	L,Y	
11859	X	2.3 II	F	2	S	12440*	12590	L,Y	
11860	X	2.3 II	F	3	S	12440*	12590	L,Y	
11861	X	4.8 1.5	F	25 25	S	12480 –	– –	Y –	
11862	O	PAI 1	F	2	U	–	–	–	
11863	X	1.0 III	M	2	S	12710	–	L	
11864	X	1.0 III	F	2	S	12720*	–	L	
11865	X	1.0 III	M	2	S	12710	–	L	
11866	X	1.0 III	M	44	U	–	–	–	PCB
11867	X	1.0 III	F	12	U	12690*	–	L	
11868	X	1.0 III	F	20	U	12690*	–	L	
11869	X	1.0 III	F	12	U	12690*	–	L	
11870	X	1.0 III	M	52	U	–	–	–	PCB
11871	X	1.0 III	F	12	U	12690*	–	L	
11872	X	1.0 III	F	28	U	12690*	–	L	
11873	X	1.0 III	F	12	U	12690*	–	L	
11874	X	2.3 II	M	3	U	–	–	–	PCB
11875	O	2.3 II	F	2	S	–	12790*	L,Y	
11876	X	1.0 III 2.3 II	M	19 6	U	– –	– –	– –	PCB
11877	O	1.0 III 2.3 II	F	19 6	U	12690* 12340*	– –	L L,Y	
11878	O	4.8	M	4	U	12370	–	Y	
11879	X	4.8	F	6	U	12380	–	Y	
11880	X	8.0	F	3	U	12400	–	Y	
11881	X	9.5	F	1	U	–	–	–	
11882	X	4.8 2.3 II	F	4 20	S	12480 –	– 12790*	Y L,Y	
11883	X	1.0 III	M	2	U	12670*	–	L	
11884	X	1.0 III	F	2	U	12690*	–	L	
11885	O	2.3 II	F	4	S	–	12790*	L,Y	
11886	O	1.0 III	F	2	U	12690*	–	L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11889	X	1.0 III	M	2	U	82998– 12670*	82998– –	L	
11890	X	1.0 III	F	2	U	12690*	–	L	
11891	X	1.0 III	M	4	U	12670*	–	L	
11892	X	1.0 III	F	4	U	12690*	–	L	
11893	X	4.8 2.3 II	F	4 20	S	12480 –	– 12790*	Y L,Y	
11898	X	1.0 III	F	2	S	12720*	–	L	
11899	X	1.8 1.0	M	8 18	U	– –	– –	– –	PCB
11900	X	2.3 II	F	2	S	–	12790*	L,Y	
11901	X	2.3 II	M	2	S	12430*	–	L,Y	
11902	O	1.8 1.0	M	6 32	U	– –	– –	– –	PCB
11903	X	1.0 III 1.0 III	M	5 44	U	– –	– –	– –	PCB
11904	X	1.0 III	M	5	S	12710	–	L	
11905	X	1.3 2.3 II	M	16 4	U	– –	– –	– –	PCB
11906	X	SL	F	83	U	12130	–	L,Y	
11907	X	SL	F	3	S	–	–	–	
11908	X	SL	F	5	U	12130	–	L,Y	
11909	O	1.0 III	F	5	U	12690*	–	L	
11910	X	1.0 III	M	14	U	12670*	–	L	
11911	O	1.0 III	F	14	U	12690*	–	L	
11912	X	1.0 III	M	18	U	12670*	–	L	
11913	O	1.0 III	F	18	U	12690*	–	L	
11914	O	1.0 III	F	18	U	12640	–	L	IDC
11915	O	1.0 III	F	22	U	12690*	–	L	
11916	X	1.0 III	M	40	U	–	–	–	PCB
11917	X	1.0 III	M	2	U	12670*	–	L	
11918	O	1.0 III	F	2	U	12690*	–	L	
11919	O	1.0 III	F	2	U	12640	–	L	IDC
11920	O	1.0 III	M	5	U	12670*	–	L	
11921	O	1.0 III	F	5	U	12640	–	L	IDC
11922	X	1.0 III	M	10	U	12670*	–	L	
11923	O	1.0 III	F	10	U	12690*	–	L	
11924	O	1.0 III	F	10	U	12640	–	L	IDC
11925	O	1.0 III	F	14	U	12640	–	L	IDC
11926	O	1.0 III	M	22	U	12670*	–	L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11927	O	1.0 III	F	22	U	82998– 12640	82998– –	L	IDC
11928	X	1.0 III	M	54	U	–	–	–	PCB
11929	X	2.3 II	M	4	S	12430*	–	L,Y	
11930	X	2.3 II	F	4	S	12440*	12590	L,Y	
11933	X	1.0 III	M	2	U	12670*	–	L	
11934	X	1.0 III 1.0 IV	M	81 24	U	– –	– –	– –	PCB
11935	X	1.0 III 1.0 IV	F	20 11	U	12690* 12740	– –	L L	
11936	X	8.0	M	3	U	12390	–	Y	
11937	X	INVERT-ER	M	3	U	–	–	–	
11938	X	INVERT-ER	F	3	U	–	–	–	
11939	O	–	–	–	–	–	–	–	
11940	X	PIN	M	2	S	–	–	–	
11941	X	LA	F	1	S	–	–	–	
11942	O	LA	F	1	S	–	–	–	
11943	X	SOCK-ET	F	1	S	–	–	–	
11944	O	SOCK-ET	F	1	S	–	–	–	
11945	O	PIN	M	2	S	–	–	–	
11946	X	1.0 III	M	5	U	–	–	–	PCB
11947	X	1.0 III 2.3 II	F	8 4	U	12690* 12340*	– –	L L,Y	
11948	O	1.0 III	F	10	U	12640	–	L	IDC
11949	X	1.0 III	M	18	U	–	–	–	PCB
11950	X	1.0 III	F	4	U	12690*	–	L	
11951	X	1.0 III	M	13	U	–	–	–	PCB
11952	X	1.0 III	F	13	U	12690*	–	L	
11953	X	1.0 III 2.3 II	M	64 14	U	– –	– –	– –	PCB
11954	X	1.0 III 2.3 II	F	8 9	U	12690* 12340*	– –	L L,Y	
11955	X	1.0 III	F	19	U	12690*	–	L	
11956	X	1.0 III	F	21	U	12690*	–	L	
11957	X	1.0 III 2.3 II	F	16 5	U	12690* 12340*	– –	L L,Y	
11960	X	2.3 II	F	5	S	12440*	12590	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 11961	X	1.0 III 1.0 III	M	5 28	U	82998– – –	82998– – –	– –	PCB
11962	X	9.5	M	1	S	–	–	–	
11963	X	9.5	F	1	S	–	–	–	
11964	O	2.3 II	F	4	S	12440*	12590	L,Y	
11965	X	8.0	M	4	U	–	–	–	PCB
11966	X	1.0 II	M	22	U	–	–	–	PCB
11967	O	1.0 III	M	2	U	12670*	–	L	
11968	X	1.0 III	M	5	U	–	–	–	PCB
11969	X	1.0 III	M	14	U	–	–	–	PCB
11970	X	1.0 III 2.3 II	M	16 4	U	– –	– –	– –	PCB
11971	X	1.0 III 2.3 II	F	16 4	U	12690* 12340*	– –	L L,Y	
11972	X	1.0 III 2.3 II	M	49 14	U	– –	– –	– –	PCB
11973	O	1.0 III 2.3 II	F	10 8	U	12690* 12340*	– –	L L,Y	
11974	X	1.0 III	F	20	U	12690*	–	L	
11976	O	–	–	–	–	–	–	–	
11978	X	OBD II	F	16	U	–	–	–	
11985	X	1.0 III	M	4	U	–	–	–	PCB
11986	O	1.0 III	F	6	U	12690*	–	L	
11987	X	1.0 III	F	3	U	12690*	–	L	
11988	O	1.0 III	F	4	U	12640	–	L	IDC
11989	X	1.0 III	F	8	U	12690*	–	L	
11990	X	1.0 III 2.3 II	M	37 18	U	– –	– –	– –	PCB
11992	X	1.0 III	M	2	U	12670*	–	L	
11993	X	1.0 III	M	10	U	–	–	–	PCB
11994	X	2.3 II	M	3	U	–	–	–	PCB
11995	O	–	–	–	–	–	–	–	
11996	X	9.5	F	2	U	–	–	–	
12002	X	1.0 III 2.3 II	M	6 5	U	12670* 12330*	– –	L L,Y	
12003	X	1.0 III 2.3 II	F	6 5	U	12690* 12340*	– –	L L,Y	
12004	X	1.0	M	6	U	–	–	–	IDC
12005	X	2.3 II	F	4	S	–	12790*	L,Y	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 12006	O	–	–	–	–	82998– –	82998– –	–	
12007	X	1.0 III 2.3 II	F	4 9	U	12690* 12340*	– –	L L,Y	
12008	O	1.0 III 2.3 II	F	2 8	U	12690* 12340*	– –	L L,Y	
12009	X	1.0 III	M	10	U	–	–	–	PCB
12010	X	1.0 III 2.3 II	M	10 8	U	– –	– –	– –	PCB
12011	X	1.0 III	M	18	U	–	–	–	PCB
12012	X	1.0 III	F	6	U	12690*	–	L	
12013	X	1.0 III	M	6	U	–	–	–	PCB
12014	X	2.3 II	F	2	U	12340*	–	L,Y	
12015	X	1.0 III	M	14	U	–	–	–	PCB
12016	X	1.0 III	M	4	U	12670*	–	L	
12017	X	1.0 III	F	4	U	12690*	–	L	
12018	X	2.3 II	F	4	U	12340*	–	L,Y	
12019	X	1.0 III	F	4	U	12640	–	L	IDC
12020	O	4.8 1.0 III	F	4 30	S	12480 12720*	– –	Y L	
12021	O	4.8 1.0 III	F	4 23	S	12480 12720*	– –	Y L	
12022	X	4.8 1.0 III	F	4 16	S	12480 12720*	– –	Y L	
12023	X	1.0 III	M	10	U	12660	–	L	IDC
12024	X	1.0 III	M	22	U	12670*	–	L	
12025	X	1.0 III 2.3 II	M	16 4	U	12670* 12330*	– –	L L,Y	
12026	X	2.3 II	F	9	U	24220	–	L	IDC
12027	X	2.3 II	F	13	U	24220	–	L	IDC
12028	O	2.3 II	F	2	S	12440*	12590	L,Y	
12029	X	1.0	M	2	U	–	–	–	
12030	X	1.0 III	M	22	U	–	–	–	PCB
12031	X	1.0 J 1.8 J	M	60 16	U	– –	– –	– –	PCB
12032	X	1.0 J	F	12	U	–	–	–	
12033	X	4.8 1.0 III	M	2 18	U	– –	– –	– –	PCB
12034	X	4.8 1.0 III	F	2 18	U	12380 12690*	– –	Y L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
12035	X	1.0 III 2.3 II	M	41 6	U	– –	– –	– –	PCB
12036	X	1.0 III	M	5	U	–	–	–	PCB
12037	X	1.0 III 2.3 II	M	16 4	U	– –	– –	– –	PCB
12038	O	1.0 III 2.3 II	F	16 4	U	12690* 12340*	– –	L L,Y	
12039	X	VH	F	2	U	–	–	–	
12041	X	HFC	M	1	U	–	–	–	
12050	X	1.0 III	M	5	U	–	–	–	PCB
12055	X	1.0 III 1.0 IV	M	100 22	U	– –	– –	– –	PCB
12056	X	0.64	F	6	U	–	–	–	
12057	X	2.3 II	F	4	S	12440*	12590	L,Y	
12058	X	4.8 8.0	F	1 2	S	12480 12500	– –	Y Y	
12059	X	1.0 III	M	7	U	12670*	–	L	
12060	X	1.0 III	F	7	U	12690*	–	L	
12061	X	1.0 III	M	8	U	–	–	–	PCB
12062	X	1.0 III	M	2	U	12670*	–	L	
12063	X	1.0 III	F	2	U	12690*	–	L	
12064	X	1.0 III	M	6	U	–	–	–	PCB
12067	X	1.0 III	F	6	U	12690*	–	L	
12068	X	8.0	F	2	S	12500	–	Y	
12070	X	2.3 II	F	24	U	12340*	–	L,Y	
12071	X	2.3 II	F	32	U	12340*	–	L,Y	
12079	X	B TO J	F	24	U	–	–	–	
12080	X	1.0 III	F	8	S	12720*	–	L	
12081	X	1.0 III	M	29	U	12670*	–	L	
12082	X	1.0 III	F	14	U	12690*	–	L	
12087	X	1.0 III	M	20	U	–	–	–	PCB
12088	O	2.3 II	F	2	U	12340*	–	L,Y	
12089	X	2.3 II	F	2	U	12340*	–	L,Y	
12090	X	2.3 II	F	12	U	12340*	–	L,Y	
12091	X	1.0 III	F	8	U	12690*	–	L	
12092	O	0.64 1.0 IV	F	5 2	U	– 12740	– –	– L	
12093	X	1.0 III	M	16	U	–	–	–	PCB
12094	X	1.0 III	F	16	U	12690*	–	L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 12095	X	M6 NUT	F	3	S	82998– –	82998– –	–	
12096	X	1.0 III 2.3 II	F	12 20	U	12690* 12340*	– –	L L,Y	
12101	X	2.3 II	F	16	U	12340*	–	L,Y	
12102	X	2.3 II	F	28	U	12340*	–	L,Y	
12104	X	2.3 II	F	16	U	12340*	–	L,Y	
12105	X	2.3 II	M	16	U	12330*	–	L,Y	
12106	X	2.3 II	F	20	U	12340*	–	L,Y	
12108	X	2.3 II	M	18	U	–	–	–	PCB
12109	X	PAI 1	F	2	U	–	–	–	
12110	X	VALVE	F	2	U	–	–	–	
12111	X	VALVE	F	2	U	–	–	–	
12112	X	1.0 III	M	8	U	–	–	–	PCB
12113	X	1.0 III	F	8	U	12690*	–	L	
12114	X	1.0 III 2.3 II	F	6 28	U	12690* 12340*	– –	L L,Y	
12116	O	4.8 1.0 III	F	4 20	S	12480 12720*	– –	Y L	
12117	X	2.3 II	F	2	S	–	12790*	L,Y	
12118	X	8.0	M	2	U	–	–	–	PCB
12119	X	8.0	M	2	U	–	–	–	PCB
12120	X	8.0	F	2	U	12400	–	Y	
12122	X	1.0 III 2.3 II	F	6 12	U	12690* 12340*	– –	L L,Y	
12123	X	1.0 III	M	4	U	12670*	–	L	
12125	X	LA	F	1	S	–	–	–	
12129	X	LA	F	1	S	–	–	–	
12131	X	BUS–BAR	M	3	S	–	–	–	
12134	X	1.0 III	M	10	U	–	–	–	PCB
12135	X	1.0 III	F	10	U	12690*	–	L	
12136	X	LA	F	1	S	–	–	–	
12137	X	1.0 III 2.3 II	M	14 6	U	– –	– –	– –	PCB
12138	O	PAI 1	F	2	U	–	–	–	
12140	X	1.0 II 1.8 II	M	48 16	U	– –	– –	– –	PCB
12141	X	0.64 1.0 IV	M	133 34	U	– –	– –	– –	PCB

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
12142	X	0.64 1.0 IV	F	24 7	U	12750* 12740	– –	L L	
12143	X	0.64 1.0 IV	F	25 7	U	12750* 12740	– –	L L	
12144	X	0.64 1.0 IV	F	27 7	U	12750* 12740	– –	L L	
12145	X	0.64 1.0 IV	F	28 7	U	12750* 12740	– –	L L	
12146	X	0.64 1.0 IV	F	29 6	U	12750* 12740	– –	L L	
12147	X	0.64 2.3 II	M	68 12	U	– –	– –	– –	PCB
12148	X	0.64 2.3 II	M	40 10	U	– –	– –	– –	PCB
12149	X	0.64 2.3 II	F	20 4	U	12750* 12340*	– –	L L,Y	
12150	X	0.64 2.3 II	F	20 6	U	12750* 12340*	– –	L L,Y	
12151	X	0.64 2.3 II	F	28 2	U	12750* 12340*	– –	L L,Y	
12152	X	0.64	M	32	U	–	–	–	PCB
12153	X	0.64	F	32	U	12750*	–	L	
12155	X	0.64	F	16	U	12750*	–	L	
12156	X	0.64	F	16	U	12770	–	L	IDC
12157	X	0.64	M	16	U	–	–	–	PCB
12159	X	1.0 III	M	4	U	12670*	–	L	
12160	X	1.0 III	F	4	U	12690*	–	L	
12161	X	1.0 III 2.3 II	M	8 9	U	12670* 12330*	– –	L L,Y	
12162	X	1.0 III	F	10	U	12690*	–	L	
12163	X	2.3 II	M	8	S	12430*	–	L,Y	
12164	X	2.3 II	F	8	S	12440*	12590	L,Y	
12165	O	–	–	–	–	–	–	–	
12166	X	1.0 III 2.3 II	F	14 6	U	12690* 12340*	– –	L L,Y	
12167	X	1.0 III	M	8	U	–	–	–	PCB
12168	X	1.0 III	F	3	S	12720*	–	L	
12169	X	0.64	F	40	U	12750*	–	L	
12170	X	0.64	F	40	U	12770	–	L	IDC

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980– 12171	X	0.64	M	40	U	82998– –	82998– –	–	PCB
12174	X	1.0 II	F	18	U	24020*	–	L	IDC
12176	O	2.3 II	F	4	S	–	12790*	L,Y	
12177	X	2.3 II	M	4	S	–	–	L,Y	
12179	X	1.0 III 2.3 II	F	42 4	U	12690* 12340*	– –	L L,Y	
12182	X	0.64	M	12	U	–	–	–	PCB
12183	X	0.64	F	12	U	12750*	–	L	
12184	X	1.0 III 2.3 II	F	30 12	U	12690* 12340*	– –	L L,Y	
12188	X	2.3 II	F	2	S	12440*	12590	L,Y	
12189	X	1.0 III	M	5	U	12670*	–	L	
12190	X	1.0 III	F	5	U	12690*	–	L	
12191	X	PAI 1	F	2	U	–	–	–	
12192	X	0.64	M	16	U	–	–	–	
12193	X	0.64	M	24	U	–	–	–	
12194	X	1.0 III	M	2	S	12710	–	L	
12195	X	1.0 III	F	2	S	12720*	–	L	
12196	X	D–3	M	3	U	–	–	–	
12197	X	D–3	F	3	U	–	–	–	
12198	X	D–3	M	6	U	–	–	–	
12199	X	D–3	F	6	U	–	–	–	
12200	X	0.64	F	24	U	12750*	–	L	
12202	X	0.64 2.3 II	M	20 6	U	– –	– –	– –	PCB
12203	X	0.64 2.3 II	F	20 6	U	12750* 12340*	– –	L L,Y	
12204	X	1.0 III	M	6	U	12670*	–	L	
12205	X	2.3 II	M	12	U	–	–	–	PCB
12206	X	2.3 II	M	16	U	–	–	–	PCB
12207	X	1.0 III 2.3 II	M	26 8	U	– –	– –	– –	PCB
12208	X	1.0 III	M	6	U	–	–	–	PCB
12209	O	1.0 III	F	6	U	12690*	–	L	
12210	X	1.0 III	M	4	U	–	–	–	PCB
12211	O	1.0 III	F	4	U	12690*	–	L	
12212	X	1.0 III	M	4	U	12670*	–	L	
12213	X	0.64	M	40	U	–	–	–	PCB
12214	X	0.64	M	24	U	–	–	–	PCB

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
12215	X	0.64	M	24	U	–	–	–	PCB
12216	X	0.64	M	8	U	–	–	–	PCB
12217	X	0.64	F	8	U	12750*	–	L	
12218	X	PAI 1	M	2	U	–	–	–	
12219	X	PAI 1	F	2	U	–	–	–	
12220	X	0.64	M	8	U	–	–	–	PCB
12221	X	0.64	F	8	U	12750*	–	L	
12222	X	0.64	F	12	U	12750*	–	L	
12223	X	PAI 1	M	2	U	–	–	–	
12224	X	PAI 1	F	2	U	–	–	–	
12225	X	0.64	F	4	U	12750*	–	L	Splash Proof
12226	X	1.0 III 2.3 II	F	6 4	U	12690* 12340*	– –	L L,Y	
12227	X	9.5	M	3	S	–	–	–	
12228	X	9.5	F	3	S	–	–	–	
12230	X	LA	F	1	S	–	–	–	
12231	X	LA	F	1	S	–	–	–	
12232	X	0.64 1.0 IV	M	108 27	U	– –	– –	– –	PCB
12233	X	0.64 2.3 II	M	20 6	U	– –	– –	– –	PCB
12234	X	4.8	M	3	S	12470	–	Y	
12237	X	4.8	F	3	S	12480	–	Y	
12241	X	0.64	F	2	U	12750*	–	L	Splash Proof
12242	X	PAI 1	F	2	U	–	–	–	
12243	X	PAI 1	F	2	U	–	–	–	
12249	X	2.3 II	M	10	U	12330*	–	L,Y	
12250	X	0.64	M	11	U	–	–	–	
12251	X	0.64	F	11	U	12750*	–	L	
12252	X	0.64	M	16	U	–	–	–	
12253	O	PAI 1	F	2	U	–	–	–	
12258	X	0.64	M	20	U	–	–	–	PCB
12259	X	0.64	F	20	U	12750*	–	L	
12260	X	0.64	M	24	U	–	–	–	PCB
12269	X	0.64	M	12	U	–	–	–	PCB
12270	X	0.64	M	24	U	–	–	–	PCB
12271	X	1.0 III 2.3 II	F	20 6	U	12690* 12340*	– –	L L,Y	
12272	X	1.0 III	F	10	U	12690*	–	L	

HOUSING PART NUMBER LIST

Part No. of Connector Body	Supply	Terminal	Male Female	Cav. No.	Sealing Ability	Part No. of Repair Wire		Sleeve Color	Memo
						160 mm Type	500 mm Type		
90980–						82998–	82998–		
12273	X	1.0 III	F	6	U	12690*	–	L	
		2.3 II		6		12340*	–	L,Y	
12274	X	1.0 III	F	18	U	12690*	–	L	
		2.3 II		18		12340*	–	L,Y	
12275	X	1.0 III	F	8	U	12690*	–	L	
		2.3 II		24		12340*	–	L,Y	
12276	X	1.0 III	F	24	U	12690*	–	L	
		2.3 II		14		12340*	–	L,Y	
12277	X	1.0 III	F	10	U	12690*	–	L	
		2.3 II		20		12340*	–	L,Y	
12278	X	4.8	F	1	U	12380	–	Y	
		1.0 III		6		12690*	–	L	
		2.3 II		18		12340*	–	L,Y	
12291	X	1.0 III	M	39	U	–	–	–	PCB
12296	X	0.64	F	3	U	12750*	–	L	

Repair Wire (Waterproof Type)

Type	1.0II	
	Male	Female
		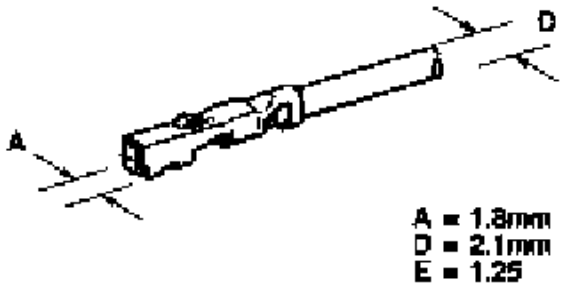
P/N		82998–24060
Type	1.0III	
	Male	Female
	Sleeve : Medium (Blue) 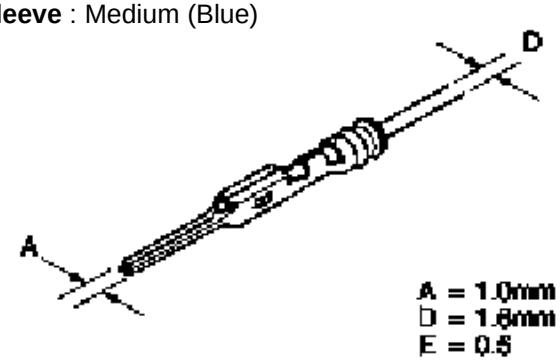	**Sleeve** : Medium (Blue) 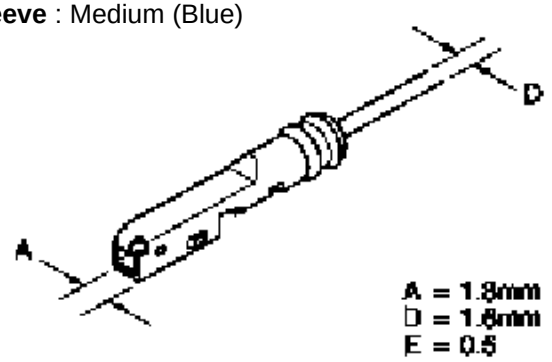
P/N	82998–12710	82998–12720 82998–12730*
Type	1.3	
	Male	Female
	Sleeve : Medium (Blue) 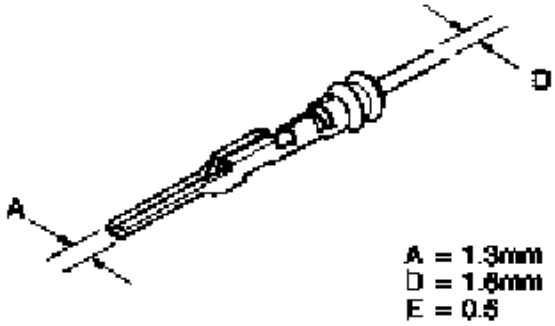	**Sleeve** : Medium (Blue) 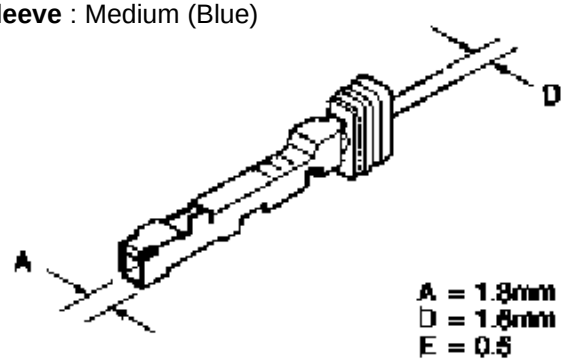
P/N	82998–12630	82998–12650

F

Repair Wire (Waterproof Type)

Type	1.8	
	Male	Female
		Sleeve : Medium (Blue) 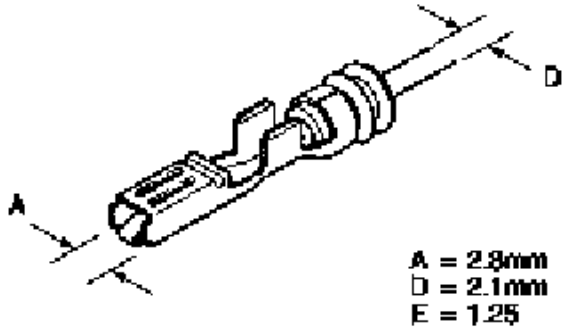
P/N		82998–12620
Type	2.3	
	Male	Female
	Sleeve : Medium (Blue) 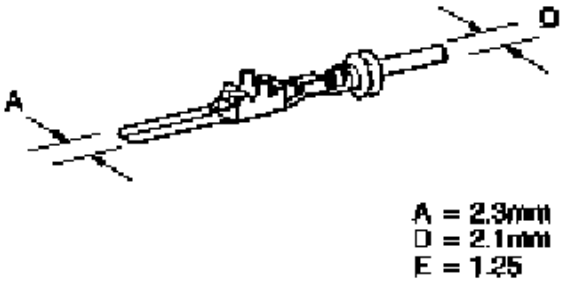 	**Sleeve** : Medium (Blue) 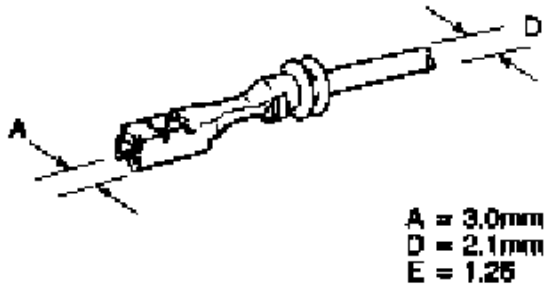
P/N	82998–12260 82998–24070*	82998–12270(160mm) 82998–12600(500mm) 82998–24080*
Type	2.3II (6mm Pitch Type)	
	Male	Female
	Sleeve : Medium (Blue) or Large (Yellow) 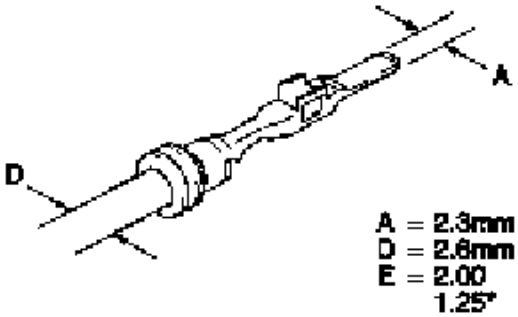 	**Sleeve** : Medium (Blue) or Large (Yellow) 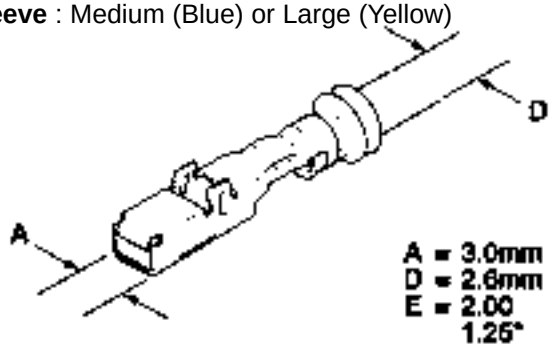
P/N	82998–12430 82998–12450*	82998–12440(160mm) 82998–12590(500mm) 82998–12460*

Repair Wire (Waterproof Type)

Type	2.3II (5mm Pitch Type)	
	Male	Female
		Sleeve : Medium (Blue) or Large (Yellow) 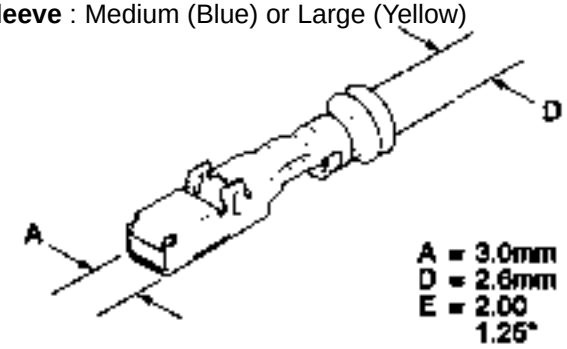
P/N		82998–12790 82998–12780*
Type	4.8	
	Male	Female
	Sleeve : Large (Yellow) 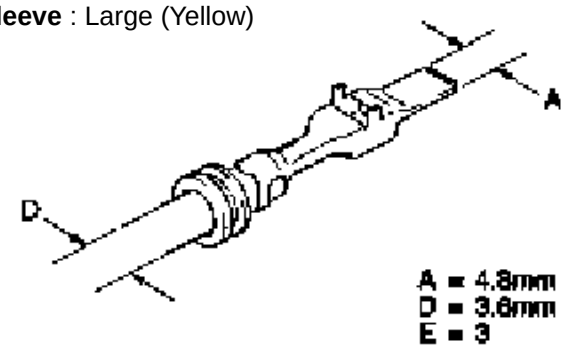 	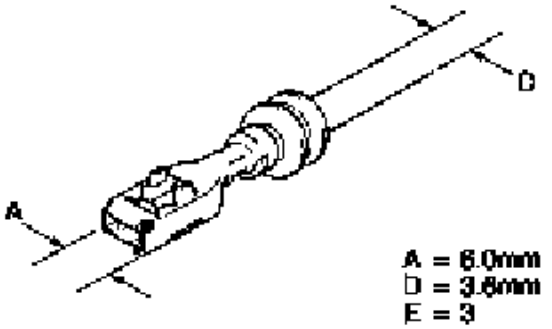
P/N	82998–12470	82998–12480
Type	6.3	
	Male	Female
		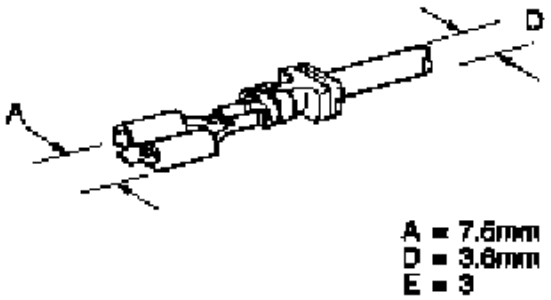
P/N		82998–12540

F

Repair Wire (Waterproof Type)

Type	6.3II	
	Male	Female
		Sleeve : Medium (Blue) 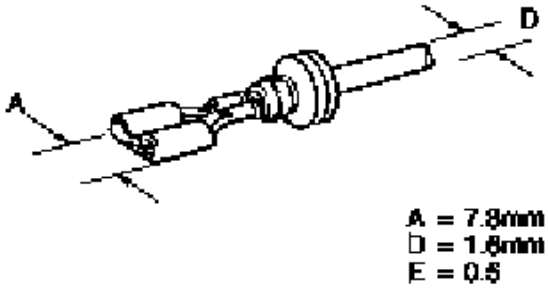
P/N		82998–24160
Type	8.0	
	Male	Female
	Sleeve : Large (Yellow) 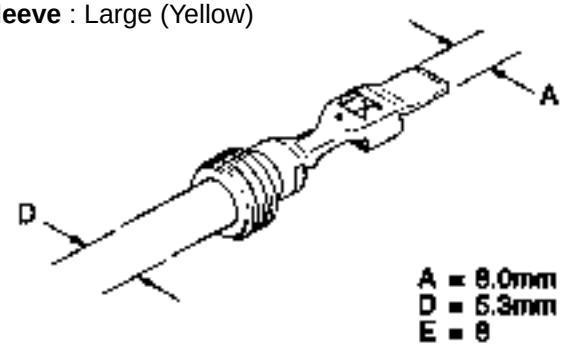	**Sleeve** : Large (Yellow) 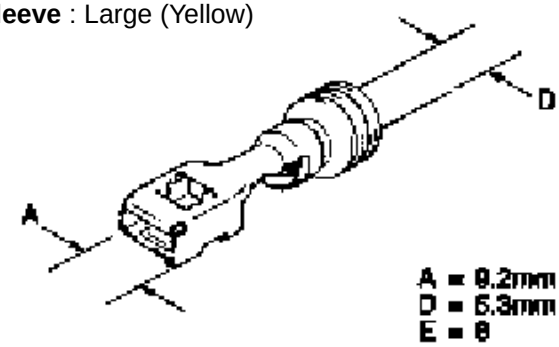
P/N	82998–12490	82998–12500
Type	HEAD LAMP	
	Male	Female
		Sleeve : Medium (Blue) or Large (Yellow) 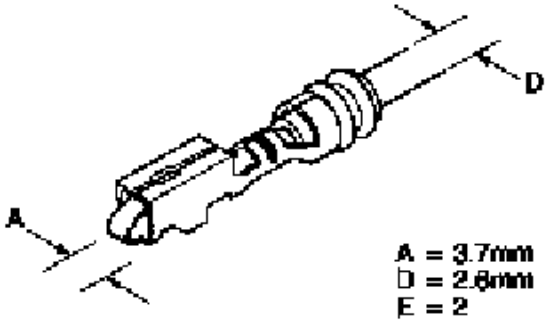
P/N		82998–24150(160mm) 82998–24190(500mm)

Repair Wire (Waterproof Type)

Type	HB3, HB4	
	Male	Female
		Sleeve : Medium (Blue) or Large (Yellow) 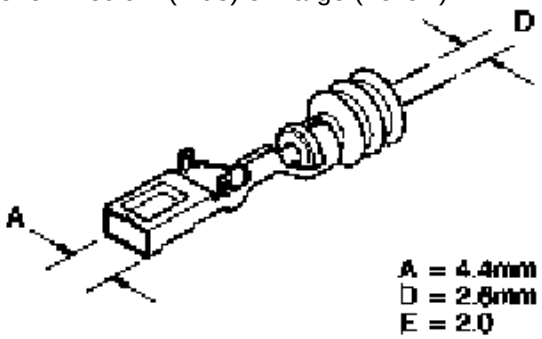
P/N		82998–12550(160mm) 82998–12610(500mm)
Type	TLC	
	Male	Female
	Sleeve : Small (Red) 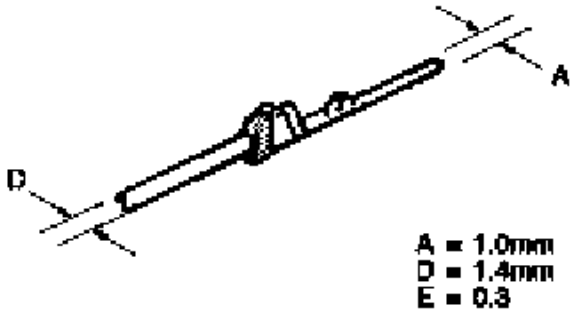 	**Sleeve** : Small (Red) 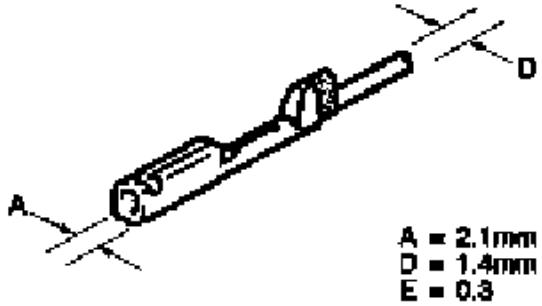
P/N	82998–12280	82998–12290

F

Repair Wire (Non–waterproof Type)

Type	0.64	
	Male	Female
		Sleeve : Medium (Blue) 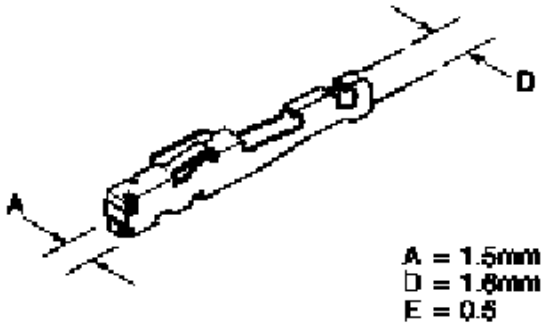
P/N		82998–12750 82998–12760*
Type	0.64 IDC	
	Male	Female
		Sleeve : Medium (Blue) 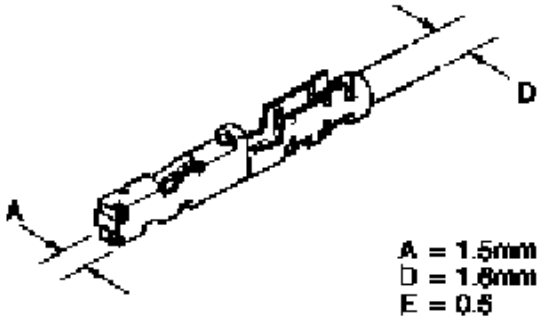
P/N		82998–12770
Type	1.0	
	Male	Female
		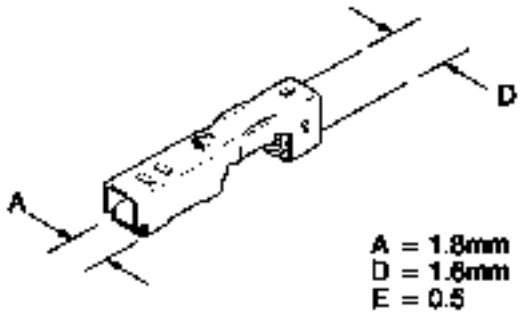
P/N		82998–12310 82998–12320*

F

Repair Wire (Non–waterproof Type)

Type	1.0II	
	Male	Female
	Sleeve : Medium (Blue) 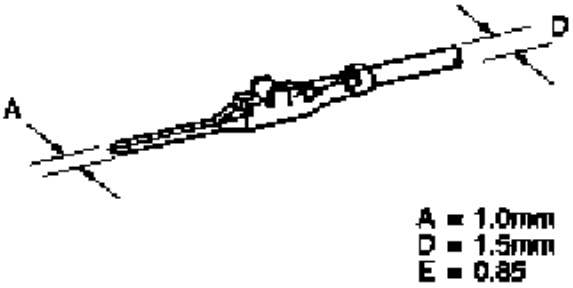 	**Sleeve** : Medium (Blue) **Size : S** 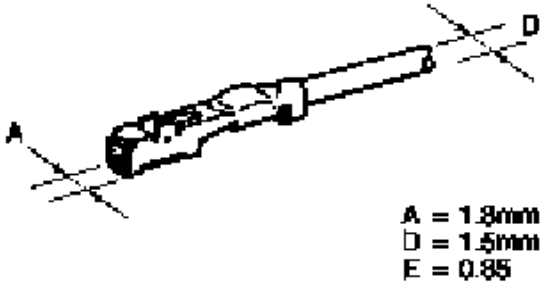
P/N	82998–24010	82998–24020 82998–24110*
Type	1.0II	
	Male	Female
		Sleeve : Medium (Blue) **Size : M** 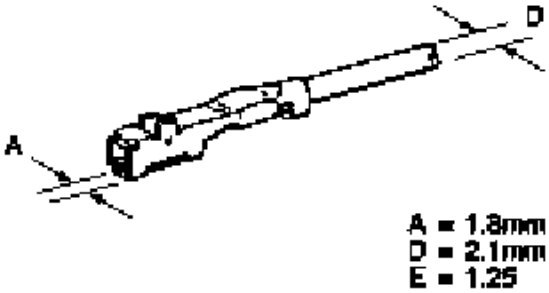
P/N		82998–24120*
Type	1.0III	
	Male	Female
	Sleeve : Medium (Blue) 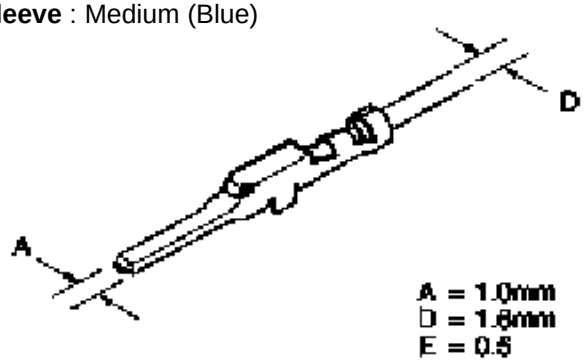 	**Sleeve** : Medium (Blue) 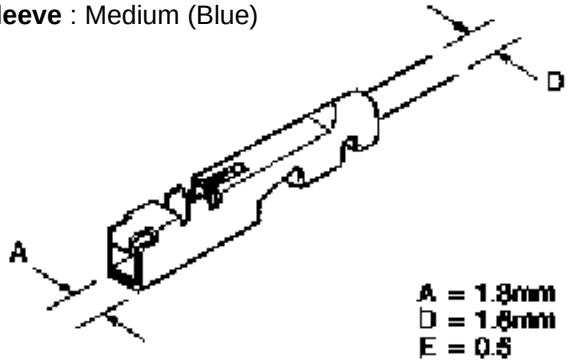
P/N	82998–12670 82998–12680*	82998–12690 82998–12700*

F

Repair Wire (Non–waterproof Type)

Type	1.0III IDC	
	Male	Female
	Sleeve : Medium (Blue) 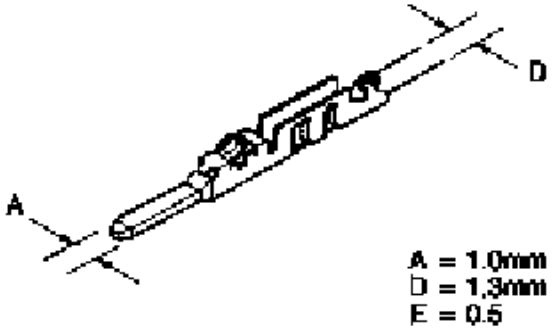 	**Sleeve** : Medium (Blue) 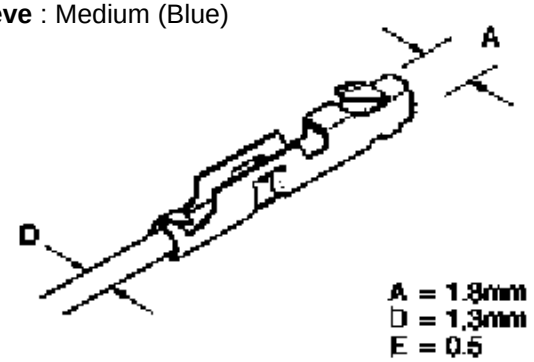
P/N	82998–12660	82998–12640
Type	1.0IV	
	Male	Female
		Sleeve : Medium (Blue) 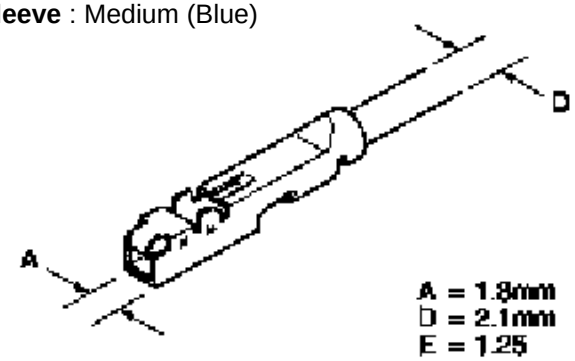
P/N		82998–12740
Type	1.3	
	Male	Female
	Sleeve : Medium (Blue) 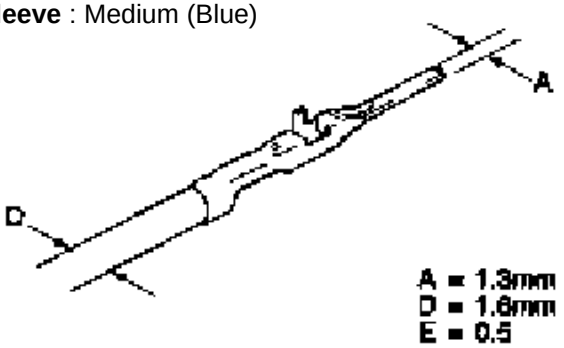 	**Sleeve** : Medium (Blue) 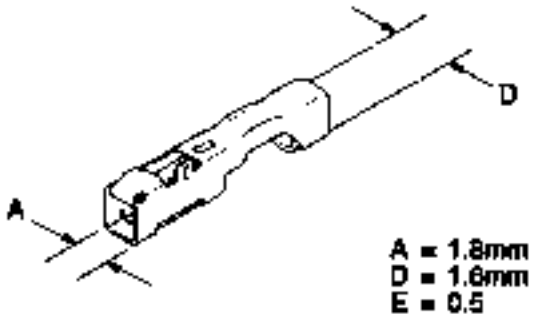
P/N	82998–12410	82998–12420

F

Repair Wire (Non–waterproof Type)

Type	1.8	
	Male	Female
	Sleeve : Medium (Blue) 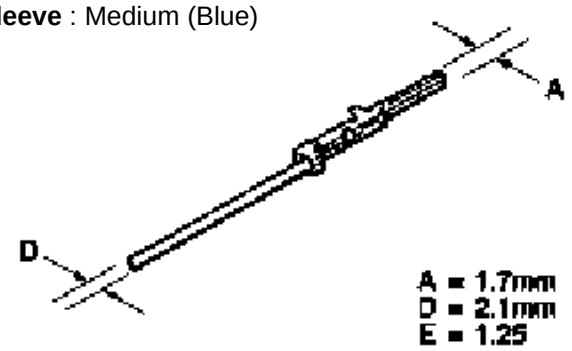 	**Sleeve** : Medium (Blue) 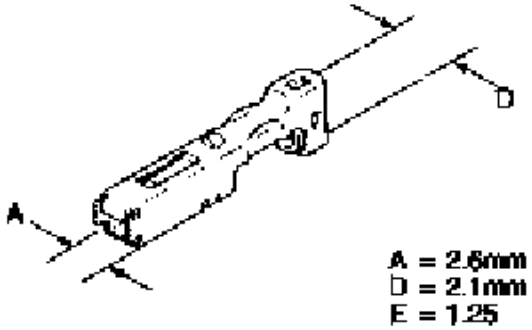
P/N	82998–12180	82998–12190 82998–12300*
Type	1.8II	
	Male	Female
	Sleeve : Medium (Blue) or Large (Yellow) **Size : S, M** 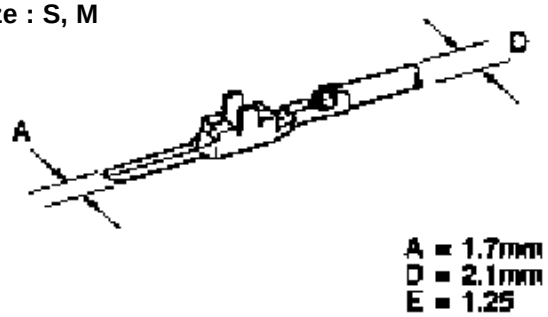 	**Sleeve** : Medium (Blue) or Large (Yellow) **Size : S, M** 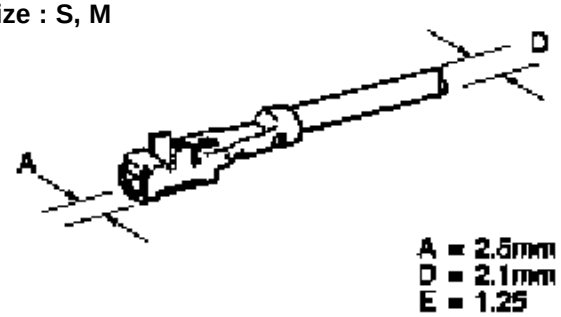
P/N	82998–24090 82998–24130*	82998–24100
Type	1.8II	
	Male	Female
	Sleeve : Medium (Blue) or Large (Yellow) **Size : L** 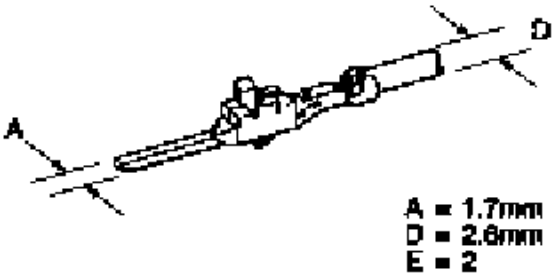 	**Sleeve** : Medium (Blue) or Large (Yellow) **Size : L** 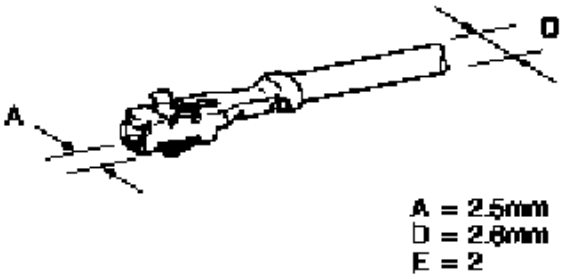
P/N	82998–24030	82998–24040

F

Repair Wire (Non–waterproof Type)

Type	2.3	
	Male	Female
	Sleeve : Medium (Blue) 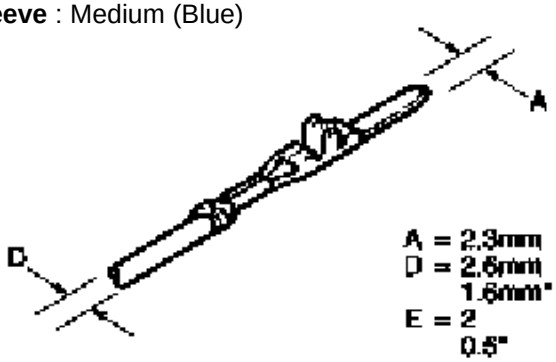 	**Sleeve** : Medium (Blue) 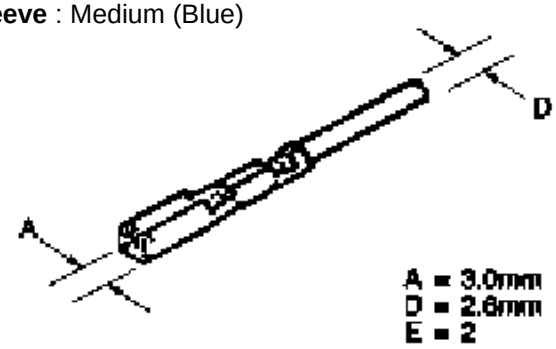
P/N	82998–12160 82998–24050*	82998–12170
Type	2.3II	
	Male	Female
	Sleeve : Medium (Blue) or Large (Yellow) 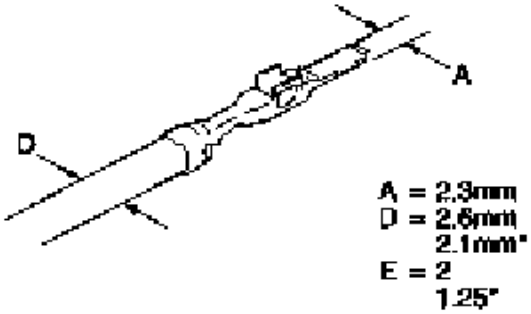 	**Sleeve** : Medium (Blue) or Large (Yellow) 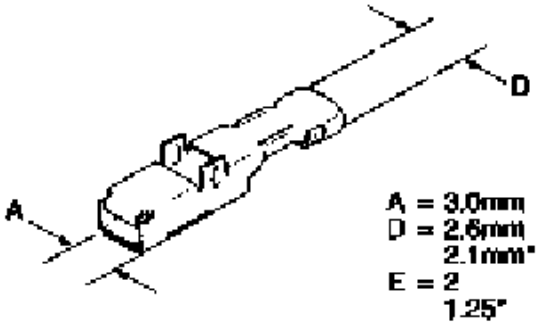
P/N	82998–12330 82998–12350*	82998–12340 82998–12360*
Type	2.3II IDC	
	Male	Female
		Sleeve : Medium (Blue) 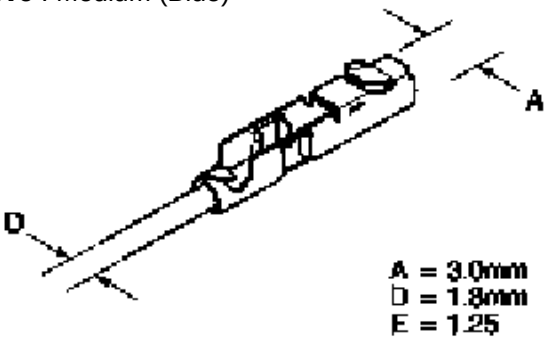
P/N		82998–24220

F

Repair Wire (Non–waterproof Type)

Type	4.8	
	Male	Female
	Sleeve : Large (Yellow) 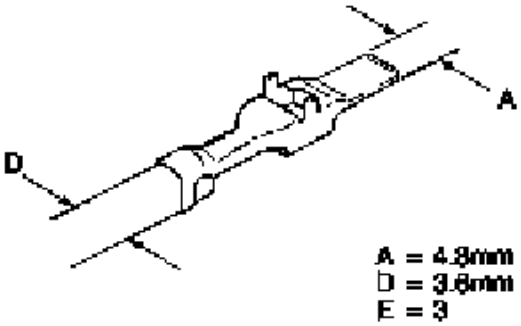 	**Sleeve** : Large (Yellow) 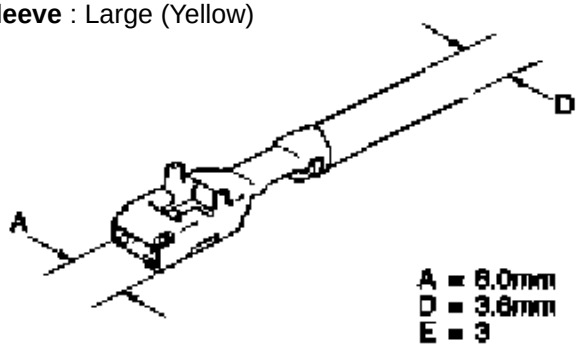
P/N	82998–12370	82998–12380
Type	6.3	
	Male	Female
	Sleeve : Large (Yellow) 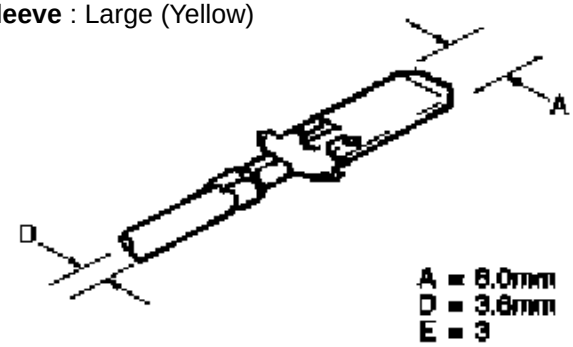 	**Sleeve** : Large (Yellow) 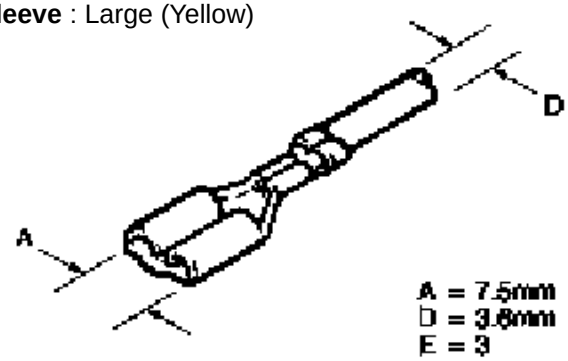
P/N	82998–12050	82998–12060(160mm) 82998–12580(500mm)
Type	6.3	
	Male	Female
		Sleeve : Large (Yellow) 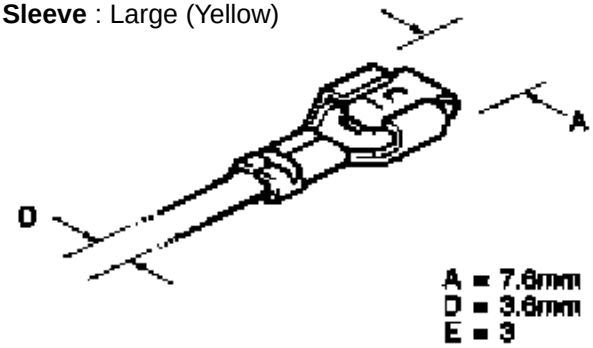
P/N		82998–12070

Repair Wire (Non–waterproof Type)

Type	6.3II	
	Male	Female
		Sleeve : Large (Yellow) 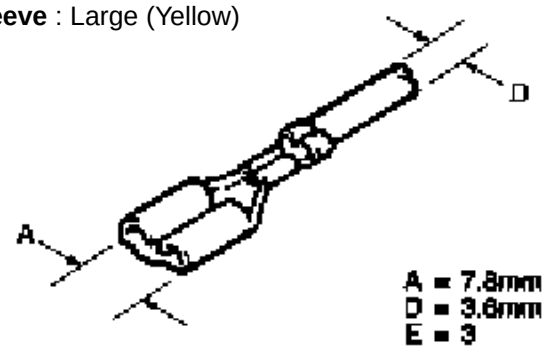
P/N		82998–24170
Type	7.7 Terminal Lance	
	Male	Female
	Sleeve : Large (Yellow) 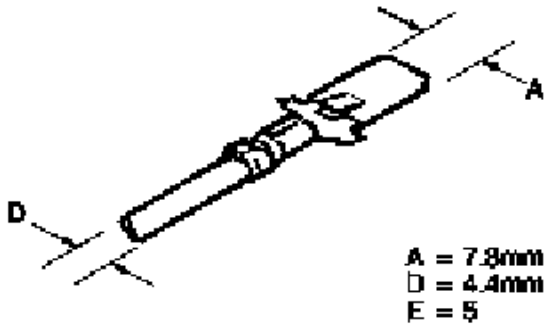	**Sleeve** : Large (Yellow) 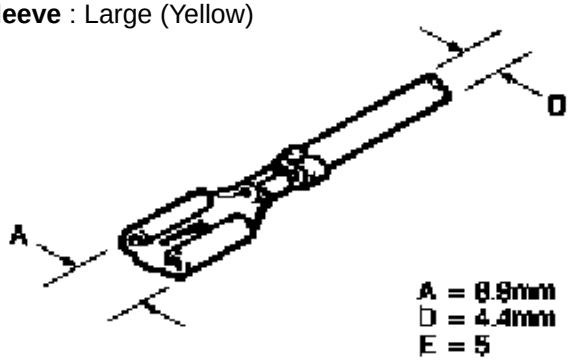
P/N	82998–12010	82998–12020
Type	7.7 Housing Lance	
	Male	Female
	Sleeve : Large (Yellow) 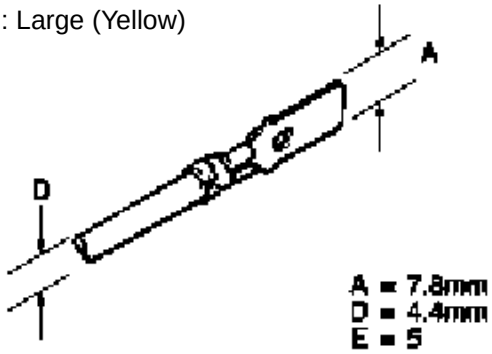	**Sleeve** : Large (Yellow) 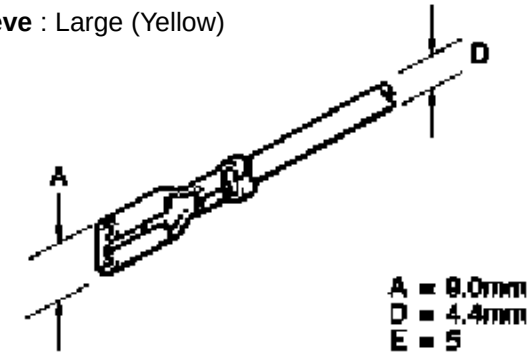
P/N	82998–12030	82998–12040

Repair Wire (Non–waterproof Type)

Type	8.0	
	Male	Female
	Sleeve : Large (Yellow) 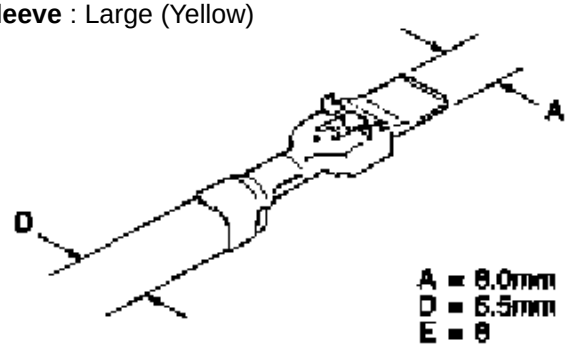 	**Sleeve** : Large (Yellow) 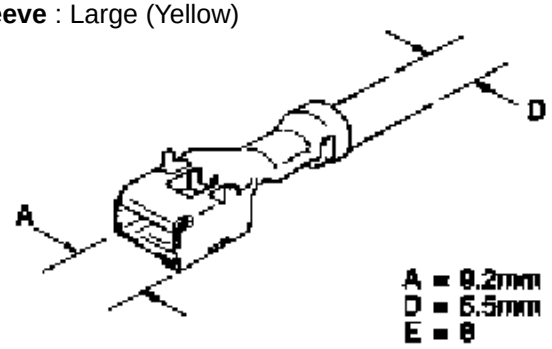
P/N	82998–12390	82998–12400
Type	BLADE FUSE	
	Male	Female
		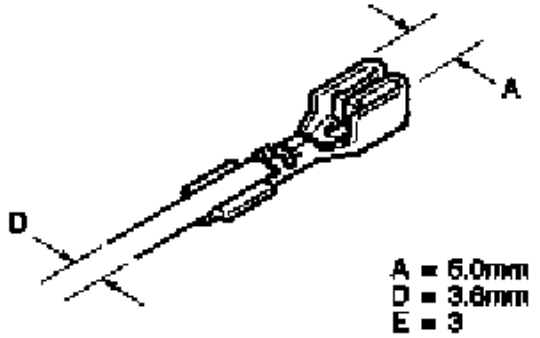
P/N		82998–12140
Type	C–Type	
	Male	Female
	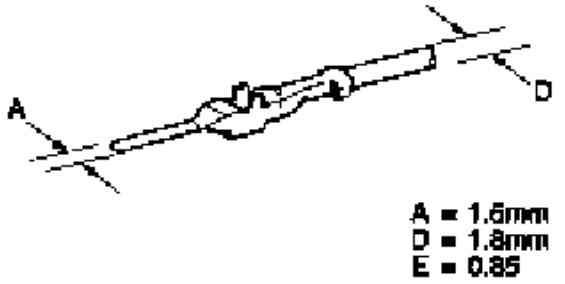 	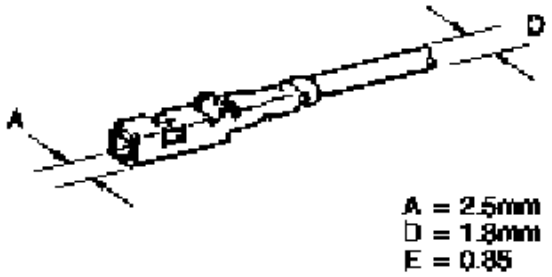
P/N	82998–12560	82998–12570

Repair Wire (Non–waterproof Type)

Type	FOG–LP	
	Male	Female
		Sleeve : Medium (Blue) or Large (Yellow) 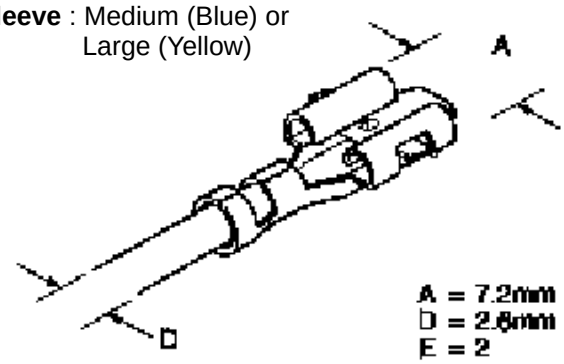
P/N		82998–24210
Type	**FTC**	
	Male	Female
		Sleeve : Medium (Blue) or Large (Yellow) 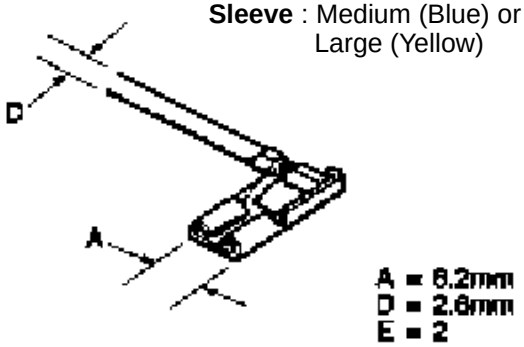
P/N		82998–12510
Type	**HEAD LAMP**	
	Male	Female
		Sleeve : Medium (Blue) or Large (Yellow) 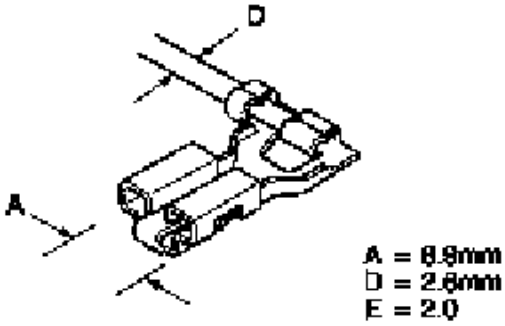
P/N		82998–24140(160mm) 82998–24200(500mm)

Repair Wire (Non–waterproof Type)

Type	LAC	
	Male	Female
	Sleeve : Medium (Blue) or Large (Yellow) 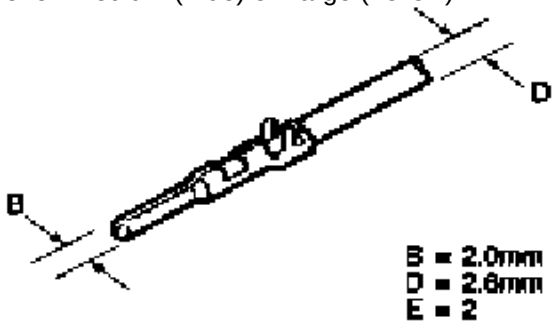 	**Sleeve** : Medium (Blue) or Large (Yellow) 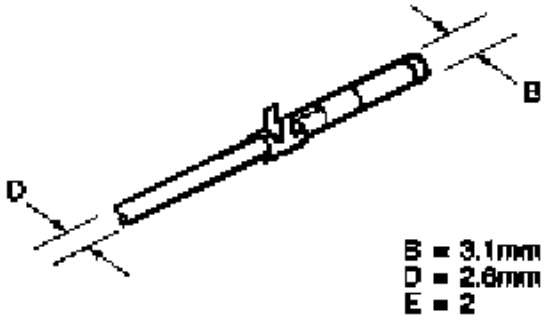
P/N	82998–12100	82998–12110
Type	MFPC	
	Male	Female
	—	**Sleeve** : Medium (Blue) 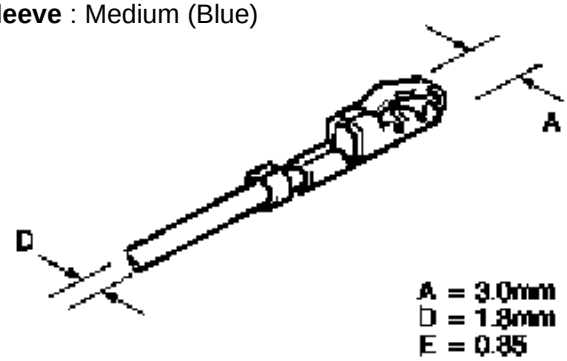
P/N		82998–12150
Type	MIC	
	Male	Female
	—	**Sleeve** : Medium (Blue) or Large (Yellow) 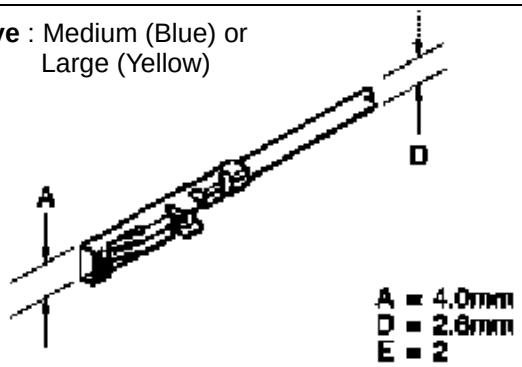
P/N		82998–12120

Repair Wire (Non–waterproof Type)

Type	PULSE LOCK	
	Female (Power)	Female (Signal)
	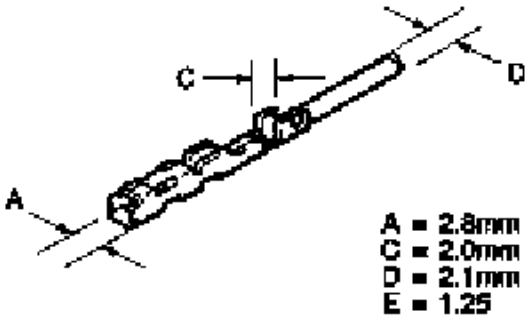	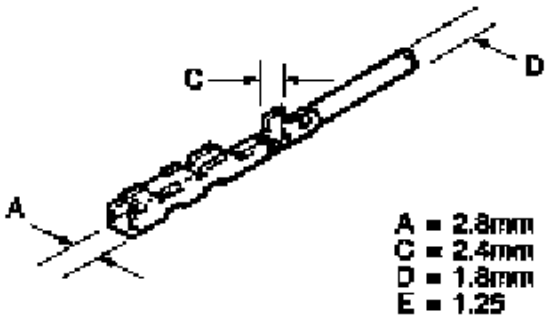
P/N	82998–12200	82998–12210
Type	SFPC	
	Male	Female
	—	**Sleeve** : Medium (Blue) 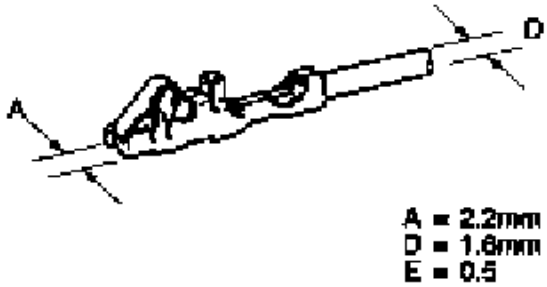
P/N		82998–24180
Type	SL	
	Male	Female
	—	**Sleeve** : Medium (Blue) or Large (Yellow) 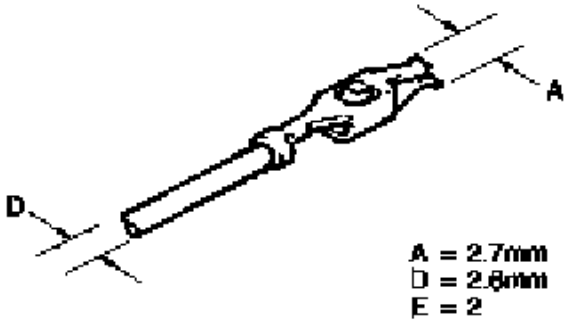
P/N		82998–12130

Repair Wire (Non–waterproof Type)

Type	SP	
	Female (Power)	Female (Signal)
	Sleeve : Medium (Blue) or Large (Yellow) 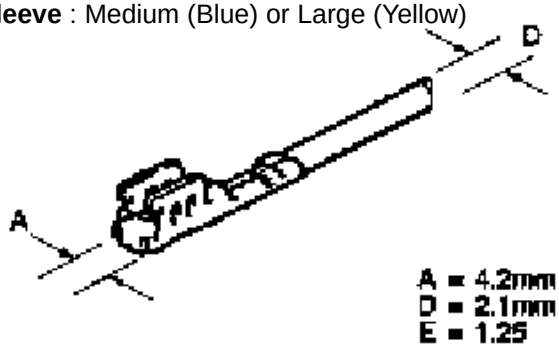 	**Sleeve** : Medium (Blue) or Large (Yellow) 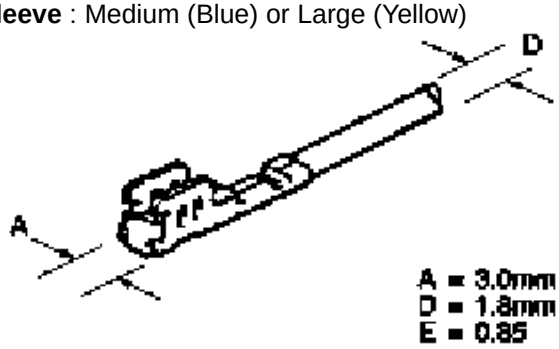
P/N	82998–12520	82998–12530
Type	TLC	
	Male	Female
	Sleeve : Medium (Blue) 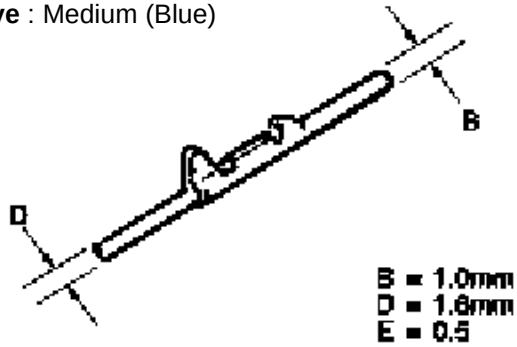 	**Sleeve** : Medium (Blue) 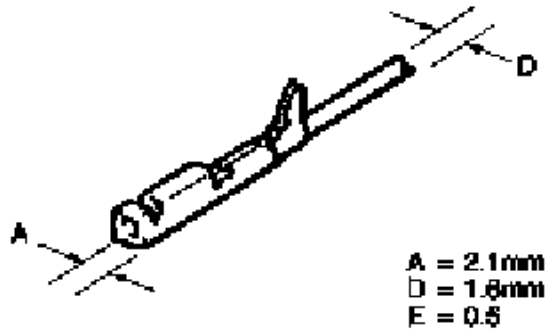
P/N	82998–12220	82998–12230
Type	TNS	
	Male	Female
	Sleeve : Medium (Blue) 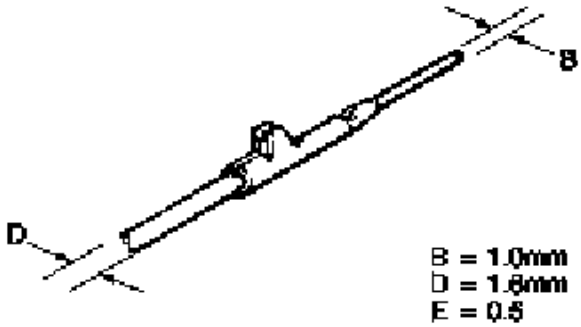 	**Sleeve** : Medium (Blue) 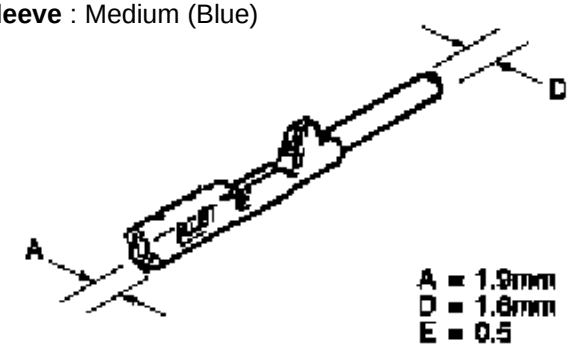
P/N	82998–12240	82998–12250

Repair Wire (Non–waterproof Type)

Type	TODC	
	Male	Female
	Sleeve : Medium (Blue) or Large (Yellow) 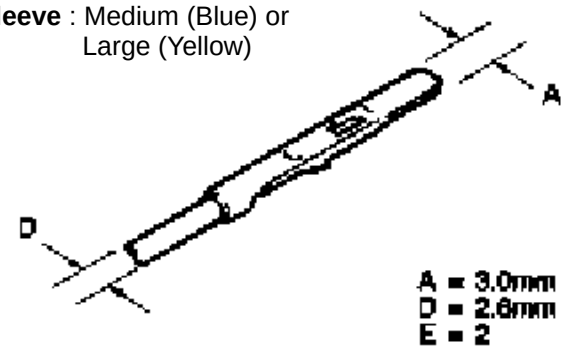 	**Sleeve** : Medium (Blue) or Large (Yellow) 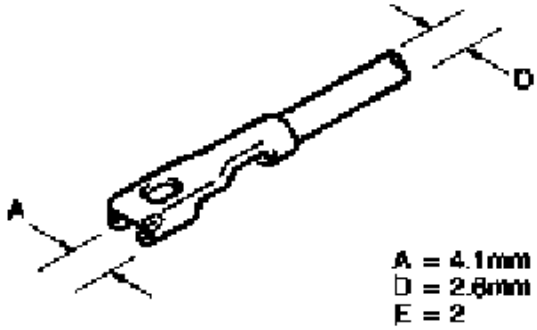
P/N	82998–12080	82998–12090

WIRE HARNESS REPAIR KIT WITH CASE (REFERENCE ONLY)

We would like to recommend to you use of the ”Wire Harness Repair Kit with the Case” according to your after service market demand.

Example:

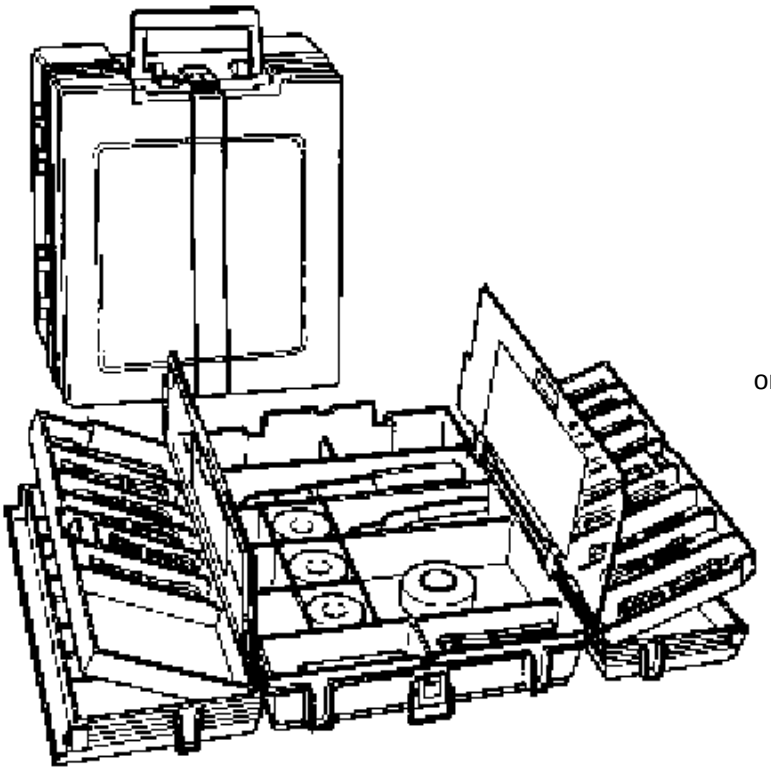

or

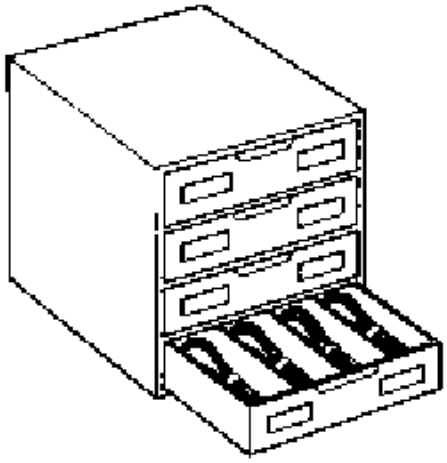

[portable type]

[stationary type]

Remark: This kind of kit is not available from Toyota Motor Corporation.

Waterproof Type [1]

(Cont. next page)

	1	2				3		4	5	6	7	8	9	10	11
1.0															
1.0 III		M:11863	F:11856												
1.3		M:11188 F:11189				M:11169 F:11170		M:11063 F:11065	M:11181 F:11182		M:11171 F:11172		M:11191 F:11192		M:11173 F:11174
								M:11064 F:11066							
1.8		F:10737						F:10711							
		F:11062													
2.3		M:10495 F:10496	M:10580	F:10609				M:10475 F:10476		M:10650					
		F:10474	M:10592	F:10532				M:10590							
		M:10575	F:10598	F:10572				M:10648							
2.3 II	M:10892 F:10893	M:10842 F:10843	M:11486 F:11019	M:11247 F:11248	F:11207	M:11015 F:11016	F:11143	M:10868 F:10869	M:11078 F:11077	M:10987 F:10988	M:10930 F:10931	M:10890 F:10891		F:11231	
	M:11006 F:11007	M:10886 F:10887	M:11029 F:11030	M:11272 F:11273	F:11235	M:11131 F:11132	F:11145	M:10941 F:10942	F:11024	M:11033 F:11034		M:10890 F:11190			
	M:11270 F:11271	M:10898 F:10899	M:11137 F:11038	F:10974	F:11246	M:11244 F:11245	F:11261	M:11027 F:11028	F:11049	M:11193 F:11194		M:10896 F:10897			
	F:11166	M:10900 F:10901	M:11050 F:11051	F:11025	F:11250	M:11295 F:11245	F:11294	M:11122 F:11037	F:11232	M:11196 F:11197					
	F:11243	M:11072 F:10923	M:11069 F:11070	F:11068	F:11255	F:10834	F:11349	M:11177 F:11178	F:11317	M:11289 F:11290					
	F:11363	M:10959 F:10947	M:11073 F:11075	F:11140	F:11285	F:10845	M:11348	M:11291 F:11292	F:11599	F:10854					
	F:11428	M:10948 F:10949	M:11074 F:11075	F:11149	F:12028	F:10902		F:10943		F:11144					
	F:11252	M:11002 F:11003	M:11141 F:11142	F:11153		F:10919		F:11150		F:11858					
		M:11004 F:11005	M:11155 F:11156	F:11154		F:10981		F:11152							
		M:11008 F:11009	M:11168 F:11162	F:11163		F:11020									

M : Male F : Female

Waterproof Type [1] (Cont'd)

	12	15	40	80											
1.0			F:11215	F:11214											
1.0 III															
1.3	F:11698	M:11088 F:11089													
1.8															
2.3															
2.3 II	M:11086 F:11087														
	F:11151														

M : Male F : Female

Waterproof Type [2]

	1	2		3		4	5	6	8	9	10	11	23	34	
4.8	M:10982 F:10983	M:10927 F:10928		M:10840 F:10841		M:10989 F:10990									
	F:11400	F:11237		M:10944 F:10841		M:11035 F:11036									
6.3	M:10246 F:10247	M:10156 F:10157		M:10347 F:10249											
7.7	M:10114 F:10115														
8.0	M:10836 F:10837	M:10838 F:10839													
	M:11183 F:11184	M:11031 F:11032													
HB3		F:11095	F:11659												
HB4		F:11096	F:11660												
PIN		M:11945													
TLC				F:10554	M:10577										
TODC	M:10240 F:10241			M:10244	F:10353										
1.0 III+4.8														F:12020	F:12021
2.3+6.3										F:10686					
2.3 II+4.8				M:11160 F:11161		M:10749 F:10844	M:10945 F:10946	F:10939	M:10894 F:10895	F:11643	F:11332	M:11239			
						F:10940	M:11021 F:11022			F:11784					
							M:11412 F:11413								
2.3 II+6.3 II													F:11195		
													F:11323		
2.3 II+8.0									M:11241 F:11242						
4.8+8.0				M:11044 F:11045		M:11138 F:11139									

M : Male F : Female

Non–waterproof Type [1]

(Cont. next page)

	1	2			3	4	5	6		7	8		9	10	11
1.0															
1.0 II															
1.0 III		M:11967 F:11919				F:11988	F:11921							F:11924	
							F:11909							F:11948	
1.3		M:11211 F:11212			M:11052 F:11053	M:11186 F:11187	F:11319	F:11616		F:11165	M:11532 F:11533	M:11623		F:11450	F:11041
		M:11368 F:11369			F:11471	F:11107					F:10630			F:11642	F:11083
		F:11436				F:11494								F:11657	
1.8															
1.8 II															
2.3		M:10437 F:10355			M:10573 F:10365	F:10504		M:10384 F:10414	F:10672					F:10322	
						F:10601								F:10669	
2.3 II	M:10870 F:10871	M:10824 F:10825	M:10905 F:10906	F:11080	M:10907 F:10908	M:10794 F:10795		M:10796 F:10797	F:10957	M:11528 F:11529	M:10798 F:10799		M:11534 F:11535	M:10800 F:10801	M:10829 F:10830
	M:11026 F:10871	M:10833 F:10825	M:10934 F:10935	F:11098	F:11071	M:10858 F:10795		M:11110 F:10797	F:10964					M:11102 F:10997	M:11538 F:11539
	M:11097 F:10871	M:11299 F:10825	M:11159 F:11148	F:11227	F:11079	M:11399 F:10795		M:11099 F:10933	F:11280					M:11536 F:11537	F:10966
	M:11146 F:11147	M:11300 F:10825	F:10823	F:11278		M:11012 F:11013		M:11101 F:10996						F:10822	
		M:10849 F:10850	F:10835	F:11608		M:11023 F:10904		M:10998 F:11001						F:10965	
		M:10859 F:10860	F:10855			M:11100 F:11090		M:11010 F:11011							
		M:11060 F:10860	F:10962			M:11085 F:10789		M:11587 F:11011							

M : Male F : Female

Non–waterproof Type [1] (Cont'd)

	12		13	14	15	16	17	18	19	20	21	22	25	28	34
1.0	F:11129					F:10764									
1.0 II	F:11408					F:11219						F:11220		F:11218	F:11221
						F:11391									
1.0 III				F:11925				F:11914				M:11962 F:11927			
				F:11911				F:11913				M:11926 F:11915			
1.3				M:11654 F:11556	F:11179	M:11573 F:11574			M:11570 F:11571		F:11125	M:11503 F:11502	M:11133 F:11055		
					F:11264							F:11628	F:11043		
1.8	F:10658	F:10973		F:10697				F:10656		F:10696					M:10722
	F:10743														
1.8 II	F:11424			F:11433											
2.3	M:10513 F:10432							M:10325 F:10326							
2.3 II	M:10802 F:10803		M:10804 F:10805	M:10806 F:10807	M:10827 F:10828	M:10808 F:10809	F:11417	M:10818 F:10819		M:10810 F:10811		M:10977 F:10875			
	M:11530 F:11531		M:11541 F:11542	F:10852		M:11167 F:10848				M:10820 F:10821		F:11552			
	F:10967		F:11604												
	F:10968														
	F:11121														
	F:11661														

M : Male F : Female

Non–waterproof Type [2]

	1	2	3	4	5	6		8	9	10	12	13	14	17	22
4.8	M:11258 F:11259	M:10915 F:10916	F:10980	M:11135 F:11136		M:10975 F:10976	F:11778	M:10963 F:10926		M:10861 F:10862					
	F:10911	M:11093 F:11094		M:11878 F:11742		F:11091		F:11092							
	F:10912					F:11583		F:11615							
								F:11686							
6.3	M:10178 F:10179	M:10213 F:10214	M:10283 F:10216			M:10172 F:10173		M:10174 F:10175		M:10176 F:10177					
	F:10619														
	F:10786														
	F:10792														
7.7		M:10356 F:10357													
8.0	M:10994 F:10995	M:10958 F:10903	F:10956	M:10866 F:10867											
		M:11655 F:11579	F:11314												
		F:11684	F:11685												
FOG–LP		F:10481													
FTC			F:10489		F:10487										
			F:10490		F:10488										
HEAD–LANP			F:10428												
LAC									F:10133			F:10132			M:10131
LC						M:10289									
MFPC				F:10645				F:10301		F:10302	F:10303		F:10369		
										F:10304	F:10372				

M : Male F : Female

Non–waterproof Type [3]

(Cont. next page)

	1	2	3	4	5	6	7	8	9	10	12	13	14	15	16
MIC				F:10378					F:10152			F:10062			
OBD II															F:11665
PULSE LOCK										F:10294	F:10351		F:10371		
SFPC										F:11116		F:11114			F:11113
												F:11115			
SL			F:10070				F:10071								
SP		F:10362			F:10376										
TLC						M:10401 F:10402				M:10719 F:10528					F:10635
TNS				M:10466 F:10467									M:10470 F:10471		
TODC	M:10182 F:10183				M:10040 F:10274				M:10044 F:10045						
1.0+1.8															
1.0 II+1.8 II													F:11225		F:11565
1.0 III+2.3 II															
1.3+2.3 II										M:11613				F:11042	
														F:11056	
2.3+6.3								F:10463							

M : Male F : Female

Non–waterproof Type [3] (Cont'd)

	17	18		20	22	23	24	25	26		32				
MIC	F:10037														
OBD II															
PULSE LOCK		F:10295					F:10296								
		F:10350													
SFPC															
SL															
SP															
TLC															
TNS					M:10552 F:10526				M:10599 F:10587						
TODC															
1.0+1.8					F:10765				F:10925	F:10918					
									F:10763						
1.0 II+1.8 II		M:11223 F:11226	M:11223 F:11224		F:11392				F:11390	F:11423	M:11222				
1.0 III+2.3 II								F:11877							
1.3+2.3 II	F:11671	F:11594		F:11469		M:10920 F:10921		M:11158 F:11058							
		F:11595		M:11504 F:11469		M:11208 F:10921									
2.3+6.3															

M : Male F : Female

Non–waterproof Type [4]

	4	5	6	8	10	11	12	14	15	16	19	20	24	26	
2.3 II+4.8	M:11126 F:11118	M:10985 F:10986		M:10876 F:10877	M:11596 F:11527	M:10872 F:10873	M:10878 F:10879	M:10812 F:10813	M:10814 F:10815	M:10884 F:10885	M:10882 F:10883	M:10816 F:10817	M:10880 F:10881	M:11631	
				F:11130	F:10993		F:10932								
				F:11279											
				F:11701											
2.3 II+8.0			M:10909 F:10910								M:10856 F:10857				
4.8+8.0		F:10888	F:10889												
6.3+7.7			F:10447												

M : Male F : Female

Terminal Packing

Type	6.3	
Cav. No.	1	3
		
P/N	90980–09210	90980–09211
Type	7.7	
Cav. No.	1	
		
P/N	90980–09380	
Type	TODC	
Cav. No.	1	3
		
P/N	90980–09378	90980–09379

Terminal Packing

Type	**2.3**	
Cav. No.	1	
	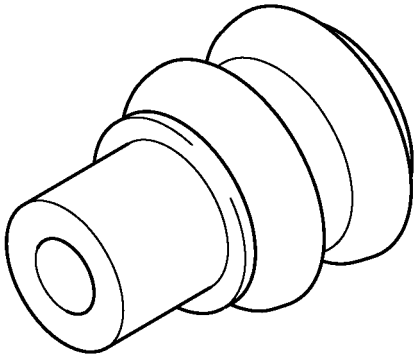	
P/N	90980–09148, 09151, 09149	
Type	**2.3II**	
Cav. No.	1	
	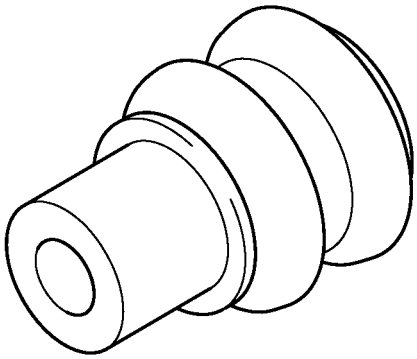	
P/N	90980–09451	
Type	**HB3, HB4**	
Cav. No.	1	
	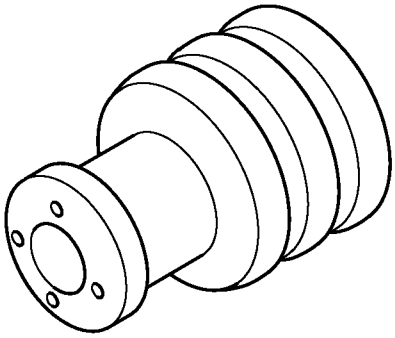	
P/N	90980–09396	

Hole Plug

Type	6.3, 7.7, TODC	4.8
	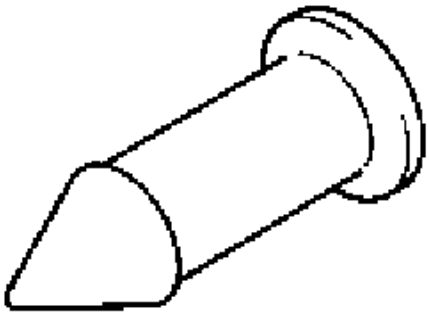	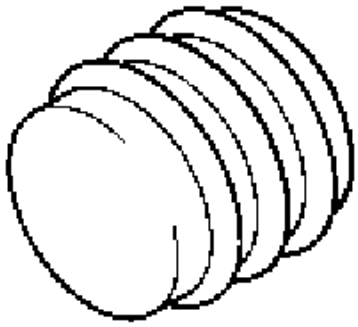
P/N	90950–01730	90980–09325
Type	8.0	2.3, 2.3II
	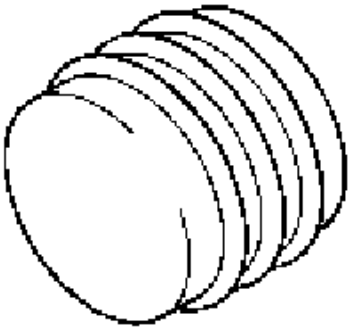	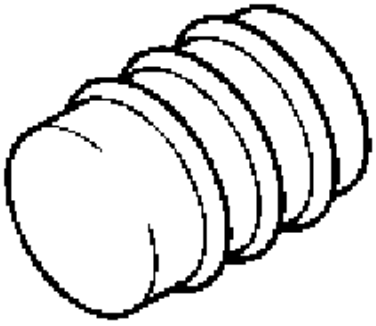
P/N	90980–09353	90980–09152
Type	TLC	1.3
		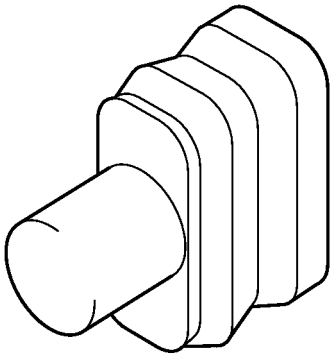
P/N	90980–09162	90980–09414

Press Sleeve

Color	YELLOW	BLUE
		
P/N	82999–12030	82999–12020
Color	RED	
		
P/N	82999–12010	