

6. Back-up Light System

A: WIRING DIAGRAM


1. BACK-UP LIGHT

<Ref. to WI-104, WIRING DIAGRAM, Back-up Light System.>

B: INSPECTION

1. BACK-UP LIGHT SWITCH (MT MODEL)


Measure the resistance between the back-up light switch terminals.

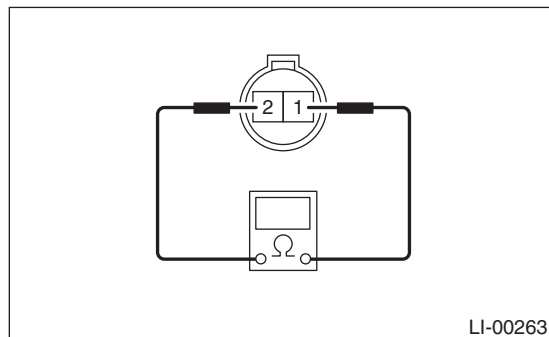

Switch position	Terminal No.	Standard
When shift lever is set in reverse position	1 and 2	Less than 1 Ω
Other positions		1 MΩ or more

2. INHIBITOR SWITCH (AT MODEL)

Measure the resistance between the inhibitor switch terminals.

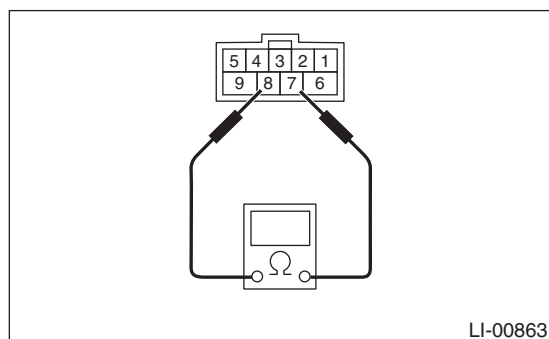

Switch position	Terminal No.	Standard
When the selector lever is in the "R" range	7 and 8	Less than 1 Ω
Other positions		1 MΩ or more