


13. Control Unit (Auto A/C Model)

A: REMOVAL

- 1) Disconnect the battery ground cable from the battery.
- 2) Remove the ornament panel. <Ref. to EI-48, ORNAMENT PANEL, REMOVAL, Center Console.>
- 3) Remove the screw and claw and disconnect the connector to detach the control unit from the ornament panel RH.

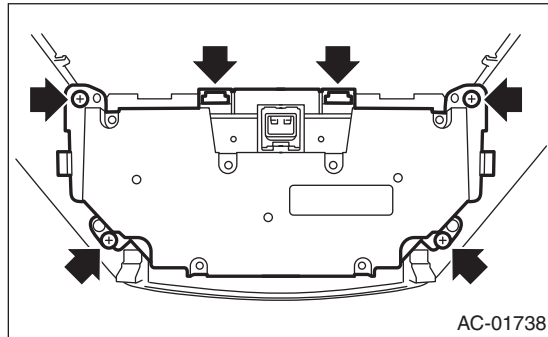

B: INSTALLATION

Install in the reverse order of removal.