


Dodge Sprinter 2005 – 2006 fuse box diagram

Fuse Assignment, Standard Equipment

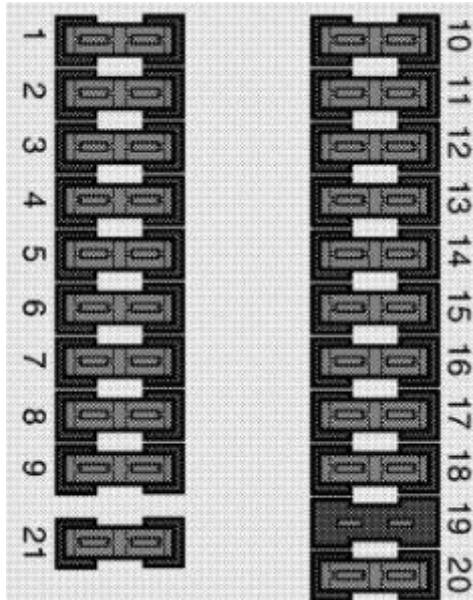


Dodge Sprinter – fuse box – fuse assignment

(standard equipment)

Number	Ampere rating [A]	Circuits
1	10	Parking lamp right, taillamp right
2	10	High beam head lamp, right
3	10	High beam head lamp, left, high beam indicator lamp
4	10	Backup lamp
5	10	Brake lamp
6	20	Windshield wiper motor

7	15	Horn, heated rear window, air recirculation switch, optional equipment relay (terminal 15)
8	20	Interior lighting, cigarette lighter, radio (terminal 30)
9	15	Clock, hazard warning lamps, parking lamps
10	10	Instrument lighting, license plate lamp daytime driving lamps
11	10	Side lamp, left; taillamp, left
12	10	Low beam headlamp, right
13	10	Low beam headlamp, left
14	15	Fog lamp
15	10	Radio (terminal 15)
16	25	Engine control unit
17	15	Engine control unit
18	15	Ignition (terminal 15)
19	15	Not in use
20	15	Heater controls (terminal 30)
21	30	Heater blower (terminal 30)

Relay Assignment, Standard Equipment

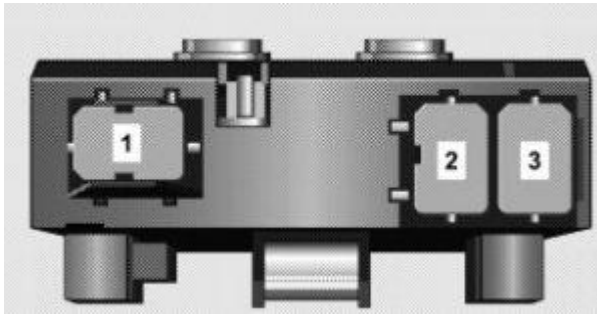


Dodge Sprinter – fuse box – relay

assignment (standard equipment)

Number	Circuits
1	Windshield wiper motor (W)
2	Diesel engine control unit (M)
3	Turn signals (B)

Fuse, Relay, and Diode Assignments – Optional Equipment

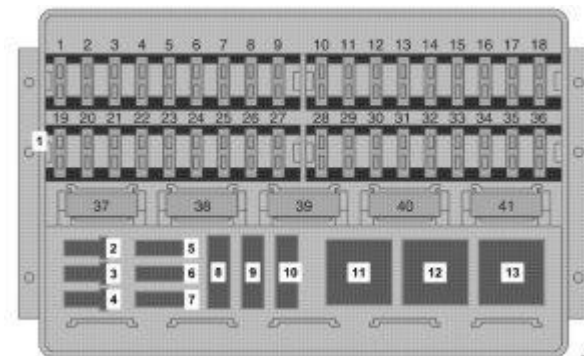

Dodge Sprinter – fuse box – fuse, relay

and diode assignment (optional equipment)

Number	Circuits
1	Not in use
2	Not in use

3	Not in use
4	Not in use

Fuses

Number	Ampere rating [A]	Circuits
5	10	Immobilizer
6	7,5	Anti-lock brake system (ABS) Electronic Stability program (ESP®)*
7	25	Anti-lock brake system (ABS) Electronic Stability program (ESP®)*
8	40	Not in use, Electronic Stability program (ESP®)*
9	40	Anti-lock brake system (ABS)
10	—	Not in use
* 2500 Type Vehicles only		

Relays

Number	Circuits
11	Not in use
12	Starter relay
13	Not in use