


Isuzu Trooper 1992 – 1994 fuse box diagram

Fuse box diagram

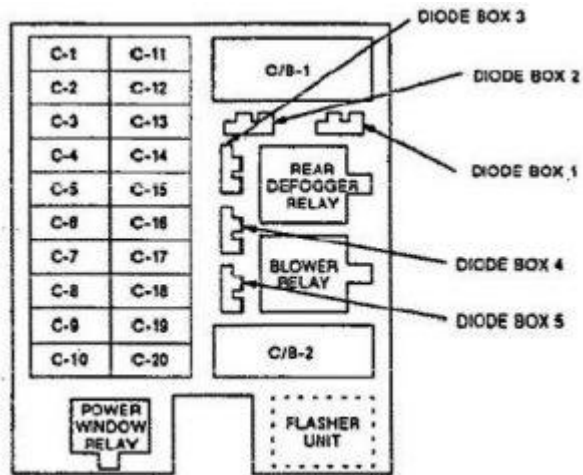

Isuzu Trooper – fuse box diagram

Number	A	Function
C-1	10	Starting system, blower controls: A/C: compressor controls
C-2	—	—
C-3	15	Back up lights; turn lights; hazard lights; cornering lights
C-4	10	Rear defogger; cruise control; power windows; electronic engine control; door mirror defogger; automatic transmission control; shift interlock system; power sunroof
C-5	15	Windshield wiper/washer
C-6	10	Rear wiper/washer
C-7	10	Headlight wiper/washer

C-8	15	Electronic engine control; charging system
C-9	15	Igniton system
C-10	7,5	Gauges: indicators
C-11	10	Sound system; power mirrors; anti-theft system
C-12	20	Cigarette lighter; anti-theft system
C-13	15	Lighting switch details
C-14	15	Brake lights; automatic transmission control; shift interlock system; rear wheel anti-lock (RWAL); brake system
C-15	15	Hazard lights; horns; anti-theft system
C-16	25	Rear defogger
C-17	7,5	Sound system; Interior lights; key-in ignition warning system; anti-theft system; auto antenna
C-18	20	Automatic door locks; anti-theft system
C-19	25	Blower controls
C-20	—	—

Circuit Breaker Number	A	Function
C/B-1	20	Power windows; power sunroof
C/B-2	—	—