

 **SUZUKI**

CULTUS



CULTUS

exceeding your expectations




VALUE ADDITION NEVER STOPS

Value addition is Suzuki's tradition. Now Cultus offers you new features and new additions. The New Cultus packed with new speedometer, remote fuel lid opener, attractive seat fabric, front indicator and new full wheel cover (VXL) gives you the ultimate driving pleasure you were looking for.

Ergonomically Designed Instrument Panel with new speedometer cluster with tachometer

The New Cultus is equipped with elegantly designed speedometer assembly with tachometer. New speedometer cluster with tachometer, panel design giving you accurate information of RPM, speed and mileage/kilometers.



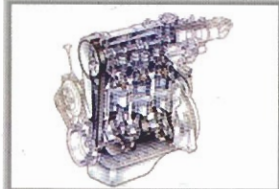

Engine

Most responsive engine in its class. Direct Acting Valve Train (DAVT), Hydraulic Lash Adjuster (HLA) for maximum power and economy.
Maximum output 55ps/5800rpm. Maximum torque 8.5 kg-m/3000 rpm.

CAD Technology for Optimum Performance

CAD (Computer Aided Design) techniques make the monocoque body light, strong and resistant to twisting.



Front indicator

The front indicator or turn signal has the crystal white colour matching with the headlights which adds style and look to the vehicle. The indicators blink in yellow ensuring traffic safety and adding attraction to the vehicle.

Remote fuel lid opener

For added convenience remote fuel lid opener is located right beside your driving seat. Now you don't have to switch off your engine and wait for the key after you had your tank filled.



Seat fabric

The new comfortable and attractive seat fabric and design coupled with matching fabric on the doortrims enhances the car's interior look and gives pleasant feeling.

Matching door mirrors (VXL)

Perfectly blends with colour of the body for a trendy look.



Full wheel cover (VXL)

New Cultus is equipped with newly designed full type wheel covers that enhance looks.



Factory fitted CNG kit

Italian CNG kit exclusively designed for CULTUS backed by Suzuki's fully warranty, keeps you more relaxed with complete peace of mind. It is also equipped with timing advance processor to ensure optimum engine performance.



Hassle-free Side-by-Side CNG/Petrol filling



Optimized cylinder capacity for longer run on CNG



CNG Regulator - An electronic control device to reduce natural gas pressure at the required level



Convenient Gas Volume Indicator and switch for changeover to CNG/Petrol

EQUIPMENT LIST

SPECIFICATIONS

VX VXR VXL

VX / VXR / VXL

COMFORT

Heater	O	O	O
Air-conditioner	X	O	O
Radio antenna	O	O	O
AM/FM Cassette Player	X	O	O
Childproof rear door locks	O	O	O

INSTRUMENT PANEL

Key/Light warning buzzer	O	O	O
Tachometer	O	O	O
Trip meter	O	O	O
Cigarette lighter	O	O	O
Cup holder	O	O	O
Locking glove box	O	O	O

INTERIOR

Power Steering*	X	X	O
Power Windows*	X	X	O
Central Door Locking*	X	X	O
Cabin light (3 position)	O	O	O
Sunvisor both sides	O	O	O
Seat belts (Front)	O	O	O
Material of front & rear seats	PVC	Fabric	Fabric
Reclining & sliding front seats	O	O	O
Separately folding rear seats	O	O	O
Floor carpet	O	O	O
Luggage compartment carpet	O	O	O
Front door pockets (both sides)	O	O	O
Door trim	PVC	partial fabric	partial fabric
Centre console	O	O	O
Assist grips	3	3	3
Remote back door opener	O	O	O
Remote fuel lid opener	O	O	O

EXTERIOR

Green tinted glass	O	O	O
Semi-concealed 2 speed intermittent wipers	O	O	O
Rear window defogger	X	O	O
Side protective mouldings	X	O	O
Wheel covers	Centre cap	Full	Full
Coloured bumpers	X	O	O
Coloured Door Mirrors*	X	X	O
Golden Emblems*	X	X	O

* Value added features of VXL

DIMENSIONS

Overall length (mm)	3845
Overall width (mm)	1590
Overall height (mm)	1380
Wheelbase (mm)	2365
Tread Front (mm)	1365
Tread Rear (mm)	1340
Min. turning radius (m)	4.8
Ground clearance (mm)	170

ENGINE

Type	G10B Water-cooled Four Stroke SOHC with Hydraulic Valve Lash Adjuster
Cylinders	In-line 3
Piston displacement (cc)	993
Bore x stroke (mm)	74.0 x 77.0
Compression ratio	9.5 : 1
Max. output (ps/rpm)	55/5800
Max. torque (Kg-m)/rpm	8.5/3000
Fuel distribution	Carburetor

TRANSMISSION

Type	5-speed All synchromesh
------	-------------------------

CHASSIS

Suspension (Front)	Macpherson strut, coil spring independent
Suspension (Rear)	Strut, coil spring independent
Brakes front	Disc
Brakes rear	Drum
Steering	Rack & pinion
Tyre size (Radial)	155/80R 13 78S

CAPACITY


Fuel tank	40 L
Gas Cylinder (CNG)	55 L

Specifications subject to change without prior notice.

O= Available

X= Not Available

Dealer:

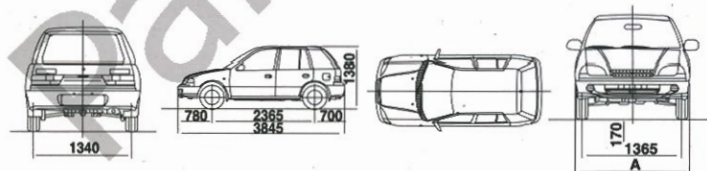

Marketing Division Karachi:

DSU-13, Pak Steel Industrial Estate,
Bin Qasim, Karachi.

Tel : 4750788-95, 4750287,

Fax : 4750101-3

e-mail : marketing@paksuzuki.com.pk

Rawalpindi Area Office:

20, Services Plaza,
Rawalpindi Club Bldg.,
The Mall, Rawalpindi.

Tel: 5567518

Fax: 5585738

Lahore Area Office:

Bungalow No. 2/L,
Gulberg-II, Lahore.

Tel: 5756002-5759008

Fax: 5751953.

