Owner's Manual
for Vehicle

# Contents
# A - Z

CarManuals2.com

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com

**745i**
**745Li**

**760Li**

Congratulations, and thank you for choosing a BMW.

Thorough familiarity with your vehicle will provide you with enhanced control and security when you drive it. We therefore have this request:

Please take the time to read this Owner's Manual and familiarize yourself with the information that we have compiled for you before starting off in your new vehicle. It contains important data and instructions intended to assist you in gaining maximum use and satisfaction from your BMW's unique range of technical features. The manual also contains information on maintenance designed to enhance operating safety and contribute to maintaining the value of your BMW throughout an extended service life.

CarManuals2.com

This Owner's Manual should be considered a permanent part of this vehicle. It should stay with the vehicle when sold to provide the next owner with important operating, safety and maintenance information.

This manual is supplemented by a Service and Warranty Information Booklet for US models or a Warranty and Service Guide Booklet for Canadian models.
We wish you an enjoyable driving experience.

BMW AG

BMW recommends Castrol

# Contents


## Notes
6 Using this Owner's Manual
6 Symbols used
7 The individual vehicle
7 Editorial notice
8 For your own safety
9 Service and warranty
9 Reporting safety defects

## Cockpit
12 Driver's side – controls and displays
16 Comfort and convenience – controls and displays
18 Buttons in steering wheel

## Control Center
19 The concept
19 Controller
19 Control Display
20 Symbols and lists
22 Menus in Control Display
23 Assistance window
24 Top and bottom status lines
24 Control Center in rear

## Voice command
26 Voice command system
26 Voice commands
28 Notices
28 The notebook
29 Short commands

## Opening and closing
34 Key/remote control
35 Central locking system
35 Opening and closing – from outside
37 Opening and closing – from inside
38 Doors
38 Luggage compartment lid
40 Luggage compartment
41 Alarm system
42 Electric power windows
43 Sliding/tilt sunroof

## Adjustments
45 Sit safely
45 Seats
47 Head restraints
50 Safety belts
51 Heated seats
51 Active seat ventilation
52 Active seat
52 Mirrors
53 Steering wheel adjustment
54 Seat, mirror and steering wheel memory
55 Airbags
57 Transporting children safely
59 LATCH child-restraint system
59 Child-safety locks
60 Vehicle Memory, Key Memory

## Driving
61 Ignition lock
62 Starting the engine
62 Switching off the engine
62 Parking brake
67 Automatic transmission with L mode
69 Automatic transmission with Steptronic


© 2002 Bayerische Motoren Werke Aktiengesellschaft
Munich, Germany
Reprinting, including excerpts, only with the written consent of BMW AG, Munich.
Order No. 01 41 0 157 197
US English XII/2002, 6 096
Printed in Germany
Printed on environmentally friendly paper – bleached without chlorine, suitable for recycling.

CarManuals2.com

71 Turn signal indicators/headlamp flasher
72 Wiper system
73 Washer fluid
73 Programmable cruise control
75 Active cruise control
CarManuals2.com

## Everything under control

82 Odometer, outside temperature display, clock
82 Tachometer
83 Service Interval Display
85 Check Control
86 Computer
91 Changing settings

## Technology for comfort, convenience and safety

93 PDC Park Distance Control
94 Driving stability control/ DSC Dynamic Stability Control
96 Driving stability control/ABS Antilock Braking System
97 Dynamic Drive
97 EDC Electronic Damping Control
98 Flat Tire Monitor
99 TPM Tire Pressure Monitor
101 Self-leveling suspension
101 Adaptive brake lamp

## Lamps

102 Parking lamps/low beams
103 Instrument lighting
103 High beams/standing lamps
103 Front fog lamps
103 Interior lamps

## A congenial climate

105 Automatic climate control
111 Rear air conditioner
112 Parked-car ventilation system

## Practical interior accessories

114 Integrated universal remote control
115 Sun blinds
116 Rear cooler
117 Glove compartment
117 Storage compartments
118 Beverage holders
118 Ashtray, front
119 Cigarette lighter, front
119 Power socket
119 Ashtray, rear
119 Cigarette lighter, rear
120 Center armrest
120 Ski bag

## Things to remember when driving

124 Break-in procedures
124 General driving notes
125 Brake system
126 Cargo loading
127 Roof-mounted luggage rack
127 Entry/pass tags

## Navigation

130 GPS
130 Map CD
131 Starting the navigation system
131 Display in assistance window
131 Selection options
132 Destination entry
132 Manual entry of destination address
134 Selecting the town or city and the street from the directory
134 Map-guided destination selection
135 Selecting destination in "Information"
135 Selecting interesting destinations
136 Recent destinations
136 Destination list
137 Selecting route
137 Starting the destination guidance system
138 Displaying route
139 Selecting new route
139 Voice guidance
140 Terminating/interrupting active destination guidance
140 Address book
142 Location
142 Wordmatch principle
143 What to do if ...

Contents


## Entertainment
146 Controls
146 Care instructions
147 Switching on/off
147 Using with ignition off
147 Volume adjustment
147 Tone control

## Radio
149 Starting
149 Stopping
149 Selecting frequency band
150 Selecting a station
150 Storing and retrieving a station
151 Weather Band

## CD Compact Disc
153 Starting
153 Stopping
154 Searching for music tracks in the Control Display
154 Using the buttons to search for music tracks

## CD changer
156 Starting
156 Stopping
156 Status displays
157 Searching for music tracks in the Control Display
157 Using the buttons to search for music tracks

## Cassette
158 Starting
158 Stopping
158 Selecting side A or B
158 Switching "Booktape" on/off
158 Noise suppression
159 Searching for music tracks

## TV
160 Starting
160 Stopping
160 Storing programs
160 Selecting programs
161 Adjusting the picture
161 Selecting standard

## DVD changer
164 Care instructions
164 Starting
164 Stopping
164 Status displays
164 DVD control
165 Selecting a track
166 Chapter search
166 Adjusting picture
166 Freezing frame
166 Selecting picture format
166 Selecting language, subtitles and viewing angle
167 Opening DVD-specific menu

## Using the phone in your vehicle
170 Safety notice
171 Care instructions
171 Controls
172 Telephone keypad, folding
173 Hands-free system
173 Making an SOS call
174 Telephoning with the car phone
174 Using the BMW portable phone
174 Getting started
175 Telephone directory
176 Selecting a number from the Top 8 list
176 Redialing
176 Missed calls

## BMW Assist
178 Requirements
178 Roadside Assistance of the BMW Group

## Refueling
182 Fuel filler door
183 Fuel specifications

## Wheels and tires
184 Tire inflation pressure
186 Tire condition
186 Tire replacement
187 Wheel and tire combinations


CarManuals2.com

188 Special characteristics of winter tires
188 Snow chains

## Under the hood
189 Hood
190 Engine compartment
190 Engine oil
191 Coolant
192 Brake fluid
192 Brake hydraulic systems

## Maintenance
193 The BMW Maintenance System
193 Care

## Rules and regulations
194 California Proposition 65 Warning
194 OBD connector

## Replacing components
195 Onboard tool kit
195 Windshield wiper blades
195 Lamps and bulbs
197 Changing a tire
200 Battery
201 Fuses

## Giving and receiving assistance
202 Warning triangle
202 First-aid kit
202 Jump-starting
203 Towing

## Technical data
208 Engine specifications
209 Dimensions
210 Weights
211 Capacities

## Everything from A to Z
212 Contents

CarManuals2.com

# Notes

## Using this Owner's Manual

CarManuals2.com

In compiling this Owner's Manual we have made every effort to furnish you with a convenient reference source affording quick access to all the essentials. The fastest way to find detailed information on any specific subject is to turn to the comprehensive index at the back of the manual. For a brief initial overview, please refer to the first chapter.

Should the day come when you decide to sell your BMW, please remember to make certain that the new owner receives this manual; it is an important part of the vehicle.

If you have any additional questions, your BMW center will be glad to advise you.

## Symbols used

Indicates precautions that must be followed precisely in order to avoid the possibility of personal injury and serious damage to the vehicle.

◀ Marks the end of a specific item of information.

Contains information that will assist you in gaining the optimum benefit from your vehicle and enable you to care more effectively for your vehicle.

Refers to measures that can be taken to help protect the environment.

* Indicates special equipment, country-specific equipment and optional extras when available.

"..." Identifies Control Display texts used to select individual functions.

These sections contain information on using the voice command system.

›...‹ Verbal instructions to use with the voice command system.

››...‹‹ Identifies the answers generated by the voice command system.

Identifies systems or components which can be activated or adapted to suit an individual driver's requirements – Vehicle Memory, Key Memory. Refer to page 60.
Activation and adjustments on some of these systems can be performed at your BMW center.

### Symbols on vehicle components

Indicates that you should consult the relevant section of this Owner's Manual for information on a particular part or assembly.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## The individual vehicle

On purchasing your BMW, you have decided in favor of a model with individualized equipment and features. This Owner's Manual describes the entire array of options and equipment available with a specific BMW model.

Please bear in mind that the manual may contain information on accessories and equipment that you have not specified for your own vehicle. Sections describing options and special equipment are marked by asterisks * to assist you in identifying possible differences between the descriptions in this manual and your own vehicle's equipment.

Should your BMW be equipped with features or accessories not described in this manual, please consult the enclosed supplementary manual(s).

## Editorial notice

BMW pursues a policy of continuous, ongoing development that is conceived to ensure that our vehicles continue to embody the highest quality and safety standards combined with advanced, state-of-the-art technology. For this reason, it is possible that the features described in this Owner's Manual could differ from those on your vehicle. Nor can errors and omissions be entirely ruled out. You are therefore asked to appreciate that no legal claims can be entertained on the basis of the data, illustrations or descriptions in this Owner's Manual.

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## For your own safety

Use unleaded gasoline only. Fuels containing up to and including 10% ethanol or other oxygenates with up to 2.8% oxygen by weight – that is, 15% MTBE or 3% methanol plus an equivalent amount of co-solvent – will not void the applicable warranties with respect to defects in materials or workmanship. Field experience has indicated significant differences in fuel quality – volatility, composition, additives, etc. – among gasolines offered for sale in the United States and Canada. The use of poor-quality fuels may result in driveability, starting and stalling problems especially under certain environmental conditions such as high ambient temperature and high altitude.
Should you encounter driveability problems which you suspect could be related to the fuel you are using, we recommend that you respond by switching to a recognized high-quality brand.
Failure to comply with these recommendations may result in unscheduled maintenance.
Follow the relevant safety rules when you are handling gasoline.◀

### Important safety information

For your own safety, use genuine parts and accessories approved by BMW.
When you purchase accessories tested and approved by BMW and Original BMW Parts, you simultaneously acquire the assurance that they have been thoroughly tested by BMW to ensure optimum performance when installed on your vehicle.
BMW warrants these parts to be free from defects in material and workmanship.
BMW will not accept any liability for damage resulting from installation of parts and accessories not approved by BMW.
BMW cannot test every product made by other manufacturers to verify if it can be used on a BMW safely and without risk to either the vehicle, its operation, or its occupants.
Original BMW Parts, BMW Accessories and other products approved by BMW, together with professional advice on using these items, are available from all BMW centers.
Installation and operation of non-BMW approved accessories such as alarms, radios, amplifiers, radar detectors, wheels, suspension components, brake dust shields, telephones – including operation of any mobile phone from within the vehicle without using an externally mounted antenna – or transceiver equipment, for instance, CBs, walkie-talkie, ham radio or similar accessories, may cause extensive damage to the vehicle, compromise its safety, interfere with the vehicle's electrical system or affect the validity of the BMW Limited Warranty. See your BMW center for additional information.◀

Maintenance, replacement, or repair of the emission control devices and systems may be performed by any automotive repair establishment or individual using any certified automotive part.◀

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Service and warranty

We recommend that you read this publication thoroughly.

Your BMW is covered by the following warranties:

– New Vehicle Limited Warranty

– Rust Perforation Limited Warranty

– Federal Emissions System Defect Warranty

– Federal Emissions Performance Warranty

– California Emission Control System Limited Warranty

Detailed information about these warranties is listed in the Service and Warranty Information Booklet for US models or in the Warranty and Service Guide Booklet for Canadian models.

## Reporting safety defects

The following only applies to vehicles owned and operated in the US.

If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration (NHTSA) in addition to notifying BMW of North America, LLC, P.O. Box 1227, Westwood, New Jersey 07675-1227, Telephone (800) 831-1117.

If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer, or BMW of North America, LLC.

To contact NHTSA, you may either call the Auto Safety Hotline toll-free at 1-800-424-9393 (or 366-0123 in Washington, D.C. area) or write to: NHTSA, U.S. Department of Transportation, Washington, D.C. 20590. You can also obtain other information about motor vehicle safety from the Hotline.

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# At a glance

This overview of buttons, switches and displays is intended to serve as a source of orientation in your vehicle's operating environment. The section will also assist you in becoming acquainted with the control concepts and options available for operating the various systems.

CarManuals2.com

# Cockpit

## Driver's side – controls and displays

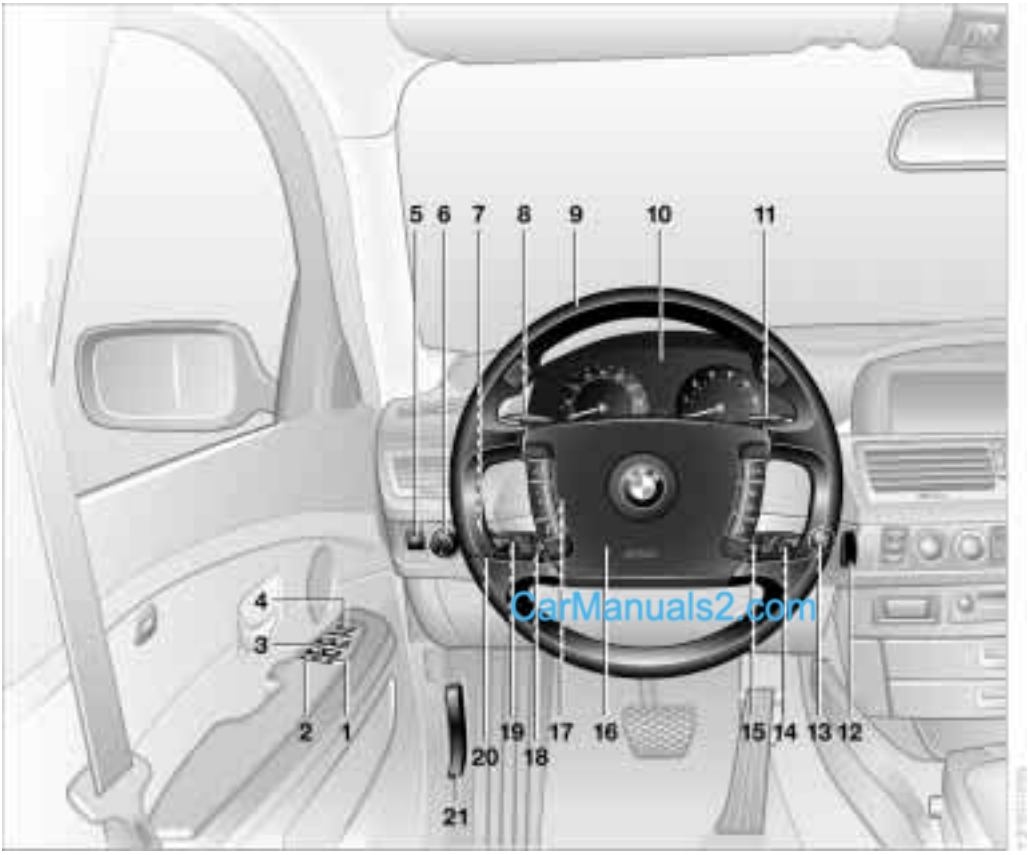


1 Rear window sun blind 115
2 Rear window safety switch 43
3 Electric power windows 42
4 Exterior mirrors 52
5 Parking brake 62
6 Parking lamps and low beams 102
7 Instrument lighting 103
8 Turn signal indicators 71
High beams/headlamp flasher 103



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Computer 86,
Check Control 85

Computer 86

Standing lamps 103

**9** Steering wheel 18

**10** Info Display 14

**11** Automatic transmission lever 67

**12** Ignition lock 61

**13** Switching ignition on/off and starting the engine 61, 62

**14** Windshield wipers 72

Rain sensor 72

**15** PDC Park Distance Control 93

**16** Horn: the entire surface

**17** Steering wheel heater 53

Steering wheel adjustment 53

**18** Unlocking luggage compartment 39

**19** Programmable cruise control 73

**20** Fog lamps 103

Front fog lamps

**21** Opening the hood 189

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Info Display

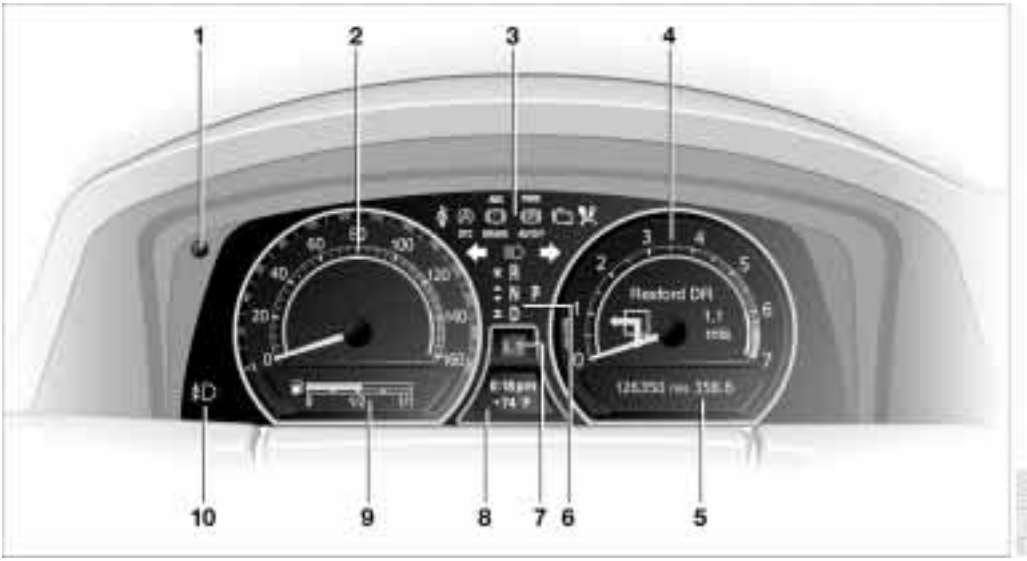


**1** To view odometer display and reset trip odometer to zero 82

**2** Speedometer with display for

- ▷ Programmable cruise control 73
- ▷ Speed limit 89

**3** Indicator and warning lamps 15

**4** Tachometer 82
with navigation system guidance display 138

**5** Display panel for

- ▷ Computer 86

or

- ▷ Check Control text messages 85

or

- ▷ Voice command system 26

**6** Transmission range selection 67

**7** Display panel for

- ▷ Automatic transmission program display 67

**8** Indicator for

- ▷ Clock 91
- ▷ Outside temperature 82

or

- ▷ Indicator and warning lamps 85

**9** Fuel gauge and computer 87, 86

**10** Fog lamps 103

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Indicator and warning lamps

### Technology that monitors itself

The indicator and warning lamps identified by the ● symbol are subjected to an operation check each time you switch on the ignition or start the engine. They each light up once for different periods of time.

When a malfunction occurs in a monitored system, the corresponding lamp will either fail to go out when the engine is started, or it will come on again during normal driving. For information on how you should respond when this happens, please refer to the pages indicated.

Please fasten safety belts ● 50

DSC Dynamic Stability Control ● 95

DTC Dynamic Traction Control 95

ABS Antilock Braking System ● 96

Parking brake/Brake hydraulic systems/DBC Dynamic Brake Control ● 62/ 192/ 96

Parking brake/Brake hydraulic systems/DBC Dynamic Brake Control for Canadian models.

Parking brake ● 62, 65

Parking brake 62, 65

Automatic parking brake – Automatic Hold ● 63, 65

Engine ● 194

Airbags ● 57

CarManuals2.com

Turn signal indicators 71

High beams/headlamp flasher 103

Front fog lamps 103

### Colors

The indicator and warning lamps can light up in different colors and combinations. The following section explains the significance of the individual colors as well as how you should respond when they appear.

- ▷ Red:
  Stop the vehicle immediately
  or
  an important reminder
- ▷ Red and yellow:
  Continue to drive; drive cautiously
- ▷ Yellow:
  Have the system inspected at the earliest opportunity
  or
  for your information
- ▷ Green:
  For your information
- ▷ Blue:
  For your information.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Comfort and convenience – controls and displays

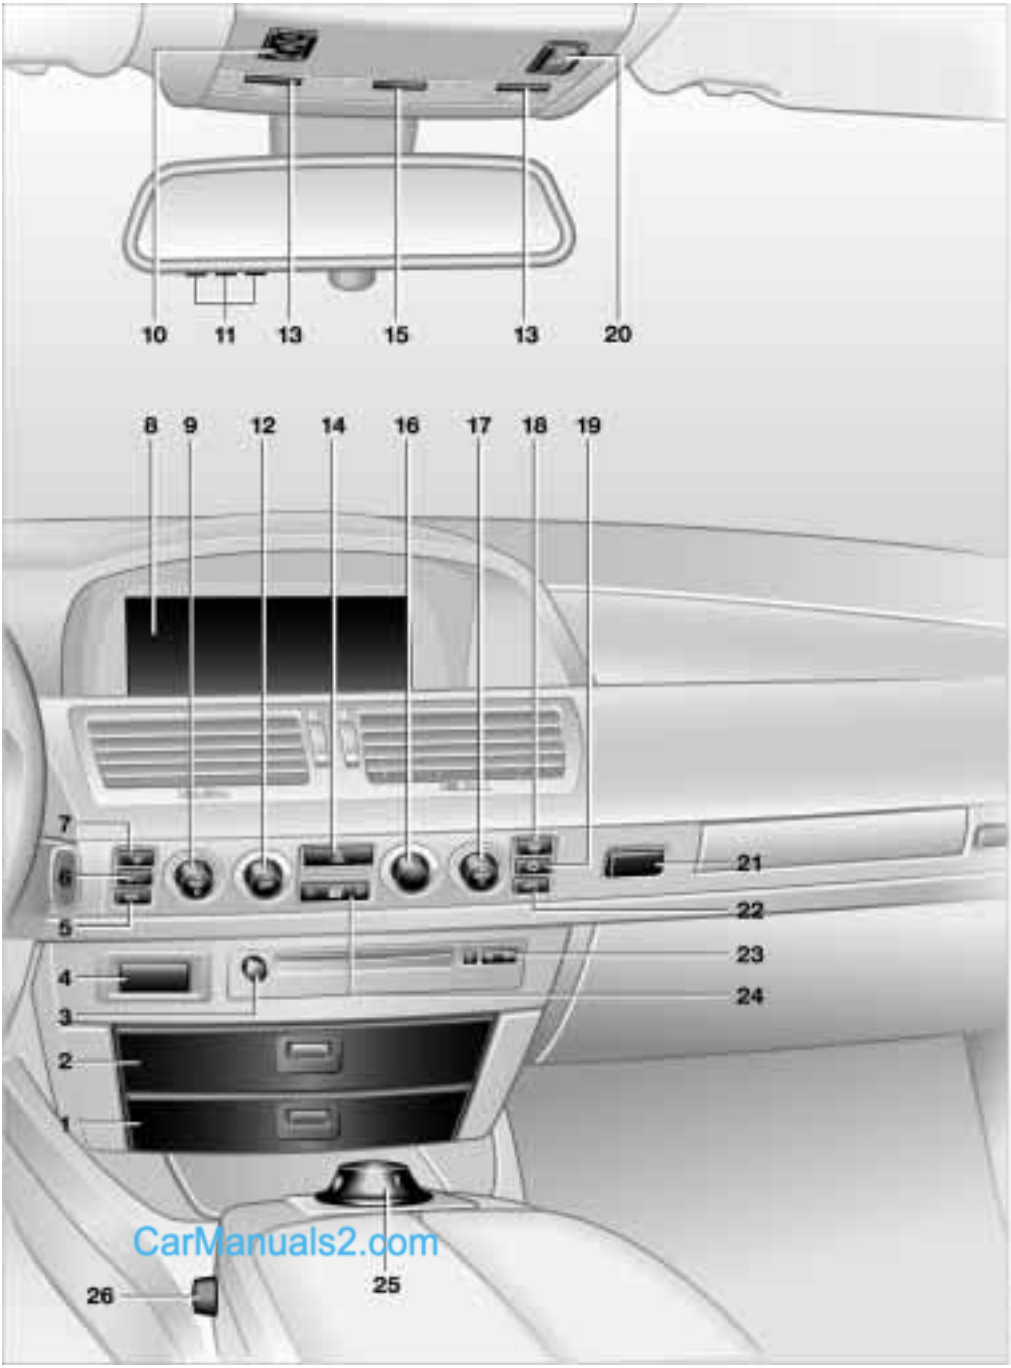


CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

1 Glasses compartment 118
2 Storage compartment 118
3 Switching audio and video sources on/off and adjusting volume 147
4 Telephone keypad, folding 172
5 Automatic air distribution and air supply – left-hand side of passenger compartment 107
6 Outside air/AUC Automatic recirculated-air control/Recirculated air 107
7 To defrost windshield and windows and remove condensation 107
8 Control Display 19
9 Temperature on left-hand side of passenger compartment – turn and maximum cooling – press 107
10 Sliding/tilt sunroof 43
11 Channel keys for Universal Garage Door Opener 114
12 Air supply on left-hand side of passenger compartment – turn and switch off automatic climate control – press 107, 109
13 Reading lamps 104
14 Hazard warning flashers
15 Interior lamps 103
16 Air supply on right-hand side of passenger compartment 106
17 Temperature on right-hand side of passenger compartment – turn and residual heat mode – press 107, 108
18 Rear window defroster
19 Air conditioning 107
20 Trigger emergency SOS call 173
21 Open the glove compartment
22 Automatic air distribution and air supply – right-hand side of passenger compartment 109
23 Station/track search and CD, DVD 146
24 Central locking system 37
25 Controller 19
26 Seat adjustment 45

Heated seats 51

Active seat ventilation 51

BMW active seat 52

Seat, mirror and steering wheel memory 54

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Buttons in steering wheel

Buttons are integrated in the steering wheel for fast operation of the following functions without being distracted from driving:

- the automatic transmission's L mode
- selected audio source functions
- selected portable phone functions
- the voice command system
- selected TV and DVD functions.

The buttons in the steering wheel are only operational when the corresponding systems are switched on.◀

Portable phone:
Receive an incoming call, initiate dialing and end a call

Volume

Voice command system:
To switch on and off

Fast forward/reverse:

- Radio
  Press briefly: next stored station
  Extended pressure: automatic tuning
- CD
  Press briefly: track search
  Extended pressure: fast forward within track
- Cassette
  Press briefly: stop track search or fast forward
  Extended pressure: fast forward
- DVD
  Chapter search

Available for individual programming:

In the "Settings" menu, you can select the function of the button at the "MFL" menu item, refer to page 53.

L mode:
Press briefly to switch between the automatic program and the L mode, refer to page 68.

Steptronic:
Press briefly to proceed through a selection sequence consisting of the automatic program, the Sport program and the manual mode, refer to page 69.

CarManuals2.com

Steptronic: Upshifting and downshifting, refer to page 69.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Control Center

## The concept

The Control Center has been designed to avoid the unnecessary complexity created by an extended number of switches and controls. It consists of the controller and the Control Display.

CarManuals2.com

The controller is used to select the functions that will appear in the Control Display. In addition, the Control Display also shows you messages from the Check Control.

## Controller

You can slide, turn and press the controller to enter commands. You can use it for all of the functions in the Control Display.

To avoid posing an unnecessary hazard, both to your own vehicle's occupants and to other road users: never attempt to use the controls or make adjustments unless traffic and road conditions allow.◀

The following introduction illustrates how easy it is to use the Control Center.

You can find detailed instructions describing how to use the individual systems in the separate sections.

## Control Display

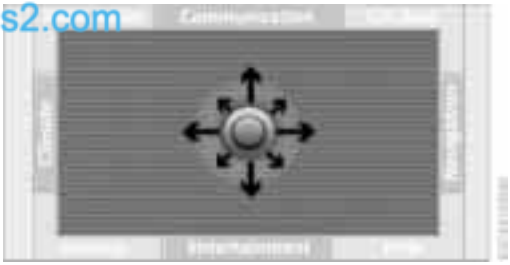

An orientation menu is available for selection. Slide the controller

- ▷ toward the currently active menu
- ▷ twice in one direction.

### Selecting menu

Slide the controller to select a menu, here: "Settings".

The menu appears on the screen as soon as you release the controller.

You can move directly to a different menu by sliding the controller.◀





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Selecting menu entries

Turn the controller to select the menu entry, here: "Clock".

## Confirming selection or entry

Press the controller to make a selection, here: "Clock".

Select the desired adjustment option within the menu item and confirm, here: "Time".

CarManuals2.com

## Settings

The first setting option for time is activated.

▷ Turn the controller to select your setting

▷ Press the controller to confirm the new setting – store – and to proceed to the next highlighted position to adjust.

## Changing menu page

You can select individual pages in specific menus, here: "Climate".

Select the symbol and press the controller:

- To select the second page of the menu.
- To return to the first page of the menu.

# Symbols and lists

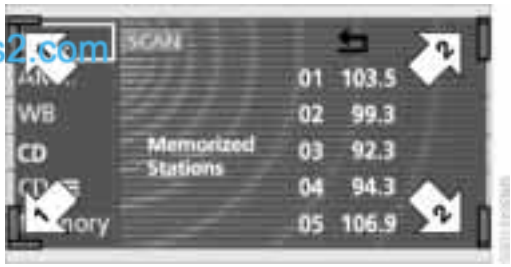


The symbols in the corners and edges of the Control Display have various functions:

**1** Corner symbols:
These symbols take you to the next menu item or in a displayed list.
To do so: turn the controller

**2** List symbols:
Indicates that you can only move within the displayed list, here: stored radio stations.
Turn the controller to select an entry from the list.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

To exit from the list, select the symbol and confirm.

## Symbols

To select the second page

To return to the first page

To exit from the list

To transfer the current display to the assistance window. For more detailed information on the assistance window, refer to page 23

To transmit vehicle data to the BMW Service Center

To set display units and formats, refer to page 91

To change the language of the display texts, refer to page 91

To select settings for vehicle functions

To set the brightness of the screen, refer to page 92

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Menus in Control Display

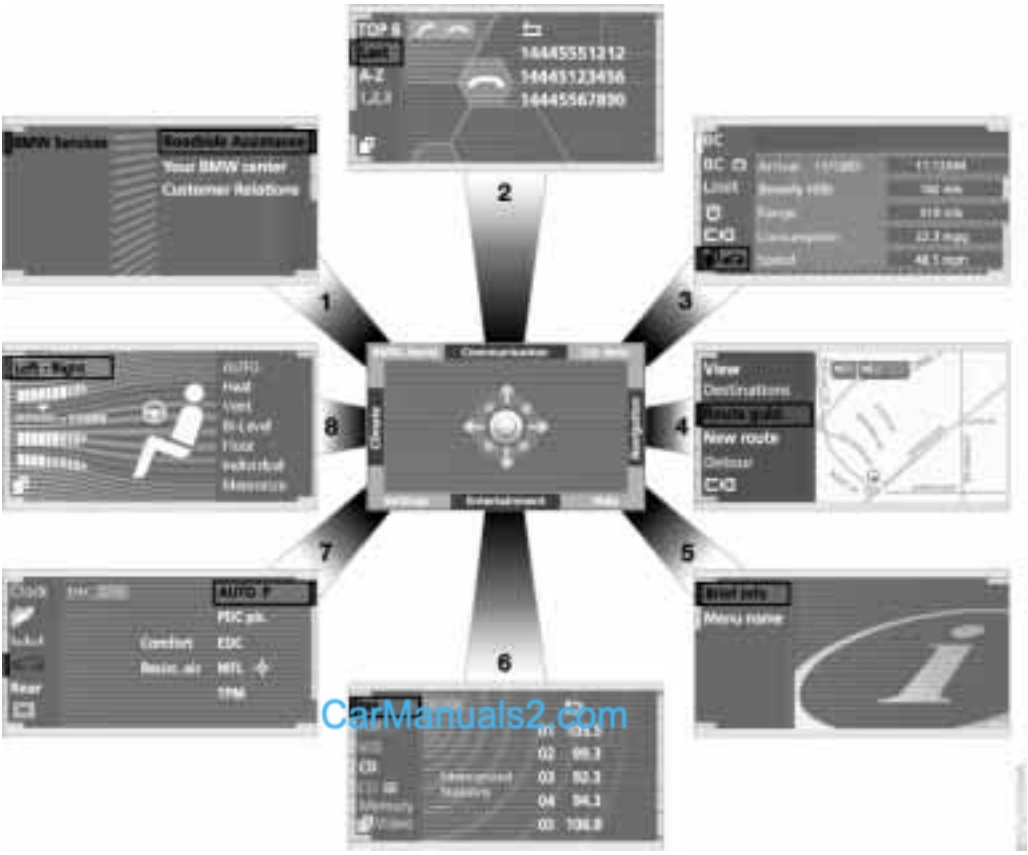


You can select from an extended range of functions and setting options:

**1** BMW Assist 178

**2** Communication

- ▷ To use the portable phone 170
- ▷ Portable phone, refer to separate Owner's Manual

**3** Car data

- ▷ Computer 86
- ▷ Limit 89
- ▷ Stopwatch 90
- ▷ Service Interval Display 83
- ▷ To access Check Control messages 85

**4** Navigation 130

**5** Help

- ▷ Brief help text displays 23
- ▷ Menu name for menu change

**6** Entertainment

- ▷ Radio 149
- ▷ Cassette 158
- ▷ CD 153 155
- ▷ TV 160
- ▷ DVD 162

**7** Settings

- ▷ Vehicle functions 53, 64, 93
- ▷ Time and date 91
- ▷ Language 91



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

▷ Units of measure and display format 91

▷ Brightness 92

▷ Lock Control Center in rear 24

**8** Climate

▷ Automatic climate control 105

▷ Heated seats 51

▷ Parked-car ventilation system 112

## Assistance window*

While you use the Control Center, the assistance window can provide you with a parallel display for the active system.

CarManuals2.com

You can use it for displays of the following:

▷ Short help and supplementary information texts for selected menu entries

▷ A function selected in the "Car data" menu, refer to page 90

▷ The route for vehicles with a navigation system, refer to page 131.

### Help texts in assistance window

You can call up and also cancel displays containing help texts and supplementary information on selected menu entries in the assistance window.

1. Select "Help" from the orientation menu
2. Select "Brief info" menu and confirm. The help texts appear in the assistance window
3. Confirm again to deactivate the automatic display.

### Show menu name

You can program the system to display the menu name each time you proceed to a new menu.

1. Select "Help" from the orientation menu
2. Select "Menu name" and confirm your entry.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Top and bottom status lines

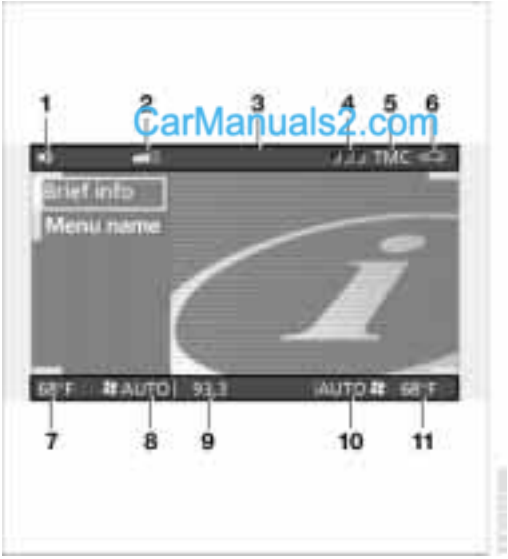


CarManuals2.com

**1** Hands-free mode active

**2** Portable phone reception strength

**3** Display for phone service provider

**4** Portable phone status

- ▷ Green: incoming or outgoing call
- ▷ Red: no network available
- ▷ Yellow: routed through alternate service network – roaming

**5** Traffic Message Channel activated – currently not available

**6** Status Check Control 85

- ▷ Green: no message
- ▷ Yellow: priority 2 – the symbol flashes briefly. You can use the "Car data" menu to have the status report shown in the Control Display
- ▷ Red: priority 1 – these messages appear immediately, accompanied by a gong and a flashing symbol

Status Service Interval Display 83

- ▷ Red: at least one service interval has been exceeded

**7** Temperature selection display, left-hand side of passenger compartment

**8** Air supply, left-hand side of passenger compartment

**9** Entertainment – display for radio, cassette, CD, TV, DVD

**10** Air supply, right-hand side of passenger compartment

**11** Temperature selection display, right-hand side of passenger compartment

### Assistance window

The status lines in the assistance window show the following:

- ▷ Outside temperature
- ▷ Navigation system destination
- ▷ Time
- ▷ Date.

## Control Center in rear*

### Rear screen

Folding open rear screen:

1. Swing folding arm upward until it engages
2. Fold open rear screen.

The rear screen is ready for operation.

Folding down rear screen:

1. Align rear screen straight
2. Fold rear screen downward; folding arm unlocks
3. Swing folding arm downward.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Swing the rear screen downward when the ski bag is used, as otherwise it could be damaged.
Do not swing the rear screen up or down with the beverage holders open, as otherwise it could be damaged.◀

The rear screen switches off automatically when it is swung downward. Some functions are not available on the rear screen, e.g. the BMW Assist function can only be operated in the front Control Display. Some functions only permit limited operation on the rear screen, e.g. the speed limit can only be displayed. Setting is carried out via the front controller, refer to page 89.◀

## Controller

The controller is located on the center armrest.

## Rear lock

The available functions are operated with the respective controller.
In the Control Display you can limit or deactivate operation of the rear screen.

1. Select the "Settings" menu and confirm
2. Select "Rear" and confirm.

3. Setting operation of rear screen:
   - ▷ Select "Limited Release" and confirm to lock the functions used in the front Control Display

   When headphones are connected, all audio and video functions continue to be selectable in the rear, with the exception of the audio or video source activated in the front Control Display.◀

   - ▷ Select "None Release" and confirm to switch off the rear screen
   - ▷ Select "Full Release" and confirm to switch off all locks.

## Headphones

**1** Headphone jack

**2** Adjusting volume

**3** Station scan/track search

- ▷ Station scan
- ▷ Tape, fast forward/reverse
- ▷ Music track search for CD and cassette, chapter search for DVD changer
- ▷ Select TV channel.

CarManuals2.com

Headphones are only intended for passengers in the rear seats. Please check with local regulations regarding use of headphones.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Voice command*

## Voice command system

### The concept

The voice command system allows you to control operation of various vehicle systems without ever removing your hands from the steering wheel. The system operates on the basis of voice commands that you will learn easily after using them a few times. In many cases, the voice command system supports you with announcements or questions while you are making your entries.

The voice command system transforms your oral commands and dialog answers into control signals for the selected systems.

Please take the time to acquaint yourself with how a particular system operates before proceeding to control it using the voice command system.◀

### Symbols used

These sections contain information on using the voice command system.

›...‹ Verbal instructions to use with the voice command system.

››...‹‹ Identifies the answers generated by the voice command system.

### Systems available for use with voice command

- ›Telephone‹, refer to page 170
- ›Navigation‹, refer to page 130
- ›Radio‹, refer to page 149
- ›CD‹, refer to page 153
- ›CD changer‹, refer to page 155
- ›Tape‹, refer to page 158
- ›Notepad‹, refer to page 28
- ›DVD‹, refer to page 162.

Either the system that you are now operating or any current error messages will appear in the Info Display, refer to page 27.

CarManuals2.com

## Voice commands

### Activating voice command system

Briefly press the button in the steering wheel.

A signal tone and "SVS active" in the Info Display, refer to page 27, indicate that the system is ready for use. You are automatically in the main menu.

From here, you can call up all the equipment that can be operated.

### Canceling voice command entry

Briefly press the button in the steering wheel

or

›Cancel‹.

In dialogs in which any text can be spoken, e.g. names, notes, canceling is only possible using the button.

The system automatically switches over to its telephone mode if you receive a call during voice input. "SVS off" appears in the Info Display, refer to page 27.◀

### Voice commands

The voice command system operates on the basis of specific, predefined commands; these commands should be spoken precisely as indicated. You can have the possible commands read back at any stage. To do so, say the command ›Options‹.

In addition to the commands described, there are often other commands that run the same function. Instead of ›Options‹, you can, for example, also say ›What now‹. More detailed commands such as ›Change



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

scale‹ instead of ›Scale‹ are also often possible.

### Short commands

With the ›Main menu‹ level, you can run certain functions directly with short commands, refer to page 29, without having to open an equipment level.

CarManuals2.com

For example, if you want to dial a phone number, you do not have to say

›Telephone‹

rather you can say directly

1. ›Dial number‹
2. Enter the phone number.

### Special commands

Special commands are available for specific systems. In this Owner's Manual you will find these commands in the sections describing the individual systems.

Operation with the voice command system is always indicated with this pictograph.

### Displays in the Info Display

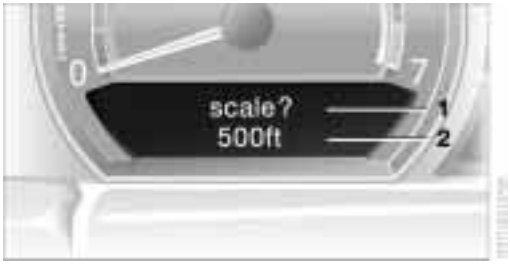


The Info Display shows you what the voice command system has understood in line 2, while also indicating which voice command or question is currently active in line 1.
In addition, any error messages are also displayed.

## Selecting the navigation scale – an example

Start the dialog:

Briefly press the button in the steering wheel.

| You say | The voice command system replies | Info Display screen contents |
|---|---|---|
| | | "SVS active" |
| ›Change scale‹ | ››Please enter the desired scale‹‹ | "scale ?<br>change scale" |
| ›Scale<br>500 feet‹ | | "ok<br>500 ft" |

## Volume adjustment

You can adjust the volume for the instructions from the voice command system:

Turn the knob during an instruction/announcement to select the desired volume.

Instructions/announcements will continue at this volume level, even if the other audio sources are set to minimum volume.

The system automatically selects your individual volume setting each time you unlock the vehicle using your personal remote control unit.◀





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Notices

Do not use the voice command system to make emergency SOS calls. Your voice and habitual tone could be affected by stressful situations, as a result of which the process of establishing the telephone connection could be unnecessarily delayed. Instead, you should use the emergency SOS button located adjacent to the rearview mirror, refer to page 173.◀

## Environmental conditions

The voice command system uses a special hands-free microphone located in the front of your vehicle's headliner. Although the system is designed to filter out ambient noise, you can help ensure that your commands will be understood by observing the following instructions:

- ▷ Speak smoothly and clearly, at a normal volume. Do not place any unusual stress on individual syllables, and avoid pauses
- ▷ Do not speak while the voice command system is talking
- ▷ Keep the doors, windows and sunroof closed to prevent interference from ambient noise
- ▷ Avoid other sources of noise in the vehicle while speaking, and ask other vehicle occupants to refrain from talking while you are using the system
- ▷ The hands-free microphone is aimed toward the driver. This means that the system might be unable to register the voices of other vehicle occupants properly.

# The notebook

## To record a note

›Record note‹.

You can store approx. ten minutes of spoken text – either as a single entry or as multiple entries of any desired length.

To terminate recording:

Press the button for a long period.

When recording notes, the voice command system does not respond to the ›Cancel‹ command. The text checking function for command words is deactivated in this case so that you can speak any desired text for your notes. This feature saves you from having to concentrate on avoiding these words while recording.◀

## Listening to a notebook entry

Listening to recorded notebook entries:

1. ›Read out‹

   Approximately the first 3 seconds of the first note are read aloud
2. Following the inquiry ››Note and next?‹‹ select the next function

   ▷ To listen to the entire note:

   ›Read out‹

   ▷ To hear the next notebook entry:

   ›Next‹

   ▷ To hear the entry again:

   ›Back‹ or

   ›Repeat‹.

## Delete notes

1. ›Edit‹
2. ›Delete‹.

## Clearing the notebook

To delete all contents from the notebook:

1. ›Notepad‹
2. ›Delete‹.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Standard commands

The standard commands available for use with all controlled systems are the same.

On delivery, the ›Standard dialog‹ is set to simplify familiarization with the voice command system.◀

| Function | Command |
|---|---|
| To repeat the last message issued by the voice command system | ›Repeat‹ |
| To terminate the voice command system | ›Cancel‹ |
| To set comprehensive instructions and error reports | ›Standard dialog‹ |
| To set brief instructions and error reports | ›Short dialog‹ |
| To call up information on individual items of equipment | ›Help‹ |
| To provide you with a listing of the commands available for the selected system. A corresponding list simultaneously appears in the Info Display, refer to page 27 | ›Options‹ |
| To open the main menu | ›Main menu‹ |

# Short commands

## Notebook

| Function | Command |
|---|---|
| To record a note | ›Record note‹ |
| To listen to notebook entry | ›Read out note‹ |

CarManuals2.com

## Navigation

| Function | Command |
|---|---|
| To switch on the voice output | ›Message on‹ |
| To switch off the voice output | ›Message off‹ |
| To select destination from address book | ›Select destination‹ |
| To change scale | ›Scale‹ |
| To start the destination guidance system | ›Route guidance on‹ |
| To call up information on the current location or destination | ›Information‹ |
| To request addresses | ›Address book‹ |
| To call up the map view | ›Map‹ |





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Entertainment

| Function | Command |
|---|---|
| To switch on radio | ›Radio on‹ |
| To switch off audio sources and TV | ›Audio off‹ |
| To select radio stations | ›Frequency selection‹ |
| To select a stored radio station | ›Station‹ |
| To start CD | ›CD on‹ |
| To select a CD | ›CD 1 ..6‹ |
| To start a cassette | ›Tape on‹ |
| To start DVD | ›DVD on‹ |
| To select a DVD | ›DVD 1 ..6‹ |

## Telephone

| Function | Command |
|---|---|
| To switch on portable phone | ›Telephone on‹ |
| To dial telephone number | ›Dial number‹ |
| To redial | ›Redial‹ |
| To select from the telephone book | ›Dial name‹ |
| To make a new entry in the telephone book | ›Save name‹ |
| To have the entries of the telephone book read out | ›Read out telephone book‹ |

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com

# Controls

This chapter is intended to provide you with information for complete control of your vehicle. Its extensive array of features and accessories, both for driving and for your own safety, comfort and convenience, are described here.

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Opening and closing

## Key/remote control

**1** The Key Memory functions are controlled by the remote control units with their integrated keys, refer to page 60. The color-coded decals that you received when taking delivery of your vehicle can be used to identify the individual remote control units.

▷ Each remote control unit is equipped with an extended-life battery which is automatically recharged in the ignition lock each time you drive the vehicle.
If you have any remote control units that are not being used on a regular basis, you should therefore remember to recharge these units by using them to drive the vehicle for an extended period at least once a year, refer to page 35.◀

**2** Spare key for storage in a safe place, such as in your wallet. This key is not intended for constant use

**3** Adapter for spare key
The adapter can be used to store the spare key. It can be stored in the place provided within the luggage compartment lid-mounted onboard tool kit to ensure that it will always be available, refer to page 195. You can find more detailed information on using the adapter in the section Using the spare key adapter.

### Removing the key from the remote control unit

Press button **1** to release the key.

With the integrated key you can unlock and lock the following:

- ▷ the storage compartment under the front armrest
- ▷ the driver's door
- ▷ the luggage compartment lid.

Within the storage compartment you will also find the switch for locking the luggage compartment separately, refer to page 39.

ComManuals2.com

If you lock the storage compartment and only turn over the remote control, no access is possible via the luggage compartment lid.

### Using the spare key adapter

You will need the adapter to activate the ignition and to start the vehicle with the spare key.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Press lock button **1**, slide up the cover and insert the spare key **2** in the adapter. Close the cover and insert the adapter in the ignition lock.

# Central locking system

## The concept

The central locking system is ready for operation whenever the driver's door is closed. This simultaneously engages and releases the locks on the following:

- ▷ Doors
- ▷ Luggage compartment lid
- ▷ Fuel filler door.

The central locking system can be operated from the outside

- ▷ via the remote control
- ▷ via the driver's door lock

and from inside via the button for the central locking system.

When the system is locked from inside, the fuel filler door remains unlocked. Refer to page 37.

The anti-theft system is automatically activated whenever you activate the central locking system from outside the vehicle. The alarm system is armed/disarmed at the same time.

In the event of an accident, the central locking system unlocks automatically – only those doors which were not locked separately with the safety lock buttons, refer to page 38. In addition, the hazard warning flashers and interior lamps come on.

# Opening and closing – from outside

## Using the remote control

When you engage/release the vehicle's locks, you simultaneously activate/deactivate the anti-theft system, arm/disarm the alarm system and switch the interior lamps on/off.

In addition, the remote control offers you another function:

- ▷ Panic mode
  In case of danger, you can trigger an alarm.

CarManuals2.com

You can have various confirmation signals programmed into the system to verify that the vehicle has been locked securely.◀

## Remote control

**1** To unlock, convenience opening mode and alarm system

**2** To lock and secure, switch off tilt alarm sensor and interior motion sensor, switch on interior lamps and door-mounted proximity lamps

**3** To open the luggage compartment lid

**4** To switch on interior lamps, activate panic mode

Because any persons or animals left unattended in a parked vehicle could lock the doors from the inside, you should always keep the remote control unit with you; this precaution ensures that you will remain able to unlock the vehicle from the outside at all times.◀

When it is no longer possible to lock the vehicle via the remote control, the battery is discharged. Use this remote control unit during an extended drive; this will recharge the battery, refer to page 34.
In the event of a system malfunction, please contact your BMW center, which is also your source for replacement keys.◀





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Unlocking the vehicle

Press button **1** .

The interior lamps and the door-mounted proximity lamps come on.

Press the button once to unlock the driver's door only; press a second time to unlock all remaining doors as well as the luggage compartment lid and the fuel filler door.

## Convenience opening mode

Hold button **1** pressed. The windows and the sliding/tilt sunroof open. The sliding/tilt sunroof will not be retracted if it is already in its raised position.

## Locking and securing

Press button **2** LOCK.

## Switching off the tilt alarm sensor and interior motion sensor

Press button **2** LOCK once again directly after locking. For more detailed information, refer to page 41.

## Switching on interior lamps and door-mounted proximity lamps

If the vehicle is locked, press button **2** LOCK.

### Switching on the interior lamps

Press button **4** .

You can also use this function to locate your vehicle in parking garages etc.

## Panic mode

By pressing and holding button **4** for more than approx. two seconds, you can trigger the alarm system in response to any impending danger.

To switch off the alarm: press any of the buttons.

## Opening the luggage compartment lid

Maintain pressure on button **3** for approx. 1 second.

The luggage compartment lid opens, regardless of whether it was previously locked or unlocked.

During opening the luggage compartment lid pivots upward and to the rear. Ensure that adequate clearance is available before opening.
To avoid being inadvertently locked out, never lay the remote control unit down in the luggage compartment. If the luggage compartment lid was locked earlier, it will relock automatically when closed.◀

## Automatic luggage compartment lid operation*

### Opening the luggage compartment lid

Maintain pressure on button **3** for approx. 1 second.

The luggage compartment lid opens all the way, regardless of whether it was previously locked or unlocked.

To interrupt the opening process:

Press the button again while opening is in progress.

During opening the luggage compartment lid pivots upward and to the rear. Ensure that adequate clearance is available before opening.
To avoid being inadvertently locked out, never lay the remote control unit down in the luggage compartment. If the vehicle is locked, the luggage compartment lid is also locked again when closed.◀

## External systems

External systems or devices may cause local interference in the functions of the remote control.
Should the remote control unit fail to operate owing to interference of this kind, you can respond by using the key to unlock your vehicle at one of the doors.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## For US owners only

The transmitter and receiver units comply with part 15 of the FCC/Federal Communication Commission regulations. Operation is governed by the following:

FCC ID: LX8766S
LX8766E
LX8CAS

CarManuals2.com

Compliance statement:
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- this device must accept any interference received, including interference that may cause undesired operation.

Any unauthorized modifications or changes to these devices could void the user's authority to operate this equipment.◀

## Using the key

One turn of the key in the driver's door lock unlocks the driver's door only.
Turning the key a second time unlocks all of the remaining doors, the luggage compartment lid and the fuel filler door.

You can have various confirmation signals programmed into the system to verify that the vehicle has been locked securely.◀

## Convenience operation

You also have the option of operating the windows and the sliding/tilt sunroof from the driver's door lock.

- To open:
  With the door closed, turn the key to the Unlock position and hold it there.
- To close:
  With the door closed, turn the key to the Lock position and hold it there.

Watch during the closing process to be sure that no one is injured.
Releasing the key stops the operation.◀

## Manual operation

in the event of an electrical malfunction

You can turn the key all the way to the right or left in the door lock or engage or release the locking mechanism in the driver's door.

# Opening and closing – from inside

You can operate the central locking system with this button when the driver's door is closed. The doors and luggage compartment lid are unlocked ⇧ or locked ⇩ only. The anti-theft system is not activated. Also, the fuel filler door remains unlocked to allow refueling.

If the remote control has been used to unlock only the driver's door, refer to page 36, and you touch the ⇧ button when the driver's door is open, the other door, the luggage compartment lid, and the fuel filler door are unlocked.
If the driver's door is closed, touching the ⇩ button locks it.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

You can also have the system programmed to activate the central locking system automatically whenever the vehicle is set in motion, or when a specific interval elapses after it is unlocked, provided that neither the doors nor the luggage compartment lid are opened in the meantime. This can be adjusted to be key-specific.◀

### Unlocking and opening the doors

▷ Either unlock the doors together with the button for the central locking system and then pull the release handle above the armrest or

▷ pull the release handle for each door twice: the first pull unlocks the door, and the second one opens it.

When the low beams are switched on, the interior door handles are also lighted. The intensity of the lighting is adjusted using the instrument lighting, refer to page 103.◀

### Engaging the locks

▷ Use the central locking button to lock all of the doors simultaneously,
or

▷ press the individual safety lock buttons down. To prevent the driver from being inadvertently locked out of the vehicle, the lock button on the driver's door automatically extends again after a brief period if the door remains open.

Do not use the safety lock buttons to engage the locks during driving, as they would then fail to disengage automatically in the event of an accident.
Because any persons or animals left unattended in a parked vehicle could lock the doors from the inside, you should always keep the remote control unit with you; this precaution ensures that you will remain able to unlock the vehicle from the outside at all times. ◀

## Doors

### Soft Close Automatic*

Apply gentle pressure to the door to close it. The closing process will then be carried out automatically.

To avoid injuries, ensure that the door's travel path is completely free and clear before closing.◀

## Luggage compartment lid

### Opening from outside

Press the button. The luggage compartment lid opens.

During opening the luggage compartment lid pivots upward and to the rear. Ensure that adequate clearance is available before opening.◀

### The lock

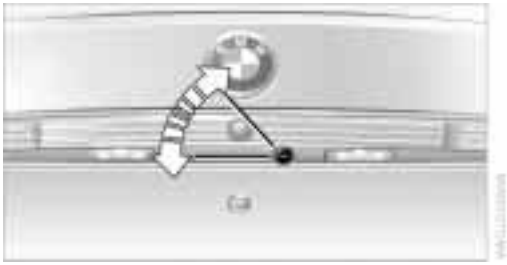

All of the vehicle's keys fit the luggage compartment lid lock located in the license plate recess.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Opening separately

Insert the key in the luggage compartment lid's lock and turn it all the way to the right – the lid opens.

To avoid being locked out inadvertently, avoid laying the remote control unit down in the luggage compartment. The luggage compartment is locked again as soon as you close the lid.

CarManuals2.com

If you use the key to unlock the luggage compartment lid while the alarm system is armed, the alarm will be triggered. To deactivate the alarm,

- ▷ unlock the vehicle using the remote control, refer to page 36, or
- ▷ insert the remote control all the way into the ignition lock, engaging the detent.◀

## Securing separately

The switch position will vary according to the individual vehicle's equipment level.

**1** Luggage compartment lid locked

**2** Luggage compartment lid unlocked

Push the switch into position **1**. This locks the luggage compartment lid and disconnects it from the central locking system.

If you then lock the storage compartment in the center armrest before handing over only the remote control when leaving the vehicle for valet parking, etc., this will prevent unauthorized access to the vehicle through the luggage compartment, refer to page 34.

## Manual operation

in the event of an electrical malfunction

Refer to section on Opening separately.

## Opening from inside

You can use this button to open the luggage compartment lid when the vehicle is stationary. This is not possible, if the luggage compartment lid has been locked separately.

## Closing

A recess has been incorporated into the inside trim on the luggage compartment lid to make it easier to pull down.

## Automatic Soft Close feature

To close the luggage compartment lid, merely press it down gently. The closing process will then be carried out automatically.

To avoid personal injury, always ensure that no individuals are within the luggage compartment lid's travel range when closing.

Operate the vehicle only when the luggage compartment lid is completely closed. Otherwise, exhaust fumes could penetrate the interior of the vehicle. If special circumstances should make it absolutely necessary to operate the vehicle with the luggage compartment lid open:





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

- Close all windows. Shut the sliding/tilt sunroof
- Adjust the automatic climate control's blower to supply a high rate of airflow, refer to page 107.◀

## Automatic luggage compartment lid operation*

### Opening

The luggage compartment lid opens all the way, when you

- press the button next to the steering column
- press the button on the outside of the luggage compartment lid, refer to page 38
- press button **3** on the remote control unit, refer to page 36.

During opening the luggage compartment lid pivots upward and to the rear. Ensure that adequate clearance is available before opening.◀

### Closing

CarManuals2.com

The luggage compartment lid closes automatically when you

- press the button or
- press the button on the outside of the luggage compartment lid, refer to page 38.

The luggage compartment lid immediately stops opening or closing if you hold it in place by hand.◀

To avoid injuries, be sure that the travel path of the luggage compartment lid is clear when it is closed, as with all closing procedures.
Operate the vehicle only when the luggage compartment lid is completely closed. Otherwise, exhaust fumes could penetrate the interior of the vehicle. If special circumstances should make it absolutely necessary to operate the vehicle with the luggage compartment lid open:

- Close all windows. Shut the sliding/tilt sunroof
- Adjust the automatic climate control's blower to supply a high rate of airflow, refer to page 107.◀

## Manual operation

in the event of an electrical malfunction

Use the key to unlock the luggage compartment lid, refer to page 38, and then slowly open or close it, taking care to avoid abrupt motion in the process.

## Emergency release

This lever releases the luggage compartment lid from inside the luggage compartment.

# Luggage compartment

## Net*

You can use the net to store smaller objects on the bulkhead separating the luggage compartment from the rear seats.

Do not stow objects behind the side trim panels on the left and right in the luggage compartment, as otherwise the electrical parts could overheat and be damaged.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Alarm system

## The concept

The vehicle alarm system responds:

- When a door, the hood, or the luggage compartment lid is opened
- To movement in the vehicle's interior – interior motion sensor
- To changing the vehicle's tilt if someone attempts to steal the wheels or tow the vehicle
- To interruption of battery voltage.

The system responds to unauthorized vehicle entry and attempted theft by simultaneously activating:

- An acoustic alarm, which lasts for a period of approx. 30 seconds
- The hazard warning flashers for approx. five minutes
- The high beams, which flash on and off in the same rhythm.

## Arming and disarming the alarm system

CarManuals2.com

When you lock or unlock the vehicle, either with the remote control unit or at the door lock, the alarm system is armed or disarmed at the same time.

The system indicates that it has been correctly armed by switching on the hazard warning flashers for a single cycle and by emitting an acoustic signal.

You can have different acknowledgment signals set to confirm arming and disarming.◀

You can open the luggage compartment lid even if the alarm is armed using button **3** of the remote control, refer to page 36. It is armed once again when the lid is closed.

Pressing the Panic mode button for a longer period triggers the alarm, refer to page 36.◀

## Indicator lamp displays

- The indicator lamp below the interior rearview mirror flashes continuously: the system is armed
- The indicator lamp flashes when the system is armed: door(s), the hood or luggage compartment lid are not completely closed. Even if you do not close the alerted area, the system begins to monitor the remaining areas, and the indicator lamp flashes continuously after 10 seconds. However, the interior motion sensor is not activated
- The indicator lamp goes out when the system is disarmed: no manipulation or attempted intrusions have been detected in the period since the system was armed
- If the indicator lamp flashes for roughly 5 minutes when you disarm the system, or until the remote control unit is inserted in the ignition lock: an attempted entry has been detected in the period since the system was armed.

Following triggering of an alarm, the indicator lamp will flash continuously.

## Avoiding unintentional alarms

The tilt alarm sensor and interior motion sensor may be switched off at the same time. You can do this to prevent a false alarm from being triggered in garages with elevator ramps, for instance, or when the vehicle is transported by trailer or train:





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Lock, i.e. arm by pressing twice; press button **2** LOCK of the remote control twice in succession, refer to page 36, or lock twice with the key, refer to page 37. The indicator lamp lights up briefly and then flashes continuously. The tilt alarm sensor and the interior motion sensor are switched off as long as the system is armed.

If you desire, the

- ▷ tilt alarm sensor
- ▷ interior motion sensor

can be switched off permanently. Please contact your BMW center for assistance.◀

### Interior motion sensor

In order for the interior motion sensor to function properly, the windows and sliding/tilt sunroof must be completely closed.

Be sure to deactivate the interior motion sensor, refer to section on Avoiding unintentional alarms, when you wish to leave the windows or sliding/tilt sunroof open.

## Electric power windows

### Opening and closing windows

From radio mode on:

- ▷ Press the switch until you feel resistance:
  The window continues to move downward as long as you continue to hold the switch

CarManuals2.com

- ▷ Press the switch beyond the pressure point:
  The window moves downward automatically. Press the switch again to stop the opening movement.

You can close the windows in the same manner by pulling the switch.

The electric power windows remain available for use after the ignition is switched off:

- ▷ For approx. 15 minutes with the remote control unit in the radio mode
- ▷ For approx. 1 minute in position 0 or with the remote control unit disengaged.

To open, press the switch beyond the pressure point.

When leaving the vehicle parked, always remove the remote control from the ignition lock and close the doors; this precaution prevents children from operating the power windows and injuring themselves, etc.◀

For information on using the convenience operation mode at the door lock or with the remote control unit, refer to page 36 or 37.

### Safety feature

If the force rises beyond a predefined threshold during closing, the system will immediately stop moving the window prior to lowering it slightly.

Despite this safety feature you should always inspect the window's travel path prior to closing it, as the safety system might fail to detect certain kinds of obstructions, such as very thin objects, and the window would continue closing.
Pulling the switch beyond the pressure point and holding it limits the response of the safety feature. Under these conditions the window will respond to forces beyond a defined threshold by only opening several millimeters.
If you again pull the switch past the pressure point and hold it in position within a period of roughly 4 seconds, the safety feature will be deactivated.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

When you close the windows they will slow down as they approach the end of their travel; this is to allow the safety feature to respond more precisely to any obstructions encountered in this critical range.◀

### Safety switch

With the safety switch, you can prevent the rear windows from being opened or closed via the switches in the rear passenger area, by children, for example. The switch also deactivates the rear-mounted switches controlling the rear seats' power adjustment, refer to page 47, and the rear window sun blinds, refer to page 115. The indicator lamp lights up when this safety feature is activated.

Press the safety switch whenever children are riding in the rear of the vehicle. Careless use of the power windows can lead to injury.◀

The remote control unit must be locked in position in the ignition lock before this safety feature can be deactivated.◀

### After installing accessories

After installing any accessory – such as a clamp-on antenna for a portable phone – within the window's travel range, you will need to have the system reinitialized for use under the new conditions. Please contact your BMW center for assistance.

CarManuals2.com

## Sliding/tilt sunroof*

To prevent injuries, exercise care when closing the sliding/tilt sunroof and keep it in your field of vision until it is shut.
When leaving the vehicle, always disengage the remote control in the ignition lock and close the doors to prevent children from operating the sunroof and injuring themselves, etc.◀

### Raising – opening – closing

From radio mode on, press the switch, or slide it in the desired direction up to the pressure point.

After the ignition is switched off the sunroof remains available for operation:

- For approx. 15 minutes with the remote control unit in the radio mode
- For approx. 1 minute in position 0 or with the remote control unit disengaged.

The headliner insert slides back somewhat when you raise the sunroof. When the sunroof is opened the headliner retracts with it.

Do not use force to close the headliner insert with the sunroof in its raised position, as damage to the mechanism could result.◀

For information on using the convenience operation mode at the door lock or with the remote control unit, refer to page 36 or 37.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Automatic* opening and closing

Press the switch past the pressure point and then release it.

In addition, the following response is also automatic:
With the sunroof open, press the switch in the Raise direction: the sunroof rises to its tilt-up end position.

Press the switch again in any direction to stop the sunroof.

The automatic opening feature in the Raise direction can be deactivated. Please contact your BMW center for assistance.◀

## Safety feature

If the sliding/tilt sunroof encounters resistance

- ▷ when it is closing from the raised position
- ▷ when it is closing from a point roughly past the middle of its travel,

the closing cycle is interrupted and the sliding/tilt sunroof will open again slightly.

Despite this safety feature you should always inspect the sunroof's travel range prior to closing it, as the safety feature might fail to detect certain kinds of obstructions, such as very thin objects, and the sunroof would continue closing.
Pressing the switch beyond the pressure point and holding it limits the response of the safety feature. The sunroof only opens a short distance.
If you again press the switch past the pressure point and hold it in position within about 1.5 seconds, the safety feature will be deactivated.◀

When you close the sliding/tilt sunroof it will slow down as it approaches the end of its travel path; this is to allow the safety feature to respond more precisely to any obstructions encountered in this critical range.◀

## Following interruptions in electrical power supply

Following interruptions in electrical power, for instance, when the battery is disconnected, it is possible that the sliding/tilt sunroof will extend to its tilt-up position, but fail to respond to other commands. Should this occur, please have the sunroof reinitialized at your BMW center.

## Malfunctions

In the event of an electrical malfunction, you can operate the sliding/tilt sunroof manually:

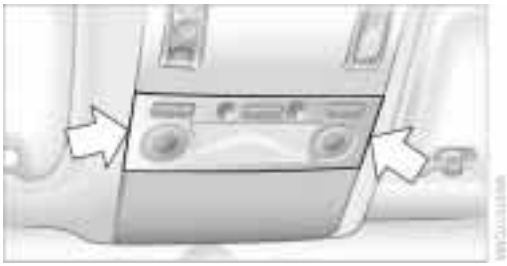

1. Take out the interior light, reach behind the opening, press out the cover

CarManuals2.com

2. Insert the Allen wrench supplied with the onboard tool kit, refer to page 195, in the opening provided. Turn to slide the sliding/tilt sunroof in the desired direction.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Adjustments

## Sit safely

The ideal sitting position can make a vital contribution to relaxed driving that is as fatigue-free as possible. The sitting position plays an important role together with the safety belts and airbags in providing occupants with maximum levels of passive safety in an accident. To ensure that the safety systems operate with optimal efficiency, we strongly urge you to observe the instructions contained in the following section.

For additional information on transporting children safely, refer to page 57.

### Sitting safely with airbags

Always maintain an adequate distance between yourself and the airbags. Always hold the steering wheel by its rim with hands at the 9 o'clock and 3 o'clock positions, to minimize the risk of injuries to your hands and arms in the event of airbag deployment.
No one and nothing is to come between the airbags and the seat occupant.
To prevent possible leg injuries should the knee airbag deploy in an accident, ensure that the front passenger assumes a correct sitting position. Do not use the cover of the front airbag on the front passenger side as a storage area for objects, or as a rest for feet or legs.◀

For airbag locations and additional information on airbags, refer to page 55.

### Safe sitting position with safety belts

For the safety of all vehicle occupants, please comply with the following instructions for wearing safety belts.

Never allow more than one person to wear a single safety belt. Never allow infants or small children to ride in a passenger's lap.
Avoid twisting the belt while routing it firmly across the hips and shoulder. Wear it as snugly against your body as possible. Do not allow the belt to rest against hard or fragile objects.
Do not route the belt across your neck, or run it across sharp edges. Be sure that the belt does not become caught or jammed.
Avoid wearing loose or bulky clothing that would prevent the belt from resting securely against your body; pull on the shoulder strap periodically to keep it tensioned.
In the event of a frontal impact, a loose lap belt could slide over your hips, leading to abdominal injury. In addition, the safety belt's restraint effectiveness is reduced if the belt is worn loosely.
Expectant mothers should always wear their safety belts, taking care to position the lap belt against the lower hips, where it will not exert pressure against the abdominal area.◀

For putting on safety belts, refer to page 50.

CarManuals2.com

## Seats

For your personal safety when adjusting the seat position, please follow the instructions below carefully.

Never attempt to adjust your seat while operating the vehicle. The seat could respond with unexpected movement, and the ensuing loss of vehicle control could lead to an accident.
Never recline the backrest to an extremely horizontal position while operating the vehicle – this precaution is especially important for front passengers and the occupants of electric power rear seats to remember. Failure to observe these precautions can prevent the belts from providing effective protection against injury, as passengers could slide under the belts in an accident.◀





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Please observe the information on using safety belts provided on page 50 and the notice on the active head restraints on page 48.

## The concept

You adjust the seat in two stages:

1 Preselect the function: the button lights up brightly

2 Adjustments: slide control knob to

- ▷ front or rear ◀ ▶ or
- ▷ upwards or downwards ▲ ▼
- ▷ or turn ▶ ◀

## Electric power seat adjustment

CarManuals2.com

You can use the control knob to adjust various functions after first selecting them with the buttons.

⚠ To ensure that the safety systems continue to provide optimal protection, please observe the adjustment instructions on page 45.◀

3 Forward/backward: ◀ ▶
Height: ▲ ▼
Backrest: ▶ ◀
This button is always ready for operation

4 Thigh support: ◀ ▶
Height: ▲ ▼
Tilt angle – driver's seat only: ▶ ◀

5 Lumbar support*, see below

## Front comfort seat* adjustment

In addition to the electric power seat functions, several other adjustment options are also available with the comfort seat:

4 Thigh support: ◀ ▶
Tilt angle – also passenger seat: ▶ ◀

5 Lumbar support, see below
Backrest width:
Increase or decrease lateral support ▶ ◀

6 Shoulder support, see below
Head restraint height: ▲ ▼
Backrest: ▶ ◀

## Lumbar support adjustment

5 Lumbar support

You can also adjust the contours of the backrest to obtain additional support in the lumbar region.

The upper hips and spinal column receive supplementary support to help you maintain a relaxed, upright sitting position.

◀ ▶ Increase or decrease curvature

▲ ▼ Increase curvature at top or bottom.

## Shoulder support adjustment

6 To adjust the tilt angle of the shoulder support: ◀ ▶

You can use the adjustable upper backrest for supplementary support in the shoulder region. This provides a relaxed driving position and helps relieve stress on the shoulder muscles.

⚠ Make corrections in the forward/backward adjustment of the seat to ensure that the safety belt still fits firmly against your body. If you do not do this, the protection provided by the safety belt may be reduced.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Rear comfort seat* adjustment

CarManuals2.com

You can use the control knob to adjust various functions after first selecting them with the buttons.

1 Forward/backward: ◀ ▶
Tilt angle: ▲ ▼
Backrest: ▶ ◀
This button is always ready for operation

2 Lumbar support, refer to page 46

3 Shoulder support: ◀ ▶
Head restraint height: ▲ ▼
Backrest: ▶ ◀

It is not possible to adjust the comfort seats if the safety switch for the power windows has been depressed, refer to page 43.◀

## Adjusting passenger seat from the rear

The front passenger's seat can be adjusted from the rear seating positions, for instance, when a rear passenger desires more legroom.
Press the button to activate this function, see arrow.

You can use the control knob to adjust the settings after selecting the desired function with the buttons.

1 Forward/backward: ◀ ▶
Height: ▲ ▼
Backrest: ▶ ◀

2 Head restraint height: ▲ ▼

Press the button again, see arrow, to deactivate this function.

## Resetting to standard adjustment position

You can use the button to return the rear seats to their standard or default positions. Maintain pressure on the button until the system completes the adjustment.

It will be necessary to return the rear seats to their standard position before using a child-restraint system, for instance, refer to page 57.◀

# Head restraints

## Adjustment information

Head restraints can reduce the risk of spinal injury in the event of an accident.
Adjust the head restraints so that they are centered roughly at the level of your ears.◀

## Electric power seat, comfort seat

You have the option of adjusting the head restraint to the desired height, either using the electric power assist, or manually, depending upon the seat.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### To set the height manually

Pull or press the head restraint.

### To set the height electrically*

▲▼ Set the height of the head restraint.

### To adjust the tilt angle

To adjust head restraint tilt angle: adjust by tilting the head restraint.

### To set the side extensions

You can fold the side extensions on the head restraint forward for increased lateral support.

## Front head restraints, active*

When necessary, the system will respond to a rear impact by automatically triggering the active head restraints.

⚠ To ensure that the active head restraints afford maximum protection, and to avoid unnecessary risks to personal safety, we request that you read and comply with the following.

- ▷ Adjust the head restraints so that they are centered at roughly ear height
- ▷ Do not install seat or head-restraint covers
- ▷ Never use the head restraints as supports for suspending objects of any kind, such as clothes hangers. Refrain from mounting accessories on either the seat or the head restraint.◀

## Rear seats

### To adjust mechanically

CarManuals2.com

- ▷ To raise: pull



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

▷ To lower: press the button, arrow **1**, and push down the head restraint.

To remove head restraints, refer to next column.

### To adjust center head restraint

CarManuals2.com

⚠ If the head restraint has been lowered, pull it back up, continuing until the detent engages, before allowing a passenger to ride in the rear center position. Failure to observe this precaution can reduce the level of occupant protection.◀

### To adjust electrically*

If necessary, adjust the head restraint's height to ensure that it is centered at roughly the height of the passenger's ears.

▷ With the safety switch pressed, refer to page 43, the height adjustment of the head restraints is deactivated.◀

The head restraints at the outer seating positions extend automatically whenever the system detects a passenger on the seat. You can also adjust the height of the head restraint electrically.

⚠ To prevent possible personal injury and property damage, always ensure that the area above the head restraints is clear and unobstructed before extending them upward.◀

## Manual head restraint removal and installation

### Removal

1. Pull the head restraint upward to the stop
2. Press the button, arrow **1**, and remove the head restraint.

### Installation

1. Press the button, arrow **1**, and slide the head restraint into its support
2. Adjust the head restraint for your personal comfort.

## Rear comfort seat*

### To adjust height

If necessary, adjust the head restraint's height to ensure that it is centered at roughly the height of the passenger's ears.

▷ With the safety switch pressed, refer to page 43, the height adjustment of the head restraints is deactivated.◀

The head restraints at the outer seating positions extend automatically whenever the system detects a passenger on the seat. You can also adjust the height of the head restraint electrically.

⚠ To prevent possible personal injury and property damage, always ensure that the area above the head restraints is clear and unobstructed before extending them upward.◀





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### To set the side extensions

You can fold the side extensions on the head restraint forward to increase lateral support.

## Safety belts

Despite the presence of airbags, you should always remember to fasten your safety belt before starting off; airbags are intended to enhance the protection provided by the safety belts, and not to replace them.◀

### Fastening

Make sure you hear the latch plate engage in the belt buckle.

Warning lamp Please fasten safety belts
Accompanied by a signal or a message in the Check Control display.
Remains on until the safety belts are fastened.

CarManuals2.com

### Releasing

Press the red button in the buckle. Hold the belt and guide it back into its reel.

The shoulder strap's anchorage point will be in the correct position for seat occupants of every build if the seat is correctly adjusted, refer to page 45.

The two rear safety belt buckles integrated in the rear seat are for passengers sitting on the left and right. The belt buckle embossed with the word CENTER is intended exclusively for use by passengers riding in the center position.

Also observe the instructions on adjusting the seats on page 45.

If the safety belts are damaged or stretched in an accident: have the entire belt system, including the tensioning mechanisms, replaced at your BMW center. Have the belt anchorage points inspected for damage at the same time. Failure to observe this precaution may prevent the safety belts from effectively providing optimal protection when needed. If a child-restraint system was in the vehicle during an accident, consult the manufacturer's instructions regarding replacement.◀

### Rear seats

When the rear center position is not occupied, the latch on the safety belt can be inserted in the slot between the seat's upholstery and the backrest.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Heated seats*

## Front

The system regulates the temperatures of the seat cushion and backrest.

The temperature setting progresses one step through its control sequence each time you press the button.

To switch off:
Maintain pressure on the button for several seconds.

## Rear

CarManuals2.com

The operating concept is the same as for the front heated seats.

### Temperature distribution at the front

It is possible to select a temperature-distribution pattern providing different levels of heating for the seat cushion and the backrest, for instance, to adapt for different clothing on the legs and upper body.

1. Select "Climate"
2. Select and confirm

3. Select "Seat temp." and confirm
4. Select "Left" or "Right" and confirm
5. Turn to adjust temperature distribution
6. Press to confirm your entry.

The system automatically selects your individual temperature distribution settings each time you unlock the vehicle using your personal remote control unit.◀

# Active seat ventilation*

## Front

The system progresses one step through the control sequence each time you press the button.

To switch off:
Maintain pressure on the button for several seconds.

Use level 3 to cool the passenger compartment rapidly, for instance, when heat accumulates in the vehicle. The system automatically reverts to operation at level 2 after a brief period.◀





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Rear

The operating concept is the same as for the front seat ventilation.

## Active seat*

Active adjustment of the seat cushion's contours reduces muscular tension and fatigue to help prevent lower back pain.

To activate: press the button, the indicator lamp comes on.

## Mirrors

### Adjusting exterior mirrors

**1** 4-way adjustment

**2** To select mirror for adjustment

To prevent the exterior mirrors on this vehicle from being damaged, always fold them in by hand before entering an automatic car wash.◀

You can also adjust the mirrors manually by pressing against the outer edges of their lenses.

Storing the mirror positions, refer to Seat, mirror and steering wheel memory on page 54.

The mirror on the passenger's side features a lens with a more convex surface than the mirror installed on the driver's side. When estimating the distance between yourself and other traffic, bear in mind that the objects reflected in the mirror are closer than they appear. This means that estimations of the distance to following traffic should not be regarded as precise.◀

### Self-defrosting mirrors

The mirrors are automatically heated whenever the ignition is switched on.

CarManuals2.com

### Interior and exterior mirrors, automatic dimming feature*

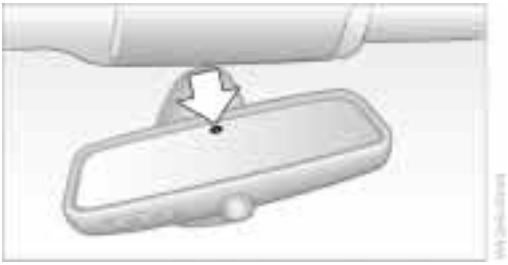

These mirrors automatically respond to ambient light and headlamp glare from following vehicles by automatically dimming through an infinitely-variable range. There are two photocells located in the interior rearview mirror for this purpose. One is integrated within the mirror's lens, arrow, while the other is located at an offset position on the rear of the mirror housing.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

The mirrors automatically revert to their clear, undimmed mode whenever you place the selector lever into reverse.

For trouble-free operation, keep the photocells clean and do not cover the area between the interior rearview mirror and the windshield. Do not attach any kind of stickers on the windshield in front of the mirror, either.◀

### Illuminated vanity mirror in the rear

1. Press button **1**. The vanity mirror folds down
2. Pull the mirror down slightly before proceeding to turn it or tilt it into the desired position
3. Press the vanity mirror back up before folding it back in.

## Steering wheel adjustment

The steering wheel can be adjusted in any of four directions by pressing the appropriate end of the button.

Do not adjust the steering wheel while the vehicle is moving. There is a risk of accident from unexpected movement.◀

Storing steering wheel positions, refer to Seat, mirror and steering wheel memory on page 54.

### Automatic steering wheel adjustment

The steering wheel automatically moves as high up and far forward as possible to ease driver entry and exit before then returning to the standard position or stored memory setting.

This automatic feature is governed by the driver's door and the ignition switch.

### Steering wheel heater*

The steering wheel's heater operates when the ignition is on.

Press the button to activate or deactivate this system.

The indicator lamp within the button lights up when the steering wheel heater is in operation.

### Programming button function

You can assign specific individual functions to the programmable button. This feature then provides you with quick access to this function, allowing you to control it without undue distraction from road and traffic conditions.

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

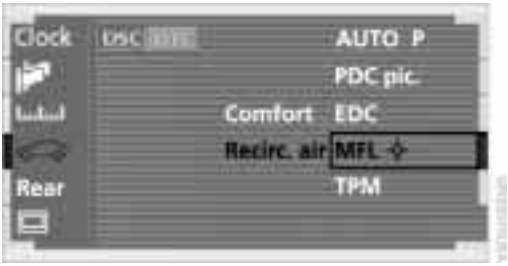


1. Select "Settings"
2. Confirm
3. Select "MFL". Continue to press the controller until the desired function appears:

   ▷ "Recirc. air"
   In this mode the supply of outside air remains blocked, refer to AUC Automatic recirculated-air control on page 107

   ▷ "Navi info"
   To repeat the most recent message from the navigation system, refer to page 139

   ▷ "AUTO P"
   To activate/deactivate Automatic Hold, refer to Automatic Hold on page 63.

CarManuals2.com

You can select the displayed function using the button in the steering wheel.

If you have activated the Automatic Hold feature, refer to page 63, you can use the button to deactivate the system for parking maneuvers, etc.◀

# Seat, mirror and steering wheel memory

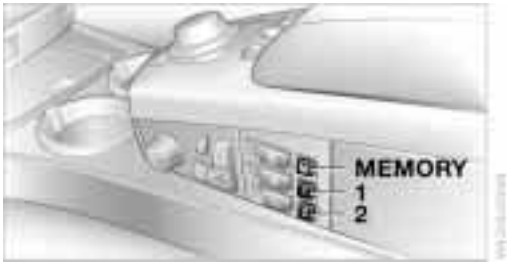


You can store and select two different adjustment settings for the driver's seat, exterior mirrors and steering wheel.

If your vehicle is equipped with comfort seats, you can also store and set two seating positions for each additional seat with a memory.

The adjustment of the lumbar support is not stored in the memory.

## Storing

1. Radio mode, or switch on ignition
2. Set desired seating position; for driver's seat also the outside mirror and steering wheel position
3. Press MEMORY button:
   The indicator lamp within the button comes on
4. Press the desired memory button **1** or **2**:
   The indicator lamp goes out.

## Selecting a stored setting

### Convenience mode

1. Driver's door open after unlocking or ignition lock in radio position
2. Briefly press the desired memory button, **1** or **2**.

The system immediately cancels the adjustment procedure when you press one of the seat adjustment buttons or use one of the memory buttons.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Safety feature

1. Driver's door closed and ignition switched either on or off
2. Press memory button **1** or **2** and maintain pressure until the adjustment process has been completed.

CarManuals2.com

If you press the MEMORY button accidentally:
Press the button again; the indicator lamp goes out.

Do not call up a position from the memory while the vehicle is moving. There is a risk of accident from unexpected movement of the seat or steering wheel.◀

You can have your vehicle programmed to automatically dial in your own individual adjustment settings for the seat, mirrors and steering wheel whenever you use your personal remote control unit to unlock the vehicle.◀

When using the Key Memory feature always make sure that the footwell behind the driver's seat is empty and unobstructed. If you fail to do so, any persons or objects behind the seat could be injured or damaged by a rearward movement of the seat.◀

### Passenger-side exterior mirror tilt function

Automatic curb monitor

1. Select the driver's door mirror with the switch
2. When you select the transmission position R, the door mirror on the front passenger side tilts downward slightly. This allows the driver to see the area immediately adjacent to the vehicle – such as a curb – when parking, etc.

You can deactivate this automatic feature: Slide the mirror selection switch to the passenger's side position.

## Airbags

**1** Front airbags for driver and front passenger

**2** Head airbags in front and rear

**3** Side airbags in front and rear*

**4** Knee airbags for driver and front passenger

Airbags are located under the upholstery covers on the steering wheel, in the instrument panel, in the door trim panels in front and rear*, on the roof pillars and the sides of the headliner.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Protective effect

The front airbags help protect the front passengers by responding to frontal impacts in which safety belts alone cannot provide adequate restraint. When needed, the head and side airbags help provide protection in the event of side impact. The side airbags help restrain the side of the occupant's upper torso, and the head airbags help support the head while also helping provide protection against any objects penetrating into the passenger compartment. The knee airbags help protect the legs against impact against the cockpit.

The side airbags in the rear passenger area of your vehicle may already have been deactivated either at the time of manufacture or by a BMW center. You may have them activated if you desire to do so. Please contact your BMW center for additional information.◀

For information on the correct sitting position, refer to page 45.

The airbags do not deploy in response to minor accidents or rear collisions, nor do they respond to certain kinds of vehicle rollover.◀

Even when all safety guidelines are observed, there is a small residual risk that passengers will sustain facial, hand or arm injuries in isolated instances. The ignition and inflation noise may provoke a mild – usually temporary – hearing loss in extremely sensitive individuals.

## Important safety notes

Do not apply adhesive materials to the cover panels of the airbags, cover them or modify them in any other way.
Do not attempt to remove the airbag restraint system from the vehicle. If you note any indication of system malfunction, if you desire to have an airbag deactivated, or if the airbags are triggered in response to an accident, you should always entrust all inspection, repair and dismantling operations to your BMW center.
Never modify or tamper with either the wiring or the individual components in the airbag system. This category includes the upholstery in the center of the steering wheel, on the instrument panel, the side trim panels on the front or rear doors, and the roof pillars along with the sides of the headliner. Do not attempt to remove or dismantle the steering wheel.
To ensure compliance with official safety regulations, entrust disposal of airbag generators only to a BMW center.
Unprofessional attempts to service the system could lead to failure in an emergency or undesired airbag activation, either of which could result in personal injury.
Do not touch the individual components directly after the system has been triggered, because there is a danger of burns.◀

At all times, occupants should sit upright and be properly restrained – infants and small children in appropriate child-restraint systems; larger children and adults using the safety belts. Never let an occupant's head rest near or on a side airbag because the inflating airbag could cause a serious or fatal injury. Please note that the word Airbag imprinted on the door trim panel indicates the airbag's location.
Never install a rearward-facing child-restraint system on the front passenger seat. If you do so, the child could be severely injured when the airbag is triggered.
Children under 13 years of age and children less than 5 ft (150 cm) tall should always ride in the rear and the restraint systems should be secured with the vehicle's safety belts.
Accident research shows that the safest place for children in an automobile is in the rear seat. However, a child sitting in the rear seat and not properly restrained may place his or her head on or near the airbag, if so equipped.
For example, a child – even though belted – may fall asleep with his or her head against the side airbag. It may be difficult for a driver to ensure that children in the rear seat will remain properly positioned at all times and do not place their heads on or

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

near the side airbag. Therefore, we recommend that the rear side airbags, if provided, be deactivated if you plan to transport children in the rear seat.
The rear seat side airbags may already have been deactivated, either at the time of manufacture or by a BMW center. Labels in the rear door opening should indicate the status of your rear seat side airbags. If you are uncertain of their status, or wish to have the airbags activated or deactivated, please contact your BMW center.◀

Even when all these guidelines are observed, there is still a small residual risk of injuries to the face, hands and arms occurring from airbag deployment in isolated instances. The ignition and inflation noise may provoke a mild temporary hearing loss in extremely sensitive individuals.

Airbag warning information is also provided on the sun visors.

### Indicator lamp

The indicator lamp shows the airbag and belt-tensioner system's operational status as soon as you insert the remote control unit in the ignition.

System operational:

▷ The indicator lamp comes on briefly.

System malfunction:

▷ The indicator lamp fails to come on or

▷ it remains on continuously.

A system malfunction could prevent the system from responding to an impact occurring within its normal response range.

Please respond to any signs of malfunction by having the airbag system inspected immediately at a BMW center.

## Transporting children safely

Commercially-available child-restraint systems are designed to be secured with a lap belt or with the lap belt portion of a combination lap/shoulder belt. Improperly or inadequately installed restraint systems can increase the risk of injury to children. Always read and follow the instructions that come with the system.

### Child-restraint system with tether strap

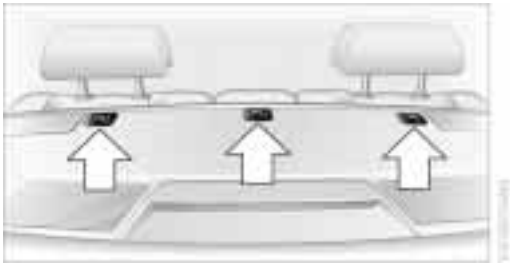

If you use a child-restraint system with a tether strap, three additional tether anchorage points have been provided – refer to the arrows in the illustration. Depending on the location selected for seating in the rear passenger area, attach the tether strap to the corresponding anchorage point to secure the child-restraint system, as shown in the illustration below.

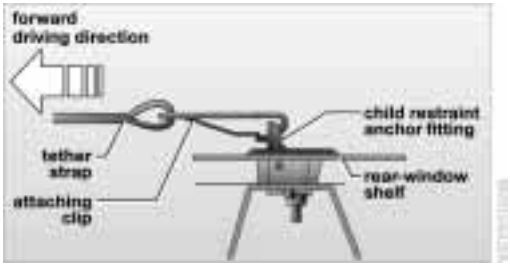


Each seating position is fitted with a head restraint.

Outer seating positions:
Lift the head restraint and pass the tether strap between the head restraint and the seat back. It is recommended to readjust the head restraint into the lowest possible position.

Center seating position:
The head restraint must be adjusted into the lowest possible position. Pass the tether strap over the head restraint.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Adjust the tether strap according to the child-restraint manufacturer's instructions.

Before installing any child-restraint system or child seat, please read the following:
Never install a rearward-facing child-restraint system in the front passenger seat of this vehicle.
Your vehicle is equipped with an airbag supplemental restraint system for the front passenger. Because the backrest on any rearward-facing child-restraint system – of the kind designed for infants under 1 year and 20 lbs. (9 kg) – would be within the airbag's deployment range, you should never mount such a system in the front passenger seat, since the impact of the airbag against the child restraint's backrest could lead to serious or fatal injuries.
If it is necessary for a child – not an infant – to ride in the front seat, certain precautions should be taken. First, move the passenger seat as far away from the instrument panel as possible. This important precaution is intended to maximize the distance between the airbag and the child. Older children should be tightly secured with a safety belt, after they have outgrown a booster seat that is appropriate for their age, height and weight. Younger children should be secured in an appropriate forward-facing child-restraint system that has first been properly secured with a safety belt. Never install a rearward-facing child-restraint system in the front passenger seat.
We strongly urge you to carefully read and comply with the instructions for installation and use provided by the child-restraint's manufacturer whenever you use such a system.
Be sure that all occupants – of all ages – remain properly and securely restrained at all times. If your vehicle is equipped with electric power seats at the rear, these will need to be returned to their standard adjustment setting position before a child-restraint system is used, refer to page 47.
Always press the safety switch for the power windows before transporting children in the rear seats, refer to page 43. This switch also disables the power rear seat adjustment. Incorrect or unsupervised adjustment of the electric power seats could lead to injuries or damage to the child-restraint system(s) installed in the rear.◀

All rear seating positions in your vehicle meet the recommendations of SAE J1819, an industry-recommended practice for securing child-restraint systems in motor vehicles.

## Child seat security

All of the rear belt retractors and the front passenger's safety belt can be locked for mounting and securing child-restraint systems.

CarManuals2.com

Information regarding this is located near the buckle latch of each safety belt.

## Lock the safety belt

Pull the entire length of the belt from the belt retractor. Allow the reel to retract the belt somewhat and engage the buckle, then tighten the belt against the child-restraint system. The retraction mechanism is now locked.

## Unlock the safety belt

Release the buckle, remove the child-restraint system and allow the belt retractor to reel the belt completely in.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# LATCH* child-restraint system

LATCH: Lower Anchor and Tethers for CHildren.

If the vehicle is equipped with electric power seats, these must be returned to their standard adjustment setting before a LATCH child-restraint system can be used, refer to page 47.◀

## Access to anchorage points

The rear outer seating positions are provided with anchors for a LATCH child-restraint system. The illustrations show the left rear seat as an example.

CarManuals2.com

The outer anchorage points for the LATCH child-restraint system are identified by flags.

Canadian models only:
The anchorage points for the LATCH child-restraint system are identified by buttons.

You can obtain an installation guide for mounting LATCH child-restraint systems at your BMW center. The guide, although not necessary for installation of a LATCH child-restraint system, will facilitate the installation and also help protect the vehicle's seating surfaces. Always observe all instructions for installation and use provided by the child-restraint's manufacturer.◀

Engage the buckle on the center belt and then pull the belt away from the child-restraint's anchorage point.

Firmly press the installation guide into the gap between the upholstery on seat and backrest, continuing until the two funnel-shaped guides snap into place in the LATCH support braces in the seat.

Pull the installation guides to remove.

# Child-safety locks

Slide down the safety levers on the rear doors:

The door can now be opened from the outside only.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Vehicle Memory, Key Memory

## How the system functions

Doubtless you have often reflected on how great it would be if you could configure your vehicle's various adjustment settings to meet your own personal requirements. In developing your vehicle, BMW has incorporated a number of options for personal adjustment which you can set in the Control Center. You can have these programmed at your BMW center.

The available configuration settings fall into two categories, according to whether their primary orientation is the vehicle – Vehicle Memory – or the individual – Key Memory. You can have up to four different basic settings adjusted for four different persons. The only requirement is that each person uses his or her own remote control.

When your vehicle is unlocked with the remote control, the vehicle recognizes the individual user by means of a data exchange with the key, and makes adjustments accordingly.

Color-coded decals are provided to help you distinguish the individual remote control units with their different settings.

## What the system can do

Please contact your BMW center for more information on the range of options available with Vehicle Memory and Key Memory.

You will see this symbol throughout the Owner's Manual. It is to remind you at appropriate places of the settings that are available to you. These positions can be looked up in the index under the respective keyword.◀

Following configuration of the memory functions, vehicle operation may differ from the description in the Owner's Manual. Should you want to sell your BMW some day, please remember to have the memory functions reset to the default state.◀

### Examples of Vehicle Memory functions

- Central locking system: set different signals as an acknowledgment
- Follow-me-home lamps: activate/deactivate function
- Daytime driving lamps: activate/deactivate function
- Alarm system: set different acknowledgment signals to confirm arming/disarming
- Alarm system: activate/deactivate interior motion sensor and tilt alarm sensor
- Automatic headlamp control: adjust sensitivity

### Examples of Key Memory functions

- Seat memory: activate/deactivate function
- Central locking system: vehicle is locked as soon as you drive off or if you have not opened a door or the luggage compartment lid after unlocking. Activate/deactivate function
- Automatic climate control: key-specific storage of the temperature, blower and air conditioner setting. Activate/deactivate function
- Check Control: set languages and units
- Seat heating: recall personal temperature distribution.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Ignition lock

Insert the remote control unit all the way into the ignition lock. This also activates the radio mode.

When the remote control unit is in the ignition lock you can start the engine without first switching on the ignition.◀

### Switching the ignition on and off

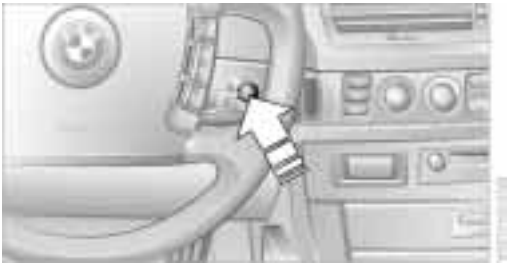

Continue to press the start/stop button to switch the radio mode on and off or switch the ignition on and off.

Do not depress the brake pedal until you are ready to start the engine. If you push the start/stop button while the brake pedal is depressed the engine will start immediately.◀

### Radio mode

Several systems, such as the Control Center, parked-car ventilation, etc., are available for use. The time and outside temperature appear in the Info Display.

The radio mode is automatically deactivated:

- After approx. 16 minutes, when a door is closed and the system does not register the presence of any individuals in the vehicle
- Immediately if the remote control is removed from the ignition lock.◀

### Ignition switched on

All vehicle systems are ready for operation.

### Ignition off

The indicator lamps in the Info Display go out. Only the automatic transmission's range display remains visible for a brief period.

### Removing the remote control unit from the ignition lock

Press the remote control unit in briefly; it is ejected and now protrudes slightly from the lock. This procedure will also switch off the ignition if it is on.

Switch off the engine before removing the remote control unit from the ignition lock.
The transmission automatically shifts to position P – Interlock.◀

If the remote control is still in the ignition lock when the driver's door is opened, a gong will sound and a message will appear in the Info Display.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Starting the engine

Do not run the engine in closed rooms, as otherwise the inhaling of toxic exhaust gases can cause unconsciousness and death. The exhaust gases contain carbon monoxide, an odorless and colorless, but highly toxic gas.
Never leave an unattended vehicle with the engine running, as such a vehicle represents a potential safety hazard.◀

1. Insert the remote control unit all the way into the ignition lock
2. Depress the brake pedal
3. Briefly press the start/stop button.

Your BMW is equipped with the convenience starting feature. After depressing the brake pedal, all you need to do is briefly press the start/stop button. The system responds by automatically engaging the starter and allowing it to run until the engine starts, after which it then disengages automatically.
The automatic starting mode will not operate or will be canceled if the battery voltage is low. The engine can be started by jump-starting, refer to page 202.◀

Do not allow the engine to warm up by leaving it running while the vehicle remains stationary. Instead, begin to drive immediately at a moderate engine speed.

If you have accidentally switched off the engine while driving, it can be restarted from a speed of approx. 3 mph/ 5 km/h by pressing the button. It is not necessary to depress the brake pedal.◀

Under the following conditions you should press the accelerator pedal halfway down when starting:

- If the engine fails to start on the first attempt, for instance, if it is very hot or cold
- During a cold start at high altitudes, from approx. 3,281 ft/1,000 m, at very low temperatures, from approx. +5 °F / –15 °C.

Refrain from starting the vehicle repeatedly at brief intervals, and avoid an excessive number of starting attempts if the vehicle fails to start; repeated activation of the starter over an extended period would allow unburned or only partially combusted fuel to enter the catalytic converter, where it can cause overheating and damage to the unit.◀

## Switching off the engine

With the vehicle stationary, briefly press the start/stop button. This also activates the radio mode.

Should exceptional circumstances render it necessary for you to switch off the engine while the vehicle is moving, press the start/stop button for approximately 1 second.
If you maintain pressure on the start/stop button for longer than two seconds while switching off the ignition, the remote control unit will be ejected.◀

Always remove the remote control unit from the ignition lock before leaving the vehicle.◀

## Parking brake

### The concept

Your BMW is equipped with an electromechanical parking brake.

CarManuals2.com

The parking brake is primarily intended to prevent the vehicle from rolling while parked.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

You have two separate options for engaging the parking brake:

- ▷ Manually, by briefly pressing the button
- ▷ Automatically, through activation of the Automatic Hold mode, refer to page 64.

An electrohydraulic mechanism then engages the parking brake to prevent the rear wheels from turning whenever you switch off the engine.
When the engine is running, parking brake engagement is controlled by the brake system's hydraulic circuits, which act on the disc brakes at the front and rear wheels.

## Brake pedal feel

Because this function is activated using the brake system's hydraulic circuits, the response of the brake pedal may change slightly. Engagement may also be accompanied by activation noise – this is normal.

## Manual engagement

Press the button briefly, the word PARK appears briefly in the Info Display. With the parking brake set, the indicator lamp (P) lights up red in the Info Display, refer to page 14.

▷ With the ignition off, the indicator lamp (P) goes out after a brief period.◀

## Manual release

With the ignition on, briefly press the button: the indicator lamp in the Info Display goes out.

▷ Provided that the remote control unit is engaged in the ignition lock, you can also release the parking brake after the engine has been switched off. This function is intended for use in automatic car washes, etc.◀

⚠ When leaving the vehicle, always release the remote control unit from the detent in the ignition lock; this precaution prevents children from disengaging the parking brake, etc.
The parking brake can still be engaged at any time when the remote control unit is released from the detent. It is only possible to disengage the parking brake with the ignition on.◀

⚠ If exceptional circumstances should make it necessary to engage the parking brake while the vehicle is in motion, maintain pressure on the button.
The indicator lamp appears in red in the Info Display. A gong sounds at the same time.
The brake lamps come on.
The vehicle continues to brake automatically for as long as you maintain pressure on the button.◀

▷ When you brake the vehicle to a virtual stop, i.e., down to a speed of approximately 2 mph/3 km/h or below, the parking brake remains engaged.
The indicator lamp (P) in the Info Display lights up red. Press the button briefly to disengage the parking brake manually.◀

## Automatic Hold

You can activate this feature after starting the engine; it then remains operational until the next time the engine is switched off.

This feature provides supplementary support during vehicle operation by automatically engaging and releasing the parking brake during stops at traffic lights, in stop-

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

and-go traffic, etc. As the vehicle then no longer tends to creep when the transmission is engaged, it is no longer necessary to hold the vehicle by depressing the brake pedal.

It prevents the vehicle from rolling backward during uphill starts.
The parking brake also engages automatically when you switch off the engine after stopping the vehicle.

You can activate and deactivate the Automatic Hold feature by selecting the "Settings" menu in the Control Center.
A description of the Control Center is provided on page 19.

## Automatic Hold activation/ deactivation

1. Select "Settings"
2. Select and confirm your selection
3. Select "AUTO P". Press the controller to activate/deactivate the desired function

▷ Automatic Hold is activated.
The green AUTO P status message in the Info Display shows you that the system is ready for operation

▷ Automatic Hold is deactivated.
The green AUTO P status message disappears from the Info Display.

▷ You can program the programmable function button on the steering wheel to control the Automatic Hold function, refer to page 53.
This will allow you to activate and deactivate the Automatic Hold function quickly and without distraction from traffic and road conditions.◀

You can also deactivate Automatic Hold by pressing the button while the vehicle is stationary. The vehicle remains stationary, the indicator lamp changes from green to red. Press the button again to release the parking brake.

CarManuals2.com

## Driving with Automatic Hold

The parking brake engages automatically when the vehicle comes to a stop. The indicator lamp in the Info Display lights up green.

To start off again, simply press the accelerator pedal. The parking brake is released automatically; the indicator lamp goes out.

⚠ Do not drive through an automatic car wash with Automatic Hold on and the engine running. The system would engage the parking brake while the vehicle is stationary.◀

## Parking with Automatic Hold

The parking brake engages automatically when you stop the vehicle and switch off the engine. The indicator lamp changes from green to red.

▷ Provided that the remote control unit is engaged in the ignition lock, you can also release the parking brake manually after switching off the engine, refer to page 63. This option is useful in automatic car washes, etc.
Automatic Hold is deactivated.◀

⚠ When leaving the vehicle, always release the remote control unit from the detent in the ignition lock; this precaution prevents children from disengaging the parking brake, etc.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## For your safety

Automatic Hold is automatically deactivated when

- ▷ the engine is switched off
- ▷ the system detects that the driver's seat is not occupied while the engine is running
- ▷ the hood is opened while the engine is running
- ▷ the luggage compartment is opened with the transmission in reverse while the engine is running, and
- ▷ when the parking brake is used to bring the vehicle to a stop.

The indicator lamp (P) changes from green to red, and the AUTO P letters in the Info Display disappear.

Before starting off again, briefly press the button to disengage the parking brake manually, refer to page 63, or reactivate Automatic Hold, refer to page 64.

⚠ Before leaving the vehicle with the engine running, always move the automatic transmission's selector lever to position P and ensure that the parking brake is engaged. The vehicle could start to roll if you fail to observe these precautions. Never leave an unattended vehicle with the engine running, as such a vehicle represents a potential safety hazard.◀

▷ Automatic Hold is automatically deactivated whenever the system detects any tendency for the wheels to spin in response to slippery road surfaces. Note the status reports in the Check Control. You can find more detailed information on Check Control on page 85.◀

## Malfunctions

If a malfunction occurs, the indicator lamp (P) lights up yellow in the Info Display and a status report will appear in the Check Control. Please note any supplementary information that appears in the Control Display.

## Releasing the parking brake manually

You can respond to any interruptions in the supply of electrical power, for instance, if the battery is discharged or disconnected, by releasing the parking brake manually.

CarManuals2.com

⚠ Before proceeding to release the parking brake manually, and each time you park the vehicle without engaging the parking brake, always ensure that the automatic transmission's selector lever is in position P, refer to page 67. Note the range indicated in the Info Display.
If it is not possible to avoid parking on an extremely steep slope, use some supplementary means, such as a wheel chock, to make certain that the vehicle will not roll, refer to page 198. Otherwise the danger exists that the vehicle could roll when parked on a very steep hill.◀

Should it also be necessary to release the automatic transmission's lockout manually, for instance, if the battery is discharged, always adhere to the following sequence:

1. If necessary, start by manually releasing the parking brake
2. Then release the automatic transmission's lockout manually, refer to page 70.

Jump-starting and towing, refer to pages 202 and 203.

## What you will need

**1** Screwdriver handle

**2** Emergency-release tool

**3** 10 mm open-end wrench

You will find the required tools in the onboard tool kit mounted on the inside of





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

the luggage compartment lid, refer to page 195.

Insert the emergency-release tool in the screwdriver handle as shown in the illustration.

## Releasing

1. Remove the floor mat and the cover on the spare tire
2. Guide the emergency-release tool with the screwdriver handle into the opening, arrow **1**
3. Apply the open-end wrench to the hexagon on the emergency-release tool.
   Press against the resistance from the spring to guide the emergency-release tool all the way in, then hold it in place. Turn the emergency-release tool in the direction indicated by arrow **2**, continuing until you hear the mechanism snap into place and feel resistance; maintain pressure on the tool after the mechanism engages
4. Use the open-end wrench to turn the emergency-release tool against the drive unit's mechanical resistance, continuing to rotate it in arrow direction **2** until you feel a substantial increase in turning effort.

CarManuals2.com

To prevent possible damage to the rear brakes, always make sure that the parking brake is completely released before driving the vehicle.◀

5. Return the tools to their places
6. Return the spare tire cover and the floor mat to their original locations.

Have any defects repaired at the nearest BMW center. The technicians can also return the parking brake to normal operational status after it has been released manually in response to malfunction.◀

Following manual release, the actual status of the parking brake may vary from that displayed by the indicator lamp.◀

## Operation after interruptions in power supply

The parking brake may only be used again, if it was released manually after an interruption in power supply, i.e. as a result of a discharged or disconnected battery. If this is not done, the parking brake may fail to operate correctly. Even with the parking brake engaged, there would be a danger of the vehicle rolling on steep hills.◀

Once the electrical power supply has been restored you can again use the parking brake:

With the ignition on and the vehicle stationary, press the button briefly three times at intervals of approx. 5 seconds. This initializes the system as follows:

- ▷ Initializing the released setting
- ▷ Engage – the system registers the new status and the brake setting is initialized. The indicator lamp (P) in the Info Display lights up red.
- ▷ Release – the parking brake is ready for operation. The indicator lamp (P) in the Info Display goes out.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Automatic transmission with L mode

While you can drive as with a conventional automatic transmission, you also have the option of retaining your current gear selection with the L/D button on the steering wheel, refer to page 68.

## Transmission ranges

P R N D

## Program display

L1 – L6

## Buttons on steering wheel

L/D –

## Selecting transmission range

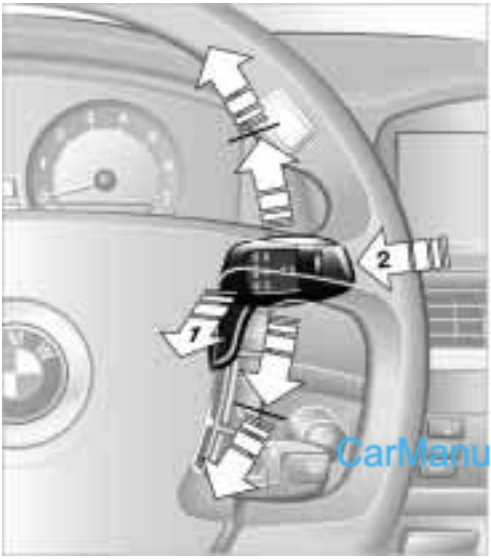


The selector lever is at the center position. To select transmission ranges D, R or N, always start by pulling toward the steering wheel, arrow **1**, then press up or down. Note the range indicated in the Info Display.◀

- ▷ Range D or R:
  Press the selector lever up or down, continuing to apply pressure to move it past the detent
- ▷ Neutral N:
  Press the selector lever as far as, but not beyond, the detent
- ▷ Park P:
  Press button P, arrow **2**.

The selector lever immediately returns to the center position when released.

Depress the brake pedal before shifting out of P or N; the shift command will not be executed unless the brake is applied – Shiftlock.
To prevent the vehicle from creeping after you select a range, maintain pressure on the brake pedal until you are ready to start. You can activate the Automatic Hold feature to suppress the vehicle's tendency to creep, refer to page 63.◀

Shift commands are transmitted electronically. To help avoid malfunctions, each command undergoes a plausibility check prior to execution.

Remember to observe the Check Control for status messages.

You can find additional information on the Check Control on page 85.

To prevent the vehicle from rolling, always select position P and engage the parking brake before leaving the vehicle with the engine running. Note the information provided in the Info Display. Never leave an unattended vehicle with the engine running, as such a vehicle represents a potential safety hazard.◀

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## P – Park

P Press the button.
Select only when the vehicle is stationary. The transmission lockout prevents the rear wheels from turning. The lockout disengages when you press the selector lever toward D, N or R while the engine is running.

P is automatically engaged when you remove the remote control unit from the ignition lock after parking the vehicle.◀

## R – Reverse

R Press the selector lever upward, continuing to apply pressure to move it past the detent. Select R only when the vehicle is stationary.

## N – Neutral

N Press the selector lever as far as the detent, but no further. Select N only if your journey is interrupted for a long period.

▷ From D press the selector lever up

▷ From R press the selector lever down.

Note the arrows indicating direction in the range display.

N is selected automatically whenever the remote control unit remains locked in the ignition lock after the ignition is switched off. This function is useful in automatic car washes, etc.
After approx. 30 minutes the system automatically engages P. Remember to observe the Check Control for status messages.◀

## D Drive – Automatic

D Press the selector lever down, continuing beyond the detent. This is the range recommended for normal vehicle operation. All forward gears are available.

Under normal operating conditions, fuel consumption is lowest when driving in position D.

## Kickdown

The kickdown mode provides maximum acceleration.
Press the accelerator pedal beyond full-throttle detent point.

CarManuals2.com

## L mode

We recommend the L mode for times when you wish to suppress certain shifts, for instance, when ascending or descending steep grades.

When the L mode is activated the transmission remains in your current gear, which also appears in the Info Display, refer to page 67. The transmission continues to shift through the available ratios, but does not proceed beyond the gear in the display.

### Activating the L mode

Press the L/D button on the steering wheel.

The transmission downshifts when you press the buttons on the rim of the steering wheel briefly. The newly selected limit appears in the Info Display.

The transmission only executes downshifts that will result in a plausible combination of vehicle and engine speeds. The transmission will no longer execute upshifts beyond the selected range.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Deactivate the L mode to obtain maximum acceleration for overtaking maneuvers, etc.◀

### Deactivating the L mode

▷ Press the L/D button or

▷ press the selector lever into position D once again.

## Automatic transmission with Steptronic*

While you can drive as with any conventional automatic transmission, you also enjoy the option of shifting manually at the steering wheel, refer to the next column.

### Transmission ranges

P R N D

### Program display

S or M1 – M6

### Buttons on steering wheel

S/M/D + –

### Selecting a transmission range

The procedure for selecting transmission ranges is the same as that employed in the L mode, refer to page 67.

### Sport program and manual operation

When you press the S/M/D button on the steering wheel once, the system responds by activating the transmission's Sport program, as indicated by the letter S in the Info Display, refer to previous column. We recommend this program for performance-oriented driving.

When you press the S/M/D button a second time the transmission switches to its manual mode; press again to return to the automatic program.

You can also return to the standard automatic program by reselecting D.

In the manual mode the transmission upshifts when you briefly tap the buttons on the rear of the steering wheel. You downshift by briefly pressing the buttons on the front of the steering wheel. The Info Display shows the manual ranges M1 through M6.

Upshifts and downshifts are executed only when they will result in a plausible combination of engine and vehicle speed; thus, for example, a downshift that would cause the engine to overrev will not be executed by the system. The selected gear appears briefly in the Info Display, followed by the current gear.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

To obtain maximum acceleration, for passing maneuvers, etc., during operation in the manual mode, use the kickdown or downshift manually.◀

## Malfunctions

A status report will appear in the Check Control to alert you to any malfunctions in the transmission-control system. Please note any supplementary information that appears in the Control Display. The directional arrows also start to flash in the Info Display.

While it will remain still possible to move the selector lever to any desired position, the transmission will revert to operation in its default mode with only a limited number of forward gears.

Some types of malfunction will make it impossible to engage all gears.

The engine may respond with reduced output when accelerating from a standing start.

If this happens, avoid extreme engine loads and consult the nearest BMW center.

If no status messages appear in the Info Display you should accelerate carefully to confirm that you are driving in the desired direction.
Never work in the engine compartment with any of the forward or reverse gears engaged, as the vehicle could start to move. Engage the parking brake, refer to page 62.◀

## Releasing transmission lockout manually

You can respond to any interruptions in the supply of electrical power, for instance, if the battery is discharged or disconnected, by releasing the transmission lockout manually.

To prevent the drive wheels from locking up and sliding, the transmission lockout must always be released manually before the vehicle is towed.◀

Press the brake pedal before releasing the transmission lockout manually. If the brakes are not applied, the vehicle could start to roll if parked on a steep slope.
The transmission lockout should only be released for towing. Remember to engage the transmission lockout when you repark the vehicle after moving it.
Should it also be necessary to release the parking brake manually, owing to a discharged battery, etc., always adhere to the following sequence:

1. Start by manually releasing the parking brake, refer to page 65
2. Then proceed to manually release the transmission lockout.◀

Jump-starting and towing, refer to pages 202 and 203.

## Releasing

1. Use the vehicle key to release the cover panel beneath the instrument panel by turning the lock counterclockwise, then fold down the cover

CarManuals2.com

2. Use the strap **1** to pull out the release lever, continuing until it snaps into



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

place – the transmission lockout is released.

Re-engage the transmission lockout after parking the vehicle at its destination. Otherwise there is a danger that the vehicle could start to roll if parked on a steep slope.◀

### Engaging again

1. Disengage the release lever by pressing it together with the red detent lever, arrow **1**
2. Guide the release lever all the way back into its original position – the transmission lockout is again engaged
3. Fold up and lock the cover panel. Now – and not before – the key may be removed.

Once the transmission lockout has been re-engaged, the warning in the Check Control should disappear, and the symbol in the Info Display should change from N to P. Should this fail to happen, there is a danger that the vehicle could start to roll.◀

Information on jump-starting, tow-starting and towing begins on page 202.

## Turn signal indicators/ headlamp flasher

**1** High beams – blue indicator lamp

**2** Headlamp flasher – blue indicator lamp

**3** Turn signal indicators – the green indicator lamp flashes, accompanied by a periodic ticking from the turn signal indicator relay

### Using turn signal indicators

Move the lever beyond the detent position. It then returns to the center position when released. Press the lever as far as the detent to switch off the turn signal indicators.

### Signaling briefly

Press the lever up to but not beyond the detent. It then returns to the center position when released.

If the flashing of the indicator lamp and the ticking from the relay are both faster than normal, this indicates that one of the bulbs is defective; if a trailer is attached, this could also indicate that one of its turn signal indicator bulbs is defective.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Wiper system

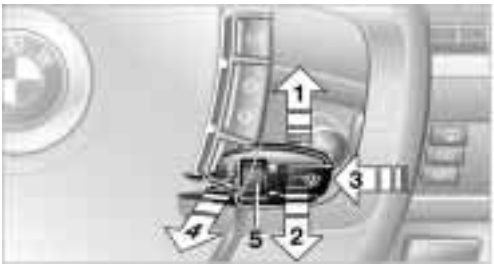


1 Standard wiper speed: briefly press once.
Fast wipe: briefly press twice

2 To switch off wipers or for brief wipe

3 To activate/deactivate rain sensor

4 To clean windshield and headlamps

5 To adjust rain sensor sensitivity level

The lever automatically returns to its initial position when released.◀

## 1 Standard wiper speed

The system automatically reverts to operation in the intermittent mode whenever the vehicle stops.

## Fast wiper speed

You can also select this position by pressing the lever upward past the detent.

The system automatically reverts to operation in the standard wiper speed whenever the vehicle stops.

## 4 Cleaning windshield

The system sprays washer fluid against the windshield and activates the wipers for a brief period.

## Cleaning headlamps

Each fifth time you press into position **4** to clean the windshield while the headlamps are on.

Do not use the washers if there is any danger that the fluid will freeze on the windshield. If you do so, your vision could be obscured. To avoid freezing, use a washer fluid antifreeze, refer to page 73. Avoid activating the washer when the reservoir is empty, as damage to the pump could result.◀

## Windshield washer nozzles

The windshield washer nozzles and the windshield itself in the area around the wipers are heated automatically when the ignition is switched on.

## Rain sensor

The rain sensor is located on the windshield, directly in front of the interior rear-view mirror.

### Activating the rain sensor

Press briefly with ignition in radio mode. The indicator lamp comes on. The wipers will always respond by completing at least one sweep of the windshield.

CarManuals2.com

### Adjusting rain sensor sensitivity level

Turn the rotary knob **5**.

### Deactivating the rain sensor

Press the button again. The indicator lamp goes out.

The rain sensor is automatically deactivated when you switch off the ignition.◀

Deactivate the rain sensor when passing through an automatic car wash. Failure to do so could result in damage caused by undesired wiper activation.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Selecting wiper fold-out position

Important for changing wiper blades, when folding away from windshield to prevent blades from sticking when ice forms, etc.

1. Switch off the engine and remove the remote control unit from the ignition lock
2. Press the wiper lever up and maintain pressure for about 3 seconds until the wipers are roughly vertical – this is the fold-out position.

After folding the wipers back against the windshield you will need to reactivate the wiper system:

1. Insert the remote control unit to activate the radio mode in the ignition lock
2. Apply brief upward pressure to the wiper lever. The wipers return to their retracted position and are ready for normal operation.

To prevent damage to the wipers, always fold them back against the windshield before switching on either the radio mode or the ignition.◀

CarManuals2.com

## Washer fluid

### Windshield and headlamp washer system

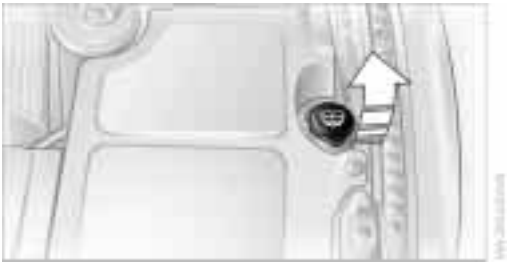

Capacity: 6.3 US quarts (6 liters).

Fill with water and – if required – with a washer antifreeze, according to manufacturer's recommendations.

We recommend that you mix the washer fluid before adding it to the reservoir.◀

Washer fluid antifreeze is flammable. Always keep it well away from sparks and open flames, and store it in tightly closed containers well out of the reach of children. Always observe the instructions for use provided on the container.◀

## Programmable cruise control

### The concept

The programmable cruise control is available for use at speeds of approx. 20 mph (30 km/h) and higher. The vehicle maintains and stores the speed that you set using the lever mounted on the steering column.

You can also use the multilevel preset mode to store 6 desired speeds for later selection with the lever on the steering column, refer to page 75.

This feature assists you in quickly adapting the vehicle speed to specific road conditions, e.g. changes in speeds limits.

Do not use the cruise control when driving on winding roads, in case of heavy traffic or poor road conditions – snow, rain, ice, loose road surface – that do not permit a constant speed.◀

### One lever for all functions

### Activating system

Press **1** or pull **2** lever as far as the detent. The system maintains and stores the current vehicle speed.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### 1 Maintaining and storing speed, accelerating

Press the lever as far as the detent:
The system maintains and stores the current vehicle speed. Every time you tap the lever the vehicle's speed increases by roughly 1 mph (1 km/h).

Press the lever longer:
The vehicle accelerates without pressure on the accelerator pedal. The system maintains and stores your current speed as soon as you release the lever.

The vehicle may accelerate beyond the preset speed on steep downhill stretches where the engine's braking effect alone may not be sufficient to slow the vehicle. Speed can drop on uphill grades if the engine output is insufficient.◀

### 2 Maintaining and storing speed, decelerating

Pull lever back to detent:
The system maintains and stores the current vehicle speed. Every time you tap the lever the vehicle's speed decreases by roughly 1 mph (1 km/h).

Pull the lever longer:
The throttle aperture is automatically reduced, slowing the vehicle. The system maintains and stores your current speed as soon as you release the lever.

### 3 Interrupting cruise control

Briefly press the lever up or down while the cruise control is active.

In addition, cruise control is interrupted automatically

- ▷ when you apply pressure to the brake pedal
- ▷ when you select the automatic transmission's neutral range N
- ▷ when the DSC system, Dynamic Stability Control, is in active operation.

### 4 Recalling stored speed

Briefly press button **4**:
The vehicle accelerates to and maintains the last speed stored.

## Deactivating system

When the ignition is switched off, the system is deactivated and the stored speed is deleted.

## Displays in the Info Display

CarManuals2.com

**5** Display of speed ready for recall

- ▷ ▶ – cruise control activated
- ▷ ▷ – cruise control deactivated

**6** Display of stored desired speed – multilevel preset function

**5** and **6** are displayed when the system is activated.◀

## Activating multilevel preset function

Push **1** or pull **2** the lever beyond the detent.

The current driving speed is maintained, stored and displayed as the available speed **5**.

If no desired speeds are stored, you can increase or reduce the speed by 5 mph (10 km/h) with the multilevel preset function activated each time you press or pull the lever beyond the resistance point.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Changing preset level

Push **1** or pull 2 the lever beyond the detent. The preset speed progresses to the next desired speed. The lowest speed that is possible to select is roughly 20 mph (30 km/h).

### Interrupting the cruise control

With the cruise control active, briefly tap the lever up or down.

### Hiding display for multilevel preset function

When activated, press the lever upward or downward for approx. 3 seconds.

### Showing display for multilevel preset function again

Press **1** or pull **2** the lever beyond the detent.

## Deactivating the multilevel preset function

The multilevel preset function is also deactivated when you switch off the ignition.

## Storing desired speeds

### With vehicle stationary

Switch on the ignition.

Press **1** or pull **2** the lever beyond the detent: the selectable speed level is displayed with **5**.

- ▷ To increase desired speed: Press the lever forward
- ▷ To decrease desired speed: Pull back the lever
- ▷ To store desired speed: Maintain pressure on button **4** for approx. 3 seconds. The stored desired speed appears in **6**.

▷ If 6 speeds have already been stored, it will be necessary to delete one before entering a new preset speed.◀

### While driving

Activate multilevel preset function.

Maintain pressure on button **4** for approx. 3 seconds. The respective driven speed is applied as the desired speed and displayed with **6**.

▷ If all of the graduations flash at once this indicates that 6 desired speeds have already been stored. You must then delete at least one.◀

## Deleting desired speeds

Select the desired speed **5**.

Press button **4** for approx. 3 seconds.

# Active cruise control*

## The concept

With active cruise control you can select a desired speed which is not only automatically maintained when driving on open roadways, but also varied to maintain a selected distance setting as slower traffic is encountered.

Active cruise control is a technological advance over the familiar cruise control and is a welcome relief from the constant adjustment of speed that can accompany driving in traffic on freeways or other high-speed thoroughfares. Especially on longer





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

trips, the system can reduce fatigue and tension, while increasing your enjoyment of driving. Please use it safely and responsibly.

In addition to holding a steady cruising speed, if you do encounter slower vehicles ahead, active cruise control will – within the scope of given possibilities – adjust your vehicle's speed automatically so that one can flow with the traffic without frequent intervention by the driver. If, for example, while cruising at the selected speed, you begin to approach a slower vehicle ahead of you in the same lane, the system will reduce your vehicle's speed to the same as that of the vehicle ahead to maintain your selected distance setting between your vehicle and the vehicle ahead. There are four settings for distance, which is additionally speed-dependent. Based on your selected distance setting, the system automatically decreases the throttle setting and lightly applies the brakes if necessary. The vehicle brake lamps will automatically illuminate to signal a following driver to take action. In addition, it may be necessary for the vehicle to downshift to maintain the distance setting selected. If the vehicle ahead speeds up or when the lane ahead becomes clear, your vehicle will accelerate to the speed you have selected by increasing the throttle setting and shifting gears as needed.

CarManuals2.com

Active cruise control is not and must not be used as a collision avoidance/warning system.◀

Since this active cruise control system is a new technology and operates differently from conventional cruise control systems which you may be accustomed, you are strongly urged to read all of the pages relating to this system before use. Pay special attention to the information contained in the Things to know about active cruise control section in this manual beginning on page 79.◀

## Info Display screen contents

**1** Stored desired speed display

**2** Detected vehicle display. Lights up when vehicle driving ahead is detected

**3** Selected distance to vehicle driving ahead

**4** Digital speed display.
Appears briefly when you select your desired speed, refer to page 77.

**1**, **2** and **3** are displayed when the system is activated.◀

The system is activated.
The display appears as soon as you activate the system and no vehicle is detected driving ahead.

Vehicle detected.
The display lights up when a vehicle is detected driving ahead.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

The system requests you to intervene by braking or with an evasive maneuver. The display flashes. The active cruise control cannot automatically restore the distance to the vehicle driving ahead. You will find more detailed information on page 80.

Automatic intervention by ABS or DSC, or you actuate the parking brake while driving. The active cruise control now only intervenes by braking.

## Operating the active cruise control

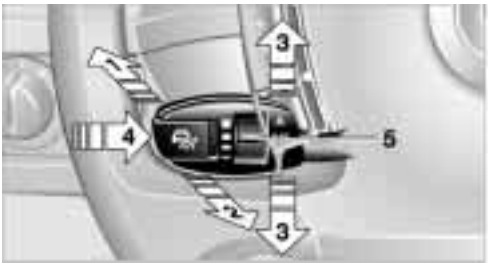


1 Activate system,
store and increase desired speed

2 Activate system,
store and decrease desired speed

3 Deactivate system

4 With system deactivated:
Briefly press the button to recall the stored speed and distance

4 With system activated:
Increase desired speed by 1 mph (1 km/h) with each press of the button

5 Select distance to vehicle driving ahead. You can choose from four available distance settings. You will find more detailed information on page 78

Adjust your desired speed to the traffic conditions and remain ready to brake at all times. Great differences in speed to the vehicles driving ahead, for when quickly approaching a truck or when another vehicle swerves into your lane, cannot be compensated for by the system.◀

## Activate system

From approx. 20 mph (30 km/h) you can activate the system by pressing the lever forward or pulling it back:
The current driving speed is stored as a desired speed and briefly displayed in the speedometer, see arrow.

If the system cannot be activated, the display ACC --- mph (km/h) briefly appears in the speedometer. The system may have been automatically deactivated, refer to Deactivate system, or a malfunction has occurred.
To call up Check Control messages, refer to page 86.◀

## 1 Desired speed store and increase

Press the lever forward:
The system adopts and stores your current speed as a desired speed. The speedometer indicates this speed.
Subsequently pressing forward increases the desired speed to the next 5-mile place (10 km/h).
Each time the lever is pressed forward again, the desired speed is increased by another 5 mph (10 km/h) until a maximum of 110 mph (180 km/h) is reached. The

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

speed then displayed is stored and reached on a clear road.

## 2 Desired speed store and decrease

Pull back the lever:
The current driving speed is rounded off to the next 5-mile place (10 km/h), displayed and stored.
Each time the lever is pulled back again, the desired speed is decreased by another 5 mph (10 km/h) until the minimum speed of 20 mph (30 km/h) is reached. The speed then displayed is stored and reached on a clear road.

## 3 Deactivate system

Press the lever up or down while the system is active. The displays in the speedometer disappear. You can use the system again as required.

In addition, the system is deactivated automatically:

- when you apply pressure to the brake pedal
- when you select the automatic transmission's neutral range N
- when you deactivate the Dynamic Stability Control DSC
- when you actuate the parking brake during driving
- when the system reduces the speed to below 20 mph (30 km/h) due to a traffic situation.

The system deactivates automatically when the speed is set to below 20 mph (30 km/h). A gong sounds and a message appears in the Check Control. The active intervention of the driver is required.◀

### Background lighting

You can switch off the background lighting of the speedometer and tachometer

- when you have deactivated the system
- when the prewarning field in the tachometer has gone out, refer to page 82
- when the destination guidance system of the navigation system is deactivated.

Press the lever up or down for approx. 1 second.

## 4 Resume to stored desired speed and distance setting

Press button **4**:
The displays appear in the speedometer. The system is reactivated and uses the last stored desired speed and distance setting.

## 4 Fine adjustment of desired speed

In the activated state, the desired speed increases by 1 mph (1 km/h) each time button **4** is pressed briefly.

## 5 Select distance

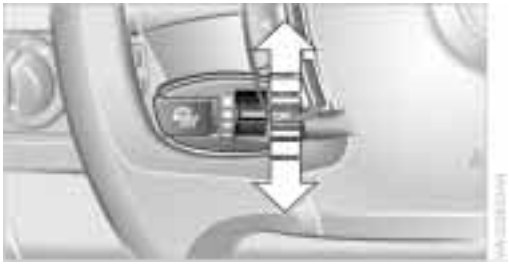

You can choose from four distance steps.

- Rotary switch upward:
  Increase distance
- Rotary switch downward:
  Decrease distance.

The selected distance is displayed in the speedometer.

Distance 1

Distance 2

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Distance 3

Distance 4
This distance is always set when the system is used for the first time after starting the engine.

Use good judgment to select the appropriate following distance given road conditions, traffic, applicable laws and driving recommendations for safe following distance.◀

## Things to know about active cruise control

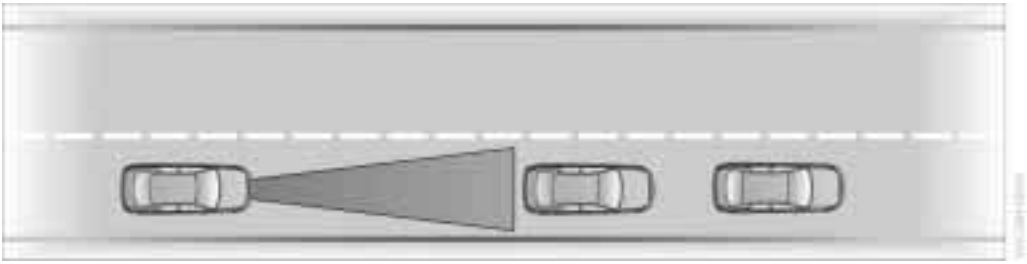

As with conventional cruise control systems, active cruise control in no way diminishes or substitutes for the driver's own personal responsibility, alertness and awareness in adjusting speed, braking or otherwise controlling the vehicle. The driver should decide when to use the system on the basis of road, traffic, visibility, and weather conditions. Active cruise control is intended for use on highway-type roadways where traffic is moving relatively smoothly. Do not use this system in city driving; heavy traffic such as during rush hour; on curvy, winding roads, slippery roads or roads with sharp curves such as highway off-ramps; during inclement weather such as snow, strong rain or fog; or when entering interchanges, service/parking areas or toll booths. It is also important to regulate your vehicle's speed and distance setting within applicable legal limits. Always be ready to take action or apply the brakes if necessary, especially when the system is actively following a vehicle in front of you.◀

CarManuals2.com

Always remember that the range and ability of the system does have physical limitations. It will not apply the brakes or decelerate your vehicle when there is a slow-moving vehicle, stopped vehicle or stationary object ahead of you, as for example, at a traffic light or a parked vehicle. Also, the system does not react to oncoming traffic, pedestrians or other type of potential traffic such as a rider on horseback. It is also possible that the system may not detect smaller moving objects such as motorcycles or bicycles. Be especially alert when encountering any of these situations as the system will neither automatically brake, nor provide a warning to you. Also, be aware that every decrease in the distance setting allows your vehicle to come closer to a vehicle in front of you and requires a heightened amount of alertness.◀

If while your vehicle is actively following a vehicle in front of you and the vehicle ahead speeds up or the lane ahead becomes clear, then your vehicle will accelerate to the speed you have selected. Be aware that changing to a clear, unobstructed lane will also result in your vehicle accelerating.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Be certain to deactivate the system when you pull into an exit lane for a highway off-ramp.◀

Also, vehicles traveling in a staggered manner on a highway may cause a delay in the system's reaction to a vehicle in front of you or may cause the system to react to a vehicle actually in the lane next to you. Always be ready to take action or apply the brakes if necessary.

Active cruise control can only decelerate the vehicle to approx. 20 mph (30 km/h). If the system reduces vehicle speed below 20 mph (30 km/h) or if DSC/ABS is engaged while driving, the system will automatically deactivate.

Remember, the system cannot stop your vehicle. In addition, the system is deactivated whenever the driver applies the vehicle brakes, shifts the transmission from drive/D to neutral/N, or deactivates DSC. After any deactivation, the system will no longer automatically activate the vehicle brakes, which means the driver must intervene and resume manual braking. You should then reactivate the system only when you are fully aware of the prior speed and distance settings.◀

Active cruise control may brake when you reduce the stored desired speed; however, the driver must constantly monitor traffic and intervene if necessary.

When you switch off the engine or ignition, active cruise control is fully switched off, too, and any settings you have selected are canceled.

## Behavior in curves

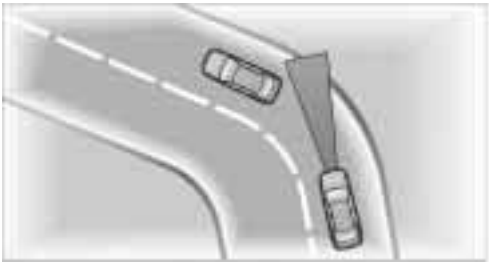

Because of the limited range of the system, it is possible that in curves or on the peaks and valleys of hilly roads, a vehicle ahead may be recognized late, or not at all. Therefore, it is up to the driver to select a speed that is prudent in view of the curves and terrain of the roadway.

In approaching a curve, it is possible that active cruise control would react briefly to a vehicle in the adjacent lane. In addition, the system can sense if your vehicle is in a curve and may not accelerate. If your vehicle decelerates in either case, you can choose to overcome the deceleration by briefly pressing the accelerator pedal.

## Driver interventions

Anytime the driver presses down on the accelerator pedal, any automatic braking action by the system is interrupted until the pedal is fully released. After doing this, release the accelerator and the system again controls your cruising speed and distance setting. While driving with activated system, resting your foot on the accelerator pedal will cause the system not to brake even if necessary. Be certain that floormats or other objects on the vehicle floor do not interfere with movement of the accelerator pedal.◀

While active cruise control is capable of braking your vehicle automatically when you approach a slower vehicle ahead, it is important to be aware that the ability of the system to apply the brakes is also limited, if you are driving down a steep grade or when you reduce your desired speed sharply. The system cannot stop your vehicle. It uses only a portion of

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

braking system capacity and does not utilize the full capacity of the vehicle braking system. Therefore, the system cannot decrease your speed for large differences in speed between your vehicle and the vehicle ahead. Examples: during emergency braking, when you approach a vehicle traveling at a much lower speed than your own speed such as approaching a toll booth or when a much slower vehicle cuts in front of you at close range.◀

CarManuals2.com

Whenever active cruise control recognizes a situation that requires driver braking because the system capacity has been reached or has been exceeded, the system alerts the driver by flashing this symbol in the instrument cluster and sounding a chime.

## Swerving vehicles

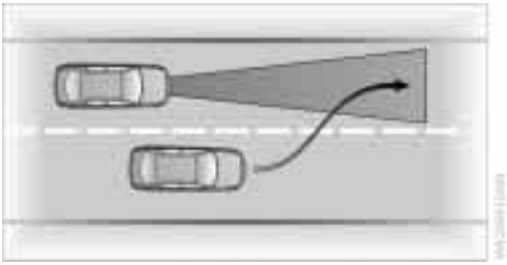

When a vehicle moves from an adjacent lane into your lane, active cruise control will not recognize this vehicle until it is fully in your lane ahead of your vehicle.

## Malfunctions

The build-up of foreign material – e.g., snow, ice, dirt, road debris, etc. – can lead to reduced detection performance of active cruise control. You should check the sensor under the front bumper and clean it as necessary prior to driving your vehicle. If the sensor becomes covered by foreign material or has a malfunction, it is possible that the sensor will no longer be able to detect vehicles in front of you. After the system recognizes that the sensor is no longer functional, a message is displayed in the Check Control and an acoustic signal is emitted, refer to page 85. Also observe the additional information provided in the Control Center.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Everything under control

## Odometer, outside temperature display, clock

When the ignition is off you can briefly activate the time, outside temperature and odometer displays by pressing the knob at the upper left of the Info Display.

### 1 Outside temperature display, clock

The outside temperature and the time displays are active starting at the radio mode in the ignition lock.

You can change the units of measure – °C/°F – in the "Settings" menu, refer to page 91.

Setting the clock, refer to page 91.

#### Ice warning

A warning signal sounds when the outside temperature falls to roughly +37.5 °F (+3 °C); this is accompanied by a message in the Check Control.

Please bear in mind that the ice warning does nothing to alter the fact that glare ice may be present on roads at temperatures higher than +37.5 °F (+3 °C), for instance, on bridges and shade-covered surfaces.◀

### 2 Odometer

The odometer panel also provides displays for the computer and the Check Control.

Regardless of the current display mode, you can view the odometer reading for a short period by pressing the knob at the upper left of the Info Display.

Check Control, refer to page 85.
Computer, refer to page 86.

### 3 Trip odometer

The trip odometer must be present in the display before you can reset it to zero. Reset by pressing the knob at the upper left of the Info Display.

## Tachometer

The orange warning sector gradually moves upward as the engine warms to its



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

normal operating temperature. The segments disappear in sequence as the engine warms to its normal operating temperature.

Avoid allowing the engine speed to rise as far as the orange warning sector whenever possible.

# Service Interval Display

## Info Display screen contents

The distance/period remaining until your next service briefly appears when you switch on the ignition.

The Info Display immediately switches to its computer mode when you press one of the two buttons in the turn signal lever, refer to page 86.◀

CarManuals2.com

## Control Display screen contents

You can view additional information on service and maintenance procedures by selecting the "Car data" menu.

1. Select and confirm

2. Select "Service" and confirm
3. The display shows a list of selected service and maintenance procedures, as well as legally-mandated official inspections.

## Red sectors

The service deadline has already passed.

## Yellow sectors

The deadline for service or an official inspection is approaching. Please contact your BMW center for an appointment.

## Green lamps

No service is currently required. If you desire, certain maintenance operations can be carried out at the next service at the customer's request.

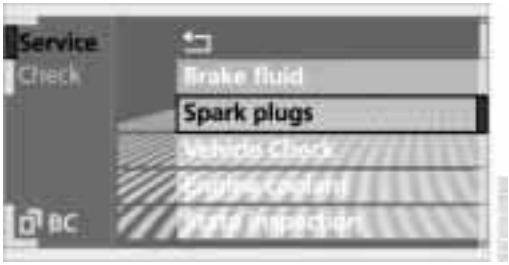


You can request more detailed information on every entry.

Turn the controller to scroll through the list, then confirm the selected entry.

Confirm to exit the list.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Confirm to exit the display.

The Service Interval Display does not continue counting down to the next service during periods when the vehicle is stored with the battery disconnected or the battery switch OFF.
Please remember that brake fluid should be changed every two years at the latest, even if the display does not yet indicate that service is required, refer to page 192. This same precaution applies to all of the other service and maintenance operations scheduled according to periodic intervals, as opposed to mileage.◀

## Displaying and entering dates for legally prescribed emission and vehicle inspections

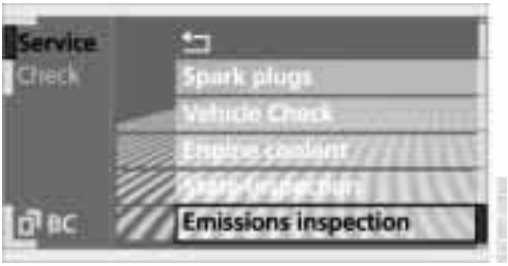


1. Select "Emissions inspection" or "State inspection" and confirm
2. Turn the controller to select date input

3. Confirm the inspection date. The first part of the date entry is activated – here month.
   - ▷ Turn to reset
   - ▷ Press to store and move to the next entry – here year.
     The system adopts the date the last time you store your entry
4. Press the controller to select "CONFIRM".

A requirement is that you have correctly set the date and time in the Control Display, refer to page 91.◀

## Info Display screen contents

If the deadline for your next emissions or state vehicle inspection is approaching, the remaining distance and time will appear briefly when you switch on the ignition.

Your Service Advisor will determine your vehicle's current service requirements by reading out the data stored in the vehicle's key.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Check Control

## Info Display screen contents

Messages and status reports appear in text form accompanied by an indicator lamp symbol. The alert is accompanied by a gong.

Status reports warning of system malfunctions are assigned one of two priority ratings:

### Priority 1:

These status messages and malfunction reports are signaled by a gong. Simultaneous defects will be displayed consecutively. These messages cannot be deleted and they remain in the display until the problem is corrected. Supplementary information is also shown in the Control Display, refer to Automatic display in the Control Display.

### Priority 2:

These status messages and malfunction reports appear in the Info Display for approx. 20 seconds.

Briefly press the CHECK button on the turn signal indicator lever to cancel the message in the display, if allowed by priority rating.

Selecting stored status reports for viewing in the Control Display, refer to next page.

## Check Control symbol and messages in the Control Display

Depending on the status of the monitored systems, the Check Control symbol appears in different colors.

### Green

No malfunctions are present in the monitored systems.

### Yellow or red

A defect or malfunction has been detected in the monitored system. Depending upon how serious the problem is, a supplementary message may also appear in the Control Display.

Selecting stored status reports for viewing in the Control Display, refer to next page.

The symbol in the status line also indicates the status of the Service Interval Display, refer to page 24.◀

CarManuals2.com

## Automatic display in the Control Display

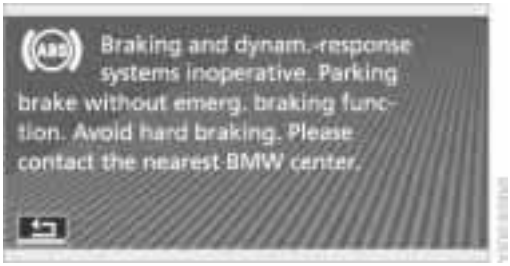


These supplementary messages are intended to assist you in assessing the severity of malfunctions; they provide you with the information you need to decide on the best way to respond.

Select and confirm to switch off the display.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Selecting stored status reports for viewing in the Control Display

1. Select "Car data"
2. Select and confirm

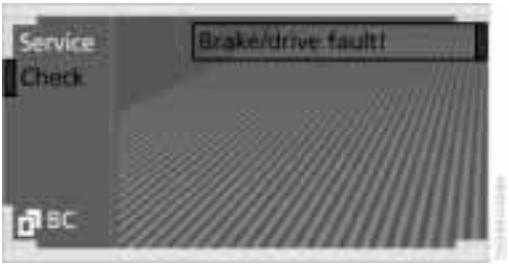


3. Select "Check" and confirm
4. The stored status reports appear in the display. Select the desired report and confirm your selection.

The display disappears when the symbol is acknowledged.

### Displays after completion of trip

Selected malfunction reports generated during the trip are shown consecutively when you switch off the ignition.

If indicated, the following message may also appear:

"Parking lamps on!"
This message appears when you open the driver's door after parking. A supplementary gong is also heard.

Even with the ignition and Info Display off, you can reactivate the screen and display the messages.

Press the CHECK button for approx. 8 seconds, refer to page 85. The stored status reports appear again in the display.

If several messages are present, you can continue to press the CHECK button to view them in succession.

The Check Control function

- ▷ cancels itself automatically after a brief period
- ▷ can be canceled by again pressing the CHECK button for approximately 8 seconds.

You can select the language in which Check Control status reports and messages from the computer will appear, refer to page 91.◀

## Computer

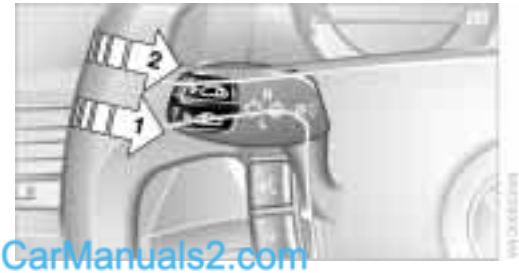


CarManuals2.com

To select functions:

You can use the buttons in the turn signal indicator lever to request a display from the computer on the Info Display, starting at the radio mode in the ignition lock.

**1** Info Display on left

**2** Info Display on right

A new function appears each time you press the button.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Info Display screen contents

The display sequence:

- ▷ Fuel gauge, refer to next column
- ▷ Range and remaining distance, refer to next colum and page 88.

CarManuals2.com

The display sequence:

- ▷ Odometer 82
- ▷ Energy Control/ Current fuel consumption 88
- ▷ Average fuel consumption 88
- ▷ Average speed 88
- ▷ Time of arrival 88.

Maintain pressure on button **1** to cancel the display from the computer. Press the button again to return to the last display.
It will not be possible to cancel the display if the fuel level has fallen into the reserve range or if a Check Control status report is currently on the screen.
Press the button again to view the last display.◀

## Fuel gauge

The fuel gauge mode appears automatically once the fuel level falls into the reserve range. At the same time the words "Fuel reserve" appear. The tank still contains approx. 2.6 gallons (10 liters) of fuel.

It will not be possible to cancel the computer display once the fuel level drops into the reserve range. However, you can still request a display of the travel range. Computer, refer to page 86.◀

Tank capacity: approx. 23.2 gallons (88 liters).

If the tilt of the vehicle varies, when you are driving in mountainous areas, for example, the indicator may fluctuate slightly.

Refuel well before the tank is empty, as otherwise engine functions will not be ensured and damage can occur if you drive down to the last drop.◀

## Cruising range

Displays the estimated cruising range available with the remaining fuel. The system calculates the cruising range based on operating conditions and the amount of fuel remaining in the tank. The basis for the calculations is the average fuel consumption over the preceding 20 miles (30 km).

Always refuel as soon as possible once your cruising range falls to below 30 miles (50 kilometers), as other-





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

wise engine functions are not ensured and damage can occur.◀

Refueling is only registered by the computer for fuel amounts above approx. 1.3 gallons (5 liters).

## Distance to destination

When you enter a destination in the navigation system or manually enter a distance in the computer prior to departure, the system can also display the distance remaining to your destination, refer to page 132 or 89.

The system automatically adopts the distance to your destination using the route recommended by the navigation system.

▷ When you enter a destination in the navigation system, any manual entries will be overwritten no later than once 1,640 ft (500 meters) of the calculated distance have elapsed.◀

## Energy Control/ Current fuel consumption

Shows your current fuel consumption rate in mpg – in liters/100 km on Canadian vehicles. This allows you to see whether your current driving style is conducive to fuel economy with minimum exhaust emissions.

When the vehicle is stationary the display goes to the maximum reading, zero on Canadian models.

## Average fuel consumption

The average fuel consumption is calculated for the time during which the engine is running.

You can use the Control Display to view your fuel consumption rate over two different distances, refer to Computer or Trip computer.

## Average speed

Periods with the vehicle parked and the engine off are not included in the calculations of average speed.

## Time of arrival

A display of your estimated time of arrival is available whenever you enter a destination in the navigation system, refer to page 132, or enter the distance manually in the computer, refer to page 89, prior to departure.

▷ This function is only available if the time in the Control Display has been correctly set, refer to page 91.◀

## Control Display screen contents

You can activate the computer function at any time by selecting it from the "Car data" menu.

The computer furnishes you with a choice between two display options.

### Computer

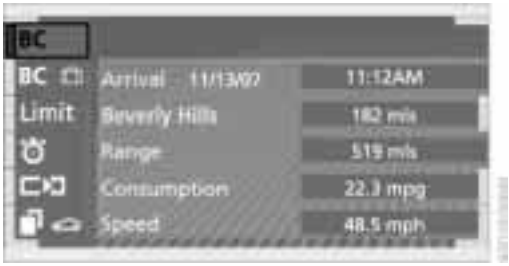


- ▷ Time of arrival
- ▷ Distance to destination.
  Enter a destination in the navigation system, or enter a distance in the computer manually, refer to page 132 or 89
- ▷ Cruising range
- ▷ Average fuel consumption
- ▷ Average speed.

▷ You can reset calculations of both average speed and average fuel consumption to zero. Select the menu entry and confirm.◀

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Trip computer

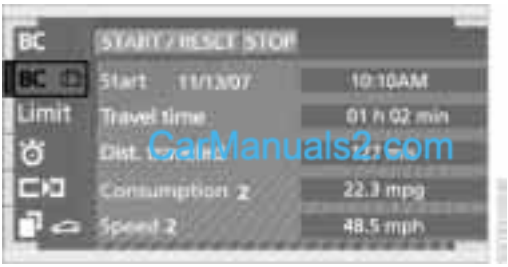


CarManuals2.com

Reset all data to zero:
Select "START / RESET" and confirm.

- ▷ Time of departure
- ▷ Driving time
- ▷ Elapsed distance
- ▷ Average fuel consumption since "START / RESET"
- ▷ Average speed since "START / RESET".

## Entering a distance manually

1. Select computer "BC"
2. Select and activate the "Distance" entry function. Turn the controller to the left or right to select the distance to your destination
3. Press the controller to confirm your entry.

## Setting and revising speed limit

1. Select "Limit" and confirm your selection
2. Select "SET" and confirm.
3. Turn the controller to the left or right to select the preset speed
4. Press the controller to confirm your entry. The speed limit function is now active.

## To switch off or switch on again

1. Select "Limit" and confirm your selection
2. Select "ON / OFF" and confirm. "ON / OFF" is highlighted when the speed limit function is activated.

## Adopting your current speed as the limit

1. Select "Limit" and confirm your selection
2. Select and confirm. This resets the stopwatch to zero and then restarts it. The system adopts your current speed as the limit.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Info Display screen contents

If, for instance, the warning sector in the tachometer is visible, refer to page 82, the speed limit will be indicated by a warning sector in the speedometer, see arrow.

A message appears in the Check Control when you exceed the preset speed limit.

Vehicle speed must fall back to at least 3 mph (5 km/h) below the preset speed before the speed warning will be repeated.

## Stopwatch

### Starting and stopping

1. Select and confirm
2. Select ▶ and confirm. The stopwatch is reset to 0 and started
3. Select ■ and confirm. This stops the timer.
   Confirm again to reset the stopwatch to zero.

### Taking an intermediate time reading

Select "INTERM. TIME" and confirm. This intermediate time appears below the ongoing primary stopwatch count.

All of the remaining functions remain available at all times while the stopwatch is running. The stopwatch continues operation in the background.◀

CarManuals2.com

## Assistance window* for "Car data"

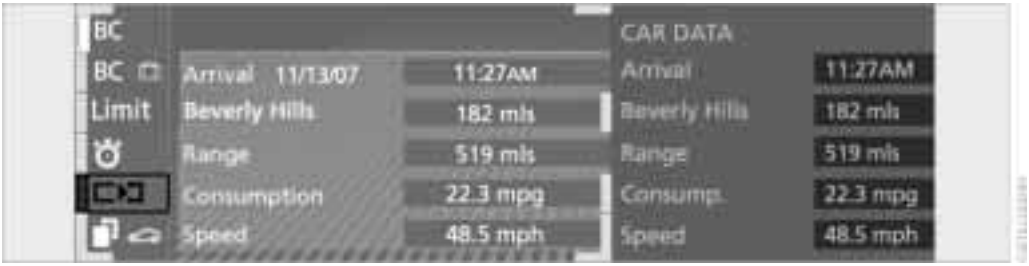


You can select any of the following computer functions for display in the assistance window:

- Computer
- Trip computer
- Speed limit
- Stopwatch



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Importing display

1. Select the desired function and confirm – here, computer "BC"
2. Select and confirm. This resets the stopwatch to zero and then restarts it. The function appears in the assistance window.

The symbol is highlighted if the function displayed in the asssistance window is selected in the Control Display. You can also choose to view brief help texts explaining selected menu entries, refer to page 23, or the travel route on vehicles equipped with a GPS navigation system, refer to page 131.◀

## Changing settings

### Units of measure and display format

You can select the units of measure used in the displays of fuel consumption, distances, temperatures and pressures as well as the display format for the time and date.

1. Select and confirm.
2. Select the menu entry that you wish to adjust. Press repeatedly to view a listing of your selection options.

### Language

You can select a different language for the text displays.

1. Select and confirm.
2. Select and activate the desired language.

### Time and date

CarManuals2.com

Select "Clock" and confirm.

#### Setting the time

Select "Time" and confirm. The first setting sector is highlighted.

▷ Turn to reset

▷ Press to store your entry and proceed to the next setting.
The clock adopts your entry the last time you confirm your entry.

#### Memo

You will hear four tones just before each full hour.

▷ Select "Memo" and confirm. "Memo" is highlighted when this function is activated.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Setting the date

Select "Date" and confirm. The first section of the date display is highlighted – here: day.

▷ Turn to reset

▷ Press to store and highlight the next entry – here: month and year.
The system adopts the date the last time you store your entry

## Brightness

You can set the brightness of the screen.

1. Select and confirm.

Select "Brightness" and confirm your selection. Press and turn the controller to make the adjustment.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## PDC Park Distance Control*

### The concept

The PDC assists you when you are parking. Signal tones indicate the current distance to an object behind or in front of your vehicle. Four ultrasonic sensors in both the bumpers monitor the distance to the nearest object. The sensors at the front and at the two rear corners have a range of approx. 2 ft (60 cm); the rear middle sensors have approx. 5 ft (1.50 m).

PDC is a parking aid that can indicate objects when they are approached slowly, as is usually the case when parking. Avoid approaching an object at high speed, as otherwise the physical circumstances would mean that the system warning was too late.◀

### Automatic function

Whenever the ignition is on the system automatically assumes operational status after a few seconds each time you engage the transmission position R.

Wait this short period before reversing.◀

### Switching on manually

Press the button, the indicator lamp lights up.

### Manual deactivation

Press the button again; the indicator lamp goes out.

### Automatic deactivation

The system is automatically deactivated once the vehicle travels approx. 165 ft (50 m) or exceeds a speed of roughly 20 mph (30 km/h); the indicator lamp goes out. You can reactivate the system manually as needed.

### Acoustic signals

The signal indicating the distance to the nearest obstacle is directional. Thus, an object detected to the left rear of the vehicle will be indicated by a signal tone from the left rear speaker, etc. As the distance between vehicle and object decreases, the intervals between the tones become shorter. The signal tone becomes continuous once the distance to the nearest object falls to below roughly 1 ft (30 cm).

The warning signal is canceled after approx. 3 seconds when the distance to an object remains constant during this time, if you are moving parallel to a wall, for instance.

### Malfunctions

The indicator lamp within the button flashes and a status message appears in the Check Control.
Please take note of the supplementary information provided in the Control Display.

Switch the system off and have the cause of the malfunction corrected by your BMW center.

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### PDC with visual warning

You also enjoy the option of having the system show distances to objects in the Control Display. The Control Display will also indicate the presence of objects in green before they are close enough to generate a signal tone.

Select "PDC pic." from the "Settings" menu and confirm your selection. This activates the PDC display.

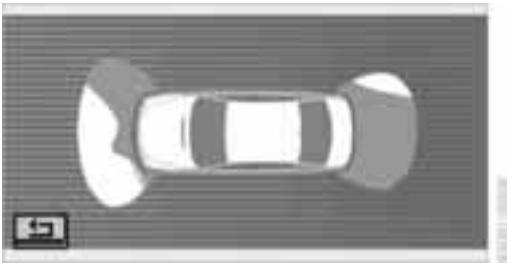

The display then appears in the Control Display whenever the PDC is automatically or manually activated.

The previous display automatically reappears after the system is deactivated.

Confirm in the menu to return to the previous display.◀

Even with PDC, final responsibility for estimating the distance between the vehicle and any obstructions always remains with the driver. Even when sensors are involved, there is a blind spot in which objects cannot be detected. The system is also subject to the physical limits that apply to all forms of ultrasonic measurement, such as those encountered with tow bars and trailer couplings, as well as thin and wedge-shaped objects, etc. Low objects already displayed, e.g. a curb, can also disappear from the detection area of the sensors again before a continuous tone sounds.

Loud noises from outside and inside the vehicle may prevent you from hearing PDC's signal tone.◀

CarManuals2.com

Keep the sensors clean and free of ice or snow in order to ensure that they will continue to operate effectively.

Do not apply high pressure spray to the sensors for a prolonged period of time. Keep the spray at least 4 in (10 cm) away from the sensors.◀

## Driving stability control/ DSC Dynamic Stability Control

Your BMW is equipped with an extended array of systems designed to enhance and maintain vehicle stability under extreme conditions. The following section describes these functions based on DSC and ABS.

### The concept

DSC maintains vehicle stability, even in critical driving situations.

The system optimizes vehicle stability during acceleration and when starting from a full stop, as well as optimizing traction. The system recognizes any tendency for the vehicle to assume an unstable attitude such as oversteer or understeer; it then counteracts this tendency with a combination of graduated reductions in engine torque and selective braking intervention at individual wheels. DSC provides optimal stability within the limits defined by the laws of physics.

The DSC is operational every time you start the engine. DSC includes the functionality of the DTC Dynamic Traction Control and DBC Dynamic Brake Control.

With its selective braking intervention at the individual drive wheels, DTC fulfills the same function as a conventional limited-slip differential to enhance traction under



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

difficult driving conditions, such as on snow, etc.

## Indicator lamps

The indicator lamp in the Info Display goes out soon after you start the engine.

If the indicator lamp flashes:
DSC controls the drive and braking forces.

The indicator lamp stays lit:
DSC has been switched off via the Control Display.

The indicator lamp and the brake warning lamp remain on continuously:
DSC, DTC and DBC have been deactivated or a system malfunction is present.

When the system is off, the stability maintenance functions described above are no longer available. The vehicle will remain completely operational, however, without DSC.
Please respond to any malfunctions by referring the problem to your BMW center.

Indicator and warning lamps on Canadian models.

CarManuals2.com

## Activating DTC Dynamic Traction Control

You may find it useful to briefly activate DTC under the following special circumstances:

- When rocking the vehicle and starting off in deep snow or on loose road surfaces
- When ascending snow-covered hills, and when driving in deep or on hard-packed snow
- When driving with snow chains.

Select "Settings". Select "DTC" and confirm your entry. DTC is now activated. The DTC indicator lamp in the Info Display lights up.

When DTC is active, DSC provides only limited system response up to a speed of approximately 45 mph (70 km/h). Control intervention to maintain stability is reduced.◀

## Deactivating DTC

Select "Settings". Select "DTC" and confirm your entry. DTC is now deactivated. The DTC indicator lamp in the Info Display goes out.

## Deactivating DSC

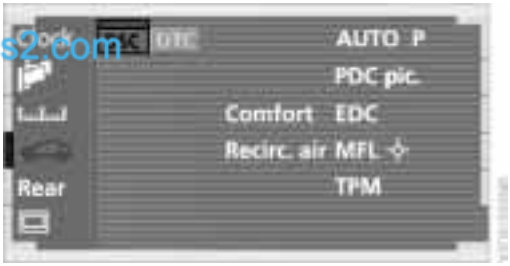


Select "Settings". Select "DSC" and confirm your entry. DSC is deactivated. The indicator lamp in the Info Display remains on continuously.

Deactivating DSC automatically deactivates DTC as well. The systems for enhancing stability and traction are deactivated, and there is no active braking intervention or torque control.

A status report appears in the Check Control. Please take note of the additional information in the Control Display.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

To maintain optimal stability, drive with the system on whenever possible.◀

### Reactivating DSC

Select "Settings". Select "DSC" and confirm your entry. DSC is now activated. The indicator lamp in the Info Display goes out.

The laws of physics cannot be repealed, even with DSC. An appropriate driving style always remains the responsibility of the driver. Avoid using the additional safety margin provided by the system as an excuse for taking unnecessary risks.
When DTC is active, DSC provides only limited system response up to a speed of approximately 45 mph (70 km/h). Intervention for stability-enhancement is reduced. Do not make any modifications to the DSC system. Never allow anyone other than authorized professional technicians to carry out service or repairs on the DSC system.◀

### DBC Dynamic Brake Control

When you apply the brakes rapidly, this system automatically produces the maximum braking force boost and thus helps to achieve the shortest possible braking distance during panic stops. This system exploits all of the benefits provided by ABS.

Do not reduce the pressure on the brake pedal for the duration of the brake application. When the brake pedal is released, the DBC is deactivated.

BRAKE

In the event of a malfunction, the warning lamp comes on with a yellow light. Have the system checked and repaired at your BMW center as soon as possible.
Check Control messages, refer to page 85.
Please note the supplementary information provided in the Control Display.

Warning lamp on Canadian models.

## Driving stability control/ ABS Antilock Braking System

### The concept

CarManuals2.com

ABS enhances active safety by preventing the wheels from locking under braking.

ABS incorporates CBC and EBV.

### In case of malfunction

ABS

If the indicator lamp lights up in yellow, this indicates that ABS has been deactivated in response to a system malfunction. Conventional braking efficiency remains available without limitations. Please have the system inspected at your BMW center.

### CBC Cornering Brake Control

CBC is a technical advance based on ABS. It provides further enhancements in vehicle stability and steering response during lane changes and cornering at high rates of lateral acceleration.

### EBV Electronic brake-force distribution

EBV controls the brake system's application pressure at the rear wheels to ensure stable deceleration.

### In case of malfunction

BRAKE

ABS

If the brake system warning lamp lights up in red, appearing together with the yellow indicator lamps for ABS and DSC: the stability control is no longer operational.

If all three lamps light up in yellow: malfunction in the stability control systems.

While you may continue, you should remember to proceed cautiously and drive defensively while avoiding full brake applications.
Please have the system checked at the nearest BMW center.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Check Control messages, refer to page 85. Please note the supplementary information provided in the Control Display.

Indicator and warning lamps on Canadian models.

# Dynamic Drive

## The concept

Dynamic Drive minimizes body roll and optimizes vehicle stability during cornering and evasive maneuvers.

Active stabilizers at the front and rear axles form the basis for Dynamic Drive. Suspension compliance adapts to suit driving conditions, varying from performance-oriented during cornering to smooth and comfort-oriented when the vehicle is proceeding in a straight line.

The system assumes operational status each time you start the engine.

## Driving with Dynamic Drive

During vehicle operation, the system continuously runs through closed-loop control cycles lasting only fractions of a second.

## In case of malfunction

The symbol will light up, accompanied by a status message in the Check Control. Please take note of the additional information in the Control Display.
You can find more detailed information on the Check Control starting on page 85.

If the Dynamic Drive system switches off in response to malfunction, please remember to adapt your speed accordingly, especially in curves.
The suspension will be noticeably softer and the vehicle will display a greater tendency to tilt during cornering and in crosswinds.
If a Check Control message stating that you should stop appears in addition to the red symbol, stop immediately and switch off the engine. In this case the oil level in the reservoir may have dropped below the minimum, possibly owing to a leak in the hydraulic system.
Please observe the additional instructions provided in the Control Display.◀

CarManuals2.com

# EDC Electronic Damping Control*

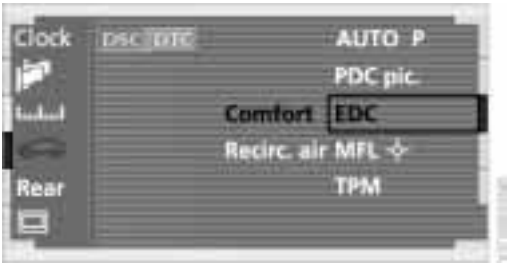


The suspension responds to changes in factors such as road surface, or operating conditions such as steering and braking, by adapting to the new conditions within fractions of a second.

## Comfort program

The system automatically assumes operation in its Comfort mode each time you start the engine; this mode is suitable for use throughout the vehicle's entire speed range and regardless of load.

## Sport program

Activate in "Settings" menu with the ignition on.

You should select the Sport program for consistently performance-oriented response from shock absorbers and steering.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Flat Tire Monitor*

## The concept

The Flat Tire Monitor keeps track of the inflation pressures in your tires as you drive. The system provides an alert whenever the inflation pressure drops significantly below the specified pressure in one or more tires.

In order for the Flat Tire Monitor to 'learn' the correct tire inflation pressure, check the inflation pressure in all tires against the inflation pressure table on page 185 and make corrections as necessary. Then proceed to initialize the system.

This symbol will appear in the Check Control to inform you that the inflation pressure of a tire has fallen significantly. A text message appears at the same time.
Please take note of the additional information in the Control Display.
You can find more information on the Check Control starting on page 85.

The Flat Tire Monitor cannot indicate sudden severe tire damage caused by outside factors and does not detect a natural, even pressure drop in all four tires.◀

## Initializing the system

1. Switch ignition on, do not start the engine
2. Select "RPA" from the "Settings" menu and confirm your selection. The initialization menu appears.

CarManuals2.com

### "YES"

Select and confirm. The Flat Tire Monitor starts an automatic 'learning' process as the car is driven, and memorizes these reference pressures. This one-off learning takes at least 10 minutes, after which the Flat Tire Monitor is able to detect and indicate a flat tire.

Repeat this process after any changes in tire inflation pressure, tire rotation or replacement.

### "NO"

Select and confirm to return to the "Settings" menu.

## Flat tire

The symbol will light up red, accompanied by a status message in the Check Control.

- ▷ Vehicles with standard tires:
  If this occurs, reduce vehicle speed immediately and stop the vehicle. Avoid hard and sudden steering and braking maneuvers. Replace the defective tire
- ▷ Vehicles with run-flat tires:
  If this occurs, carefully but quickly reduce vehicle speed to below 50 mph (80 km/h). Avoid hard and sudden steering and braking maneuvers. Additional information on run-flat tires is provided on page 186.

Please take note of the additional information in the Control Display.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Check the tire inflation pressure regularly and correct it if necessary, refer to page 185.

Do not initialize the system when snow chains are fitted. False alarms and undetected loss of pressure may occur in such situations.
When driving on snow-covered or slippery surfaces, it may take some time for a loss of tire pressure to be indicated.
A sports driving style – spinning of the driven wheels, high lateral accelerations – can likewise result in a delayed response from the Flat Tire Monitor.◀

### System malfunctions

The symbol will appear in yellow in the Check Control and a message will appear.

Please refer to the additional information supplied in the Control Display, and have the system inspected at your BMW center.

## TPM Tire Pressure Monitor*

### The concept

TPM monitors inflation pressures in all four tires while you drive. The system provides an alert whenever the inflation pressure drops significantly below the specified pressure in one or more tires.

To initialize TPM, start by checking the inflation pressures in all four tires and comparing them with those specified in the table on page 185, correcting them as necessary.Then proceed to initialize the system.

This symbol will appear in the Check Control to inform you when the inflation pressure varies from that stored in the system. A text message appears at the same time.
Please take note of the additional information in the Control Display.
You can find more information on the Check Control starting on page 85.

The TPM cannot alert you to severe and sudden tire damage caused by external factors.◀

### Initializing the system

1. With the vehicle parked, switch on the ignition
2. Select "TPM" from the "Settings" menu and confirm your selection. The initialization menu appears.

### "INITIALIZE"

1. Select and confirm

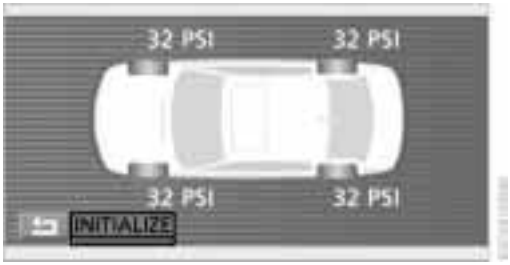


2. TPM is initialized. A message appears in the Check Control
3. After several minutes of driving TPM will adopt the tires' current inflation pressures as its references.
   The current data appear in the Control Display. These figures are more accurate than those that appear on the inflation gauges at filling stations, etc.

The only time you will need to repeat this procedure is after correcting your tire pressures. Because TPM automatically assumes operation each time you switch on the ignition, it is on duty whenever you drive.

CarManuals2.com

If the system detects a flat tire during the initialization process, the tires in the Control Display will appear in red.◀





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Do not start the initialization

Select ⮌ and confirm to return to the "Settings" menu.

## Status indicators in the Control Display

The status of the system is indicated by the color of the tires.

TPM takes into account that the tire pressure changes during driving. A correction is only required when the TPM requests that the driver takes action by changing the color.

### Green

Tire inflation pressures correspond to the initialized level.

### Yellow

The inflation pressures in the tires have fallen to below the specified level, which is normal in every tire after a certain amount of time.

This alerts you to have the tires inflated to the specified pressures as soon as possible.

### Red

Pressure loss in indicated tire.

If this occurs, reduce vehicle speed immediately and stop the vehicle. Avoid hard and sudden steering and braking maneuvers.

### Black

The system is being initialized.

The system needs several minutes to complete the initialization process, after which it is ready to detect and report tire problems.

## In the event of loss in tire pressure

If the indicator lamp symbol in the Check Control lights up in yellow, and a message also appears, this indicates that the inflation pressures in the tires have fallen to below the specified level, which is normal in every tire after a certain amount of time.

This alerts you to have the tires inflated to the specified pressures as soon as possible.

Please take note of the additional information in the Control Display.

▷ If you are prompted to check the tire pressure shortly after a correction has been made, this indicates that the corrected values were not accurate. Please check the inflation pressure again and make corrections according to the inflation pressure table. Then reinitialize the system.◀

## Flat tire

If you have a flat tire, the indicator lamp symbol in the Check Control will light up in red, and a message will appear. In addition, a gong sounds.

- ▷ Vehicles with standard tires:
  If this occurs, reduce vehicle speed immediately and stop the vehicle. Avoid hard and sudden steering and braking maneuvers. Replace the defective tire
- ▷ Vehicles with run-flat tires:
  If this occurs, carefully but quickly reduce vehicle speed to below 50 mph (80 km/h). Avoid hard and sudden steering and braking maneuvers. Additional information on run-flat tires is provided on page 186.

▷ The spare tire provided with your vehicle is equipped with the electronics required to support TPM operation; once the spare is installed, the pressure in this tire will also be monitored following system initialization.
Have the tires changed at your BMW center.
Your BMW center has the information needed for working with TPM and is equipped with the necessary special tools.◀

## System malfunctions

CarManuals2.com

Other equipment operating on the same radio frequency as TPM can generate interference signals that may prevent the system from operating as intended.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

The symbol will appear in yellow in the Check Control and a message will appear.

You will also see the same message

- ▷ in the event of a system fault
- ▷ if a wheel is mounted without the appropriate TPM electronics
- ▷ if, in addition to the spare tire, additional wheels with TPM electronics are on board.

Please refer to the additional information supplied in the Control Display, and have the system inspected at your BMW center.

# Self-leveling suspension*

## In the event of malfunction

A Check Control message appearing together with this symbol indicates a malfunction in the self-leveling suspension. Please take note of the additional information in the Control Display.

Stop and inspect the vehicle. If the rear of the vehicle is visibly lower than the front, possibly accompanied by a tilt noticeable when you compare the left rear with the right rear, you should respond by immediately proceeding to the nearest BMW center. Drive with appropriate caution in the meantime. The vehicle has reduced ground clearance and driving comfort may be noticeably reduced. Even if the attitude of the vehicle is normal, you should consult the nearest BMW center if the warning lamp indicates a system fault.

# Adaptive brake lamp

The adaptive brake lamp indicates the intensity with which you are applying your brakes to drivers of following vehicles.

The display consists of two stages:

- ▷ Normal braking:
  The brake lamps in the tail lamp assemblies and the high-mount brake lamp on the rear tray light up during braking
- ▷ Heavy braking and braking with ABS:
  The tail lamps also light up with the same intensity as the standard brake lamp units to enhance the warning effect of the brake lamps.

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Lamps

## Parking lamps/low beams

### Parking lamps/side marker lamps

With the switch in this position, the front, rear and side vehicle lighting is switched on. You can use the side marker lamps for parking. For lighting on one side for parking as an additional feature, refer to page 103.

### Low beams

When you switch off the ignition with the headlamps on, the headlamps go out, and only the parking lamps remain on.

Follow-me-home lamps:
After parking the vehicle and switching off the headlamps, you can use the headlamp flasher control to activate the low beams for a period of roughly 40 seconds. You also have the options of extending this period or, as an alternative, having this function deactivated.◀

### Lights on warning

If you switch off the ignition while the headlamps are on, when you subsequently open the driver's door a gong will sound for several seconds, while the Check Control will provide you with a message.

### Daytime driving lamps*

If you wish, you can leave the light switch in the low-beam position:
All external lamps go out when you switch off the ignition.

Always observe all applicable laws governing the use of daytime driving lamps.

You can switch on the parking lamps when needed using the standard procedure described under Parking lamps.

You can have the daytime driving lamps on your vehicle programmed to operate as desired.◀

### Automatic headlamp control

When you set the switch to this position, the system activates and switches on and off the low beams in response to changes in ambient light conditions, for instance, in tunnels, at dawn and dusk, and in rain and snow. The green indicator lamp next to the symbol is illuminated when the low beams are on.

Following automatic activation the vehicle's external lighting remains on when you switch on the fog lamps.◀

The automatic headlamp control cannot serve as a substitute for your personal judgment in determining when the lamps should be switched on in response to ambient lighting conditions.
For example, the system cannot detect fog. To avoid safety risks, you should always switch on the lamps manually under these conditions.◀

You can have the sensitivity of the headlamp control system adjusted on your vehicle.◀

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Instrument lighting

Turn the serrated dial to adjust the illumination intensity.

## High beams/standing lamps

CarManuals2.com

**1** High beams – blue indicator lamp

**2** Headlamp flasher – blue indicator lamp

**3** Standing lamps

### Standing lamps, left and right*

You also enjoy the option of lighting up just one side of your vehicle when parking:

With the ignition off, press the lever in the desired direction **3**, past the pressure point.

## Front fog lamps

The parking lamps or low beams must be switched on for the fog lamps to operate. The green indicator lamp in the Info Display lights up whenever the fog lamps are on.

The fog lamps are switched off whenever the high beams are switched on.

If the automatic headlamp control is activated, the low beams will come on automatically when you switch on the fog lamps.◀

## Interior lamps

The interior lamps operate automatically.

### Switching the interior lamps on and off manually

Briefly press button **1**.

If you want the interior lamps to remain off continuously, maintain pressure on the button for approx. 3 seconds.

To revert to normal operation, press the button briefly.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

The button for the interior lamps in the rear passenger area only switches these lamps on and off.

The interior lamps come on briefly whenever you use the parked-car ventilation system. This feature confirms that the system has been activated.◀

Control of the footwell lamps, courtesy lamps and ground lamps is also automatic.

## Reading lamps

Reading lamps are provided in the front and rear* adjacent to the interior lamps. You can switch them on and off with the button **2** adjacent to each lamp.

To avoid discharging the battery, all of the vehicle's interior lamps are automatically extinguished approx. 15 minutes after the ignition is switched off.◀

## Light-emitting diodes, LEDs

Light-emitting diodes installed behind translucent lenses serve as the light source for many of the controls and displays in your vehicle. These light-emitting diodes, which operate using a concept similar to that applied in conventional lasers, are officially designated as Class 1 light-emitting diodes.

Do not remove the covers, and never stare into the unfiltered light several hours, as irritation of the iris could result. ◀

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# A congenial climate

## Automatic climate control

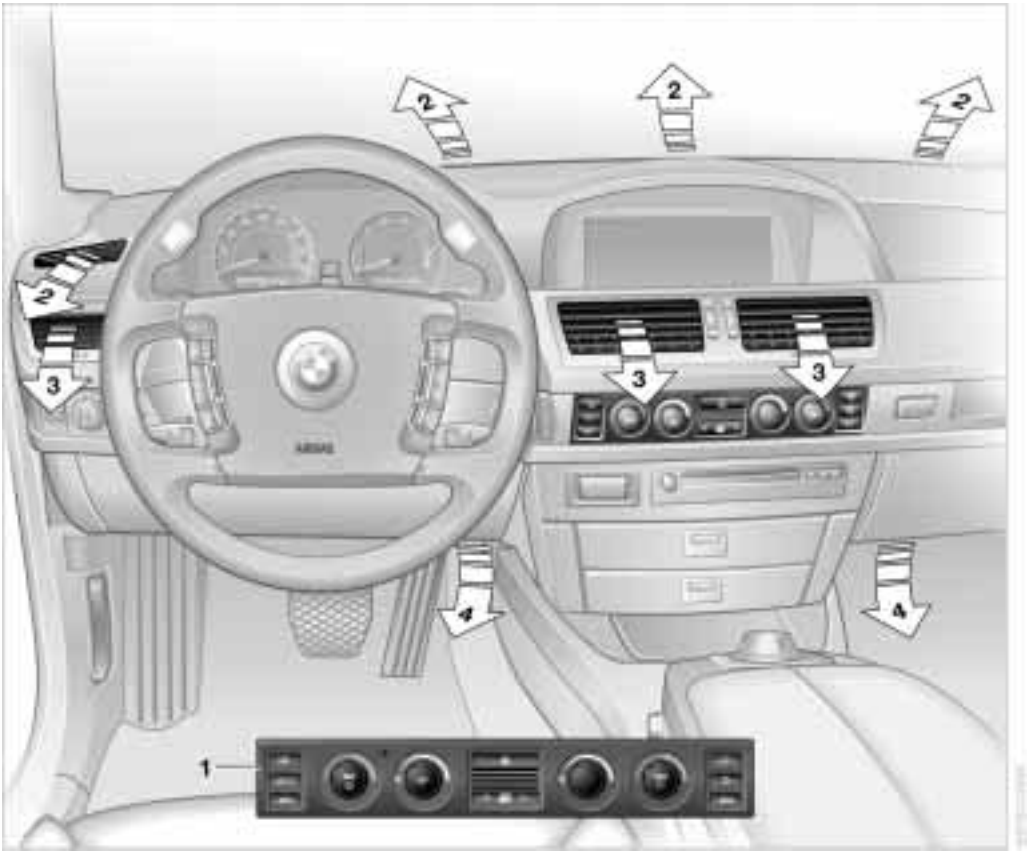


**1** Automatic climate control

**2** Airflow directed toward the windshield and side windows

**3** Airflow for the upper body
The serrated dials in the center open and close through an infinitely-variable range to control air supply while also adjusting the air's direction like the lower serrated dials. You can find more information on adjusting for draft-free ventilation on page 110

**4** Air to footwell

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

**1** Automatic air distribution and supply – left-hand side of passenger compartment 109

**2** Outside air/AUC Automatic recirculated-air control/Recirculated air 107

**3** Defrosting windows and removing condensation 107

**4** Temperature control – left-hand side of passenger compartment 107

**5** Maximum cooling 107

**6** Air supply – left-hand side of passenger compartment 107

**7** To switch off automatic climate control 109

**8** Air supply – right-hand side of passenger compartment 107

**9** Temperature control – right-hand side of passenger compartment 107

**10** Residual heat mode 108

**11** Rear window defroster

**12** Manually switch air conditioner mode on and off 107

**13** Automatic air distribution and supply – right-hand side of passenger compartment 109

**14** Air grill for interior temperature sensor – please keep clear and unobstructed

**15** Parked-car ventilation system 112

▷ Activation time set – the indicator lamp is on

▷ Parked-car ventilation on – the indicator lamp flashes

All of the remaining adjustment options available with the automatic climate control can be found in the Control Display's "Settings" menu, refer to page 109.
The current settings for temperature and airflow appear in the Control Display's status line.
You can find a description of the Control Display on page 19.◀

Carmanuals2.com

## A congenial climate

Activate the automatic mode using the AUTO button or "AUTO" in the Control Display, refer to page 109. Select the interior temperature that you find most comfortable.

The following section contains more detailed information on the available setting options.

All of the air conditioning functions, including Maximum cooling, refer to page 107, and the rear air conditioner, refer to page 111, are available only when the engine is running.◀

Your vehicle has been designed to automatically select your personal climate-control settings whenever you unlock the doors using your individually programmed remote control unit.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Automatic air distribution and supply

The AUTO program adjusts the airflow and distribution patterns for you while also using your preselected temperature setting as the basis for adjusting the interior climate to adapt to external influences – summer, winter.

The air conditioner comes on automatically when you select the AUTO program.

## Temperature adjustment

You can turn to select the desired temperatures for the driver's and passenger sides. Your settings appear in the Control Display's status line. The figures in the display provide a general indication of interior temperature. When you start the vehicle, this system ensures that the selected temperature is achieved as quickly as possible. It then maintains this temperature, regardless of the season.

## Defrosting windows and removing condensation

This program quickly removes ice and condensation from the windshield and door windows.

## Adjusting air supply manually

You can adjust the air supply by turning. The automatic air supply control is operational whenever you see your selection represented by a bar in the Control Display's status line. The automatic air distribution remains in operation as before. You can reactivate the automatic air supply mode with the AUTO button.

## Switching air conditioner mode on and off manually

The air conditioner cools and dehumidifies the incoming air before also reheating it as required, according to temperature setting. Depending on the weather, the windshield may fog over briefly when the engine is started.

The air conditioner comes on automatically when you select the AUTO program.

## Maximum cooling

This program quickly provides maximum cooling.

The temperature display reverts to 60 °F (16 °C) while the system switches to the recirculated-air mode and starts to provide maximum air supply through the vent outlets only. For this reason you should ensure that these outlets are open before selecting this program.

## Outside air/AUC Automatic recirculated-air control/Recirculated air

You can respond to unpleasant odors or pollutants in the immediate environment by temporarily suspending the supply of outside air. The system then recirculates the air currently within the vehicle. AUC executes this function automatically.

CarManuals2.com

Press the button repeatedly to run through the following control sequence:

- ▷ Indicator lamps off: outside air flows into the vehicle
- ▷ Left-hand indicator lamp on – AUC mode: the system detects pollutants in the outside air and responds by blocking the supply of outside air when required. The system then recirculates the air currently within the vehicle. Depending upon air quality, in the automatic mode the system may start to alternate between its outside-air and recirculated-air modes
- ▷ Right-hand indicator lamp on – recirculated-air mode: the supply of outside air into the vehicle is permanently blocked. The system then recirculates the air currently within the vehicle.

If condensation starts to form on the inside window surfaces during operation in the recirculated-air mode, you





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

should switch it off while also increasing air supply as required.◀

## Residual heat mode

The system uses the warmth stored in the engine to heat the interior when the ignition is off, for instance, while the vehicle is stopped at a school to pick up a child.
You can adjust the automatic climate control's settings when the ignition lock is in the radio mode. The system blows heated air into the interior in accordance with the selected distribution pattern while the ignition is off.

▷ Provided that the engine has warmed to its normal operating temperature and the battery is charged, you can use this function for up to 15 minutes after switching off the ignition. The LED within the button lights up to confirm compliance with both of these conditions.◀

## Front ventilation

You can adjust the vent outlets for the upper body to suit your personal requirements.

You can use the serrated dials **1** to open and close the outlets through an infinitely-variable range, while the serrated dials **2** allow you to adjust the airflow direction.

### Ventilation for cooling

Adjust the vent outlets to direct the flow of cool air in your direction, for instance, if the interior has become too warm, etc.

### Draft-free ventilation

Set the vent outlets so that the air flows past you and is not directed straight at you.

▷ The airflow temperatures for the individual upper-body vent outlets can be adjusted separately in the Control Display, refer to page 110.
When the vent outlets are completely closed, the vents at the top of the cockpit provide indirect ventilation for the passenger compartment.◀

### Ventilation for storage compartment in front armrest

You can use the serrated dial in the storage compartment to open and close the vent.

▷ Depending upon the temperatures selected at the rear dials, high temperatures may occur in the storage compartment. Close the vent as required.◀

## Rear ventilation

CarManuals2.com

The serrated dials **1** allow you to open and close the ventilation outlets through an infinitely-variable range.

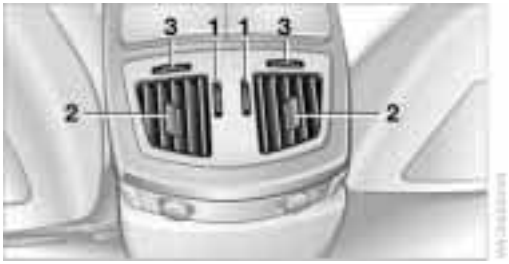


You can adjust the airflow direction using the levers **2**.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

The serrated dials **3*** control the amount of cooled air in the flow from the vent outlets:

Turn toward blue sector – colder
Turn toward red sector – warmer.

This function allows you to make minor adjustments for maximum comfort while also letting you vary temperatures within the storage compartment.

## Switching off automatic climate control*

The air supply, the heater and the air conditioner are all switched off. You can restart the automatic climate control by pressing any of its buttons except the REST button.

## Settings in Control Display

With the ignition on, select the "Climate" menu in the Control Center. The Control Display provides you with the following setting options:

▷ "Left • Right":
Separate settings for driver and front passenger

▷ To adjust and adapt air-distribution patterns, refer to the next column

▷ To adjust temperature for the upper body, refer to page 110

▷ Storing and calling up an individual setting for interior ventilation outlets, air distribution and temperature, refer to page 110.

Select the second page of the "Climate" menu.

CarManuals2.com

▷ Select "Indep. ventil.":
For information on activating and deactivating the parked-car ventilation system and setting the timer, refer to page 112

▷ "Seat temp.":
To adjust temperature distribution while the seat heaters are on, refer to page 51

▷ "Extra":
Switching the rear air conditioner or rear cooler on and off, refer to pages 111, 116

Select the first page of the "Climate" menu.

## Automatic air distribution and supply

"AUTO":
The AUTO program adjusts the air supply and distribution patterns for you while also using your preselected temperature setting as the basis for adjusting the interior climate to adapt to external influences – summer, winter.

"Bi-Level":
This program operates in the same way as the AUTO program, but with airflow directed toward upper body and into the footwells.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Combine the air distribution yourself

You can cancel the AUTO program by selecting specific air distribution patterns for your personal comfort.

## Adjusting air distribution

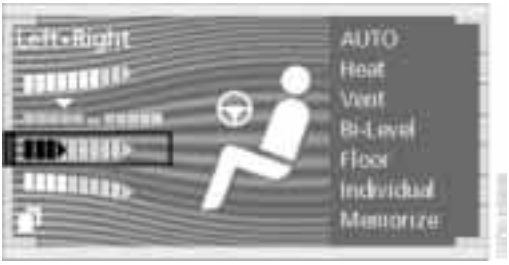


You also enjoy the option of adjusting the air distribution manually to obtain a climate that is ideally adapted to your personal requirements. The AUTO program is deactivated.

Select the desired symbol and confirm. Turn the controller to adjust the air distribution.

Air to windshield and door windows

Air to the upper body. You can also adjust the air temperature of the vent outlets for the upper body individually, refer to next column

Air to footwell

## Adjusting temperature for the upper body

This function provides you with the option of making minor adjustments to achieve maximum comfort.

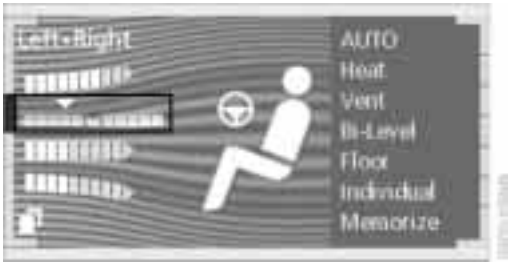


Use the temperature setting to adjust the amount of cool air that is added to the airflow emerging from the vent outlets for the upper body. We recommend a moderate temperature setting, as cooler air helps promote fatigue-free driving.

## Storing and calling up an individual setting

CarManuals2.com

You can store your individual setting after adjusting the air distribution manually.

Select "Memorize" and confirm your selection.

Now you can reselect the preset climate that precisely reflects your personal requirements.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Select "Individual" and confirm. The AUTO program is deactivated.

### Particle/activated-charcoal filter

The particle filter removes dust and pollen from the incoming air. The activated-charcoal filter provides additional protection by filtering gaseous pollutants from the outside air. Your BMW center replaces this combined filter as a standard part of your scheduled maintenance.
You can select a display of more detailed information in the Service Interval Display, refer to page 83.

## Rear air conditioner*

The following settings and operating modes can be selected and adjusted separately on the left and right sides:

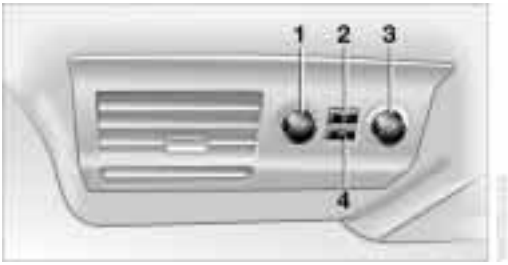


**1** Adjusting cooling, refer to next column

**2** Maximum cooling, refer to next column

**3** Adjusting air supply manually, refer to next column

**4** Switching off rear air conditioner, refer to next column

### Switching on rear air conditioner

To switch on the rear air conditioner

▷ select maximum cooling

▷ press the OFF button again

▷ select "Rear air cond." in the Control Display and confirm your selection, see below.

▷ When you switch on the rear air conditioning, the rear cooler is switched on automatically, refer to page 116.◀

### Adjusting cooling

You can also set the system to provide the desired level of cooling by turning. We recommend setting the system for moderate cooling. When you start off, the system reaches and then maintains the desired temperature settings as quickly as possible, both in summer and in winter.

### Adjusting air supply manually

You can adjust the air supply by turning.

CarManuals2.com

### Maximum cooling

This program quickly provides maximum cooling.

The system automatically switches to the recirculated-air mode while a high-speed stream of air simultaneously emerges from the vent outlets. For this reason you should ensure that these outlets are open before selecting this program.

### Switching off rear air conditioner

The air conditioner is switched off.

Press the button again to switch back on.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Switching on/off in the Control Display

1. With the ignition on, select the "Climate" menu in the Control Center
2. Select the second page of the "Climate" menu
3. Select "Extra" and confirm
4. Select "Rear air cond." and confirm.

The maximum cooling mode is automatically activated when you switch on the rear air conditioner in the Control Display.◀

Select "Rear air cond." again and confirm your entry to deactivate the system.

### Rear ventilation

Use the lever **1** to vary the airflow direction.

For additional information on rear ventilation options, refer to page 108.

## Parked-car ventilation system

System operation is controlled using the Control Display. You can set two different times for the system to start.

The parked-car ventilation blows air into the passenger compartment to lower interior temperatures.

The system remains on for 30 minutes. You can also switch the system on and off manually. Since the system uses a substantial amount of electrical current, you should refrain from activating it twice in succession without allowing the battery to be recharged in normal operation between use.

The parked-car ventilation system is available for preprogrammed operation at outside temperatures above approx. 59 °F (15 °C) and for direct activation at any temperature, but is not operational when the vehicle is underway.

The air enters the passenger compartment through the vent outlets in the instrument panel, which can be adjusted for both direction and airflow. These outlets must be open for the system to operate.

CarManuals2.com

### Switching on and off directly

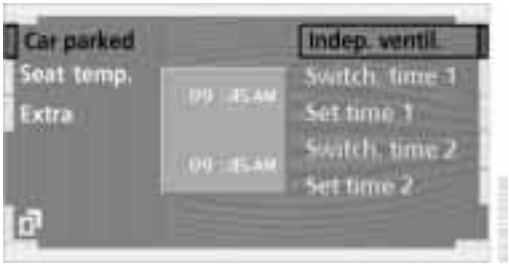


1. Activate the radio mode at the ignition lock
2. Select "Indep. ventil." on the second page of the "Climate" menu and confirm your selection.

Select "Indep. ventil." a second time and confirm to switch off the system directly.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Preselecting the switch-on time

You can preselect two activation times.

1. Activate the radio mode at the ignition lock
2. Select "Indep. ventil." from the second page of the "Climate" menu and confirm your selection
3. Select "Set time 1" or "Set time 2" and confirm your selection
4. Enter the desired time

▷ Turn: set

▷ Press: confirm.

## Activating the timer

Select "Switch. time 1" or "Switch. time 2" and confirm your selection.

▷ The parked-car ventilation is only available for activation within the subsequent 24 hours. After this the time will have to be reconfirmed.◀

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Practical interior accessories

## Integrated universal remote control*

### The concept

The integrated universal remote control can replace as many as three hand-held transmitters for various remote-controlled accessories, such as door openers and house alarm systems. The integrated universal remote control registers and stores signals from the original hand-held transmitters.

The signal of an original hand-held transmitter can be programmed on one of the three memory keys **1**. Following that, each of the devices can be actuated with the appropriately-programmed memory key **1**. The indicator lamp **2** flashes to confirm transmission of the signal.

If the vehicle is sold, the memory keys **1** should be cleared as described on page 115.

CarManuals2.com

To prevent possible damage or injury, before programming or using the integrated universal remote control, always inspect the immediate area to make certain that no people, animals or objects are within the travel range of the device. Also, comply with the safety precautions of the original hand-held transmitter.◀

### Checking the compatibility

If you see this symbol on the packaging or in the manual supplied with the original hand-held transmitter, it is safe to assume that it is compatible with the integrated universal remote control.

If you have additional questions, please consult your BMW center or call 1-800-355-3515.
You can also visit these websites:
www.bmwusa.com or
www.homelink.com.
HomeLink is a registered trademark owned by Johnson Controls, Inc.◀

### Programming

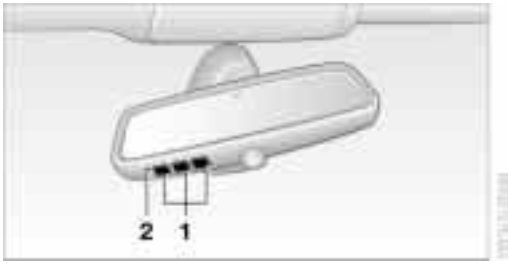


**1** Memory keys

**2** Indicator lamp

#### Fixed code hand-held transmitter

1. Switch on the ignition
2. When using for the first time: press both outer keys **1** for approx. 20 seconds, maintaining pressure until the indicator lamp **2** starts to flash. The three memory keys **1** are cleared
3. Hold the original hand-held transmitter at a distance of approx. 2 in (5 cm) to 8 in (20 cm) from the memory keys **1**.

   The required distance between the hand-held transmitter and memory keys **1** depends on the relevant system of the original hand-held transmitter used.◀
4. Simultaneously press the transmit key on the original hand-held transmitter and the desired memory key **1** of the integrated universal remote control. First, the indicator lamp **2** flashes slowly. Release both keys **2** as soon as the indicator lamp flashes rapidly. If the indicator lamp **2** does not flash quickly after approx. 15 seconds, choose another distance
5. To program other original hand-held transmitters, repeat steps 3 and 4.

The corresponding memory key **1** is now programmed with the signal of the original hand-held transmitter.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

The device can be operated as of ignition on.

If the device can not be operated after repeated programming, check whether the original hand-held transmitter uses an alternating-code system. To do so, either read the instructions of the original hand-held transmitter or press and hold down the programmed memory key **1** of the integrated universal remote control. If the indicator lamp **2** on the integrated universal remote control flashes quickly for a brief period and then remains lit up for approx. two seconds, this indicates that the original hand-held transmitter is equipped with an alternating code. In the case of an alternating-code system, program the memory keys **1** as described at the section on alternating-code transmitters.◀

### Alternating-code transmitters

Consult the operating instructions of the unit you wish to set when programming the integrated universal remote control. Find out about the possibility for synchronization.
When programming hand-held transmitters that employ an alternating code, please observe the following supplementary instructions:

Programming will be easier with the aid of a second person.◀

1. Park your vehicle within the range of the remote-controlled device
2. Program the integrated universal remote control as described at the section on fixed code hand-held transmitters.
3. Localize the key on the receiver of the device you want to set up, e.g. on the upper section of the motor
4. Press the key on the receiver of the device you want to set up. After step 4, approx. 30 seconds remain for step 5
5. Press the programmed memory key **1** on the integrated universal remote control three times.

The corresponding memory key **1** is now programmed with the signal of the original hand-held transmitter.

If you have any additional questions, please contact your BMW center.◀

CarManuals2.com

### Clearing memory keys

Individual memory keys **1** can not be cleared. However, you clear all three memory keys **1** together as follows:

Press both outer keys **1** of the integrated universal remote control for approx. 20 seconds, maintaining pressure until the indicator lamp **2** starts to flash.

## Sun blinds*

### Rear window blind

Activate by briefly pressing the button in the driver's door with the ignition lock in the radio mode.

### Window blind for rear side windows

Activate by pressing the desired button with the ignition lock in the radio mode.

**1** Quarter window blind

**2** Side window blind





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

**3** Rear window blind

**4** Switching to the other side

The side window blind can not be extended unless the side window is closed. If the window is open, the blind will rise slightly prior to immediately retracting to its original position.◀

Briefly press the safety switch in the driver's door, refer to page 43. The indicator lamp must light up. This precaution prevents children from operating the sun blinds using the rear switches, etc. Before using always ensure that the sun blind's travel path is clear and unobstructed.
When leaving the vehicle, always remove the remote control unit from the ignition lock and close the doors; this precaution prevents children from using the sun blinds and injuring themselves, etc.◀

### Automatically extending and retracting the sun blinds

You can extend and retract the sun blinds together by pressing and holding button **3** or the button in the driver's door.

## Rear cooler*

The rear cooler is located behind the rear seats' center armrest.

### Activating

Press the button, see arrow **1**, the indicator lamp within the button comes on.

On vehicles equipped with a rear air conditioner unit, once switched on the rear cooler operates whenever the engine is running.
High temperatures in the luggage compartment can affect the temperature in the rear cooler.
When a low voltage is reached, it is automatically switched off to protect the vehicle battery.◀

### Opening

Press button and open cooler, see arrow **2**.

### Switching on/off in Control Display*

When the rear air conditioner unit is switched on, the rear cooler operates whenever the engine is running.◀

1. With the ignition on, select the "Climate" menu in the Control Center
2. Select the second page of the "Climate" menu
3. Select "Extra" and confirm your selection
4. Select "Rear refr. box" and confirm.

Select "Rear refr. box" a second time and confirm to switch the unit off.

### Opening

Pull the handle, see arrow **2**.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Glove compartment

## Opening

Press button. The glove compartment opens automatically and the lamps come on.

## Closing

Fold the cover up.

To prevent injury in the event of an accident, close the glove compartment immediately after use.◀

## Rechargeable flashlight

The flashlight is located on the left-hand side of the glove compartment. It features integral overload protection, so it can be left in its holder continuously.

Be sure that the flashlight is switched off when it is inserted into its holder. Failure to comply with this precaution could lead to overcharging and damage.◀

CarManuals2.com

# Storage compartments

A storage compartment is located in the armrest between the front seats.

1 Open the right cover

2 Open the left cover

A removable coin holder is provided in the front of the compartment. Press briefly to open.

The mat within the compartment can be removed for cleaning.

Depending upon your model specification, any of the following may be located in the storage compartment:

- ▷ Removable cassette holder*
- ▷ Removable CD holder*
- ▷ Fold-out and removable storage compartment*, e.g. for glasses or portable phone
- ▷ Fold-out and removable litter container*.

## Locking storage compartment in the front armrest

You can use the key to lock the storage compartment in the armrest.

You can lock the luggage compartment lid and the armrest storage compartment separately, refer to page 39, and then retain the key in your possession while handing over only the remote control unit when leaving the vehicle for valet parking, etc., refer to page 34; this prevents unauthorized access to the luggage and front storage compartments.◀

## Ventilating storage compartment in the front armrest

You can use the serrated dial in the storage compartment to open and close the vent.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Depending on the automatic climate control setting, the temperature within the storage compartment may be higher than in the rest of the interior. Close the vent as required.◀

### Storage compartment on center console between the front seats

Open by pressing the recess on the cover.

### Glasses compartment

To open the compartment:
Briefly press the button.

You can remove the insert tray for cleaning.

### Storage compartment in the center console

To open the compartment:
Briefly press the button.

### Clothes hooks

When suspending clothing from the hooks ensure that it will not obstruct the driver's vision. Do not hang heavy objects on the hooks. If you do so, they could endanger occupants during braking or evasive maneuvers.◀

## Beverage holders

### Front

Below the sliding covers.

When the vehicle is parked you can rest cups, etc., on the closed sliding covers.◀

### Rear

CarManuals2.com

In the front of the rear seat cushion's center.

Press briefly to open; slide back to close.

## Ashtray, front

### Opening

Slide back the cover by the recess.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

To extinguish a cigarette, tap off the ash and gently press the tip into the funnel.

### Emptying

Press the button, see arrow **1**. The ashtray rises for removal.

## Cigarette lighter, front

Push down.

The lighter can be removed as soon as it jumps back out.

Hold or touch the hot cigarette lighter by the knob only. Holding or touching it in other areas could result in burns. The cigarette lighter is also ready for operation when the remote control is unlocked. For this reason, do not leave unsupervised children in the vehicle.◀

### Lighter socket

The socket can be used to plug in hand lamps, car vacuum cleaners, etc., with power ratings of up to approx. 200 W at 12 V. Avoid damaging the socket due to inserting plugs of different shapes or sizes.

With the ignition switched off, the power supply to all electrical sockets is cut off after approx. one hour.◀

CarManuals2.com

## Power socket

An additional power socket is located in the front passenger's footwell.

To gain access, fold the cover cap up.

## Ashtray, rear

### Emptying

Press the cover entirely down. The ashtray rises for removal.

## Cigarette lighter, rear

Refer to Cigarette lighter, front.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Center armrest

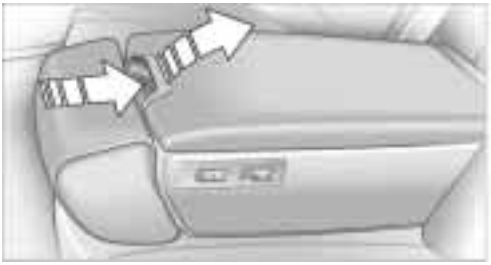

Before folding down the armrest adjust the head restraint to its lowest position, refer to page 49.◀

To open the storage compartment:
Press the button in the handle recess and fold up the cover.

### Comfort seat in rear

Before folding down the armrest adjust the head restraint to its lowest position, refer to page 49.◀

To open the storage compartment:
Press the button and fold up the cover.

## Ski bag*

Designed for safe, convenient transport of up to 4 pairs of standard skis or up to 2 snowboards.

The ski bag itself plus the additional capacity provided by the luggage compartment make it possible to transport skis with a length of up to 6.9 ft (2.10 m). When skis of 6.9 ft (2.10 m) in length are loaded the ski bag will tend to contract, reducing its overall capacity.

### Loading

1. Lower the center armrest, open the cover and place it on the armrest

2. Remove the cover panel* and place it on the controller in the rear

3. To open the hatch in the luggage compartment:
   Press the handle and slide it to the right
4. Extend the ski bag between the front seats. The zipper allows more convenient access to stored objects and can also be left open to allow the ski bag to dry.

Please ensure that the skis are clean before loading them into the bag. Take care to avoid damage from sharp edges.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Securing the load

Secure the bag's contents by tightening down the strap at the buckle.◀

## Stowing the ski bag

1. To close the hatch in the luggage compartment:
   Press the handle and slide to the left
2. Fold up the ski bag and place it in the compartment

3. Engage the cover as shown
4. Close the cover.

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com

# Driving tips

This section is designed to provide you with extra support by supplying information useful in dealing with specific driving and operating conditions.

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Things to remember when driving

## Break-in procedures

To ensure that your vehicle continues to furnish optimal economy of operation throughout an extended service life, we request that you devote careful attention to the following section.

### Engine and differential

Up to 1,200 miles (2,000 km):
During this initial period you should attempt to avoid constant, steady-state operation and vary both vehicle and engine speeds as often as possible. Until the break-in period has been completed you should also refrain from exceeding the following:

▷ 4,500 rpm or 105 mph (170 km/h)

Always obey all official speed limits.

Avoid full-throttle operation and use of the transmission's kickdown mode during these initial miles.

Once you have driven 1,200 miles (2,000 km), the engine and vehicle speeds can be gradually increased.

You should also comply with these break-in procedures should the engine or differential need to be replaced at a later point.

### Tires

Due to technical factors associated with their manufacture, tires do not achieve their full traction potential until after an initial break-in period. Therefore, drive reservedly during the first 200 miles (300 km).

### Brake system

Brakes require an initial break-in period of approx. 300 miles (500 km) to achieve optimal contact and wear patterns between brake pads and rotors.

## General driving notes

### High temperatures

⚠ Extreme temperatures occur at the catalytic converter on this and every catalyst-equipped vehicle. Do not remove the heat shields installed adjacent to various sections of the exhaust system, and never apply undercoating to them. When driving, standing at idle and while parking take care to avoid possible contact between the hot exhaust system and any highly flammable materials such as hay, leaves, grass, etc. Such contact could lead to a fire, and with it the risk of serious property damage as well as personal injury.◀

### Parking the vehicle

Condensation forms in the air conditioner system during operation, and then exits under the vehicle. Traces of condensed water under the vehicle are thus normal.

### Before driving into the car wash

1. Fold in the door mirrors, refer to page 52, as otherwise they could be damaged due to the width of the vehicle
2. Leave the remote control in the ignition lock, as otherwise the P position of the automatic transmission will automatically be selected when the remote control is removed. Also refer to page 68
3. Release the parking brake, especially when you have activated Automatic Hold. Refer to pages 63 and 64.

### Hydroplaning

⚠ When driving on wet or slushy roads, reduce road speed. If you do not, a wedge of water can form between tires and road surface. This phenomenon is referred to as hydroplaning, and is characterized by a partial or complete loss of contact between tires and road surface, ultimately

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

undermining your ability to steer and brake the vehicle.◀

### Driving through water

Do not drive through water on the road if it is deeper than 1 ft (30 cm), and then only at walking speed at the most. Otherwise, the vehicle's engine, the electrical systems and the transmission may be damaged.◀

## Brake system

### Braking with ABS

The best way to achieve optimal response from the ABS is to apply maximum pressure to the brake pedal during emergency–panic stops. Since the vehicle maintains steering responsiveness, you can nevertheless avoid possible obstacles with a minimum of steering effort.

Pulsation at the brake pedal combines with sounds from the hydraulic circuits to indicate to the driver that ABS is in its active mode.

Do not drive with your foot resting on the brake pedal. Even light but consistent pedal pressure can lead to high temperatures, brake wear and possibly even brake failure.◀

CarManuals2.com

### Disc brakes

#### Driving in wet conditions

While driving in wet conditions and in heavy rain, it is a good idea to apply light pressure to the brake pedal every few miles. Monitor traffic conditions to ensure that this maneuver does not endanger other road users. The heat generated in this process helps dry the pads and rotors to ensure that full braking efficiency will then be available when you need it.

#### Hills

You can retain full and unimpaired braking efficiency by downshifting to a gear in which only minimal brake applications are needed when descending long or steep downhill stretches.

You can further enhance the engine's braking effect by selecting a lower gear in the automatic transmission's manual mode, downshifting as far as first gear on extremely steep stretches, refer to page 68. This strategy helps you avoid placing excessive loads on the brake system.

Never allow the vehicle to coast with the transmission in Neutral – or with the engine switched off – there is no engine braking when the transmission is in Neutral, and no power-assist for brakes and steering when the engine is not running. Never allow floor mats, carpets or any other objects to protrude into the area around the accelerator and brake pedals and obstruct their movement.◀

#### Corrosion

When the vehicle is driven only occasionally, during extended periods when the vehicle is not used at all, and in operating conditions where brake applications are less frequent, there is an increased tendency for corrosion to form on rotors, while contaminants accumulate on the brake pads. This occurs because the minimal pressure which must be exerted by the pads during brake applications to clean the rotors is not reached.

Should corrosion form on the brake rotors, the brakes will tend to respond with a pulsating effect that even extended application will fail to cure.

### Brake pads

BRAKE

If the brake pad wear warning lamp appears in the Check Control, accompanied by a text: please take careful note of the additional information in the Control Display.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Warning lamp for Canadian models.

The brake pads have reached their minimum pad thickness. Have them replaced at your BMW center as soon as possible.

For your own safety: use only brake pads that BMW has released for your particular vehicle model. Because BMW cannot assess the suitability of other brake pads for use on your vehicle, we are unable to assume continued responsibility for the vehicle's operating safety if non-approved pads are installed.◀

# Cargo loading

## Stowing cargo

- ▷ Load heavy cargo as far forward and as low as possible, placing it directly behind the bulkhead behind the rear seats
- ▷ Cover sharp edges and corners
- ▷ For very heavy cargo when the rear seat is not occupied, secure each safety belt in the opposite buckle.

## Securing the load

- ▷ Use the luggage net* or securing straps to hold down small and light-weight luggage and cargo, refer to page 40
- ▷ Heavy-duty cargo straps* for securing larger and heavier objects are available at your BMW center. Anchorages for attaching these heavy-duty straps have been provided in your vehicle's luggage compartment, refer to the illustration
- ▷ Please observe the special instructions supplied with the anchorage fittings.

Always position and secure the load correctly. If you do not, it can even endanger the passengers during braking or evasive maneuvers.

CarManuals2.com

Never exceed either the approved gross vehicle weight or either of the approved axle loads, refer to page 210, as excessive loads can pose a safety hazard, and may also place you in violation of freeway safety laws.

You should never transport heavy or hard objects unsecured in the passenger compartment, as they could fly around and even pose a safety hazard to the vehicle's occupants during abrupt braking or evasive maneuvers.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Roof-mounted luggage rack*

## Anchorage points

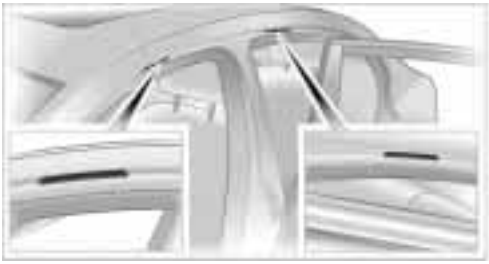

The anchorage points are located within the door openings.

A special rack system is available as an option for your BMW. Please comply with the precautions included with the installation instructions.

Because roof racks raise the vehicle's center of gravity when loaded, they have a major effect on its handling and steering response.
You should therefore always remember not to exceed the approved roof weight, the approved gross vehicle weight or the axle loads when loading the rack.

CarManuals2.com

You can find the specified weights in the Technical data section on page 210.

Make sure that the load is not too heavy, and that it does not extend outward to beyond the limits of the loading surface. Always load the heaviest pieces first – on the bottom. Be sure that adequate clearance is maintained for raising the sliding/tilt sunroof, and that objects do not project into the opening path of the luggage compartment lid.

Secure roof-mounted cargo correctly and securely to prevent it from shifting or being lost during the trip.

Drive smoothly. Avoid sudden acceleration and braking maneuvers. Take corners gently.

# Entry/pass tags

Infrared windshield technology has been used on your vehicle to minimize solar heating of the vehicle interior. This technology also reduces the ability of electronic devices to transmit and receive through the windshield, which will impair their performance and operating range.

If you want to place an electronic toll collection device or entry/pass tags behind the windshield, please use the area marked in the illustration. This area is clearly visible from inside the vehicle.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com

# Navigation

This section contains various examples that illustrate how the navigation system provides you with reliable guidance to your destination.

CarManuals2.com

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Navigation*

## GPS

Enter data only when the vehicle is stationary, and always obey the traffic regulations and road signs in the event of any contradiction between traffic and road conditions and the instructions issued by the navigation system. If you do not observe this precaution, you may be in violation of the law, and can endanger vehicle occupants and other road users.◀

GPS stands for Global Positioning System.

This integral component within your vehicle's navigation system relies on reference satellites to determine the precise location of your vehicle.

By allowing you to find your destination without having to consult conventional road maps as you drive, the navigation system makes an important contribution to traffic safety.

The result: the navigation system provides you with dependable guidance to your destination.

## Map CD

Map CDs are inserted in the navigation computer located behind the left-hand side trim in the luggage compartment.

To ensure that your vehicle's navigation system has access to the latest highway network information, always load the most recent CD version of the digital road map. As is the case with conventional road maps, the map CDs are subject to periodic updates to ensure that they reflect the latest information and surveys.

Map CDs are available at your BMW center.◀

### Changing the map CD

As you drive, the computer will alert you when you are leaving the area stored on your current map CD; you should respond by changing the map CD in the navigation computer.

Map CDs contain road maps covering one or more countries or regions.

To change the map CD:

1. Press the button

   The CD is ejected from the navigation computer
2. Take out the CD
3. Insert the new CD with the labeled side up.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Allow approx. eight seconds for the system to scan the data from the new CD.

## Starting the navigation system

Select "Navigation".

A map will appear in the Control Display; this usually shows the area around your current position. This display will be continually updated as you drive.

When you park the vehicle before reaching the entered destination, upon restarting you will see the question "Continue route guidance?" in the Control Display.

- ▷ When you enter "YES", the guidance system resumes active operation and the last selected screen content appears in the Control Display
- ▷ When you enter "NO" the Control Display returns to the destination entry mode.

### Overview

Press the controller to view the menu.

▷ In the map display mode and during active guidance, all the menu items will disappear after a few moments if no further entries are made.◀

## Display in assistance window*

You can also view the guidance system display in the assistance window; it then remains visible when you select a new menu.

Select ⊏⊐ and confirm.
The following may now appear in the assistance window:

- ▷ Map direction north
- ▷ Map in travel direction
- ▷ Arrow display.

The contents of the assistance window is continually updated as you drive.

To deactivate display:

Select ⊏⊐ again and confirm.

## Selection options

In entering your destination you can select from among the following options:

- ▷ Manual entry of destination address, refer to page 132
- ▷ To select town/city and street from the directory, refer to page 134
- ▷ To select destination with map, refer to page 134

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

- To select destination with "Information", refer to page 135
- To select from among recent destinations, refer to page 136
- To select destination from address book, refer to page 140.

After selecting your destination you can proceed to start the guidance system, refer to page 137.

## Destination entry

Enter data only when the vehicle is stationary, and always obey the traffic regulations and road signs in the event of any contradiction between traffic and road conditions and the instructions issued by the navigation system. If you do not observe this precaution, you may be in violation of the law, and can endanger vehicle occupants and other road users.◀

1. Press the controller
2. Select "Destinations" and confirm

CarManuals2.com

3. Select "Dest. input" and confirm

These menu selections offer you various options for entering your destination, as described in the following section.

## Manual entry of destination address

The system relies on a wordmatch principle to make it easier for you to enter the names or towns or streets. It supports various spellings as well as automatic name completion, refer to page 142.

You can enter the address of your destination with "ABC..."

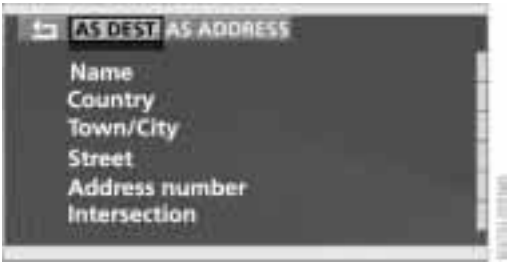


- The "AS DEST." command can be used to select the entered address as destination
- The "AS ADDRESS" command can be used to store the entered address in the address book.

You can store approx. 50 addresses and then import them directly from your address book to the navigation system as travel destinations, refer to page 136.

Note the following special features:

- If you do not enter a street, the system will guide you as far as the city limits
- Depending on the data stored on your map CD, you may also be able to enter the house or building number on some streets
- You can skip the entry of country and locality if the current entries are being retained for your new destination
- You can overwrite street names if you would like to proceed to another street within the same locality.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

The example shows how to use the navigation system to find the following destination:

United States
Beverly Hills, Ca
455 N Rexford Drive

To enter the destination address:

Select "ABC..." and confirm.

## Entering name

The name is not required for the destination guidance system or storage in the list, however can simplify the assignment of addresses.

1. Select "Name" and confirm

2. Turn to select the letters, then confirm your selections by pressing.

   Special characters:

   Cancel selection process

   Enter blank

   Delete last letter

3. Select the name shown in the lower half of the Control Display and confirm your selection.

## Selecting country of destination

When the name of a country appears in white letters in the Control Display, this indicates that data for more than one country are stored on the map CD.

To select the United States as your country of destination:

1. Select "Country" or the country named in the display and confirm your selection. A list of available countries appears in the display
2. Turn until "United States" is selected
3. Press to adopt your selection as your destination.

## Entering destination

"Town/City" or the name of the locality of your last destination will now appear.

1. Select "Town/City" or the display town name and confirm.

2. Turn until "B" is selected
3. Press to confirm your selection.

   A directory listing localities starting with the letter "B" appears in the lower half of the Control Display. The list grows smaller each time you enter a new letter.
4. Enter "Beverly Hills" by selecting and confirming the letters individually.

   Special characters:

   Cancel selection process

   Enter blank

   Delete last letter
5. Select name of locality from the directory and confirm your selection.

A town or city must be entered before active guidance can start.◀

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Entering street, house number and intersection

"Street" or the name of the last street entered will appear.

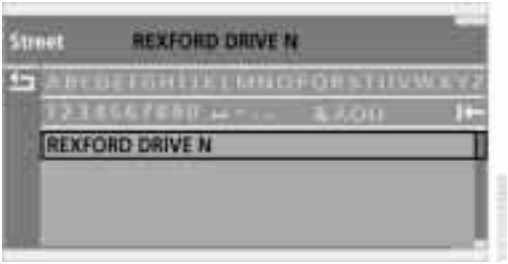


For instructions on entry, refer to Entering destination.

After entering the street you can proceed to select the house number, for instance: "455".

1. Turn until "4" is selected
2. Press to confirm your selection.

   Use the same procedure to select all of the remaining digits in the house number.

   Special characters:

   CarManuals2.com

   Cancel selection process

   Enter blank

   Delete last character
3. Select the number that appears in the lower half of the Control Display and confirm your selection.

   If the selected house number is not stored on the map CD, the system will adopt the nearest available number.
   The option for entering house numbers will not be offered if no house numbers are stored for the selected street on your map CD.◀
4. Address

   ▷ Select "AS DEST."
   Active guidance to your destination can start immediately

   ▷ Use "AS ADDRESS" to store in the address book.

The procedure for entering intersections is basically the same as that used for streets.

## Selecting the town or city and the street from the directory

If you are uncertain about the precise name of the city or town, or the street, the directory can assist you in entering this information. It can show you all of the stored localities in a given country or of the streets listed for any particular town or city.

The directory appears as soon as you enter the first letter of a locality or street. You obtain a more selective listing the more letters you enter.

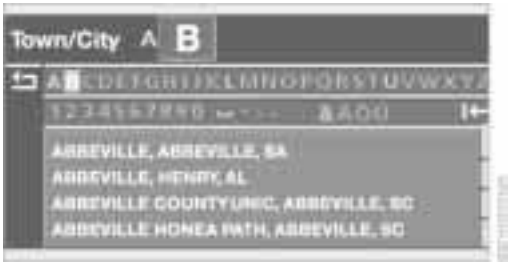


## Map-guided destination selection

Assume that you only know the general location of your destination's street or locality. You also have the option of selecting the destination on a map using a target cursor and importing it into the destination guidance system.

1. Select "With map" and confirm.

   In the Control Display a map section is displayed around the first destination from the destination list, even if the destination guidance system is switched off.◀
2. Turn the controller to adjust the scale
3. Push the controller in the desired direction to localize your destination.
   If no further changes are made to the



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

map, after a brief pause the name of the street or locality marked by the cursor will appear on the screen.

4. Press the controller to view other menu entries:

▷ ⮌ closes "With map"

▷ "Next" switches back to "With map"

▷ "Location" selects the current location as the map's focus again

▷ With "Save dest.", the address in the target cursor can be adopted into the destination input using "AS DEST." or stored in the address book "AS ADDRESS". If the navigation system is unable to identify a street or town/city, your current map coordinates will appear. In order to be able to select this position as destination or to store it in the address book as an address, a name must first be entered, see "ABC...".

▷ You can also use the destination entry map without entering a town or city if you wish to select a destination and import it using the target cursor.◀

## Selecting destination in "Information"

Assume that you are searching for a particular place within a town or city, such as a hotel or restaurant, a filling station, the nearest BMW center, tourist attractions, a hospital.

1. Select "Information" and confirm

2. Select "On location" and confirm
3. Select the desired type of destination, such as "Hotel / Motel" and confirm your selection
4. A maximum of ten destinations now appears on the right side of the Control Display. These are listed by distance to destination, while arrows also appear to indicate their directions from your current location
5. Select and confirm the destination
6. If you select

   ▷ the address, it will be transferred to the destination list

   ▷ ▲▼, the view can be shifted upwards or downwards

   ▷ ⮌, you can switch back to "ABC...".

Using the voice command system:

1. ›Navigation‹
2. ›Information location‹
3. Enter the desired type of destination:

   ▷ ›Hotels‹

   ▷ ›Parking‹

   ▷ ›Gas stations‹.

## Selecting interesting destinations

Are you looking for an interesting destination in a specific locality or country? You can obtain an overview from the map CD, which contains listings of interesting destinations in various categories.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

1. Select "Information" and confirm

2. Select "On town/city" or "On country" and confirm. A screen for entering the town/city appears on the Control Display
3. Enter the desired town/city or country, select "Next" and confirm
4. Select your destination category, such as "Airport" and confirm your selection. "ABC..." appears on the Control Display screen along with an alphabetical listing containing all entries in the selected destination category. You can obtain a more selective display of the information contained in the directory by entering one or more letters
5. Select the desired entry.

Using the voice command system:

1. ›Navigation‹
2. ›Information destination‹
3. Enter the desired type of destination:
   - ›Hotels‹
   - ›Parking‹
   - ›Gas stations‹.

# Recent destinations

## Returning to a recent destination

The system stores the last ten destinations entered.

Select "Last dest." and confirm.

A list of the stored addresses appears on the right side of the Control Display.

Confirm the desired destination and select "AS DEST.". You can also edit existing entries; for conditions refer to "ABC...".

- "AS ADDRESS" stores the destination address in the address book
- "DELETE" removes the destination address.

To delete all current entries:

Select and confirm.

# Destination list

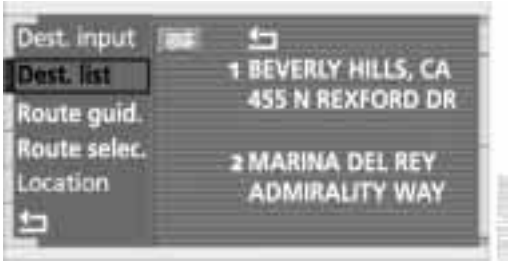


This is the most current listing of entered destinations, with the most recent destinations at the top of the list.

Once you have reached the top destination, you are moved on to the next entry in the destination list.◀

You can edit the entries in this list; start by selecting an entry.

- Edit using "CHANGE"; for operation, refer to "ABC...". In this case, the entries are stored with "AS ADDRESS" in the address book and with "ACCEPT" adopted into the destination list

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

▷ Use "DELETE" to remove an entry

▷ Use ▲▼ to move the address in the destination list. This can change the order of the destination list.

To delete all current entries:
Select ▬ and confirm.

## Selecting route

The navigation system also provides you with the option of selecting a specific travel route. You can define criteria for determining your individual route.

1. Select "Route selec." and confirm:

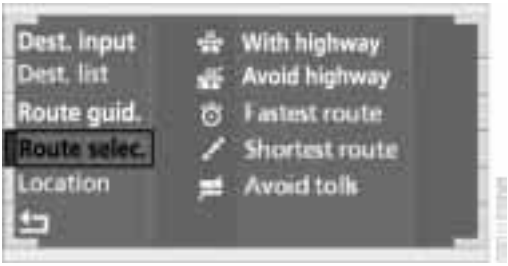


Various options are now listed on the right side of the Control Display

CarManuals2.com

2. Select the priorities for your travel route and confirm.

   ▷ "With highway"

   Freeways and major traffic arteries receive top priority

   ▷ "Avoid highway"

   Freeways are avoided where possible

   ▷ "Fastest route"

   The system determines the fastest route; the selection criteria are distance, vehicle speed and potential sources of traffic congestion

   ▷ "Shortest route"

   Shortest travel distance, determined without including time as a selection criterion

   ▷ "Avoid tolls"

   The system avoids tollways whenever possible in selecting the route.

You can change the selected route as often as you like, both when entering your destination and at any time while the system is guiding you to it – the system revises its travel recommendations accordingly.

▷ The navigation system relies on specific rules to determine your route. These vary according to the different kinds of roads stored on the map CD. As a result, the routes recommended by the navigation system may not always be the same ones that you would choose based on personal experience.◀

Using the voice command system:

1. ›Navigation‹
2. ›Route selection‹
3. Enter the desired priority for your travel route:

   ▷ ›Via freeway‹

   ▷ ›Without freeway‹

   ▷ ›Fastest route‹

   ▷ ›Shortest route‹.

## Starting the destination guidance system

Select "Route guid." and confirm.

As the navigation computer determines the route to your destination, the distance and the true compass direction to your destination will appear at the upper right of the Control Display – not in all display modes.

Once the system has determined your travel route, the city or town of destination will appear in the upper right corner of the display. The destination guidance is carried





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

out in dependence on the selected view, refer to Displaying route.
The system also provides you with voice instructions.

You will also be guided to your destination if you select a different menu, e.g. "Entertainment" or "Climate". You will be informed of a required change in direction in good time before each intersection with voice instructions.◀

›Route guidance on‹.

# Displaying route

The "View" menu allows you to view your current travel route at various resolutions.

CarManuals2.com

## Selecting display of route map

You can also select a map showing your travel route while the system is guiding you to your destination.

1. Select "View" and confirm your selection. All the menu items will disappear after a few moments if no further entries are made
2. Select "Map facing N." and confirm your selection.

During active guidance, the route map will appear automatically when you enter an area that is not completely covered by your map CD.◀

›Map‹.

Shows the navigation system map.

## Changing scale

Turn the controller to adjust the scale.
The map scale is provided at the lower right of the Control Display.

1. ›Scale‹
2. Enter the desired map scale.

## Altering display direction

At scales of less than 1.2 miles (2 km) you enjoy the option of deciding whether to orient the map to north or toward your current direction of travel. From 1.2 miles (2 km) the map always points toward North.

1. Select "View" and confirm your selection. All the menu items will disappear after a few moments if no further entries are made
2. Select "Map dir. travel" or "Map facing N." and confirm.

## Canceling route map

To switch to directional arrow mode:

1. Select "View" and confirm your selection. All the menu items will disappear after a few moments if no further entries are made
2. "Arrow display"
   The destination guidance system is by means of arrows in the Control Display and in the Info Display, refer to page 14.

The arrow will follow the general course when you travel through an area for which your map CD does not provide comprehensive coverage. This feature is intended to assist you at crossroads and intersections.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Displaying route list

You can access a listing of streets and towns on your route whenever the guidance system is active. This list is based on the navigation system's suggested travel route.

The distances remaining to be traveled on each individual road are also displayed.

1. Select "View" and confirm your selection. All the menu items will disappear after a few moments if no further entries are made
2. Select "Route" and confirm.
   If the system has not yet completely defined the travel route, "..." will appear in the list.

Select ⮌ and confirm to switch off the route list.

▷ The route list is displayed again after a short time if no other menu item has been selected.◀

## Selecting new route

During active guidance you can revise the navigation system's route recommendations to avoid particular stretches of road. Enter the number of miles/kilometers that you want to travel before returning to the original route.

CarManuals2.com

Select "New route" and confirm your selection.

▷ "Avoid sect.":
The route list appears in the Control Display. Select one or several connected sections of the route that you wish to avoid and confirm your selection.
You can correct erroneous entries by again selecting and confirming the stretch of the travel route to cancel its avoid status. You can also replace the avoid section by marking another stretch.
Use ⮌ to exit from the route list and calculate a new route

▷ "Avoid route":
You can also make a detour of up to 20 miles (30 km) around selected sections of the calculated route. Proceed by turning the controller to enter the desired detour mileage, then confirm your selection. To exit the "Avoid route" mode without modifying your route, enter 0 miles (0 km) and confirm your entry.

### Bypass traffic congestion

If traffic congestion is present on your projected travel route, the navigation system will issue a "Last exit" warning just before you reach the back-up.
To obtain an alternative route leading around the traffic congestion:

Select "Detour" and confirm.

The GPS navigation system determines a new route and then returns to the destination guidance system.

▷ The traffic information service might not be available in some regions, which means that a traffic jam cannot be displayed.◀

## Voice guidance

To prevent the navigation system from interrupting other audio sources, such as a news program or traffic bulletin, you can deactivate the voice guidance system.

Press the controller and select the desired symbol during active destination guidance:

Activating and deactivating voice guidance.

›Message on‹ or
›Message off‹.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

To repeat most recent instructions with information on route or travel direction, when the voice guidance is activated.

### Volume adjustment

You can adjust the volume for the navigation instructions:

Wait until the voice guidance is issuing instructions, then turn the knob to select the desired volume.

The navigation system's voice guidance will continue to issue instructions at this volume level, even if the other audio accessories are set to minimum volume.

The system automatically selects your individual volume setting each time you unlock the vehicle using your personal remote control unit.◀

## Terminating/interrupting active destination guidance

To terminate or interrupt the active destination guidance system:

Select "Route guid." and confirm.

The system suspends active guidance, including voice guidance, until reactivated.

1. ›Navigation‹
2. ›Route guidance off‹.

## Address book

To make it even easier to enter destinations, the system lets you store addresses for frequent destinations.

You have the possibility to store the addresses in two separate address books:

- ▷ the address book of the navigation system
- ▷ the address book of the voice command system.

CarManuals2.com

### Navigation system address book

#### Storing addresses

In this address book, you can store approx. 50 addresses.

Addresses can be entered from different menus.
The system stores the current address in the address book as "AS ADDRESS".

You can also enter your current position in the address book after leaving the sector covered by the map CD. In this case, you must enter a name.◀

#### Selecting an address

Select "Address book" and confirm.

A list of the stored addresses appears on the right side of the Control Display.

To select an address as destination:

1. Select address and confirm
2. Select "AS DEST." and confirm.

1. ›Navigation‹
2. ›Destination input navigation‹
3. Select destination in the Control Display.

You can also edit existing entries in the address book; for operation refer to "ABC...".



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Home address

You can use to adopt your home address into the destination input.

Select and confirm.

- ▷ "AS DEST." adopts the current home address as destination
- ▷ You can enter and edit the home address using the "ABC..." function
- ▷ "LOCATION" adopts the current location as home address
- ▷ "AS ADDRESS" stores the entered address or current location as your home address.

### To delete addresses

Select and confirm to delete all existing entries.

## Voice command system address book

### Storing addresses

The first destination in the destination list can be stored in this address book:

1. ›Navigation‹
2. ›Save destination‹
3. Enter a name to be assigned to the destination's map coordinates.

It is always the case that only the first entry in the destination list can be saved. To save other addresses, change the destination list accordingly, see page 136.

▷ The house number is not stored in the address book of the voice command system.◀

### Selecting an address

1. ›Navigation‹
2. ›Destination input with address‹
3. ›Select destination‹
4. Enter destination

or

1. ›Navigation‹
2. ›Read out address book‹
   - ▷ To scroll forward: ›Next‹
   - ▷ To scroll back: ›Back‹
   - ▷ To repeat: ›Repeat‹
   - ▷ To import to destination list: ›Select‹.

### Home address

1. ›Navigation‹
2. ›Route guidance to home‹.

### To delete addresses

To delete individual entries:

1. ›Navigation‹
2. ›Delete‹
3. Select name.

To delete all current entries:

1. ›Navigation‹
2. ›Delete address book‹.

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Location

## Display of current location

1. Select "Location" and confirm.

You can request the current location of your BMW or view a display showing your map location. If the navigation system is unable to identify a town or city, your current map coordinates will appear.

If the navigation system recognizes the city, but not the street and intersection, you can enter these manually, refer to "ABC..." for operating instructions. The entry is adopted as the current location with "ACCEPT".

"AS ADDRESS" can be used to import your current location into the address book; you can also enter a name as desired. Entry of a name is mandatory for locations identified only by their map coordinates.

CarManuals2.com

## Entering the location

We recommend that you avoid entering subsequent corrections of your position unless absolutely necessary. After transport by truck or rail, etc., the GPS receiver may require several minutes to determine your current location. You can reduce the amount of time the system requires to determine your location by entering it manually.

To enter your current location:

1. Select "Location" and confirm
2. Enter the address of the current location in the same way as for destination input, refer to page 132.

▷ Once effective GPS reception has been established, it will no longer be possible to revise your position manually.◀

# Wordmatch principle

The system relies on a wordmatch principle to make it easier for you to enter the names of towns or streets. The system runs ongoing checks, comparing your destination entries with the data stored on the map CD as the basis for instant response. The user benefits include:

▷ When you make an entry that consists of more than one word, the system can identify the name regardless of the sequence in which you enter the individual words.

Example:

Official version:
J.F. Kennedy Square

Possible entries:
Kennedy Square J.F.

or:
Square J.F. Kennedy

▷ Names of specific locations can also vary from the official versions provided that the spelling of the entry corresponds to a standard form used in another country

▷ When you are entering the names of cities and streets the system will complete them automatically as soon as enough letters are available to ensure unambiguous identification.

Example:

If you want to drive to Iowa Ave NW in Washington, the system has already identified the street name when "o" is entered and displayed it in the lower half of the Control Display.

▷ The system only accepts name entries beginning with letters that are stored on the map CD. The system will not accept non-existent names and addresses.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# What to do if ...

What to do if ...

- you request the current location of your vehicle, but do not receive a precise display?
  The system is unable to receive enough GPS signals at your current location owing to obstructions, your location is not yet available on your CD, or the system is in the process of calculating your location. Please wait and then try again later on
- the GPS logo disappears from the Control Display screen?
  Reception is interrupted; a building or similar obstruction may be the cause
- the guidance system refuses to import an address from the destination directory as its destination?
  The address is in the list, but not on the map CD currently in use. Choose an address as close as possible to the original one, using the destination entry map as required
- the guidance system does not adopt an address without the street?
  No specified center is defined for the selected locality on your CD. Enter any street, or a destination such as the railway station, etc., then start the guidance system
- you want to enter an address for the guidance system, but it is not possible to select the letters for your desired entry?
  The address is in the list, but not on the map CD currently in use. In this case, the system will not offer you any letters to choose from. Choose an address as close as possible to the original one, using the destination entry map as required
- the system stops furnishing directions on which way to turn as you approach intersections?
  You are driving in an area that has not yet been completely recorded on the map CD. Instead of an arrow indicating a turn, you will see an arrow which indicates the general direction of your planned route;
  or
  you have left the recommended route and the system requires a few seconds to calculate a new recommended route
- while the destination route map has automatically been adopted for display?
  You are driving in an area that has not yet been recorded on the map CD. The guidance system cannot operate under these conditions. However, you will see the current position of your BMW in the map display to help you orient yourself
- the battery has been disconnected?
  It will take approx. 15 minutes for the system to resume operation.

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Entertainment

This chapter is intended to assist you in deriving maximum listening pleasure from radio broadcasts, CDs, cassettes or DVDs.

CarManuals2.com

# Entertainment

## Controls

### Operation using buttons

CarManuals2.com

The illustration shows a CD player as an example.

**1** Operate audio and video sources
- ▷ Press: switching on/off
- ▷ Turn: adjusting volume

**2** CD or cassette slot

**3** Eject CD or cassette

**4** Station scan/track search
- ▷ Station scan
- ▷ Tape fast-forward/reverse
- ▷ Music track search for CD and cassette, chapter search for DVD changer.

### Operation in Control Display

The following control options are available in the "Entertainment" menu.

▷ "FM..." and "AM..."
Select waveband

▷ "WB"
Select Weather Band

▷ "Tape", "CD" and CD
Switch between audio sources

▷ "Memory"
Store a station
Tone settings

▷ "Video" and "Audio"
Switch to video or audio sources

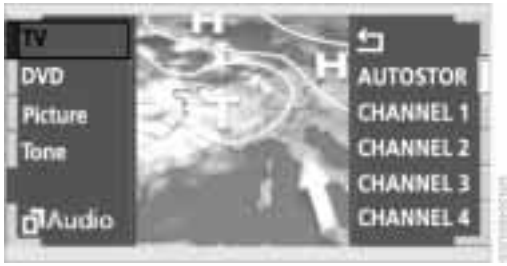


▷ "TV" and "DVD"
Switch between video sources

▷ "Picture"
Adjust picture
Select standard
Select picture format

▷ "Tone"
Tone settings.

You can also control the radio, CD player, CD changer cassette deck and the TV using the buttons incorporated in the steering wheel, refer to page 18, as well as via the voice command system, refer to page 26.

## Care instructions

You can find everything you need to know on this topic by consulting the separate Care manual.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Switching on/off

Press the knob.

The system returns to the most recently selected audio or video source: radio, cassette, CD, DVD or TV.

›Radio‹ or ›Audio off‹.

## Using with ignition off

Switching the ignition off simultaneously deactivates the sound system.

Switch on again as desired.

The audio and video functions remain available for use for a period of approx. 20 minutes after you switch off the ignition.

To avoid discharging the battery you should always switch off the sound and video systems when leaving the vehicle.◀

## Volume adjustment

### Adjusting volume

Turn the knob to the desired volume level.

The sound system automatically reverts to its mute mode automatically whenever you use your portable phone.◀

The system automatically selects your individual volume setting each time you unlock the vehicle using your personal remote control unit.◀

## Tone control

### Playing audio recordings

You can choose from the following tone settings:

- Treble:
  To amplify or reduce high frequencies
- Bass:
  To amplify or reduce low frequencies
- Right/left balance adjustment – Balance:
  Left or right, high/low volume
- Front-to-rear adjustment – Fader:
  Front or rear, high/low volume
- Default settings – RESET:
  This feature resets the tone settings to their standard default settings
- Speed-sensitive volume adjustment – Speed Vol.
- Spatial sound effect Professional LOGIC7*
- Equalizer*.

The speakers and headphones can be adjusted separately. The tone settings of the headphones are made in the rear screen with the headphones connected. Only treble, bass and balance can be adjusted.◀

The system automatically selects your individual tone setting each time you unlock the vehicle using your personal remote control unit.◀

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Tone adjustment

1. Select "Memory" and confirm your selection

2. Select "Tone" and confirm your selection

For the sound settings of the TV or DVD you can directly select and confirm "Tone" for the video sources.◀

3. Select desired tone settings

▷ "Treble" and "Bass"

Select "Treble" or "Bass". Press and turn the controller to make the adjustment

▷ "Balance" and "Fader"

Select "Balance" or "Fader". Press and turn the controller to make the adjustment

▷ "Speed Vol."

Raises volume as vehicle speed increases. By pressing and turning the controller, you can adjust the values between 1- 6

▷ "LOGIC7"*

Press and turn the controller to make the adjustment.

You can set the spatial sound effect between the values 0 and 10. The optimum spatial sound lies at the values 5 and 6.

At 0, the spatial sound effect is switched off. This setting is suitable forradio plays, for example.

LOGIC7 and the LOGIC7 logo are registered trade marks of Lexikon, Inc., a company of the Harman International Group.◀

▷ Equalizer*

Select and confirm.

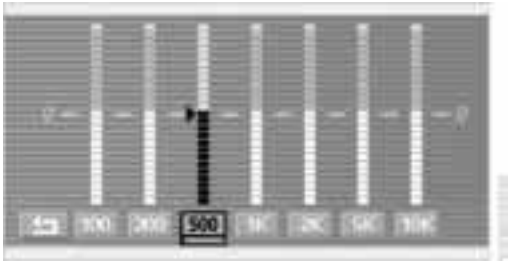


Turn the controller to select the desired frequency range. Repeated pressing and turning of the controller makes the adjustment.

## Resetting the tone settings

You can reset all tone settings except "Speed Vol." to the standard default settings.

Select "RESET" and confirm.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Radio

### Operating temperatures

Only operate the radio at temperatures of 5 °F (–15 °C) to 140 °F (+60 °C) otherwise, malfunctions can occur.
Even when switched off, the device should only be exposed to temperatures between –13 °F (–25 °C) and 185 °F (+85 °C).◀

## Starting

1. Switch on audio or video sources, refer to page 147

If a video source is switched on, select "Audio" and confirm.◀

2. If another audio source is switched on, select "FM..." or "AM..." and confirm.

›Radio‹.

Volume adjustment, refer to page 147.

Tone control, refer to page 147.

## Stopping

Switch off audio or video sources, refer to page 147

or switch over to

- CD player, refer to page 153
- CD changer, refer to page 155
- Cassette deck, refer to page 158
- TV, refer to page 160
- DVD, refer to page 162.

›Audio off‹.

## Selecting frequency band

Your radio provides reception of the FM and AM wavebands.

To select waveband:

Select "FM..." or "AM..." and confirm.

Each time you confirm "AM..." the system alternately switches between the AM waveband and the "Autostore" mode.
Each time you confirm "FM...", the system alternately switches between "Memorized Stations" and the "Autostore" mode.◀

1. ›Radio‹
2. ›FM‹ or ›AM‹.

### Displaying information

The current waveband selection appears in the Control Display, for instance, in the FM waveband:

- Memorized Stations
  FM waveband
- 03
  Number of memory location along with broadcast frequency.

The frequency of the current station can be seen in the lower status line of the Control Display, refer to page 24.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Selecting a station

## Selecting station manually

To search for a particular station by selecting its frequency

1. ›Radio‹
2. ›Frequency 87 ..107 (Point 0 ..9)‹.

## Scanning

To start scanning:

Extended pressure.

The scan mode begins with the currently selected frequency.

The scan mode is stopped as soon as a station is found.

The frequency of the station appears in the bottom status line, refer to page 24.

## Next station



Press to select the desired direction.

The next station that appears in the Control Display is displayed.

1. ›Radio‹
2. ›Next station‹ or ›Station back‹.

## Sampling and selecting – Scan

The automatic scan search feature automatically plays a brief sample from each station in the selected waveband.

1. Select "SCAN" in the Control Display and confirm your selection.
   Station search starts
2. To select a station:
   Confirm "SCAN" a second time.
   This cancels the scan function, and the radio remains on the current station.

# Storing and retrieving a station

## Memory locations

Your radio can store 36 stations:

CarManuals2.com

▷ You can store as many as 18 stations in the FM waveband

▷ You can store up to 18 stations in the AM waveband.

▷ Each time you confirm "AM..." the system alternately switches between the AM waveband and the "Autostore" mode.
Each time you confirm "FM...", the system alternately switches between "Memorized Stations" and the "Autostore" mode.◀

## Storing a station

1. Select "Memory" and confirm your selection
2. Select frequency band

   "M FM" or "M AM"
   Each time you confirm "M AM" the system alternately switches between the AM waveband and the "Autostore" mode.
   Each time you confirm "M FM...", the system alternately switches between "Memorized Stations" and the "Autostore" mode.
3. To select a station:
   ▷ "SCAN"
   The stations are played briefly one after the other and selected by operating this function once again



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

▷ "MANUAL"
The stations can be set manually by turning the controller

4. To store a station:
Select "Memorize" and confirm your selection
5. Select a memory location

Turn the controller to select a memory location and confirm your entry.

The station is now stored.

The autostore utility's "AUTO" feature automatically selects and stores the stations providing the best reception in the AM and FM wavebands.

## Selecting a stored station

1. Select requency band

"FM..." or "AM..."
Each time you confirm "AM..." the system alternately switches between the AM waveband and the "Autostore" mode.
Each time you confirm "FM...", the system alternately switches between "Memorized Stations" and the "Autostore" mode

2. Turn and press the controller to select stored stations.

1. ›Radio‹
2. ›Station 1 ..12‹.

## Weather Band

CarManuals2.com

Weather Radio is a service of the National Oceanic and Atmospheric Administration – NOAA – of the U.S. Department of Commerce. Weather messages are repeated every four to six minutes and are routinely revised every one to three hours, or more frequently if needed. Most of the stations operate 24 hours daily. During severe weather, National Weather Service forecasters can interrupt the routine weather broadcasts and substitute special warning messages. If you have a question concerning NOAA Weather Radio, please contact your nearest National Weather Service Office, or write to National Weather Service – Attn: W/OM11 –, National Oceanic and Atmospheric Administration, 1325 East-West Highway, Silver Spring, MD. 20910.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Selecting Weather Band

1. Select "WB" and confirm your selection

2. Select Weather Band station and confirm.

▷ It might occur that the Weather Band station is not available in some regions.◀

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# CD Compact Disc *

To prevent CDs from being copied illegally, they are often provided with copy protection by the manufacturer. Please observe the information on your CD. These CDs differ from the CD Audio Standard Red Book, on the basis of which all CD players and changers are designed. Under certain circumstances this can prevent or restrict the playing of CDs on your CD player. In this case please contact the CD dealer or manufacturer.◀

CarManuals2.com

If you play self-recorded audio CDs, faults, e.g. drop-outs, can occur, or the CD is not played at all.◀

With self-recorded CDs, labels applied later can become detached during playback due to the development of heat, causing irreparable damage to the device.◀

### Operating temperatures

Only operate the CD-player at temperatures of 5 °F (–15 °C) to 140 °F (+60 °C) otherwise, malfunctions can occur.
Even when switched off, the device should only be exposed to temperatures between –13 °F (–25 °C) and 185 °F (+85 °C).◀

### Atmospheric humidity

High levels of humidity inside the player can condense on the laser's scan lens and prevent it from reading the CD.

## Starting

Insert the CD in the slot.

If a CD is already inserted in the CD player:

Start playback

Select "CD" and confirm.

1. ›CD‹
2. ›CD on‹.

Volume adjustment, refer to page 147.

Tone control, refer to page 147.

## Stopping

The CD emerges slightly from the CD player

or

switch off audio or video sources, refer to page 147

or switch over to

- ▷ Radio, refer to page 149
- ▷ CD changer, refer to page 155
- ▷ TV, refer to page 160
- ▷ DVD, refer to page 162.

1. ›CD‹
2. ›Stop‹.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Searching for music tracks in the Control Display

## Selecting music track

Select music track and confirm your entry.

CarManuals2.com

1. ›CD‹
2. ›Track 1 ..30‹.

## Sampling and selecting – Scan

The system plays a brief sample from each CD track.

1. To start sampling:
   Select "SCAN" and confirm
2. To select a track:
   Confirm "SCAN" a second time to cancel the scan function. Play resumes at the point on the CD at which sampling was interrupted.

## Random play sequence – Random

The music tracks on the CD are played in a random sequence, Random.

To start random play:
Select "RND" and confirm your selection.

To cancel random play:
Select any other function except track search.

# Using the buttons to search for music tracks

## Track search

Select the direction

Press repeatedly, continuing until you reach the desired track.

The CD will start play at the title selected.

1. ›CD‹
2. ›Next‹ or ›Back‹.

## Fast forward/reverse

1. Select the direction

   Press and hold the button. The tracks can be heard, but the sound is distorted
2. To interrupt the fast forward/reverse function, release the button.
   The CD will start play at the point selected.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# CD changer*

## Precautions when using laser equipment

The BMW CD changer is a Class 1 laser product.

CarManuals2.com

Never remove the cover from the housing. Do not operate the unit if the cover is damaged. Operation without the cover can lead to serious eye injury from invisible laser beams.
Always refer all repair and maintenance operations to qualified technicians.◀

## Copy protection

To prevent CDs from being copied illegally, they are often provided with copy protection by the manufacturer. Please observe the information on your CD. These CDs differ from the CD Audio Standard Red Book, on the basis of which all CD players and changers are designed. Under certain circumstances, this can prevent or restrict the playing of CDs on your CD changer. In this case, please contact the CD dealer or manufacturer.◀

## Location

The BMW CD changer with a storage capacity of 6 CDs is installed above the glove compartment.

## Removing the CD magazine

To insert or remove CDs from the CD magazine you must first remove it from the CD changer:

1. Press button **1**; the lid **2** opens
2. The CD magazine is ejected and can be removed.

## Inserting/removing CDs from the CD magazine

When inserting or removing CDs always remember to grasp them on the edge, taking care to avoid touching the data side with its mirror finish.◀

To insert:
Insert the CD in its slot with the label side on top.

To remove:
Pull out the desired drawer and remove the corresponding CD, as shown in the illustration.

With self-recorded CDs, labels applied later can become detached during playback due to the development of heat, causing irreparable damage to the device.◀





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Inserting the CD magazine

1. Press button **1**; the lid opens
2. Ensure that the arrow symbol is pointing toward the CD player and slide the magazine **2** all the way in. The lid closes automatically.

The CD changer automatically reads in the loaded CDs and is then ready for operation.◀

### Operating temperatures

Only operate the CD changer at temperatures of 5 °F (–15 °C) to 140 °F (+60 °C); otherwise, malfunctions can occur.
Even when switched off, the device should only be exposed to temperatures between –13 °F (–25 °C) and 185 °F (+85 °C).◀

### Atmospheric humidity

High levels of humidity inside the player can condense on the laser's scan lens and prevent it from reading the CD.

## Starting

1. Insert the CD magazine

2. Select CD ≡ and confirm.

After a few seconds, play will resume at the point where the CD stopped earlier.

If the CD magazine has been newly filled, playback begins with the lowest CD, e.g. CD 1, track 1.◀

1. ›CD changer‹
2. ›CD on‹.

Volume adjustment, refer to page 147.

Tone control, refer to page 147.

If you play self-recorded audio CDs, faults, e.g. drop-outs, can occur, or the CD is not played at all.◀

## Stopping

Switch off audio or video sources, refer to page 147

or switch over to

- Radio, refer to page 149
- CD player, refer to page 153
- Cassette deck, refer to page 158
- TV, refer to page 160
- DVD, refer to page 162.

CarManuals2.com

1. ›CD changer‹
2. ›Stop‹.

## Status displays

The CD magazine's load status is indicated in the Control Display.

If the display fails to detect a CD that you have loaded in the magazine, check to ensure that the CD has been inserted correctly and inspect it for signs of defects.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Searching for music tracks in the Control Display

## Selecting CD

Select CD and confirm.

Playback starts on the first track. At the end of the last track, the next CD will be selected.

›CD 1 ..6‹.

## Sampling and selecting – Scan

The system automatically plays a brief sample from each of the tracks on the current CD.

1. To start sampling:
   Select "SCAN" and confirm.
   The Scan function starts with the next track. Once all tracks have been played once, the next track is played
2. To select a track:
   Confirm "SCAN" a second time to cancel the scan function. Play resumes at the point on the CD at which sampling was interrupted.

## Random play sequence – Random

In this mode the music tracks on the current CD are played in a random sequence, Random.

To start random play:
Select "RND" and confirm your selection.

To cancel random play:
Select any other function except track search.

# Using the buttons to search for music tracks

## Track search

Select the direction

Press repeatedly, continuing until you reach the desired track on the current CD.

The CD will start play at the title selected.

1. ›CD changer‹
2. ›Next‹ or ›Back‹.

## Fast forward/reverse

1. Select the direction

   Press and hold the button. The tracks can be heard, but the sound is distorted
2. To interrupt the fast forward/reverse function, release the button.
   The system will continue play at the point on the CD at which the button was released.

## Selecting music track

1. ›CD changer‹
2. ›Track 1 ..30‹.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Cassette *

## Operating temperatures

▷ Only operate the cassette deck at temperatures of 5 °F (–15 °C) to 140 °F (+60 °C); otherwise, malfunctions can occur.
Even when switched off, the device should only be exposed to temperatures between –13 °F (–25 °C) and 185 °F (+85 °C).◀

## Starting

Slide the cassette all the way into the slot, ensuring that the side with the exposed tape is on the right.

If a cassette is already in the slot:

Start playback

Select "Tape" and confirm.

›Tape on‹.

Volume adjustment, refer to page 147.

Tone control, refer to page 147.

## Stopping

The cassette emerges from the slot

or

switch off audio or video sources, refer to page 147

or switch over to

▷ Radio, refer to page 149

▷ CD changer, refer to page 155

▷ TV, refer to page 160

▷ DVD, refer to page 162.

1. ›Tape‹
2. ›Stop‹.

## Selecting side A or B

Select "Side" and confirm.

1. ›Tape‹
2. ›Reverse‹.

## Switching "Booktape" on/ off

Select "Booktape" and confirm.

Each time you confirm "Booktape", the deck alternately switches between the two booktape tracks and the standard stereo sound track.

The selected booktape track is indicated as "Booktape 1" or "Booktape 2".

When you change tape sides with the "Side" command the deck reverts to playing the standard stereo tape.

## Noise suppression

Dolby B or C are systems designed to suppress noise and hiss during playback of audio cassettes.

It amplifies high frequencies during recording, and reduces their intensity during playback. Because background noise consists primarily of high frequencies generated during play, this strategy results in lower levels of background noise.

Dolby and the DD symbol are registered trademarks of the Dolby Laboratories Licensing Corporation.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Switching Dolby on/off

Activate only when playing cassettes that were recorded with Dolby B or Dolby C, as the quality of sound reproduction will otherwise suffer from a loss of high-frequency response.◀

1. Select "Tape" and confirm
2. Select "Dolby..." and continue pressing until you obtain the best sound quality. The system switches between Dolby B and Dolby C or switches off the Dolby function.

The selected noise-suppression mode is indicated as "Dolby B" or "Dolby C".

## Searching for music tracks

### Fast forward/reverse

Select the direction

Press twice briefly or once for a longer period.

1. ›Tape‹
2. ›Next‹ or ›Back‹.

When it reaches the end of the tape, the player automatically switches to the other side.

To interrupt the fast forward function

### Music search

For the music search feature to operate, there must be pauses of at least 4 seconds between the individual music selections.◀

Switch on the music search feature

The tape is wound forward or back to the next music selection, and switches to the other side when it reaches the end of the current side.

To interrupt the fast forward function

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# TV *

For your own safety, the TV picture is only shown on the rear screen.

Due to the quality of mobile reception, reduced picture quality can result depending on the location and network coverage in spite of the highly advanced reception technology used. A change in vehicle locations can result in improved reception quality in many cases.◀

## Starting

1. Switch on audio or video sources, refer to page 147

   If an audio source is switched on, select "Video" and confirm.◀

2. Select "TV" and confirm your selection.

   The device selects the last station set.

›TV on‹.

Volume adjustment, refer to page 147.

Tone control, refer to page 147.

All menu items will disappear from the screen after a brief pause if you do not make any additional entries.◀

## Stopping

Switch off audio or video sources, refer to page 147

or switch over to

- Radio, refer to page 149
- CD player, refer to page 153
- CD changer, refer to page 155
- Cassette deck, refer to page 158
- DVD, refer to page 162

or

change to another menu.

1. ›TV‹
2. ›Off‹.

## Storing programs

The stations with the strongest reception are automatically stored and continuously adjusted to the respective reception situation.

CarManuals2.com

## Selecting programs

1. Press controller to view the programs
2. Select program and confirm

or

select the direction

Press repeatedly, continuing until you reach the desired program.

1. ›TV‹
2. ›Next‹ or ›Back‹.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Adjusting the picture*

During reception, the menu items are displayed by pressing the controller.◀

1. Select "TV" and confirm your selection
2. Select "Picture" and confirm.

Additional menu items are displayed on the right-hand side.

### Selecting brightness, color, contrast and tint

Select "Brightness", "Color", "Contrast" or "Tint". Press and turn the controller to make the adjustment.

CarManuals2.com

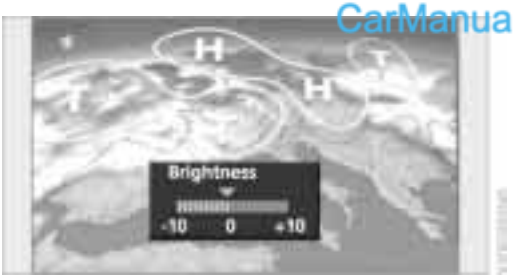


## Selecting standard

Television stations can be received worldwide with the multi-standard receiver for PAL, SECAM, NTSC.

The TV standard used is not the same in all countries. However, you can change over your TV receiver to all common TV standards.

During reception the menu items are displayed by pressing the controller.◀

1. Select "TV" and confirm your selection
2. Select "Picture" and confirm
3. Select "TV format" and confirm your selection
4. Select the country you are currently in from the list displayed and confirm.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# DVD changer*

## Precautions when using laser equipment

The BMW DVD changer is a Class 1 laser product.

Never remove the cover from the housing. Do not operate the unit if the cover is damaged. Operation without the cover can lead to serious eye injury from invisible laser beams.
Always refer all repair and maintenance operations to qualified technicians.◀

## Copy protection

Macrovision copy protection:
This product incorporates copyright protection technology that is protected by method claims of certain U.S. patents and other intellectual property rights owned by Macrovision Corporation and other rights owners. Use of this copyright protection technology must be authorized by Macrovision Corporation, and is intended for home and other limited viewing uses only unless otherwise authorized by Macrovision Corporation. Reverse engineering or disassembly is prohibited.◀

To prevent CDs from being copied illegally, they are often provided with copy protection by the manufacturer. Please observe the information on your CD. These CDs differ from the CD Audio Standard Red Book, on the basis of which all CD players, changers and your BMW DVD changer are designed. Under certain circumstances this can prevent or restrict the playing of CDs on the DVD changer. In this case please contact the CD dealer or manufacturer.◀

## Supported media formats

The DVD changer can play the following formats:

- ▷ Video DVD
- ▷ CD-DA – Audio CD
- ▷ CD-R.

The DVD Audio format is not supported by the DVD changer. However, many audio DVDs available in stores also contain a video track in the DVD Video format in addition to the audio track. These DVDs can be played back by the DVD changer. Please see the information on your DVD to determine whether your audio DVD contains an additional video track.◀

DVDs are usually divided into tracks and chapters and can contain different subtitles, camera angles or sound tracks, languages and sound formats. Depending on the version of the DVD, these functions can be selected either directly with the DVD control system or only via the DVD-specific menu. See the information on your DVD for possible selections.◀

## Location

The BMW DVD changer for 6 DVDs or audio CDs is mounted behind the left-hand side trim panel in the luggage compartment.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Removing the DVD magazine

To insert or remove DVDs or CDs from the storage magazine, you must first remove it from the DVD changer:

1. Push the door to the right, see arrow **1**
2. Press the button, see arrow **2**.

The magazine is ejected and can be removed.

## Inserting/removing CDs/DVDs from the DVD magazine

When inserting or removing DVDs/CDs, always remember to grasp them on the edge, taking care to avoid touching the data side with its mirror finish.◀

To insert:
Insert the DVD or CD in its slot with the label side on top.

To remove:
Pull out the desired drawer and remove the corresponding DVD or CD, as shown in the illustration.

With self-recorded CDs, labels applied later can become detached during playback due to the development of heat, causing irreparable damage to the device.◀

Dual-sided DVDs available from retail suppliers are coated on both sides and bear no markings. This means both sides are information carriers. To play back the information on the other side, remove the magazine and turn over the DVD.◀

If you play self-recorded audio CD-Rs, faults, e.g. drop-outs, can occur.◀

## Inserting the DVD magazine

1. Push the door to the right
2. Ensure that the arrow symbol is pointing toward the DVD changer and slide the magazine all the way in
3. Close the door again.

The DVD changer checks the magazine for inserted DVDs or CDs and is then ready for operation.◀

## Operating temperatures

Only operate the DVD changer at temperatures of 5 °F (–15 °C) to 140 °F (+60 °C); otherwise, malfunctions can occur.
Even when switched off, the device should only be exposed to temperatures between –13 °F (–25 °C) and 185 °F (+85 °C).◀

## Atmospheric humidity

High levels of humidity inside the player can condense on the laser's scan lens and prevent it from reading the DVD.

## DVD country codes

Your DVD changers only plays DVDs with the coding 0 or 1. This coding cannot be changed.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Care instructions

You can find everything you need to know on this topic by consulting the separate Care manual.

## Starting

Make all entries with the vehicle stationary. If you do not observe this precaution, you may endanger vehicle occupants and other road users.◀

1. Inserting the DVD magazine

2. Select "DVD" and confirm.

After a few seconds, play will resume at the point where the CD stopped earlier.

CarManuals2.com

If the DVD magazine has been newly filled or an audio CD played from the DVD magazine, playback begins with the lowest DVD in the DVD magazine.◀

›DVD on‹.

Volume adjustment, refer to page 147.

Tone control, refer to page 147.

If you play self-recorded audio CDs, faults, e.g. drop-outs, can occur, or the CD is not played at all.◀

## Stopping

1. Press the controller
2. Select ⮌ and confirm.
3. Switch over to
   - ▷ Radio, refer to page 149
   - ▷ CD player, refer to page 153
   - ▷ CD changer, refer to page 155
   - ▷ Cassette deck, refer to page 158
   - ▷ TV, refer to page 160

or

change to another menu.

1. ›DVD‹
2. ›Off‹.

## Status displays

The DVD magazine's load status is indicated in the Control Display.

If the display fails to detect a DVD that you have loaded in the magazine, check to ensure that the DVD has been inserted correctly and inspect it for signs of defects.
If there are audio CDs in the DVD magazine, these will not be displayed in the DVD menu, but instead in the CD changer menu. If your vehicle is equipped with an additional CD changer, they will be displayed with the numbers 7 to 12.◀

## DVD control

With the DVD controller you can select the track and chapter, display the DVD-specific menu and operate functions such as Language, Fast Forward and Reverse or Freezing Frame.
A DVD can briefly deactivate functions of the DVD control, under certain circumstances while the entire DVD is being played. You are then unable to operate the DVD control. In this case, attempt to make the selection using the DVD-specific menu.

Display DVD controller:

1. Select "DVD" and confirm
2. Wait briefly until all menu items have disappeared, then press controller.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

The DVD controller disappears again after a short time if you have not selected a function.

During playback the DVD controller is displayed by pressing the controller.◀

| Softkey | Function |
|---|---|
| ▶ | Start playback |
| ■ | Stop playback |
| ⮌ | Close DVD controller |
| ❚❚ | Activate and deactivate freezing frame |
| ⏮ ⏭ | Chapter search |
| ◀◀ ▶▶ | Fast forward/reverse |
| ↑ ↓ → ← | DVD-specific menu: Select functions |
| ⇥ | DVD-specific menu: Return to previous menu |

## Selecting a track

Several tracks can be stored on a DVD.

1. Select DVD and confirm your entry.

Playback begins after a few seconds.

›DVD 1 ..6‹.

2. Display DVD controller, refer to page 164

3. Select "FULL MENU" and confirm
4. Select "TITLE" and confirm
5. Turn and press the controller to select the desired track.

   Playback begins at the track selected.

### Fast forward/reverse

1. Display DVD controller, refer to page 164
2. Select the direction

   ◀◀ ▶▶

   and confirm.
3. To increase the fast forward/reverse speed, press the controller several times.

   The DVD playback will be distorted
4. End fast forward/reverse:

   Select ▶ and confirm.

   The DVD will start play at the point selected.

When the DVD is playing, rapid fast forward/reverse is started by turning the controller. The speed can be increased by turning the controller further. To interrupt the fast forward/reverse function, release the controller. The system will continue play at the point on the DVD at which the controller button was released.◀

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Chapter search

You can change to the next or previous chapter during playback.◀

1. Display DVD controller, refer to page 164
2. Select the direction

   ⏮ ⏭

   Confirm repeatedly, continuing until you reach the desired chapter

or with buttons

select the direction

Press repeatedly, continuing until you reach the desired chapter on the current DVD.

Playback begins at the chapter selected.

## Adjusting picture

1. During playback, press controller
2. Select ⮌ and confirm.
3. Adjusting the picture, refer to page 161.

## Freezing frame

1. Display DVD controller, refer to page 164
2. At the desired position, select ⏸ and confirm. The film is stopped
3. To restart the DVD:

   Select ▶ or ⏸ and confirm. DVD playback is continued at the point at which it was interrupted.

## Selecting picture format

You can adjust the DVD format to your screen.

1. Display DVD controller, refer to page 164
2. Select ■ and confirm
3. Select ⮌ and confirm
4. Select "Picture" and confirm

5. Select "Pict. format" and confirm your selection
6. Select the desired picture format and confirm.

The picture format is a DVD-specific function and is not offered by all DVDs.◀

## Selecting language, subtitles and viewing angle

Many DVDs offer dialogs and subtitles in various languages or scene descriptions for the hearing impaired. In addition, with some DVDs the film can be viewed from different camera angles. These functions are stored on the DVD.

To select functions:

1. Display DVD controller, refer to page 164
2. Select "FULL MENU" and confirm.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com

▷ Select "AUDIO" and confirm

You can select from the various languages by turning and pressing the controller

▷ Select "SUBTITLE" and confirm

You can display the subtitles in the language of your choice by turning and pressing the controller

▷ Select "ANGLE" and confirm

You can change the camera angle by turning and pressing the controller. Notes or symbols that appear during the playback of a film generally point out different camera angles. These are usually only briefly available.

With some DVDs the language, subtitles or camera angle is only possible with the DVD-specific menu.
See the information on your DVD for possible selections.◀

## Opening DVD-specific menu

Additional functions may be available on DVDs. For example, the viewer can select from several possible plots or display information on the film.

1. Display DVD controller, refer to page 164
2. Select "MENU" or "TOP" and confirm.

With "MENU" you can generally open the DVD-specific main menu. On some DVDs you will find an additional menu called "TOP" in which, for example, you can select music scenes.◀

To make a selection:

1. Use ↑ ↓ → ← to select a function
2. Confirm selection with "OK".

To return to a previous menu:

Select ⊶ or ⮌ and confirm.

Language, subtitle or angle can also be selected in the DVD-specific menu.
See the information on your DVD for possible selections.◀





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com

# Communications

This chapter describes the extensive array of options available for mobile communications with family, friends, business associates and service providers.

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Using the phone in your vehicle

## Safety notice

### For your own safety

Your in-car phone makes life more convenient in many ways, and can even save lives in an emergency. While you should consult your portable phone's separate manual for a detailed description of safety precautions and information, we request that you direct your particular attention to the following:

### Adjustments

To avoid posing a danger to yourself and other road users, never adjust the system settings unless your vehicle is completely stationary.◀

### Using the phone in your vehicle

Using a hand-held portable phone to make and receive calls while driving is now illegal in virtually every country in the world. Always use your hands-free system, or stop your vehicle in an area where you will not pose a safety hazard to other road users.◀

### Vehicles and portable phones

Do not use your phone from within a garage, or near an open hood. The air in these areas could contain fuel vapors, and the portable phone might generate sparks that could result in burns.
This same precaution applies to open luggage compartment lids on vehicles equipped for operation using natural gas or hydrogen, and to all vehicles with luggage compartment-mounted batteries.◀

### Antenna

When using the phone, ensure that all persons in the area are at least 20 in (50 cm) from the antenna. Never use your BMW portable phone if the antenna is damaged. Contact between your skin and a damaged antenna can result in minor burns.
If the antenna is damaged, have it replaced immediately.◀

### Special environmental conditions

Always switch off your BMW portable phone in areas where blasting work is being conducted with explosives. The phone signals could potentially act as a high-frequency transmitter and set off explosions.
Always switch off your BMW portable phone in areas where an increased explosion danger is present. This category includes filling stations along with fuel and chemical storage depots, etc., and all areas in which the air can contain fuel, chemicals or metal particles. Under these conditions, your BMW portable phone could conceivably generate sparks that could lead to a fire or explosion. Always observe all legal regulations governing the use of portable phones in the vicinity of filling stations, chemical factories and other areas where an explosion potential exists.
Never use the BMW portable phone in aircraft; do not use this portable phone in hospitals, care centers or at other locations where medical equipment may be in operation, such as accident sites, etc.
Your service provider can furnish you with more detailed information on legal regulations governing the use of your phone.◀

### Medical equipment

Portable phones can generate interference capable of preventing hearing aids and cardiac pacemakers from operating correctly. If you or any occupant of the vehicle will be using such equipment, consult a physician or the manufacturer of the equipment to determine whether it is adequately shielded against high-frequency energy.◀

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Batteries

Never attempt to open your BMW portable phone or its battery. Use only approved battery types – the wrong battery can destroy your portable phone. To avoid possible short circuits, after removing a battery you should never allow it to come into contact with metallic surfaces of any kind.◀

### Disposing of used batteries

Return used batteries to a recycling collection point or to your BMW center.◀

## Care instructions

You can find useful information on caring for your portable phone in the separate Portable phone manual and in the separate Care manual.

## Controls

You have the option of making phone calls with the car phone or the BMW portable phone.
If there is no BMW portable phone in the cradle, Personal calling can be made with the car phone.

Your car phone must be activated to support his feature. Please see your BMW center for further instructions to activate your car phone with the wireless carrier.◀

The upper status line will indicate which phone is currently active and connected to the network.

For information on operating your portable phone, please consult the separate manual.◀

The portable phone can be operated by means of

- ▷ controls on the steering wheel, refer to page 18
- ▷ Control Display
- ▷ the folding telephone keypad
- ▷ and the voice command system, not for incoming calls.

CarManuals2.com

### Control Display

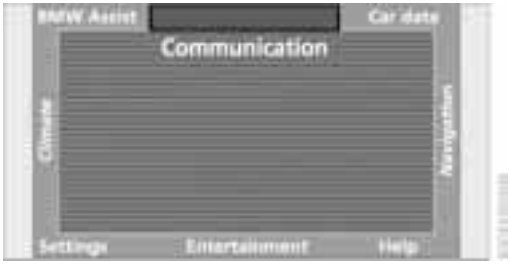


In the "Communication" menu

- ▷ the telephone book, only with BMW portable phone
- ▷ the Top 8 list, only with BMW portable phone
- ▷ the redial list

can be called up.

After selection of the desired entry,

- ▷ the button in the steering wheel
- ▷ the folding telephone keypad

can be used to set up a connection; the dialed number appears in the upper status line, refer to page 24.

Missed calls are also shown in a list if this service is supported by your network provider.

You can use and to switch between the two pages of the "Communication" menu.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Telephone keypad, folding

The telephone keypad allows you to use all of the basic telephone functions without ever picking up the receiver.
Calls are automatically routed through the hands-free system.

▷ The telephone keypad is available for operation at the radio mode in the ignition lock, refer to page 61.◀

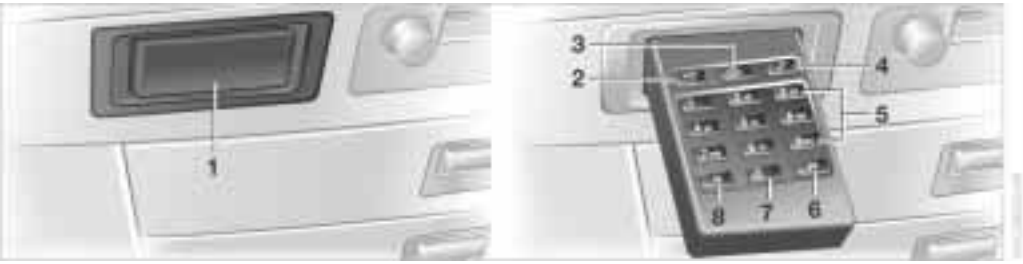


1 Briefly press the telephone keypad, it will extend automatically

When you are done using the telephone keypad, press it back in, continuing until the detent engages.

▷ It is not possible to remove the telephone keypad.◀

2 Short press: end call
Long press: switch BMW portable phone on and off

3 Clr Short press: delete the last digit entered
Long press: delete the entire number

4 Short press: dial or accept call

5 1 9 WXYZ Enter digits 1 – 9

6 # Special character entry

7 0 Enter the digit 0

8 * Short press: special character entry
Long press: pause for dialing in the DTMF mode

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Hands-free system

The hands-free microphone is located on the front headliner.

The hands-free system is automatically activated whenever you establish or receive a call using the following:

- ▷ Button in the steering wheel
- ▷ Control Display
- ▷ Telephone keypad, folding
- ▷ Voice command system, only for outgoing calls.

## Volume adjustment

You can adjust the volume for the hands-free unit:

Turn the button during a call to select the desired volume.

The hands-free unit will remain at this volume level, even if the other audio sources are set to minimum volume.

The system automatically selects your individual volume setting each time you unlock the vehicle using your personal remote control unit.◀

# Making an SOS call

1. To open the protective cover:
   Press the protective cover, to reveal the SOS button.
2. Press the SOS button for at least 1 second.

Conditions for an SOS call:

- ▷ The wireless communications network is available
- ▷ The SOS call system is operable.

Once the button is pressed, the indicator lamp on the switch will flash for the duration of the call.

If the vehicle is equipped with a navigation system and BMW Assist, the phone system will automatically establish contact with the BMW Assist emergency call center. The system also transmits the vehicle's current location to the center at the same time.

If the navigation system fails, the current position of the vehicle is not transmitted.◀

Following transmission of the data a confirmation report will appear in the Control Display. The emergency call center can initiate immediate action for emergency assistance.

If it is repeatedly not possible to set up a connection to the BMW Assist emergency call center, a connection to the general emergency call number 911 is set up.

If conditions allow, remain in the vehicle until the connection has been established. You will then be able to provide a detailed description of the situation. Misuse of the SOS system is prohibited.◀





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Under certain conditions, an SOS call is triggered automatically immediately after a severe accident. The automatic SOS call is not affected by the SOS call button being pressed.

CarManuals2.com

## Telephoning with the car phone

If the BMW portable phone is not in the cradle, you can telephone using the car phone via the hands-free unit.
The telephone that can be used to set up a connection is shown in the upper status line in the Control Display.

The car phone must be enabled prior to initial use. To do so, please consult your BMW center.◀

Calls can be set up or accepted using the following equipment:

- ▷ Button in the steering wheel
- ▷ Control Display

  Calls can only be set up via redialing or missed calls.◀
- ▷ Telephone keypad, folding
- ▷ Voice command system, only for outgoing calls.

## Using the BMW portable phone

1. Fold back the cradle slightly
2. Insert the portable phone.

Before starting off, place the BMW portable phone in the cradle. You can operate the portable phone using the button in the steering wheel, the Control Display, the telephone keypad or the voice command system, but not if you are in the middle of a call via the car phone.
If you are in the middle of a call using the BMW portable phone, the connection will be cut off as soon as you take it from the cradle.◀

### Switching your BMW portable phone on and off

You can switch your BMW portable phone on and off by maintaining extended pressure on the telephone keypad.

›Telephone on‹.

### Entering lock code

If, after switching on the BMW portable phone, you are requested by a message from the Control Display to enter the lock code:

1. Enter the lock code, e.g. 1234
2. Press the button

## Getting started

### Making a call

1. Enter the desired phone number
2. Press the button

The phone number appears in the Control Display's status line.

1. ›Dial number‹
2. Enter the phone number

   ▷ Listen to the entered numerical sequence:
   ›Read out‹

   ▷ Delete the entire number:
   ›Delete‹
3. ›Dial‹.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Always remember to enter the complete telephone number, including the area code, even if you are currently in the same area as the number that you wish to contact.◀

### Ending call

Press the button

## Telephone directory

You must enter your portable phone's telephone directory in the voice command system before it will be available for access using voice commands. This creates a special voice command telephone directory. If changes are then made to the directory using the voice command system, these modifications will apply exclusively to the voice directory, and not to the directory in the portable phone.

### Creating and updating voice command telephone directory*

CarManuals2.com

1. ›Telephone‹
2. ›Update telephone book‹.

The entries in the portable phone's telephone directory appear sequentially in the Info Display.

You must assign a specific name to each number that you wish to transfer to the voice command telephone directory. These numbers will no longer be requested during updates.

### Making a new entry in the voice command directory

1. ›Save name‹
2. Enter name and repeat entry upon request
3. Enter phone numbers
4. ›Save‹.

### Dialing from telephone directory

1. Select "Communication"

▷ Select "A-Z"
An alphabetical listing of all the entries in the telephone book appears on the right side of the Control Display

▷ Select "1,2,3"
An listing of all the entries in the telephone book appears on the right side of the Control Display

2. After the desired entry has been selected, can be used to set up a connection; the number being called appears in the upper status line, refer to page 24.

   The system dials the number.

The connection can also be set up using the button in the steering wheel or the telephone keypad. ◀

1. ›Select name‹
2. Enter name.

End call.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

### Viewing entries

›Read out‹

- To scroll forward: ›Next‹
- To scroll back: ›Previous‹
- To repeat entry: ›Repeat‹
- To call: ›Dial‹.

### Deleting individual entries

1. ›Telephone‹
2. ›Delete entry‹
3. Enter name.

### Deleting the entire telephone directory

1. ›Telephone‹
2. ›Delete telephone book‹.

## Selecting a number from the Top 8 list

The eight numbers that you call most frequently on the BMW portable phone are automatically stored in the Top 8 list. The number called most often appears at the top of the list.

1. In the "Communication" menu, select "TOP 8" and confirm
2. Select an entry from the list that now appears in the display, and confirm
3. After the desired entry has been selected, can be used to set up a connection; the number being called appears in the upper status line, refer to page 24.

The connection can also be set up using the button in the steering wheel or the telephone keypad.◀

End call.

## Redialing

Both numbers that you reached on your earlier attempt and numbers that were unavailable are automatically stored in your redialing list. The last number dialed is at the top of the list.

1. Select "Communication"

2. Select "Last"
3. Select an entry from the list that now appears in the display, and confirm
4. After the desired entry has been selected, can be used to set up a connection; the number being called appears in the upper status line, refer to page 24.

The connection can also be set up using the button in the steering wheel or the telephone keypad.◀

You can use the voice command system to redial the last number called:

›Redial‹.

End call.

## Missed calls

If the phone number of the caller was transferred, you can have a list of all missed calls displayed if this service is supported by your network provider.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

1. Select "Communication"

2. Select "Missed" and confirm
3. Select an entry from the list that now appears in the display, and confirm
4. After the desired entry has been selected, can be used to set up a connection; the number being called appears in the upper status line, refer to page 24.

The connection can also be set up using the button in the steering wheel or the telephone keypad.◀

End call.

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# BMW Assist*

To avoid posing an unnecessary hazard, both to your own vehicle's occupants and to other road users: never attempt to use the controls or make adjustments while operating the vehicle.◀

## Requirements

If the following requirements are met, you can call up BMW Assist:

- ▷ Telephone is connected and switched on
- ▷ The lock code has been entered
- ▷ The mobile communications network is available
- ▷ GPS reception is assured.

The position of the vehicle can influence the mobile communications/GPS reception. As a rule, mobile communications/GPS reception is only possible under a clear sky.
When vehicle data is exchanged with the BMW Service Center, a corresponding message appears in the Control Display.◀

## Roadside Assistance of the BMW Group

Here, you automatically dial the number of the Roadside Assistance of the BMW Group, your BMW center or BMW Customer Relations.

To contact Roadside Assistance, for example in the event of a breakdown:

1. Select "BMW Assist" and confirm
2. Select "BMW Services" and confirm

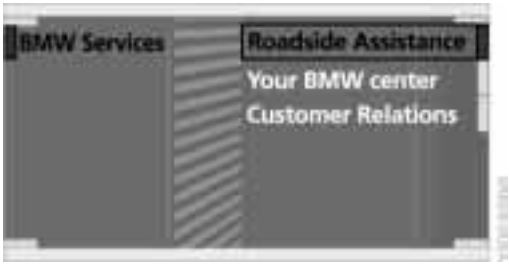


3. Select "Roadside Assistance" and confirm.
   The vehicle's current location is displayed

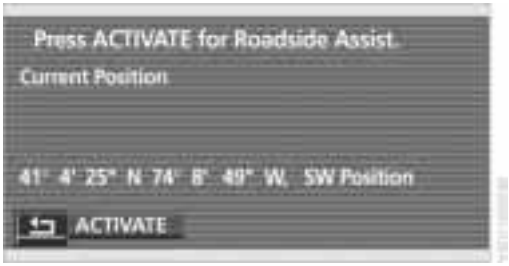


4. Select "ACTIVATE" and confirm.
   The data of your vehicle is transmitted to BMW center.

BMW center forwards the current vehicle location and the customer profile, the vehicle data, to the relevant Roadside Assistance service. Voice communication to the Roadside Assistance service is set up.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

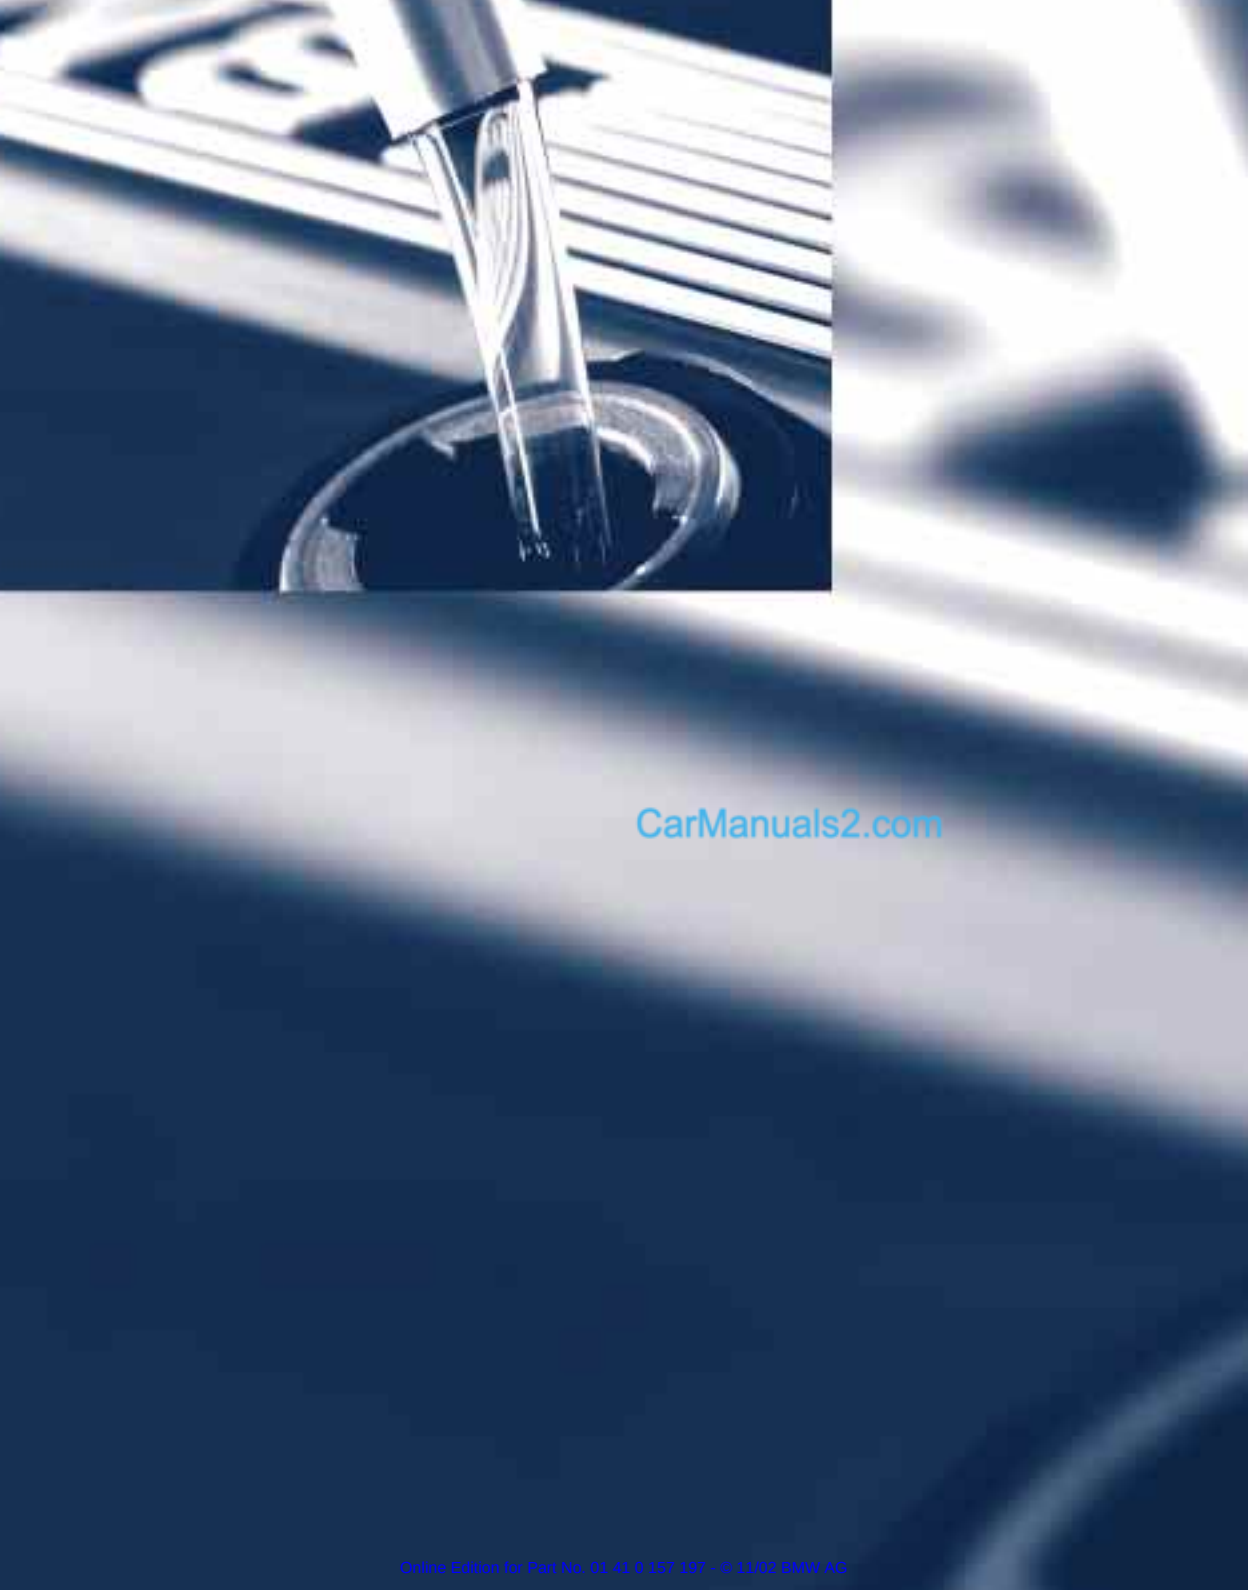

CarManuals2.com

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com

# Mobility

This section helps you maintain your mobility by supplying important information on vital topics including fuels and lubricants, wheels and tires, maintenance and emergency roadside service.

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Refueling

## Fuel filler door

Always switch off the engine before refueling. If you do not, fuel cannot be filled into the tank and a message in the Check Control will appear.◀

To open and close: press the rear edge of the fuel filler door.

### Manual release

In the event of an electrical defect in the system, you can release the fuel filler door manually:

1. Lift the handle to remove the cover panel on the right side of the luggage compartment
2. Take the button with the fuel pump symbol from the bracket and pull it to unlock the fuel filler door.

Always observe all applicable precautions and regulations when handling fuels. Never carry spare fuel containers in your vehicle. Whether empty or full, these containers can leak, cause an explosion, and lead to fire in the event of a collision.◀

### Simple and environmentally friendly

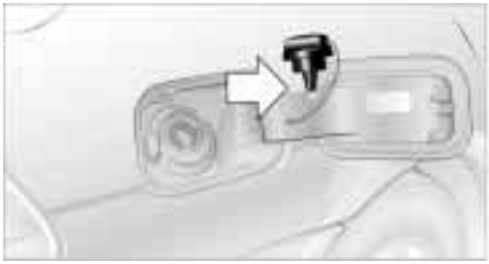

When handling fuels always observe any safety guidelines posted at the filling station.◀

Put the filler cap in the bracket attached to the fuel filler door.

When refueling, insert the filler nozzle completely into the filler pipe. Pulling the nozzle out of the pipe during refueling

- ▷ results in premature pump shutoff
- ▷ can lead to reduced efficiency in the fuel-vapor recovery system.

The fuel tank is full when the filler nozzle clicks off the first time.

Close the filler cap carefully after refueling, continuing until you hear the detent engage. While closing, be sure not to squeeze the strap which is fastened to the cap. A loose or missing cap will activate a message in the Check Control.◀

Fuel tank capacity: approx. 23.2 US gallons (88 liters), including the reserve capacity of approx. 2.6 gallons (10 liters).

Never attempt to continue driving until the tank is completely empty, as engine functions could be affected, and the vehicle could sustain damage as a result.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Fuel specifications

The engine uses lead-free gasoline only.

Required fuel:

▷ Premium Unleaded Gasoline,
min. 91 AKI.
AKI = Anti-Knock Index.

Do not use leaded fuels. The use of leaded fuels will cause permanent damage to the system's oxygen sensor and the catalytic converter.◀

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Wheels and tires

## Tire inflation pressure

### Information for your safety

The factory-mounted tires have been specially selected to provide optimal performance when installed on your vehicle; if properly cared for they will furnish a combination of tremendous safety and excellent ride comfort.

It is not merely the tire's service life, but also driving comfort and – above all else – driving safety that depend on the condition of the tires and the maintenance of the specified tire pressure.

Incorrect inflation pressure is a frequent cause of tire damage. Tire inflation pressures also have a substantial effect on your BMW's handling response.

⚠ Check tire inflation pressures regularly – at least every two weeks and before beginning a longer trip. If you fail to observe this precaution you may be driving on tires with incorrect tire pressures, a condition that can not only compromise your vehicle's stability, but also lead to tire damage and the risk of an accident. Remember to check the inflation pressure in your spare tire. Inflate the spare to the highest pressure specified for any tire on the vehicle.◀

CarManuals2.com

The inflation pressures, provided on a label affixed to the B-pillar, are visible when the driver's door is open.

### Checking inflation pressure

The table on the next page provides the correct inflation pressures for cool tires, ambient temperature, in psi/kilopascal.

Vehicles with Flat Tire Monitor or TPM Tire Pressure Monitor:
After mounting a spare tire or correcting the inflation pressure(s) always reinitialize the system, refer to page 98 or 99.

### Complying with tire approval specifications

The inflation pressures in the table apply to tire sizes and tires from BMW approved manufacturers. Your BMW center is familiar with these pressures. Different pressures may be specified for tires from other manufacturers.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## BMW 745i, 745Li

| Tire size<br>Pressure specifications in psi/kPa | | | | |
|---|---|---|---|---|
| 245/55 R 17, including M+S<br>245/50 R 18, including M+S | 32/220 | 35/240 | 35/240 | 42/290 |
| Front: 245/45 R 19 | 32/220 | - | 35/240 | - |
| Rear: 275/40 R 19 | - | 35/240 | - | 42/290 |
| Front: 245/40 R 20 | 32/220 | - | 35/240 | |
| Rear: 275/35 R 20 | - | 35/240 | - | 42/290 |

## BMW 760Li

| Tire size<br>Pressure specifications in psi/kPa | | | | |
|---|---|---|---|---|
| 245/50 R 18, including M+S | 35/240 | 38/260 | 38/260 | 42/290 |
| Front: 245/45 R 19 | 35/240 | - | 38/260 | - |
| Rear: 275/40 R 19 | - | 38/260 | - | 42/290 |
| Front: 245/40 R 20 | 35/240 | - | 38/260 | |
| Rear: 275/35 R 20 | - | 38/260 | - | 42/290 |

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Tire condition

## Tire tread – tire damage

Inspect your tires frequently for tread wear, signs of damage and for foreign objects lodged in the tread. Check the tread depth.

The tread depth should not drop below 0.12 in (3 mm), although, for example, European legislation only specifies a minimum tread depth of 0.06 in (1.6 mm). At tread depths below 0.12 in (3 mm) there is an increased risk of high-speed hydro-planing, even when only small amounts of water are present on the road surface.

Wear indicators at the tread-groove base, see arrow, are distributed over the tire's circumference and are marked on the tire sidewall with TWI – Tread Wear Indicator. These indicators signal at a tread depth of 0.06 in (1.6 mm) that the legal wear limit has been reached.

Never attempt to continue driving on a flat tire. Because a flat tire will seriously impair your vehicle's handling and braking response, attempts to drive on a flat tire can lead to loss of control over the vehicle.
To avoid loading the tires beyond their approved carrying capacity, never overload the vehicle. Overloading can lead to over-heating and damage inside the tires. The ultimate result can assume the form of a sudden air loss.
Unusual vibrations encountered during normal vehicle operation can indicate tire failure or some other vehicle defect. This can, for example, be caused by driving over curbs. These kinds of problems may also be signaled by other changes in vehicle response, such as a strong tendency to pull to the left or right. Should this occur, respond by immediately reducing your speed. Carefully proceed – or have your vehicle towed – to the nearest BMW center or tire dealer to have the wheels or tires inspected.
Tire damage, extending to sudden and complete loss of pressure in extreme cases, can pose a potentially lethal safety hazard for the vehicle's occupants and other road users alike.◀

CarManuals2.com

## Run-flat tires*

Run-flat tires consist of self-contained tires and special rims. The tire reinforcement ensures that the tire retains some residual safety in the event of pressure drop and driving remains possible to a restricted degree, refer to page 200.

The vehicle is equipped with a Flat Tire Monitor or TPM Tire Pressure Monitor which indicates flat tires.

# Tire replacement

To maintain good handling and vehicle response, use only tires of a single tread configuration from a single manufacturer. BMW tests and approves specific wheel and tire combinations.

## DOT Quality Grades

Treadwear
Traction AA A B C
Temperature A B C

All passenger car tires must conform to Federal Safety Requirements in addition to these grades.◀

## Treadwear

The treadwear grade is a comparative rating based on the wear rate of the tire when tested under controlled conditions on a specified government test course. For example, a tire graded 150 would



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

wear one and one-half – 1 ½ – times as well on the government course as a tire graded 100. The relative performance of tires depends upon the actual conditions of their use, however, and may depart significantly from the norm due to variations in driving habits, service practices and differences in road characteristics and climate.

### Traction

The traction grades, from highest to lowest, are AA, A, B, and C.
Those grades represent the tire's ability to stop on wet pavement as measured under controlled conditions on specified government test surfaces of asphalt and concrete. A tire marked C may have poor traction performance.

The traction grade assigned to this tire is based on straight-ahead braking traction tests, and does not include acceleration, cornering, hydroplaning, or peak traction characteristics.◀

### Temperature

The temperature grades are A – the highest –, B, and C, representing the tire's resistance to the generation of heat and its ability to dissipate heat when tested under controlled conditions on a specified indoor laboratory test wheel.
Sustained high temperature can cause the material of the tire to degenerate and reduce tire life, and excessive temperature can lead to sudden tire failure. The grade C corresponds to a level of performance which all passenger car tires must meet under the Federal Motor Vehicle Safety Standard No. 109. Grades B and A represent higher levels of performance on the laboratory test wheel than the minimum required by law.

The temperature grade for this tire is established for a tire that is properly inflated and not overloaded. Excessive speed, underinflation, or excessive loading, either separately or in combination, can cause heat buildup and possible tire failure.◀

### Uniform Tire Quality Grading

Quality grades can be found where applicable on the tire sidewall between tread shoulder and maximum section width. For example:

Treadwear 200 Traction AA
Temperature A

Do not use retreaded tires, since driving safety may be impaired. Possible variations in the design and the age – which could be substantial – of the carcasses can lead to unusually rapid wear.◀

### Tire age

The tire's date of manufacture is indicated on the sidewall:
DOT ... 3402 indicates that a tire was manufactured in week 34 of the year 2002.

Regardless of mileage or wear, BMW recommends that you replace all tires – including the spare – after a maximum of 6 years, even though the tires may have a theoretical service life of up to 10 years.

## Wheel and tire combinations

### The right choice

Use only wheel and tire combinations that BMW has approved for your particular vehicle. Variations in factors such as manufacturing tolerances mean that even wheels and tires with identical official size ratings could actually have different dimensions than the approved units – these differences could lead to body contact, and with it the risk of severe accidents. If non-approved wheels and tires are used, BMW cannot evaluate their suitability, and therefore cannot be held liable for driving safety.◀

BMW tests certain tire brands for each tire size, classifies them as road-safe and approves them. Consult your BMW center for more information. Observe any country-specific regulations, e.g. on making a corresponding entry in the vehicle documents.

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

The correct combination of wheels and tires is a vital factor in ensuring reliable operation of various vehicle systems such as ABS and DSC.
It is therefore important to ensure that tires from a single manufacturer with a single tread configuration are always mounted on all vehicle wheels; after a flat tire, always remember to have the specified wheel and tire combination remounted on the vehicle as soon as possible.◀

### Storage

Always store wheels and tires in a cool, dry place with as little exposure to light as possible. Always protect tires against all contact with oil, grease and fuels.

## Special characteristics of winter tires

### Choosing the right tire

BMW recommends winter tires – M+S tires for use in cold winter driving conditions. Although all-season M+S tires provide better winter traction than standard summer tires with H, V, W and ZR speed ratings, they generally fail to provide the same levels of cold-weather performance as winter tires.

When mounting, always install winter tires of a single tread configuration and from a single manufacturer on all four wheels to ensure safe tracking and secure steering response.

### Observing speed ratings

Never exceed the maximum speed for which the winter tires are rated.
Unprofessional attempts by laymen to service tires can lead to damage and accidents.
Have this work performed by skilled professionals only. The technicians at your BMW center will be glad to assist you with the required professional knowledge and specialized equipment.◀

CarManuals2.com

### Tire condition, tire pressure

Because winter tires display a noticeable loss in their ability to cope with cold-weather driving conditions once the tread wears to below 0.16 in (4 mm), to ensure continued safety you should always have such tires replaced.

Always maintain the specified inflation pressures in all tires, and remember to have the wheel and tire assemblies balanced every time either a wheel or a tire is replaced.

## Snow chains*

BMW only tests certain snow chains, classifies them as road-safe and approves them. Consult your BMW center for more information. BMW recommends only using these approved, narrow-link snow chains. These snow chains are approved exclusively for use in pairs on the rear wheels, and should only be mounted on tires with the dimensions 245/50 R 18. Observe the manufacturer's instructions when installing snow chains. Do not exceed a vehicle speed of 30 mph (50 km/h) with the chains mounted.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Under the hood

## Hood

### Releasing

CarManuals2.com

Pull the lever located under the left side of the instrument panel.

Never attempt to perform any service or repair operations on your vehicle without the required, professional technical training. When you are unfamiliar with the service procedures and precautions, always have any required work carried out at your BMW center. Unprofessional attempts at service and repair, and the incorrect handling of parts and materials that can occur during such attempts, constitute a potential safety hazard, both for the vehicle's occupants and for other road users.◀

### Opening

Pull the release handle and open the hood.

### Closing

Close the hood from a height of approx. 16 in (40 cm) with momentum. It must be clearly heard to engage.

Observe the same precautions that apply to all closing operations by ensuring that the hood's travel range is clear and unobstructed before allowing the hood to fall into position.
If you see any signs that the hood is not completely closed while driving your vehicle, you should stop at once and close it securely.◀





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Engine compartment

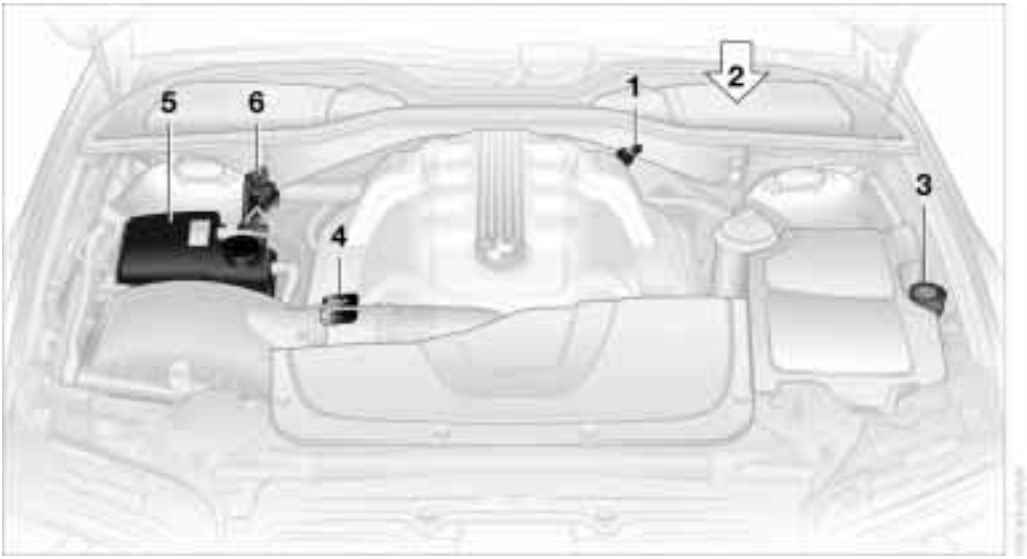


**1** Engine oil dipstick, see below, Checking oil level

**2** Brake fluid reservoir, located beneath the microfilter cover 192

**3** Reservoir for windshield and headlamp washer system 73

**4** Engine oil filler neck 191

**5** Coolant expansion tank 192

**6** Auxiliary terminal for jump starting 203

CarManuals2.com

# Engine oil

## Checking oil level

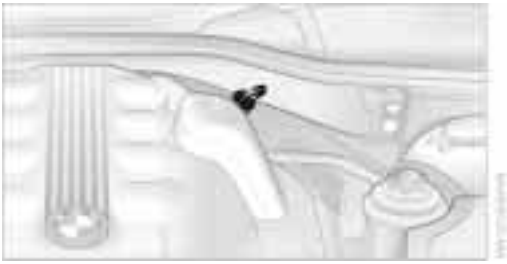

1. Park the vehicle on a level surface
2. Switch the engine off after it has reached normal operating temperature
3. After approx. 5 minutes, pull the dipstick out and wipe it off with a clean lint-free cloth, paper towel, or similar material
4. Carefully push the dipstick all the way into the guide tube and pull it out again
5. The oil should extend to between the two marks on the dipstick.

As is the case with fuel economy, the rate at which the engine uses oil is strongly influenced by driving style and operating conditions.

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

The oil quantity between the two marks on the dipstick is approx. 1.1 US quarts (1 liter). Do not fill beyond the upper mark on the dipstick. Excess oil can damage the engine.

### Adding engine oil

Wait until the level has dropped to just above the lower mark before adding oil.

BMW engines are designed to operate without additives, and their use could even lead to damage in some cases. This also applies to the automatic transmission, the differential and the power steering system.◀

Recommendation: have your oil changed only at your BMW center.

CarManuals2.com

Continuous exposure to used oil has caused cancer in laboratory testing. For this reason, any skin areas that come into contact with oil should be thoroughly washed with soap and water.
Always store oil, grease, etc., well out of the reach of children; always observe all warning labels on the containers.◀

Always observe all applicable rules and regulations for environmental protection when disposing of used oil.◀

### Specified engine oils

The quality of the engine oil selected has critical significance for the operation and service life of an engine. BMW approves only specific oils after confirming their suitability for use in its vehicles with extensive testing.

Use only approved BMW High Performance Synthetic Oil.

If you are unable to obtain BMW High Performance Synthetic Oil, you can add small amounts of another synthetic oil between oil changes. Use only oils with the API SH specification or higher.

Ask your BMW center for details concerning the specific BMW High Performance Synthetic Oil or synthetic oils which have been approved.◀

You can also call BMW of North America at 1-800-831-1117 or visit this website: www.bmwusa.com to obtain this information.

### Viscosity ratings

Viscosity is the oil flow rating as defined in SAE classes.

The selection of the correct SAE class depends on the climatic conditions in the area where you typically drive your BMW.

Approved oils are in SAE classes 5W-40 and 5W-30.◀

These oils may be used for driving in all ambient temperatures.

## Coolant

Do not add coolant to the cooling system when the engine is hot. Escaping coolant can cause burns. Antifreeze and anticorrosion agents are hazardous to health. Always store these agents in tightly-closed original containers kept well away from the reach of children. Antifreeze and anticorrosion agents are flammable. Therefore, do not pour over hot engine parts, as otherwise they could catch fire and cause burns. Always observe the instructions for use provided on the container.◀

Always observe all applicable rules and regulations for environmental protection when disposing of used antifreeze and anti-corrosion agents.◀





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Checking coolant level

Correct coolant level with the engine cold – approx. +68 °F (20 °C):

1. Turn the cap of the expansion tank counterclockwise to allow any accumulated pressure to escape, then continue turning to open
2. The coolant level is correct when the coolant extends to between the MIN and MAX marks on the filler neck, refer to the diagram adjacent to the filler neck
3. If the coolant is low, slowly add coolant up to the specified level – do not overfill.

CarManuals2.com

## Brake fluid

The symbol lights up and a message appears in the Check Control panel:
The brake fluid in the reservoir has fallen to below the minimum level.

The brake fluid reservoir is located under the microfilter housing trim panel on the driver's side of the vehicle. To have brake fluid added to the system, or to have the source of any brake fluid loss traced and rectified, please contact your BMW center, which can also supply the factory-approved – DOT 4 – brake fluids.

Brake fluid is hygroscopic: it absorbs moisture from the atmosphere over the course of time.
To ensure that the brake system continues to provide safe and reliable performance, remember to have the brake fluid changed every two years at the latest, refer to page 84 and to the Service and Warranty Information Booklet for US models or the Warranty and Service Guide Booklet for Canadian models.
Brake fluid is toxic and also damages vehicle paintwork. Always store these agents in tightly-closed original containers kept well away from the reach of children. Do not spill the fluid and do not refill the brake fluid reservoir to beyond the MAX mark. Should it come into contact with hot engine components, the brake fluid could ignite and cause personal injury in the form of burns.◀

Always observe all applicable environmental rules and regulations when disposing of used brake fluid.◀

Warning lamp for Canadian models.

## Brake hydraulic systems

A low brake-fluid level combined with longer-than-usual pedal travel could be a sign that one of the brake system's hydraulic circuits has failed.

Proceed to the nearest BMW center. Remember that pedal travel may be increased, and there may also be a substantial increase in the amount of pedal pressure required to brake the vehicle. Please adapt your driving style accordingly.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Maintenance

## The BMW Maintenance System

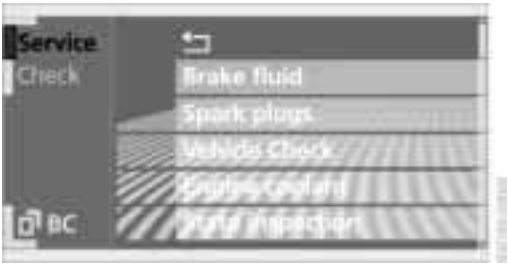


The BMW Maintenance System is designed to ensure that your vehicle will continue to furnish consistent reliability combined with optimal safety. The service schedule also includes operations related to the vehicle's comfort and convenience features, such as replacement of the filters for the inside air. The ultimate object is to furnish economical maintenance by providing the ideal service for your individual vehicle.

Should the day come when you decide to sell your BMW, you will find that a complete dealer service history is an asset of inestimable value.

### CBS Condition Based Service

CBS is a more advanced version of the Service Interval Display. Sensors combine with highly-specialized algorithms to supply service information that reflects your vehicle's actual operating conditions more precisely than ever before.

The system now furnishes individual displays of the times remaining until the deadlines for specific service operations as well as official state inspections:

- ▷ Engine oil
- ▷ Brakes – separate for front and rear
- ▷ Particle/activated-charcoal filter
- ▷ Brake fluid
- ▷ Spark plugs
- ▷ Vehicle check
- ▷ Coolant
- ▷ Official state inspections.

CarManuals2.com

CBS monitors both current and upcoming service requirements. After accessing the data stored in the vehicle's key, your BMW service advisor is able to suggest precisely the right array of service procedures for your own individual vehicle.

By letting you define a service and maintenance regimen that reflects your own individual requirements, Condition Based Service builds the basis for trouble-free driving.

You can find more detailed information on the Service Interval Display on page 83.

### Service and Warranty Information Booklet for US models and Service Guide Booklet for Canadian models

Please consult your Service and Warranty Information Booklet for US models and Service Guide Booklet for Canadian models for additional information on service requirements.

▷ Have service and repair operations performed at your BMW center.

Take the time to ensure that these service procedures are confirmed by entries in your vehicle's Service and Warranty Information Booklet for US models and Service Guide Booklet for Canadian models. These entries verify that your vehicle has received the specified regular maintenance, and may also be required when submitting warranty claims.◀

## Care

You can find everything you need to know on this topic by consulting the separate Care manual.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Rules and regulations

## California Proposition 65 Warning

California laws require us to state the following warning:

Engine exhaust, some of its constituents, and certain vehicle components contain or emit chemicals known to the State of California to cause cancer and birth defects and reproductive harm. In addition, certain fluids contained in vehicles and certain products of component wear contain or emit chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.
Battery posts, terminals and related accessories contain lead and lead compounds. Wash your hands after handling.
Used engine oil contains chemicals that have caused cancer in laboratory animals. Always protect your skin by washing thoroughly with soap and water.◀

## OBD connector

The Onboard Diagnostic – OBD – interface socket is located on the left of the driver's side under the instrument panel and under a cover.
The cover has the letters OBD on it.

CarManuals2.com

The purpose of the OBD system is to ensure proper operation of the emission control system for the vehicle's lifetime. The system monitors emission-related components and systems for deterioration and malfunction.

An illuminated lamp informs you of the need for service, not of the need to stop the vehicle. However, the systems should be checked by your BMW center at the earliest possible opportunity.

Under certain conditions, the indicator will blink or flash. This indicates a rather severe level of engine misfire. When this occurs, you should reduce speed and consult the nearest BMW center as soon as possible. Severe engine misfire over only a short period of time can seriously damage emissions control components, especially the catalytic converter.

When the fuel filler cap is not properly tightened, the OBD system can detect the vapor leak and the indicator will light up. If the filler cap is subsequently tightened, the indicator should go out within a few days.◀



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Replacing components

## Onboard tool kit

The onboard tool kit is located in the luggage compartment lid.

Loosen the wingnut to open.

The adapter for the spare key can be stored beneath the open-ended spanners.

## Windshield wiper blades

To replace the blades, start by folding the wipers out and away from the windshield, refer to page 73.

CarManuals2.com

## Lamps and bulbs

The lamps and bulbs are essential factors contributing to the safety of your vehicle. Therefore, comply fully with the following instructions during bulb replacement. If you are not familiar with the specified procedures, have the replacements carried out at your BMW center.

Never touch the glass on new bulbs with your bare fingers, as even minute amounts of contamination will burn into the bulb's surface and reduce its service life. Use a clean cloth, napkin, etc., or hold the bulb by its metal socket.◀

You can obtain a selection of replacement bulbs at your BMW center.

To prevent short circuits, before working on any electrical system, equipment or accessory you should always switch it off and disconnect the cable from the battery's negative terminal before starting.
To avoid possible injury or equipment damage when changing bulbs, observe any instructions provided by the bulb manufacturer.◀

When maintaining the headlamps, please comply with the instructions in the separate Care manual.◀

### Headlamps

For checking and adjusting headlamp aim, please contact your BMW center.◀

Engine compartment, left side:
Turn the quick-release fasteners 90° counterclockwise and remove the cover.

After replacing the bulb return the cover to its original position and press the quick-release fasteners down.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Releasing the lamp cover

The illustration shows the left-hand side of the engine compartment.

**1** High beams

Press the tab down, see arrow.

Always wear gloves and eye protection – the atmosphere within the bulb is pressurized. Failure to observe this precaution can lead to personal injury should the bulb be damaged.◀

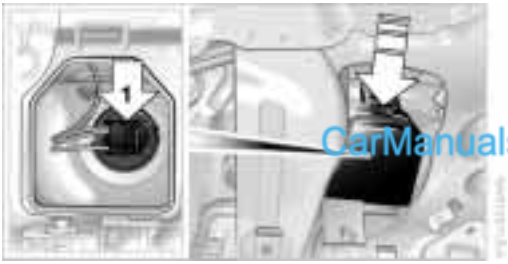


## 1 High beams

H7 bulb, 55 watts

1. Remove the cover
2. Turn the bulb holder to the left and remove
3. Remove and replace the bulb.

## Xenon lamps

The service life of these bulbs is very long and the probability of a failure is very low, provided that they are not switched on and off an unusual number of times. In the unlikely event that one of these lamps should fail, you can respond by switching on your fog lamps and proceeding carefully, where allowed by law.

To avoid risk of potentially fatal injuries: owing to the extremely high voltages at which these units operate, service work should always be entrusted to qualified personnel.◀

## Parking and standing lamps

In the event of a malfunction, please contact your BMW center.

## Turn signal indicator, front

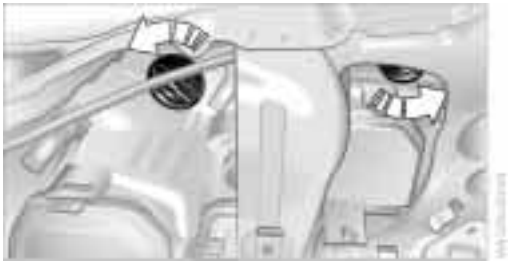

Two bulbs 21 watts – P 21 W

1. Turn the bulb holder to the left and remove
2. Apply gentle pressure to the bulb while turning it to the left for removal and replacement.

CarManuals2.com

## Side-mounted turn signal indicators

Bulb 5 watts – W 5 W

1. Press against the front edge of the lamp with the tip of your finger, then push it to the rear and release the detent at the front
2. Turn the lamp 90° and remove
3. Turn the bulb holder to the left and remove



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

4. Extract the bulb for replacement.

### Side marker lamps, front and rear

Please contact your BMW center for replacement.

### Tail lamps

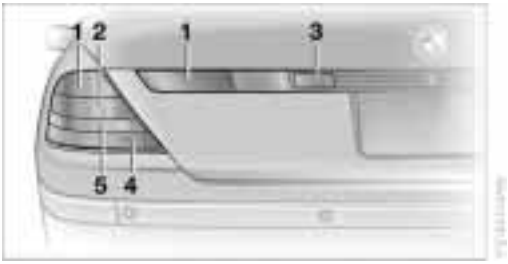


**1** Tail lamp
**2** Brake lamp
**3** Backup lamp
**4** Turn signal indicator, yellow
**5** Reflector

### Tail lamps and brake lamps

These lamps use LED technology for operation. Please contact a BMW center in case of a malfunction.

### Fender-mounted lamps

The illustration shows the recess on the left side of the luggage compartment.

CarManuals2.com

### Rear turn signal indicator

Bulb 21 watts – P 21 W

1. Use the handle at the top to swivel down the side trim panel
2. Turn the bulb holder to the left and remove
3. Apply gentle pressure to the bulb while turning it to the left for removal and replacement.

### Lamps in luggage compartment lid

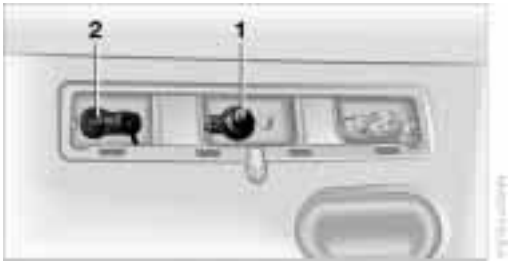


Remove the trim panel from the luggage compartment lid.

**1** Backup lamp
**2** License plate lamp

### Backup lamps and license plate lamps

Backup lamp: bulb 16 watts – W 16 W
License plate lamp: bulb 5 watts – W 5 W

1. Pull the bulb holder out
2. Extract the bulb for replacement.

## Changing a tire

Safety precautions to observe in the event of a flat and during all tire changes:
Park the vehicle as far as possible from passing traffic. Park on a firm, flat surface. Switch on the hazard warning flashers. Engage the parking brake and move the transmission's selector lever to P.
Have all vehicle occupants get out of the vehicle and ensure that they remain outside the immediate area in a safe place, such as





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

behind a guardrail.
If a warning triangle or portable hazard warning lamp is required, set it up on the roadside at an appropriate distance from the rear of the vehicle. Comply with all safety guidelines and regulations.
Change the wheel only on a level, firm surface which is not slippery. The vehicle or the jack could slip to the side if you attempt to raise the vehicle on a soft or slippery surface such as snow, ice, tiles, etc.
Position the jack on a firm support surface. Do not use a wooden block or similar object as a support base for the jack, as this would prevent it from extending to its full support height and reduce its load-carrying capacity.
To avoid serious or fatal injury: never lie under the vehicle, and never start the engine while it is supported by the jack.◀

## What you will need

To avoid rattling noises, note the positions of the tools before removing them, then return them to their initial positions after completing work.

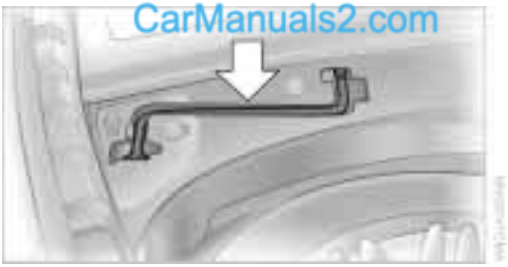
CarManuals2.com

▷ Lug wrench
Located beside the spare tire

▷ Wheel chock
The chock is located next to the spare tire, or behind the trim panel on the left side of the luggage compartment on vehicles equipped with a trailer coupling.
Remove the floor mat and the cover above the spare tire.
Unscrew the wingnut and remove the wheel chock

▷ Vehicle jack
The jack is located behind the side trim panel on the right side of the luggage compartment.
Grasp the handle in the upper panel and fold it down.
Undo the wingnut and remove the jack.
After use, screw the jack all the way back down and snap the handle back into place.

## Spare tire

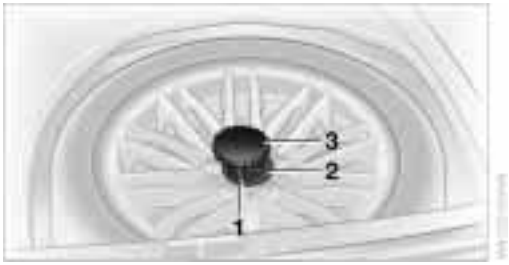


1. Unscrew the wing nut **1**
2. Remove the disk **2** to the side
3. Completely unscrew the threaded rod **3**
4. Remove the wheel.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Procedure

1. Read carefully and comply with the safety precautions on page 198
2. Secure the vehicle to prevent it from rolling:
   Place the wheel chock against the rear surface of the front tire on the side opposite the side being raised. If the vehicle is parked on a downward slope, place the wheel chock securely in front of the tire. If the wheel must be changed on a surface with a more severe slope, take additional precautions to secure the vehicle from rolling
3. Loosen the lug bolts 1/2 a turn

CarManuals2.com

4. Set up the jack beneath the jacking point closest to the flat tire. Ensure that the entire surface of the jack's base is in firm contact with the ground and that the jack itself is standing completely vertical, not tilted, and that the fitting on the top of the jack will align with the rectangular recess on the vehicle when you raise it, refer to illustration
5. Jack the vehicle up until the wheel you are changing is raised from the ground
6. Unscrew the lug bolts and remove the wheel
7. Remove accumulations of mud or dirt from the mounting surfaces of the wheel and hub. Clean the lug bolts
8. Position the spare wheel. Secure the wheel by turning at least two lug bolts into opposite bolt holes
9. Screw in the remaining lug bolts. Tighten all the bolts securely in a diagonal pattern
10. Lower the jack and remove it from beneath the vehicle
11. Tighten the lug bolts in a diagonal pattern
12. Check and correct the tire inflation pressure at the earliest opportunity.

Protect valve stems and valve stem seal caps against dirt and contamination. Dirt in valve stems is a frequent source of gradual air loss.◀

Vehicles with a Flat Tire Monitor or TPM Tire Pressure Monitor:
After mounting a spare tire or correcting the inflation pressure(s) always reinitialize the system, refer to page 98 or 99.

The vehicle jack is designed for changing wheels only. Do not attempt to raise another vehicle model with it or to raise any load of any kind. To do so could cause accidents and personal injury.
To ensure safety, always have the lug bolts checked with a calibrated torque wrench to ensure that they are tightened to the specified torque of 140 Nm as soon as possible.◀

Reverse the removal sequence to store the wheel and tools in the vehicle.

When you mount wheels other than Original BMW light-alloy wheels, different lug bolts may also be required.

Always have damaged tires replaced and the wheel and tire assembly rebalanced at the earliest possible opportunity.

## Driving with the spare tire

On certain wheel-tire combinations, the size of the spare tire deviates from that of the rest of the tires. The spare tire is fully capable of running in all load and speed ranges. However, to recreate the original conditions, the tire should be replaced as soon as possible.◀





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

## Run-flat tires*

You will recognize run-flat tires by a circular symbol containing the letters RSC on the side of the tire. They consist of self-contained tires and special rims. The tire reinforcement ensures that the tire retains some residual safety in the event of pressure drop and driving remains possible to a restricted degree. The vehicle is equipped with a Flat Tire Monitor or TPM Tire Pressure Monitor which indicates punctures.

The reinforcement on the flanks of the tires means that it is usually not possible to detect an air loss from outside.◀

### Flat tire

If you have a flat tire, the indicator lamp symbol in the Check Control will light up in red, and a message will appear. In addition, a gong sounds.
Detailed information on the Flat Tire Monitor or TPM Tire Pressure Monitor can be found on page 98 or 99.

Reduce vehicle speed carefully to under 50 mph (80 km/h), avoiding hard brake applications and steering maneuvers.

If the defective wheel is not recognizable as such immediately, check the inflation pressure in all four tires.

For reasons of safety, do not arrange for run-flat tires to be repaired. Your BMW center has the information needed for working with these tires and is equipped with the necessary special tools.◀

CarManuals2.com

### Continuing driving with a damaged tire

Driving on run-flat tires can continue depending on the vehicle load and the severity of the tire damage, at a maximum speed of 50 mph (80 km/h). You can determine the possible mileage for continued driving on the basis of the following general indications:

- Tire inflation pressure 0 psi/kPa:
  With empty vehicle approx. 90 miles (150 km)
  With full payload approx. 30 miles (50 km)
- Tire inflation pressure 7 psi/50 kPa – 15 psi/100 kPa:
  Approx. 300 miles (500 km)
- Tire inflation pressure greater than 15 psi/100 kPa:
  approx. 600 miles (1000 km).

Drive reservedly and do not exceed a speed of 50 mph (80 km/h). In the case of air loss, you can expect changes in vehicle handling such as reduce lane stability, longer braking distances, and changes in self-steering properties.◀

# Battery

## Battery care

The battery is 100 % maintenance-free, i.e., the electrolyte will last for the life of the battery when the vehicle is operated in a temperate climate.

For all questions that regard the battery, please consult your BMW center. Since the battery is maintenance-free, the following is for your information only.◀

## Charging the battery

Only charge the battery in the vehicle via the terminals in the engine compartment with the engine off. Connections, refer to Jump-starting on page 203.



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

To avoid short circuits, as well as possible fires and personal injury, always disconnect the cable from the battery's negative terminal before working on the vehicle's electrical system.◀

### Battery switch

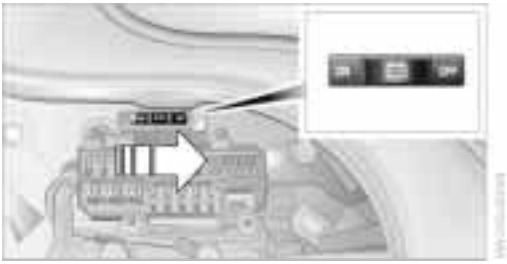

Before storing the vehicle for an extended period of several weeks or more, slide the battery switch located behind the trim panel on the right side of the luggage compartment to OFF. This reduces the current flow from the battery for the period during which the vehicle remains parked.
A message appears in the Check Control panel. Please take note of the supplementary information provided in the Control Display.

Never disconnect either battery cable from its terminal while the engine is running – the resulting voltage surge would destroy the vehicle's electronic systems.◀

### Disposal

Return used batteries to a recycling point or your BMW center. Maintain the battery in an upright position for transport and storage. Always restrain the battery to prevent it from tipping over during transport.◀

## Fuses

Spare fuses are located on the fuse strip in the glove compartment; plastic tweezers can be found at the fuse holder in the luggage compartment.

CarManuals2.com

### In the glove compartment

Press the tab on the cover to the front, then fold up the cover.

Never attempt to repair a blown fuse, and do not replace a defective fuse with a substitute of another color or amperage rating, as this could lead to a circuit overload, ultimately resulting in a fire in the vehicle.◀

### In the luggage compartment

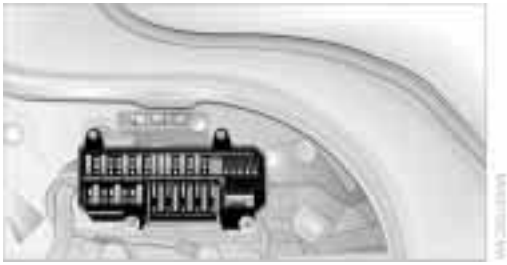

Use the handle to pull down the trim on the right wall.





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Giving and receiving assistance

## Warning triangle*

The warning triangle is conveniently stored in the onboard tool kit mounted on the inside of the luggage compartment lid.

Comply with legal requirements requiring you to carry a hazard warning triangle in the vehicle.◀

## First-aid kit*

You will also find the first-aid kit in the onboard tool kit's container.

Some of the articles contained in the first-aid kit have a limited service life. For this reason, check the expiration dates of each of the items regularly, and replace any whose expiration dates have passed. You can find replacements in any pharmacy.
Always comply with laws requiring a first-aid kit to be carried in the vehicle.◀

## Jump-starting

When your battery is discharged you can use two jumper cables to start your vehicle with power from the battery in a second vehicle. You can also use the same method to help start another vehicle. Use only jumper cables with fully-insulated clamp handles.

CarManuals2.com

To avoid the risk of potentially fatal injury, always avoid all contact with electrical components while the engine is running. Carefully adhere to the following sequence, both to prevent damage to one or both vehicles, and to guard against possible personal injury.◀

### Preparing

1. Check whether the battery of the support vehicle has 12 Volts and approximately the same capacity (Ah). This information can be found on the battery
2. Switch off the engine of the support vehicle
3. Switch off any electrical systems and components in both vehicles.

Ensure that no contact exists between the bodywork on the two vehicles – danger of short circuits.◀

### Connect the jumper cables

To avoid personal injury from sparks, always observe this sequence when connecting jumper cables.◀

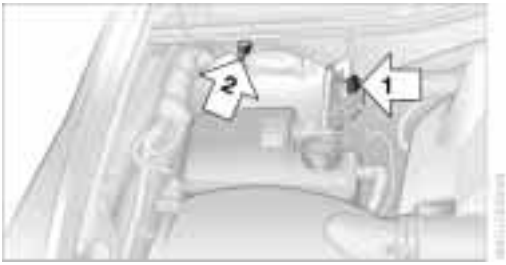


Your BMW is equipped with an auxiliary terminal specifically designed for jump-starting. It is located within the engine compartment, see arrow **1** in the illustration. The symbol + is embossed on the cover.

1. Remove the cover of the BMW auxiliary terminal for jump starting
2. Use the jumper cable (+) to set up a connection between the positive terminal of the discharged battery and the



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

positive terminal of the support battery.
To do so:
Connect one terminal clamp to the positive terminal of the battery or to an auxiliary terminal for jump starting on the support vehicle. Connect the second terminal clamp on the positive terminal of the battery or an auxiliary terminal for jump starting of the vehicle to be started.

On your BMW, there is a special nut as body ground on the suspension strut dome, see arrow **2** in the illustration

3. Use the second jumper cable to set up the connection between the negative terminals of both vehicles.
   To do so:
   Connect a terminal clamp to the negative terminal of the battery and/or to an engine or body ground of the support vehicle.Connect the second terminal clamp to the negative terminal of the battery or to an engine or body ground of the vehicle to be started.

### Starting the engine

1. Start the engine on the support vehicle and allow it to run for several minutes at a fast idle
2. Start the engine on the other vehicle in the usual way.
   If the first start attempt is not successful, wait a few minutes before another attempt in order to allow the discharged battery to recharge
3. Allow the engines to run for several minutes
4. Disconnect the jumper cables by reversing the connection sequence.

If required, have the battery inspected and recharged at your BMW center.

Never use spray fluids to start the engine.◀

## Towing

Even if the transmission is in perfect working order, remember to disengage the transmission lockout manually before towing the vehicle. Failure to observe this precaution could result in automatic activation of the transmission lockout while the vehicle is being towed.◀

Releasing transmission lockout manually, refer to page 70.

### Tow fitting

The threaded tow fitting is stored in the tool kit mounted on the inside of the luggage compartment lid, refer to page 195, and should always remain in the vehicle. This fitting, which fits the tow sockets on both the front and the rear of the vehicle, is intended exclusively for use in towing the vehicle on paved roads.

### Access to tow sockets

Press the arrow symbol to push out the cover.

#### Front

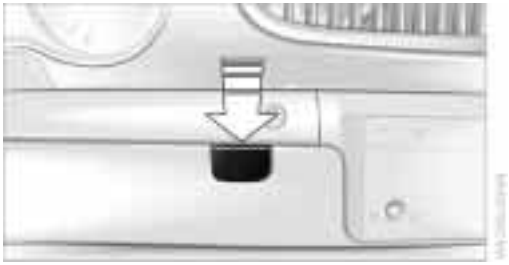

#### Rear

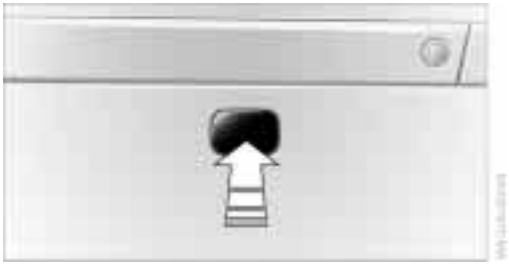

CarManuals2.com

Screw the tow fitting in until it bottoms firmly. If this is not done, the threads could be damaged.
Never attempt to tow or tie down the vehicle using suspension components, as





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

this could lead to damage that might ultimately result in an accident.◀

To avoid jerking and the associated stresses on vehicle components when towing, always use either a tow bar or a nylon rope.

▷ Keep the vehicles in line, taking care to avoid towing at an offset angle, and make certain that the tow rope connecting the two vehicles is tight before starting off.◀

## Tow bars

The tow fittings used should be on the same side on both vehicles.
Should it prove impossible to avoid mounting the tow bar at an offset angle, please observe the following:

- ▷ Clearance and maneuvering capability will be strictly limited in corners
- ▷ When mounted at an angle, the tow bar will exert lateral forces, tending to push the vehicle sideways.

⚠ Never use a vehicle to tow another vehicle that is heavier than itself, as this could lead to a loss of control.◀

## Towing

⚠ Do not tow the vehicle by the rear axle; because the steering detent is not operational, the wheels could turn to an extreme angle during towing.◀

1. Turn on the ignition to allow operation of the brake lamps, turn signal indicators, horn, parking brake and windshield wipers
2. Turn on the hazard warning flashers where allowed by law
3. Release the transmission lockout manually, refer to page 70
4. Towing speed:
   maximum of 45 mph (70 km/h)
5. Towing distance:
   maximum of 90 miles (150 km).

If the electrical system in the towed vehicle has failed, use an alternate means to identify the vehicle as being towed such as a sign or warning triangle placed in the rear window.

⚠ The steering and brakes are without power assistance when the engine is off. This means that higher levels of effort will be required to operate the steering and brakes.◀

## Tow-starting

It is not possible to start the engine by tow-starting the vehicle.
Jump-starting, refer to page 203.

Have the source of the starting difficulties diagnosed and repaired at your BMW center.

## Towing with a commercial tow truck

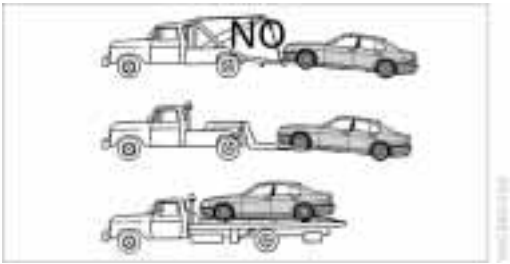


- ▷ Do not tow with sling-type equipment
- ▷ Use a wheel lift or flatbed carrier
- ▷ Please comply with applicable towing laws.

⚠ Never allow passengers to ride in a towed vehicle for any reason.◀

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Reference

This is where to look to find information on any desired topic as quickly as possible.
This chapter includes the section with technical information as well as the manual's index.

CarManuals2.com

# Technical data

## Engine specifications

| | | BMW 745i, 745Li | BMW 760Li |
|---|---|---|---|
| Displacement | cu in/cm³ | 268.4/4,398 | 5972 |
| Number of cylinders | | 8 | 12 |
| Maximum output | hp | 325 | 438 |
| at engine speed | rpm | 6,100 | 6,000 |
| Maximum torque | lb ft/Nm | 330/450 | 444/600 |
| at engine speed | rpm | 3,600 | 3,950 |
| Compression ratio | ε | 10.0 | 11.3 |
| Stroke | in/mm | 3.26/82.7 | 3.15/80.0 |
| Bore | in/mm | 3.6/92.0 | 3.50/89.0 |
| Fuel-injection system | | Digital electronic engine-management system | |

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Dimensions

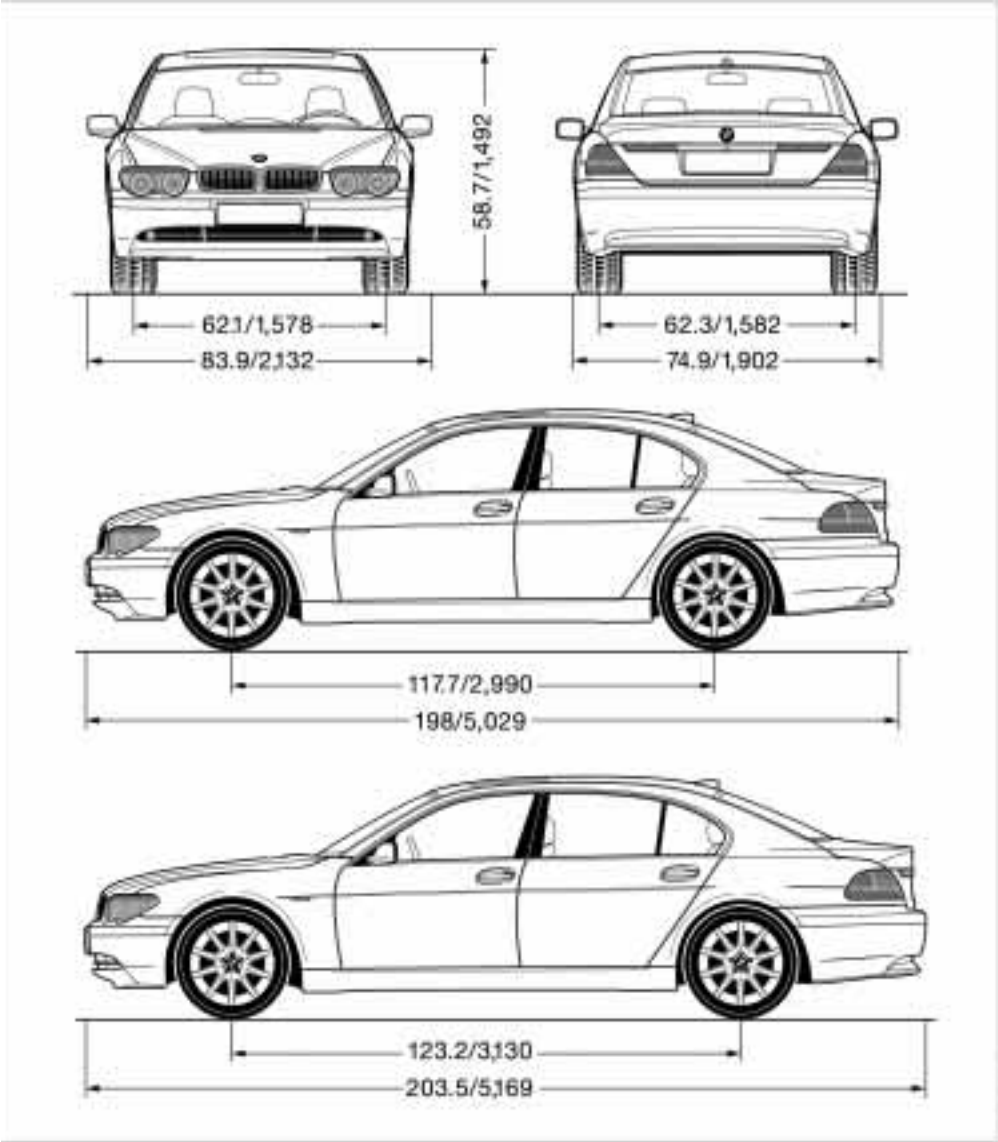


All dimensions specified in in (mm). Lower section of page: Li models.
Min. turning circle dia.: 39.7 ft (12.1 m); Li models: 41.3 ft (12.6 m).

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Weights

| | | BMW 745i | BMW 745Li |
|---|---|---|---|
| Curb weight | lbs./kg | 4,376/1,985 | 4,464/2,025 |
| Approved gross vehicle weight | lbs./kg | 5,434/2,465 | 5,523/2,505 |
| Approved front axle load | lbs./kg | 2,557/1,160 | 2,602/1,180 |
| Approved rear axle load | lbs./kg | 2,987/1,355 | 3,020/1,370 |
| Approved roof load capacity | lbs./kg | 220/100 | |
| Luggage compartment volume | cu ft/l | 17.7/500 | |

| | | BMW 760Li |
|---|---|---|
| Curb weight | lbs./kg | 4,872/2,210 |
| Approved gross vehicle weight | lbs./kg | 5,930/2,690 |
| Approved front axle load | lbs./kg | 2,833/1,285 |
| Approved rear axle load | lbs./kg | 3,109/1,410 |
| Approved roof load capacity | lbs./kg | 220/100 |
| Luggage compartment volume | cu ft/l | 17.7/500 |

Never exceed either the approved axle loads or the gross vehicle weight.

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Capacities

| | | | Notes |
|---|---|---|---|
| Fuel tank | gal./liters | approx. 23.2/88 | Fuel specification: |
| Reserve | gal./liters | approx. 2.6/10 | page 183 |
| Windshield and headlamp washer system | quarts/liters | approx. 6.3/6.0 | For details: page 73 |
| Cooling system, including heating | | | |
| BMW 745i, 745Li | quarts/liters | approx. 14.9/14.1 | |
| BMW 760Li | quarts/liters | approx. 15.8/14.94 | For details: page 191 |
| Engine with oil filter renewal | | | BMW High Performance Synthetic Oil. |
| BMW 745i, 745Li | quarts/liters | approx. 8.5/8.0 | Specifications: |
| BMW 760Li | quarts/liters | approx. 9.0/8.5 | page 191 |
| Automatic transmission and differential | | – | Lifetime fluid, no fluid change required |

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

# Everything from A to Z

## Contents

### A

"ABC..." for navigation 132, 133
ABS Antilock Braking System 96
ACC, refer to Active cruise control 75
"ACCEPT" for navigation 136, 142
Accessories 8
Accessory position 61
Activated-charcoal filter 111
Activation
– portable phone 174
Activation time 113
Active cruise control 75
– malfunctions 81
Active head restraints, front 48
Active seat 52
Active seat ventilation 51
Adapter for spare key 34
Adaptive brake lamp 101
Adding washer fluid 73
"Address book" 140
Adjusting
– head restraints 47
– lumbar support 46
– seats 46
– shoulder support 46
– thigh support 46
Airbags 55
Air distribution 107, 109
Air outlet vents 105
Air pressure, refer to Tire inflation pressure 184
Air supply 107
– rear air conditioner 111
AKI, refer to Fuel specifications 183
Alarm system 41
– avoiding unintentional alarms 41
All-season tires 188
"AM..." 146, 149, 151
AM waveband 149
Anchorages 126
"ANGLE" in DVD mode 167
Antifreeze 191
– washer fluid 73
Antilock Braking System ABS 96
Anti-theft system 35, 41
Approved gross vehicle weight 210
Aquaplaning, refer to Hydroplaning 124
Armrest, refer to Center armrest 120
Arrival time 88
"Arrow display" for navigation 138
"AS ADDRESS"
– current location 142
– destination input 132, 134, 135
– destination list 136
– directory creation 140
– home address 141
– in address directory 141
– most recent destinations 136
"AS DEST."
– destination input 132, 134, 135
– directory creation 140
– home address 141
– most recent destinations 136
– with address directory 140
Ashtray
– front 118
– rear 119
Assistance window
– Control Center 23
– help texts 23
– status lines 24
AUC Automatic recirculated-air control 107
"Audio" 146, 149
Audio 146
– adjusting the tone 147
– controls 146
– switching on/off 147
– volume 147
"AUDIO" in DVD mode 167
"AUTO", refer to Automatic climate control 109
"AUTO" for audio operation 151
Automatic
– air distribution 107
– cruise control 73
– headlamp control 102
– luggage compartment lid control 36, 40
– steering wheel adjustment 53
Automatic car wash, refer to Care manual
Automatic climate control 105
– rear air conditioner 111
– rear cooler 116
– settings 107
– settings in Control Display 109
Automatic curb monitor 55
Automatic Hold
– parking 64
– parking brake 63

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Automatic recirculated-air control AUC 107
Automatic transmission with L mode 67
Automatic transmission with Steptronic 69
– operation via buttons in steering wheel 69
"AUTO P" 54, 64
"AUTOSTOR" 161
"Autostore" for radio operation 150
Average fuel consumption 88
Average speed 88
Avoid false alarms 41
"Avoid highway" 137
"Avoid route" 139
"Avoid sect." 139
"Avoid tolls" 137
Avoid unintentional alarms 41
"A-Z" 175

## B

Backrest adjustment 47
– front seats 46
– rear seats 47
Backrests, refer to Seats 45
Backup lamp, bulb replacement 197
Balance 147
"Balance" in sound system operation 148
Bass 147
"Bass" in sound system operation 148
Battery 200
– discharged 202
– switch 201
"BC", refer to Computer 88
Belts 50
Beverage holders 118
Blinds 115
Blower 107
BMW active seat 52
"BMW Assist" 19, 22, 178
– "Roadside Assistance" 178
BMW Assist 178
BMW comfort seat 46
"BMW Services" 178
"Booktape" 158
Brake, malfunctions 192
Brake assistant, refer to Dynamic Brake Control DBC 96
Brake fluid 192
Brake hydraulic systems 192
Brake lamp, adaptive 101
Brake lamps, bulb replacement 197
Brake pads 125, 193
Brakes 125
Brake system
– brake fluid 192
Break-in procedures 124
"Brief info" information bulletin 23
"Brightness" during TV operation 161
"Brightness" in the Control Center 92
Bulb changes 195
Buttons in steering wheel 18
– refer to Automatic transmission with Steptronic 69

## C

California Proposition 65 Warning 194
Call
– ending 175
– making 174
Calling 174
– from telephone directory 175
– from the redialing list 176
– from the Top 8 list 176
– redialing 176
Can holders, refer to Beverage holders 118
Capacities 211
Car care, refer to Care manual
"Car data" 19, 22
Cargo, securing 126
Cargo area
– emergency release 40
– manual operation 40
– opening and locking separately 39
– opening from the inside 39
– opening from the outside 38
– operating via remote control 36
Cargo loading 126
"Car parked" 109, 112
Car phone 171, 174
Car radio, refer to Radio 146
Car wash 124
Car wash, refer to Care manual
Cassette 158
Cassette deck 158
– adjusting the tone 147
– "Booktape" 158
– controls 146
– Dolby 158
– fast forward 159
– music search 159
– operating temperatures 158
– reverse 159
– selecting tape side 158
– skipping pauses 159
– switching on 158
– volume 147
CBC Cornering Brake Control 96
CBS Condition Based Service 193
"CD" 146, 153

Cadjournals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CD changer 155, 156
– adjusting the tone 147
– controls 146
– copy protection 155
– fast forward 157
– humidity 156
– operating temperatures 156
– random play 157
– reverse 157
– safety 155
– sampling 157
– scan 157
– selecting CD 157
– selecting track 157
– skipping tracks 157
– switching on 156
– temperature range 156
– track search 157
– volume 147
CD player 153
– adjusting the tone 147
– atmospheric humidity 153
– controls 146
– fast forward 154
– operating temperatures 153
– random play 154
– reverse 154
– sampling 154
– scan 154
– selecting track 154
– skipping tracks 154
– switching on 153
– temperature range 153
– track search 154
– volume 147
Cell phone, refer to separate Portable phone manual 170
"Center" 110
Center armrest 120
Center console, refer to Comfort features 16
Central locking system 35
– button 38
– remote control 35
"CHANGE" for navigation 136
Changing bulbs, refer to Lamps and bulbs 195
Changing language 91
Changing settings in the Control Display 91
Changing units of measure in Control Display 91
Check Control 85
– "Check" 86
Checking engine oil level 190, 190
Checking tire pressures 184
Child's seat 57
Child-restraint system 57
Child-safety lock 59
Cigarette lighter 119
Cleaning, refer to Care manual
Cleaning windshield 72, 73
"Climate" 19, 22
Climate control
– automatic air distribution 107
"Clock" 91
Clock 82
– setting time and date 91
Closing
– from inside 37
– from outside 35
Closing assist
– doors 38
– luggage compartment lid 39
Cockpit 12, 16
Coin holder, refer to Storage compartments 117
Coin tray, refer to Storage compartments 117
Cold start 62
"Color" during TV operation 161
"Comfort"
– "EDC" 97
Comfort features 16
Comfort seat 46
– in rear 47
"Communication" 19, 22, 171
Compact Disc, refer to CD 153
Compartments, refer to Storage compartments 117
Computer 86
Computer, refer to Control Center 19
– automatic climate control 109
– "BC" 89
– changing settings 91
– display, menus 22
– displays in the Control Display 88
– language selection 91
– setting time and date 91
– status lines 24
– symbols 21
Condition Based Service CBS 193
Confirming a menu item in the Control Display 20
Connecting car vacuum cleaner 119
Consumption display 87
"Contrast" during TV operation 161

Carmanuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Control Center 19
– assistance window 23
– automatic climate control 109
– changing menu page 20
– changing settings 91
– confirm selection or entry 20
– display, menus 22
– display help texts 23
– language selection 91
– lists 20
– menu entry selection 20
– rear 24
– selecting units of measure and display format 91
– setting time and date 91
– status lines 24
– symbols 21
– symbols and lists 20
Control Center, setting brightness 92
Control Display 19
– rear 24
Controller, refer to Control Center 19
Controls 12, 16
Convenience operation of windows and sliding/tilt sunroof 36, 37
Convenience starting feature 62
Coolant 190, 191
Cooler, refer to Rear cooler 116
Cooling adjustment
– rear air conditioner 111
Copyright 2
Cornering Brake Control CBC 96
Country of destination 133
Courtesy lamps 104
Creating voice address book 141
Cruise control
– active cruise control 75
Cruise control, refer to Programmable cruise control 73
Cruising range 87
Cup holders, refer to Beverage holders 118
Curb lamp
– bulb replacement 196
Curb weight 210
Current fuel consumption 88
"Customer Relations" 178

## D

Dashboard 12, 16
Data 208
"Date" 91
Daytime driving lamps 102
DBC Dynamic Brake Control 96
Deactivating
– interior motion sensor 36, 41
– tilt alarm sensor 36, 41
Default settings 147
Defrosting windows and removing condensation 107
Defrosting windshield, refer to Defrosting windows and removing condensation 107
Defrost setting 107
"DELETE" for navigation 136, 137
Destination 132
Destination during navigation
– selecting with "Information" 135
– select using voice 141
Destination entry 132
Destination list for navigation system 136
"Destinations" 132
"Dest. input" 132
"Detour" 139
Dialed numbers 176
Digital coverage area for navigation 130
Dimensions 209
Dimming mirrors 52
Dipstick, engine oil 190
Direction
– arrow 138
– to destination 137
– voice instructions 140
Directional indicators, refer to Turn signal indicators 71
Disc brakes 125
Displacement 208
Display
– computer 22
– Control Center 22
Display, refer to Control Display 19
Display format and units of measure in Control Display, changing 91
Display illumination 103
Display lighting, refer to Instrument lighting 103
Displays 14
Distance 88
Distance tempomat
– refer to Active cruise control 75
Distance to destination 88
Distance warning 93
"Dolby..." for audio operation 159
Door keys 34
Door mirrors
– automatic dimming 52
Doors
– child-safety lock 59
– locking and unlocking 35
– manual operation 37
– remote control 35
DOT Quality Grades 186
Draft-free ventilation 108
Drink holders, refer to Beverage holders 118
Driving stability control 94, 96
Driving tips 124
"DSC" 95
DSC Dynamic Stability Control 94

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

"DTC" 95
DTC Dynamic Traction Control 15, 95
"DVD" 146, 164
DVD changer 162
– adjusting picture 166
– adjusting the tone 147
– chapter search 166
– controls 146
– copy protection 162
– country codes 163
– DVD controller 164
– fast forward 165
– fast reverse 165
– freezing frame 166
– humidity 163
– media formats 162
– operating temperatures 163
– safety 162
– searching for chapter 166
– selecting a track 165
– selecting camera angle 167
– selecting DVD 165
– selecting language 167
– selecting picture format 166
– selecting subtitles 167
– specific menu 167
– switching on 164
– temperature range 163
– volume 147
DVD Multimedia changer, refer to DVD changer 162
Dynamic Brake Control DBC 96
Dynamic Drive 97
Dynamic Stability Control DSC 94
Dynamic Traction Control DTC 15, 95

## E

EBV Electronic brake-force distribution 96
"EDC" 97
– "Comfort" 97
– "Sport" 97
EDC Electronic Damping Control 97
Electrical malfunction
– automatic transmission lockout 70
– fuel filler door 182
– parking brake, emergency use 65
– sliding/tilt sunroof 44
Electric power seats 46
Electric power windows 42
Electric seats 46
Electric steering wheel adjustment 53
Electronic brake-force distribution EBV 96
Electronic Damping Control EDC 97
Electronic toll collection device, refer to Entry/pass tags 127
Emergency operation
– automatic transmission lockout 70
– doors 37
– fuel filler door 182
– luggage compartment lid 40
– parking brake 65
– sliding/tilt sunroof 44
Emergency SOS call 173
"Emissions inspection" 84
Energy Control 88
Engine compartment 190
"Engine coolant" 193
Engine coolant 190
"Engine oil" 193
Engine oil
– consumption 190
– grades 191
Engine oils 191
Engine output 208
Engine specifications 208
"Entertainment" 19, 22, 146
Entry/pass tags 127
Equalizer 147, 148
ESP, refer to DSC 94
Estimated time of arrival 88
Extended vehicle storage, refer to separate Care manual
Exterior mirrors 52
– automatic dimming 52
"Extra"
– with rear air conditioner 112
– with rear cooler 116
"Extra" in "Climate" menu 109

## F

Fader 147
"Fader" in sound system operation 148
Failure of an electrical accessory 201
"Fastest route" 137
Fastest route 137
Fault displays 85
Filler door 182
Filling the washer reservoir 73
First-aid kit 202
Fittings, tow-starting and towing 204
Flashlight 117
Flat Tire Monitor 98
Flat tires 186
"FM..." 146, 149, 151
FM waveband 149
Fog lamps 103
"Footwell" 110
Footwell lamps 104
Forward lamps 104
Front armrest 117
Front seat adjustment 45
Fuel 183
Fuel capacity 182
Fuel consumption display 88
Fuel economy 88
Fuel filler door 182
– releasing in the event of electrical defect 182
Fuel gauge 87
Fuel level display 87, 88
"Fuel reserve" 87
Fuel specifications 183

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Fuel tank capacity 182
"FULL MENU" 165, 166
"Full Release" 25
Fuses 201

## G

Garage door opener, refer to Integrated universal remote control 114
Gasoline 183
General driving instructions 124
Glasses compartment 118
Glove compartment 117
GPS, refer to Navigation system 130
GPS navigation system
– selecting destination in "Information" 135
Ground lamps 104
Guidance system
– interrupting 140
– starting 137
– terminating 140

## H

Handbrake, refer to Parking brake 62
Hand lamp 117
Hands-free microphone 173
Hands-free system 173
Hazard warning flashers 16
Headlamp cleaning system 73
Headlamp control, automatic 102
Headlamp flasher 71
Headlamps
– automatic control 102
– cleaning 73
– high beams 103
– low beams 102
Headlamp washers 72
Head restraints 47
– front head restraints, active 48
– rear head restraints 48
Heated seats 51
Heated steering wheel 53
Heating and ventilation 105
Heating while stopped 108
Height 209
Height adjustment
– seats 46
– steering wheel 53
"Help" 19, 22
Help texts in Control Display 23
High beams 103
– bulb replacement 196
Home address 141
Hood release 189
Horn 13
Hydraulic brake assistant, refer to DBC 96
Hydroplaning 124, 186

## I

Ice warning 82
idrive, refer to Control Center 19
Ignition key 34
Ignition lock 61
"Indep. heater" 112
"Indep. ventil." 109, 112
Indicator lamps 15
"Individual" 110
Individual button assignments on steering wheel 53
Inflation pressure 184
Info Display 14
"Information" for navigation 135, 136
Information on the navigation system, refer to Voice guidance for navigation 139
Infrared windshield, refer to Entry/pass tags 127
Instrument cluster, refer to Info Display 14
Instrument illumination 103
Instrument panel 12, 16
Integrated universal remote control 114
Interior lamps 103
– remote control 36
Interior mirrors 52
– automatic dimming 52
Interior motion sensor 42
Interior protection
– deactivation 36, 42
Interior rearview mirror 52
– automatic dimming 52
Intermittent wipe 72

## J

Jack 198
Joystick, refer to Control Center 19
Jump-starting 202

## K

Key Memory 60
Keys 34
– adapter for spare key 34
Kickdown 68

## L

Lamps 102
– fog lamps 103
– high beams/standing lamps 103
– interior lamps 103
– parking lamps/low beams 102
Language control 18, 26
"Last" 176
"Last dest." 136
"Last exit" 139
Latch, refer to LATCH child-restraint system 59
LATCH child-restraint system 59
LEDs light-emitting diodes 104
"Left"
– for automatic climate control 109
– for heated seats 51
Length 209
Level control system 101
License plate lamp, bulb replacement 197

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Light-emitting diodes LEDs 104
Lighter 119
Lighting of instruments 103
Lights on warning 102
Light switch 102
"Limit" 89
"Limited Release" 25
Limit selection, adjustment 89
Litter container 117
L mode on automatic transmission 67
Loading the vehicle 126
"Location" 135, 141, 142
Lock code 174
Locking
– from inside 37
– from outside 35
"LOGIC7" for audio operation 148
Louvers 105
Low beams 102
– automatic 102
Lower back support, refer to Lumbar support 46
Lug bolts 199
Luggage compartment lid
– emergency release 40
– manual operation 40
– opening and locking separately 39
– opening from the inside 39
– opening from the outside 38
– operating via remote control 36
Luggage compartment lid control, automatic 36, 40
Luggage compartment net 40
Luggage compartment volume 210
Luggage rack, refer to Roof-mounted luggage rack 127
Lug wrench 198
Lumbar support 46

## M

M+S tires 188
Maintenance 193
Malfunction displays 85
"M AM" 150
Manually controlled recirculated air 107
Manually switch air conditioner mode on and off 107
Manual operation
– doors 37
– sliding/tilt sunroof 44
Manual release
– automatic transmission lockout 70
– fuel filler door 182
– luggage compartment lid 40
Manual station search 150
Map CD 130
"Map dir. travel" for navigation 138
"Map facing N." for navigation 138
Maximum axle loads 210
Maximum cooling
– automatic climate control 107
– rear air conditioner 111
Maximum roof weight 210
Maximum speed
– winter tires 188
Maximum speed, refer to Limit 89
"Memo" 91
"Memorize", automatic climate control 110
– "Individual" 111
"Memorized Stations", radio 151
"Memorize" for audio operation 151
Memory, refer to Seat, mirror and steering wheel memory 54
"Memory" for audio operation 146, 148, 150
"MENU" in DVD mode 167
"Menu name" 23
Menus
– computer 22
– Control Center 22
"MFL" 54
"M FM" 150
"Microfilter" 193
Microphone for hands-free system 173
Mirrors 52
– automatic dimming 52
– mirror heaters 52
– mirror memory 54
"Missed" 177
Missed calls 176
Mobile phone, refer to separate Portable phone manual 170
Modifications, technical 8
Monitor, refer to Control Center 19
Most frequently called numbers 176
Music search
– cassette deck 159

## N

"Name" for navigation 133
"Navigation" 19, 22, 131
– "NO" 131
– "YES" 131

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Navigation computer
– installation location 130
Navigation destination
– manual entry 132
– selecting from the directory 134
– selecting with map 134
Navigation system 130
– "ACCEPT" command 142
– current location 142
– destination entry 132
– destination guidance in assistance window 131
– destination list 136
– digital coverage area 130
– directory 134
– "Hotel / Motel" 135
– "Information" feature 135, 136
– manual entry of destination address 132
– map CD 130
– map-guided destination selection 134
– new route 139
– "On location" 135
– recent destinations 136
– route display 138
– route list 139
– route selection 137
– safety 130
– selecting points of interest 135
– selection options 131
– start active guidance 137
– starting 131
– switching off, refer to Terminating/interrupting active guidance 140
– terminating/interrupting active guidance 140
– town and city centers 143
– "View" function 138, 139
– voice guidance 139
– volume adjustment 140
– what to do if ... 143
– wordmatch principle 142
Navigation system GPS, refer to Navigation system 130
Navigation target cursor 134, 135
Navigation "With map" 134, 135
"Navi info" 54
"New route" 139
"Next"
– map-guided destination selection 135
– searching for points of interest 136
"None Release" 25
Notebook of voice command system 28
Nozzles 105
NTSC during TV operation 161

## O

OBD interface socket 194
Occupant-restraint systems 50, 55
Odometer 82
Oil additives 191
Oil change intervals, refer to Service Interval Display 83
Oil consumption 190
Oil dipstick 190
Oil specifications 191
"OK" for DVD operation 167
"ON / OFF" speed limit 89
Onboard computer, refer to Computer 92
Onboard Diagnostic OBD
– interface socket 194
Onboard tool kit 195
"On country" 136
"1,2,3" 175
"On location" 135
"On town/city" 136
Opening and closing
– from inside 37
– from outside 35
Operating temperatures
– in cassette deck mode 158
– in CD changer mode 156
– in CD player mode 153
– in DVD mode 163
– in radio mode 149
Oral note 28
Orientation
– changing the display 138
Orientation menu 19
Orientation to north 138
Outside temperature display 82

## P

Paint and finish care, refer to Care manual
PAL during TV operation 161
Panic mode 36
Park detent, refer to Transmission lockout 68, 70
Park Distance Control PDC 93
Parked-car ventilation 112
– "Indep. ventil." 112
– "Set time 1" 113
– "Set time 2" 113
– "Switch. time 1" 113
– "Switch. time 2" 113
Parking aid 93
Parking brake 62
– Automatic Hold 63
– manual operation 65
Parking lamp
– bulb replacement 196
Parking lamps 102
Parking with Automatic Hold 64
Particle filter 111
Passenger-side mirror tilt function 55
PDC Park Distance Control 93
"PDC pic." 94
Personal Calling 171
Phone directory, refer to Telephone directory 175

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Phone number, refer to Portable phone 174
"Pict. format" 166
"Picture" 146
– DVD changer 166
– TV 161
Please fasten safety belts warning lamp 50
Pollen 111
Portable phone
– adjusting volume 173
– calling 174
– call termination 175
– controlling with the buttons on the steering wheel 18
– emergency calls 173
– hands-free system 173
– missed calls 176
– operating using the Control Display 171
– redialing 176
– refer to separate Portable phone manual 170
– selecting phone numbers 174
– switching on and off 174
– Top 8 list 176
Portable phone battery 171
Portable phone codes 174
Power electric seat 47
Power rating 208
Power socket 119
Pressure, tires 184
Pressure monitor, tires 98
Programmable cruise control 73
Programming settings, refer to Vehicle Memory, Key Memory 60
Publishers 2
Puncture
– Flat Tire Monitor 98

## R

Radio
– adjusting the tone 147
– autostore 150
– controls 146
– frequency band selection 149
– memory locations 150
– operating temperatures 149
– sample 150
– scan 150
– station search 150
– station selection 151
– store station 150
– switching on 149
– volume 147
– Weather Band 151
Radio mode 61
Radio waveband selection 149
Rain sensor 72
Reading lamps 104
"Rear" 25
Rear air conditioner 111
– air supply 111
– cooling adjustment 111
– "Extra" 112
– maximum cooling 111
– "Rear air cond." 112
– switching off 111
– switching on/off in the Control Display 112
Rear armrest, refer to Center armrest 120
Rear cooler 116
– "Extra" 116
– "Rear refr. box" 116
Rear monitor, refer to Control Center in rear 24
Rear screen 24
Rear seat heaters 51
Rear seats
– adjusting passenger seat from the rear 47
– comfort seat adjustments 47
– head restraint adjustment 48
Rearview mirror 52
Rear window blind, refer to Sun blinds 115
Rear window defroster 16
Rear window safety switch 12, 43
"Recirc. air" 54
Reclining seat 45
Redialing list 176
Redialing with portable phone 176
Refueling 182
Releasing the hood 189
Remaining distance 88
Remote control 34, 35
Remote control unit 34
Removing condensation from windows 107
Replacement fuses 201
Replacement keys 35
Replacing tires 186
Reserve warning 87
Reservoir, washer system 73
Reset 147
"RESET" for audio operation 148
Residual heat mode 108
"Right"
– for automatic climate control 109
– for heated seats 51
"RND"
– CD changer 157
– CD player 154
"Roadside Assistance" 178
Roadside assistance calls
– manual activation 173
Roof-mounted luggage rack 127
"Route" 139

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Route
– display 138
– list 139
– map cancellation 138
– map display 138
– selection 137
"Route guid." 137, 140
Route map 138
"Route selec." 137
Route selection 137
"RPA" 98
Run-flat tires 186, 200

## S

S 154
Safety belts 50
Safety belt tensioners 50
Safety lock buttons 38
Safety precautions to observe when using your phone 170
Safety switch for rear windows 43
"Save dest." 135
"SCAN"
– CD changer 157
– CD player 154
– radio 150
Scan
– CD changer 157
– CD player 154
– radio 150
Scan sampling
– CD changer 157
– CD player 154
– radio 150
Screen
– rear 24
Seat, mirror and steering wheel memory 54
Seat heating 51
Seat memory 54
Seats
– adjusting 45
– sitting safely 45
"Seat temp." 51, 109
Seat ventilation, refer to Active seat ventilation 51
SECAM during TV operation 161
Securing cargo, refer to Cargo loading 126
Securing the load, ski bag 121
Selecting new route with navigation system 139
Selecting new scale for navigation system display 138
Selecting stored radio stations 151
Selection options for navigation 131
Selector lever, automatic transmission 67
Self-defrosting mirrors 52
Self-leveling suspension 101
"Service" 83, 193
– "Emissions inspection" 84
– "Spark plugs" 83
– Vehicle inspection 84
Service and Warranty Information Booklet for US models 193
Service brakes 125
Service Guide Booklet for Canadian models 193
Service Interval Display 83, 193
Service Requirement Display, refer to Service Interval Display 83, 193
"SET", refer to Setting speed limit 89
Set time 113
"Set time 1" 113
"Set time 2" 113
"Settings" 19, 22, 25
Setting the brightness 92
Setting the speed limit 89
Setting time and date 91
Setting timer 113
Shifting, refer to Automatic transmission with Steptronic 69
Shiftlock 67
Short commands for voice command system 29
Shortest distance 137
"Shortest route" 137
Shoulder support 46
"Side" in sound system operation 158
Side window blind, refer to Sun blinds 115
Sitting safely 45
Ski bag 120
Sliding/tilt sunroof 43
– closing in the event of an electrical defect 44
– convenience mode 37
– convenience operation 36
Snow chains 188, 188
Soft Close Automatic
– doors 38
– luggage compartment lid 39
SOS call
– using SOS button 173
Sound system
– "MANUAL" selection mode 151
Sound system adjustments
– "Balance" 148
– balance left/right 147
– "Bass" 148
– equalizer 147
– "Fader" 148
– fader front/rear 147
– "LOGIC7" 148
– LOGIC7 147
– midrange setting 148
– "RESET" 148
– speed-sensitive volume 147
– "Speed Vol." 148
– "Treble" 148
Spare fuses 201
Spare key 34
– adapter 34
Spare tire 198
"Spark plugs" 83, 193
Specifications for engine oil 191
Speed limit
– "Limit" 89
Speed limit selection, revision 89
Speedometer 14
"Speed Vol." in audio mode 148

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

"Sport"
– "EDC" 97
Stability control, refer to Driving stability control 94
Standard during TV operation 161
Standing lamps 103
Start/stop button 61
Starting 62
Starting and stopping
– cassette deck 158
– CD changer 156
– CD player 153
– DVD changer 164
– radio 149
– TV 160
Starting problems 62, 203, 204
Starting the engine 62
"State inspection" 84
Station, refer to Radio 150
Status lines in Control Center 24
Steering wheel 18
– adjustment 53
– individual button assignment options 53
Steering wheel adjustment, automatic 53
Steering wheel heater 53
Steering wheel memory 54
Steptronic 69
Stopwatch 90
– "INTERM. TIME" 90
Storage, refer to Care manual
Storage compartments 117
Storing desired speeds, refer to Programmable cruise control 75
Storing destination per voice 141
Storing seating position, refer to Seat, mirror and steering wheel memory 54
Straps, refer to Cargo loading 126
"Street" for navigation 134
"SUBTITLE" in DVD mode 167
Summer tires 187
Sun blinds 115
Switch for battery 201
Switching audio sources on/off 147
Switching off the engine 62
Switching on and off portable phone 174
"Switch. time1" 113
"Switch. time 2" 113
Symbols 6
– Control Center 20
System failure reports, refer to Check Control 85

## T

Tachometer 82
Tail lamps 197
– bulb replacement 197
"Tape" 146, 158, 159
Target cursor for navigation 134, 135
Technical data 208
Technical modifications 8
Telephone 170
– operation with the telephone keypad, folding 172
Telephone directory 175
– creating voice command telephone directory 175
– deleting all entries 176
– dialing numbers 175
– dialing numbers using voice command system 175
– entering numbers in voice command directory 175
– entry deletion 176
– updating voice command telephone directory 175
– viewing entries 176
Telephone keypad, folding 172
Television, refer to TV 160
"Temp. distribution" 51
Temperature adjustment 107
Temperature display, outside temperature 82
Tilt function, passenger-side mirror 55
Time of arrival, estimated 88
Timing 90
"Tint" during TV operation 161
Tire change 197
Tire inflation pressures 184
– checking 184
Tire-pressure monitoring 98, 99
Tire Pressure Monitor TPM 99
Tire Quality Grading 187
Tires
– flat tire 197
– tire changes 197
– tire damage 186
– tire inflation pressures 184
– tire pressure control 99
– tire replacement 186
– tire size, refer to Wheel and tire combinations 187
– tire tread 186
– treadwear indicators 186
"TITLE" 165
Title search
– cassette deck 159
"Tone" for audio operation 146
Tone for audio operation
– adjusting 147
"Tone" in sound system operation 148
Tools 195
"TOP 8" 176
"TOP" in DVD mode 167
Torque 208
Tow fittings 203
Towing 203, 204
Tow-starting 204
"TPM" 99
– "INITIALIZE" 99
TPM Tire Pressure Monitor 99
– "INITIALIZE" 99

CarManuals2.com



Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

Track 209
Traction Control System
– refer to DSC 94
Traffic congestion, refer to Selecting new route 139
Transmission
– automatic transmission with L mode 67
– automatic transmission with Steptronic 69
Transmission lockout 68
– manual release 70
Transporting children safely 57
Travel route, refer to Route 138
Tread depth, tires 186
Treble 147
"Treble" in sound system operation 148
Trip odometer 82
Trunk lid
– refer to luggage compartment lid 38
Turning circle 209
Turn signal indicators 71
– bulb replacement 196, 197
"TV" 146, 160, 161
TV 160
– adjusting picture 161
– adjusting the tone 147
– controls 146
– NTSC 161
– PAL 161
– SECAM 161
– selecting programs 160
– selecting standard 161
– storing programs 160
– switching on 160
– volume 147
"TV format" 161

## U

Undercoating, refer to Care manual
Uniform Tire Quality Grading UTQR 187
Universal garage door opener, refer to Integrated universal remote control 114
Upholstery care, refer to Care manual
Used batteries 201

## V

Vacuum cleaner connection 119
Valve caps 199
Vehicle battery 200
Vehicle dimensions 209
Vehicle keys 34
Vehicle Memory 60
Ventilation 108
Ventilation, draft-free 108
Ventilation while parked 112
Vents, ventilation 105
"Video" 146
"View" for navigation 138, 139
Viscosity 191
Voice command system 18, 26
Voice guidance for navigation 139
Volume
– audio 147
– cassette deck 147
– CD changer 147
– CD player 147
– DVD changer 147
– navigation 140
– portable phone 173
– radio 147
– TV 147
– voice command system 27

## W

Warm feet and a cool head 108
Warning lamps 15
Warnings in Check Control 85
Warning triangle 202
Washer nozzles, windshield 72
"WB" 146
Wear indicators in the tires 186
Weather Band 151
Weights 210
Wheel and tire combinations 187
Wheelbase 209
Wheels and tires 184
Width 209
"Window" 110
Windows 42
– convenience mode 37
– convenience operation 36
– safety switch 43
Windshield and headlamp washer system
– washer fluid 73
Windshield wiper blade replacement 195
Windshield wiper system 72
– washer nozzles 72
Winter tires 188
Wiper blade replacement 195
Wiper system 72
"With highway" 137
"With map" for navigation 134, 135
Wordmatch principle for navigation 142
Working in the engine compartment 189

## X

Xenon lamps 196

CarManuals2.com





Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com

# Refueling

To ensure that you always have all the essential data at hand when refueling, we recommend that you fill in the following tables with the specifications and information that apply to your vehicle.

Consult the index for individual specifications.

## Fuel

| Designation |
|---|
| |

Please enter your preferred fuel here.

## Engine oil

| Quality |
|---|
| |

The oil quantity between the two marks on the dipstick is approx. 1.1 US quarts/1 liter.

## Tire inflation pressures

| | Summer tires | | Winter tires | |
|---|---|---|---|---|
| | Front | Rear | Front | Rear |
| Up to 4 persons | | | | |
| 5 persons or 4 plus luggage | | | | |

CarManuals2.com

BMW recommends Castrol

More about BMW

bmwusa.com

The Ultimate
Driving Machine

01 41 0 157 197 ue

CarManuals2.com

Online Edition for Part No. 01 41 0 157 197 - © 11/02 BMW AG

CarManuals2.com