

61 31 823


Replacing audio unit

**Important!**

Read and comply with notes on protection against electrostatic damage ([ESD protection](#)).

**Necessary preliminary tasks:**

- Remove [radio and IHKA controls](#)

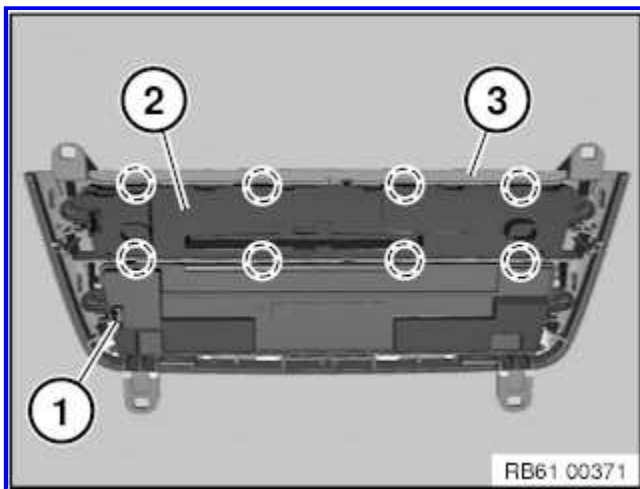

Disconnect plug connection (1).

Unclip audio operating unit (2) at the marked points using a suitable tool (such as a screwdriver - 3 mm blade).

Remove the audio operating unit (2) from the cover (3) toward the rear.

Installation note:

Audio control unit (2) must noticeably and audibly snap into cover (3).