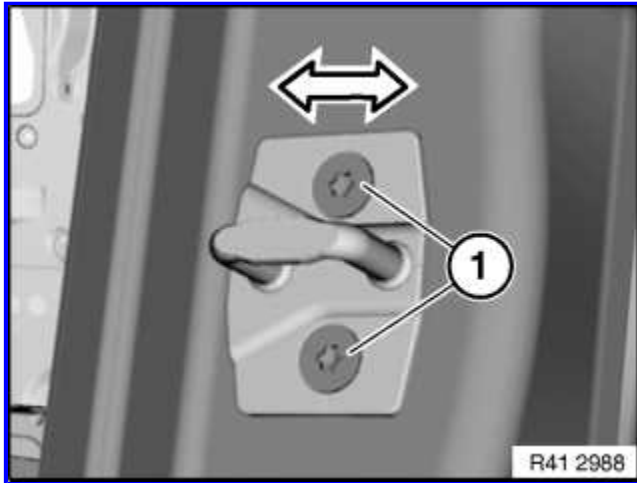


51 22 001**Replacing door detent (lock striker), rear
left or right**

Release screws (1).

Remove lock striker.

Tightening torque [51 22 2AZ](#).

After installation:

[Adjust door detent.](#)