

51 32 211

Replacing front left or right rubber guide for left or right door window




Necessary preliminary tasks:

- Open side window completely.
- Remove [cover on door window frame](#)
- Remove [exterior mirror on front door](#)

Important!

[Instructions for installation of rubber window seal](#) are fundamental to this repair instructions and must absolutely be complied with.

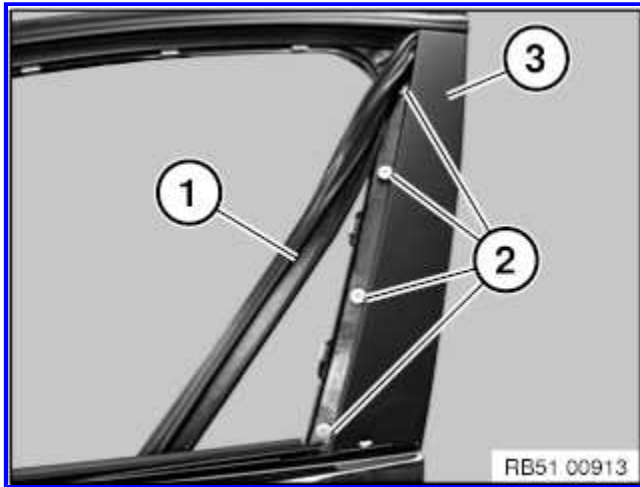

Pull rubber window seal (1) out of rear window guide.

Unfasten screws (2).


Push cover (3) downwards slightly and feed out rubber window seal (1) towards the top.

Installation note:

if necessary, replace faulty plastic nuts for screws (2).

Moisten rubber guide (1) prior to fitting with [approved lubricant](#).

Make sure rubber window seal (1) is correctly seated on cover (3).

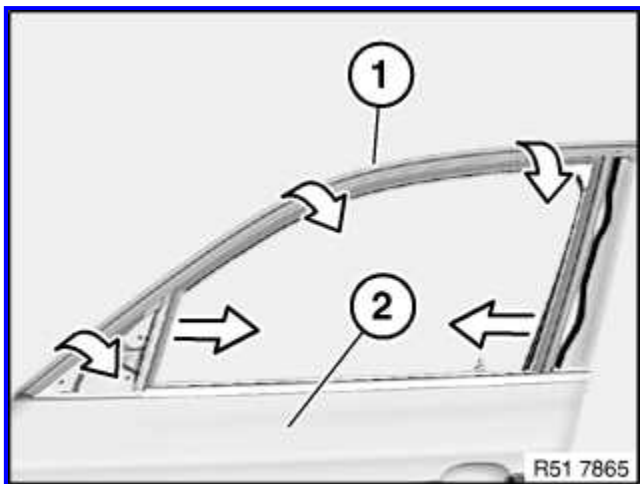

Detach rubber window seal (1) in direction of arrow from front door (2).



Installation note:

Moisten rubber guide (1) prior to fitting with [approved lubricant](#).

Make sure rubber guide (1) is correctly seated on door window glass.


Installation note:

Rubber guide (1) must not be damaged in corners (2).

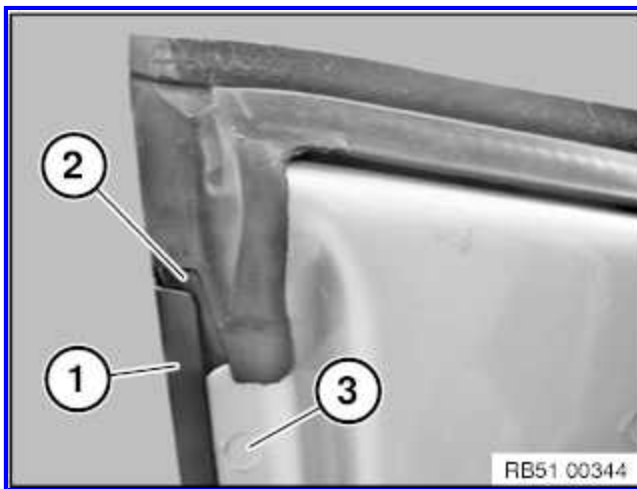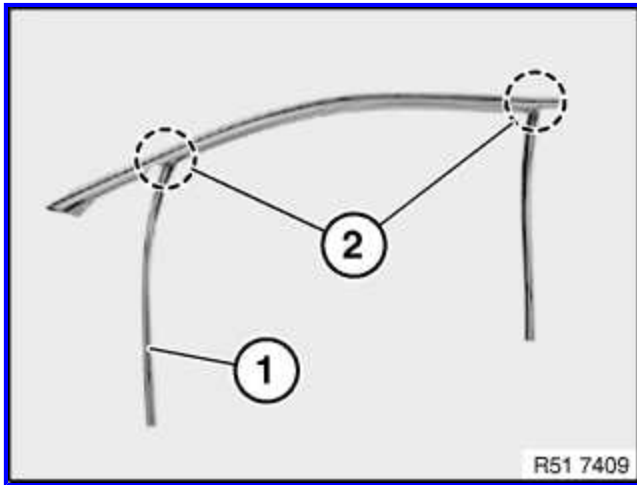

Installation note:

Ensure that the rubber window seal (2) is correctly mounted on the window frame (3) and the cover is correctly mounted on the window frame (1).

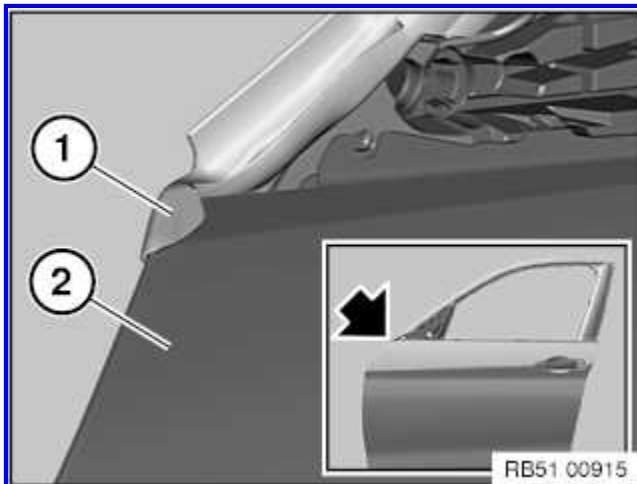

Installation note:

In the area of the inside mirror, ensure that the rubber window seal (1) is correctly mounted on the door (2).