

61 12 002

Replacing positive battery cable (from battery to luggage compartment cable connector)




Warning!

Observe [safety informations](#) for handling vehicle battery.



Necessary preliminary tasks:

- Clamp off [battery lead from negative connection point](#)

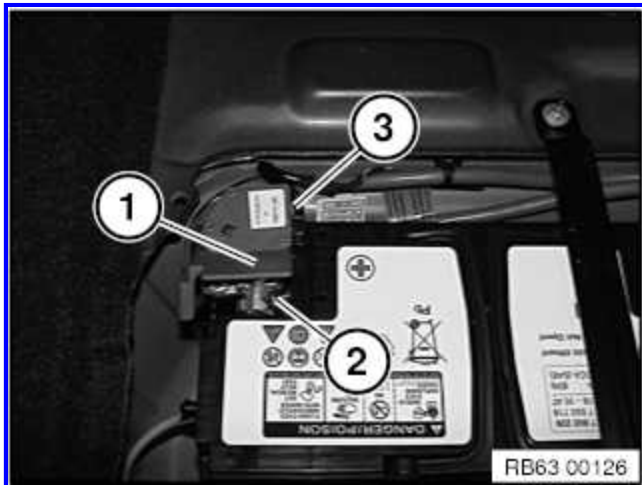


Open cover (1) and slacken nut (2) on safety battery terminal (3).

Tightening torque [61 21 1AZ](#).

Important!

Do not under any circumstances pull or lever off safety battery terminal (3) by force.

Remove safety battery terminal (3) towards top, lay to one side and fix in position.

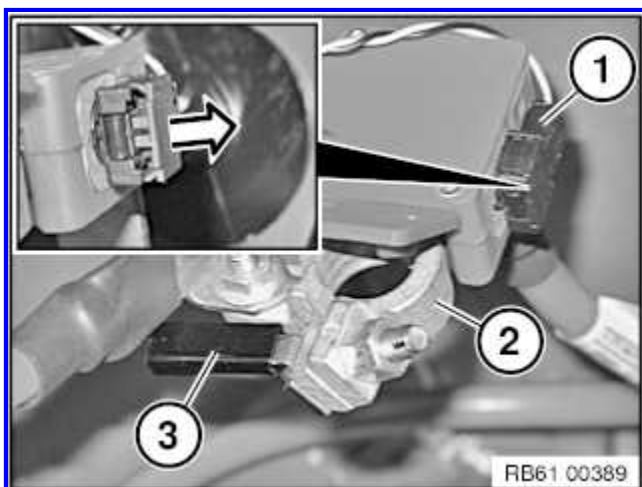

Release lock of plug connection (1) in direction of arrow with a suitable tool.


Remove plug connection (1) from safety battery terminal (2) in direction of arrow.

Pull off plug connection (3) from safety battery terminal (2).


Unscrew nuts (1).

Tightening torque [61 21 5AZ](#).

Remove retaining bracket (2) from battery (3).

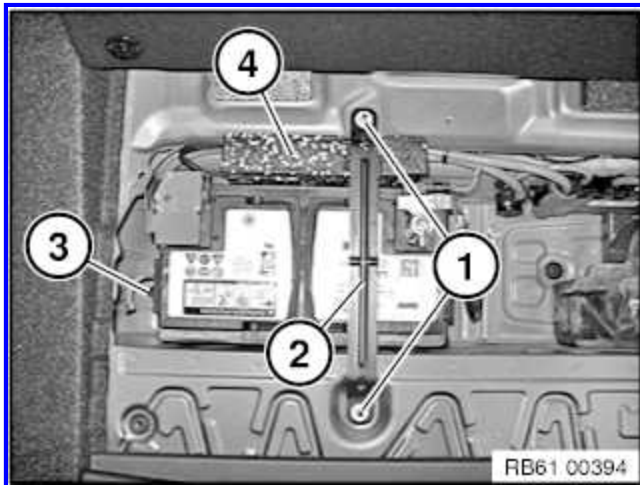

Remove battery crash pad (4) towards top.

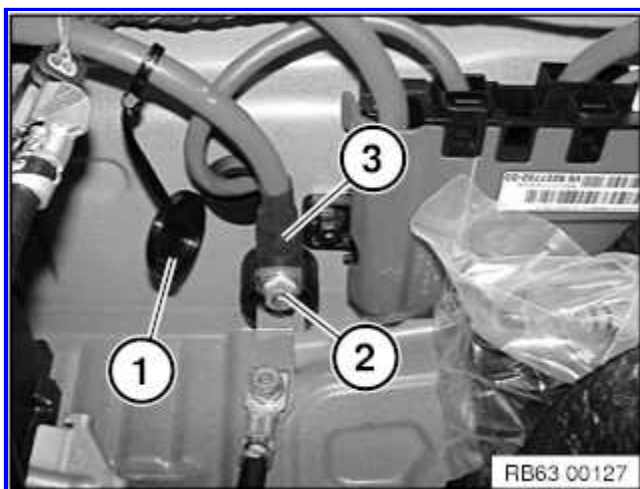

Remove cover (1) and release nut (2) below it.


Tightening torque [61 21 4AZ](#).

Remove positive battery cable (3).

Installation note:

Risk of short circuits!

Make sure positive battery cable is correctly fitted.

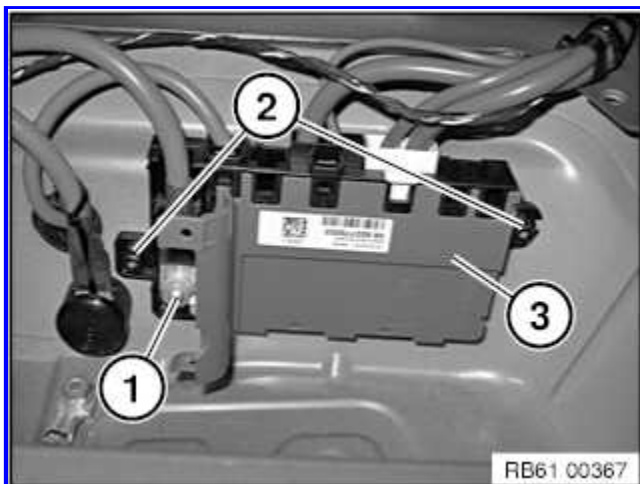

Open cover (3) on power distribution box (2) and release nut (1) underneath.

Tightening torque [61 21 4AZ](#).

Remove positive battery cable from power distribution box (2).

Remove positive battery cable complete from vehicle.

Installation note:

Risk of short circuits!

Make sure positive battery cable is correctly fitted.