



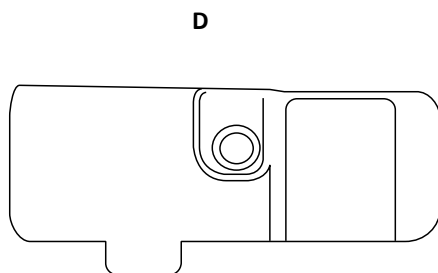


GENUINE PARTS

INSTALLATION INSTRUCTIONS


DESCRIPTION:	REAR SEAT INFOTAINMENT SYSTEM
APPLICATION:	QX80
PART NUMBER(S) REQUIRED FOR INSTALLATION:	Rear Seat Infotainment System - 999U8 39220
KIT CONTENTS:	

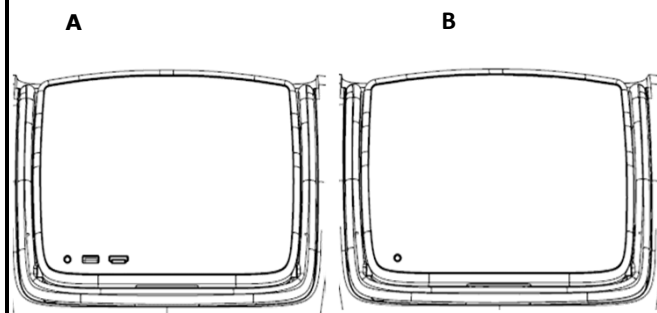


E CUSTOMER PREPACK



H



J



K



Important: Read Before Installation!

Dealer Installation Recommended.

▲ WARNING

- To avoid serious personal injury or property damage, obtain Installation Instructions before attempting to install this accessory. The Installation Instructions provide the necessary procedures for a safe installation.

CUSTOMER INTERNET DOWNLOAD INSTRUCTIONS:

Customers can obtain Installation Instructions for Infiniti or Nissan vehicles at www.Infiniti-Techinfo.com or www.Nissan-Techinfo.com respectively. From the home page, select Accessory Instructions. Select your Model, Model Year, and Accessory Type or search for your Model, and or Model Year, and or Accessory Type including Keyword or Part Number, then locate the Instructions for your accessory.

DEALER ASSIST DOWNLOAD INSTRUCTIONS:

Dealership technicians can locate the Installation Instructions for this accessory by scrolling to and select, 'Acc. Install Instructions' tab. Always download and use latest version of the Installation Instructions.

Installation Instructions Replacement Template 999V2 AW000 Rev. 07/12/15

APPLICATION:	ARMADA
PART NUMBER(S) REQUIRED FOR INSTALLATION:	Rear Seat Infotainment System - 999U8 39220

KIT CONTENTS:			
Item	Qty.	Part Description	Service Part Number
A	1	Rear Seat infotainment System - Driver Monitor	999U8 3922A
B	1	Rear Seat Infotainment System - Passenger Monitor	999U8 3922B
C	8	Monitor Screws	N/A
D	2	GMSL Cover	N/A
E	1	Customer Prepack	T98S3 5ZW0C
F	1	Remote Control	999S3 W7211
G	2	Wireless Headphones with Batteries	T98U8 5ZW0C
H	1	Quick Start Guide (English)	N/A
J	1	Quick Start Guide (French)	N/A
K	1	II Replacement Template	N/A

- Ratchet, 1/4" drive
- Socket, 10mm, 1/4" drive
- Torque Wrench, 1/4" drive
- Pliers, Wire Cutting
- Torx T-10 driver bit
- Philips screw driver
- Latch tool

Call VOXX Automotive Tech-line help at 866-869-7888 for any installation, repair, or warranty assistance.

INSTALLATION CAUTIONS:




CAUTION


- Dealer installation recommended. Instructions may refer to Service Manual.
- Please read this instruction carefully before installing this product for correct installation.
- Please **DO NOT** use or install the part in ways other than what is described.
- Always use floor, seat and steering wheel protection.
- Parts utilizing adhesion as method of attachment are to be installed at surface temperature of 15-38° C
- Apply masking tape as needed to protect areas that may be scratched or damaged by tools.
- Always remove vehicle parts in the sequence directed. Improper procedure can damage parts.
- Take care not to scratch or damage any component during the removal or re-installation process.
- Trim pieces found to have witness marks or broken clips **ARE NOT** to be reinstalled.
- Store removed parts in a safe manner.
- If a problem occurs during installation, please contact Nissan dealer where product was purchased.

SECTION 1 - OVERVIEW


1.1) SYSTEM

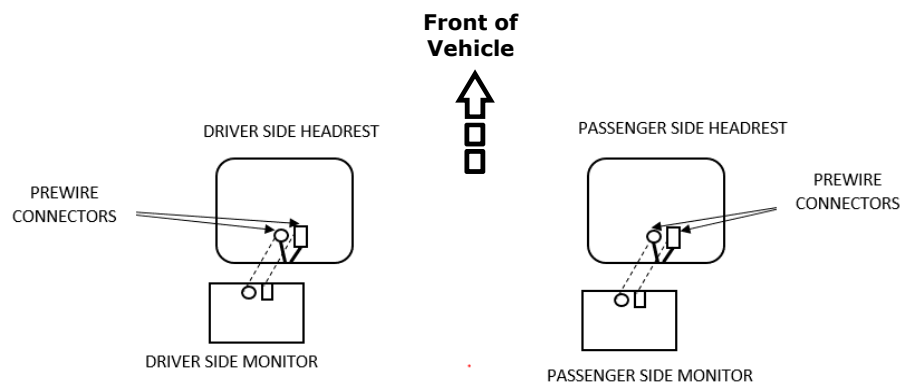

1.2) VEHICLE

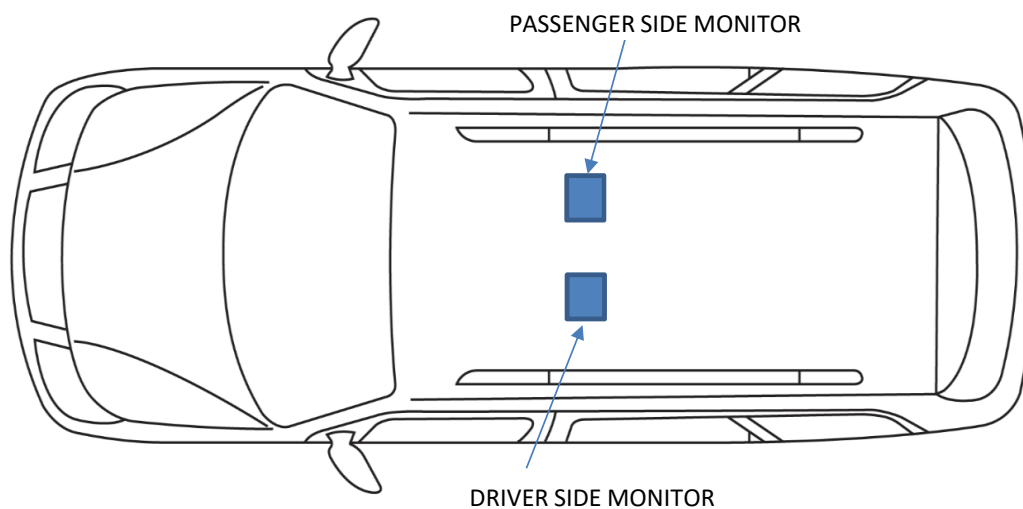

SECTION 2 - TRIM REMOVAL

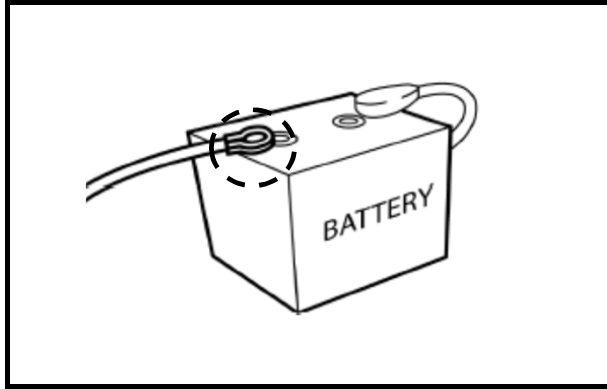


- 2.1) Disconnect battery terminal
- a) Locate negative battery terminal.
 - b) Loosen nut with 10mm socket.

Battery Terminal Nut



CAUTION

- Allow 3 min after key off with doors closed for vehicle power to time out.

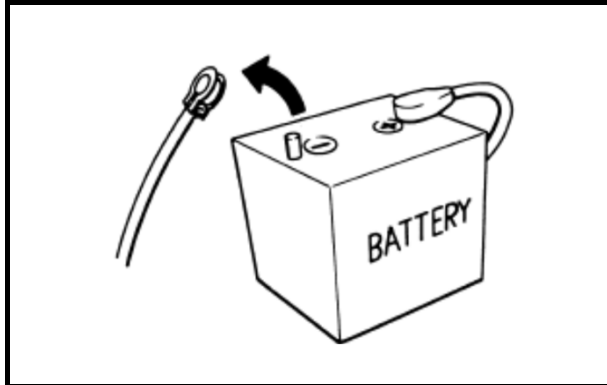


- 2.2) Disconnect battery terminal
- a) Lift negative battery terminal off stud.
 - b) Isolate negative battery terminal.

CAUTION

- Allow 3 min after negative terminal disconnect before separating any electrical connectors.

SECTION 3 - INSTALLATION PROCEDURE FOR DRIVER SIDE

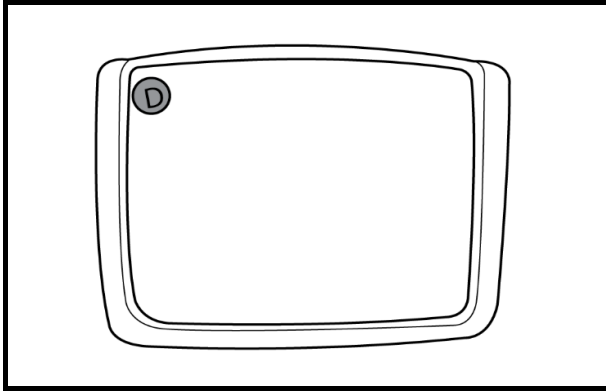


3.1) Locate Driver side RSI monitor

- a) Locate Driver side monitor assembly by looking at label "D" on top left corner of monitor.


CAUTION

Passenger side RSI monitor will have "P" label on top left corner.

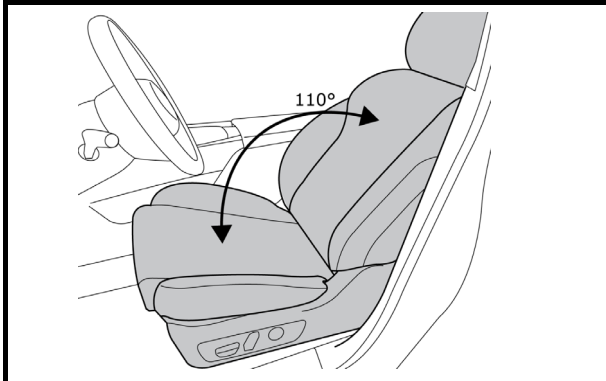

3.2) Tilt Seat


- a) Tilt seat to 110 degree for making proper connections with the monitor prewire.

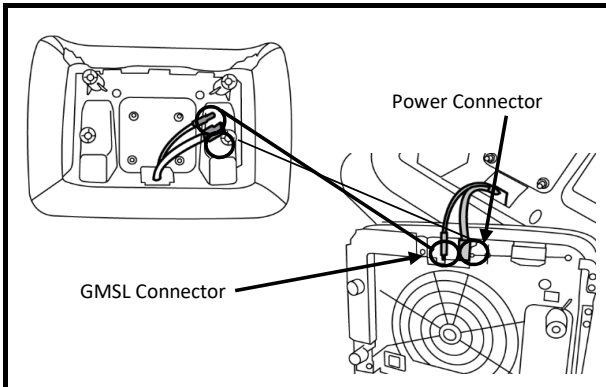

3.3) Connect Prewire


- a) Flip Monitor and align bottom of monitor with bottom opening in headrest shroud.
- b) Connect both power and GMSL connectors to monitor.

SECTION 3 - INSTALLATION PROCEDURE FOR DRIVER SIDE

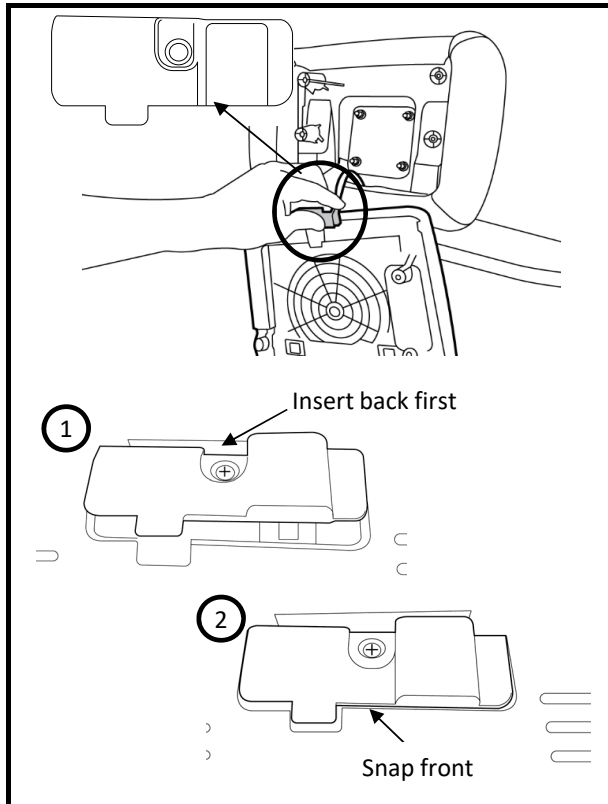


3.4) Install GMSL cover

- Slide GMSL Cover (D) on connectors.
- Insert GMSL cover back first as shown in image "1".
- Snap front of GMSL cover as shown in image "2".
- Secure GMSL cover screw using Torx T-10 with Max. torque of 2.5 inch/lb.

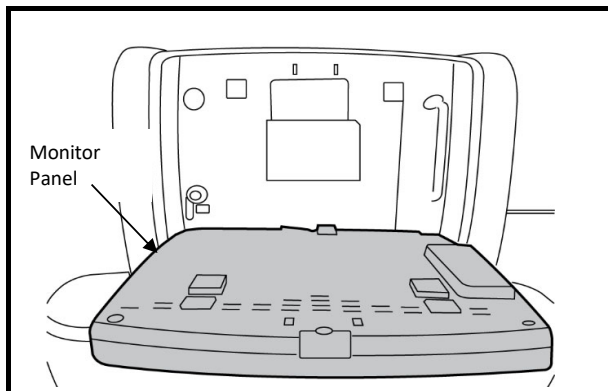

3.5) Install Driver monitor

- Place monitor assembly into headrest shroud, tucking cables into recessed area behind monitor.
- Open monitor panel fully towards rear of vehicle while holding assembly in place.

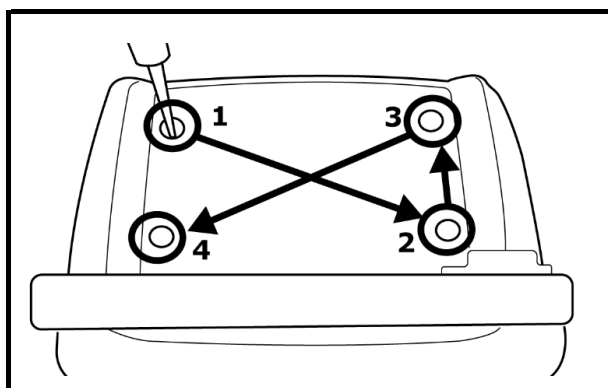

3.6) Install Driver Monitor

- Secure Monitor with shroud using 4 screw (C) with force of 10-12 in lbs.


Screws (C)



CAUTION


Insert screws in same order as shown in picture.

SECTION 3 - INSTALLATION PROCEDURE FOR PASSENGER SIDE

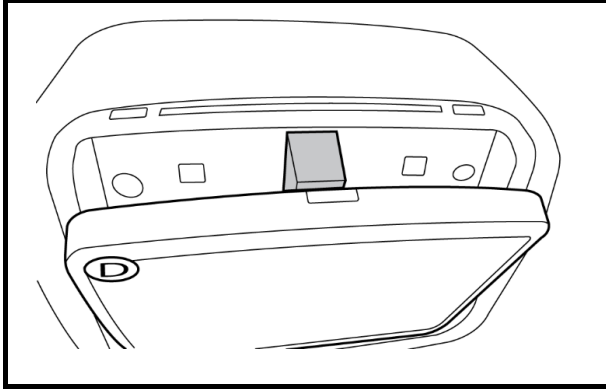


3.7) Install Driver Monitor

- a) Place wedge/Foam in between hooks behind panel and close panel fully against the wedge.
- b) This will ensure stop pins have cleared plastics and pad to allow for full engagement in next step.

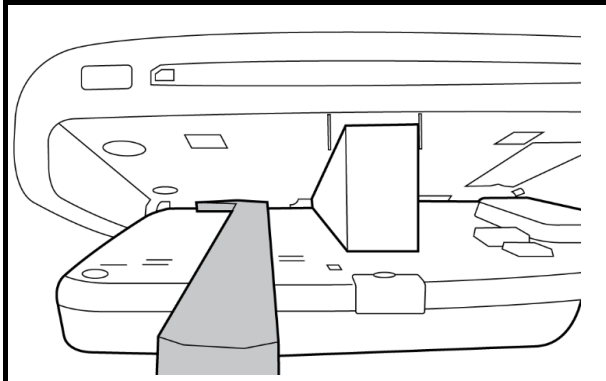


3.8) Install Driver Monitor

- a) Use latch tool to push stop pins into full locking position.
- b) Remove wedge/Foam and fully close monitor

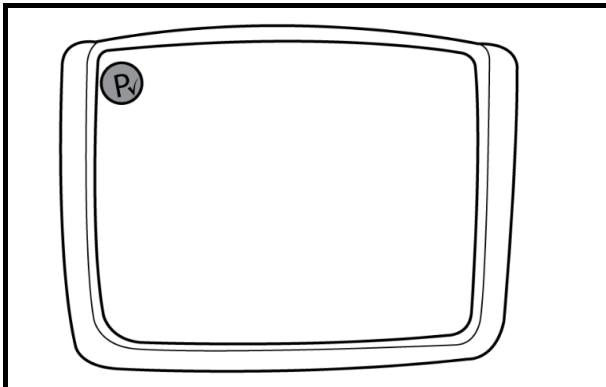

3.9) Install Passenger monitor

- a) Locate passenger side monitor assmeby by looking at lable "P" on top left corner of monitor.
- b) Repeat steps 3.2- 3.8 for passenger side to install monitor.

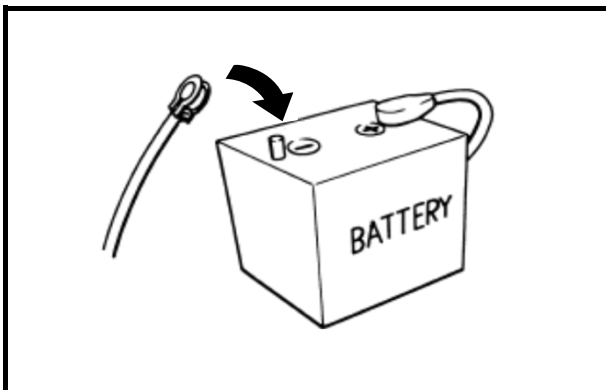

3.10) Electrical function check

- a) Re-connect negative battery cable.

SECTION 3 - INSTALLATION PROCEDURE

3.11) Electrical Function Check

Steps	Function checks	Look For
1	Turn Ignition ON	The LED of power button of both monitors should illuminate.
2	Wait 12 seconds, Press power button on each monitor, located on top right corner of monitor.	Both Monitors should turn ON, Showing the Nissan splash screen. After about 30 seconds, the Home screen will be shown on both monitors, showing a red background and menu on the left side of the screen
3	Insert USB stick into monitor A (Driver)	Wait for USB to load, Loading screen will disappear once USB stick is loaded and default screen to "Source" screen.
4	Press "A" button on remote control while pointing at Driver Side Monitor and then Press ">" button .	Screen will display "USB" once engaged.
5	Press "✓" to access USB content	Screen will show videos
6	Press ">" button to access Videos	Screen will highlight video/movie. Press "✓" button on Remote control to play movie.
7	Turn ON the Headphones and set them on channel A	The audio coming from Monitor A must be heard through the headphones.
8	Press "B" button on Remote control while pointing at passenger side monitor.(keep USB in Driver side monitor)	Passenger side monitor will default to "Source" screen. Follow same procedure as driver side to play video. (step 4-6)
9	Turn ON the Headphones and set them on channel B	The audio coming from Monitor B must be heard through the headphones.
10	Press "A" button on remote control. Then press "⬆" button.	Monitor A should exit the USB source and go to "Home" screen, again showing red background and menu on the left side of screen.
11	Press "B" button on remote control. Then press "⬆" button.	Monitor B should exit the USB source and go to "Home" screen, again showing red background and menu on the left side of screen.

3.12) Electrical function check

- a) If NG, Check harness routing and connections.

CAUTION

Take care not to scratch or damage any component during the removal or re-installation process. Trim pieces found to have witness marks or broken clips should be replaced with new parts.


4.1) Complete checklist:

- ☐ Tighten battery terminal nut to 5 N-m.
- ☐ Verify all windows and sunroof (if equipped), one touch operation and perform the reset procedure if necessary. Refer to the vehicle Service Manual for more details.
- ☐ Re-program radio presets and other vehicle settings to the recorded settings if necessary.
- ☐ Remove all tools, and other debris from interior of vehicle.
- ☐ Verify vehicle headliner, seat, steering wheel, center console, carpet, etc. are not soiled.
- ☐ Verify interior and exterior are not damaged.
- ☐ Verify RSI monitor is locked not tilted.
- ☐ Place "Customer prepack" box in center console.


A.1) Figure below applies to RR Seat Entertainment System

NISSAN QX80 REAR SEAT ENTERTAINMENT SYSTEM BLOCK DIAGRAM

— COAX CABLE
— POWER CABLE

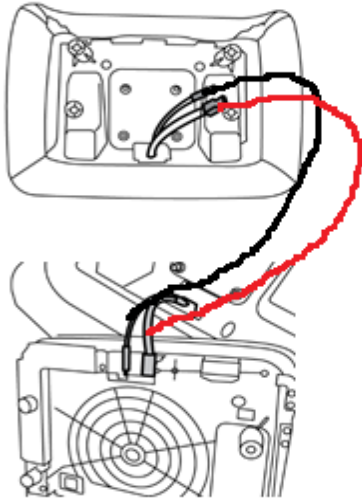

DRIVER SIDE MONITOR

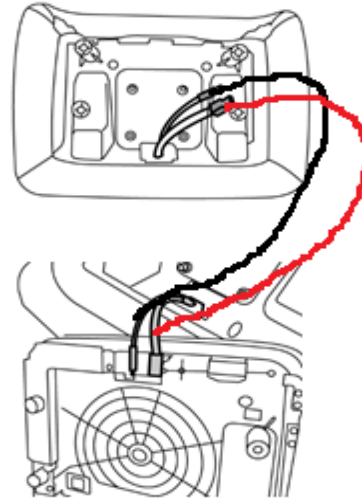

PASSENGER SIDE MONITOR