


TS TERMINAL CIRCUIT

CIRCUIT DESCRIPTION


After making short circuit between terminal Ts and CG of DLC3 with the ignition switch turned OFF, the mode will change from normal mode to test mode when the ignition switch is turned ON. After the ignition switch is turned ON, there will be DTC output from TEM terminal of DLC3.

WIRING DIAGRAM

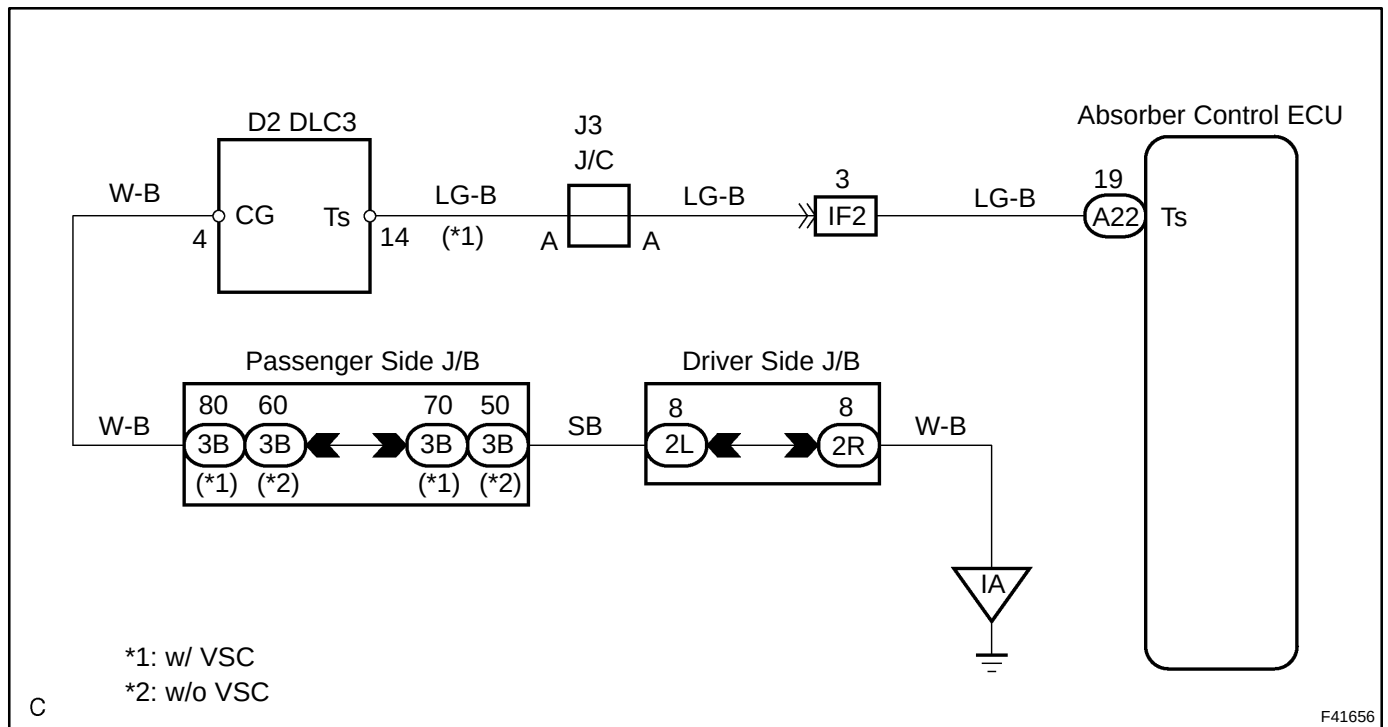

INSPECTION PROCEDURE

1 INSPECT DLC3 TERMINAL VOLTAGE(Ts TERMINAL)

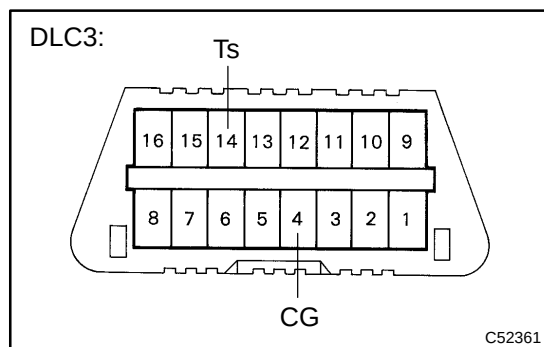

- (a) Turn the ignition switch to ON.
- (b) Measure voltage between terminals Ts and CG of DLC3.

OK:

Voltage: 10 - 14 V

OK

Go to step 3

NG

2 CHECK HARNESS AND CONNECTOR(DLC3 - BODY GROUND)

- (a) Check for open and short circuit in harness and connector between terminal CG of DLC3 and body ground (See page [01-31](#)).

NG

REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

3 CHECK HARNESS AND CONNECTOR(DLC3 - ABSORBER CONTROL ECU)

- (a) Check for open and short circuit in harness and connector between terminal Ts of DLC3 and absorber control ECU (See page [01-31](#)).

NG

REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

CHECK AND REPLACE ABSORBER CONTROL ECU(See page [01-31](#))