

ACCELERATOR CONTROL, FUEL & EXHAUST SYSTEMS

SECTION **FE**

MODIFICATION NOTICE:

- For CD engine, the accelerator control system has been changed.
- For SR engine, the exhaust system has been changed.


CONTENTS

FE

ACCELERATOR CONTROL SYSTEM	2	EXHAUST SYSTEM	3
----------------------------------	---	----------------------	---

ACCELERATOR CONTROL SYSTEM

CD engine models
SEC. 180

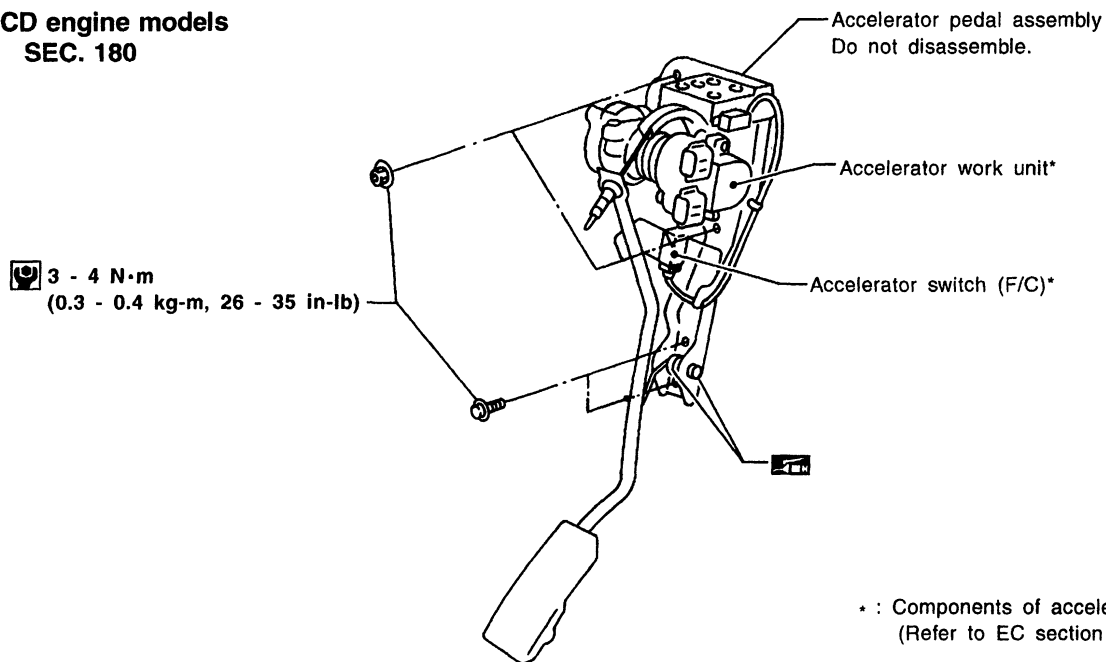


SFE435A

CAUTION:

- After reconnecting accelerator work unit harness connector (if previously removed), perform the following procedures:
 - ① Select "OFF ACCEL PO SIG" in "ACTIVE TEST" mode. Touch CLEAR.
 - ⌚ Start and warm up engine. After engine has warmed up, idle for 10 minutes.
- If MIL illuminates after engine has started, refer to "ON BOARD DIAGNOSTIC SYSTEM DESCRIPTION" in EC section for instructions.

EXHAUST SYSTEM

SR engine models
SEC. 200•208

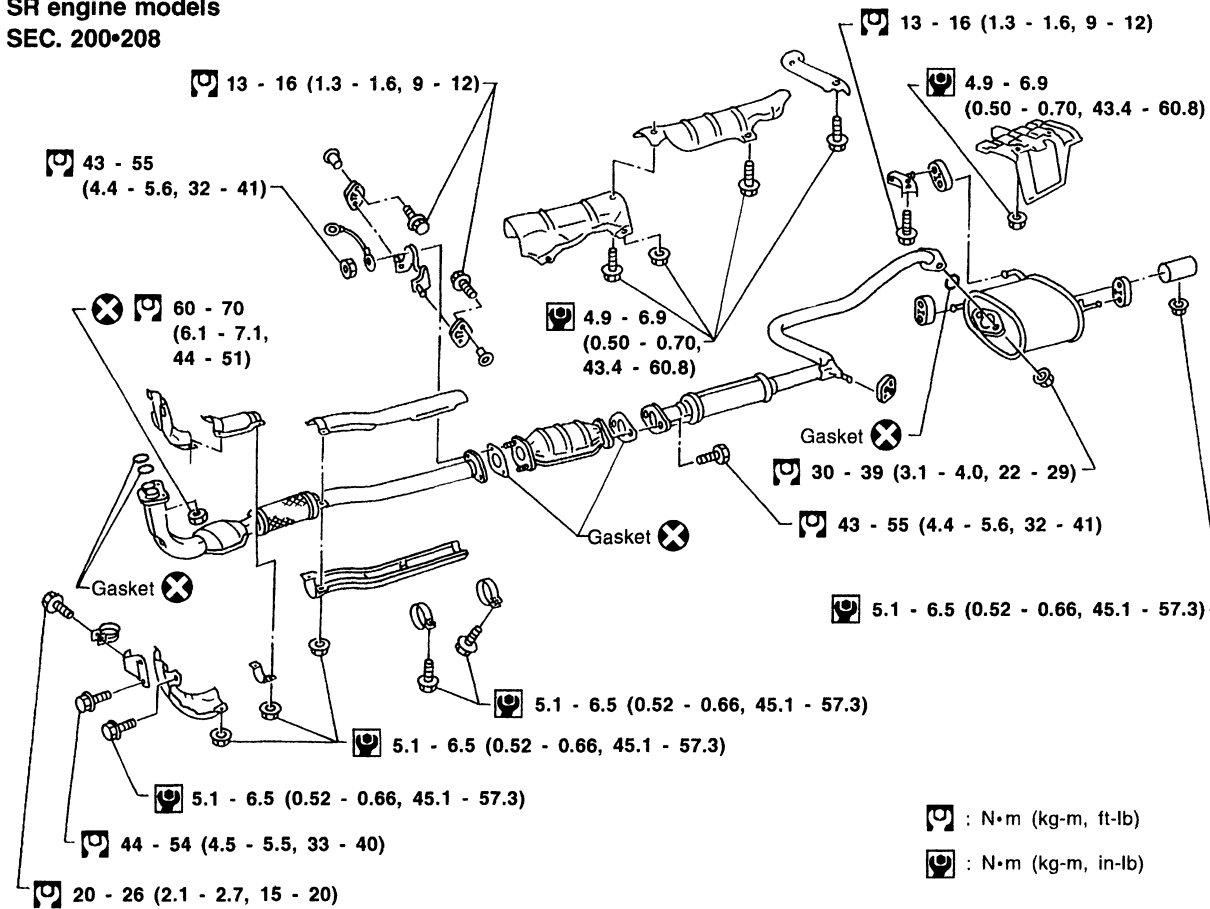

FE

SFE433A