



16. Glove Box

A: REMOVAL


- 1) Disconnect the ground cable from the battery.
- 2) Remove the glove box damper.

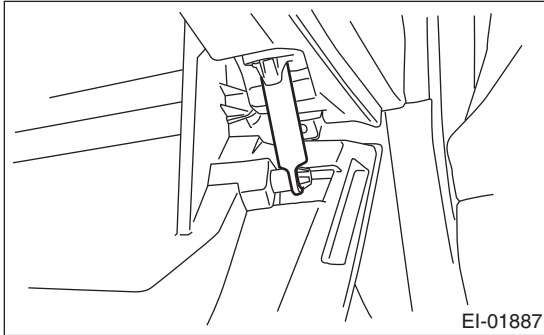

- 3) Disengage the stopper and pull the glove box lid assembly towards yourself to remove it.

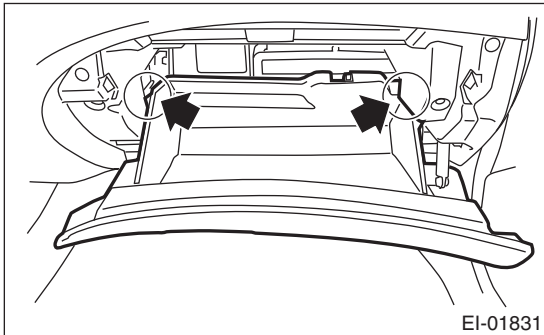

- 4) Remove the clips, and remove the glove box lower cover.

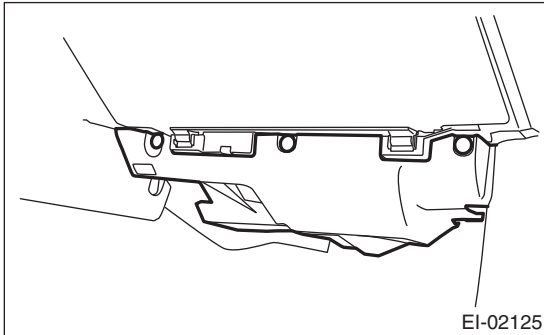

- 5) Remove the instrument panel lower cover. <Ref. to EI-49, INSTRUMENT PANEL LOWER, REMOVAL, Center Console.>

B: INSTALLATION

Install in the reverse order of removal.