



17. Console Box

A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the parking brake lever boot.

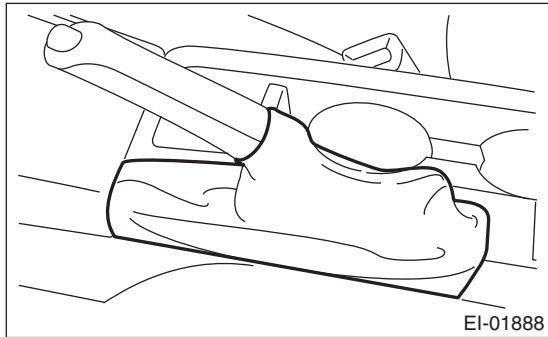

- 3) Remove bolts (A), screw (B), and clips (C).

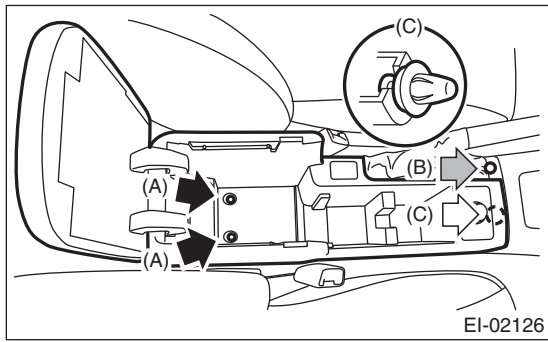

- 4) Disconnect the connectors and remove the console box.

B: INSTALLATION

Install in the reverse order of removal.