


2. Front Grille

A: REMOVAL

- 1) Remove the front bumper face. <Ref. to EI-28, FRONT BUMPER FACE, REMOVAL, Front Bumper.>
- 2) Remove the screws (A) from the backside of the bumper face.
- 3) Detach the tabs (B) and remove the front grille assembly.

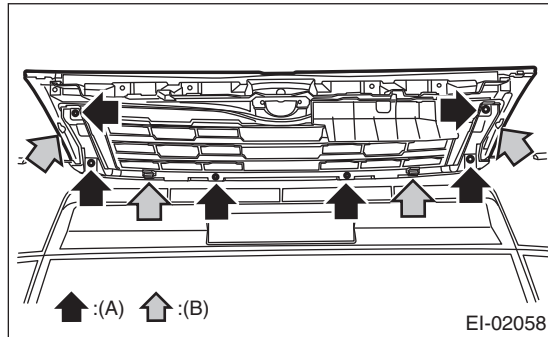

B: INSTALLATION

Install in the reverse order of removal.