



26.Rear Gate Trim

A: REMOVAL


- 1) Remove the high-mounted stop light. <Ref. to LI-33, REMOVAL, High-mounted Stop Light.>
- 2) Remove the clips, and remove the rear gate upper trim.

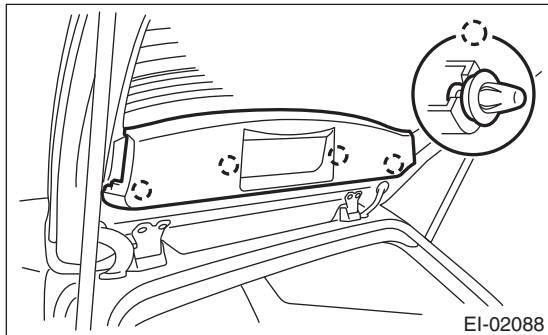


- 3) Using a plastic clip remover, disengage the trim tabs and remove the rear gate pillar trim.

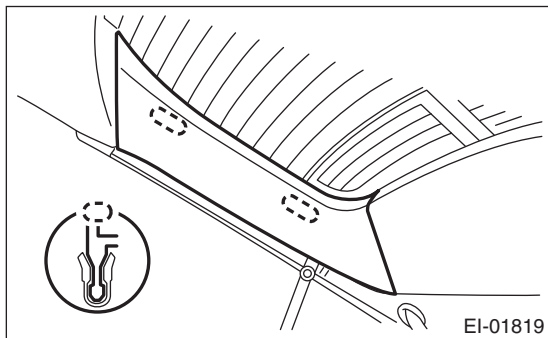

- 4) Remove the clips and the handle screws.

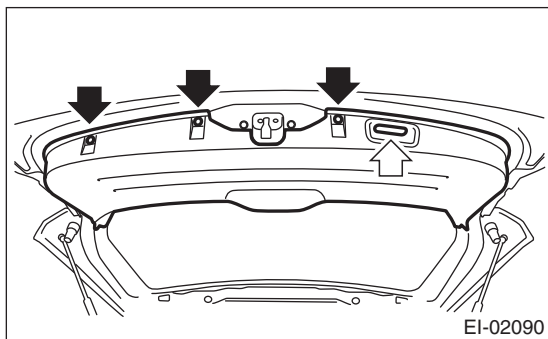

- 5) Remove the clips and rear gate lower trim.

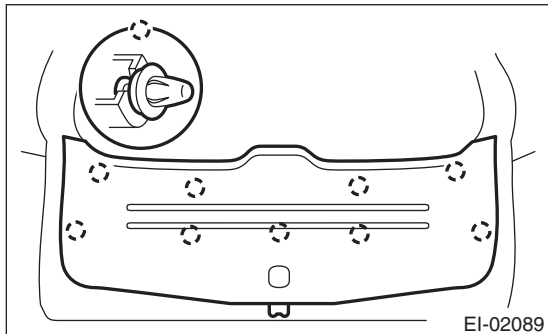

B: INSTALLATION

Install in the reverse order of removal.