



### 28.Rear Gate Garnish

#### A: REMOVAL

- 1) Remove the rear gate trim. <Ref. to EI-60, REMOVAL, Rear Gate Trim.>
- 2) Remove the rear wiper motor. <Ref. to WW-20, Rear Wiper Motor.>
- 3) Disconnect the connectors (white arrows).
- 4) Remove the nuts (black and gray arrows).

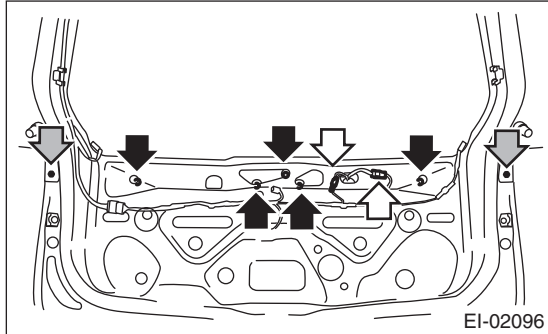

- 5) Remove the clips and rear gate garnish.

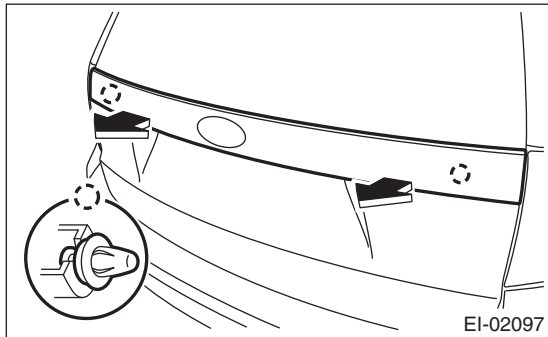

#### B: INSTALLATION

##### CAUTION:

Make sure that the harness grommets are installed securely.

Failure to install securely may result in water leaks inside.

Install in the reverse order of removal.

##### *Tightening torque*

**7.5 N·m (0.76 kgf-m, 5.5 ft-lb)**