


6. Mud Guard

A: REMOVAL


1. FRONT MUD GUARD

- 1) Jack-up the vehicle.
- 2) Remove the front wheels.
- 3) Remove the clips, then remove the mud guard.

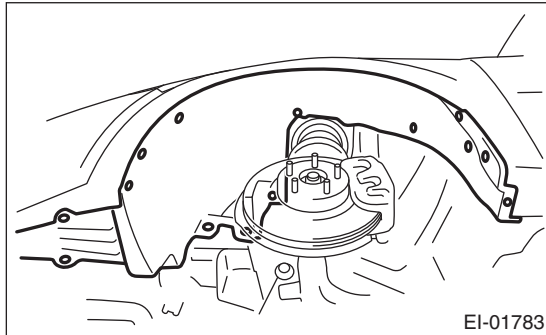

2. REAR MUD GUARD

- 1) Jack-up the vehicle.
- 2) Remove the rear wheels.
- 3) Remove the clips and screw (RH one location), and remove the mud guard.

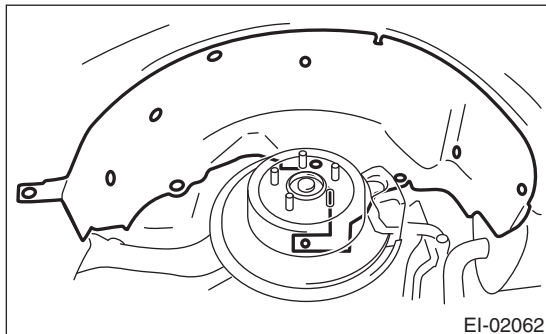

B: INSTALLATION

Install in the reverse order of removal.