



9. Cowl Panel

A: REMOVAL


- 1) Open the front hood.
- 2) Remove the wiper arm. <Ref. to WW-15, REMOVAL, Front Wiper Arm.>
- 3) Detach the tabs and remove the cowl panel, side.

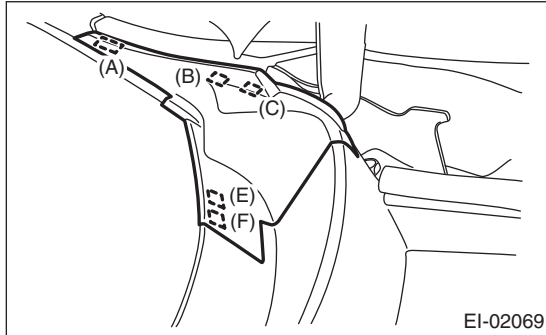

- (1) Detach tabs (A), (B), and (C) from the vehicle exterior.
- (2) Detach tabs (E) and (F).
- 4) Pull out and disconnect the washer hose.

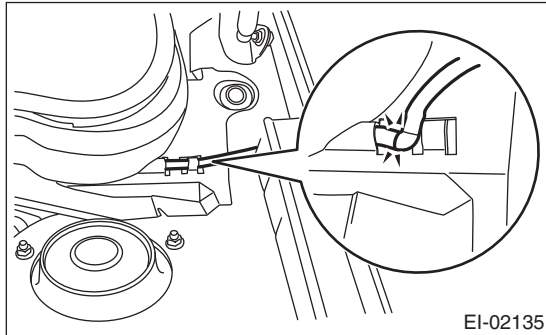


- 5) Remove clips (A) and (B), and remove the cowl panel.

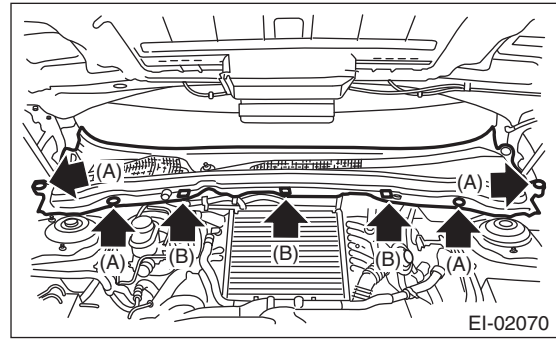

CAUTION:

Press on the clip tabs from the left and right when removing clips (B).
Do not pull forcibly on the clips to prevent damaging them.

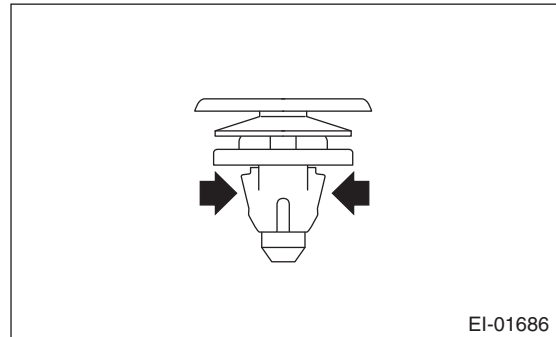


B: INSTALLATION

Install in the reverse order of removal.

NOTE:

Hook the cowl panel tabs along the bottom edge of the wind shield.

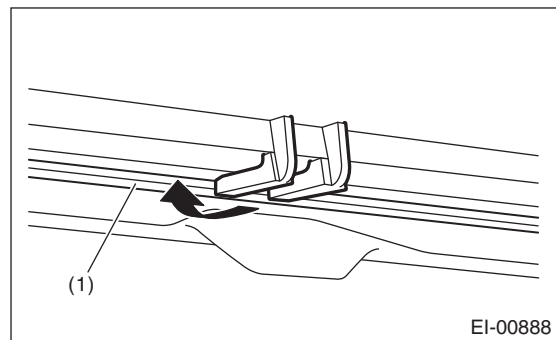

- (1) Wind shield cross-section