
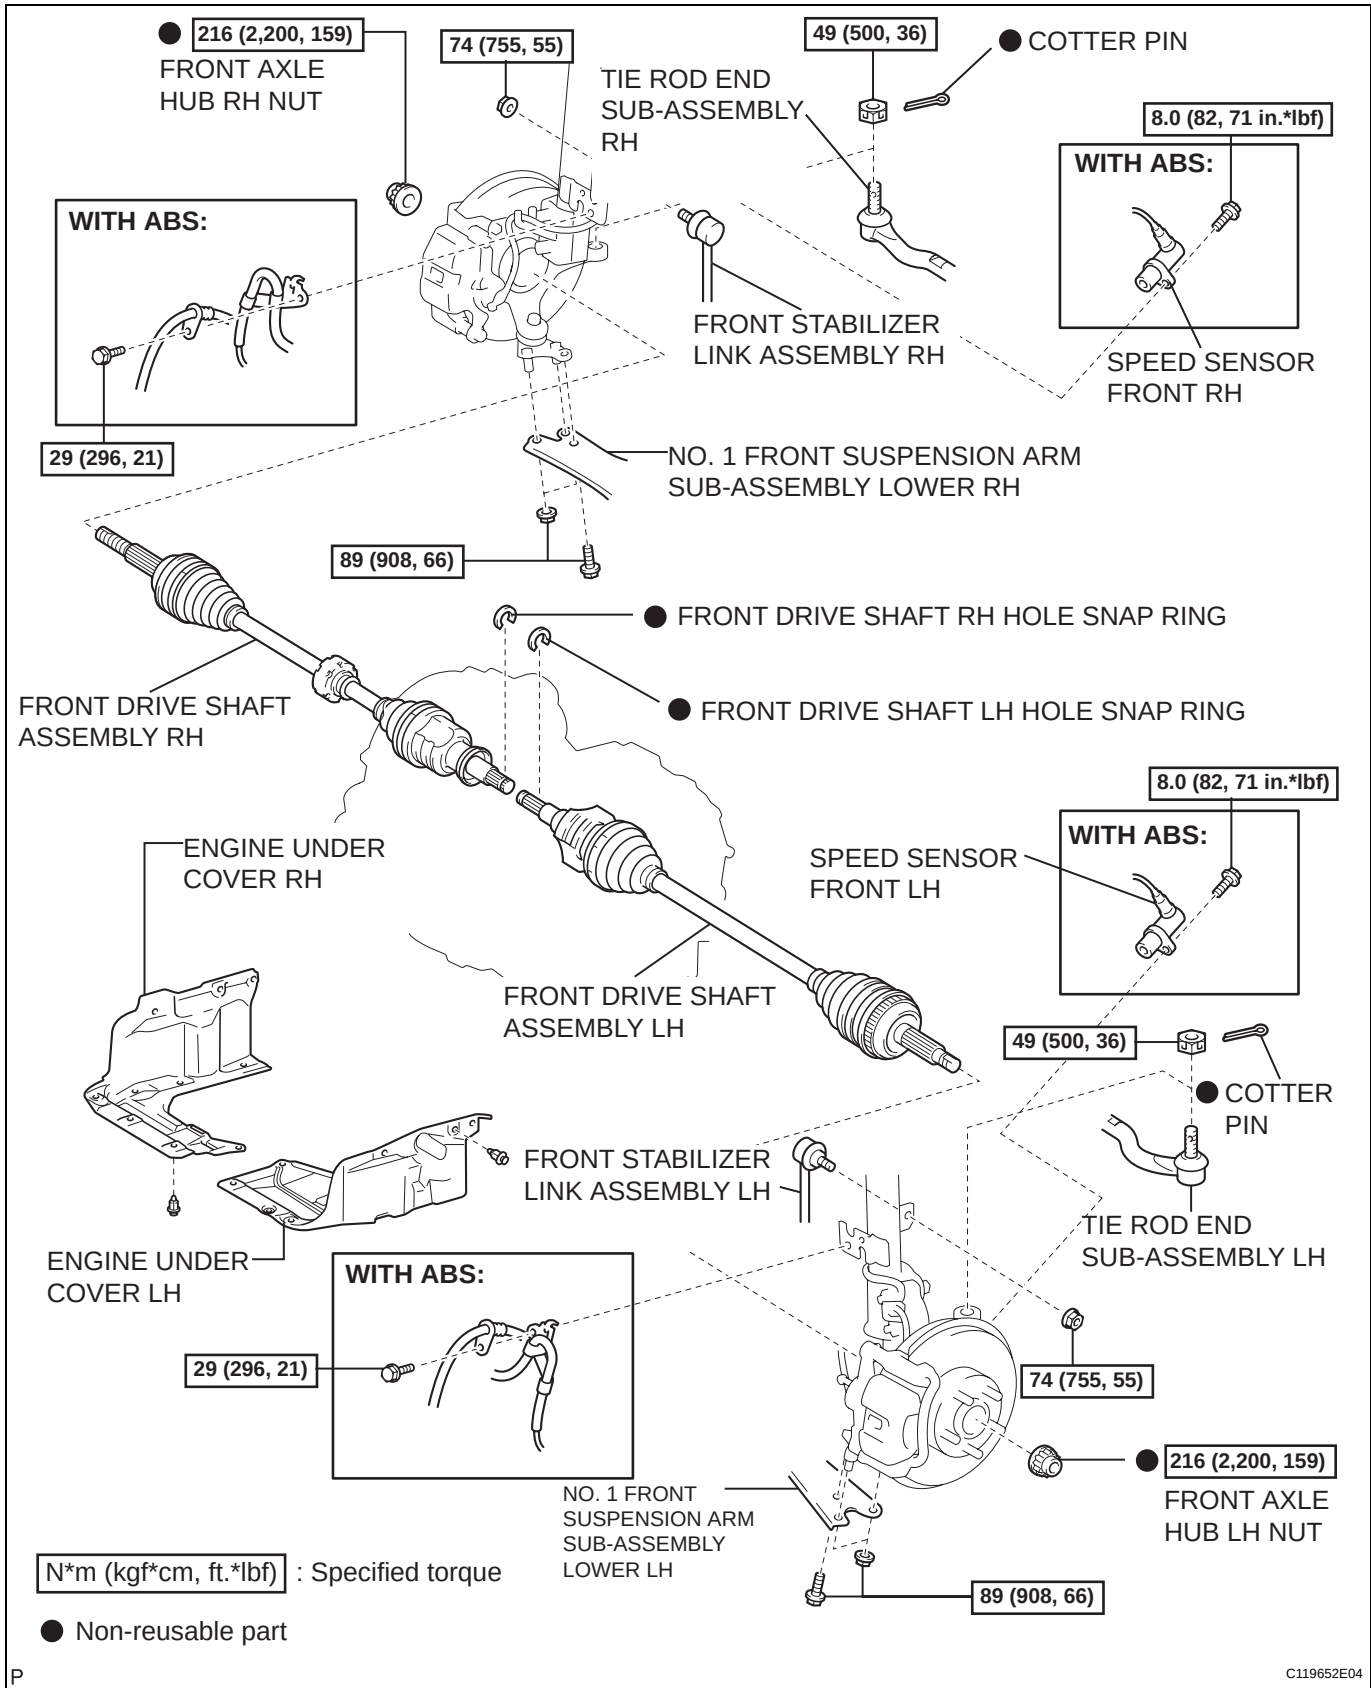



FRONT DRIVE SHAFT

COMPONENTS



ENGINE UNDER
COVER RH

ENGINE UNDER COVER LH



WITH ABS:

8.0 (82, 71 in.*lbf)

SPEED SENSOR FRONT LH

FRONT STABILIZER LINK ASSEMBLY LH

WITH ABS:

29 (296, 21)

49 (500, 36)



COTTER PIN

TIE ROD END
SUB-ASSEMBLY LH

74 (755, 55)

216 (2,200, 159)

FRONT AXLE HUB LH NUT

FRONT SUSPENSION ARM
SUB-ASSEMBLY NO. 1 LH

89 (908, 66)

N*m (kgf*cm, ft.*lbf) : Specified torque

● Non-reusable part

P

C119482E01

