


6. Subaru Select Monitor

A: OPERATION

- 1) Prepare the Subaru Select Monitor kit.

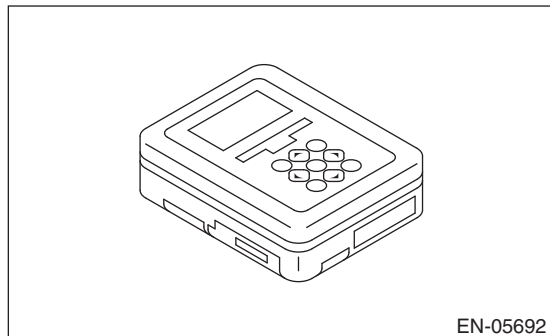


- 2) Prepare PC with Subaru Select Monitor installed.
- 3) Connect the SDI (Subaru Diagnostic Interface) to the PC USB port (exclusively for Subaru Selector Monitor) using a USB cable.

NOTE:

Port exclusively for Subaru Select Monitor refers to the USB port used when installing Subaru Select Monitor.

- 4) Connect the diagnosis cable to SDI.
- 5) Connect the SDI to data link connector located in the lower portion of the instrument panel (on the driver's side).

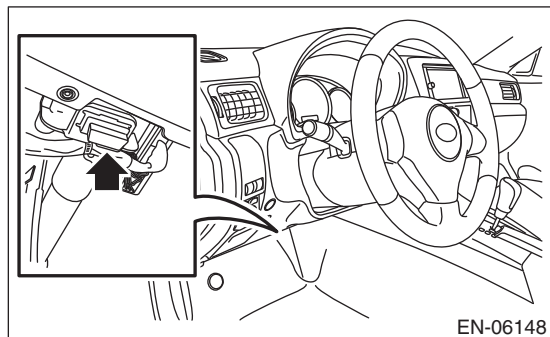

CAUTION:

Do not connect the scan tools other than the Subaru Select Monitor.

- 6) Start the PC.
- 7) Turn the ignition switch to ON.
- 8) Run the "PC application for Subaru Select Monitor".