

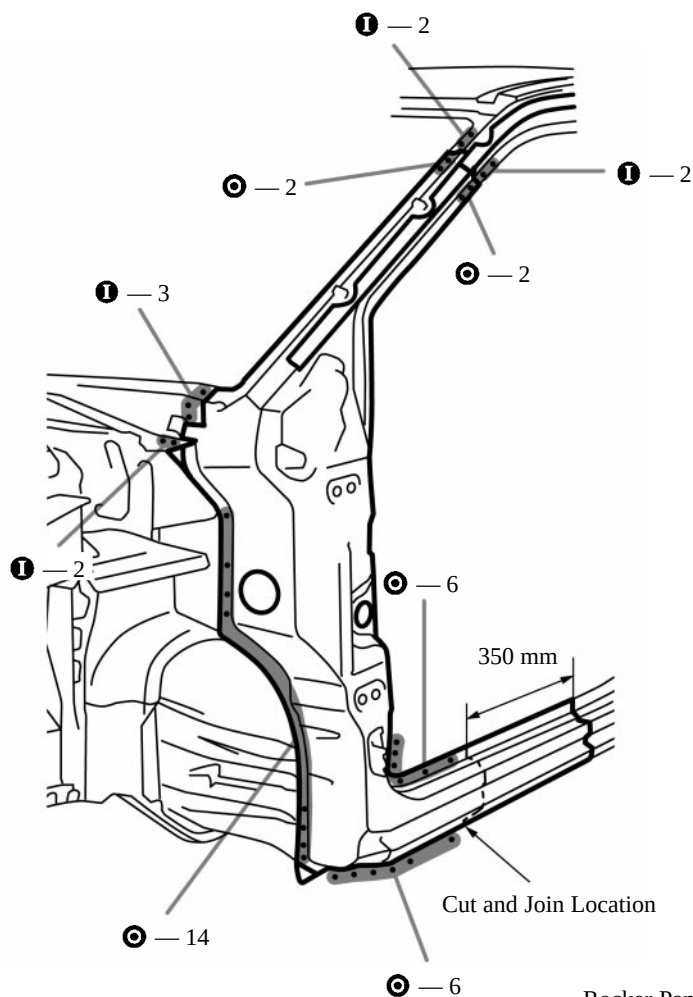


FRONT BODY PILLAR (CUT)



REMOVAL (With the cowl top side inner panel removed.)

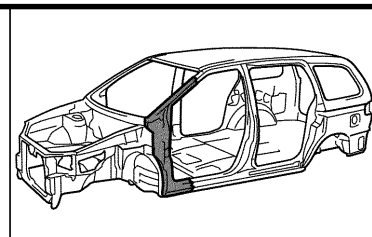

[Cut and Join Locations]






Rocker Panel No.3 Reinforcement

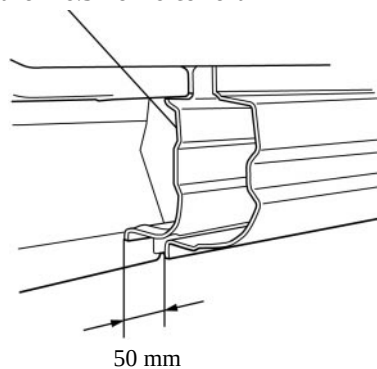


mm	in.
50	1.97
130	5.12
350	13.78

1. Cut and join the parts at the locations as shown above.
2. Shift the each cut and join locations of the outer pillar, reinforcement, inner pillar and roof drip channel.
3. Shift the each cut and join locations of the outer panel, rocker panel No.3 reinforcement.

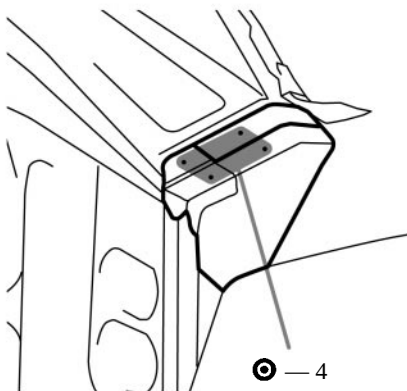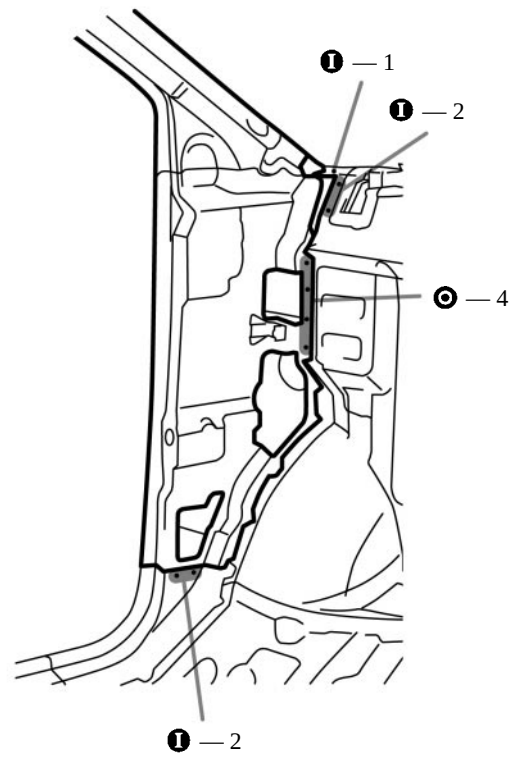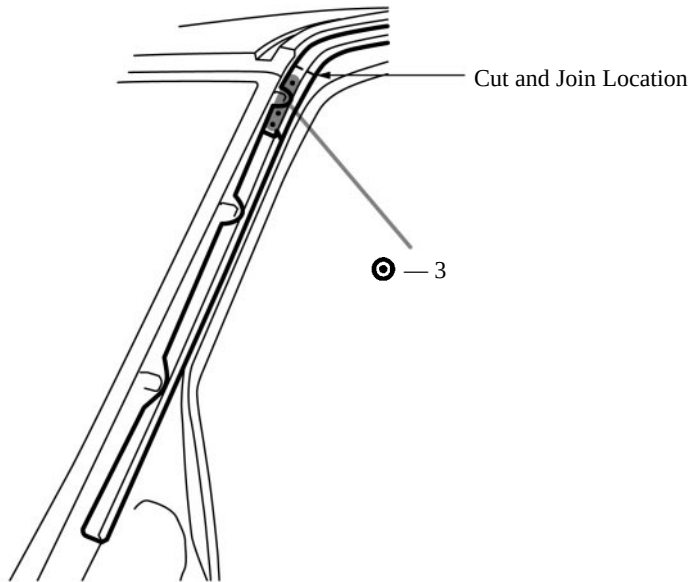


INSTALLATION

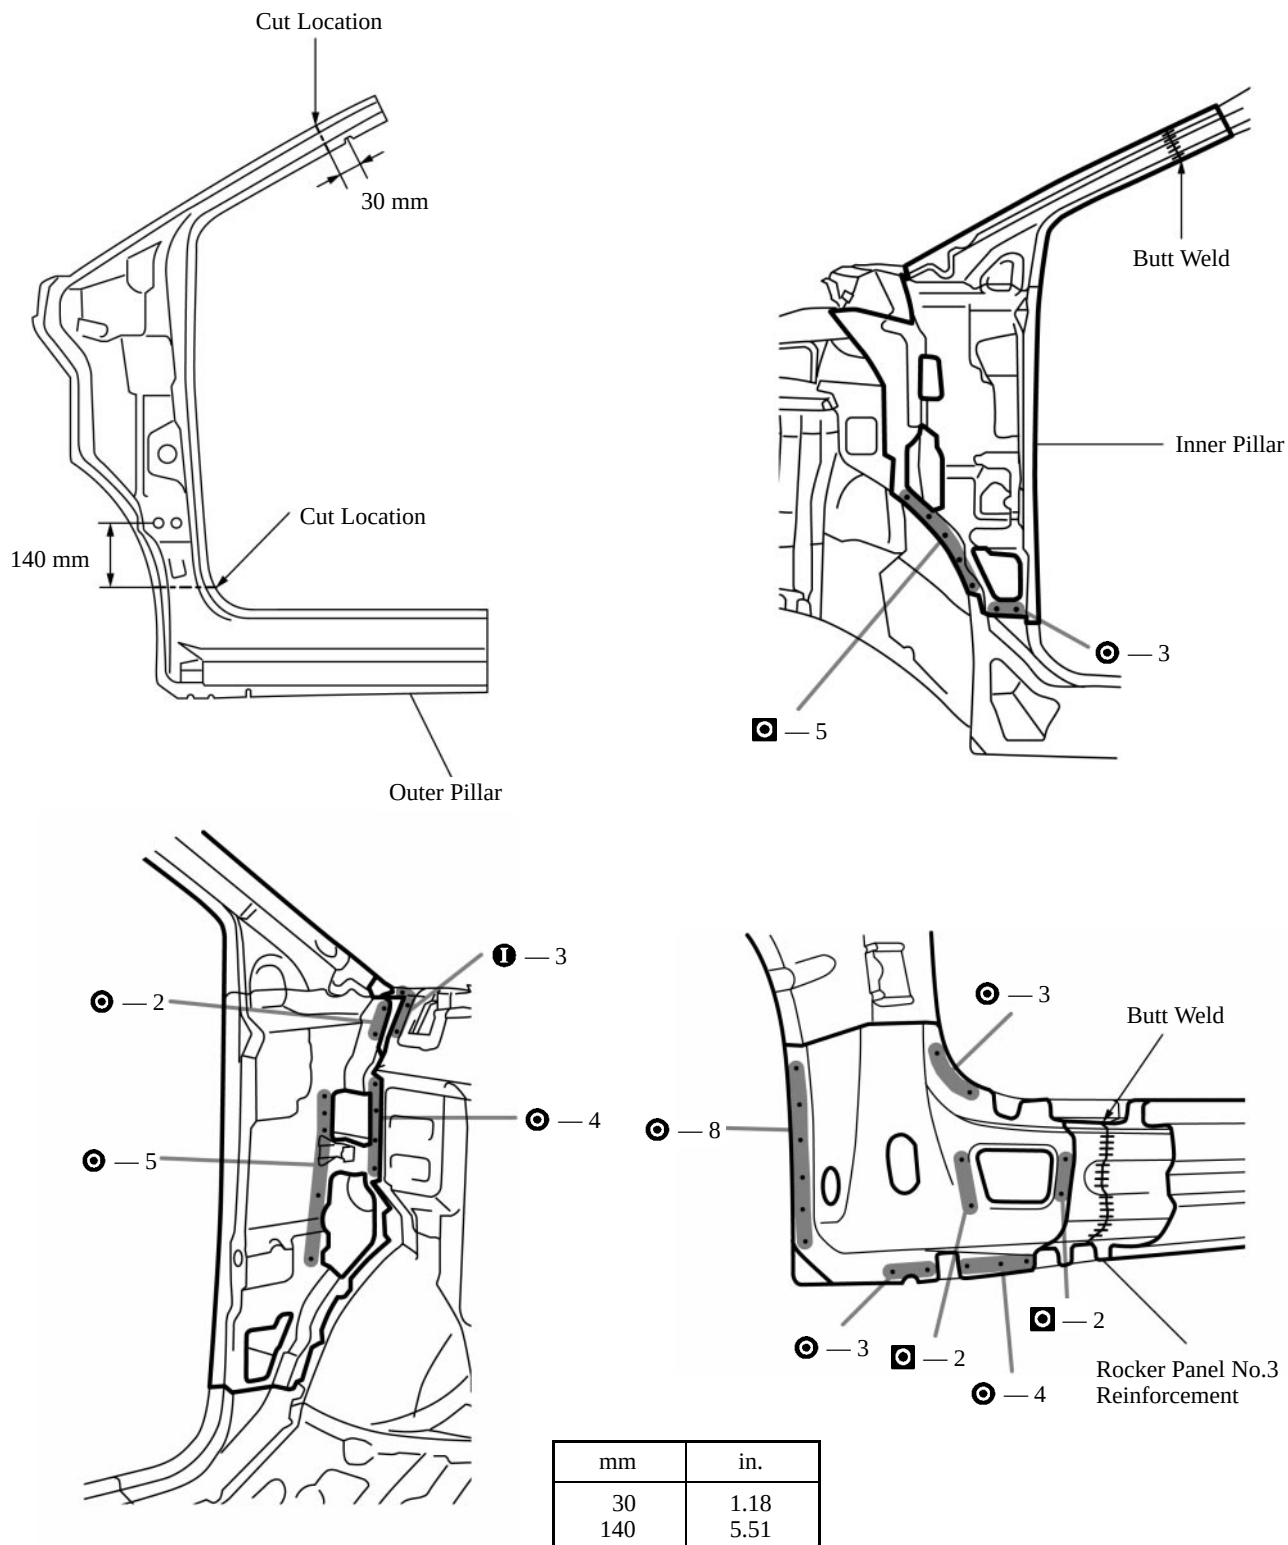

1. Cut the new parts for the outer pillar at the shown above.

HINT: After butt welding the rocker panel No.3 reinforcement and front body pillar reinforcement attach it to the upper and lower area of the outer pillar.

2. Temporarily install the new parts and measure each part in accordance with the body dimension diagram.

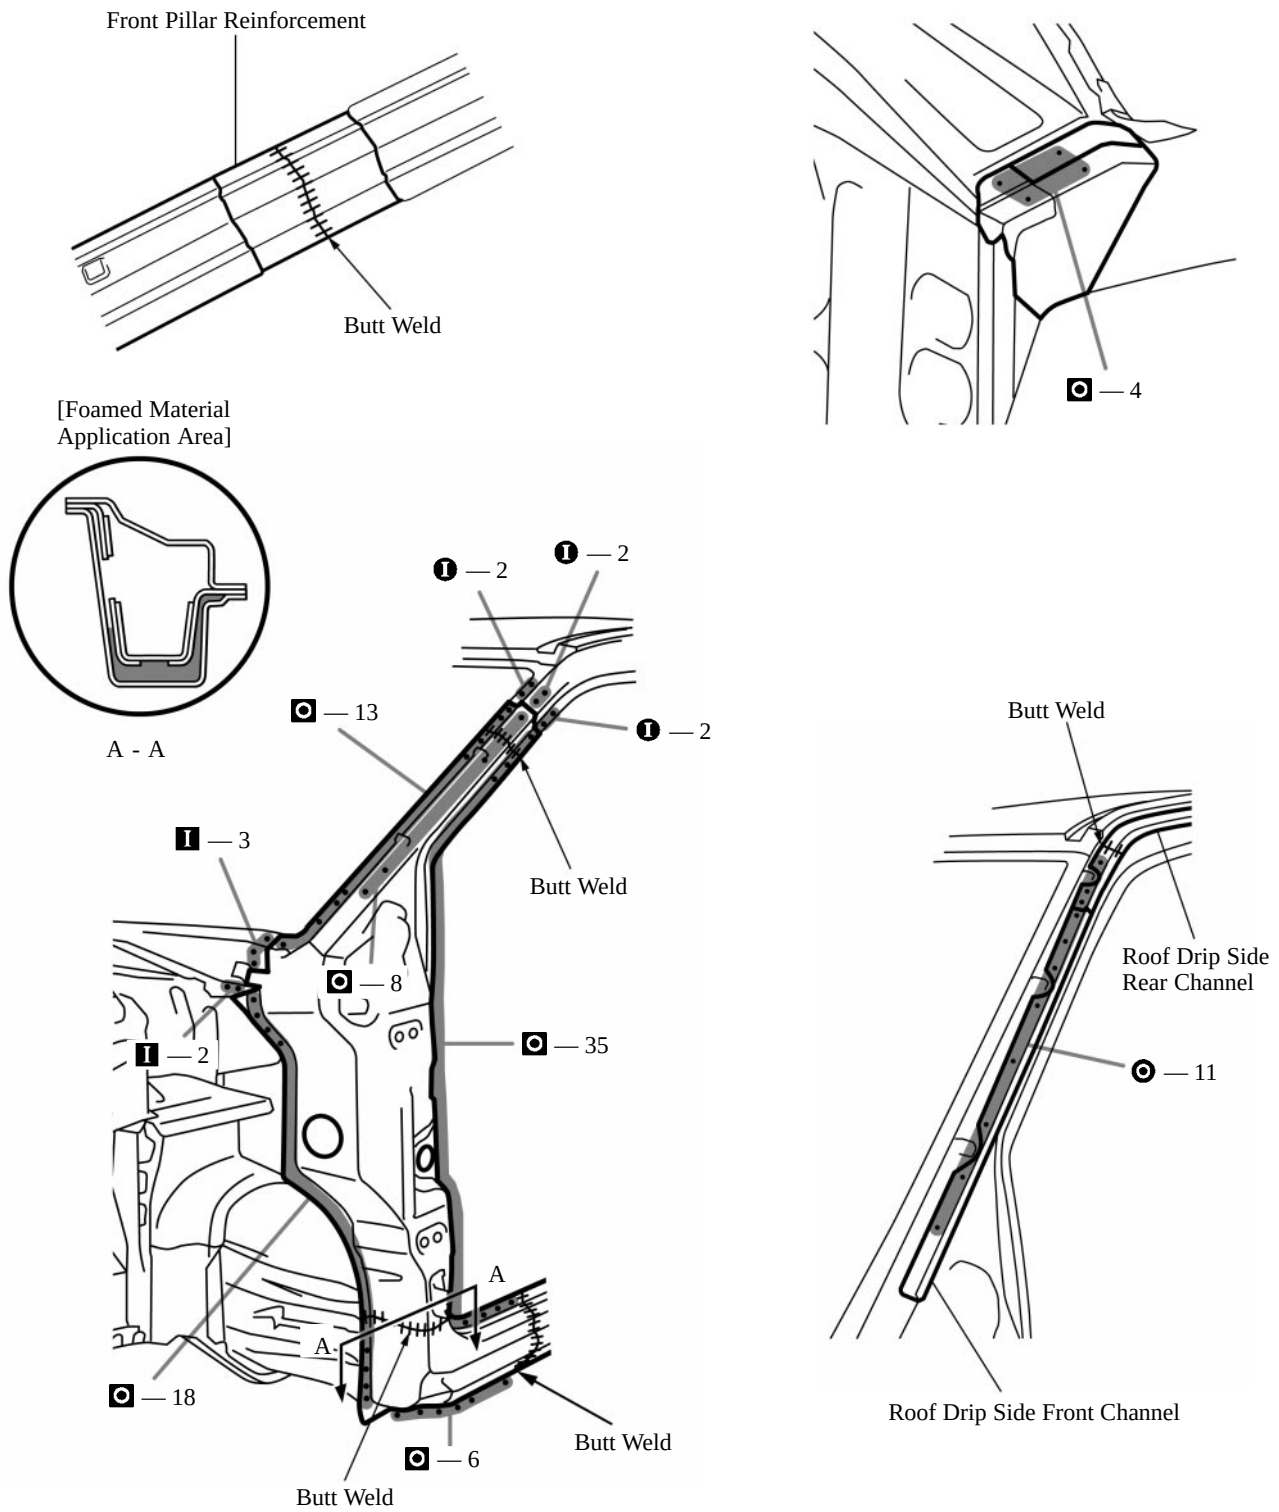

3. Before welding the new parts, check the fit of the front door, front fender and windshield glass.
4. After installing the new parts, apply foamed material.