


## CHAPTER NINE BODY DIMENSION


Dimension of the beam:

Unit: mm

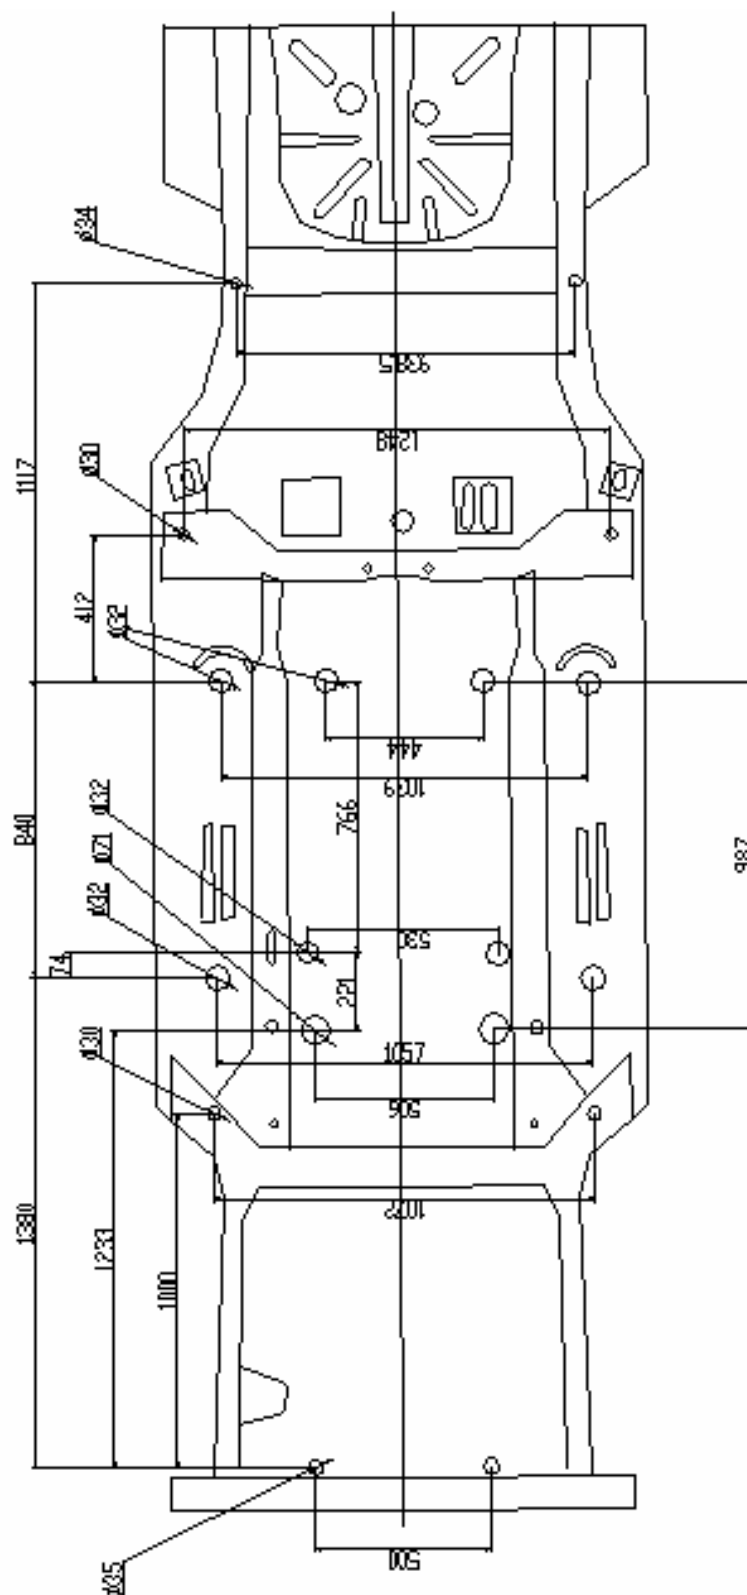


## Assembly dimension of the body


### Side view

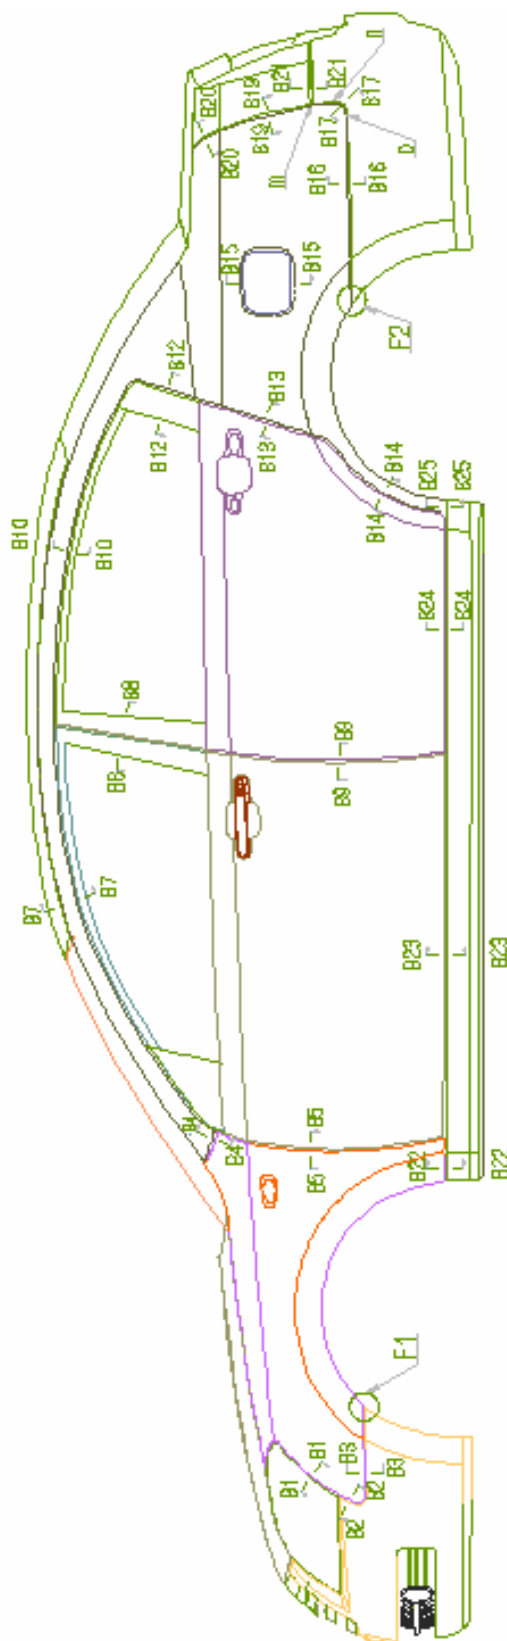


The clearance between the front fender and the headlamp at B1-B1:  $1.5 \pm 1$

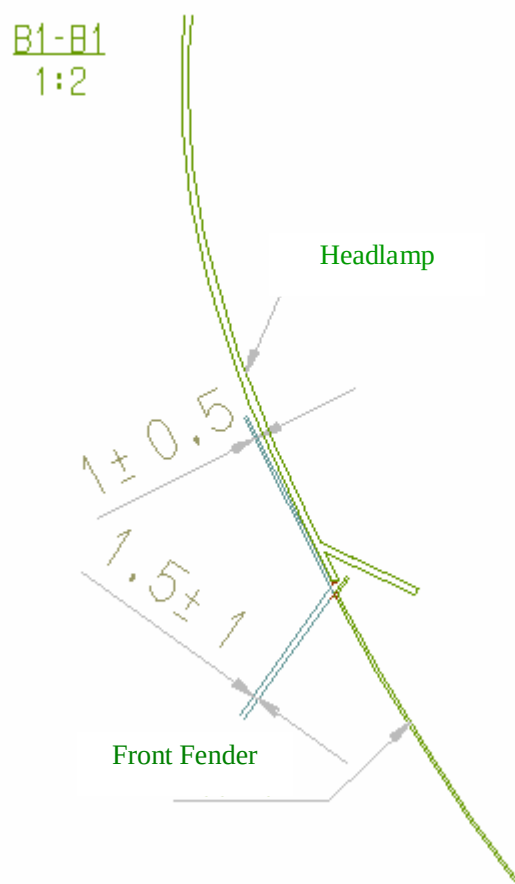

The clearance between the front fender and the front bumper at B2-B2:  $0^{+1}_{-0}$

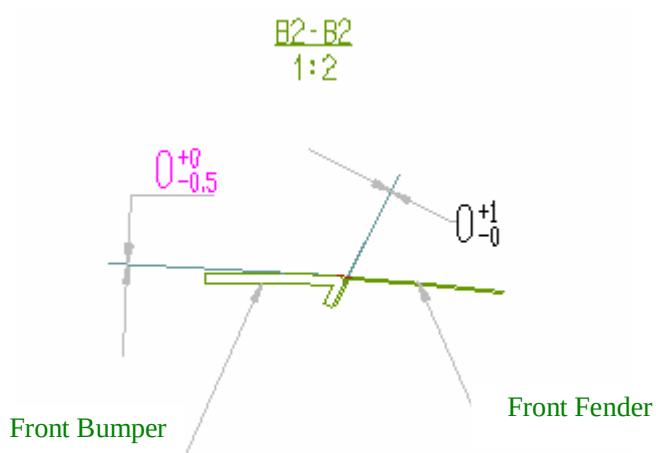


The clearance between the front fender and the front bumper at B3-B3:  $0^{+1}_{-0}$

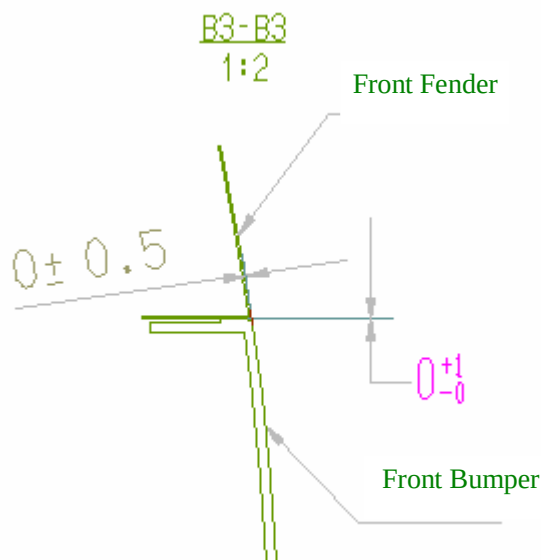


The allowable installation deviation between the front fender and the front bumper at F1:


$0^{+0}_{-1}$

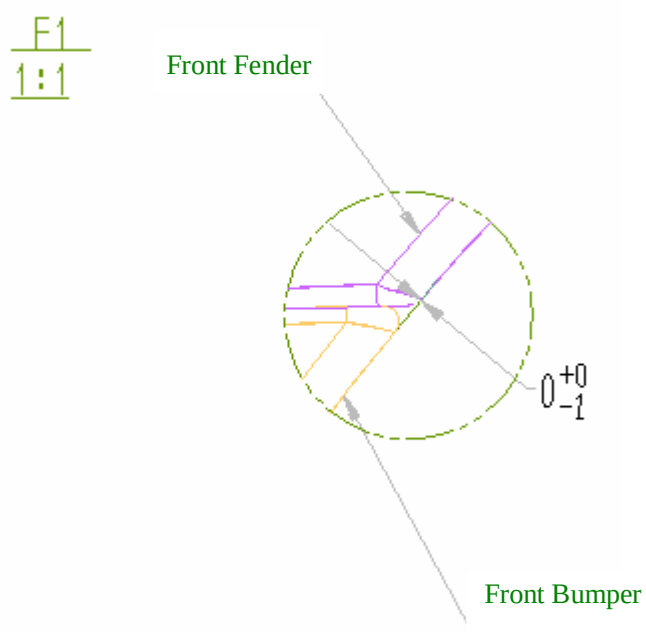


The clearance between the front fender and the side panel at B4-B4:  $3.2 \pm 0.5$

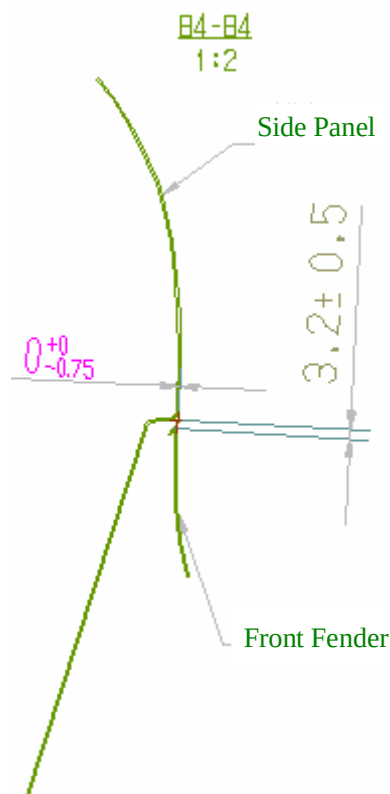


The clearance between the front fender and the front door at B5-B5:  $4.5 \pm 1$

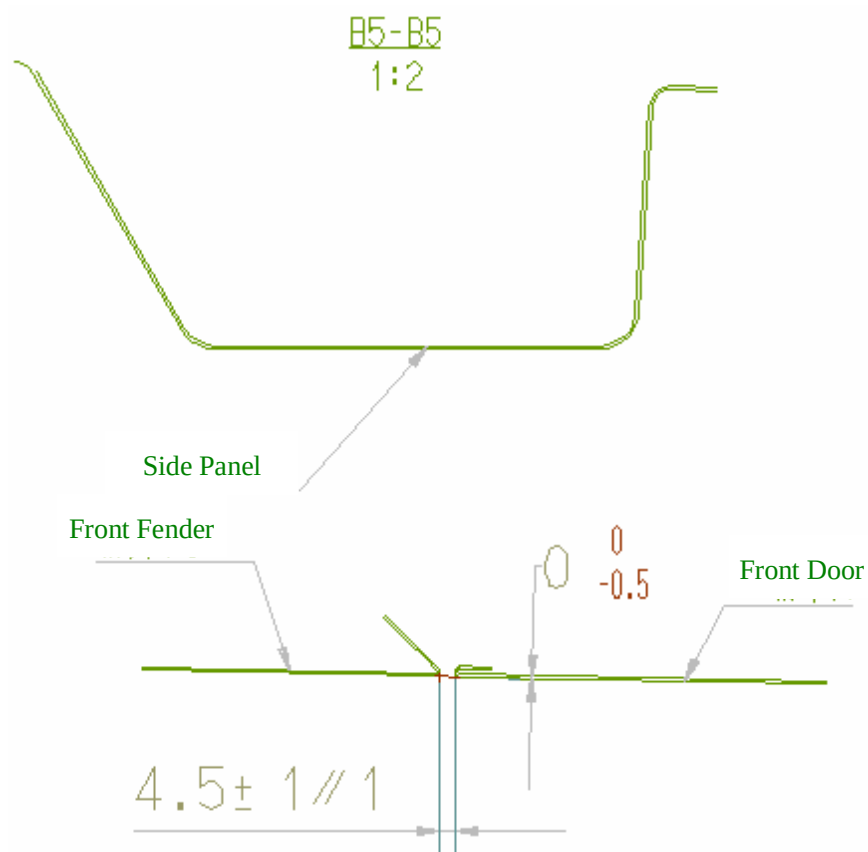


The clearance between the side panel and the front door frame at B7-B7: 4.5

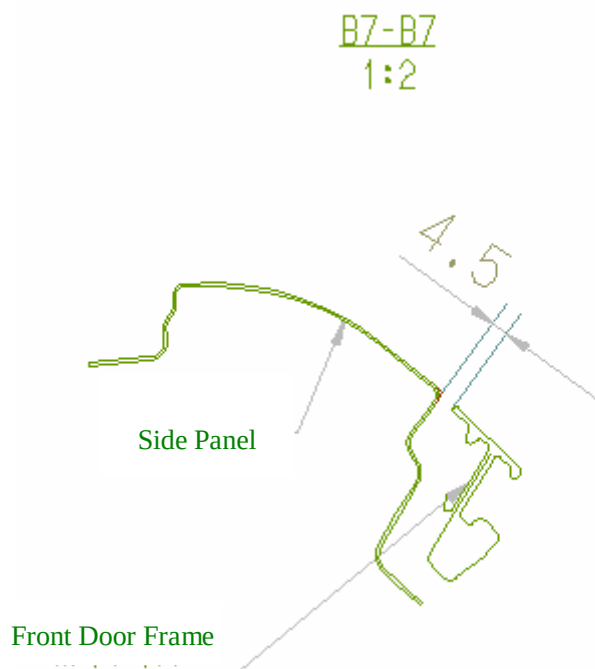


The clearance between the front door frame and the rear door frame at B8-B8:  $4.5 \pm 1$

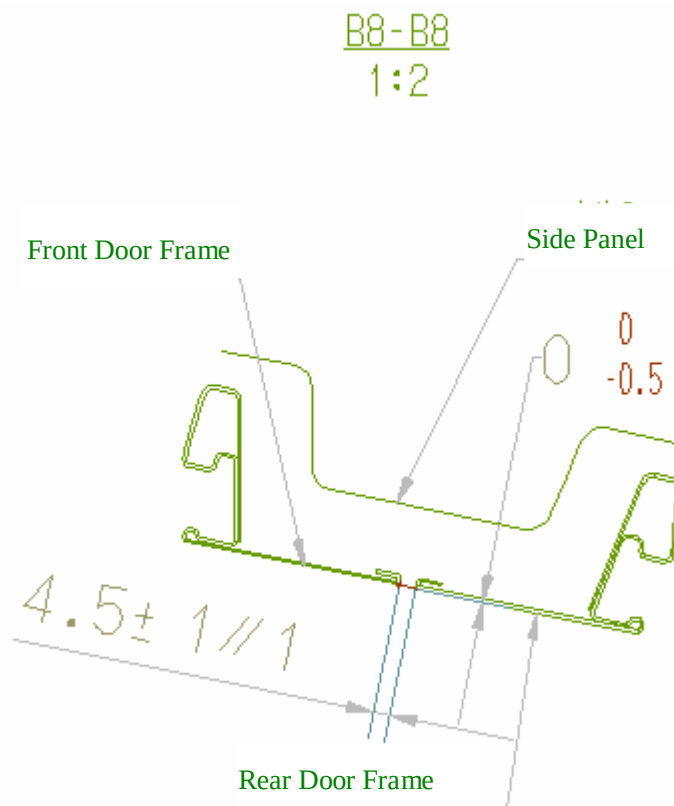


The clearance between the front door and the rear door at B9-B9:  $4.5 \pm 1$

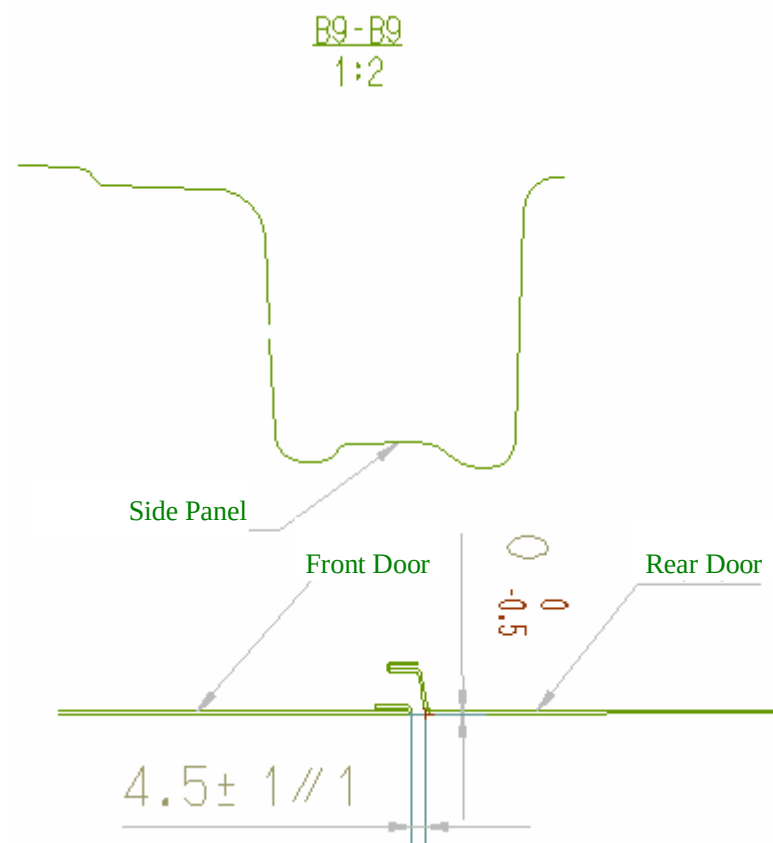


The clearance between the rear door frame and the side panel at B10-B10: 4.5

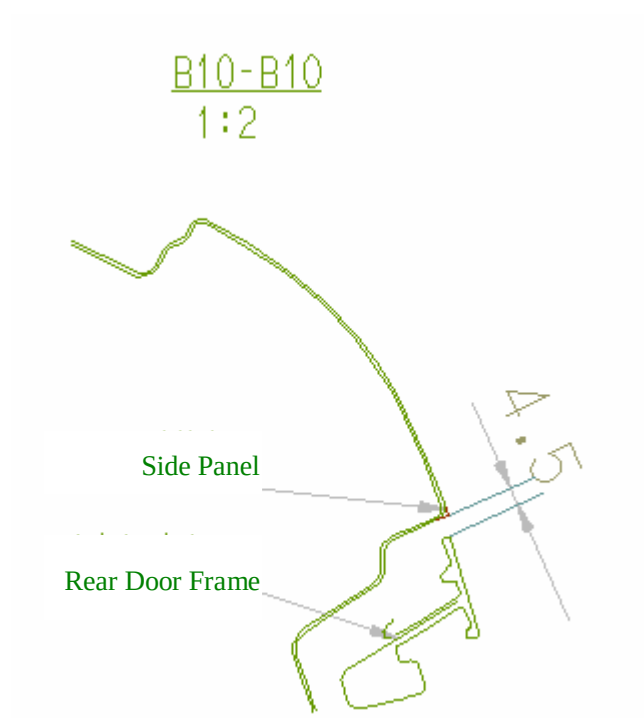


The clearance between the rear trim panel of the rear door and the side panel at B12-B12: 4

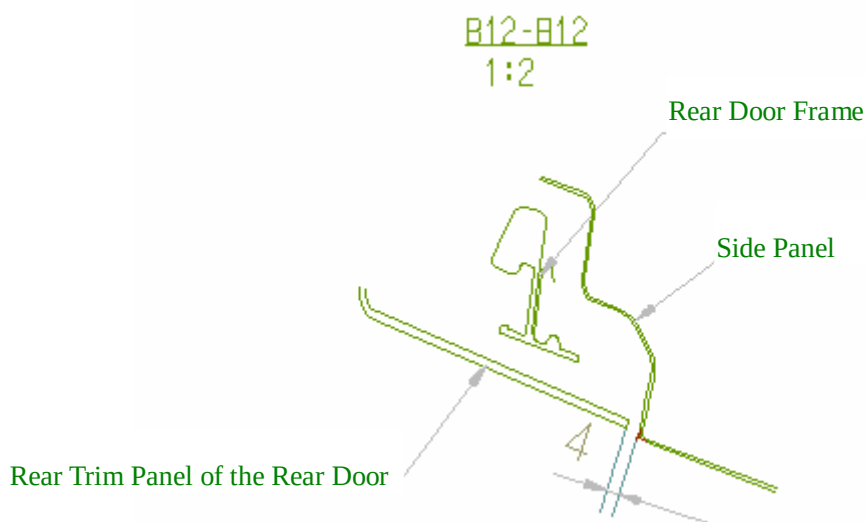


The clearance between the rear door and the side panel at B13-B13: 4.5

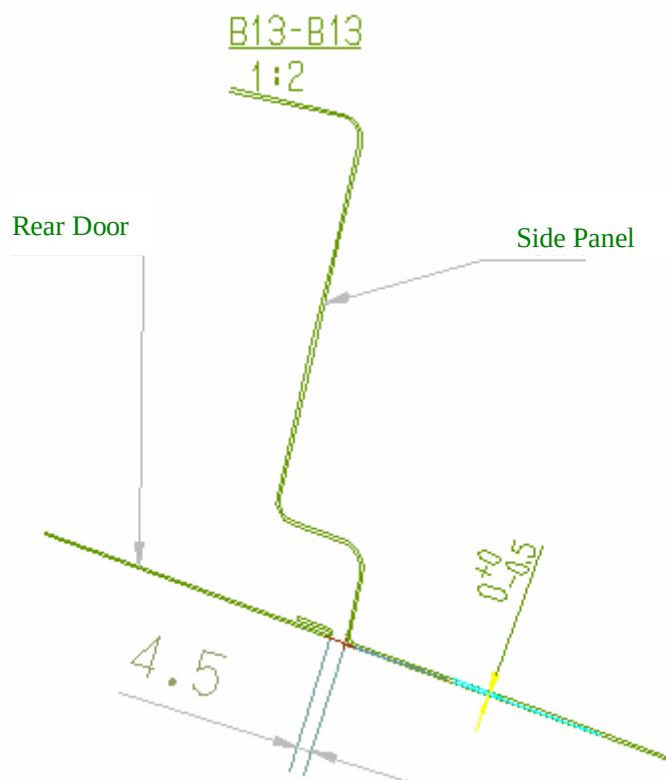


The clearance between the rear door and the side panel at B14-B14:  $4.5 \pm 1$

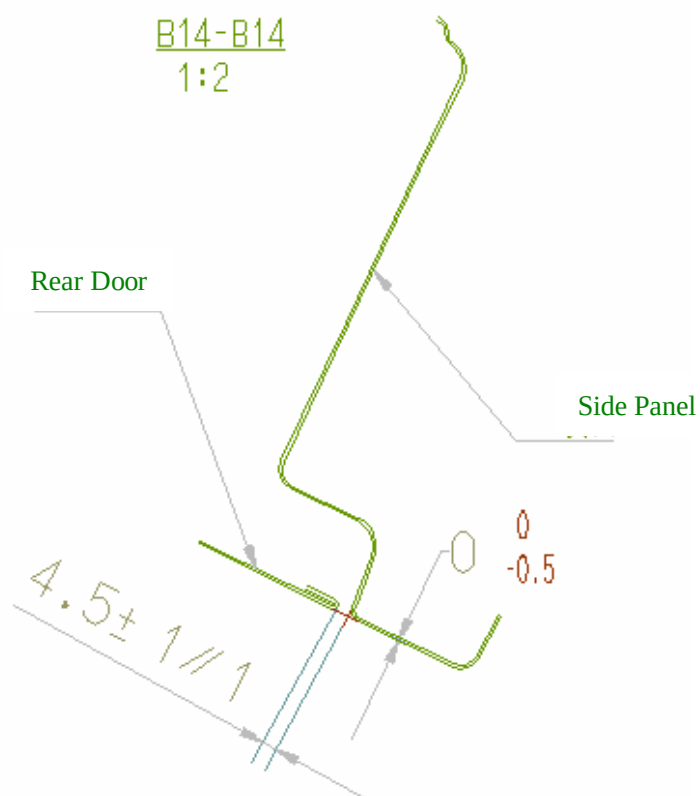


The clearance between the fuel filler opening cover and the side panel at B15-B15:  $3 \pm 1$

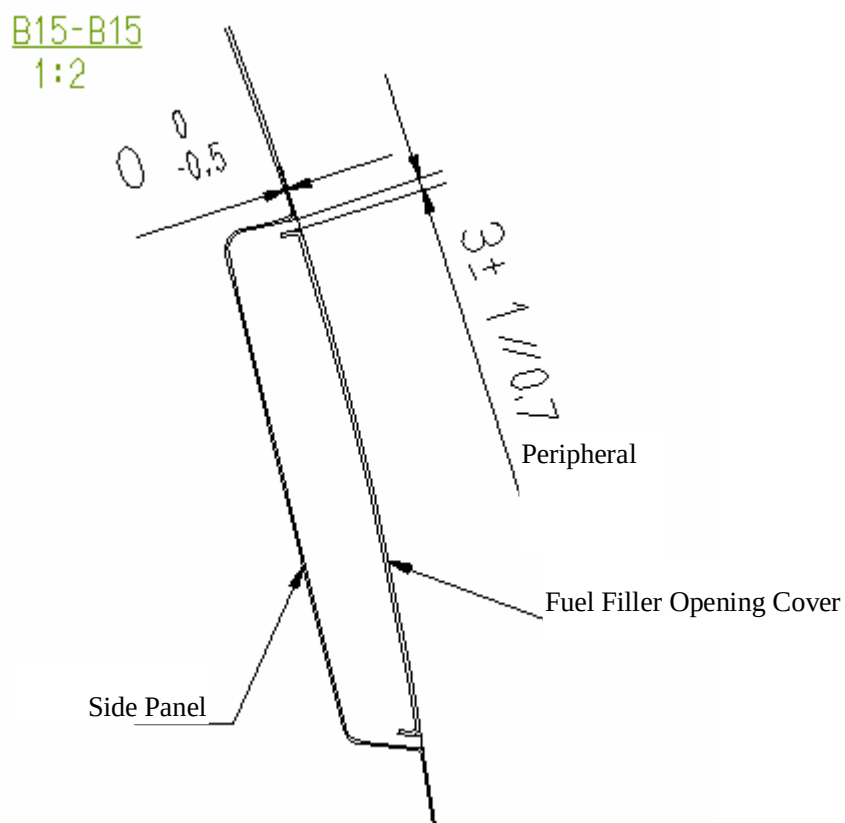


The clearance between the rear bumper and the side panel at B16-B16:  $0 \pm 1$

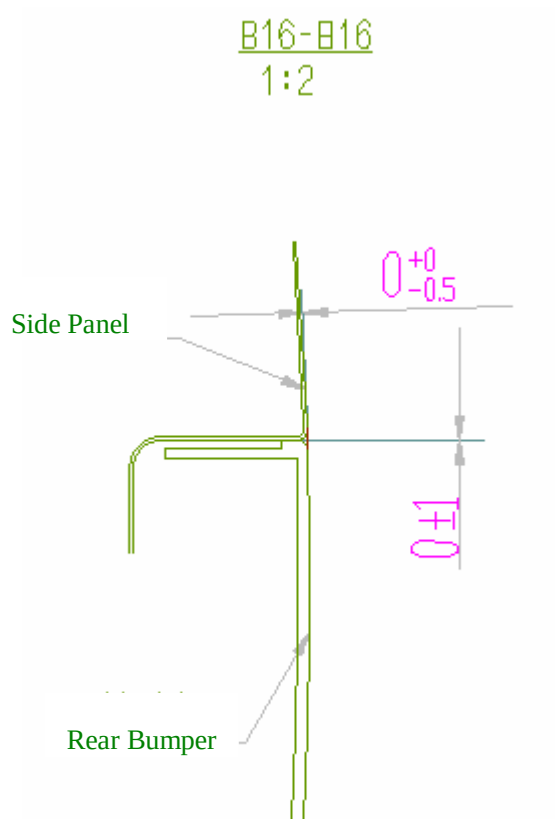


The clearance between the rear bumper and the side panel at B17-B17:  $0 \pm 0.5$

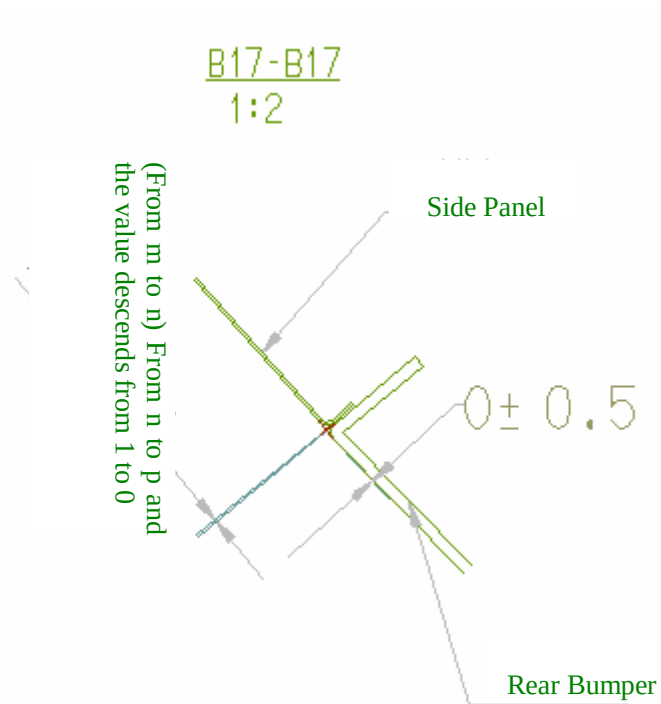


The clearance between the side panel and the tail light at B19-B19:  $1 \pm 0.5$

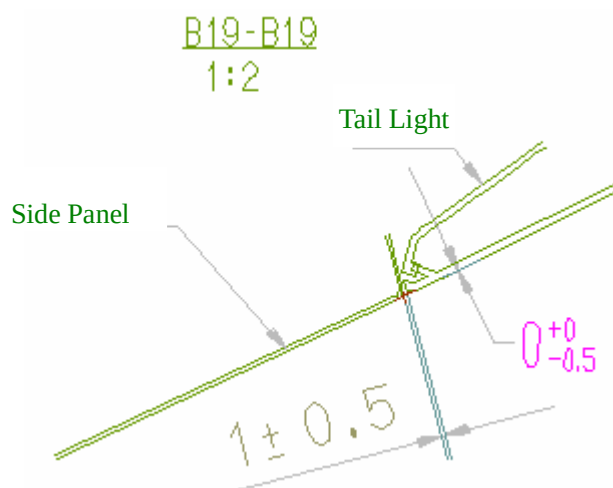


The clearance between the side panel and the tail light at B20-B20:  $1 \pm 0.5$

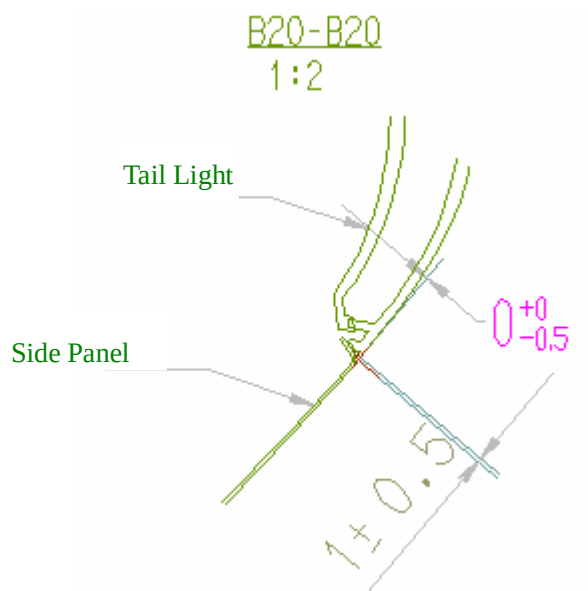


The clearance between the rear bumper and the tail light at B21-B21: 1.7

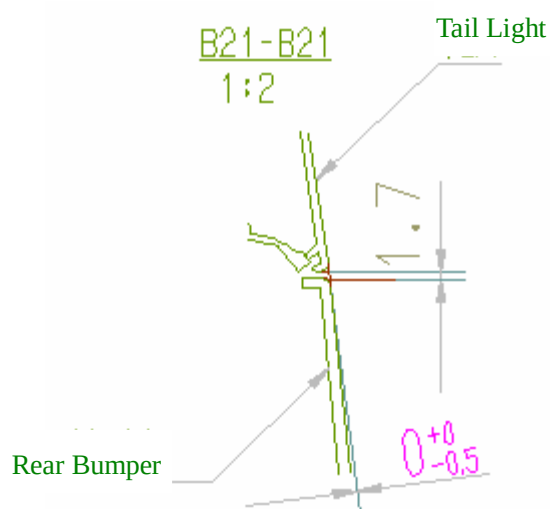


The clearance between the front fender and the fender apron at B22-B22:  $2.5 \pm 1$

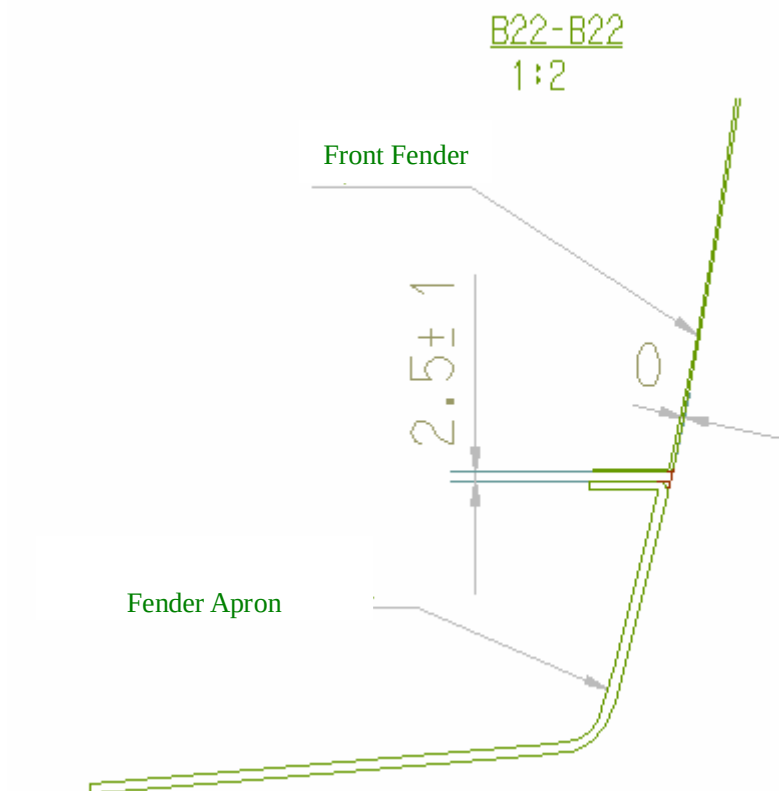


The clearance between the front door and the fender apron at B23-B23:  $6.3 \pm 1$

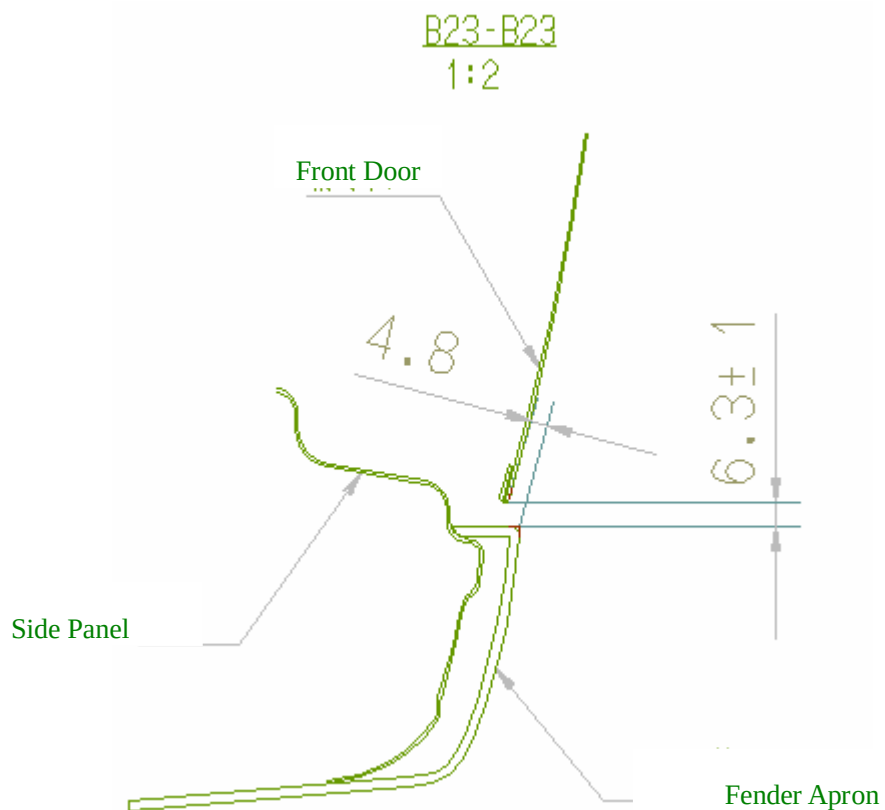


The clearance between the rear door and the fender apron at B24-B24:  $6.4 \pm 1$

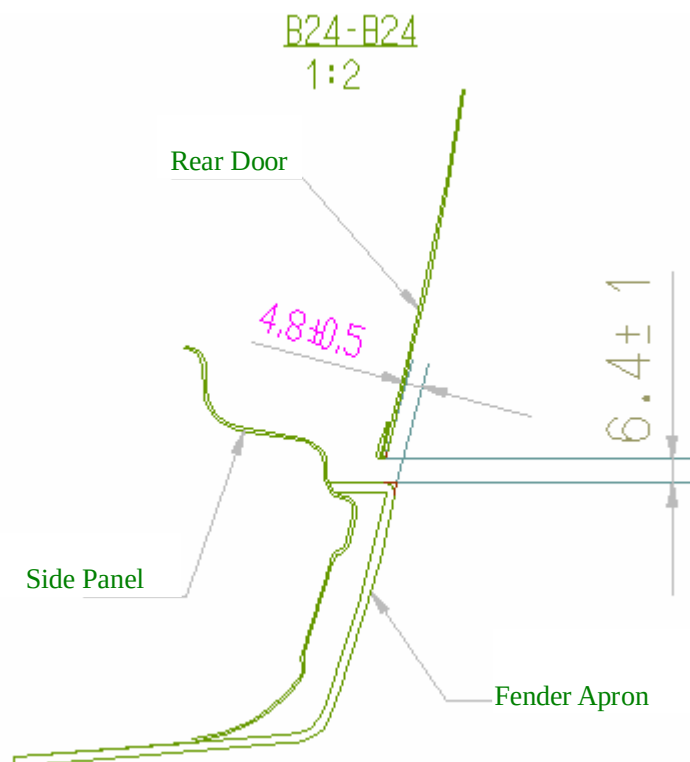


The clearance between the fender apron and the side panel at B25-B25:  $3 \pm 1$

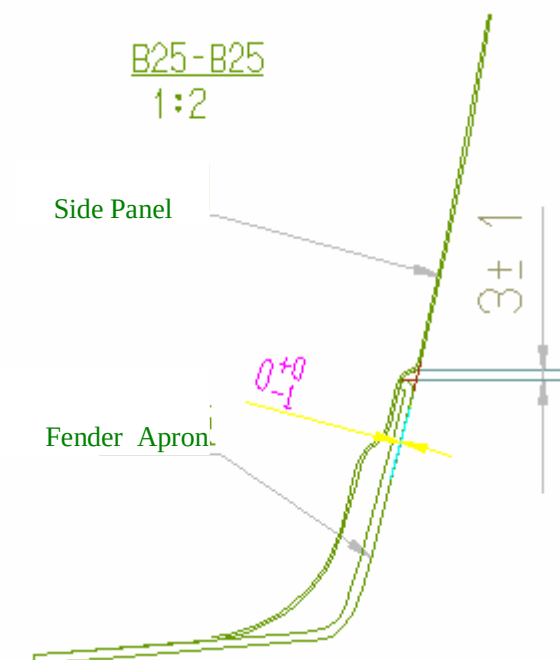


The allowable installation deviation between the rear bumper and the side panel (on rear fender) at F2:  $0^{+0}_{-1}$

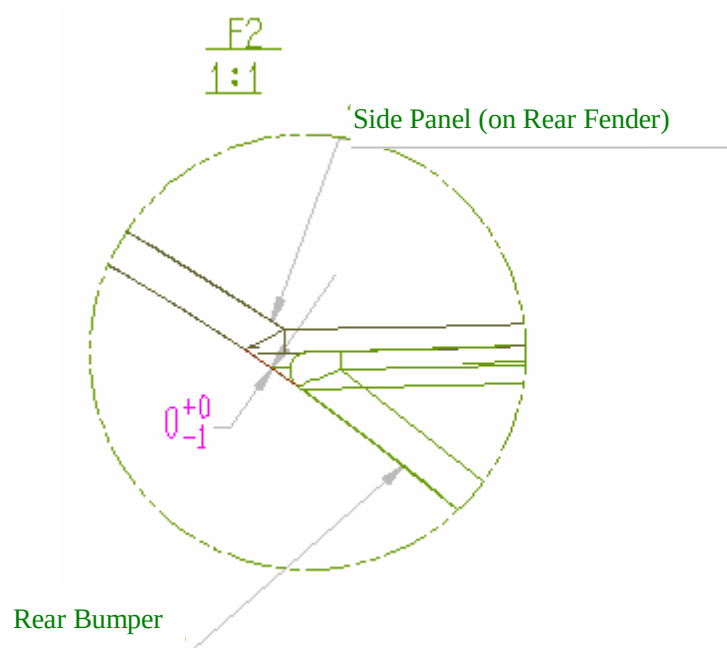


Top view

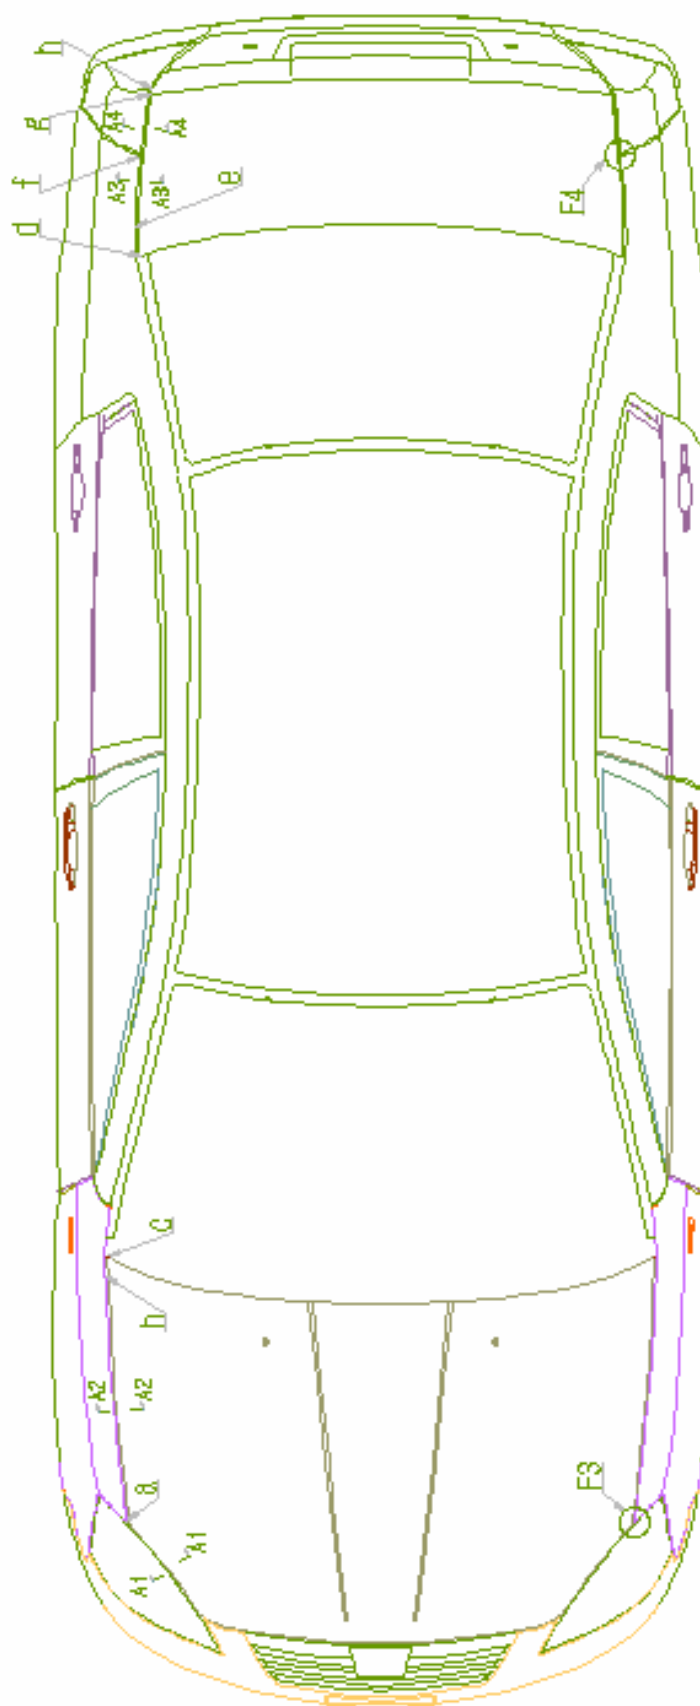


The clearance between the headlamp and the engine hood at A1-A1:  $3 \pm 1$

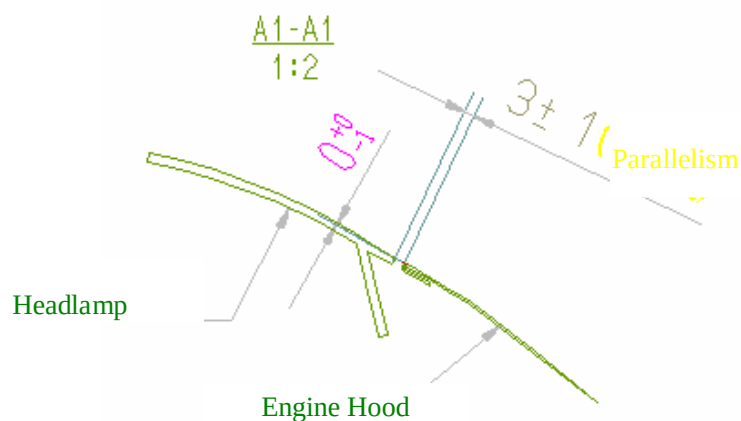


The clearance between the front fender and the engine hood at A2-A2:  $4 \pm 1$

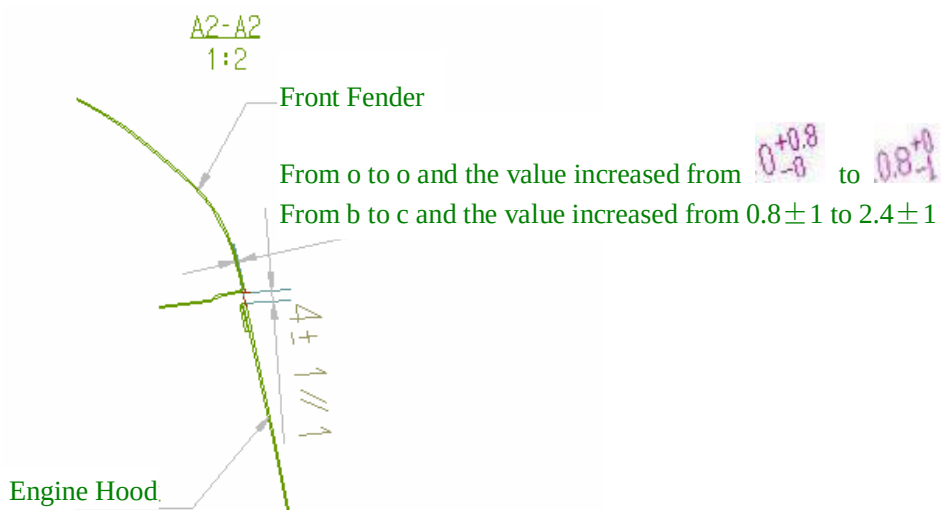


The clearance between the luggage compartment cover and the side panel (on rear fender) at A3-A3:  $4 \pm 1$

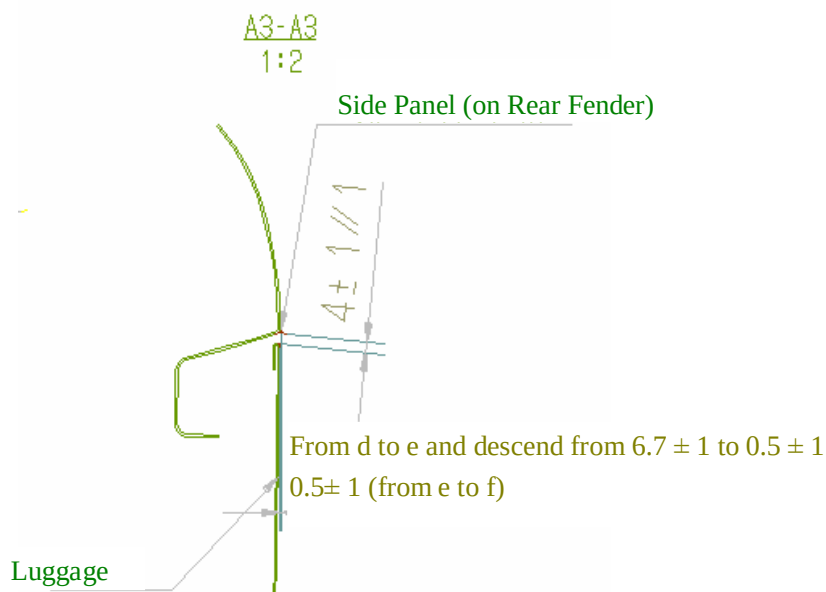


The clearance between the tail light and the luggage compartment cover at A4-A4:  $4 \pm 1$

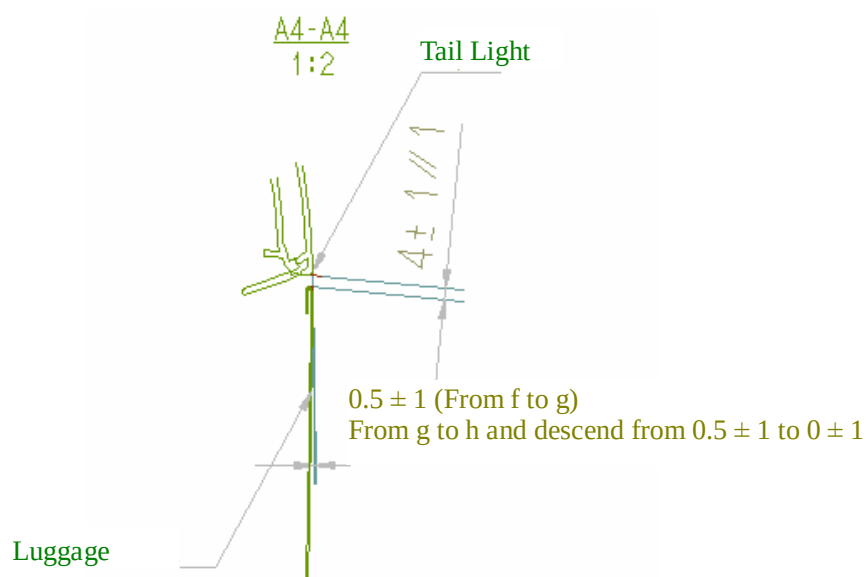


The clearance between the headlamp and the engine hood at F3:  $0^{+0}_{-0.5}$

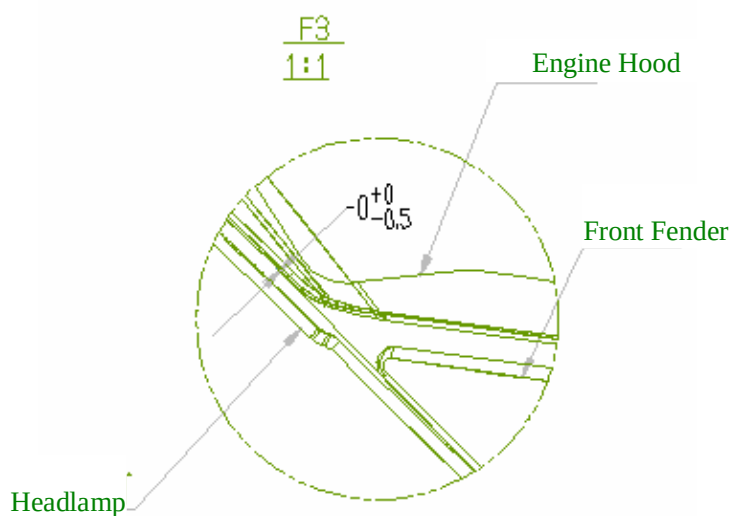

The clearance between the tail light and the luggage compartment cover at F4:  $0^{+0}_{-0.5}$

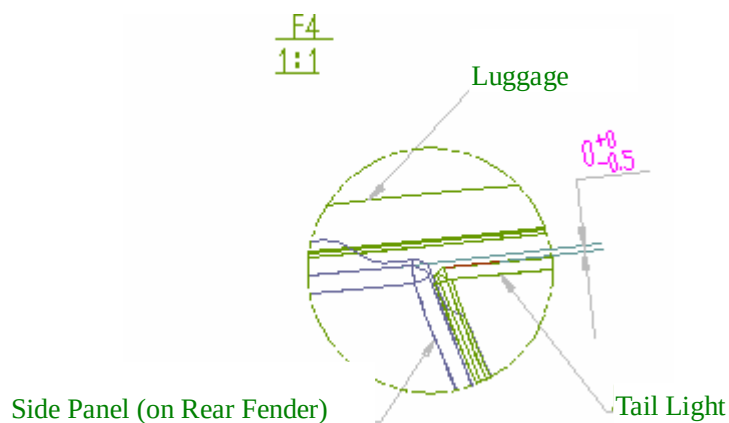


## Rear view

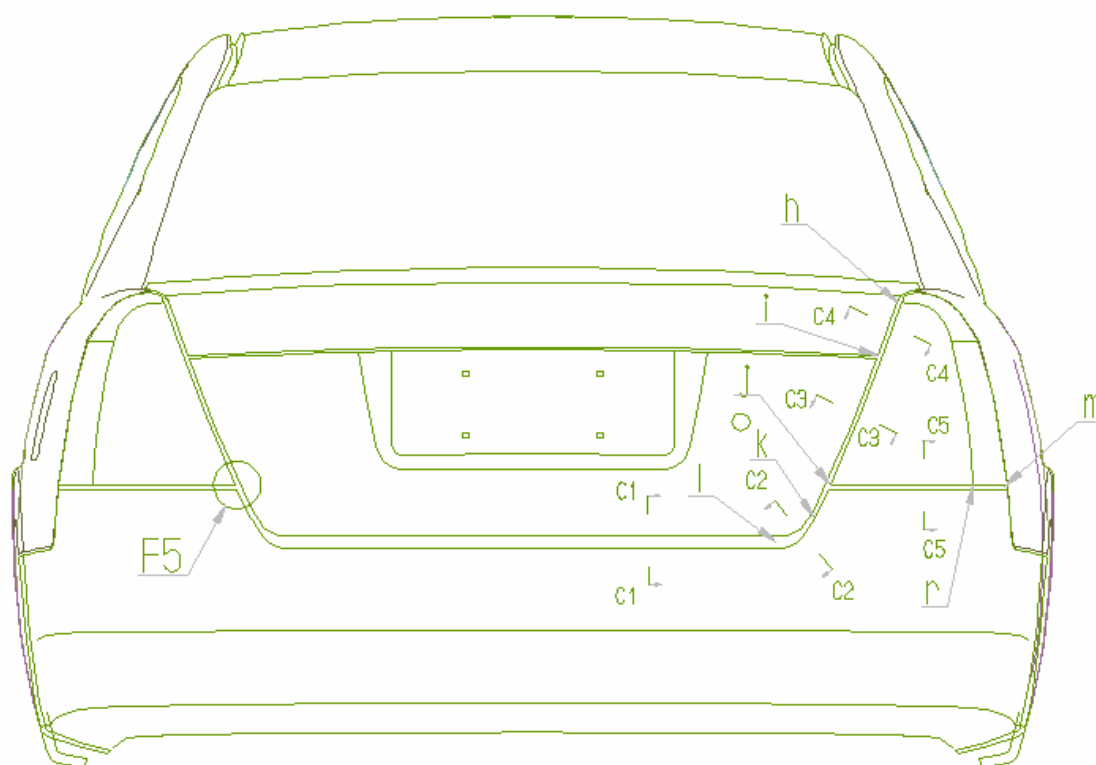


The clearance between the rear bumper and the luggage compartment cover at C1-C1: 8.2


$\frac{C1-C1}{1:2}$

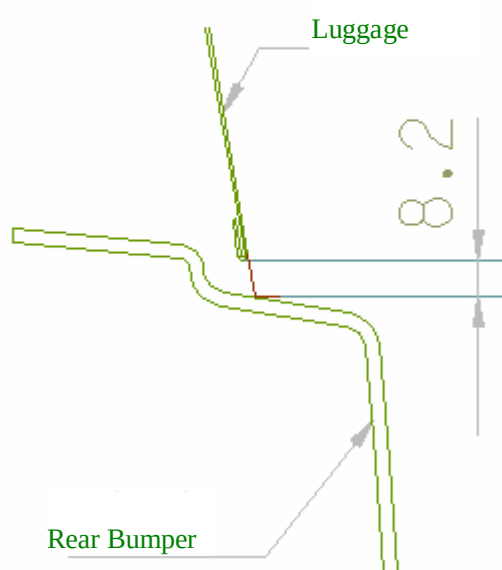


The clearance between the rear bumper and the luggage compartment cover at C2-C2: 4

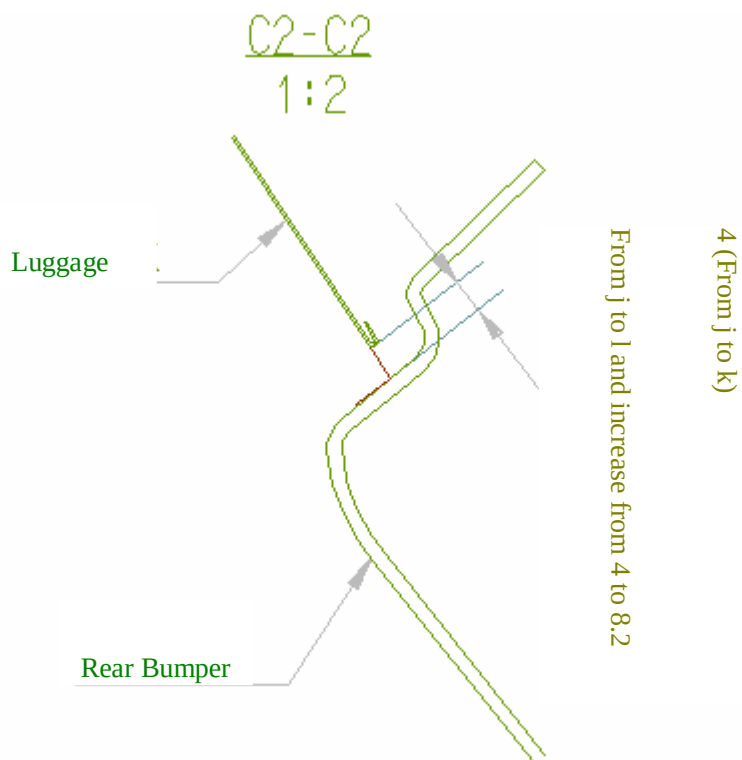


The clearance between the tail light and the luggage compartment cover at C3-C3:  $4 \pm 1$

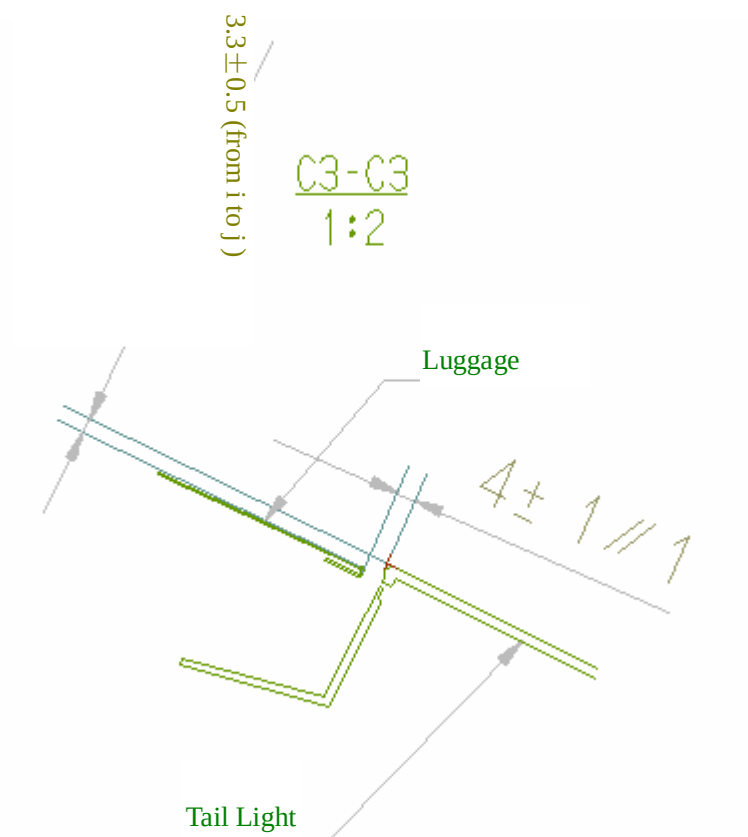


The clearance between the tail light and the luggage compartment cover at C4-C4:  $4 \pm 1$

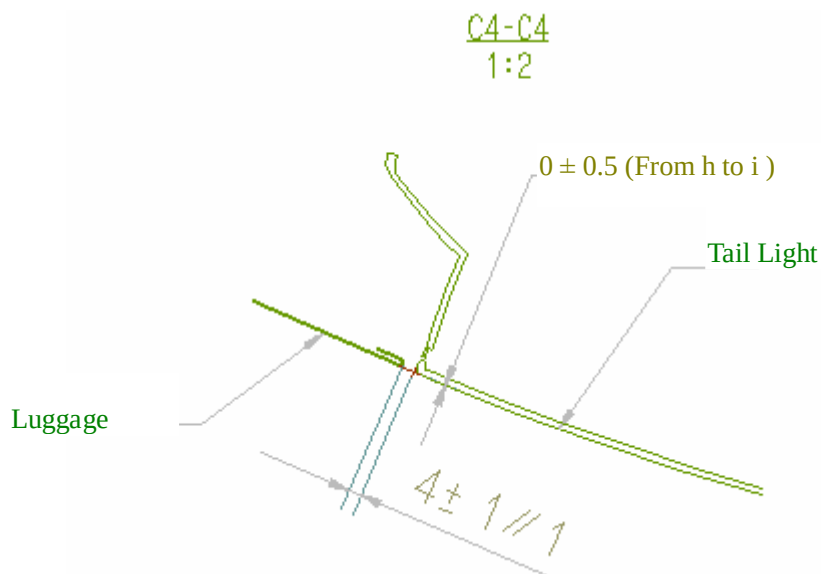


The clearance between the rear bumper and the tail light at C5-C5:  $3 \pm 1$

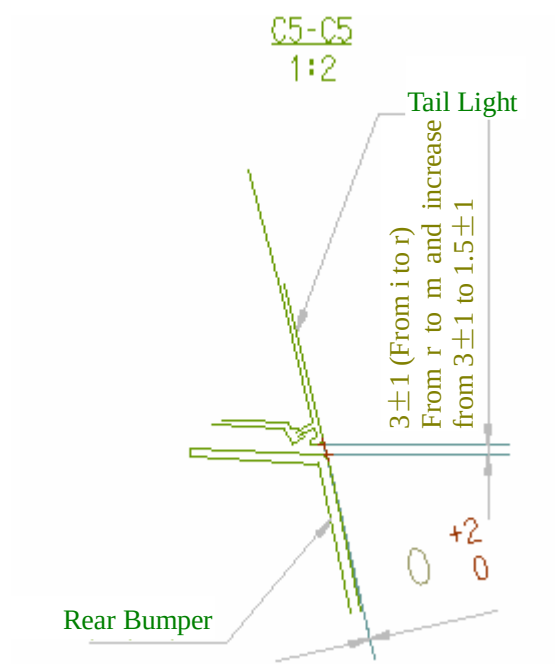


The allowable installation deviation between the rear bumper and the luggage compartment cover at F5:  $0^{+0}_{-0.5}$

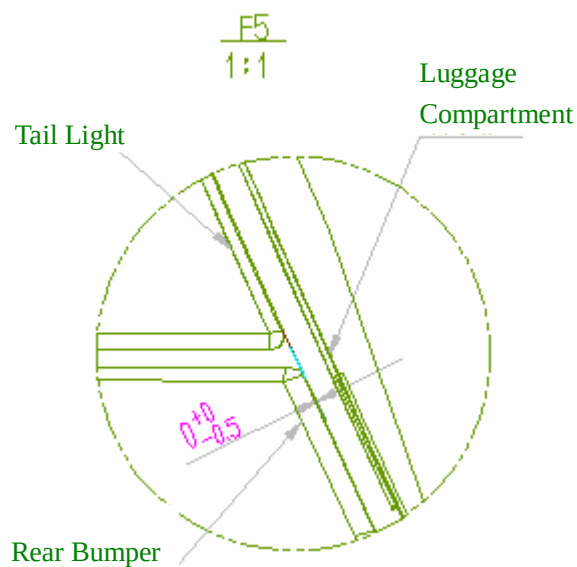


Front view

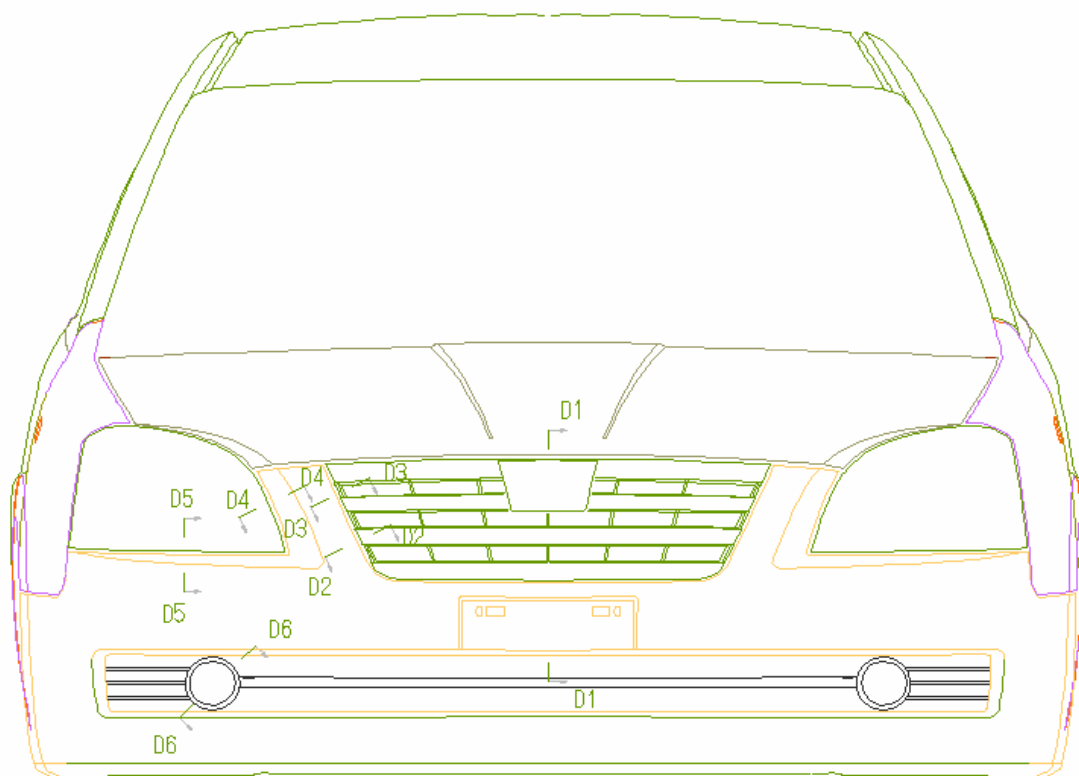


The clearance between the engine hood and the air inlet grille at D1-D1 is  $4.5 \pm 1$ , while the clearance between the front bumper and the air inlet grille is  $1 \pm 0.5$

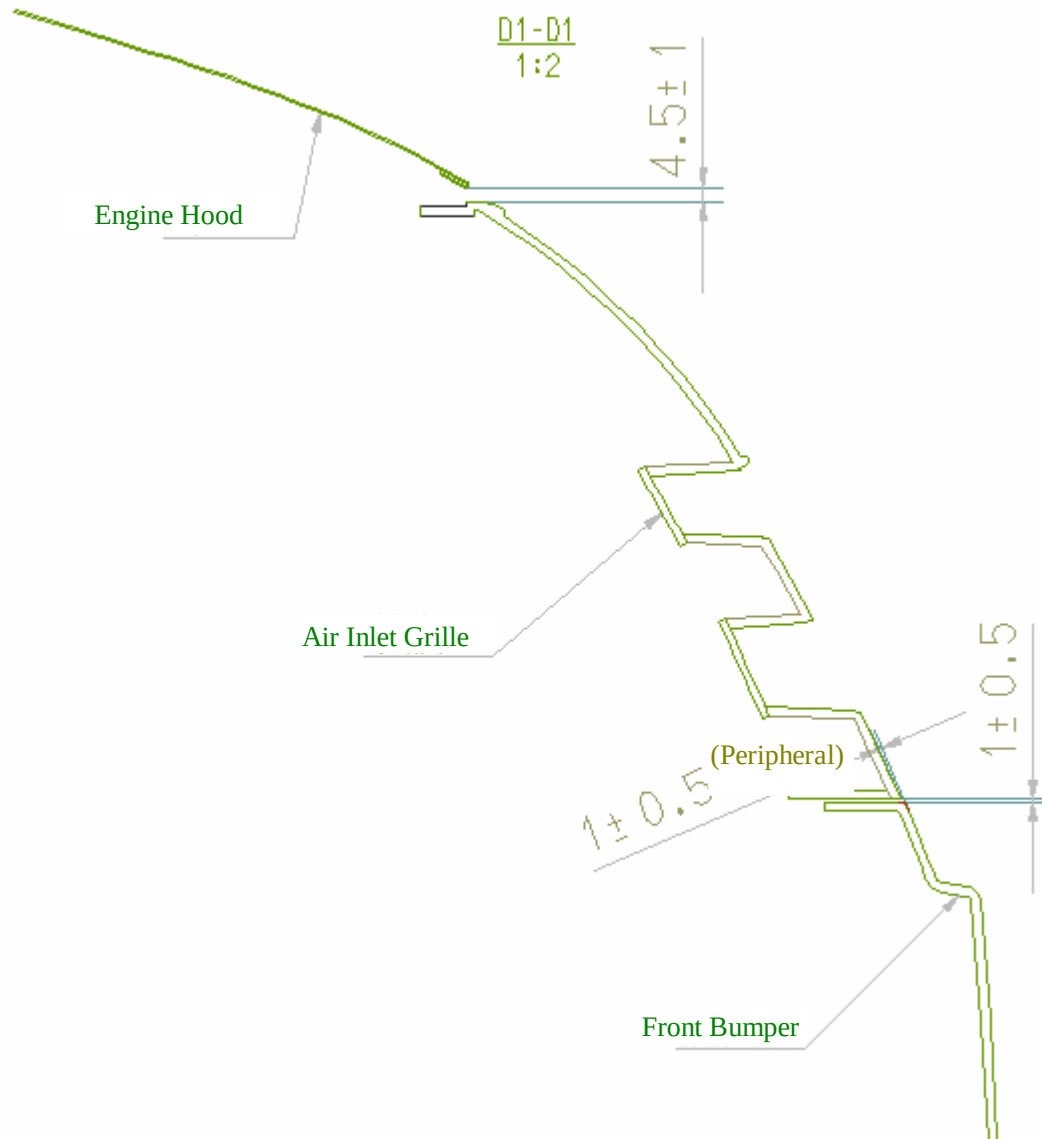


The clearance between the front bumper and the air inlet grille at D2-D2:  $1.5 \pm 1$

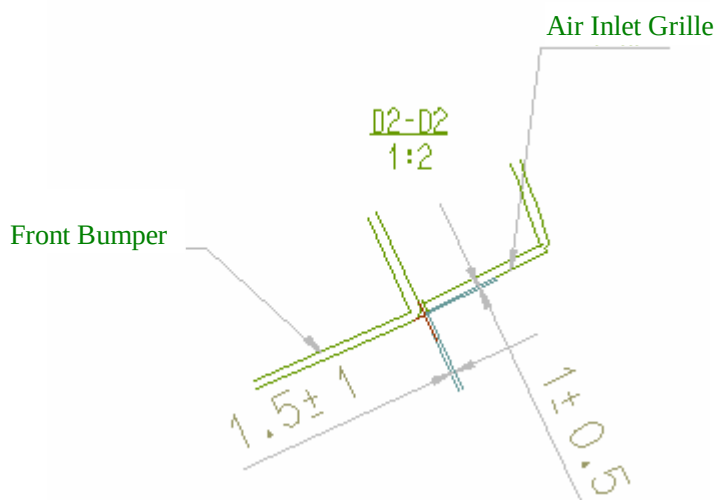


The clearance between the front bumper and the air inlet grille at D3-D3:  $1.5 \pm 0.5$

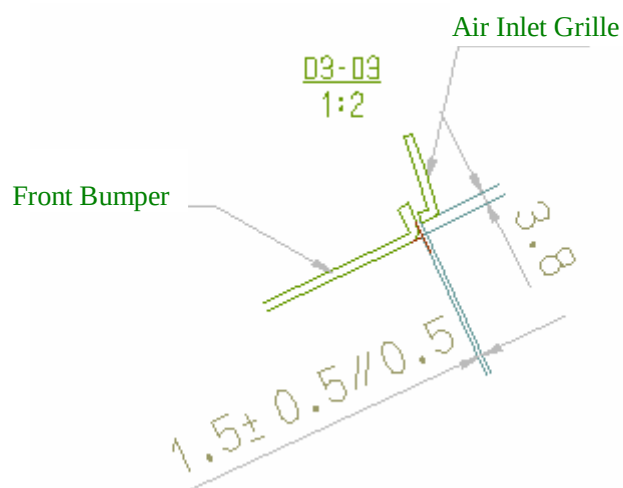


The clearance between the headlamp and the front bumper at D4-D4:  $4 \pm 1$

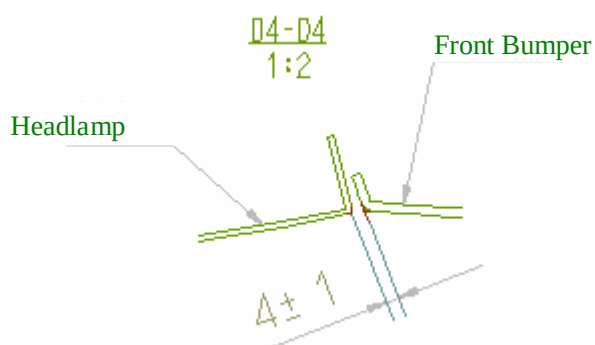


The clearance between the headlamp and the front bumper at D5-D5:  $4 \pm 1$

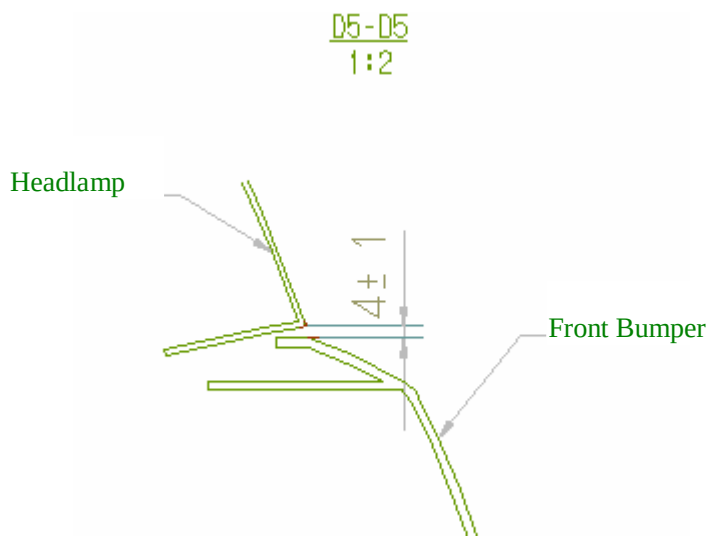

The clearance between the front fog light and the front bumper at D6-D6:  $0^{+0}_{-0.5}$

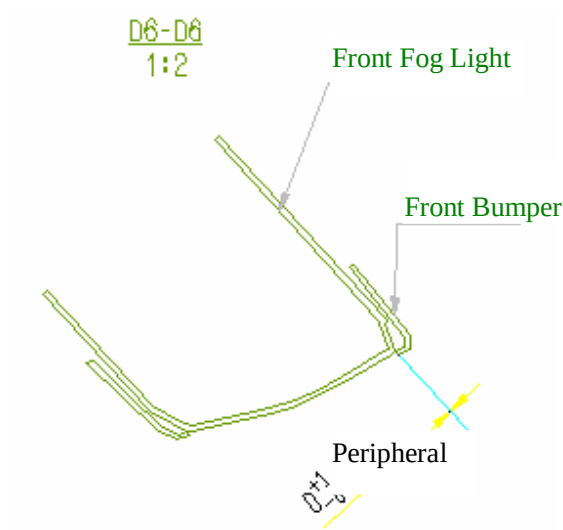


Dimension of the engine compartment:

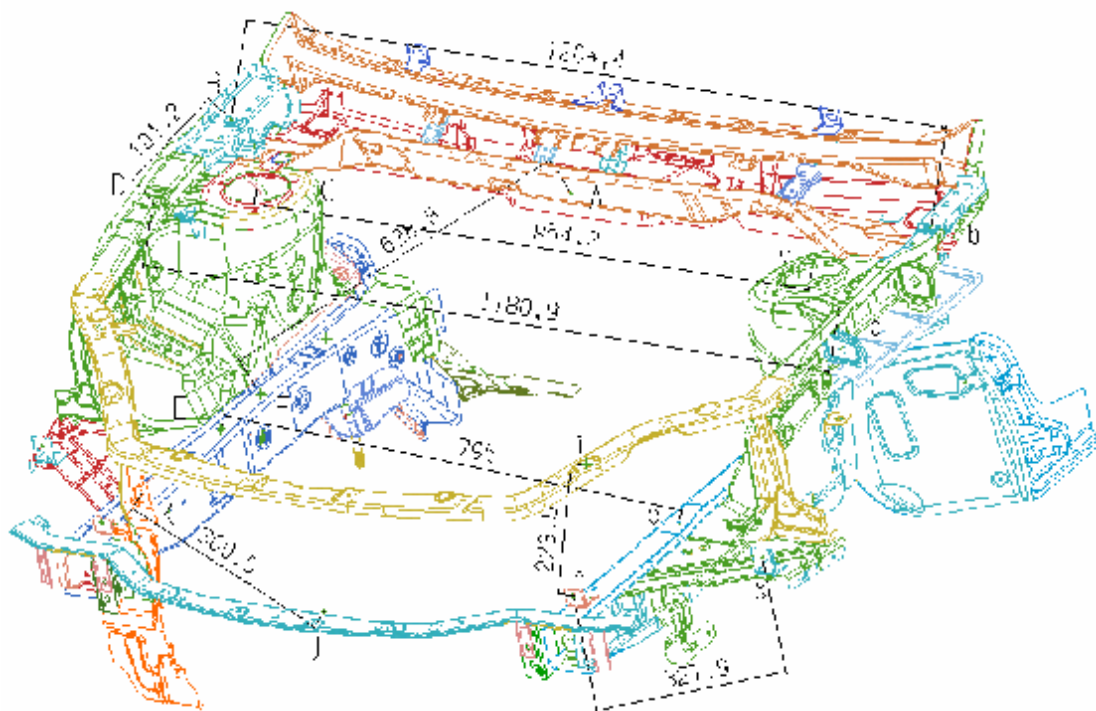


| Mark | Name                                                      | Diameter | Mark | Name                                                      | Diameter |
|------|-----------------------------------------------------------|----------|------|-----------------------------------------------------------|----------|
| A    | Mounting hole for the body of cowl panel                  | 7        | F    | Support hole for the right mounting bracket of the engine | 11       |
| Bb   | Mounting hole for the fender                              | 7        | g    | Hole for the headlamp                                     | 7        |
| Cc   | Via hole for the shock absorber                           | 115      | h    | Hole for the headlamp                                     | 7        |
| Dd   | Mounting hole for the fender                              | 7        | i    | Mounting hole for the lights                              | 7        |
| e    | Mounting hole for the battery carrier                     | 9        | J    | Hole for the bumper                                       | 9        |
| E    | Support hole for the right mounting bracket of the engine | 11       | K    | Hole for the condenser                                    | 8X12     |

Dimension of the windshield:

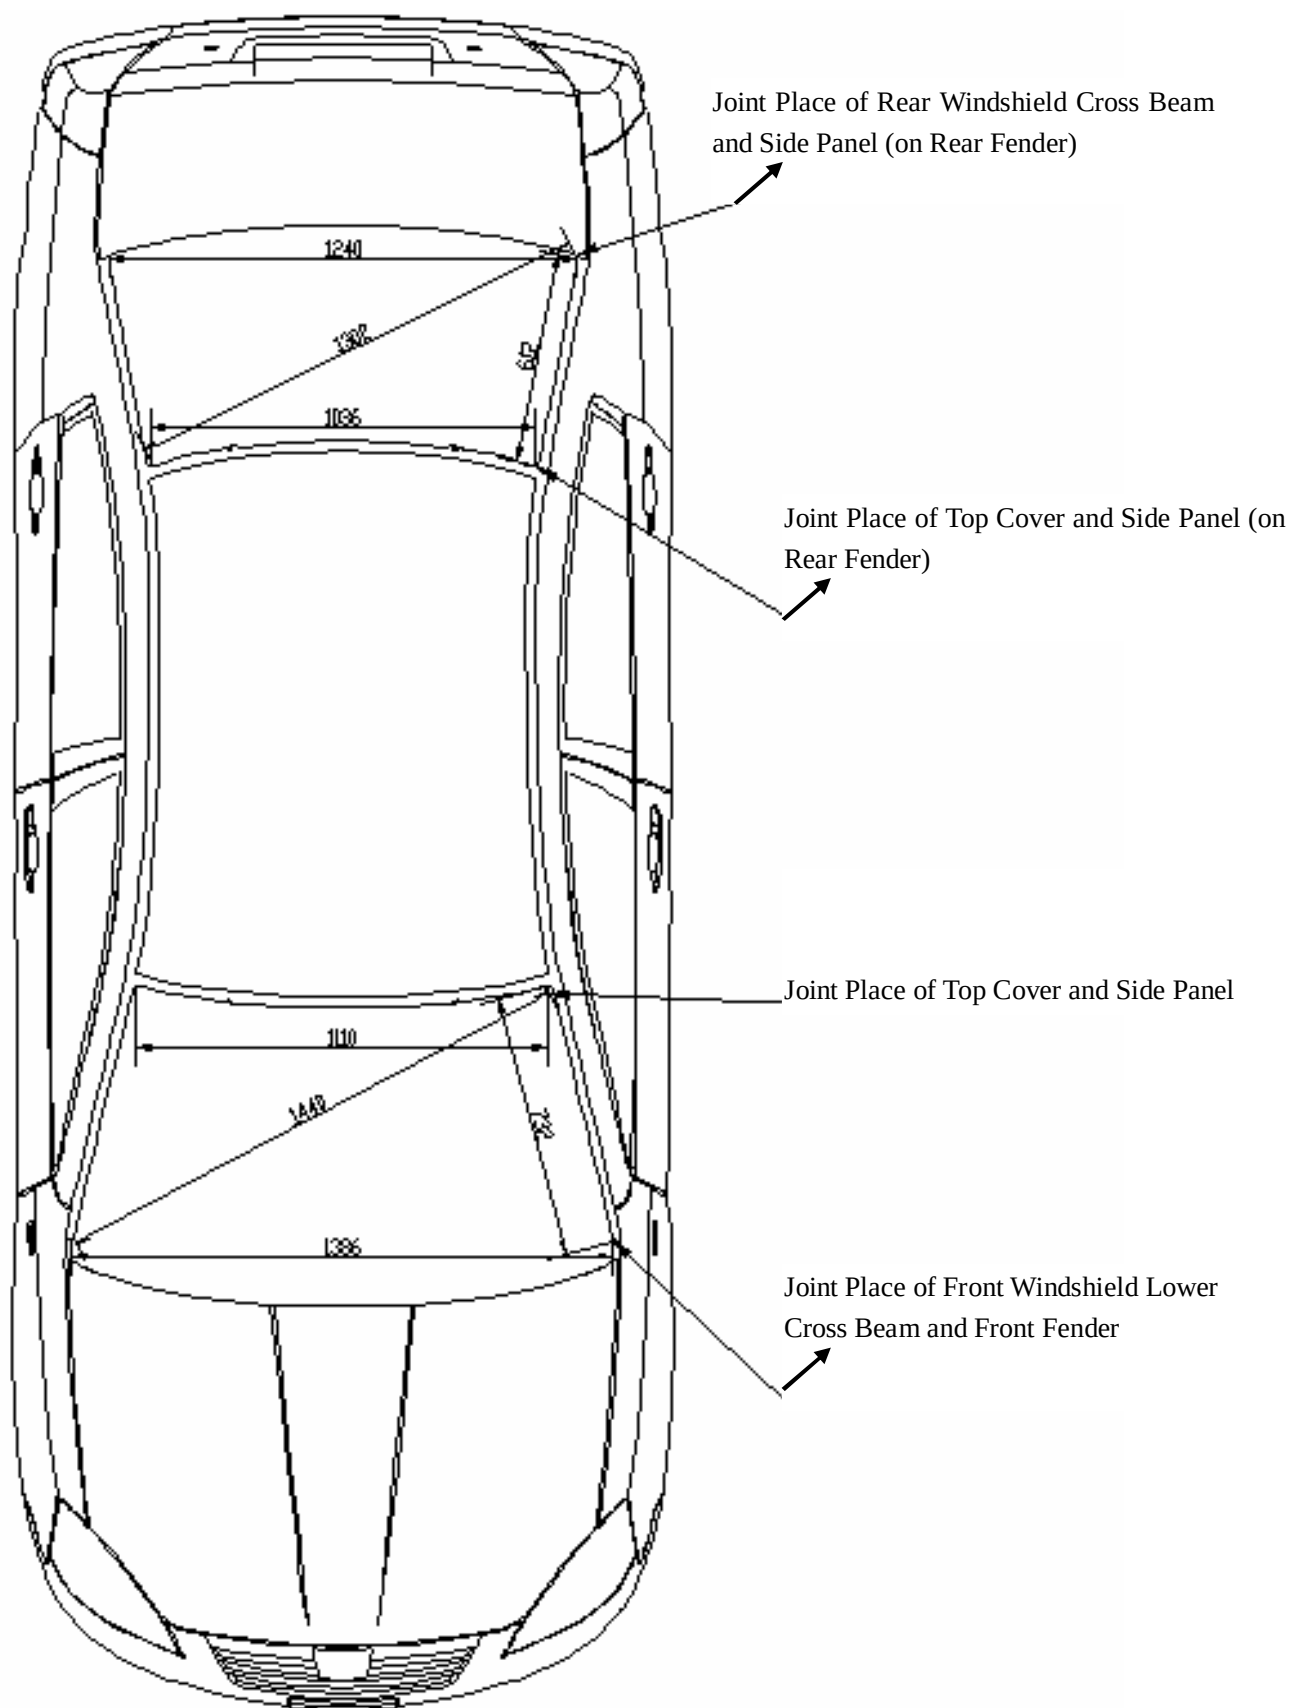

Opening dimension of all the parts:

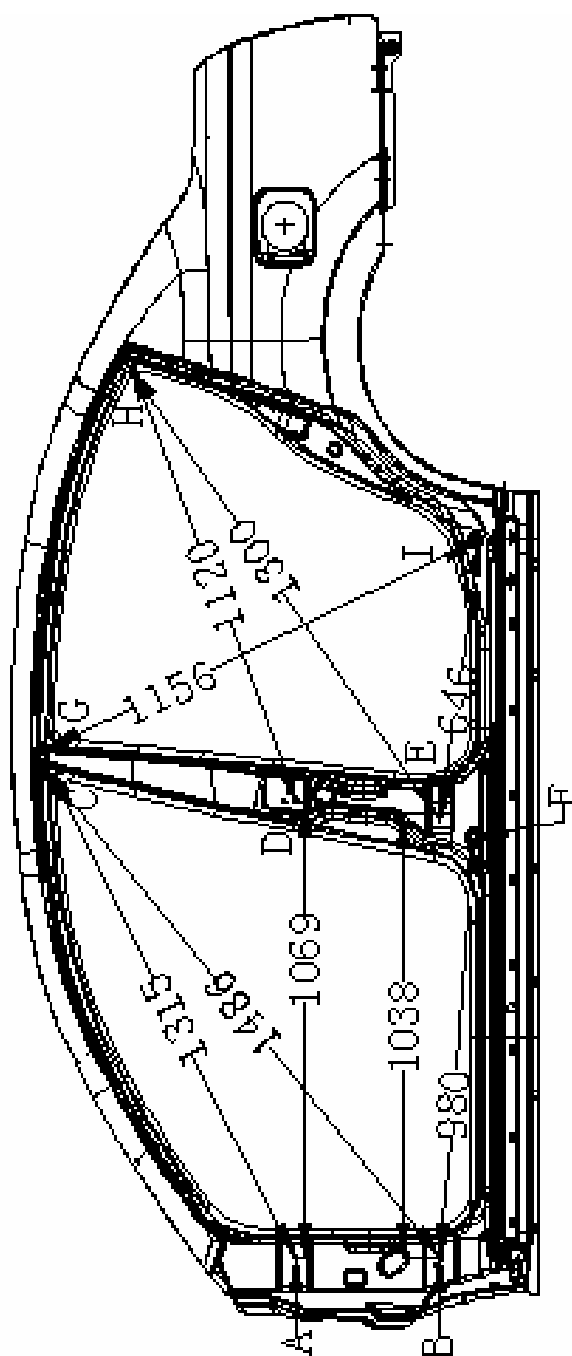

Dimension of the body, left-right      Note: Symbols in uppercase English letter indicates the left of the body while lowercase English letter indicates the right of the body. (View from the rear of the vehicle)

| Mark | Name                                                | Diameter | Mark | Name                                      | Diameter |
|------|-----------------------------------------------------|----------|------|-------------------------------------------|----------|
| Aa   | Mounting hole for the upper hinge of the front door | 11       | Ff   | Support point for the front door          |          |
| Bb   | Mounting hole for the lower hinge of                | 11       | Gg   | Front upper corner point of the rear door |          |

|    |                                                                   |    |    |                                                                       |  |
|----|-------------------------------------------------------------------|----|----|-----------------------------------------------------------------------|--|
|    | the front door                                                    |    |    | guide rail of the side panel                                          |  |
| Cc | Upper corner point of the front door guide rail of the side panel |    | Hh | Rear upper corner point of the rear door guide rail of the side panel |  |
| Dd | Mounting hole for the upper hinge of the rear door                | 11 | Ii | Support point of the rear door                                        |  |
| Ee | Mounting hole for the lower hinge of the rear door                | 11 |    |                                                                       |  |