


ENGINE PROPER

1. Cylinder Head Cover


- Lightweight yet high-strength aluminum diecast cylinder head covers are used.
- An aluminum washer made of vibration-damping laminated aluminum sheet is used on the evenly spaced shoulder bolts which fasten the cylinder head covers.

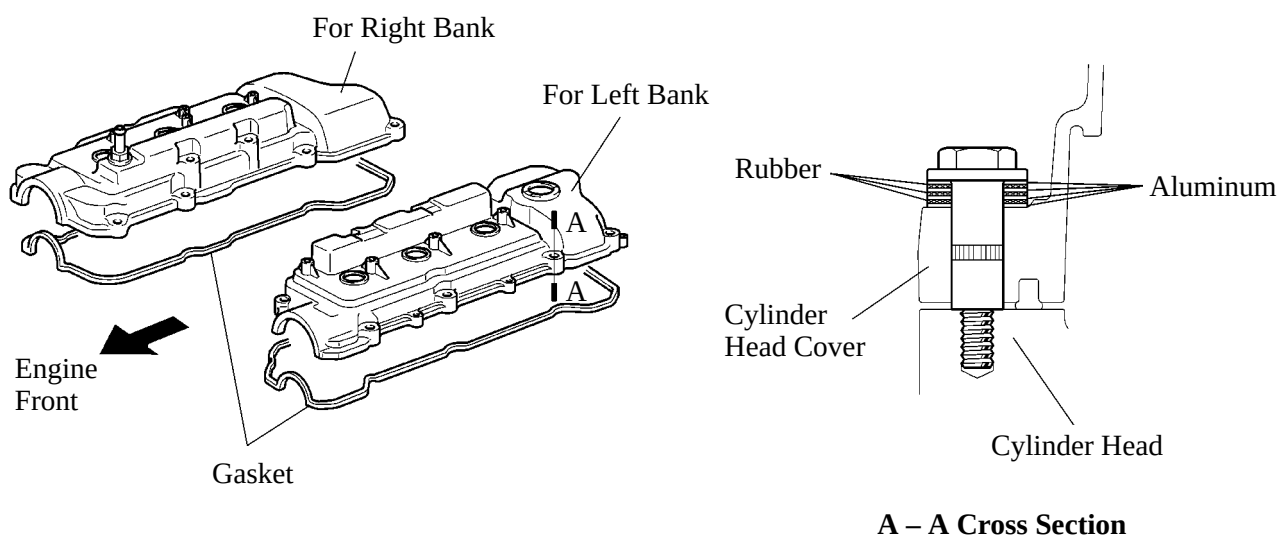

209EG101

2. Cylinder Head Gasket


- A metal type cylinder head gasket which offers superior pressure resistance and sealing performance has been adopted.

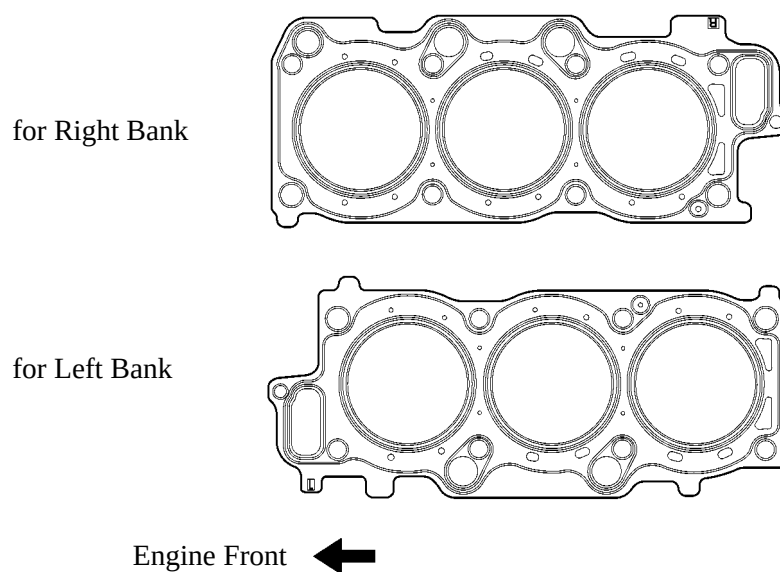

208EG104



3. Cylinder Head

- The cylinder head, which is made of aluminum, has adopted a pentroof-type combustion chamber. The spark plug has been located in the center of the combustion chamber.
- Upright, small-diameter intake ports are adopted.
- The cross section of the protrusion of the valve guide into the intake port has been reduced by decreasing the valve stem diameter and the valve guide outer diameter.
- Plastic region tightening bolt is used for the cylinder head bolts for good axial tension.

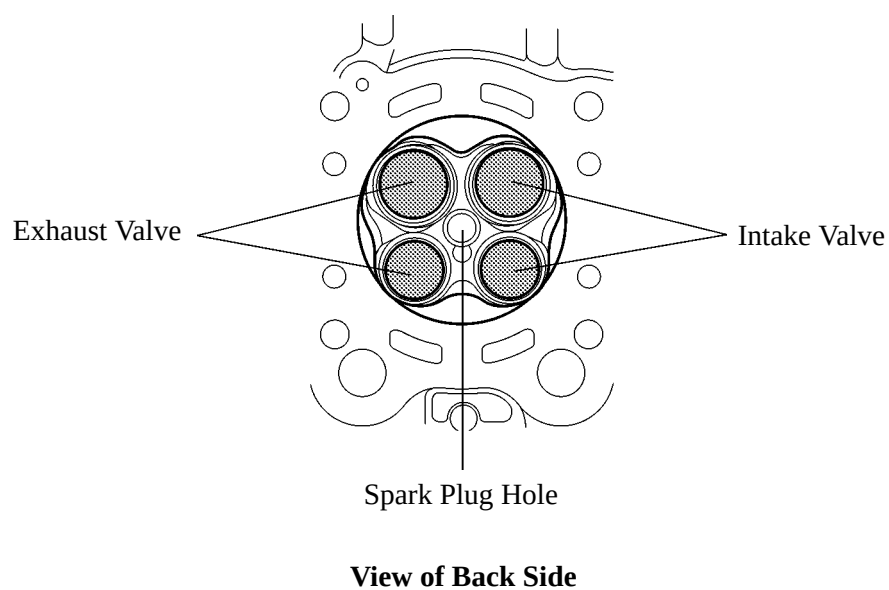


4. Cylinder Block

- The cylinder block has a bank angle of 60°, a bank offset of 36.6 mm (1.44 in.) and a bore pitch of 105.5 mm (4.15 in.), resulting in a compact block.
- Lightweight aluminum alloy is used for the cylinder block.
- A thin cast-iron liner is press-fit inside the cylinder to ensure an added reliability. This liner is thin, so that boring is not possible.
- A water pump swirl chamber and an inlet passage to the pump are provided in the V-bank to help make the engine compact.
- Knock sensor bosses are provided at 2 locations in V-bank.
- The crankshaft bearing caps are tightened using 4 plastic-region bolts for each journal. In addition, each cap is tightened laterally to improve its reliability.

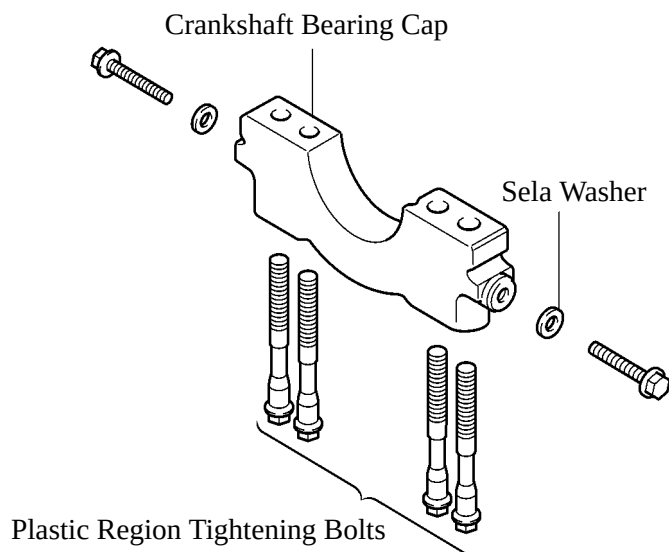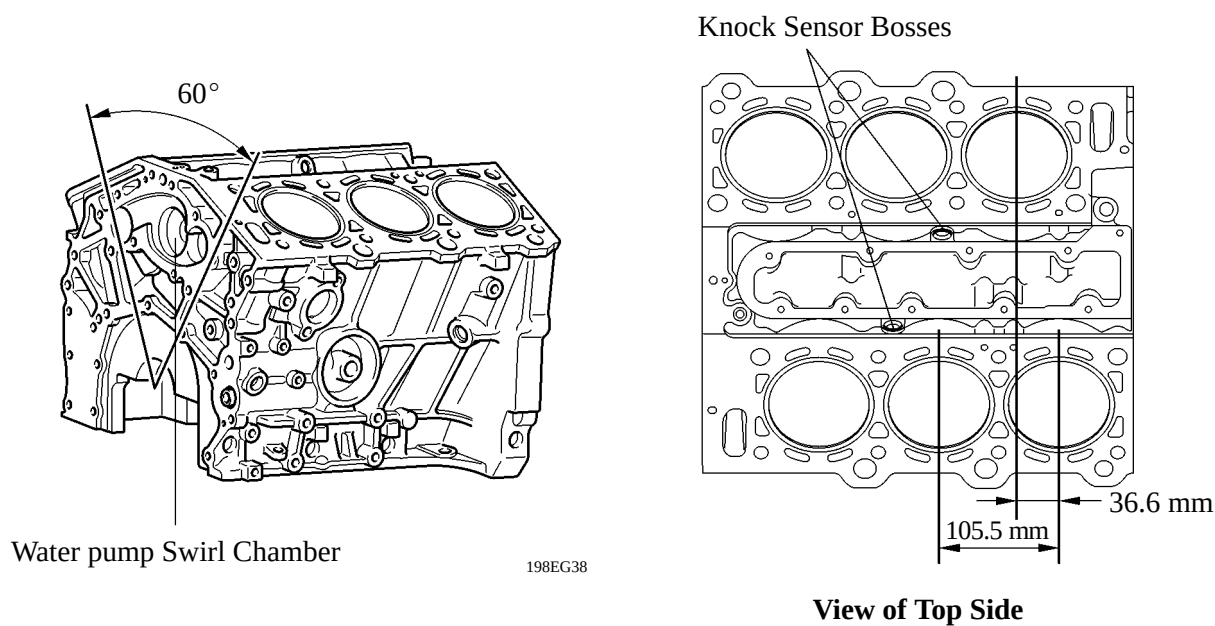

5. Piston

- The piston is made of aluminum alloy and skirt area is made compact and lightweight.
- The piston skirt has been coated with resin to reduce the friction loss.
- Full floating type piston pins are used.
- Each of the pistons is made specifically for the right or left bank.

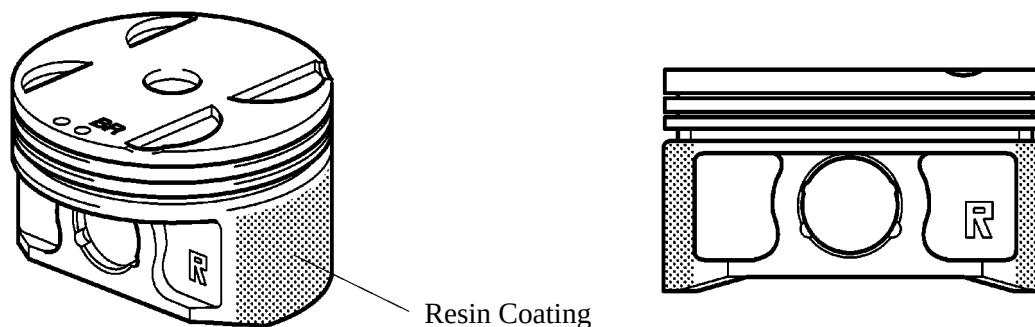


for Right Bank

208EG105

6. Connecting Rod


- Connecting rods that have been forged for high strength are used for weight reduction.
- An aluminum bearing with overlay is used for the connecting rod bearings.
- Plastic region tightening bolts are used.
- Knock pins are used at the mating surfaces of the bearing caps of the connecting rod to minimize the shifting of the bearing caps during assembly.

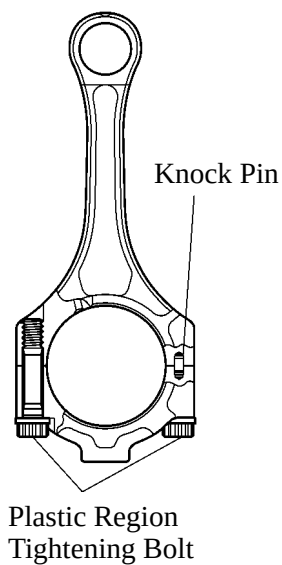

208EG106

7. Crankshaft


- The crankshaft is made of forged steel and has 4 journals and 9 balance weights.
- All pin and journal fillets are roll-finished to maintain adequate strength.
- The crankshaft bearings for the No.1 and No.4 journals are made wider to decrease noise and vibration, and those for the No.2 and No.3 journals are made narrower friction.

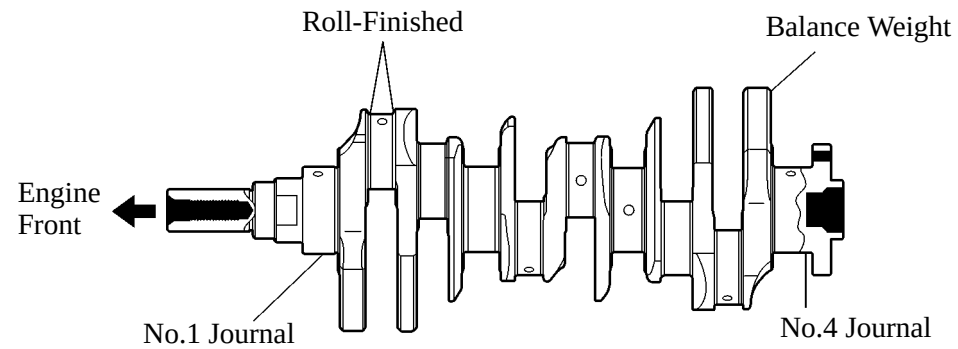

208EG72

8. Crankshaft Pulley


- The crankshaft pulley hub is made of aluminum to reduce weight and vibration.
- The rigidity of the torsional damper rubber has been optimized to reduce noise.

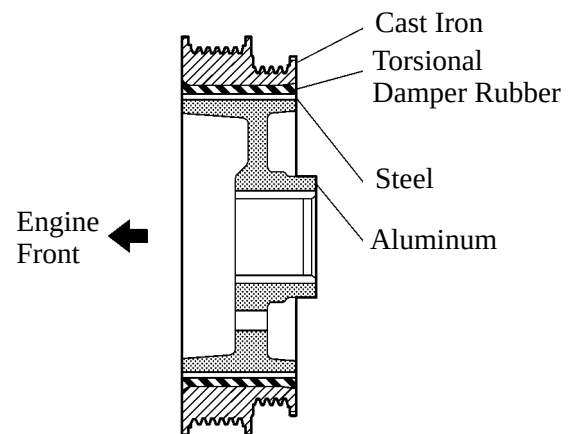


187EG14

■ COOLING SYSTEM

- The cooling system is a pressurized, forced-circulation type.
- A thermostat having a bypass valve is located on the water pump inlet side of the cooling circuit.

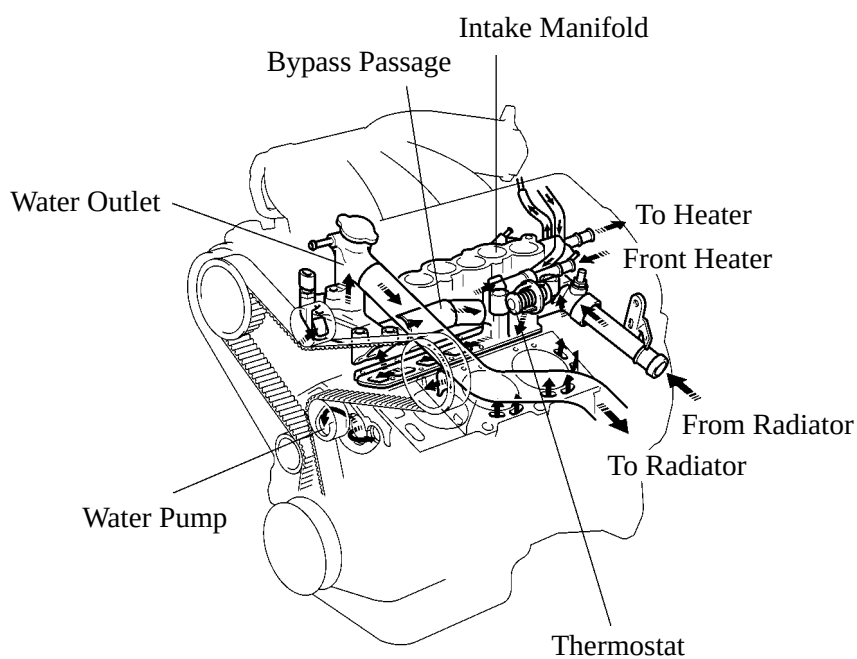

208EG119

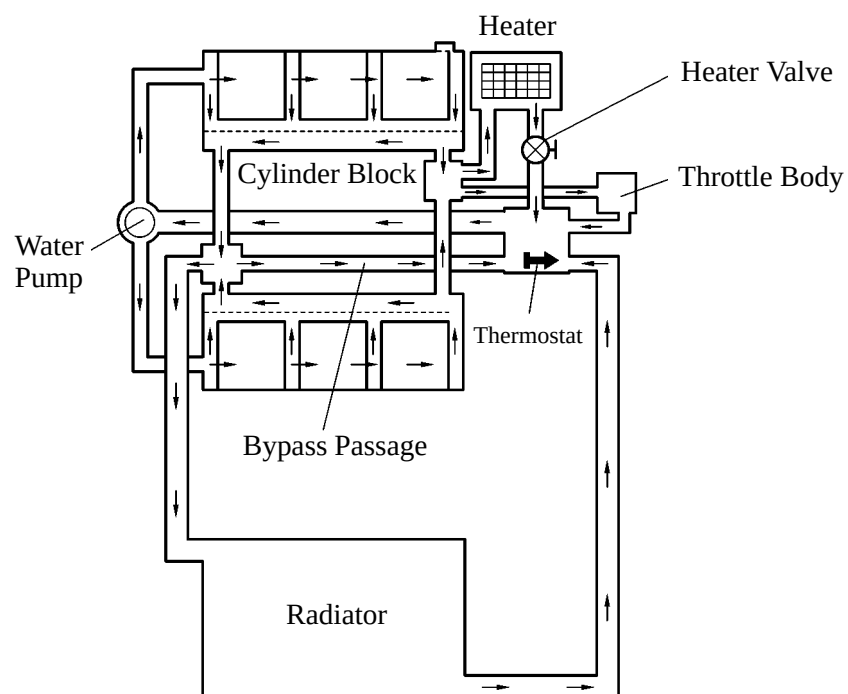

187EG25


► Specifications ◀

Engine Coolant	Capacity liters (US qts, Imp. qts)	9.2 (9.7, 8.1)
	Type	TOYOTA Long Life Coolant or Equivalent
Thermostat	Opening Temperature °C (°F)	80 – 84 (176 – 183)

■ INTAKE AND EXHAUST SYSTEM


1. General

- The adoption of the ETCS-i (Electronic Throttle Control System-intelligent) has realized excellent throttle control.
- The adoption of the ACIS (Acoustic Control Induction System) has improved the engine performance.
- The adoption of the air intake control system has improved engine noise reduction and performance. For details, see page EG-46.
- 2-way exhaust control system is provided to reduce noise and back pressure in the main muffler.

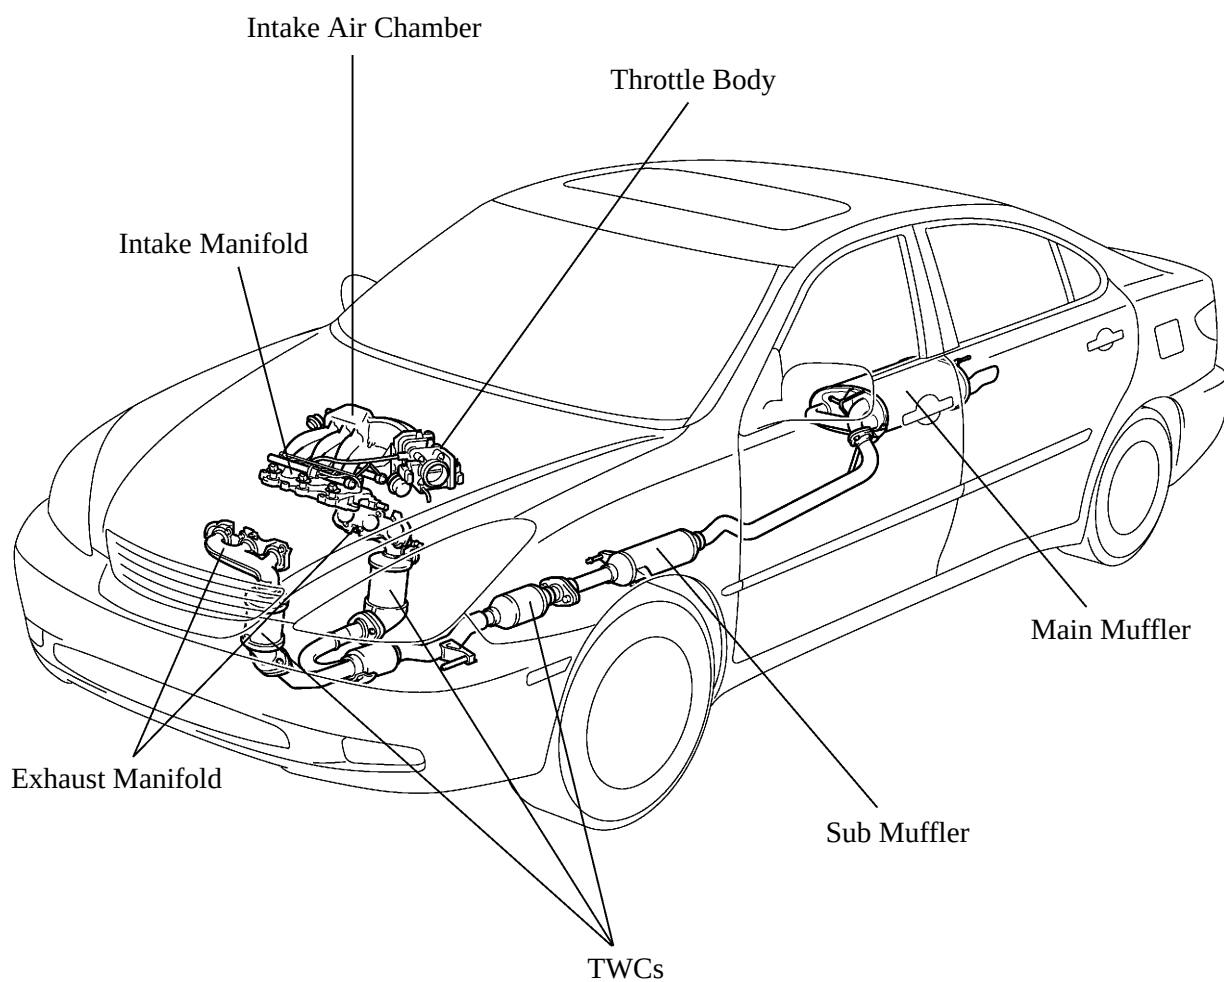

2. Throttle Body

- The link-less type ETCS-i has adopted and it realizes excellent throttle control.
For details of ETCS-i control, refer to see page EG-39.
- A DC motor with excellent response and minimal power consumption is used for the throttle control motor. The ECM performs the duty ratio control of the direction and the amperage of the current that flows to the throttle control motor in order to regulate the opening angle of the throttle valve.

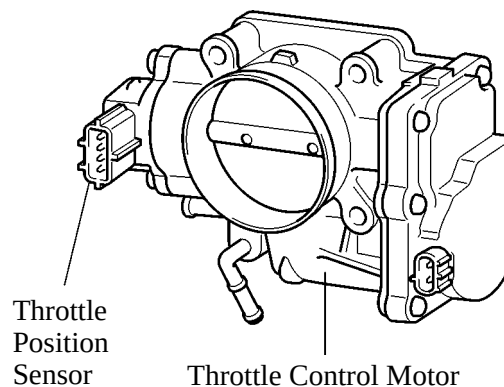


211EG34

3. Intake Air Chamber

The intake air chamber is made of plastics to realize lightweight.


The intake air chamber consists of upper and lower sections and contains an intake air control valve. This valve is activated by ACIS (Acoustic Control Induction System) and is used to alter the intake pipe length to improve the engine performance in all speed ranges. For details of ACIS control, refer to see page EG-42.

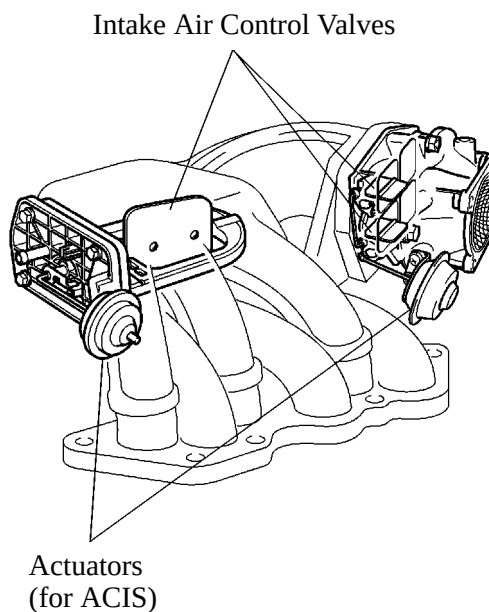

211EG19

4. Intake Manifold


- The port diameter of the intake manifold and the port length have been optimized.
- An engine coolant passage connects the left and right banks at the rear end of the intake manifold.
- The intake manifold gaskets has rubber coating applied onto surface, and provide superior durability.

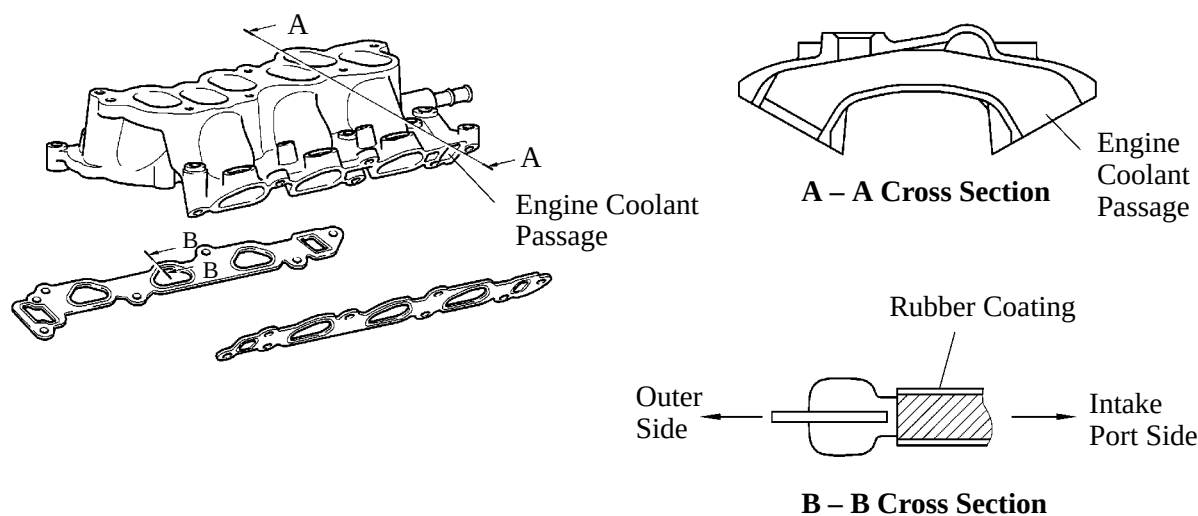

211EG35

5. Exhaust Manifold

- A stainless steel exhaust manifold is used for improving the warm-up of three-way catalytic converter and for weight reduction.
- The air fuel ratio sensor has been adopted to the exhaust manifold.
- An ultra thin-wall, high-cell metal type TWC (Three-Way Catalytic Converter) has been adopted. This TWC enables to improve exhaust emissions by optimizing the cells density.

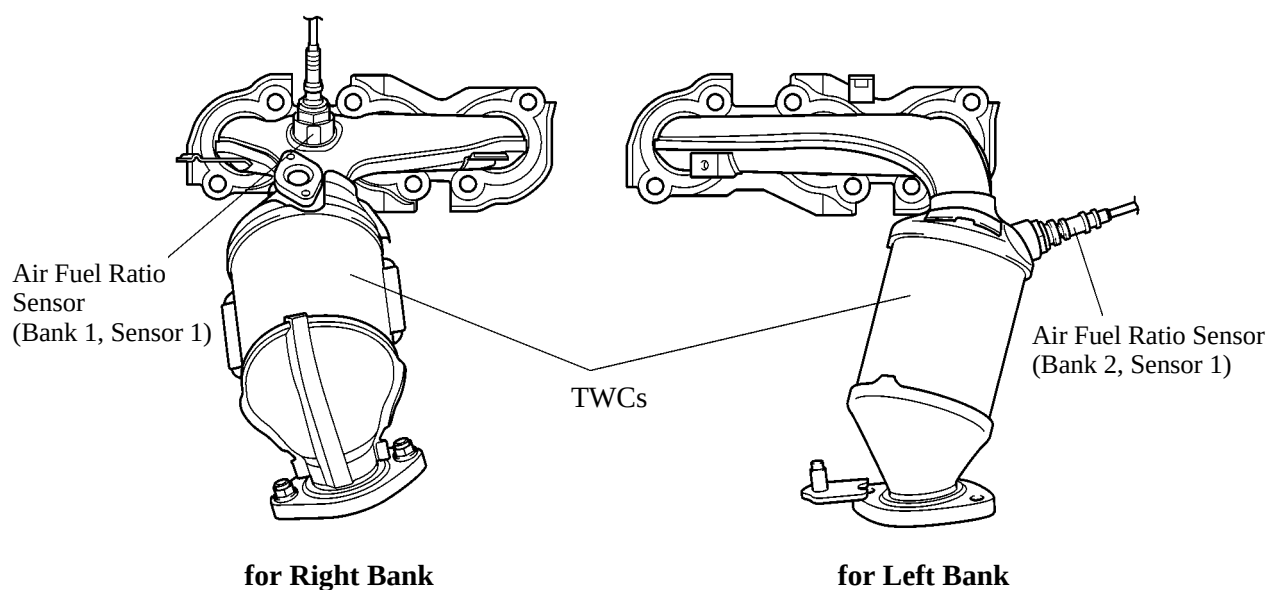


211EG09

208EG113

6. Exhaust Pipe

General

- An ultra thin-wall, high-cell ceramic type TWC has been adopted. This TWC enables to improve exhaust emissions by optimizing the cells density.
- 2-way exhaust control system is provided to reduce noise and back pressure in the main muffler.

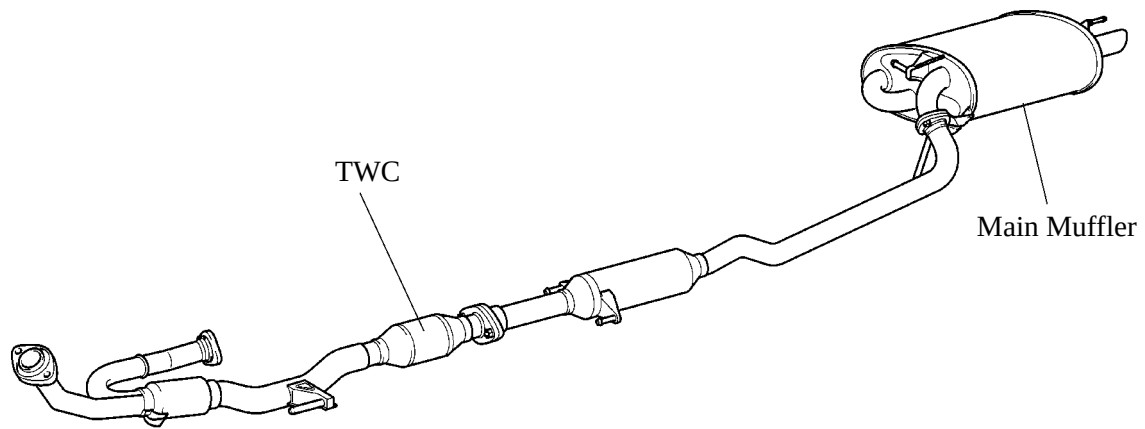

211EG32

2-Way Exhaust Control System

- A 2-way exhaust control system is used. This system reduces the back pressure by opening a variable valve that is enclosed in the main muffler.
- The valve opens steplessly in accordance with the operating condition of the engine, thus enabling a quieter operation at lower engine speeds, and reducing back pressure at higher engine speeds.

1) Construction

The control valve is enclosed in the main-muffler. When the exhaust gas pressure overcomes the spring pressure, the control valve opens steplessly in accordance with the exhaust gas pressure.


2) Operation

a. When Control Valve is Closed (low engine speed)

Since the pressure in the main muffler is low, the control valve is closed. Hence exhaust gas does not pass the bypass passage, and exhaust noise decreased by the main muffler.

b. When Control Valve is Open (middle to high engine speed)


The valve opens more as the engine speed and the back pressure in the muffler increase. This allows a large volume of exhaust gas to pass the bypass passage, thereby substantially decreasing the back pressure.

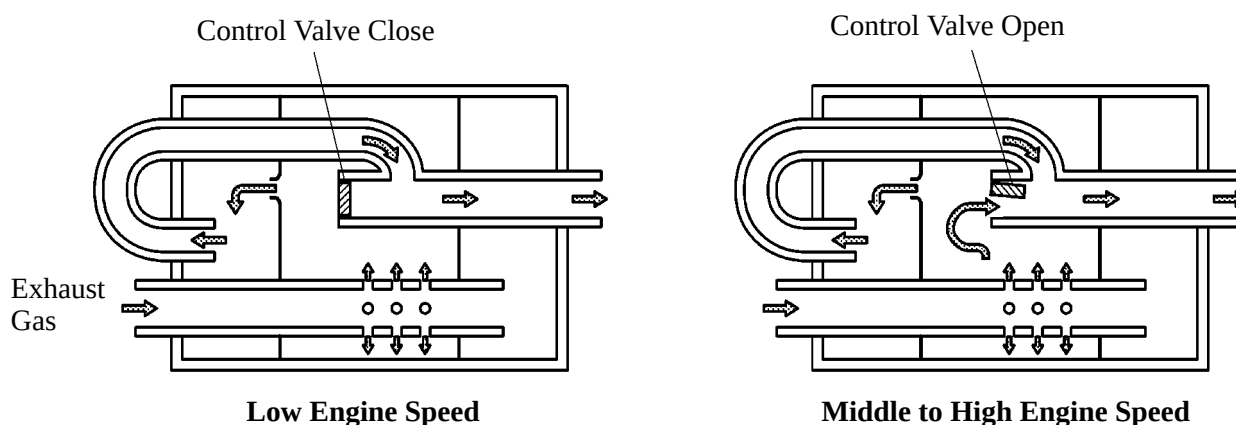

■ FUEL SYSTEM


1. General

- A fuel returnless system has been used to reduce evaporative emissions.
- A compact fuel pump in which a fuel filter and pressure regulator are integrated in the module fuel pump assembly has been adopted.
- A quick connector has been adopted to connect the fuel pipe with the fuel hose to improve serviceability.
- A compact 12-hole type injector with high atomizing performance has been adopted to improve the atomization of fuel. As the result, the air assist system used on '01 ES300 has been discontinued.
- A tether has been provided on the fuel filter cap to prevent the cap from being lost, which results in preventing the leakage of fuel or the evaporative gas.
- The quick-turn type fuel tank cap has been newly adopted to improve usability.
- The ORVR (On-board Refueling Vapor Recovery) system has been adopted. For details, see page xx.

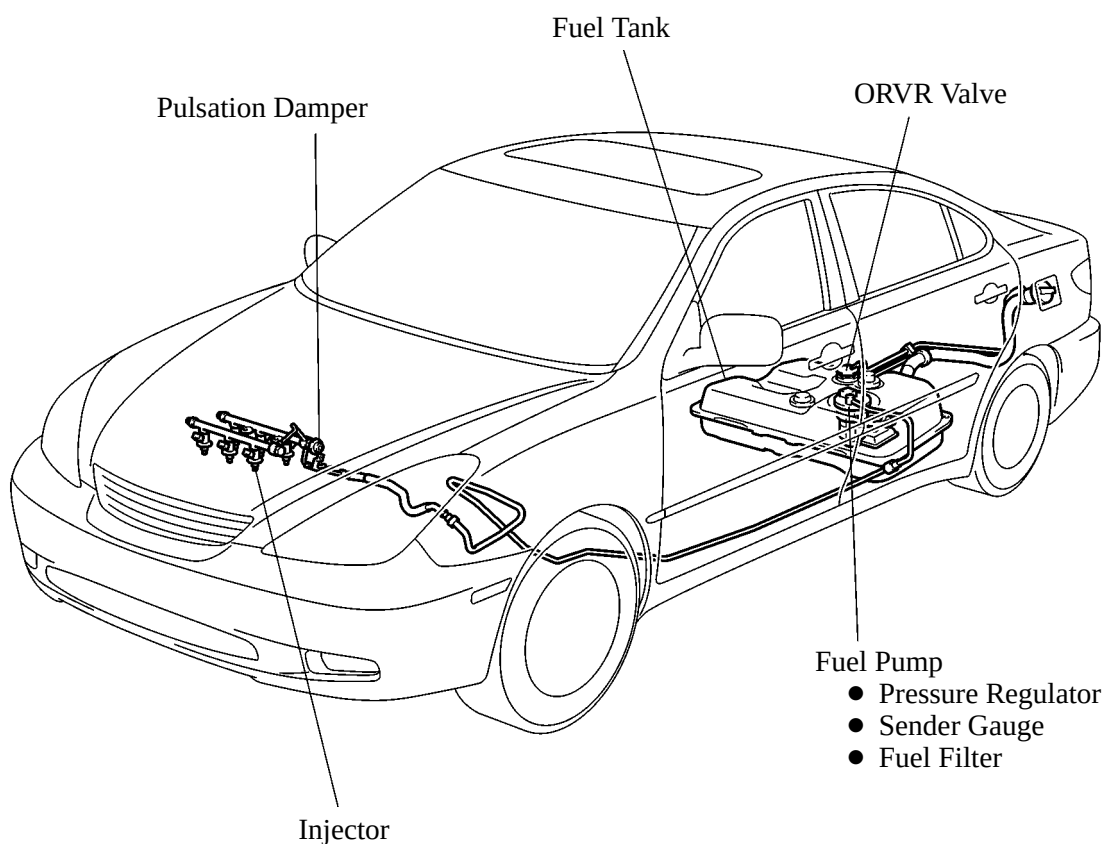

2. Fuel Returnless System


This system has been adopted to reduce the evaporative emission. As shown below, integrating the fuel filter, pressure regulator, and fuel sender gauge with fuel pump assembly, it possible to discontinue the return of fuel from the engine area and prevent temperature rise inside the fuel tank.

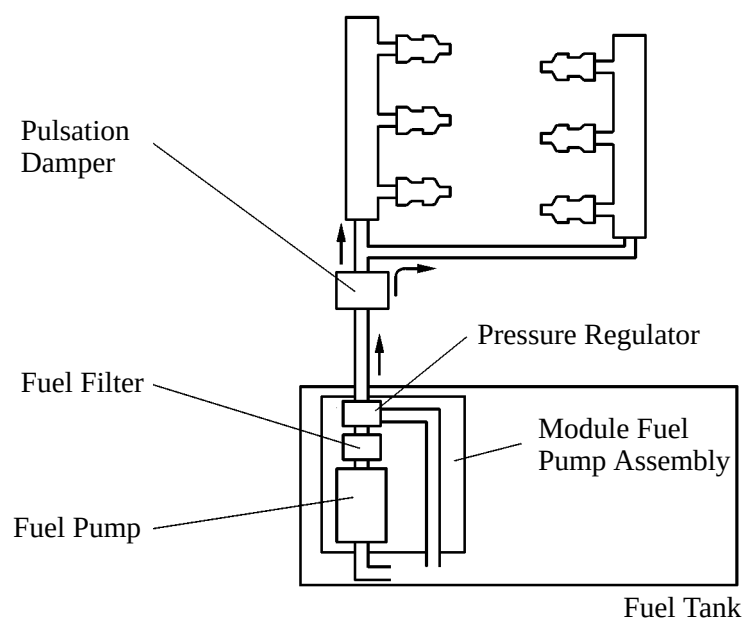

208EG117

3. Fuel Injector

The 12-hole type injector has been adopted to improve the atomization of fuel.

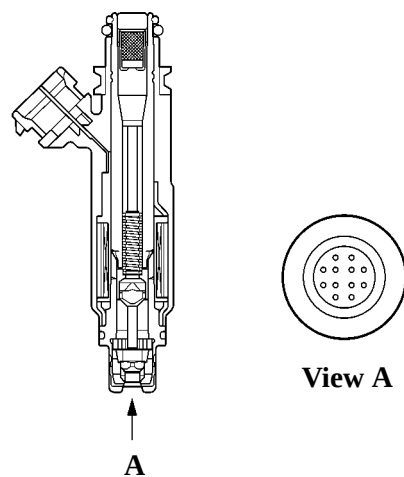


208EG118

4. Fuel Pump

A compact fuel pump in which a fuel pump filter, fuel pressure regulator, and sender gauge are integrated in the fuel pump assembly has been adopted.

► Specification of Fuel Pressure Regulator ◀

Adjusting Pressure kPa (kgf/cm ²)	324 ± 3.0 (3.3 ± 0.03)
--	---------------------------

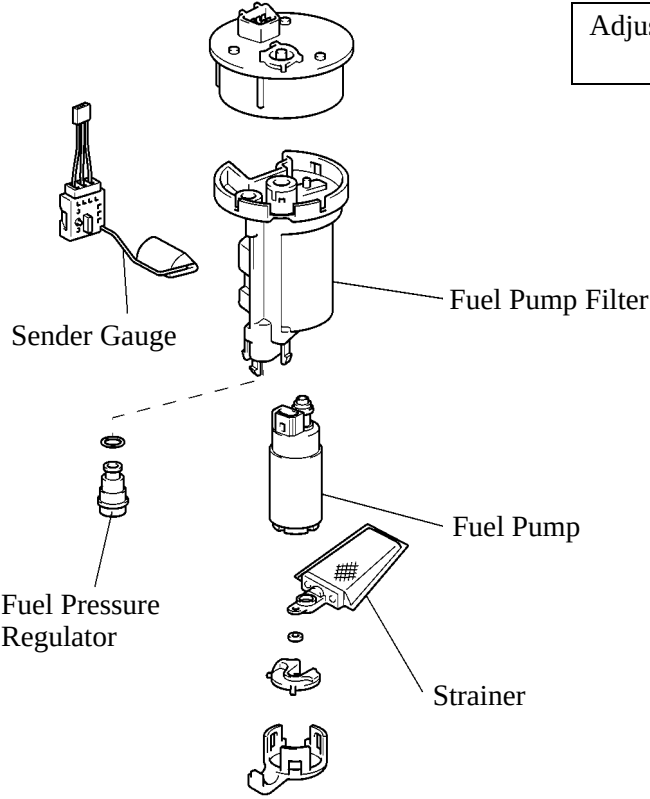


■ STARTING SYSTEM

Starter

1) General

- A compact and lightweight PS (Planetary reduction-Segment conductor motor) starter has been adopted on all models.
- Because the PS starter contains an armature that uses square-shaped conductors, and its surface functions as a commutator, it has resulted in both improving its output torque and reducing its overall length.
- In place of the field coil used in the conventional starter, the PS starter uses two types of permanent magnets: main magnets and interpolar magnets. The main magnets and interpolar magnets have been efficiently arranged to increase the magnetic flux and to shorten the length of the yoke.

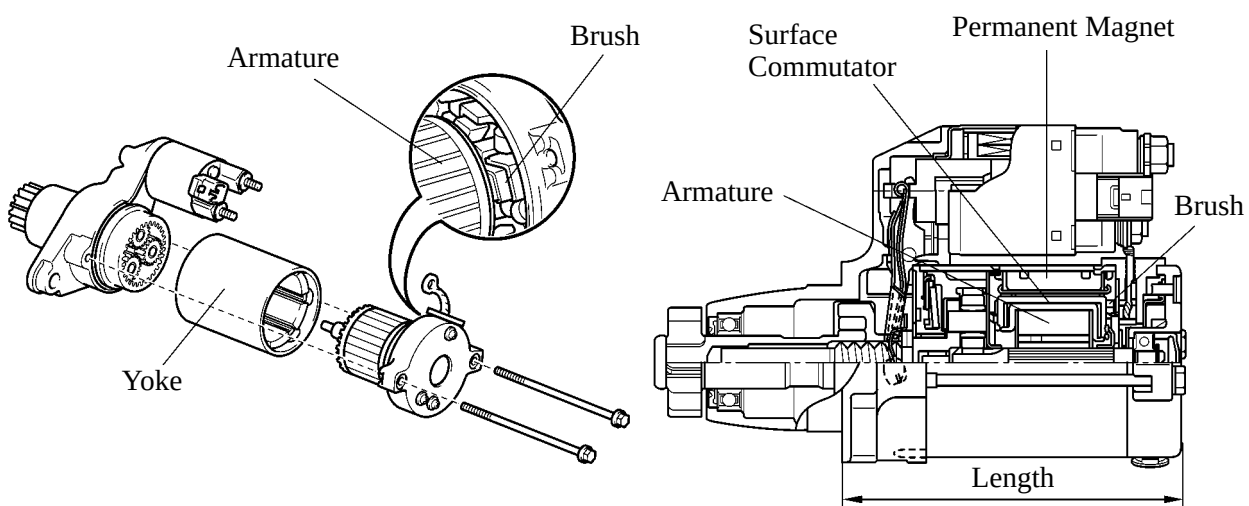

206EG18

206EG19


► Specifications ◀

Model	PS Starter	Conventional Type Starter
Length	128 mm (5.04 in.)	145 mm (5.71 in.)
Weight	2950 g	3800 g
Rating Voltage	12 V	12 V
Rating Output	1.6 kW	1.4 kW
Rotating of Direction	Counterclockwise*	←

*: Viewed from Pinion Side


2) Construction

- Instead of the construction of the armature coil of the conventional starter that uses round-shaped conductor wires, the PS starter uses square conductors. With this type of construction, the same conditions that are realized by winding numerous round-shaped conductor wires can be achieved without increasing the mass. As a result, the output torque has been increased, and the armature coil has been made more compact.
- Because the surface of the square-shaped conductors that are used in the armature coil functions as a commutator, the overall length of the PS starter has been shortened.

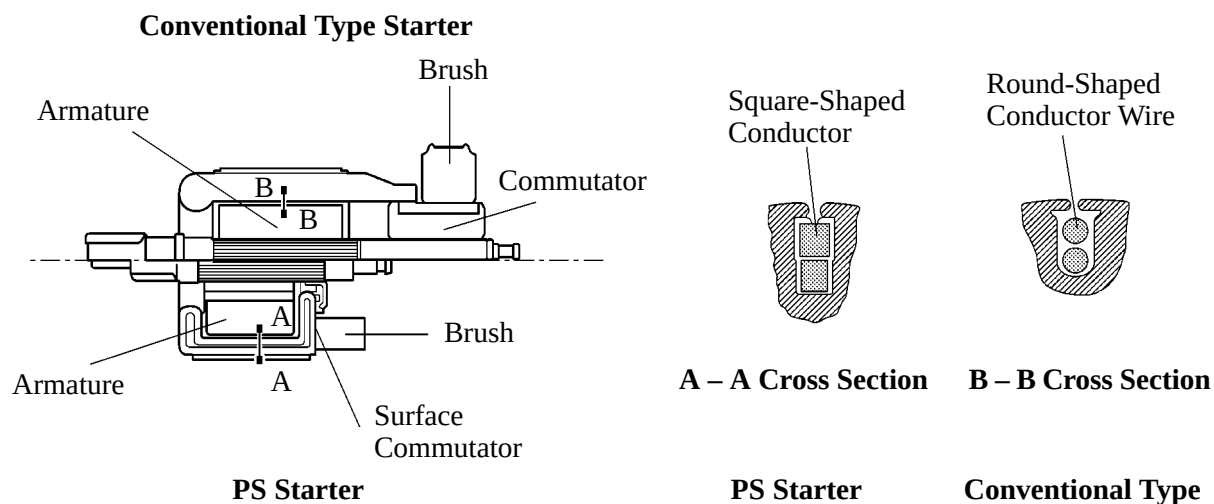

206EG20

- Instead of the field coils used in the conventional starter, the PS starter has adopted two types of permanent magnets: the main magnets and the interpolar magnets. The main and interpolar magnets are arranged alternately inside the yoke, allowing the magnetic flux that is generated between the main and interpolar magnets to be added to the magnetic flux that is generated by the main magnets. In addition to increasing the amount of magnetic flux, this construction shortens the overall length of the yoke.

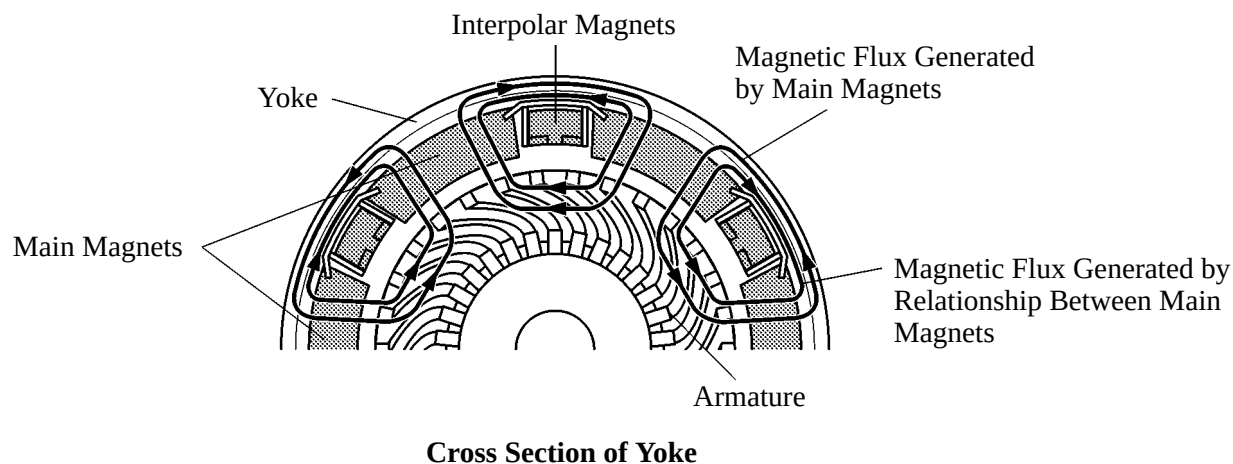


206EG21

ENGINE MOUNT

1. General

A 3-point support on the front subframe has been adopted. An active control engine mount has been adopted on the front engine mount and a hydraulic engine mount has been adopted on the right and left engine mounts to realize low noise and vibration and to achieve high levels of both riding comfort and drivability.

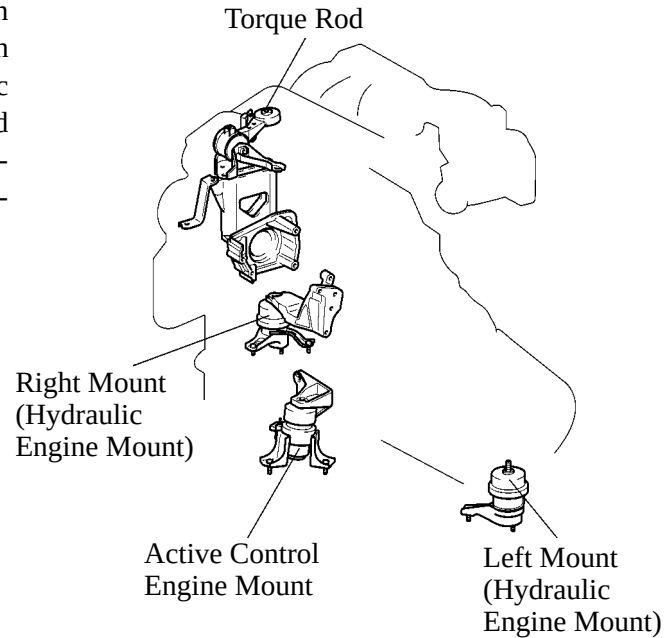


211EG11

2. Active Control Engine Mount

The operating range of the active control engine mount is during idling under the engine speeds of 900 rpm. Signals that are synchronized to the engine rpm are sent by the ECM to the VSV and the engine vacuum is utilized to vary the pressure of the intake air chamber in the active control engine mount. As a result, the diaphragm vibrates, and using the liquid as a medium, the rubber mount vibrates.

This vibration of the engine mount acts to cancel out the engine vibration during idle, thus reducing the vibration and noise at idle.

The engine mount's damping force to generate vibrations is adjusted through the effects of the orifice and the side branch.

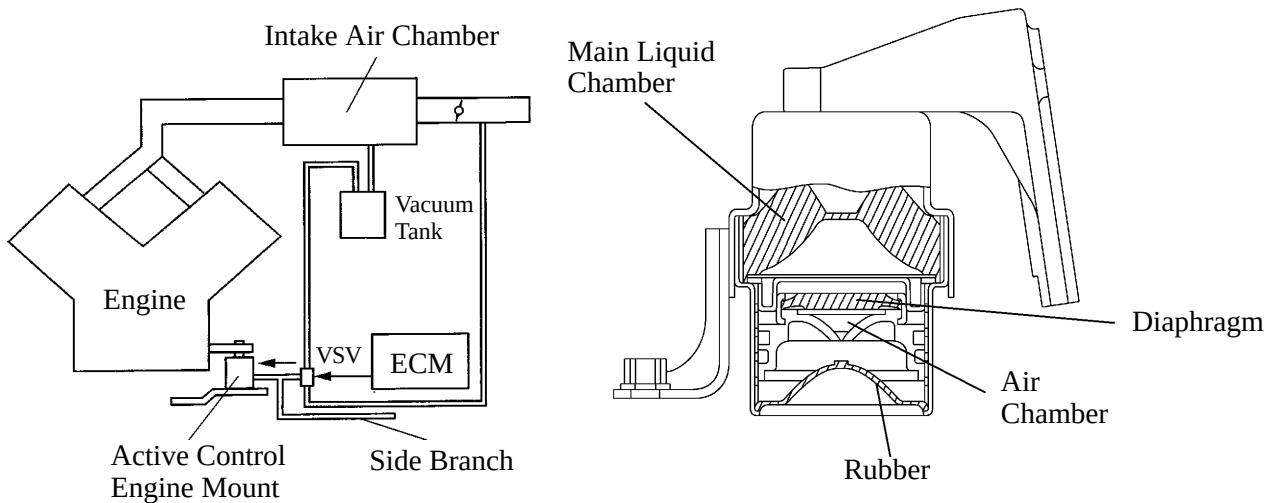

161ES46

211EG31

ENGINE CONTROL SYSTEM


1. General

The engine control system of the 1MZ-FE engine has following system.


System	Outline	'02 ES300	'01 ES300
SFI (Sequential Multiport Fuel Injection) (For details, see page EG-38)	An L-type SFI system directly detects the intake air mass with a hot wire type mass air flow meter.	○	←
ESA (Electronic Spark Advance) (For details, see page EG-38)	Ignition timing is determined by the ECM based on signals from various sensors. The ECM corrects ignition timing in response to engine knocking.	○	←
ETCS-i (Electronic Throttle Control System-intelligent) (For details, see page EG-39)	Optimally controls the throttle valve opening in accordance with the amount of accelerator pedal effort and the condition of the engine and the vehicle.	○	—
VVT-i (Variable Valve Timing-intelligent) (For details, see page EG-41)	Controls the intake camshaft to an optimal valve timing in accordance with the engine condition.	○	←
ACIS (Acoustic Control Induction System) (For details, see page EG-42)	The intake air passages are switched according to the engine speed and throttle valve opening angle to provide high performance in all speed ranges.	○	←
Air Intake Control System (For details, see page EG-46)	The intake air duct is divided into two areas, and the ECM controls the air intake control valve and the actuator that are provided in one of the areas to reduce the amount of engine noise.	○	—
Fuel Pump Control	Fuel pump operation is controlled by signal from the ECM.	○	←
Air Fuel Ratio Sensor, Oxygen Sensor Heater Control	Maintains the temperature of the air fuel ratio sensor or oxygen sensor at an appropriate level to increase accuracy of detection of the oxygen concentration in the exhaust gas.	○	←
Evaporative Emission Control (For details, see page EG-47)	● The ECM controls the purge flow of evaporative emission (HC) in the charcoal canister in accordance with engine conditions. ● Using 3 VSVs and a vapor pressure sensor, the ECM detects any evaporative emission leakage occurring between the fuel tank and the charcoal canister through the changes in the tank pressure.	○	←
Active Control Engine Mount (For details, see page EG-29)	The damping characteristic of the front engine mount is controlled variably to reduce idling vibration.	○	←
Air Conditioning Cut-off Control	By turning the air conditioner compressor ON or OFF in accordance with the engine condition, drivability is maintained.	○	←
Engine Immobiliser	Prohibits fuel delivery and ignition if an attempt is made to start the engine with an invalid ignition key.	○	←
Diagnosis (For details, see page EG-52)	When the ECM detects a malfunction, the ECM diagnoses and memorizes the failed section.	○	←
	To increase the speed for processing the signals, the 32-bit CPU of the ECM has been adopted.	○	—
Fail-Safe (For details, see page EG-53)	When the ECM detects a malfunction, the ECM stops or controls the engine according to the data already stored in the memory.	○	←

2. Construction

The configuration of the engine control system in the 1MZ-FE engine in the '02 ES300 is as shown in the following chart.

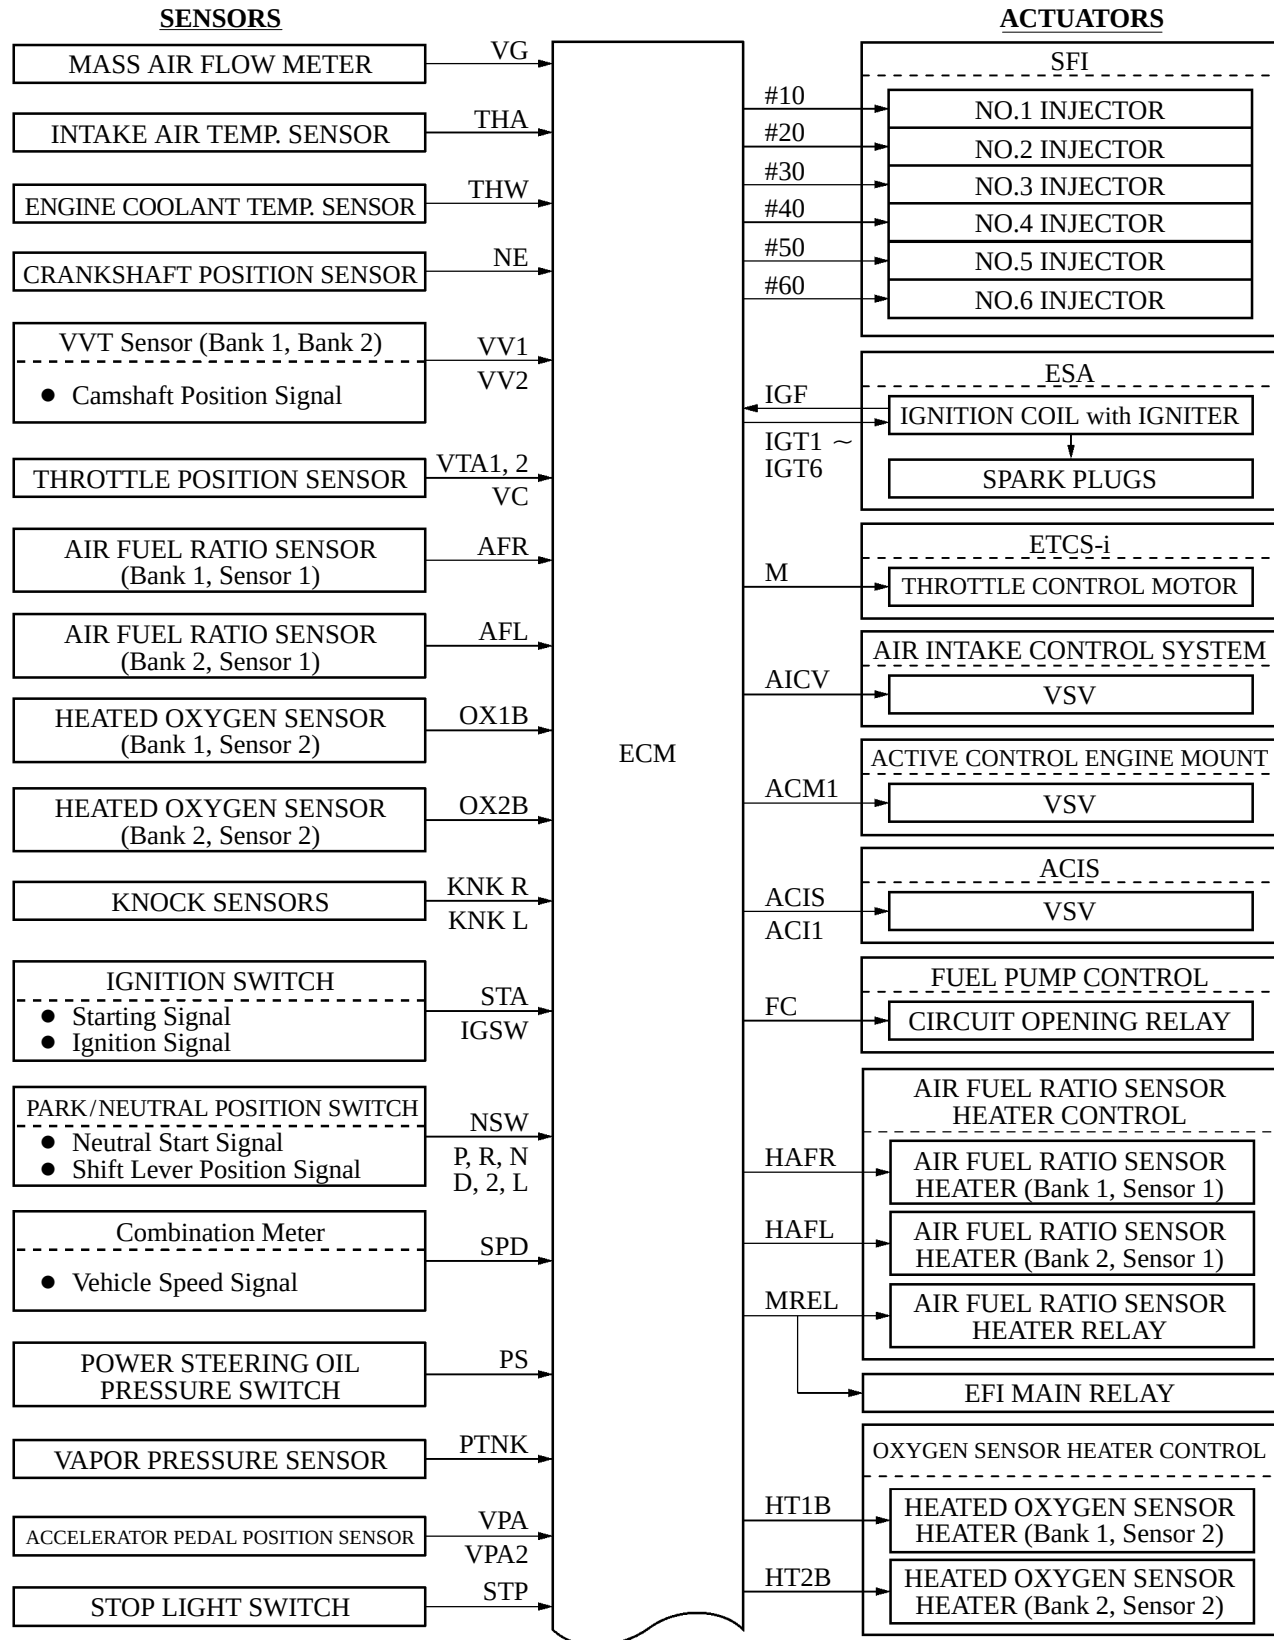

(Continued)

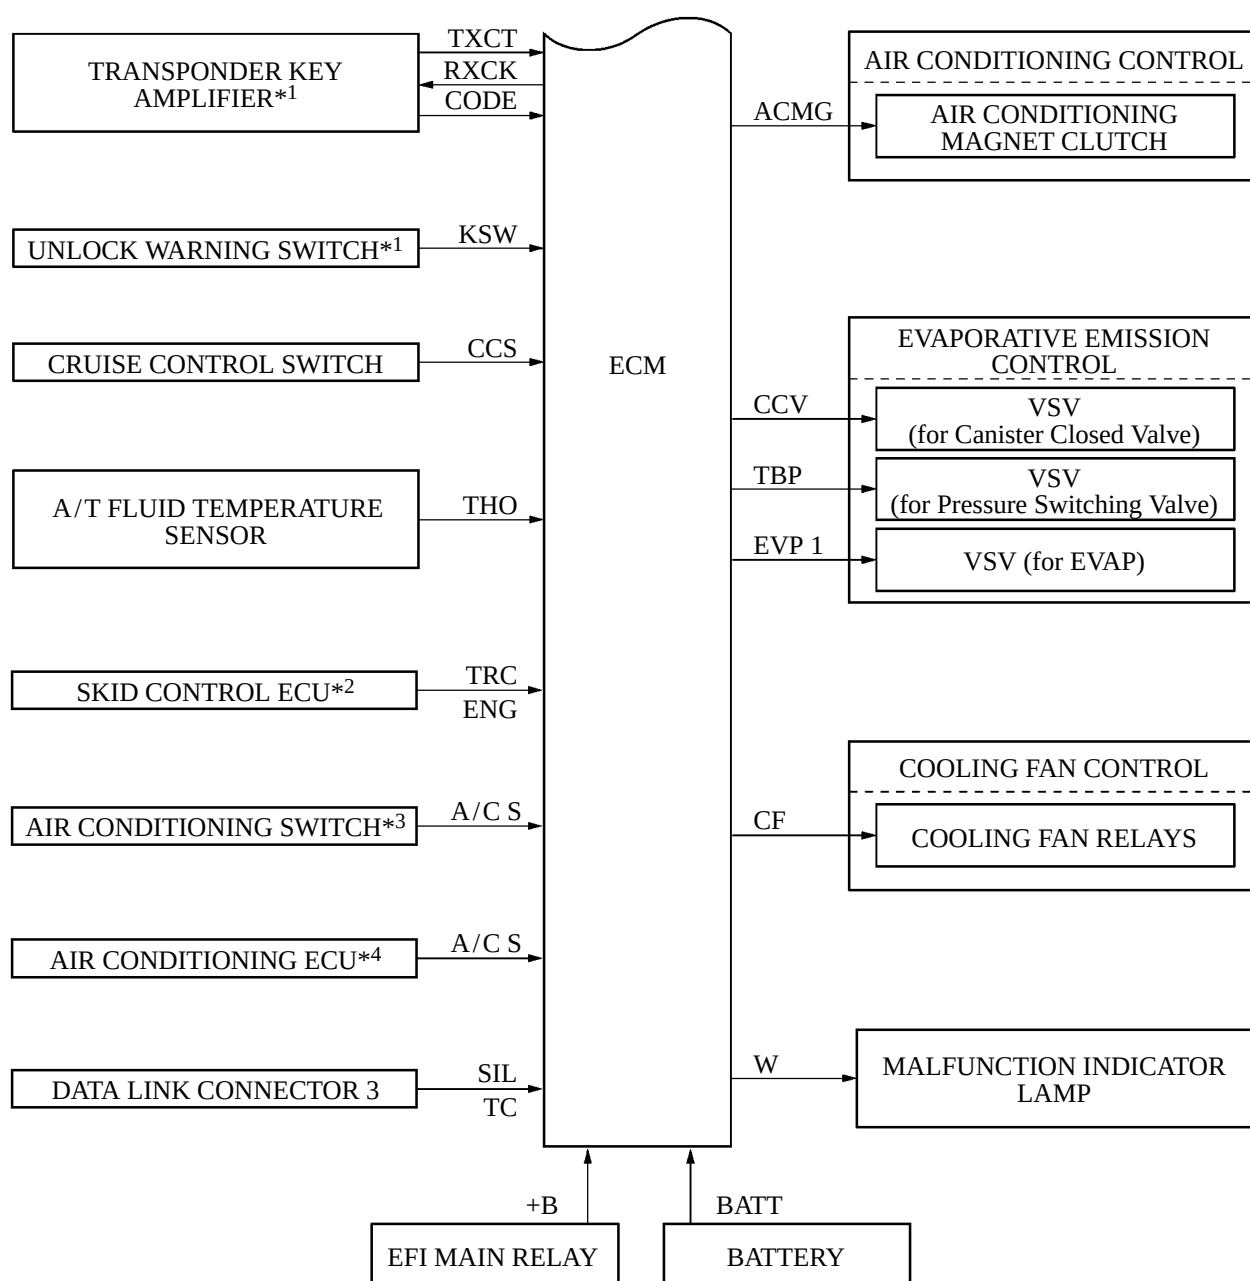


*1: with Engine Immobiliser System

*2: with VSC System

*3: with Manual Air Conditioning System

*4: with Automatic Air Conditioning System


3. Engine Control System Diagram

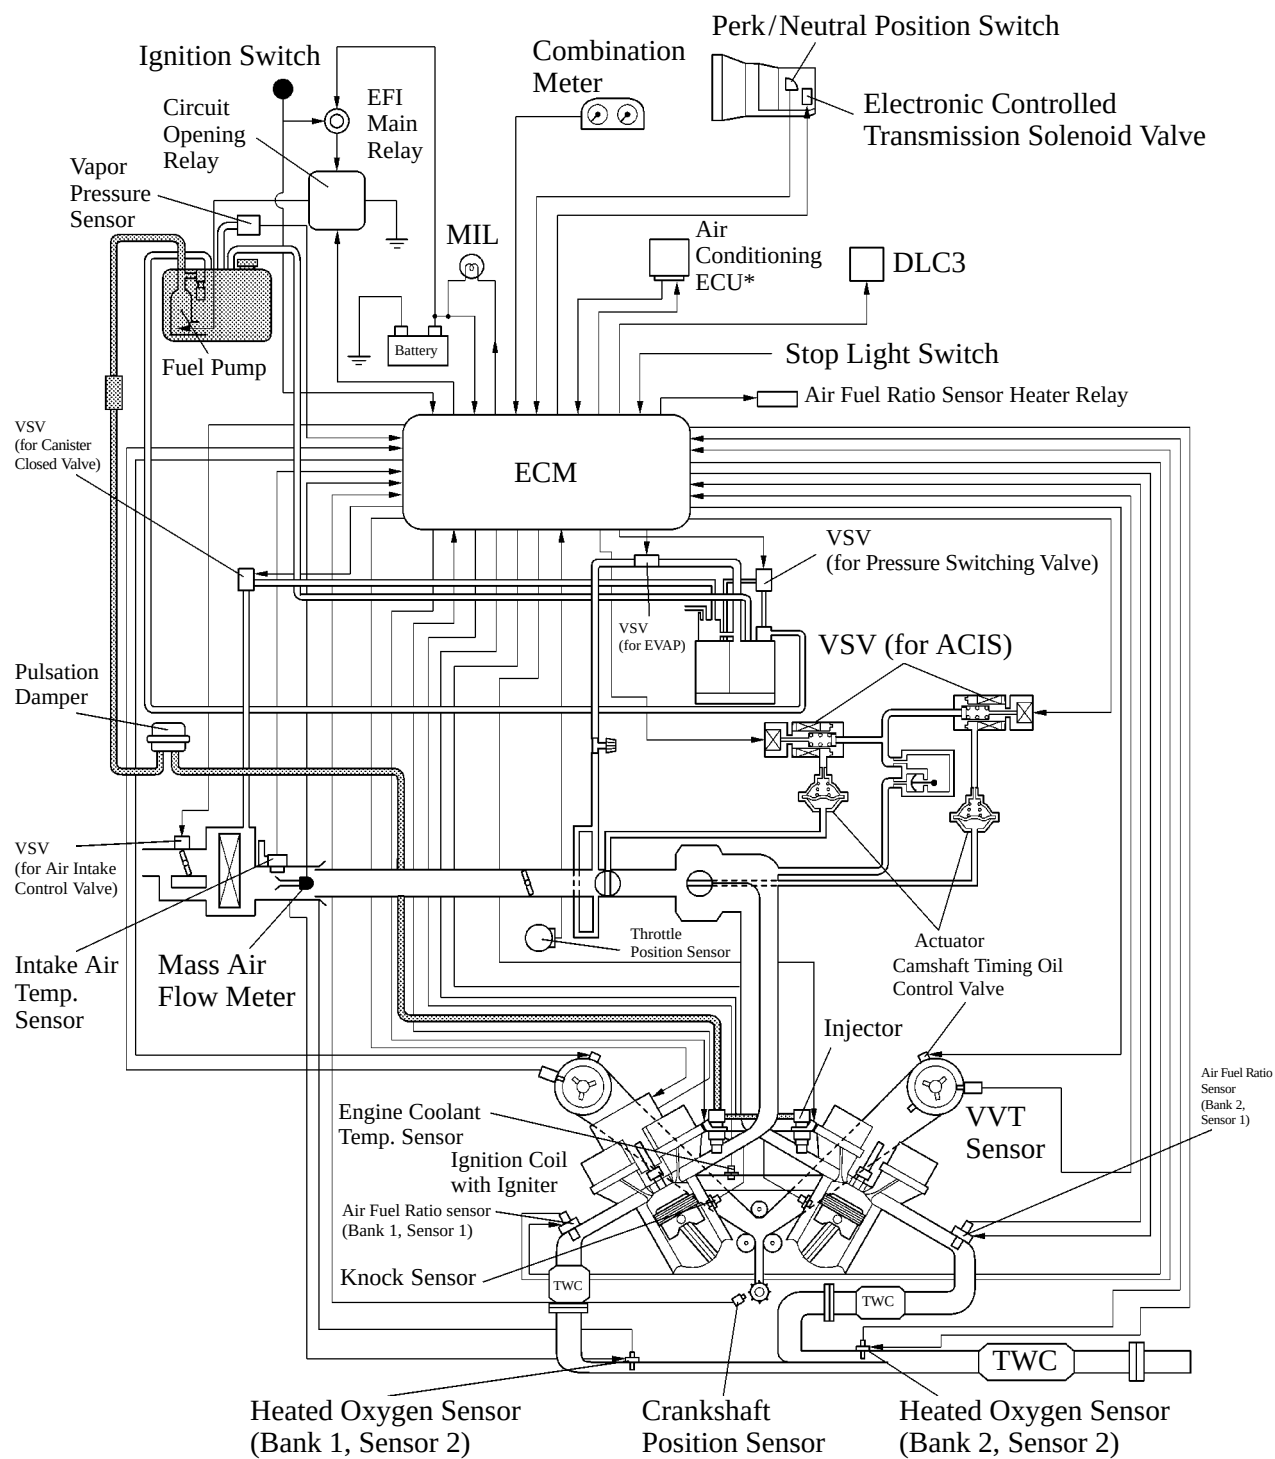

*: with Automatic Air Conditioning System

211EG14

4. Layout of Main Component

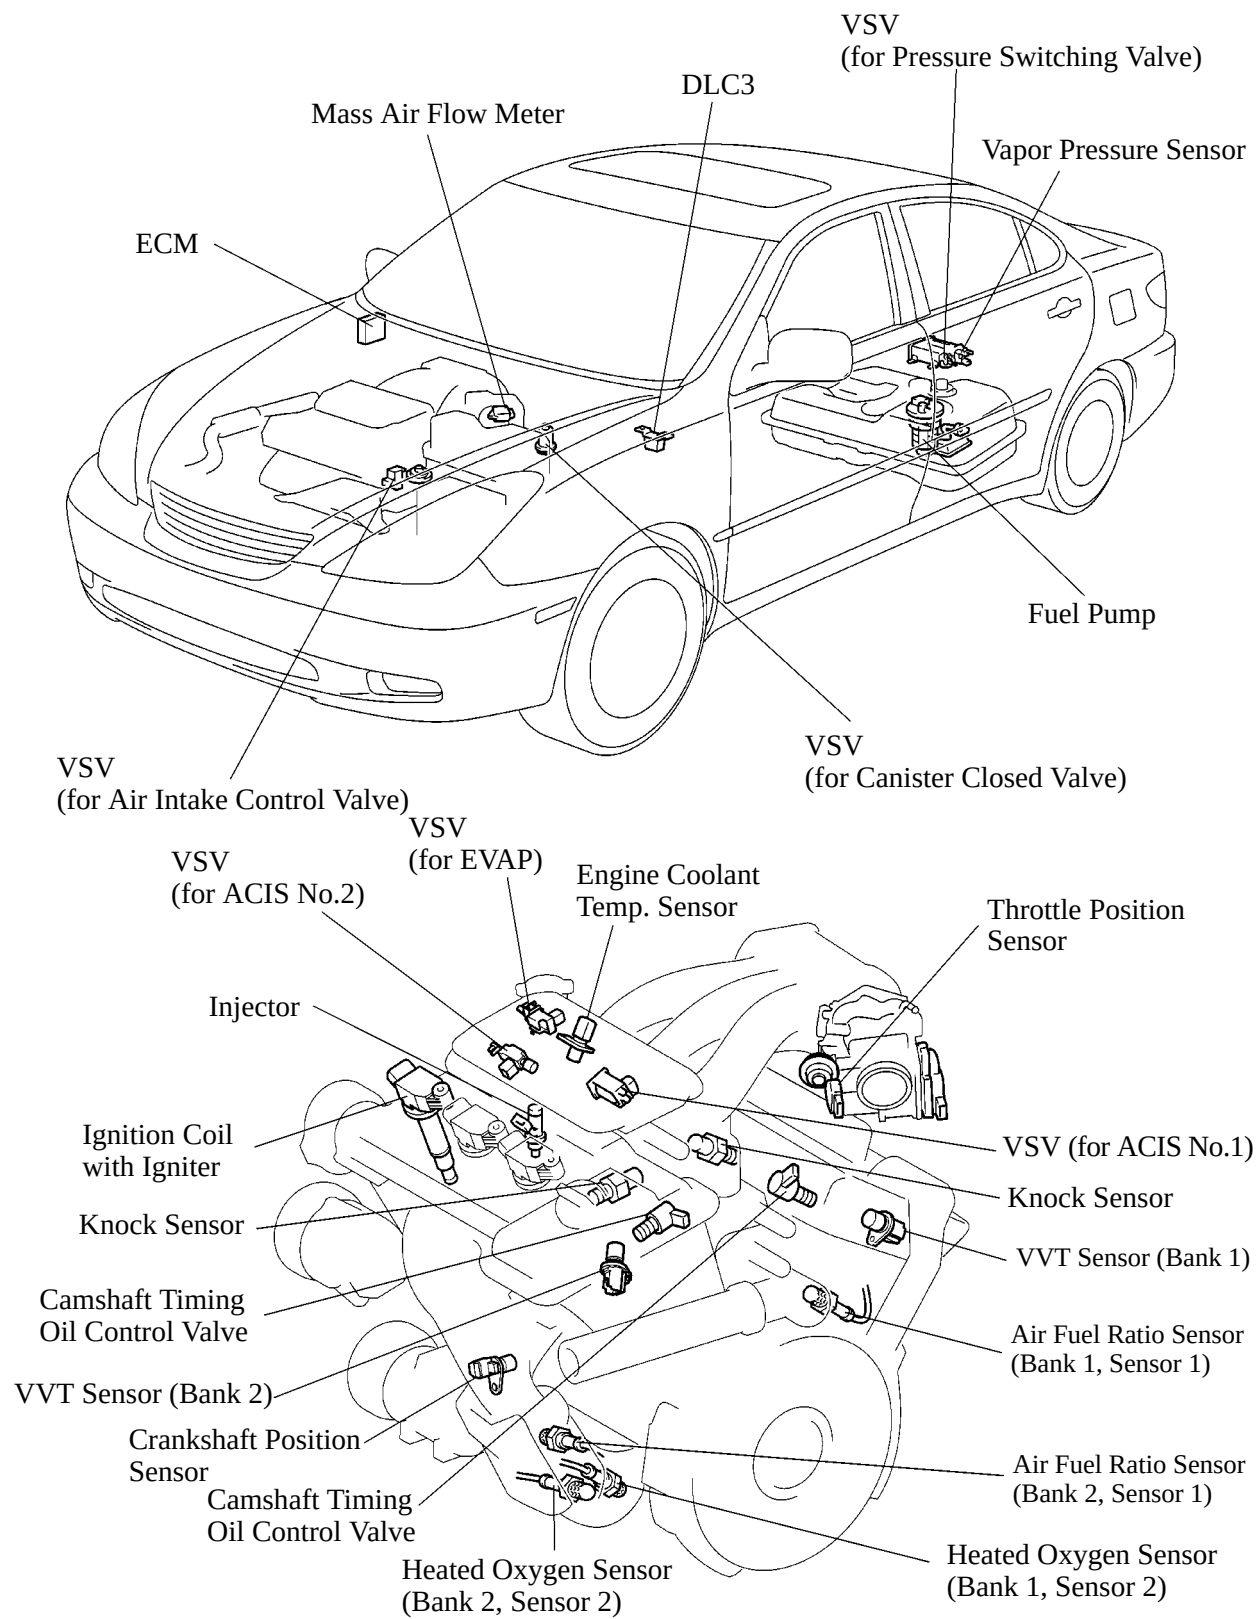

5. Main Components of Engine Control System


General

The following table compares the main components.

Components	New		Previous	
	Outline	Quantity	Outline	Quantity
ECM	32-bit CPU	1	16-bit CPU	1
Mass Air Flow Meter	Hot-wire Type	1	←	
Crankshaft Position Sensor (Rotor Teeth)	Pick-up Coil Type (36-2)	1	←	
VVT Sensor [Bank 1] (Rotor Teeth)	Pick-up Coil Type (3)	1	←	
VVT Sensor [Bank 2] (Rotor Teeth)	Magnetic Resistance Element Type (3)	1	Pick-up Coil Type (3)	1
Throttle Position Sensor	Linear Type	1	←	
Accelerator Pedal Position Sensor	Linear Type	1	—	
Knock Sensor	Built-in Piezoelectric Type	2	←	
Air Fuel Ratio Sensor (Bank 1, Sensor 1) (Bank 2, Sensor 1)	with Heater Type	2	←	
Oxygen Sensor (Bank 1, Sensor 2) (Bank 2, Sensor 2)	with Heater Type	2	with Heater Type	1
Injector	12-Hole Type	6	4-Hole Type	6


Mass Air Flow Meter

- This mass air flow meter, which is a plug-in type, allows a portion of the intake air to flow through the detection area. By directly measuring the mass and the flow rate of the intake air, the detection precision has been improved and the intake air resistance has been reduced.
- This mass air flow meter has a built-in intake air temperature sensor.

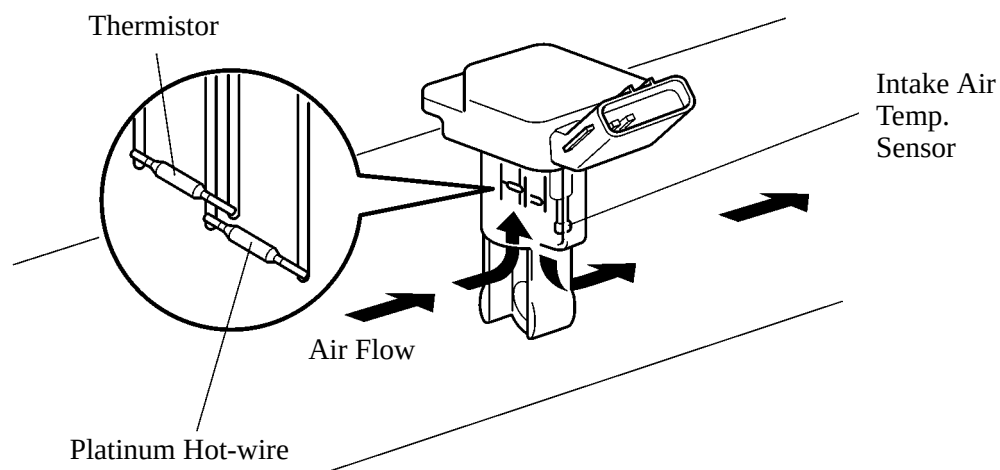

Crankshaft Position Sensor


The timing rotor of the crankshaft consists of 34 teeth, with 2 teeth missing. The crankshaft position sensor outputs the crankshaft rotation signals every 10° , and the missing teeth are used to determine the top-dead-center.

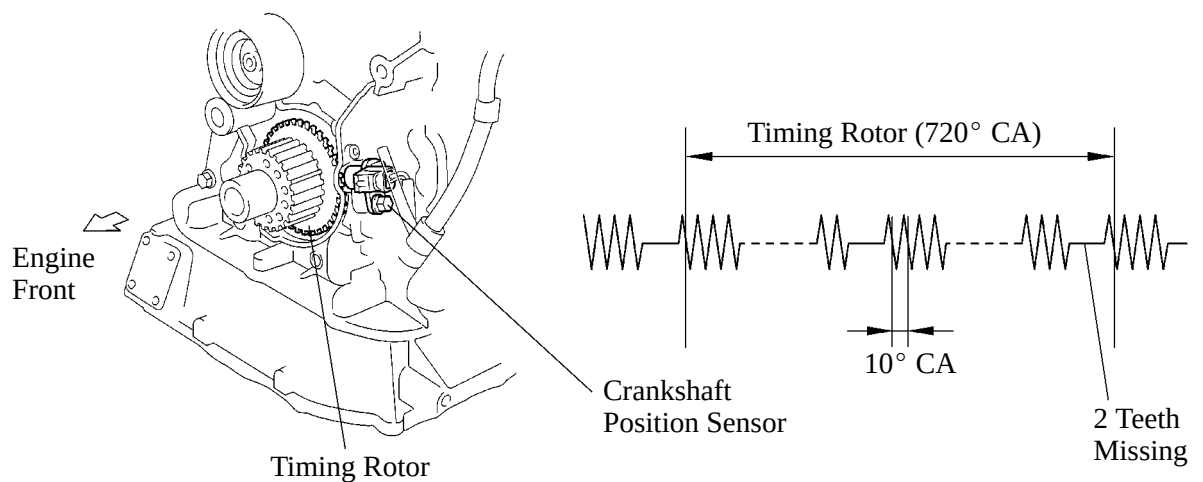

208EG40

VVT Sensor


The magnetic resistance element type VVT sensor is mounted on the left side of cylinder head and the conventional type VVT sensor is mounted on the right side of cylinder head. To detect the camshaft position, a timing rotor that is provided on the VVT-i controller is used to generate 3 pulses for every 2 revolutions of the crankshaft.

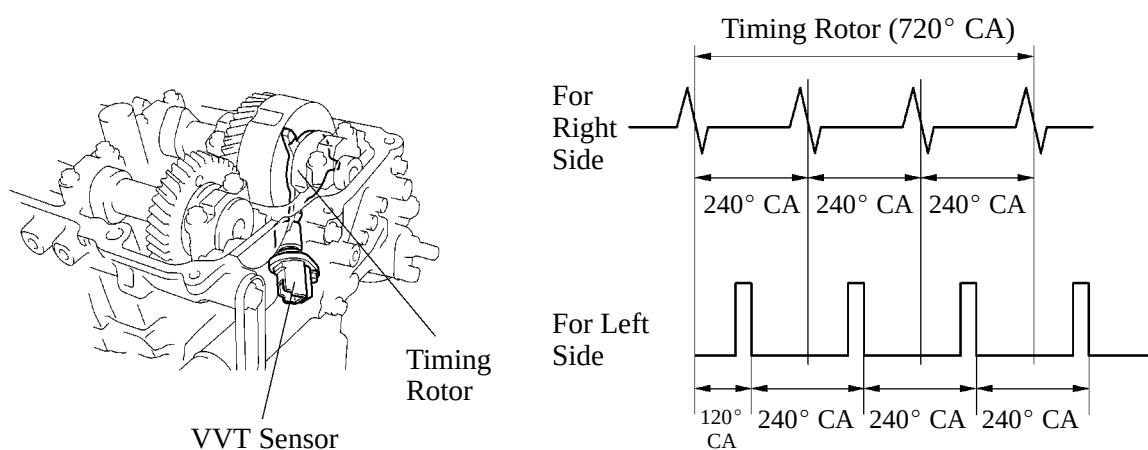

211EG16

Throttle Position Sensor


This sensor converts the throttle valve opening angles into electronic signals with two differing characteristics and outputs them to the ECM. One is the VTA signal that linearly outputs the voltage along the entire range of the throttle valve opening angle. The other is the VTA 2 signal that outputs an offset voltage.

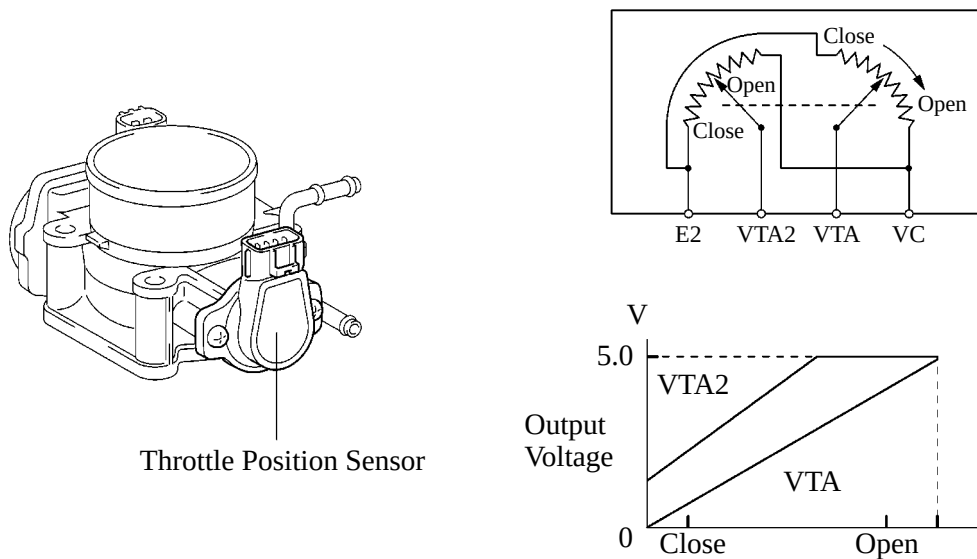

208EG42

Accelerator Pedal Position Sensor

This sensor converts the accelerator pedal depressed angles into electric signals with two differing characteristics and outputs them to the ECM. One is the VPA signal that linearly outputs the voltage along the entire range of the accelerator pedal depressed angle. The other is the VPA2 signal that outputs an offset voltage.

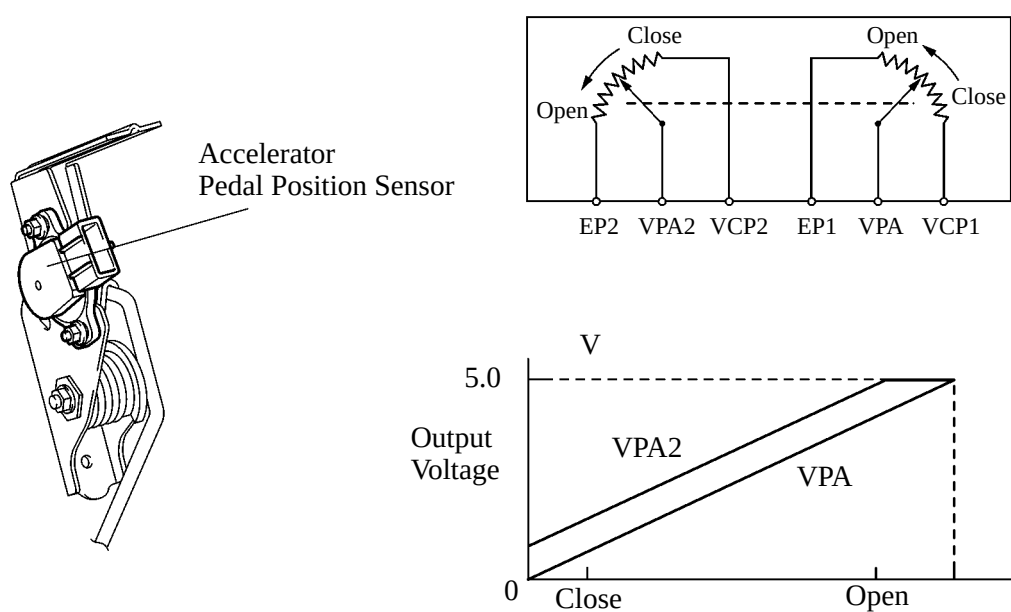


208EG27

6. SFI (Sequential Multiport electronic Fuel Injection) System

- An L-type SFI system directly detects the intake air mass with a hot wire type mass air flow meter.
- An independent injection system (in which fuel is injected once into each cylinder for each two revolution of the crankshaft) has been adopted.
- There are two types of fuel injection:
 - a) One is synchronous injection in which corrections based on the signals from the sensors are added to the basic injection duration so that injection occurs always at the same timing.
 - b) The other is non-synchronous injection in which injection is effected by detecting the requests from the signals of the sensors regardless of the crankshaft angle.

Furthermore, to protect the engine and improve fuel economy, the system effects fuel cutoff in which the injection of fuel is stopped temporarily in accordance with the driving conditions.

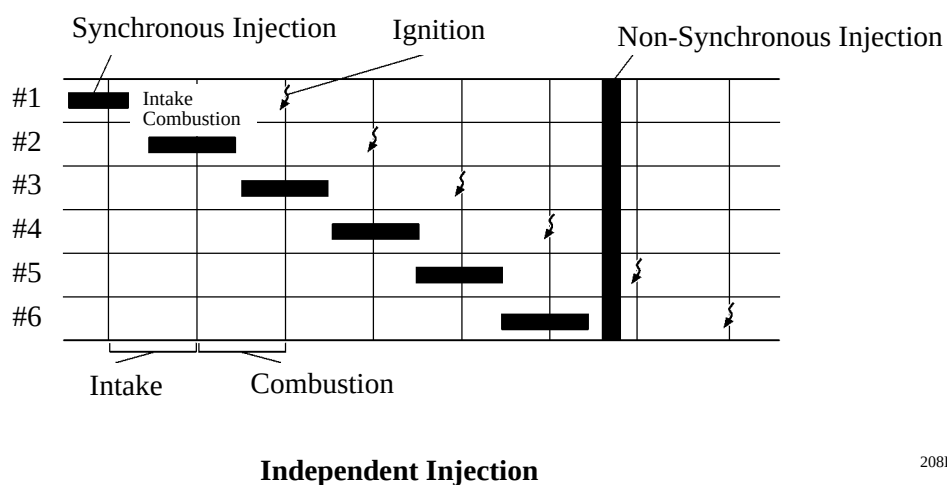

208EG43

7. ESA (Electronic Spark Advance)


This system selects the optimal ignition timing in accordance with the signals received from the sensors and sends the (IGT) ignition signal to the igniter. The default ignition timing is set to 5° BTDC.

8. ETCS-i (Electronic Throttle Control System-intelligent)

General

- In the conventional throttle body, the throttle valve opening is determined invariably by the amount of the accelerator pedal effort. In contrast, the ETCS-i uses the ECM to calculate the optimal throttle valve opening that is appropriate for the respective driving condition and uses a throttle control motor to control the opening.
- The accelerator cable and link have been discontinued, and an accelerator position sensor has been provided on the accelerator pedal.

► System Diagram ◀

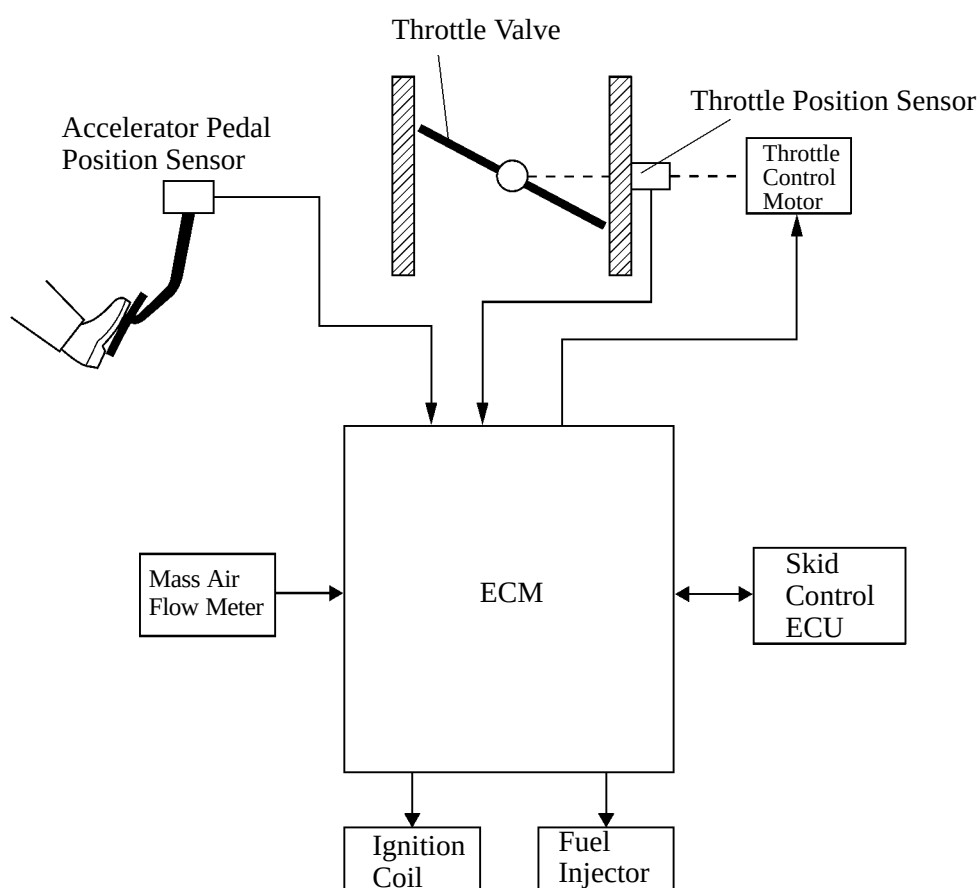

Operation**1) General**

The ECM drives the throttle control motor by determining the target throttle valve opening in accordance with the respective vehicle operating condition.

- Idle Speed Control
- Shift Shock Reduction Control
- Cruise Control

2) Idle Speed Control

Controls the ECM and the throttle valve in order to constantly effect ideal idle speed control.

3) Shift Shock Reduction Control

The throttle control is synchronized to the ECT (Electronically Controlled Transmission) control during the shifting of the transmission in order to reduce the shift shock.

4) TRAC Throttle Control

As part of the TRAC system, the throttle valve is closed by a demand signal from the skid control ECU if an excessive amount of slippage is created at a driving wheel, thus facilitating the vehicle in ensuring stability and driving force.

5) VSC Coordination Control

In order to bring the effectiveness of the VSC system control into full play, the throttle valve opening angle is controlled by effecting a coordination control with the skid control ECU.


6) Cruise Control

An ECM with an integrated cruise control ECU directly actuates the throttle valve to effect the operation of the cruise control.


9. VVT-i (Variable Valve Timing-intelligent) System

General

The VVT-i system is designed to control the intake camshaft within a wide range of 60° (of crankshaft angle) to provide a valve timing that is optimally suited to the engine condition, thus realizing improved torque in all the speed ranges and fuel economy, and reduction of exhaust emissions. The actual intake valve timing is feedback by means of the camshaft position sensor for constant control to the target valve timing.

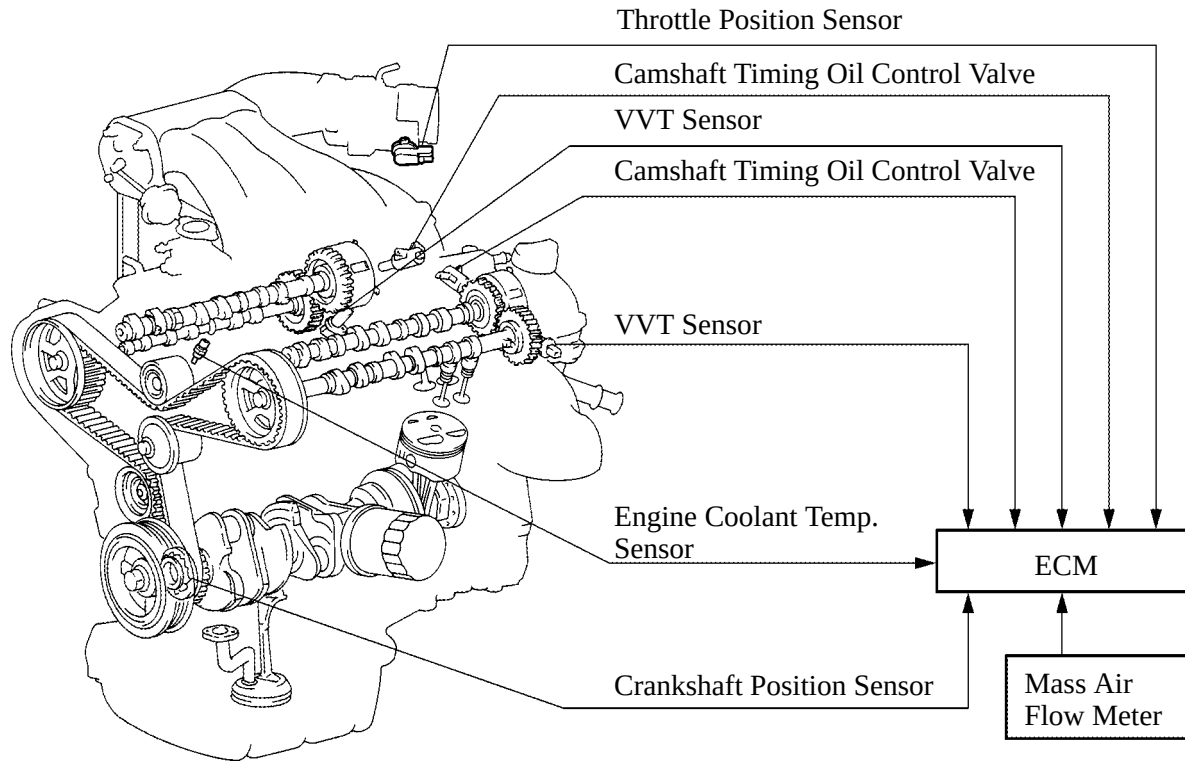

211EG17

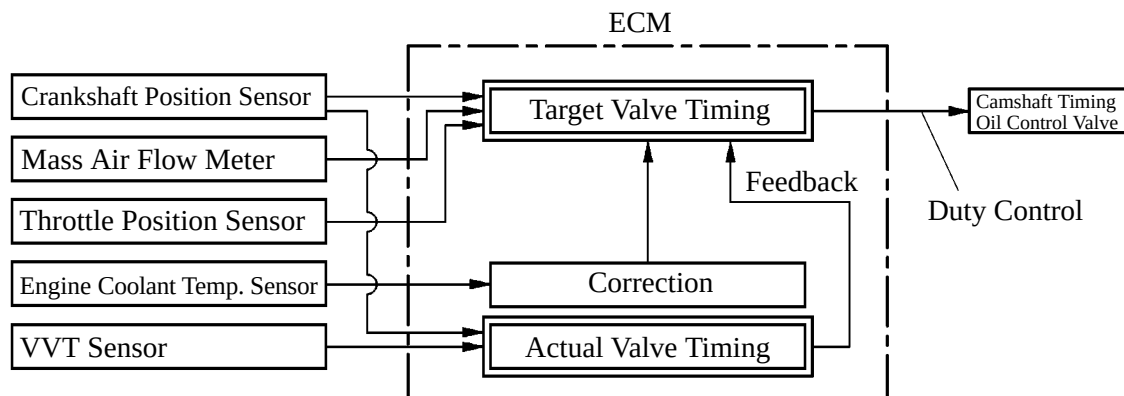


157EG23

10. ACIS (Acoustic Control Induction System)

General


The ACIS is realized by using a bulkhead to divide the intake manifold into 3 stages, with an intake air control valves in the bulkhead being opened and closed to vary the effective length and intake area of the intake manifold in accordance with the engine speed and throttle valve opening angle. This increases the power output in all ranges from low to high speed.

► System Diagram ◀

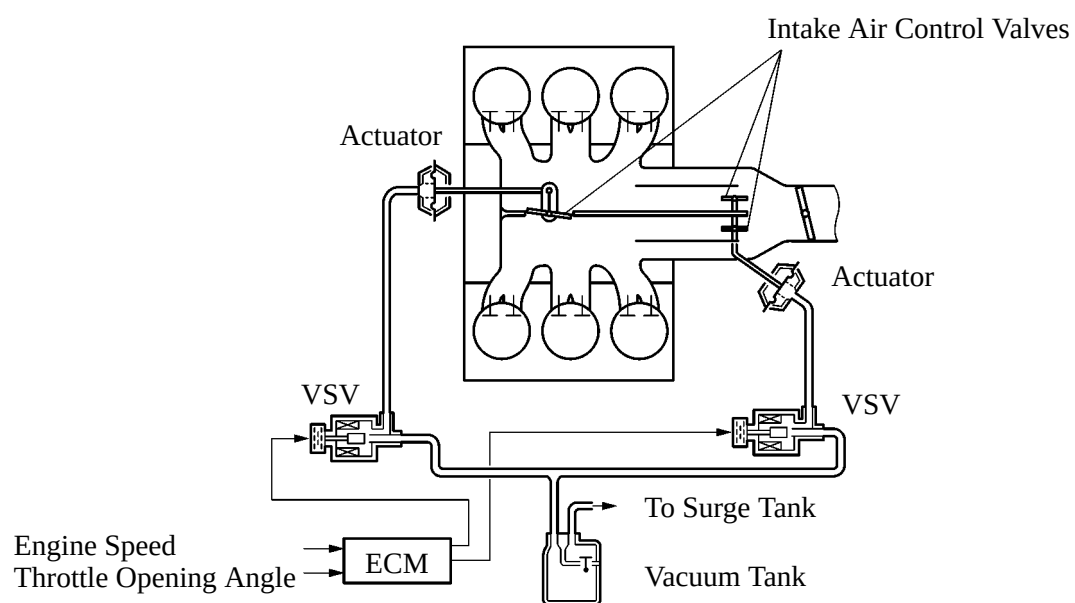

General**1) Intake Air Control Valve**


The intake air control valves, which are provided in the intake air chamber, open and close to change the effective length and intake area of the intake manifold in 3 stages.

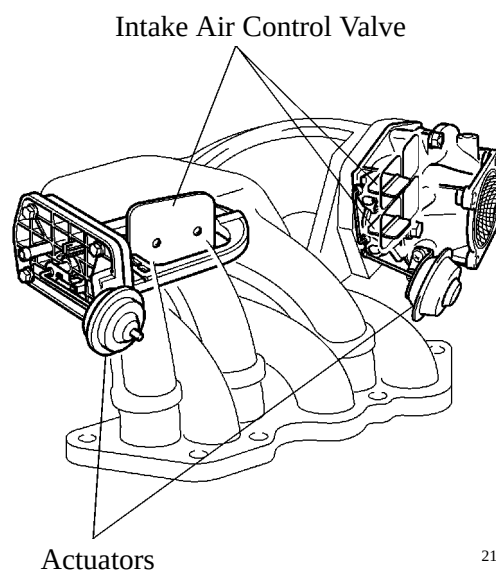

211EG19

2) VSV (Vacuum Switching Valve)

Controls the vacuum that is applied to the actuator by way of the signal (ACIS) that is output by the ECM.

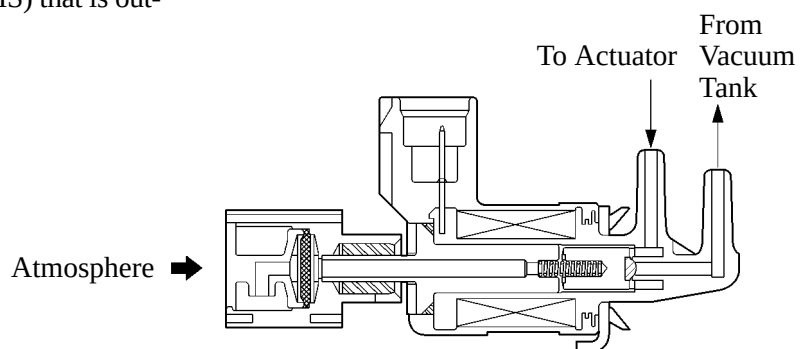

208EG47


3) Vacuum Tank

Equipped with an internal check valve, the vacuum tank stores the vacuum that is applied to the actuator in order to maintain the intake air control valve fully closed even during low-vacuum conditions.

Operation


1) Heavy Load in the Low-Speed Range

The ECM activates the VSV to match the longest pulsation cycle so that the negative pressure acts on the diaphragm chamber of the actuators. This closes the control valves. As a result, the intake area of the intake manifold is narrowed and the intake efficiency in the low speed range is improved due to the dynamic effect of the intake air, thereby increasing the power output.

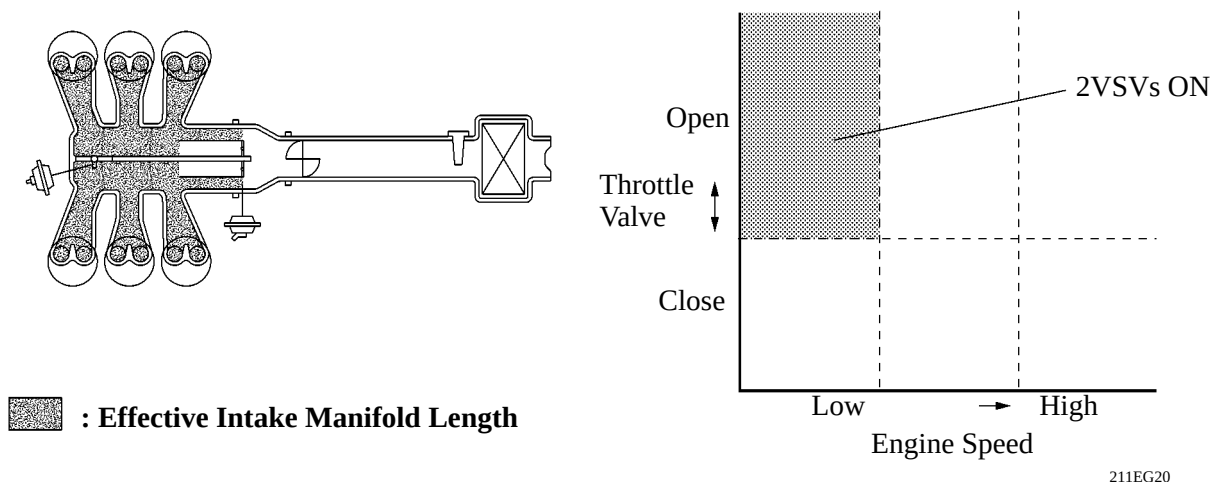


2) Heavy Load in the Mid-speed Range

The ECM deactivates the VSV (intake air chamber side) to match the relatively long cycle so that atmospheric air is led into the diaphragm chamber of the actuator and opens the control valve. When the control valve is open, the intake area of the intake manifold is widened and peak intake efficiency is shifted to the mid engine speed range, thus providing greater output at mid engine speeds.

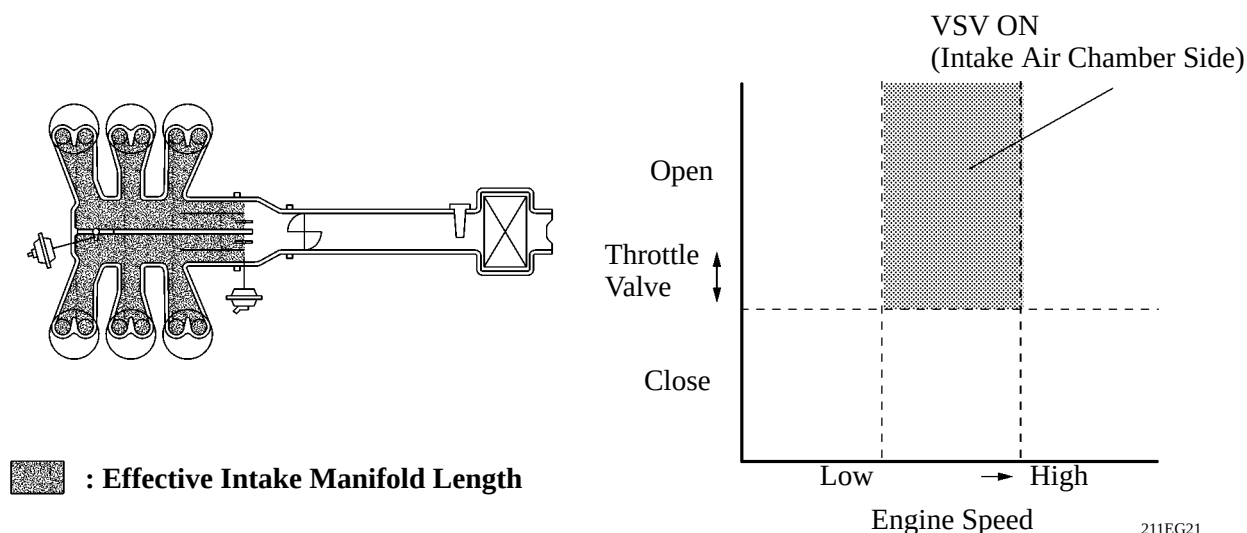

3) During Idling, Light Load, and High-Speed Range

The ECM deactivates the VSVs to match the relatively long cycle so that atmospheric air is led into the diaphragm chamber of the actuator and opens the control valves. When the control valves are open, the effective length of the intake air chamber is lengthened most and peak intake efficiency is shifted to the high engine speed range, thus providing greater output at high engine speeds.

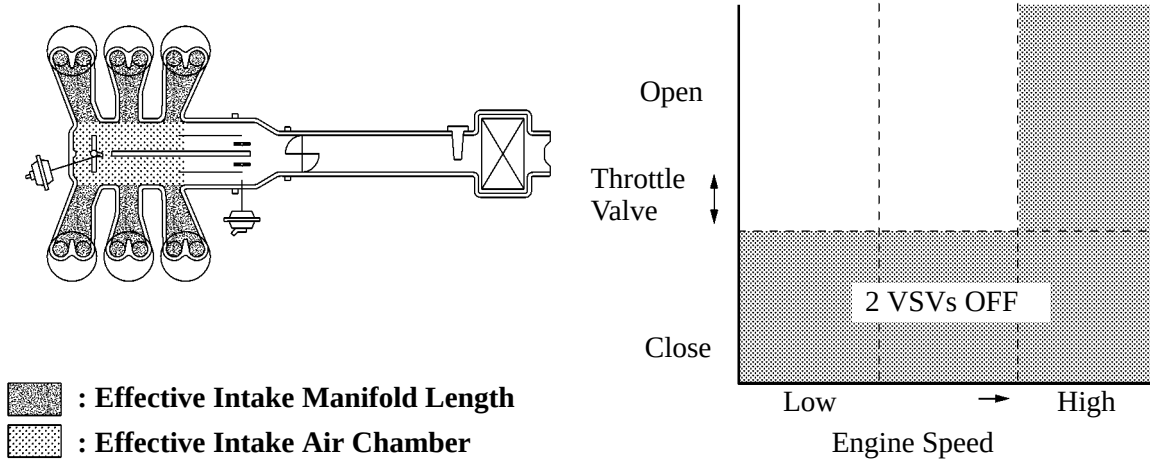

211EG22


11. Air Intake Control System

General

The air cleaner inlet is divided into two areas, and an air intake control valve and an actuator have been provided in one of the areas.

As a result, a reduction in intake noise in the low-speed range and an increase in the power output in the high-speed range have been realized.

► Layout of Components ◀


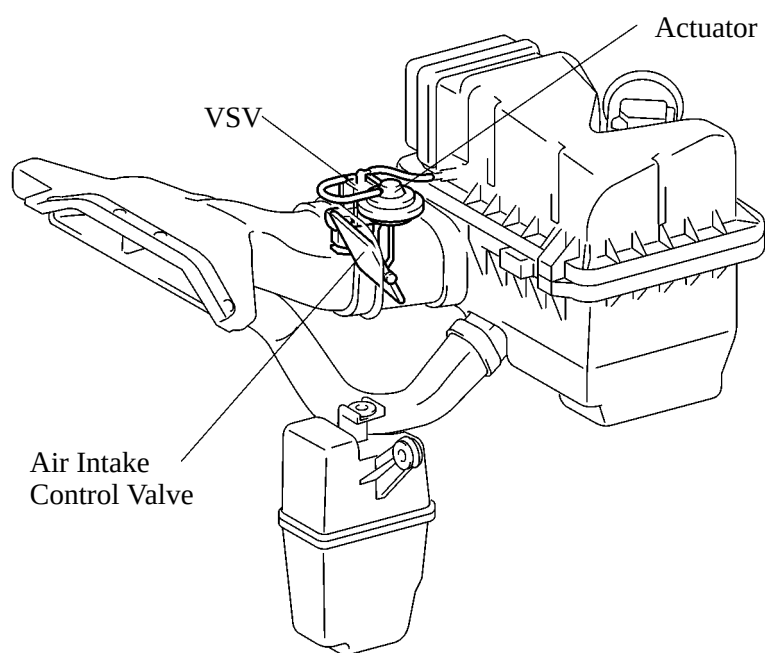


208EG50

Operation

When the engine is operating in the low-to mid-speed range, this control operates the air intake control valve to close one side of the air cleaner inlet.

When the engine is operating in the high-speed range, this control operates the air intake control valve to open both side of the air cleaner inlet to effect the intake of air.

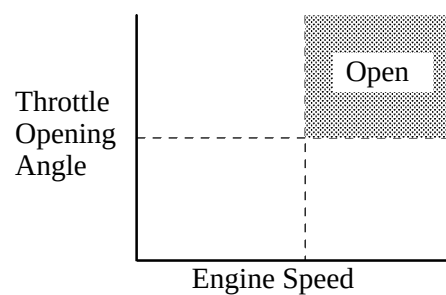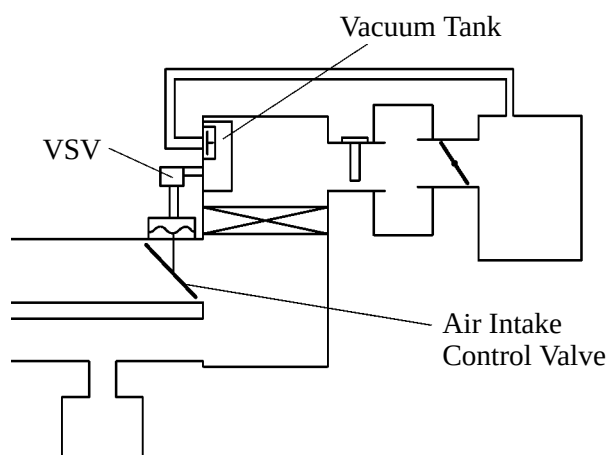

Air Intake Control Valve Condition


208EG51

12. Evaporative Emission Control System

General

The vacuum type has been adopted on the '02 ES300 to detect leaks in the evaporative emission control system. This vacuum type detects leaks by forcefully introducing the purge vacuum into the entire system and monitoring the changes in the pressure. It consists of the following main components:

- A VSV (for canister closed valve) that closes the fresh air line from the air cleaner to the charcoal canister has been adopted.
- A VSV (for pressure switching valve) that opens the evaporator line between the fuel tank and the charcoal canister has been adopted.
- Function to close the purge line from the air intake chamber to the charcoal canister for this system is added to the original functions of VSV (for EVAP).
- A vapor pressure sensor that measures the pressure in the fuel tank while checking for evaporative emission leaks and sends signals to the ECM has been adopted.

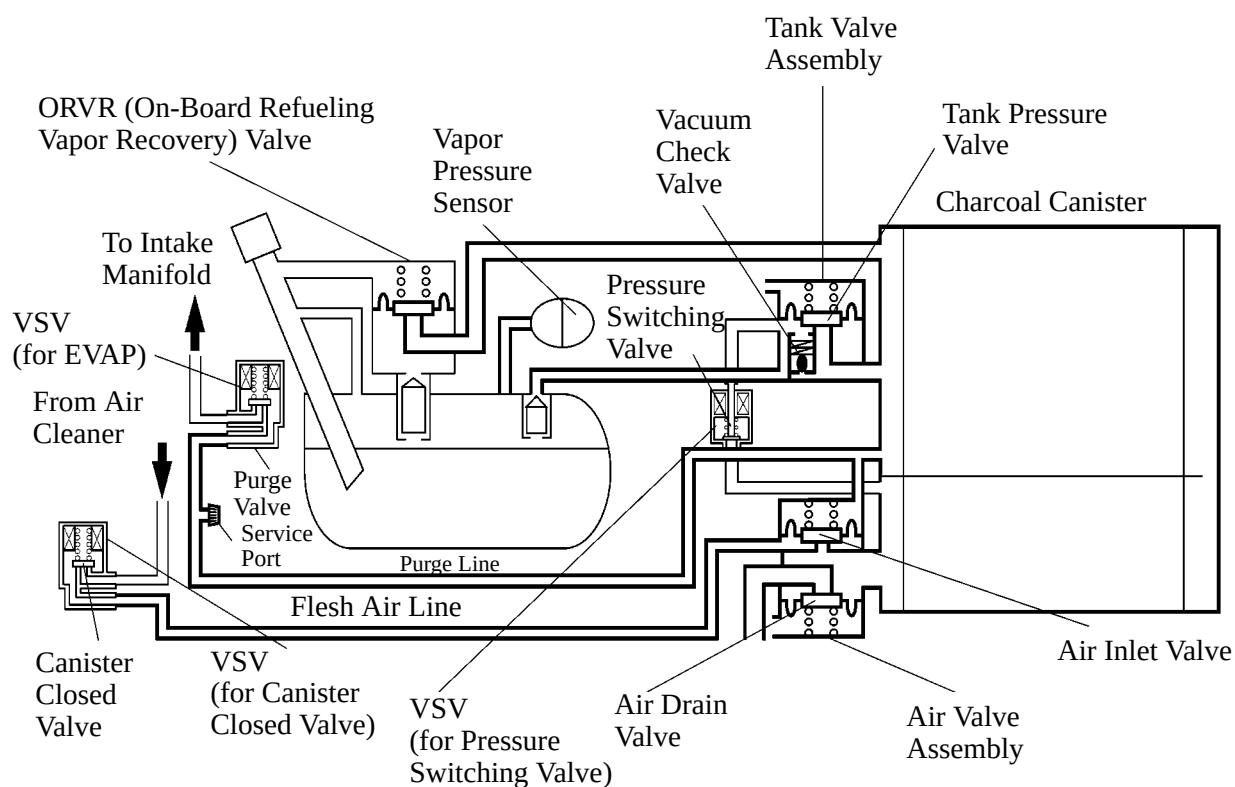


Operation

1) Purge Flow

When the engine has reached predetermined parameters (closed loop, engine coolant temp. above 74°C (165°F), etc.), stored fuel vapors are purged from the charcoal canister whenever the purge valve is opened by the ECM. At the appropriate time, the ECM will turn on the VSV (for EVAP).


The ECM will change the duty ratio cycle of the VSV (for EVAP) thus controlling purge flow volume. Purge flow volume is determined by manifold pressure and the duty ratio cycle of the VSV (for EVAP). Atmospheric pressure is allowed into the canister to ensure that purge flow is constantly maintained whenever purge vacuum is applied to the canister.

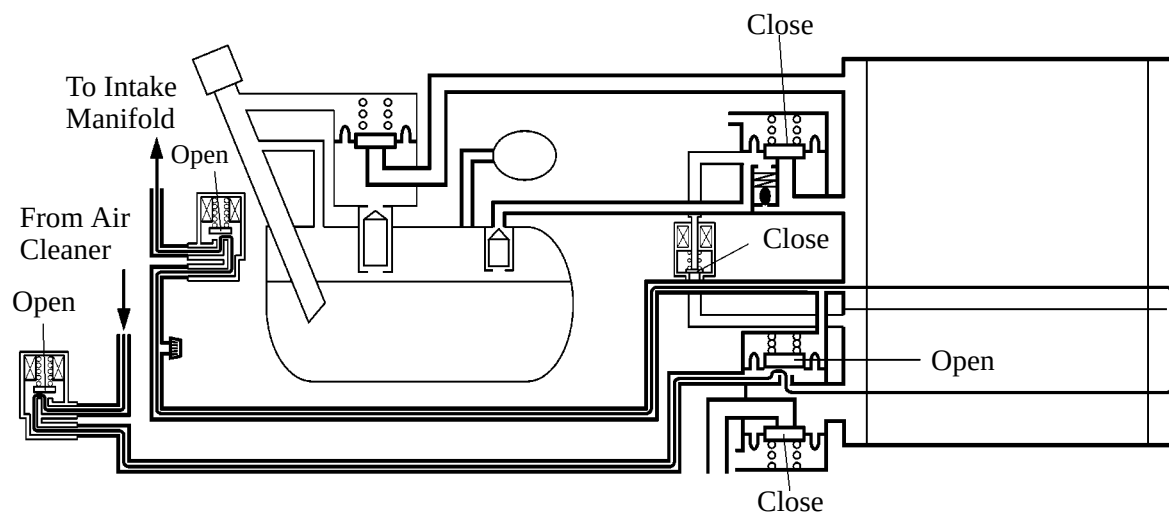

208EG32

2) ORVR (On-Board Refueling Vapor Recovery)


During refueling, low pressure above the diaphragm in the onboard recovery valve lifts allowing fuel vapors into the charcoal canister. At the same time, the air drain valve opens and the charcoal absorbs the fuel vapors.

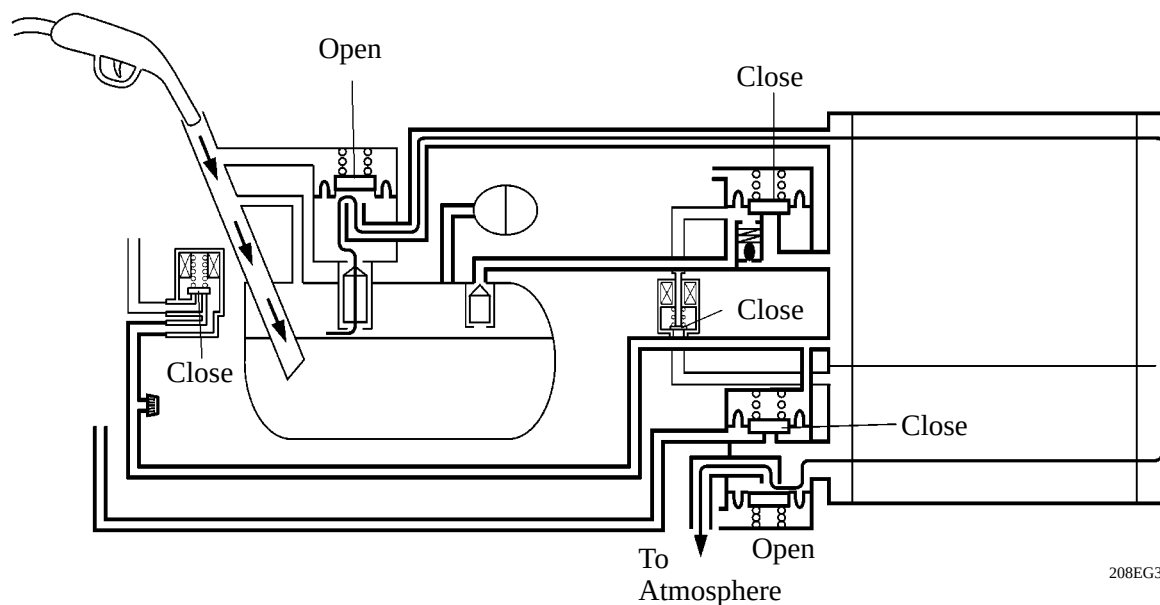


208EG33

3) Monitor

The monitor sequence begins with a cold engine start. The intake air temp. and engine coolant temp. sensors must have approximately the same temperature reading. The ECM is constantly monitoring fuel tank pressure. As the temperature of the fuel increases, pressure slowly rises. The ECM will purge the charcoal canister at the appropriate time. With VSV (for pressure switching valve) closed, pressure will continue to rise in fuel tank.

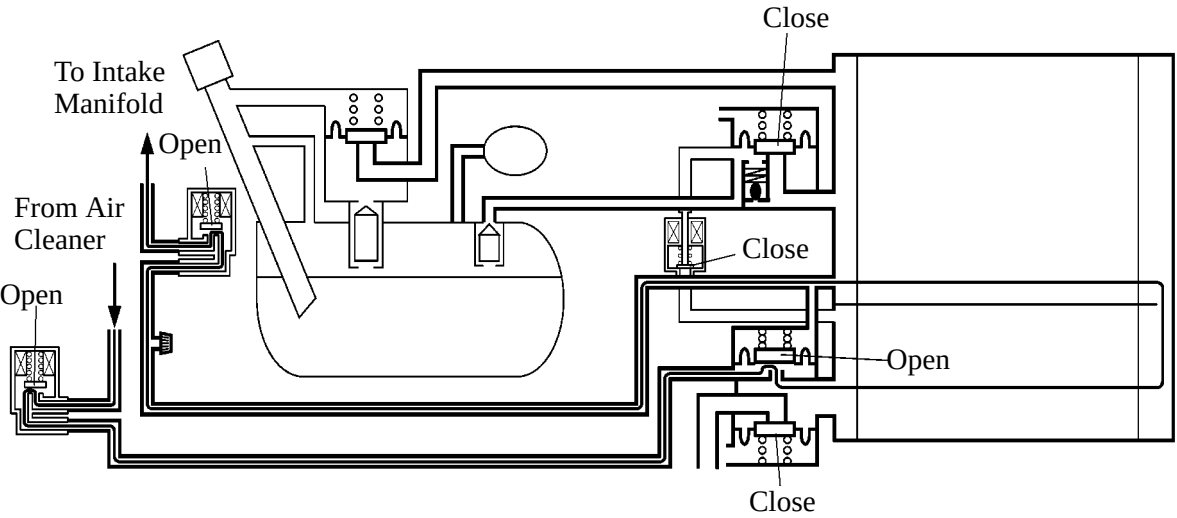


208EG34

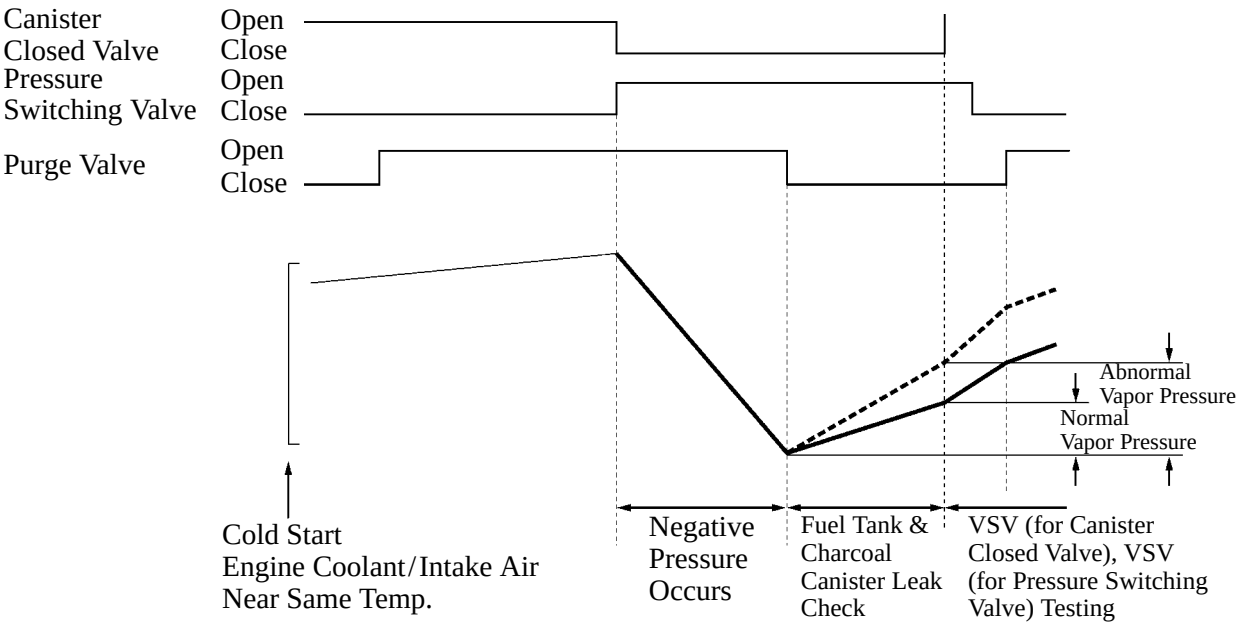

189EG33


4) DTC P0440, P0442 (Evaporative Emission Control System Malfunction)

Initially, when the canister closed valve is closed, and the pressure switching valve and the purge valve are opened, a vacuum is applied to the purge line from the air intake to the charcoal canister and to the evaporator line from the charcoal canister to the fuel tank. Next, the purge valve is closed in order to maintain a vacuum from the VSV (for EVAP) to the inside of the fuel tank. Then, any subsequent changes in the pressure are monitored by the vapor pressure sensor in order to check for evaporative emission leaks. If a leak is detected, the MIL (Malfunction Indicator Lamp) illuminates to inform the driver. Also, the DTC (Diagnostic Trouble Code) can be accessed through the use of a hand-held tester. For details on the DTCs, refer to the 2002 ES300 Repair Manual (Pub. No. RM911U).

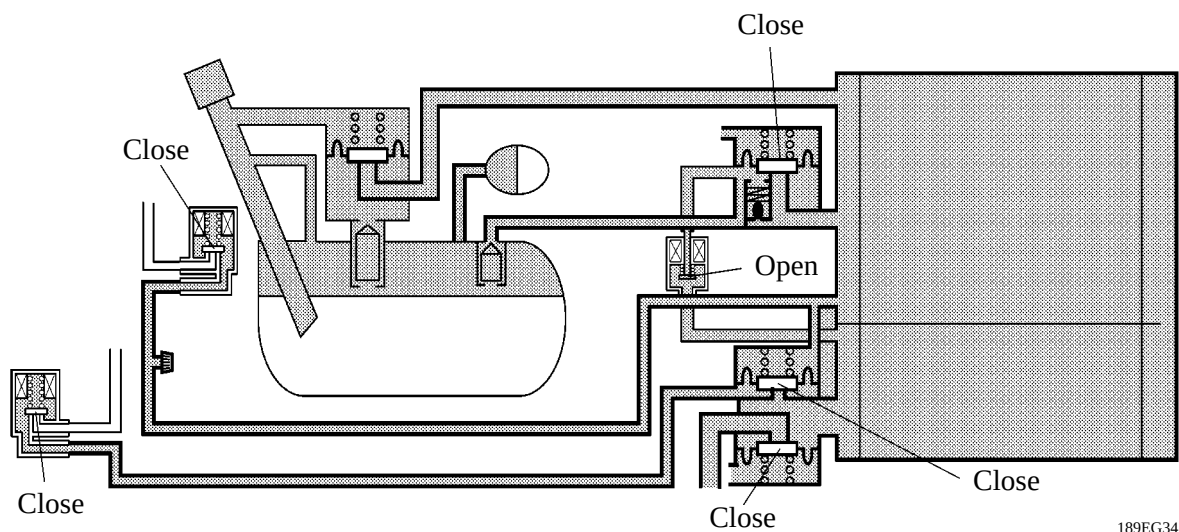

5) DTC P0441 (Evaporative Emission Control System Incorrect Purge Flow)

At a predetermined point, the ECM closed the canister closed valve and opens the pressure switching valve causing a pressure drop in the entire EVAP system. The ECM continues to operate the VSV (for EVAP) until the pressure is lowered to a specified point at which time the ECM closed the purge valve. If the pressure did not drop, or if the drop in pressure increase beyond the specified limit, the ECM judges the VSV (for EVAP) and related components to be faulty and the MIL illuminates to inform the driver. Also, the DTC can be accessed through the use of a hand-held tester. For details on the DTCs, refer to the 2002 ES300 Repair Manual (Pub. No. RM911U).

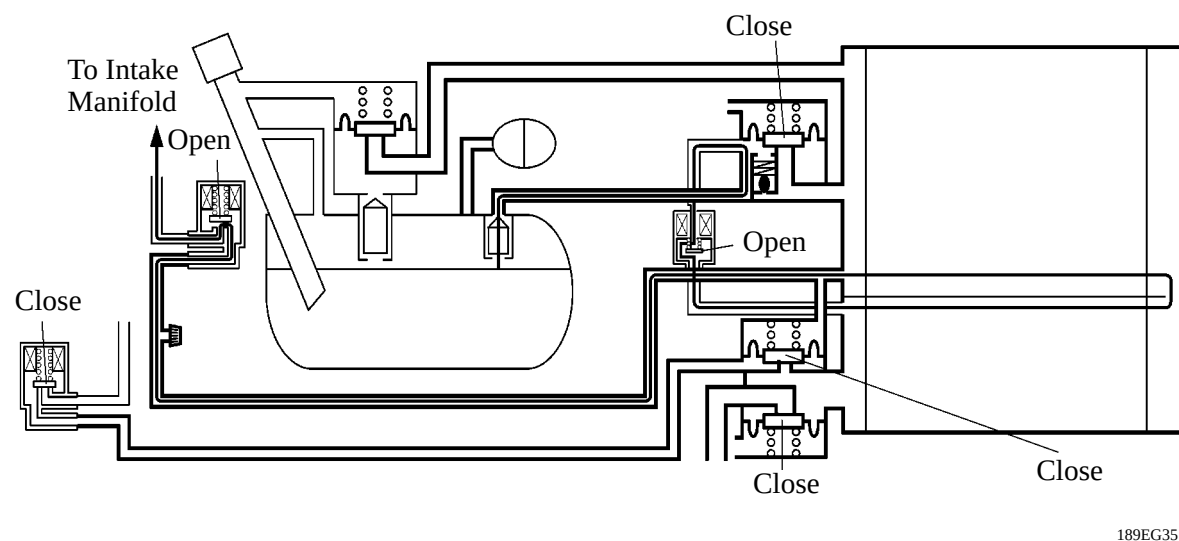


6) DTC P0446 (Evaporative Emission Control System Vent Control Malfunction)

a. Canister Closed Valve

This stage checks the VSV (for canister closed valve) and vent (air inlet side) operation. When the vapor pressure rises to a specified point, the ECM opens the canister closed valve. Pressure will increase rapidly because of the air allowed into the system. No increase or an increase below specified rate of pressure increase indicates a restriction on the air inlet side. If a malfunction is detected, the MIL illuminates to inform the driver. Also, the DTC can be accessed through the use of a hand-held tester.

For details on the DTCs, refer to the 2002 ES300 Repair Manual (Pub. No. RM911U).

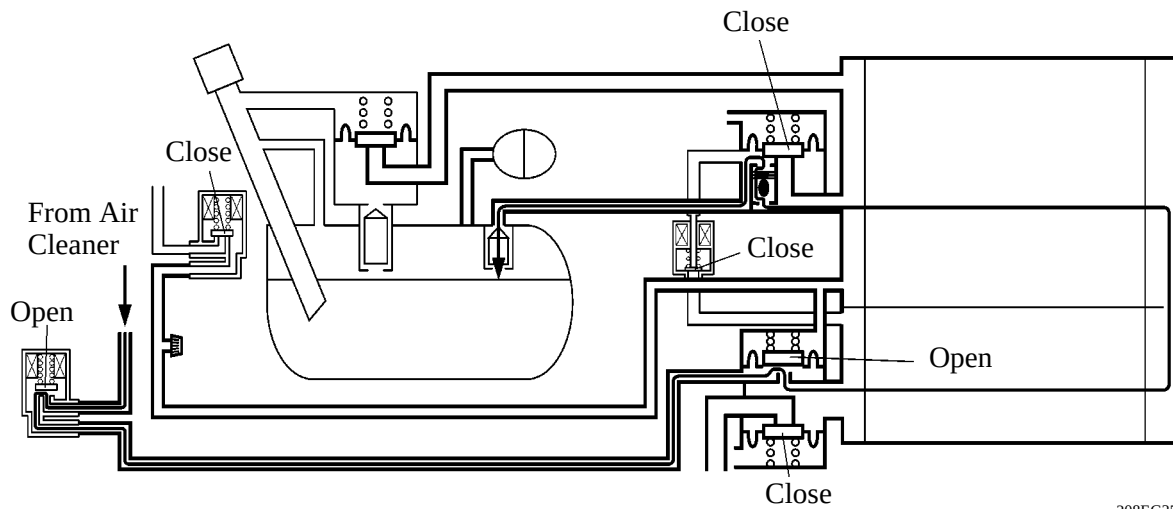


208EG35

b. Pressure Switching Valve

The ECM closes the pressure switching valve. This action blocks air entire the tank side of the system. The pressure rise is no longer as great. If there was no change in pressure, the ECM will conclude the pressure switching valve did not close. If a malfunction is detected, the MIL illuminates to inform the driver. Also, the DTC can be accessed through the use of a hand-held tester.

For details on the DTCs, refer to the 2002 ES300 Repair Manual (Pub. No. RM911U).

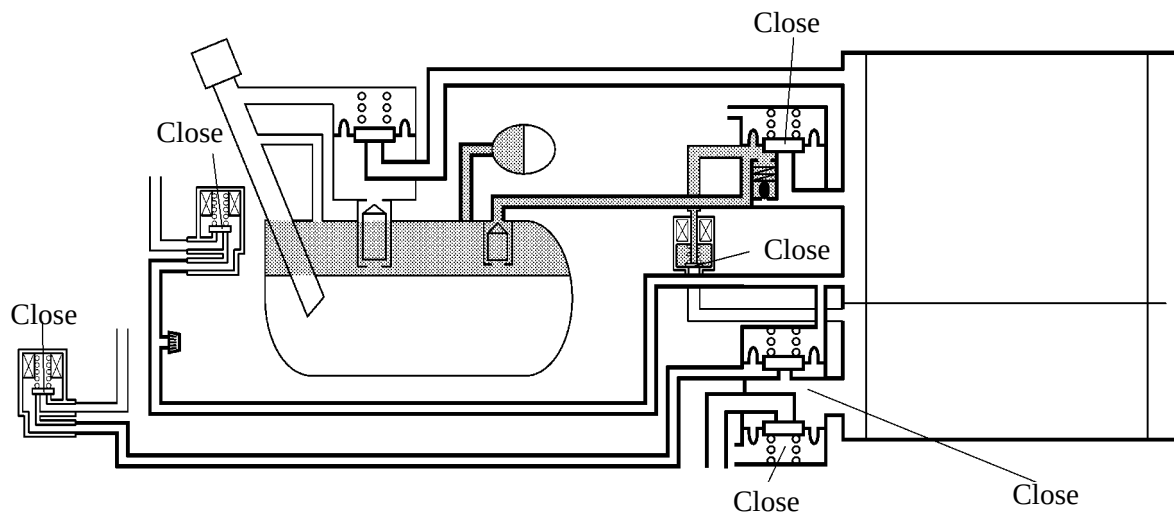

189EG37

13. Diagnosis

When the ECM detects a malfunction, the ECM makes a diagnosis and memorizes the failed section. Furthermore, the MIL (Malfunction Indicator Lamp) in the combination meter illuminates or blinks to inform the driver.

The ECM will also store the DTCs of the malfunctions.

The DTCs can be accessed the use of the hand-held tester.

Service Tip

The length of time to clear the DTC via the battery terminal has been changed from the previous 10 seconds to 1 minute.

– Changes (from '01 ES300) –

The DTCs (Diagnostic Trouble Codes) listed below have been added or discontinued.

► Added DTCs ◀

DTC No.	Detection Item
P0156	O ₂ Sensor Circuit Malfunction (Bank 2, Sensor 2)
P0161	O ₂ Sensor Heater Circuit Malfunction (Bank 2, Sensor 2)
P0430	Catalyst System Efficiency Below Threshold (Bank 2)
P0605	Internal Control Module Read Only Memory (ROM) Error
P1120	Accelerator Pedal Position Sensor Circuit Malfunction
P1121	Accelerator Pedal Position Sensor Range/Performance Problem
P1125	Throttle Control Motor Circuit Malfunction
P1127	ETCS Actuator Power Source Circuit Malfunction
P1128	Throttle Control Motor Lock Malfunction
P1129	Electric Throttle Control System Malfunction
P1566	Input Signal Circuit Abnormal
P1633	ECM Malfunction (ETCS Circuit)

14. Fail-Safe

General

When the ECM detects a malfunction, the ECM stops or controls the engine according to the data already stored in the memory.


► Fail-Safe Control List ◀

☐ : New

Location on Malfunction	Description Control
Mass Air Flow Meter	In case of a signal malfunction, the engine could operate poorly or the catalyst could overheat if the engine continues to be controlled with the signals from the sensors. Therefore, the ECM effects control by using the values in the ECM or stops the engine.
Accelerator Pedal Position Sensor (For details, see page EG-54)	In case of a signal malfunction, the ECM calculates the accelerator pedal opening angle that is limited by the dual system sensor value and continues effecting throttle valve control. If both system malfunction, the ECM considers that the accelerator pedal is fully closed.
Throttle Position Sensor (For details, see page EG-55)	In case of a signal malfunction, the ECM cuts off the current to the throttle control motor. The throttle valve returns to the prescribed opening by the force of the return spring. The ECM then adjusts the engine output by controlling the fuel injection and ignition timing in accordance with the accelerator pedal opening angle to enable the vehicle to continue driving.
Engine Coolant Temp. Sensor and Intake Air Temp. Sensor	In case of a signal malfunction, the use of the values from the sensors will make the air-fuel ratio become too rich or too lean, which could causes the engine to stall or to run poorly during cold operation. Therefore, the ECM fixes the air-fuel ratio to the stoichiometric ratio and uses the constant values of 80°C engine coolant temperature and 20°C intake air temperature to perform the calculation.
Knock Sensor	In case of a malfunction in the knock sensor or in the knocking signal system (open or short circuit), the engine could become damaged if the timing is advanced despite the presence of knocking. Therefore, if a malfunction is detected in the knock sensor system, the ECM turns the timing retard correction of the knock sensor into the maximum retard value.
Ignition Coil (with Igniter)	In case of a malfunction in the ignition system, such as an open circuit in the ignition coil, the catalyst could be become overheated due to engine misfire. Therefore, if the (IGF) ignition signal is not input twice or more in a row, the ECM determines that a malfunction occurred in the ignition system and stops only the injection of fuel into the cylinder with the malfunction.


Fail-Safe of Accelerator Pedal Position Sensor

- The accelerator pedal position sensor comprises two (main, sub) sensor circuits. If a malfunction occurs in either one of the sensor circuits, the ECM detects the abnormal signal voltage difference between these two sensor circuit and switches to the limp mode. In the limp mode, the remaining circuit is used to calculate the accelerator pedal opening, in order to operate the vehicle under limp mode control.

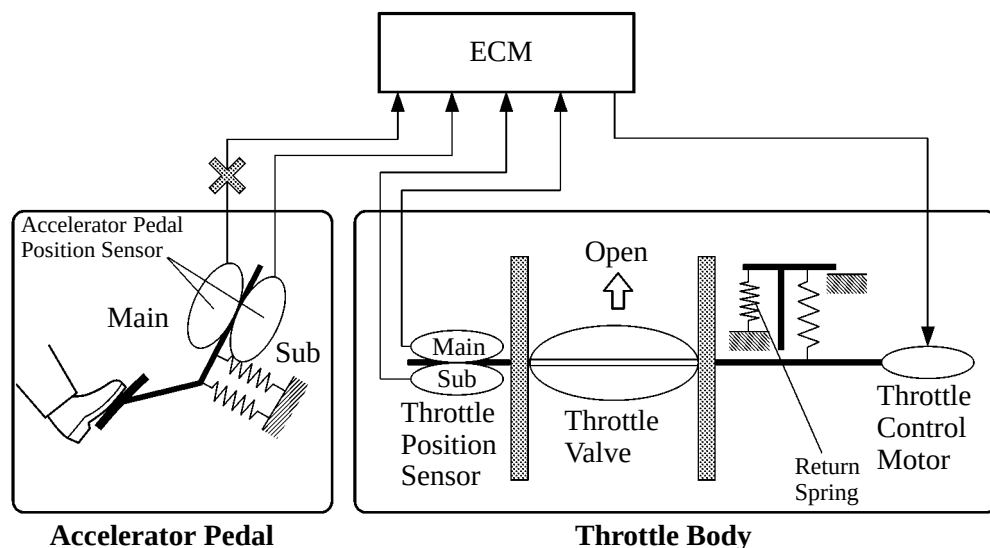

199EG45


- If both systems malfunction, the ECM detects the abnormal signal voltage between these two sensor circuits and regards that the opening angle of the accelerator pedal is fully opened and then continues the throttle control. At this time, the vehicle can be driven within its idling range.

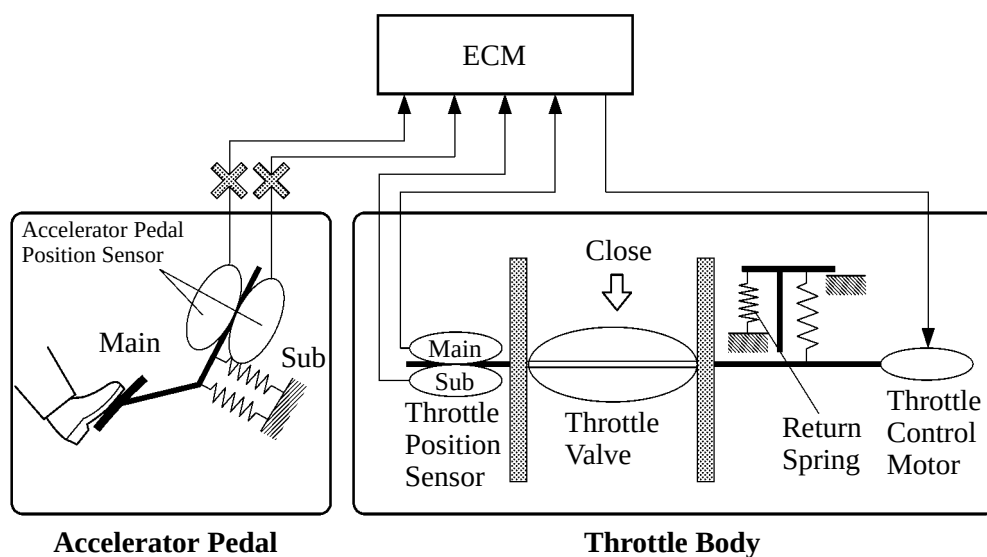

199EG46

Fail-Safe of Throttle Position Sensor

- The throttle position sensor comprises two (main, sub) sensor circuits. If a malfunction occurs in either one of the sensor circuits, the ECM detects the abnormal signal voltage difference between these two sensor circuits, cuts off the current to the throttle control motor, and switches to the limp mode. Then, the force of the return spring causes the throttle valve to return and stay at the prescribed opening. At this time, the vehicle can be driven in the limp mode while the engine output is regulated through the control of the fuel injection and ignition timing in accordance with the accelerator opening.
- The same control as above is effected if the ECM detects a malfunction in the throttle control motor system.

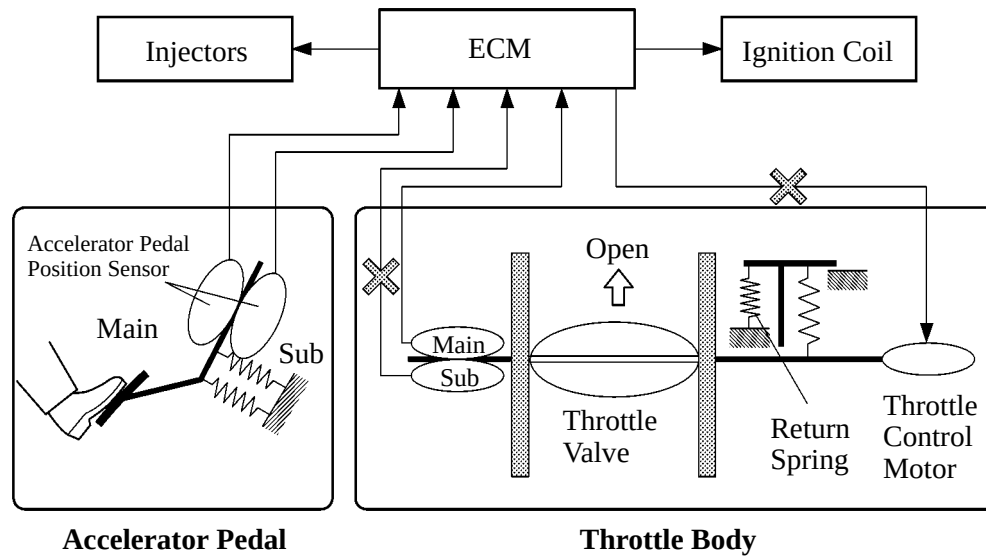

199EG47

ENGINE


1MZ-FE ENGINE

■ DESCRIPTION


The 1MZ-FE engine, which is a V6, 3.0-liter, 24-valve DOHC engine, based on the 1MZ-FE engine on the '01 ES300.

This engine has following features that have been newly adopted in order to realize the further improvement of the engine performance, fuel economy and to reduce exhaust emissions.

- The PS (Planetary reduction Segment conductor motor) starter has been adopted.
- Meets the ULEV (Ultra Low Emission Vehicle) regulation requirements.
- Meets the SFTP (Supplementary Federal Test Procedure) regulation requirements.
- ETCS-i (Electronic Throttle Control System-intelligent) has been adopted.
- VVT-i (Variable Valve Timing-intelligent) system is used.
- Air intake control system has been adopted.

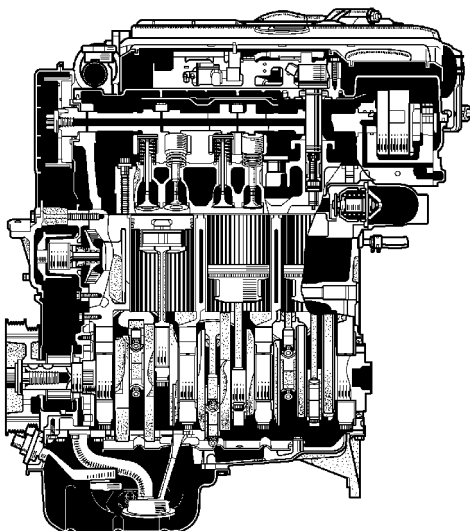

211EG01

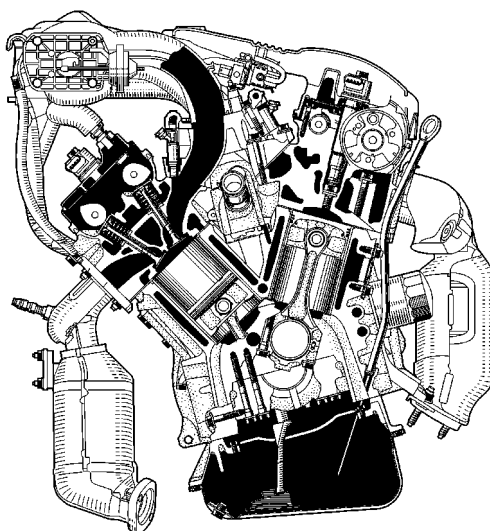


211EG02


► Engine Specification ◀

Model			'02 ES300	'01 ES300
No. of Cyls. & Arrangement			6-Cylinder, V Type	←
Valve Mechanism			24-Valve DOHC, Belt & Gear Drive	←
Combustion Chamber			Pentroof Type	←
Manifolds			Cross-Flow	←
Fuel System			SFI	←
Displacement		cm ³ (cu. in.)	2995 (182.8)	←
Bore x Stroke		mm (in.)	87.5 x 83.0 (3.44 x 3.27)	←
Compression Ratio			10.5 : 1	←
Max. Output		(SAE-NET)	156 kw @ 5800 rpm (210 HP @ 5800 rpm)	←
Max. Torque		(SAE-NET)	298 N·m @ 4400 rpm (220 lb·ft @ 4400 rpm)	←
Valve Timing	Intake	Open	−4° ~ 56° BTDC	←
		Close	60° ~ 0° ABDC	←
	Exhaust	Open	54° BBDC	←
		Close	2° ATDC	←
Firing Order			1-2-3-4-5-6	←
Research Octane Number			96 or higher	←
Octane Rating			91 or higher	←
Dry Weight		kg (lb)	157 (346)	—
Oil Grade			API SJ, SL , EC or ILSAC	API SH, SJ , EC or ILSAC

► Performance Curve ◀

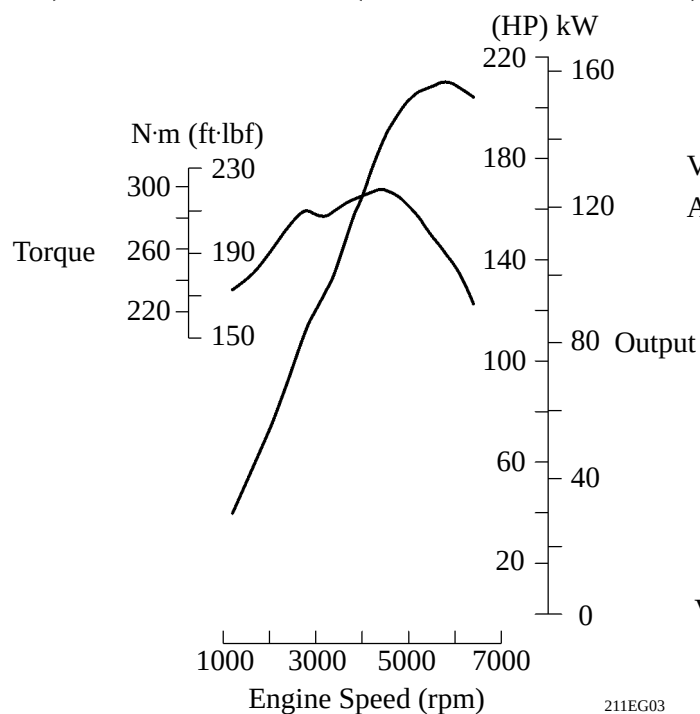

► Valve Timing ◀

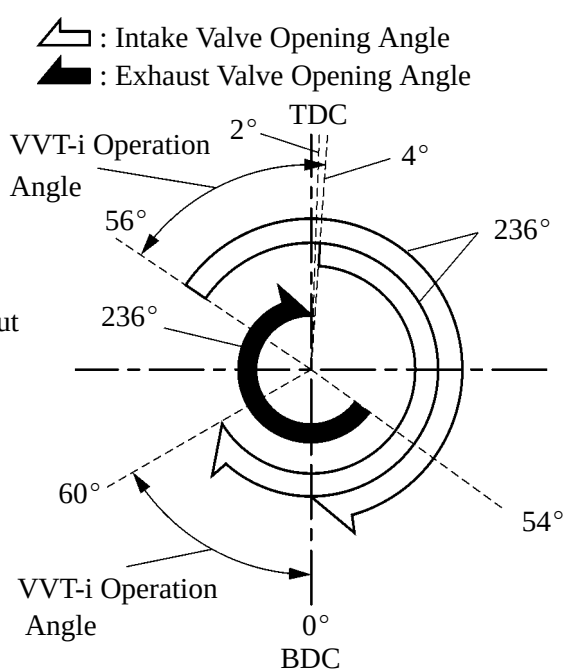

211EG03

211EG04

■ FEATURES OF 1MZ-FE ENGINE

The 1MZ-FE engine has been able to achieve the following performance through the adoption of the item listed below.

- (1) High performance and fuel economy
- (2) Low noise and vibration
- (3) Lightweight and compact design
- (4) Good serviceability
- (5) Clean emission


Item	(1)	(2)	(3)	(4)	(5)	'02 ES300	'01 ES300
The VVT-i system is used.	○				○	○	←
The ETCS-i has been adopted.	○					○	—
A cylinder block made of aluminum alloy has been adopted.			○			○	←
The intake air chamber made of plastics has been adopted.			○			○	—
Independent type DIS (Direct Ignition System) has been adopted.	○			○	○	○	←
The fuel returnless system has been adopted.			○	○	○	○	←
Quick connectors are used to connect the fuel hose with the fuel pipes.				○		○	←
12-hole type fuel injectors with high atomizing performance have been adopted.	○				○	○	—
Iridium-tipped spark plugs have been adopted.	○			○		○	←
ACIS (Acoustic Control Induction System) is used.	○					○	←
Air intake control system has been adopted.	○	○				○	—
A 2-way exhaust control system has been adopted.	○	○				○	←
The use of an air fuel ratio sensor allows precise control.					○	○	←
The PS (Planetary reduction-Segment conductor motor) starter has been adopted.			○			○	—

Other parts and construction are the same as in the '01 ES300


■ LUBRICATION SYSTEM

1. General

- The lubrication is fully pressurized and all oil passes through an oil filter.
- A trochoid gear type oil pump is directly driven by the crankshaft.

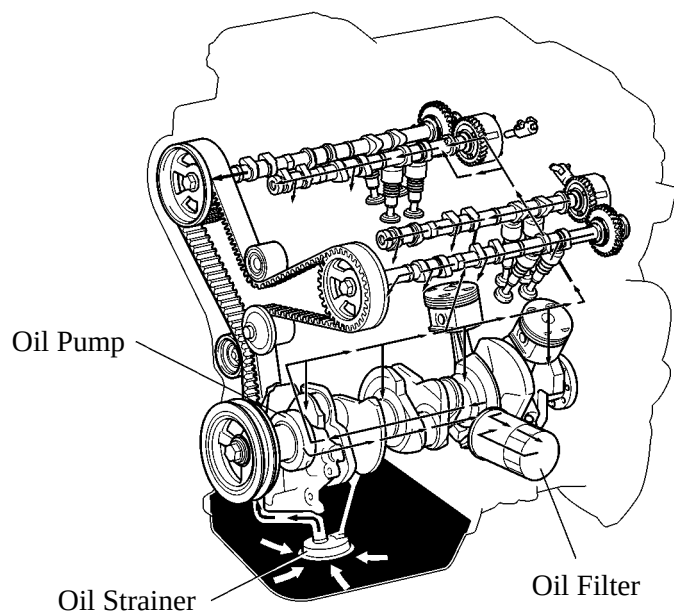

211EG07

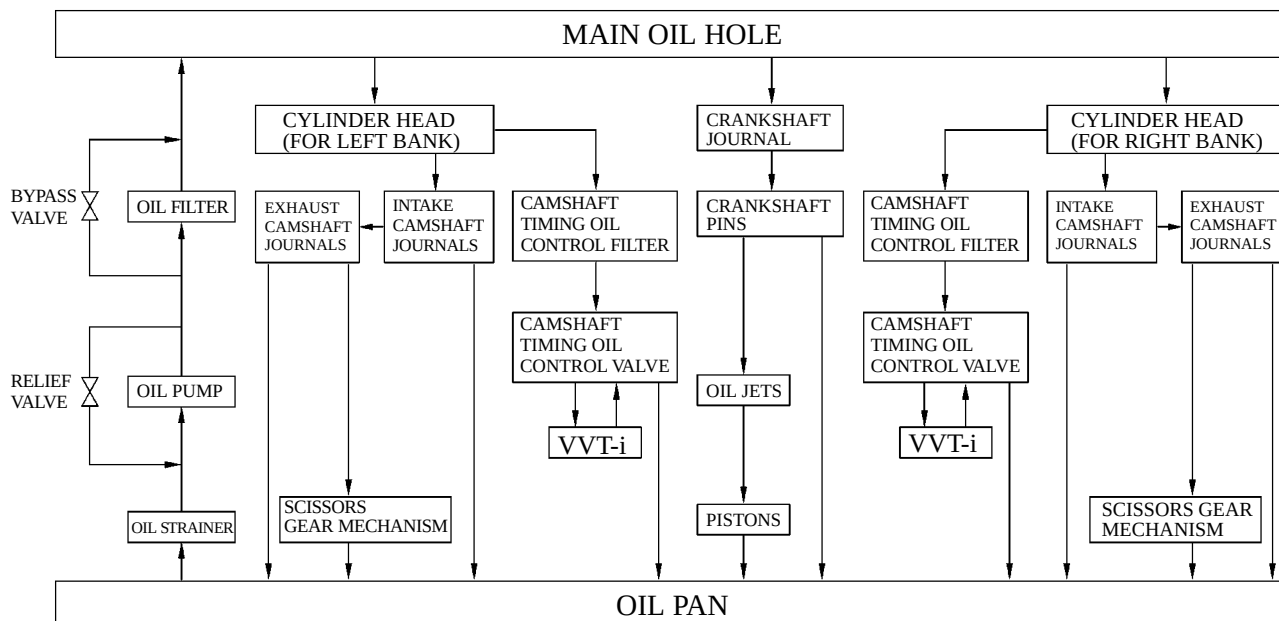

187EG22


► Specifications ◀

Oil Capacity	Dry	5.5 (5.8, 4.8)
	with Oil Filter	4.7 (5.0, 4.1)
Liters (US qts, Imp. qts)	without Oil Filter	4.5 (4.8, 4.0)

■ IGNITION SYSTEM

1. General

- A DIS (Direct Ignition System) has been adopted. The DIS improves the ignition timing accuracy, reduces high-voltage loss, and enhances the overall reliability of the ignition system by eliminating the distributor. The DIS in this engine is an independent ignition system which has one ignition coil (with igniter) for each cylinder.
- Iridium-tipped spark plugs have been adopted.

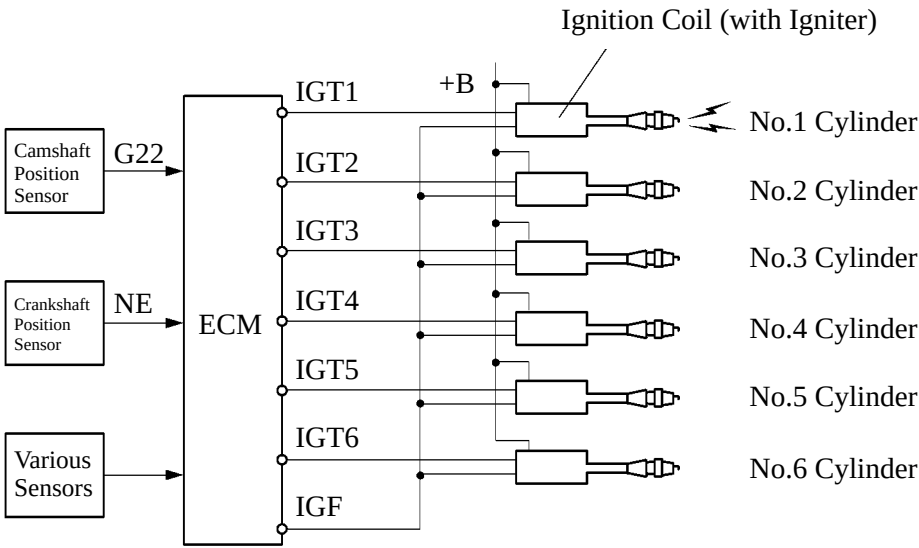


161ES43

2. Ignition Coil

The DIS provides 6 ignition coils, one for each cylinder. The spark plug caps, which provide contact to the spark plugs, are integrated with an ignition coil. Also, an igniter is enclosed to simplify the system.

3. Spark Plug

Iridium-tipped spark plugs have been adopted to realize a 120,000 mile (192,000 km) maintenance-free operation. By making the center electrode of iridium, the same ignition performance as of the platinum-tipped spark plug and further improvement of durability have been realized.

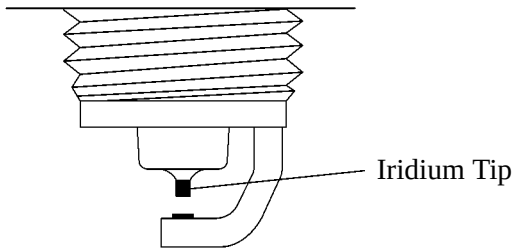


► Specifications ◀

DENSO	SK20R11
NGK	IFR6A11
Plug Gap	1.0 – 1.1 mm (0.0394 – 0.043 mm)

■ VALVE MECHANISM


1. General

- The valves are directly opened and closed by 4 camshafts.
- The exhaust camshafts are driven by a timing belt, while the intake camshafts are driven through gears on the exhaust camshafts.
- The VVT-i system used for the intake camshaft is adopted to realize excellent fuel economy, engine performance and reduce exhaust emissions.
For details, see page EG-41 in the VVT-i system section.

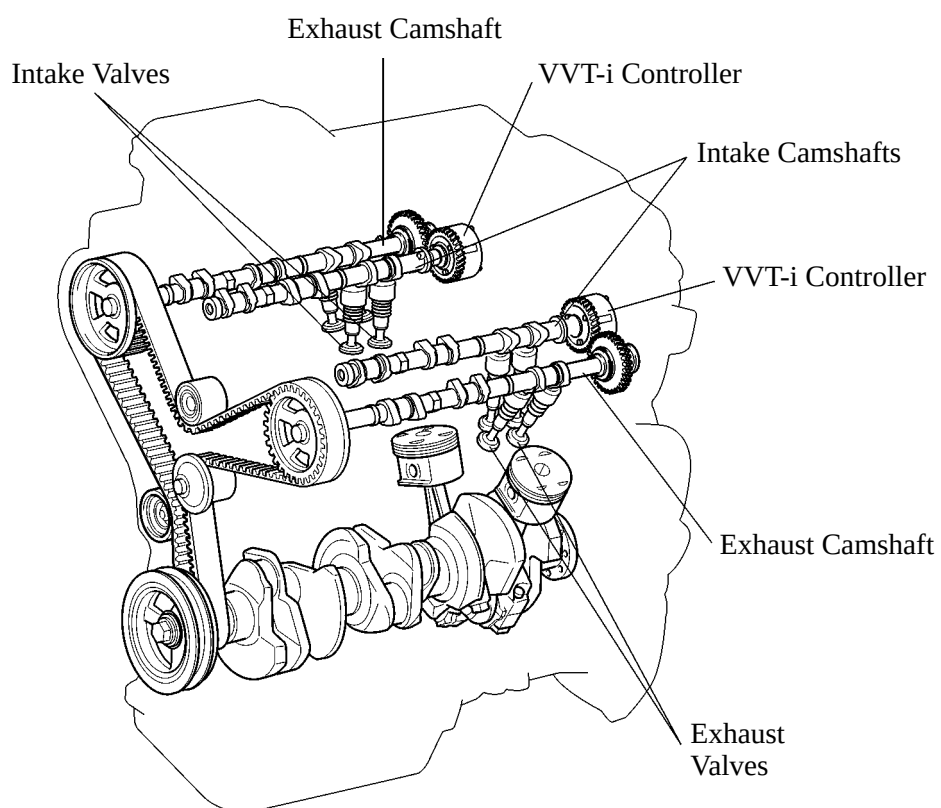


2. Camshafts

- The camshafts are made of cast iron alloy.
- In conjunction with the adoption of the VVT-i system, an oil passage is provided in the intake camshaft in order to supply engine oil to the VVT-i system.
- A VVT-i controller has been installed on the back of the intake camshaft to vary the timing of the intake valves.
- To detect the camshaft position, a timing rotor that is provided on the VVT-i controller is used to generate 3 pulses for every 2 revolutions of the crankshaft.
- The intake camshafts are driven by gears on the exhaust camshafts. The scissors gear mechanism is used on drive gear of the exhaust camshaft to control backlash and suppress gear noise.

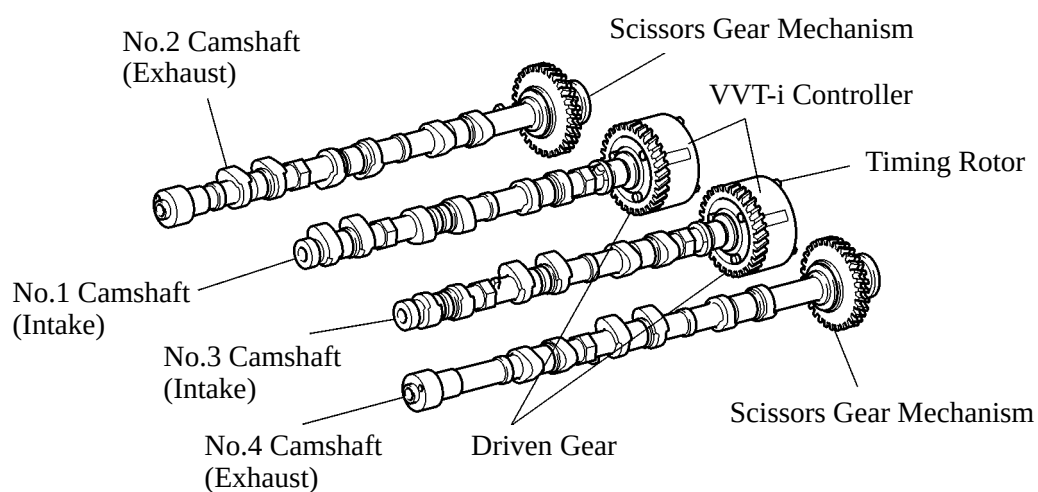

3. Intake and Exhaust Valve and Valve Lifter

- Narrower valve stems have been adopted to reduce the intake and exhaust resistance and for weight reduction.
- The adjusting shim has been located directly above the valve lifter. This construction allows the adjusting shim to be replaced without removing the camshaft, which improves the serviceability during valve clearance adjustment.
- A cutout is provided in the valve lifter to improve the serviceability of replacing the adjusting shims.

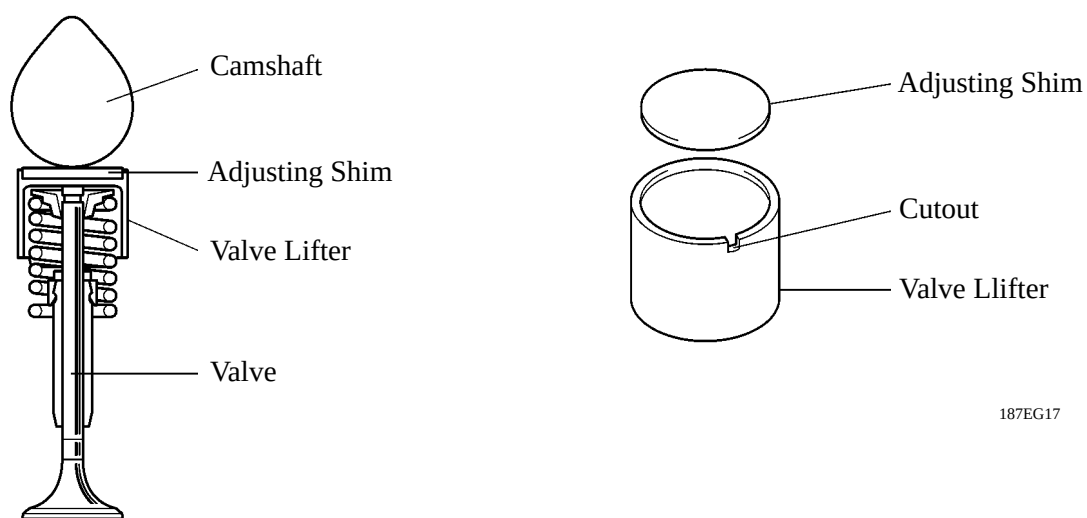

208EG64

187EG17


Service Tip

The adjusting shims are available in 17 sizes in increments of 0.050 mm (0.0020 in.), from 2.500 (0.0984 in.) to 3.300 (0.1299 in.).

For details, refer to see the 2002 LEXUS ES300 Repair Manual (Pub. No. RM911U).

4. Timing Belt

The timing belt tooth configuration has been designed to help to reduce noise and to enable the belt to transmit power under high load factors.

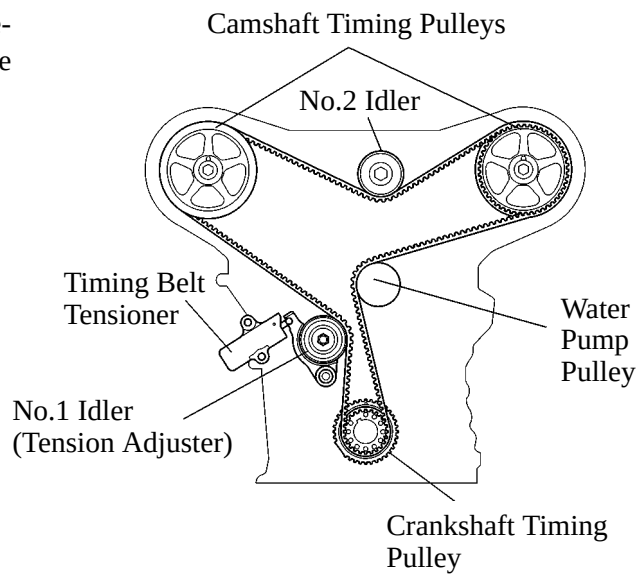


198EG40

5. Timing Belt Tensioner

The timing belt tensioner uses a spring and silicon oil damper, and maintains proper timing belt tension at all times.

The timing belt tensioner suppresses noise generated by the timing belt.

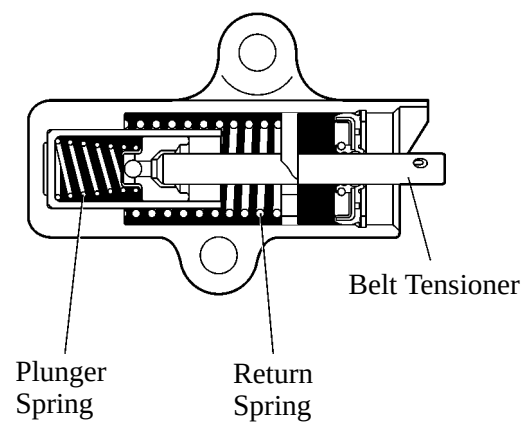

198EG41