

Set/Resume/Cancel Switch Test/Replacement

SRS components are located in this area. Review the SRS component locations, precautions, and procedures in the SRS ([section 24](#)) before performing repairs or service.


1. Make sure you have the anti-theft code for the radio, then write down the frequencies for the radio's pre-set buttons.
2. Disconnect the battery negative cable, then disconnect the positive cable, and wait at least 3 minutes.

NOTE: The PCM memory must be reset after reconnecting the battery (see page [11-125](#)).

3. Disconnect the airbag connectors.


Driver's Side:

- Remove the access panel from the steering wheel, then disconnect the 2P connector between the driver's airbag and cable reel.

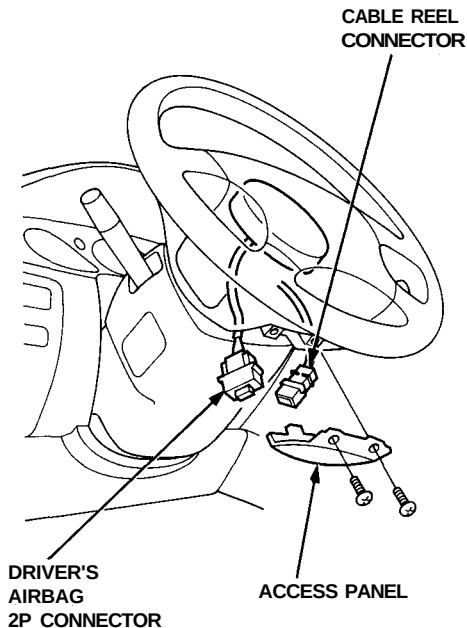


Front Passenger's Side:

- Remove the glove box (see [section 20](#)).
- Disconnect the front passenger's 2P connector from the SRS main harness.

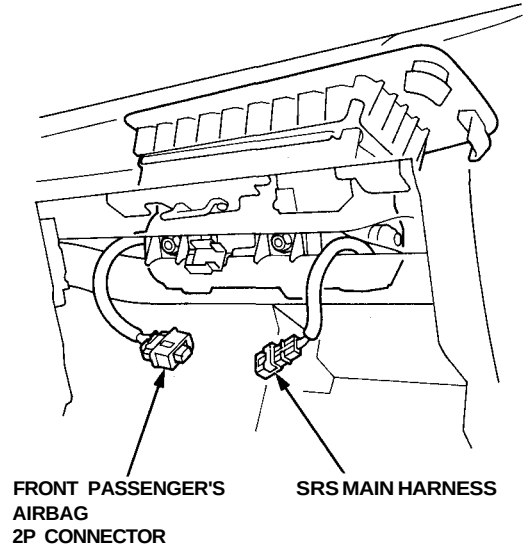

4. Remove the dashboard lower cover.
5. Disconnect the combination switch 20P connector from the main harness.

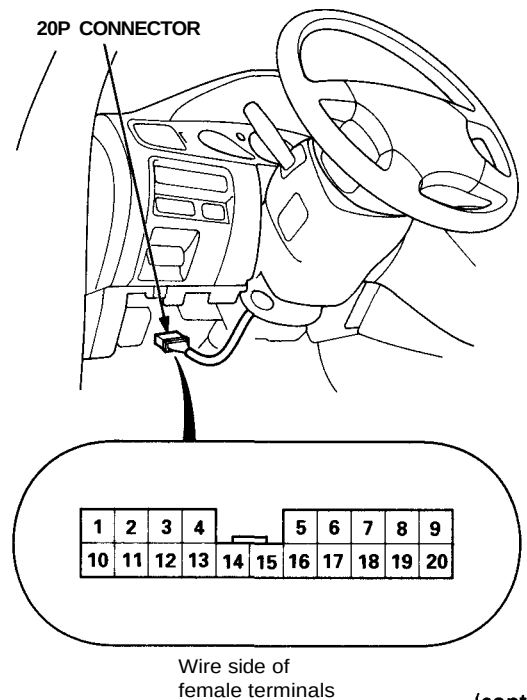

(cont'd)


Cruise Control

Set/Resume/Cancel Switch Test/Replacement (cont'd)


6. Check for continuity between the terminals of the combination switch harness connector in each switch position according to the table.

Terminal Position	17	18		20
SET (ON)		○	—	○
RESUME (ON)	○			○
CANCEL (ON)	○	○	↔	○

- If there is continuity, and it matches the table, the switch is OK.
 - If there is no continuity in any positions, go to step 7.
7. Carefully remove the set/resume/cancel switch cover by prying between the cover and the switch in the sequence shown.

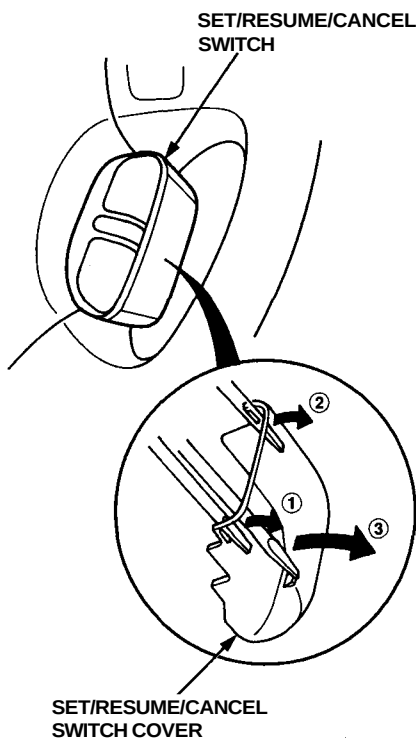

8. Remove the two screws, and disconnect the 4P connector. Then remove the switch.

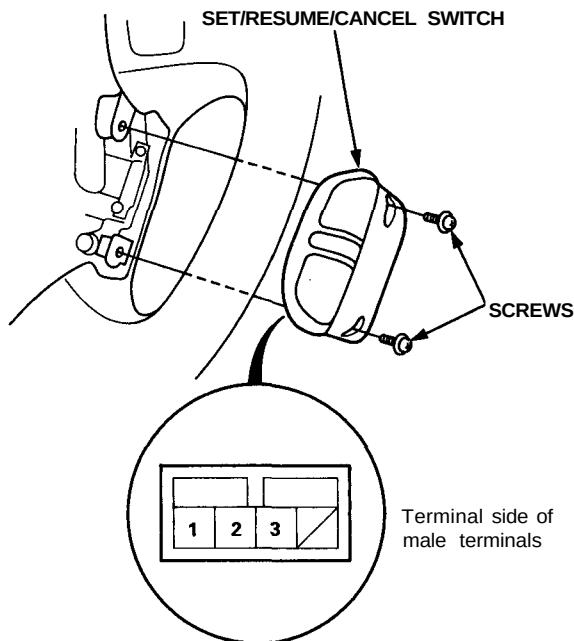

9. Check for continuity between the terminals in each switch position according to the table.

Terminal Position	1		2	3
SET (ON)	○			○
RESUME (ON)	○		○	
CANCEL (ON)	○	↔	○	○

- If there is continuity, and it matches the table, replace the cable reel.
 - If there is no continuity in any positions, replace the switch.
10. If all the tests prove OK, reconnect the battery cables, and enter the anti-theft code for the radio. Then enter the customer's radio station presets.