

Drive Pinion

Height Adjustment


NOTE: If the drive pinion and ring gear are replaced (always as a set), the height has to be adjusted.

Select the proper shim as follows:

First, calculate the difference in size between the old shim and the new pinion.

The last number (see ill.) on each pinion is the plus (+) or minus (-) tolerance in thousands of a millimeter. So, a pinion with +20 is 0.02 mm larger and a pinion with - 20 is 0.02 mm smaller.

1. If the number on the old pinion is a plus (+), add it to the old shim thickness. If it is a minus (-), subtract it from the old shim thickness.
2. If the number on the new pinion is a plus (+), subtract it from the number you got in step 1. If it is a minus (-), add it to the step 1 number.
3. Select the shim that is closest (but not more than) the final number you got from steps 1 and 2.

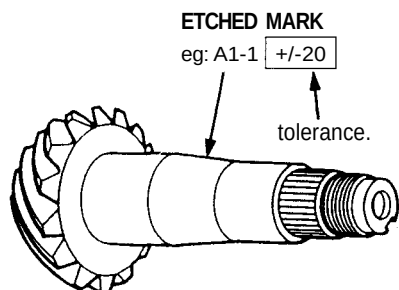

Example 1:

Old shim: 2.00 mm thickness

Old pinion: +20 (0.02 mm)

New pinion: -10 (-0.01 mm)

$$2.00 + 0.02 + 0.01 = 2.03$$

Select the 2.03 mm (0.0799 in) new shim.

Example 2:

Old shim: 1.70 mm thickness

Old pinion: -10 (-0.01 mm)

New pinion: -20 (-0.02 mm)

$$1.70 - 0.01 + 0.02 = 1.71$$

Select the 1.70 mm (0.0669 in) new shim.

43 mm THRUST SHIM

	Part Number	Thickness
A	41410 -PSD -000	1.64 mm (0.0646 in)
B	41411-P5D-000	1.67 mm (0.0657 in)
C	41412-P5D-000	1.70 mm (0.0669 in)
D	41413-P5D-000	1.73 mm (0.0681 in)
E	41414-P5D-000	1.76 mm (0.0693 in)
F	41415-P5D-000	1.79 mm (0.0705 in)
G	41416-P5D-000	1.82 mm (0.0717 in)
H	41417-P5D-000	1.85 mm (0.0728 in)
I	41418-P5D-000	1.88 mm (0.0740 in)
J	41419-P5D-000	1.91 mm (0.0752 in)
K	41420-P5D-000	1.94 mm (0.0764 in)
L	41421-P5D-000	1.97 mm (0.0776 in)
M	41422-P5D-000	2.00 mm (0.0787 in)
N	41423-P5D-000	2.03 mm (0.0799 in)
O	41424-P5D-000	2.06 mm (0.0811 in)
P	41425-P5D-000	2.09 mm (0.0823 in)
Q	41426-P5D-000	2.12 mm (0.0835 in)
R	41427-P5D-000	2.15 mm (0.0846 in)
S	41428-P5D-000	2.18 mm (0.0858 in)
T	41429-P5D-000	2.21 mm (0.0870 in)
U	41430-P5D-000	2.24 mm (0.0882 in)
V	41431-P5D-000	2.27 mm (0.0894 in)