


Parking Brake

Parking Brake Shoes Replacement


⚠ WARNING Do the lining surface brake-in when replacing the shoes with new linings and/or new brake discs (drums).

1. Remove the rear brake caliper and rear brake disc/drum (see [section 18](#)).
2. Disconnect and remove the upper return springs.

'98-01 models:




UPPER RETURN SPRINGS
Check for weakness and damage.

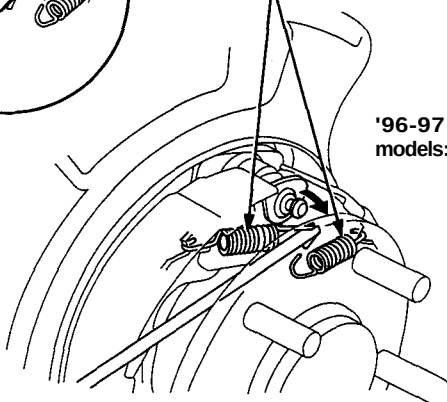

'96-97 models:

3. Remove the tension pins by pushing and turning the retainer spring.

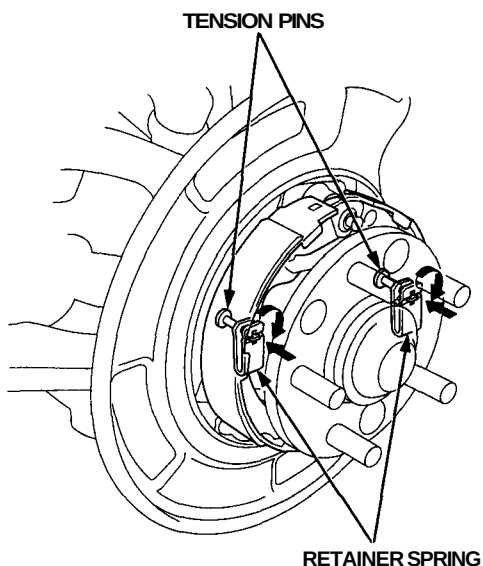


TENSION PINS

RETAINER SPRING

4. Disconnect the rod spring, and remove the connecting rod.

ROD SPRING
Check for weakness and damage.

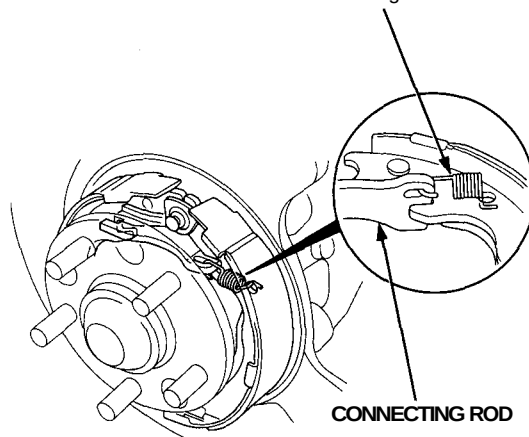


CONNECTING ROD

5. Lower the parking brake shoe assembly.
6. Separate the brake shoes by removing the lower return spring and adjuster assembly.


LOWER RETURN SPRING
Check for weakness and damage.

ADJUSTER ASSEMBLY
Check ratchet teeth for wear and damage.

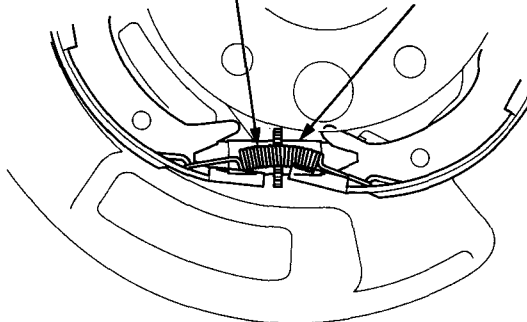




7. Remove the brake shoe by disconnecting the parking brake cable from the parking brake lever.

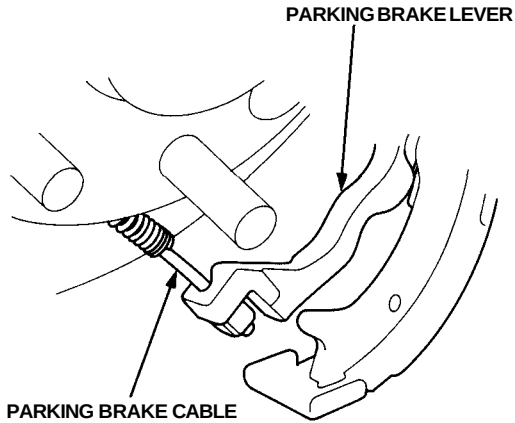


8. Remove the wave washer, parking brake lever, and pivot pin from the parking brake shoe by removing the U-clip.

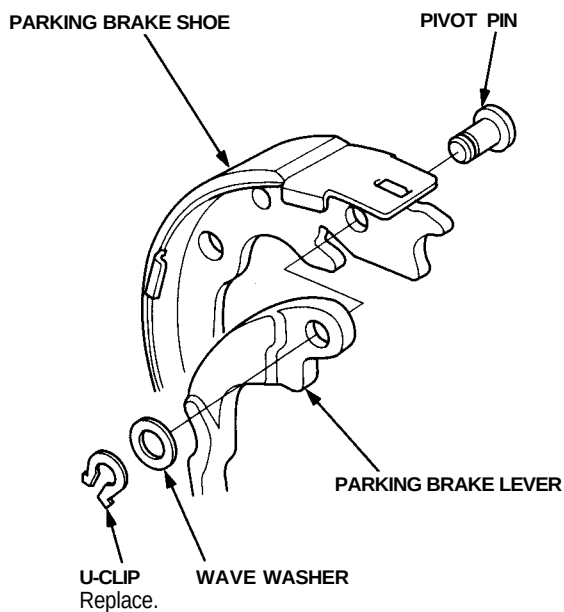


9. Apply Molykote 44 MA grease to the sliding surface of the pivot pin, and insert the pin into the parking brake shoe.

10. Install the parking brake lever and wave washer on the pivot pin, and secure them with a new U-clip.

NOTE: Pinch the new U-clip securely to prevent the pivot pin from coming out of the parking brake shoe.

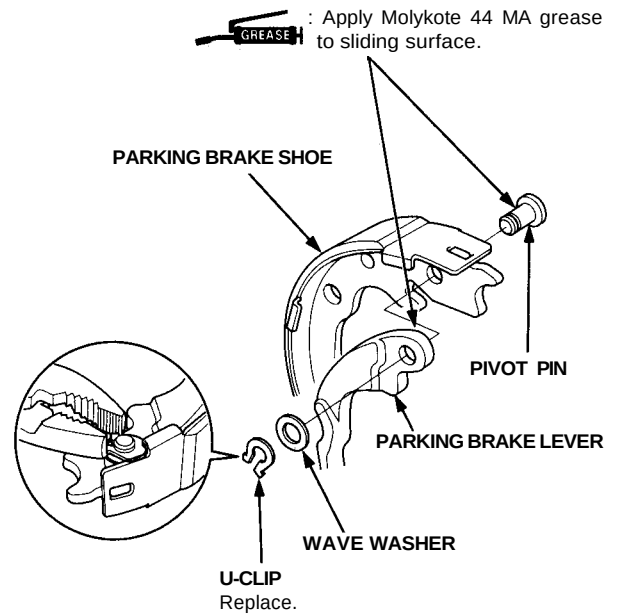

11. Connect the parking brake cable to the parking brake lever.

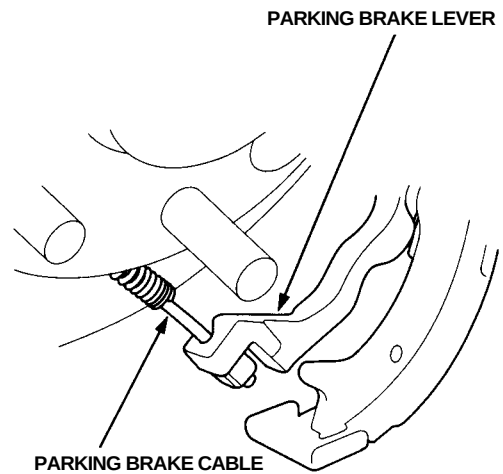


(cont'd)

Parking Brake

Parking Brake Shoes Replacement (cont'd)


12. Apply Molykote 44 MA grease on each sliding surface.

CAUTION: Contaminated brake linings or drums reduce stopping ability. Keep grease or oil off the brake linings. Wipe any excess grease off the parts.

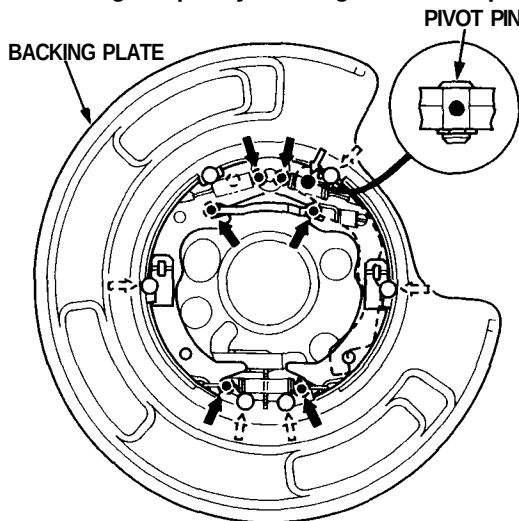

Greasing symbols:
 ➔ ● Brake shoe ends
 ➔ ○ Opposite the edge of the shoe
 ➔ ● Sliding surface


13. Clean the threaded portions of clevises A and B. Coat the threads of the clevises with Molykote 44 MA grease. To shorten the clevises, turn the adjuster bolt.

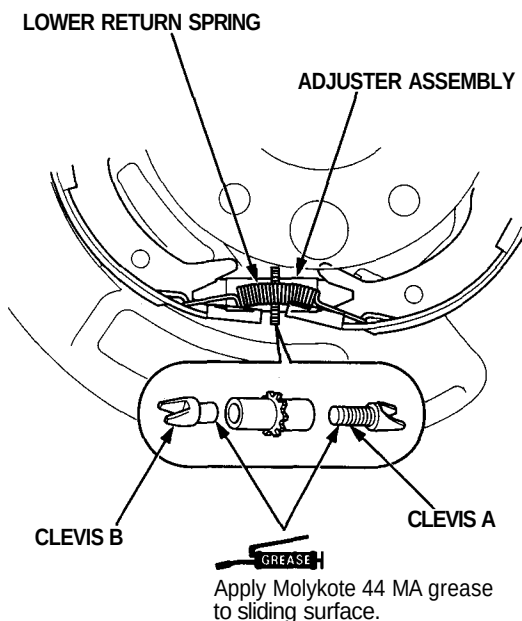


14. Install the adjuster assembly, and the lower return spring on the parking brake shoes.

15. Connect the rod spring to the connecting rod and parking brake shoe as shown.

NOTE: Hook the rod spring to the connecting rod with the spring end pointing downward.

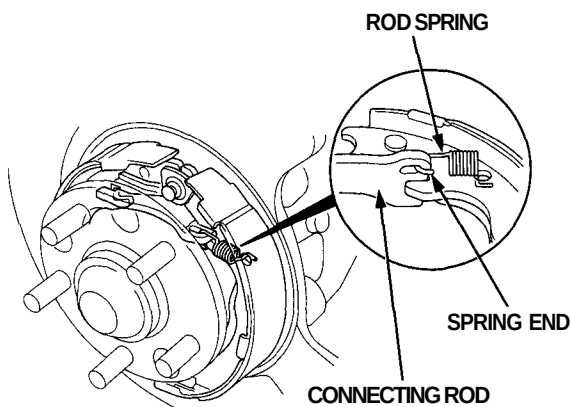


16. Install the tension pins and retainer springs.

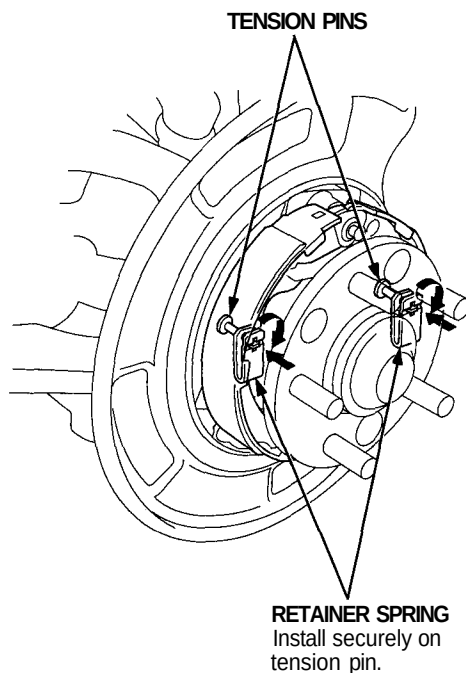




17. Install the upper return springs.

'98 – 01 models:

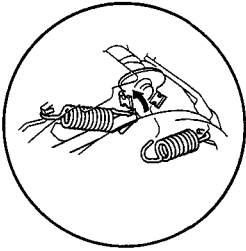

**'96 – 97
models:**

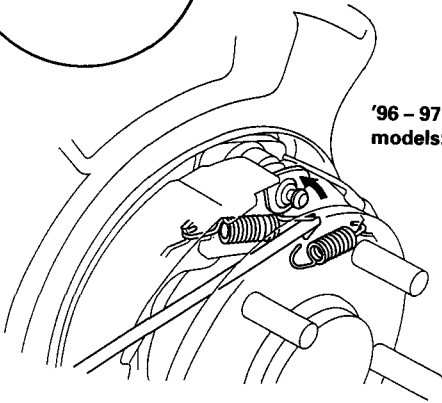

18. Install the brake disc/drum and rear brake caliper (see [section 18](#)).
19. Adjust the parking brake (see page [19-6](#)).