




Switch Plate Adjustment (Fully Closed Position/Auto Stop Position)

1. Remove the headliner (see page 20-45).
2. Using the moonroof wrench, close the glass fully.

NOTE: Check the glass fit to the roof panel.
3. Using an open-end wrench, loosen the switch plate A mounting bolts.
4. Adjust position of switch plate A (switch cam) as shown.

NOTE:

- Move switch plate A a little at a time, then secure switch plate A at the position where the switch cam contacts the closed position switch (a faint click is heard).
- Check that switch plate A contacts the cable bracket.

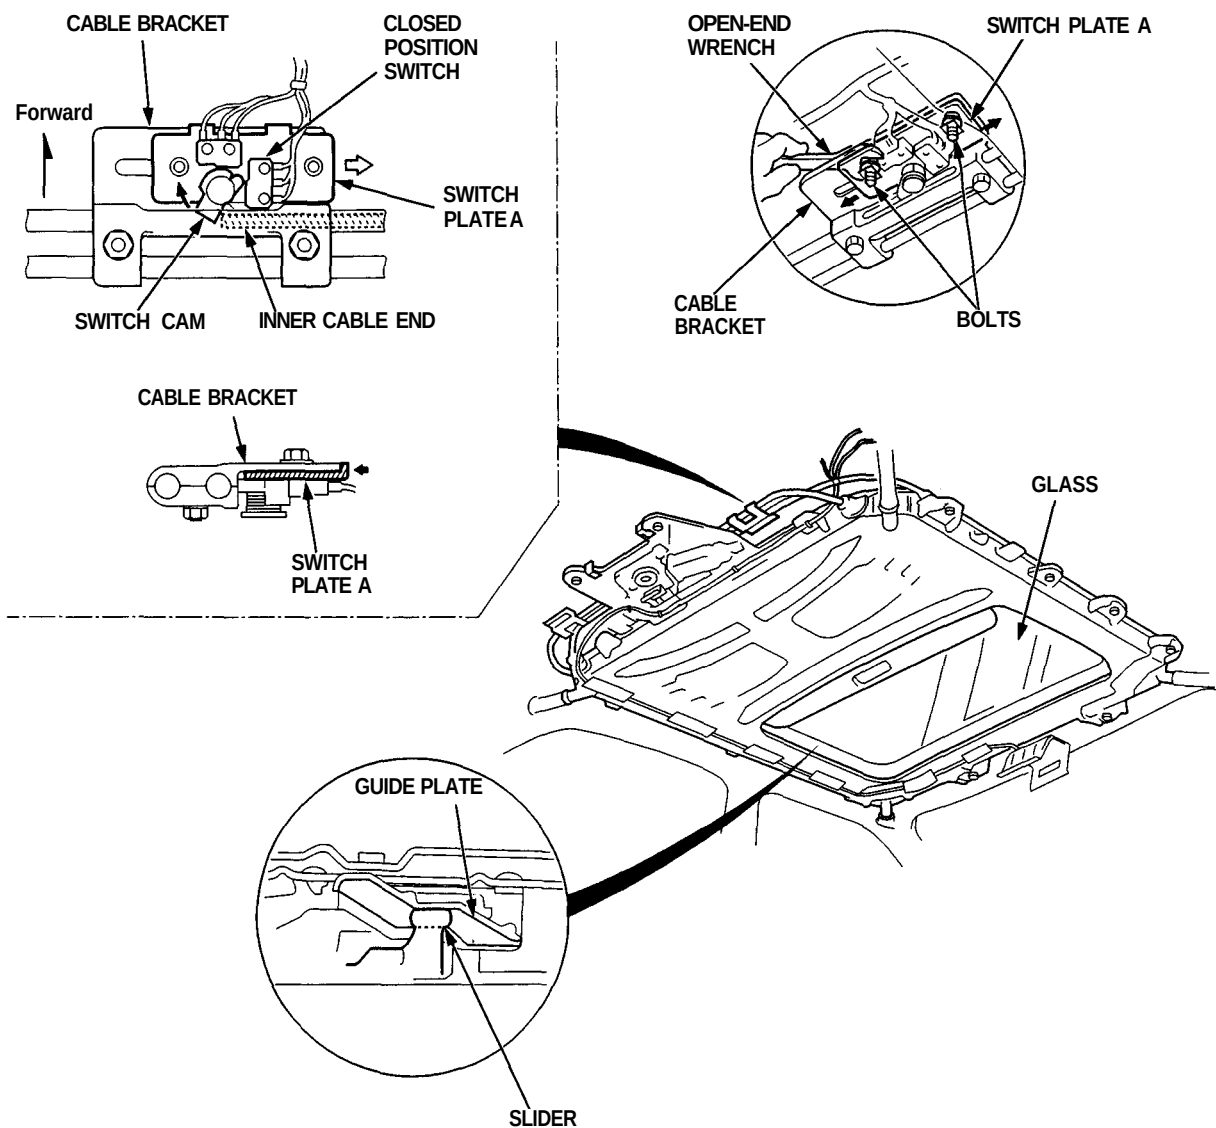

(cont'd)


Moonroof

Switch Plate Adjustment (Fully Closed Position/Auto Stop Position) (cont'd)

5. Using the moonroof wrench, open the glass to the auto stop position as shown.
6. Using an open-end wrench, loosen the switch plate B mounting bolts.
7. Adjust position of switch plate B (switch cam) as shown.

NOTE:

- Move switch plate B a little at a time, then secure switch plate B at the position where the switch cam contacts the auto stop position switch (a faint click is heard).
- Check that switch plate B contacts the cable bracket.

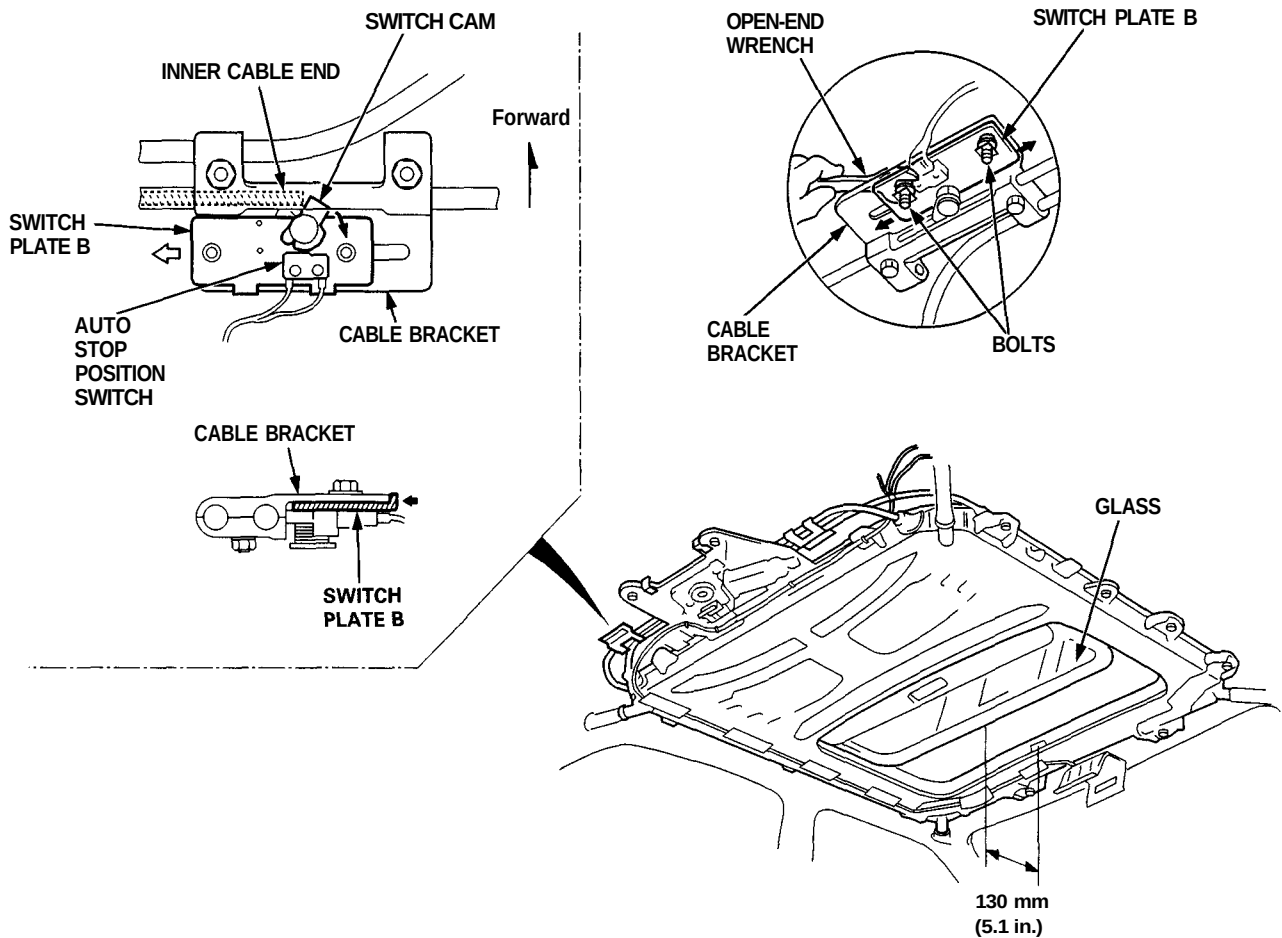

8. Check the operation of the glass (from the tilt-up position to the fully closed position, from the fully opened position to the auto stop position, from the auto stop position to the fully closed position) by operating the moonroof switch.