



Interior Trim

Removal



CAUTION:

- Put on gloves to protect your hands.
- When prying with a flat-tip screwdriver, wrap it with protective tape to prevent damage.

NOTE: Take care not to bend or scratch the trim and panels.

▷: Clip, hook locations

A ▷, 7 B ▷, 15 C ▷, 3 D ▷, 3 E ▷, 11 F ▷, 4 G ▷, 3

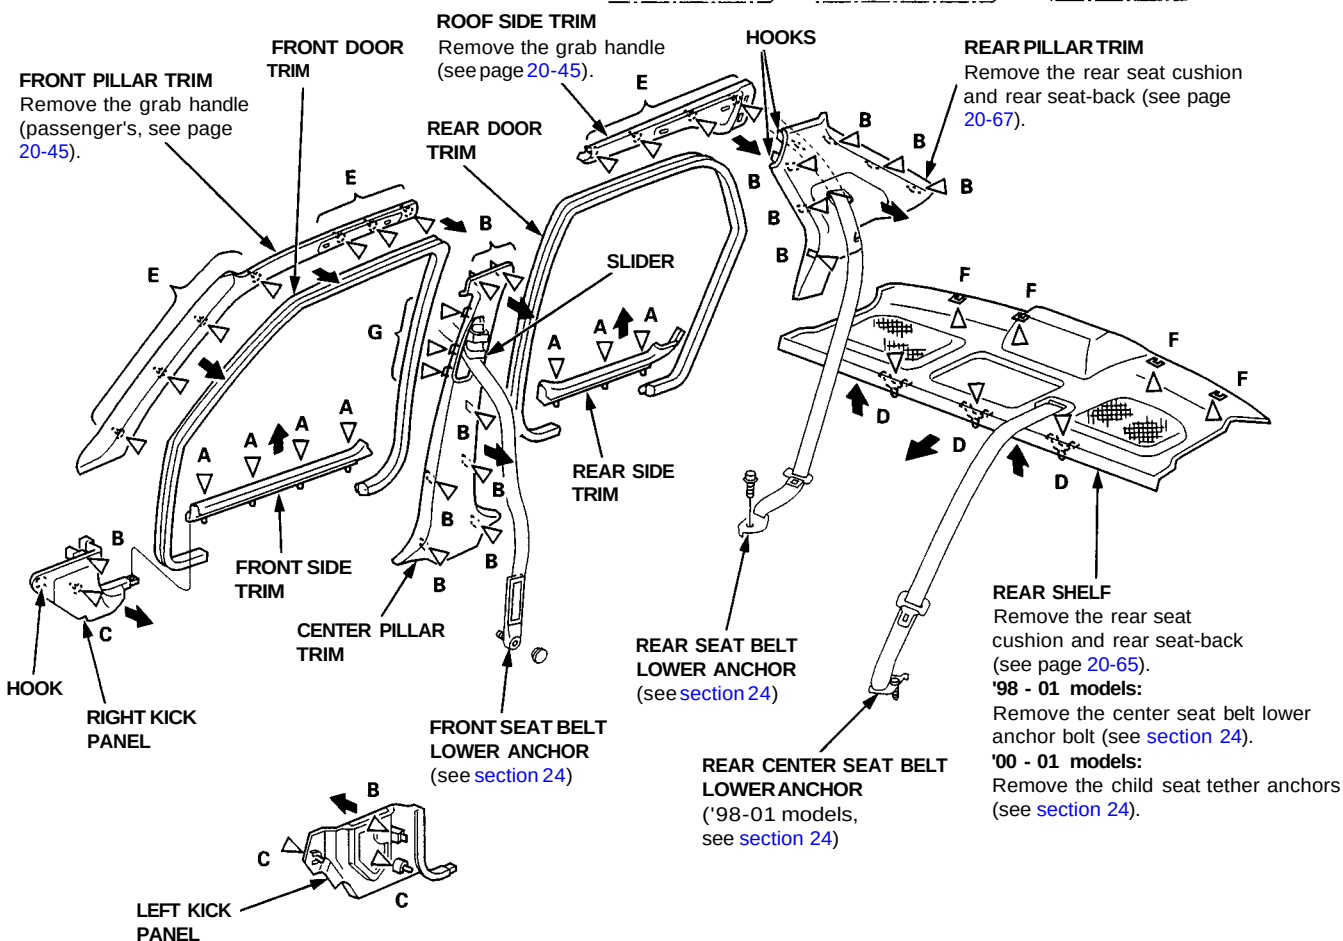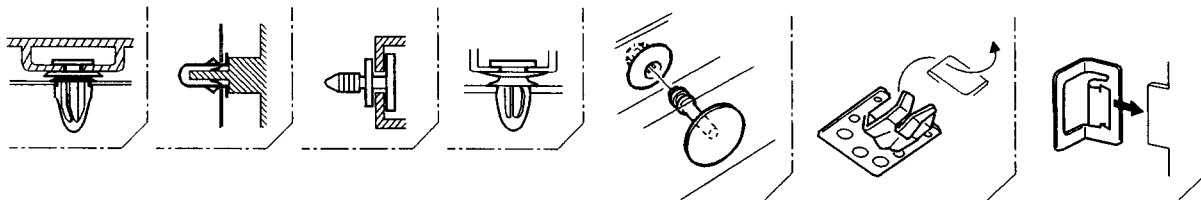

Installation is the reverse of the removal procedure.

NOTE:

- If necessary, replace any damaged clips.
- Before installing the center pillar trim, lower the shoulder anchor adjuster and the slider of the center pillar trim fully.
- Before installing the anchor bolts and rear pillar trim, make sure there are no twists or kinks in the seat belts.
- '00 - 01 models: Make sure the child seat tether anchors are installed securely.

