


**Special tools required:**

- 61 0 250

**Necessary preliminary tasks:**

- Remove centre console cover
- Remove rear centre console cover
- Remove luggage compartment wheel arch panel on left.

Check the equipment dependent sockets that are available.

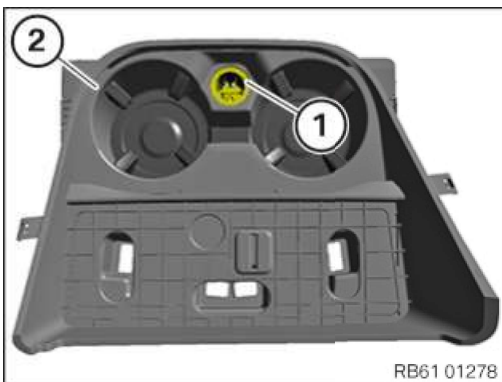**Cup holder:**

Unclip connector (1) and feed through under centre console to power socket (2).


Remove power socket (2) using special tool 61 0 250 .

See last operation.

**Rear centre console trim:**

Remove socket (1) from the centre console trim using special tool 61 0 250 2.

See last operation.

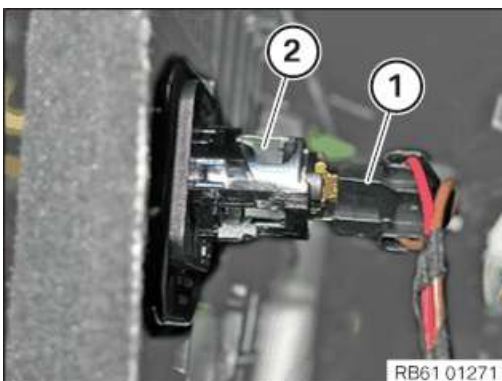**Luggage compartment:**

Hold the left luggage compartment wheel arch panel from behind and disconnect the connector (1) from the power socket (2).





Luggage compartment:


Fold up the protective cap over power socket (1).



Luggage compartment:


Remove socket (1) using special tool 61 0 250 .

See last operation.

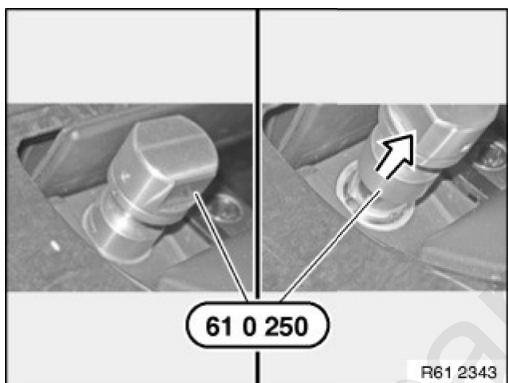

Pull out 12-V power socket from housing with special tool 61 0 250 until connector is at bottom of light ring.

For further information, see Service Information SI 01 08 09 (531)

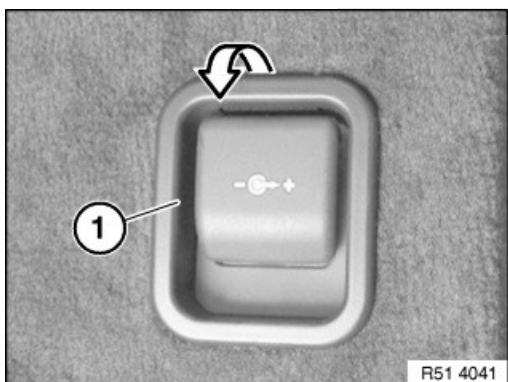


Note:

Graphic similar

Lever out power socket (1) in direction of arrow with a suitable tool.



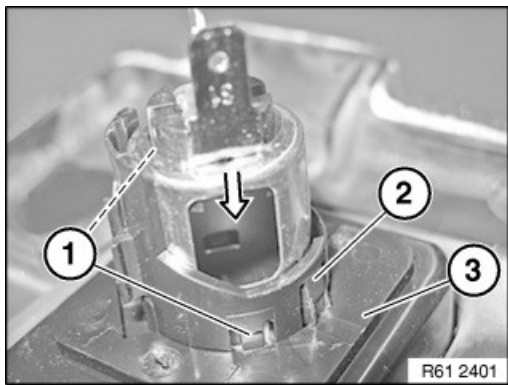

Release latch mechanisms (1) with a suitable tool.

Press power socket mounting (2) in direction of arrow out of power socket frame (3).

Installation note:

Latch mechanisms (1) at socket mounting (2) must not be damaged.
Make sure socket mounting (2) is fitted correctly in socket frame (3).

cardiagn.com

