
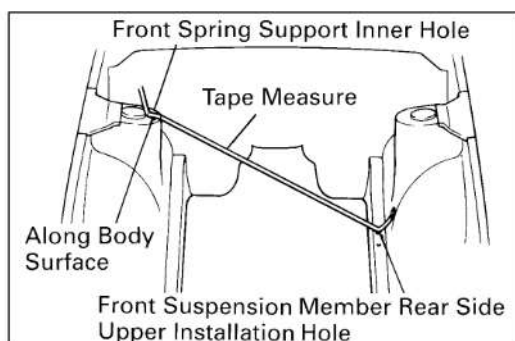
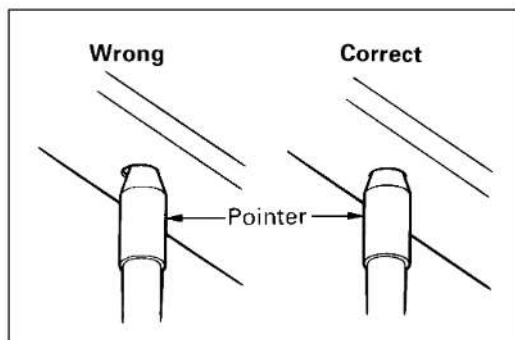
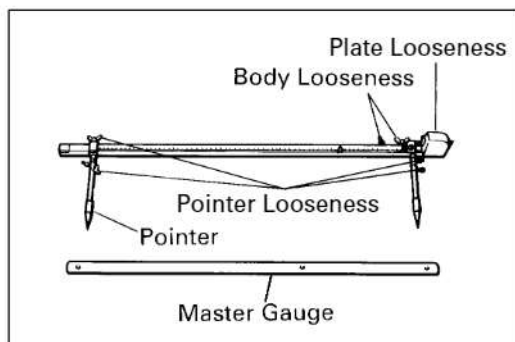
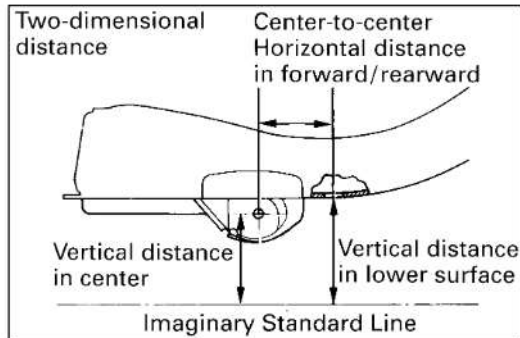


BODY DIMENSIONS

	Page
GENERAL INFORMATION	DI-2
BODY DIMENSION DRAWINGS	DI-3

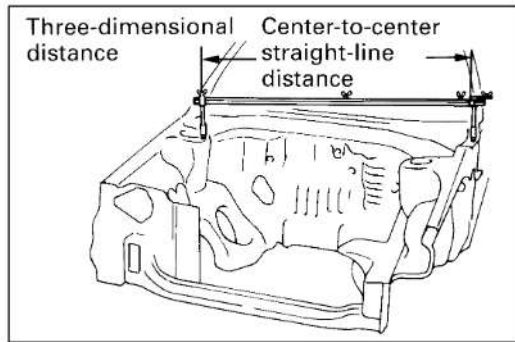

GENERAL INFORMATION

1. BASIC DIMENSIONS

- (a) There are two types of dimensions in the diagram. (Three-dimensional distance)

- Straight-line distance between the centers of two measuring points.

(Two-dimensional distance)

- Horizontal distance in forward/rearward between the centers of two measuring points.
 - The height from an imaginary standard line.
- (b) Incases in which only one dimension is given, left and right are symmetrical.
- (c) The dimensions in the following drawing indicate actual distance. Therefore, please use the dimensions as a reference.

2. MEASURING

- (a) Basically, all measurements are to be done with a tracking gauge. For portions where it is not possible to use a tracking gauge, a tape measure should be used.
- (b) Use only a tracking gauge that has no looseness in the body, measuring plate, or pointers.

HINT:


1. The height of the left and right pointers must be equal.
2. Always calibrate the tracking gauge before measuring or after adjusting the pointer height.
3. Take care not to drop the tracking gauge or otherwise shock it.
4. Confirm that the pointers are securely in the holes.

- (c) When using a tape measure, avoid twists and bends in the tape.
- (d) When tracking a diagonal measurement from the front spring support inner hole to the suspension member upper rear installation hole, measure along the front spring support panel surface.

BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT

(Three-Dimensional Distance)

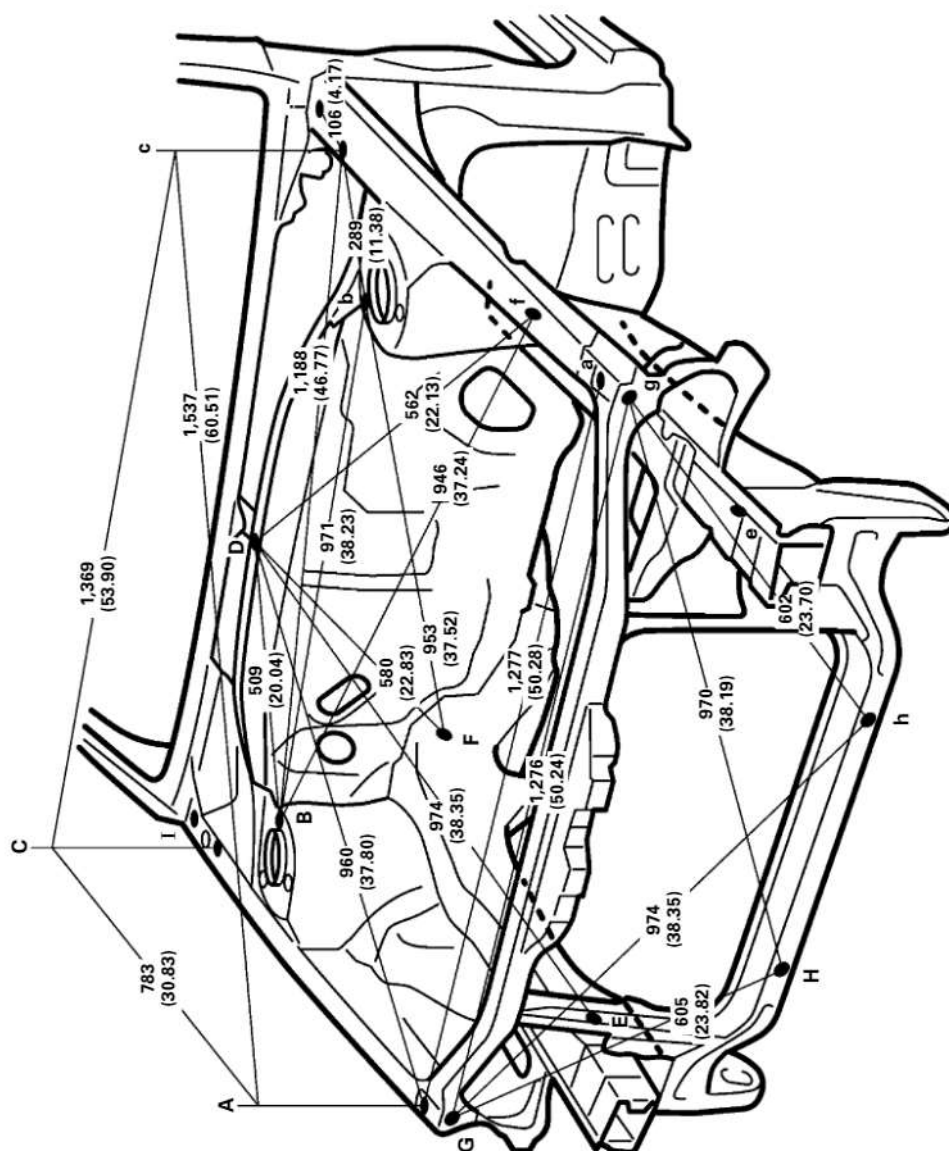


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut – front	6 (0.24) nut	F, f	Front side member working hole	18 (0.71)
B, b	Front spring support hole – inner	11 (0.43)	G, g	Radiator upper support standard hole	10 (0.39)
C, c	Front fender installation nut – rear	6 (0.24) nut	H, h	Front crossmember standard hole	15 (0.59)
D	Cowl ventilator louver installation hole	6 (0.24)	I, i	Hood hinge installation nut – rear	8 (0.31) nut
E, e	Front side member working hole	18 (0.71)	—	—	—

BODY OPENING AREAS (Side View – Front)

(Three-Dimensional Distance)

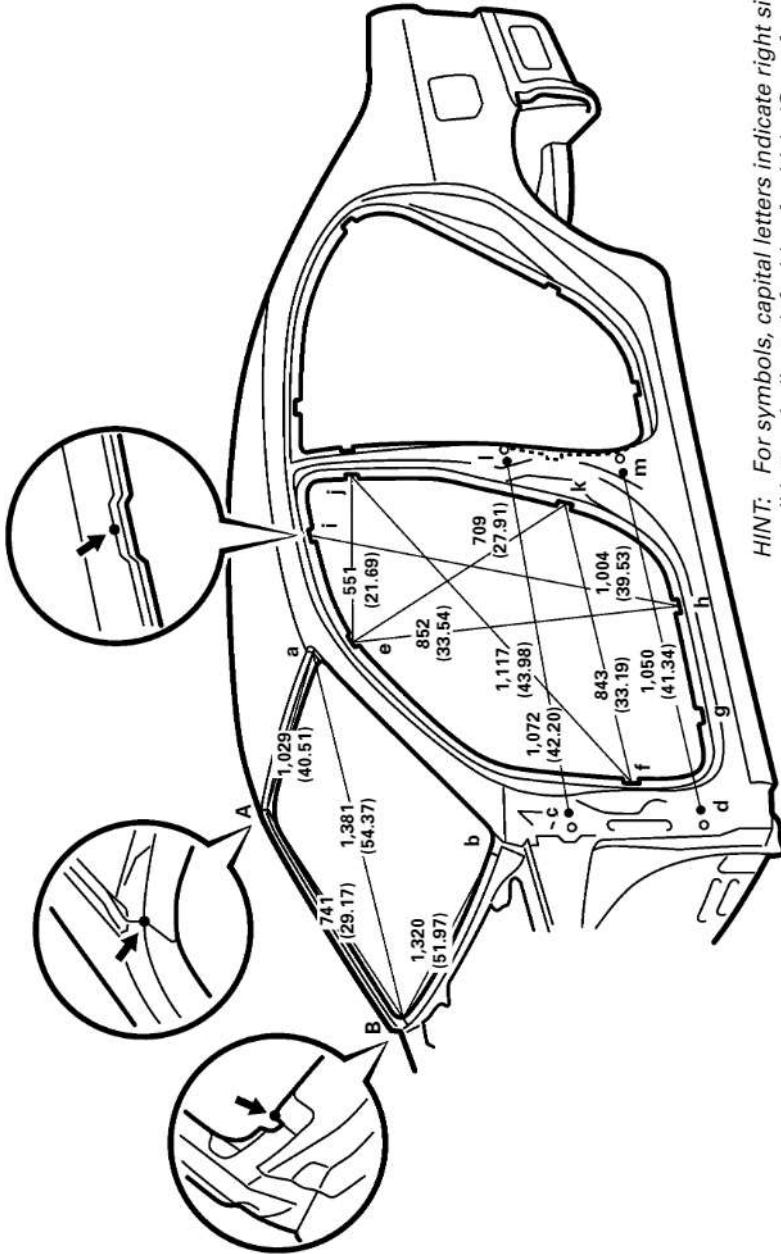

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

Vehicle Dimensions Left ↔ Right


E-e	F-f	G-g	H-h	I-i	J-j	K-k
1,172 (46.14)	1,406 (55.35)	1,444 (56.85)	1,444 (56.85)	1,062 (41.81)	1,266 (49.84)	1,426 (56.14)

E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	H-i or h-I	J-k or j-K
1,487 (58.54)	1,555 (61.22)	1,337 (52.64)	1,740 (68.50)	1,648 (64.88)	1,594 (62.76)	1,442 (56.77)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel/Front body pillar adjoining portion	—	H, h	Rocker panel assembly mark	—
B, b	Cowl top panel/Front body pillar adjoining portion	—	I, i	Roof side rail assembly mark	—
C, c	Front door hinge installation nut	8 (0.31) nut	J, j	Center body pillar assembly mark	—
D, d	Front door hinge installation nut	8 (0.31) nut	K, k	Center body pillar assembly mark	—
E, e	Front body pillar assembly mark	—	L, l	Rear door hinge installation hole	13 (0.51)
F, f	Front body pillar assembly mark	—	M, m	Rear door hinge installation hole	13 (0.51)
G, g	Rocker panel assembly mark	—	—	—	—

(Three-Dimensional Distance)

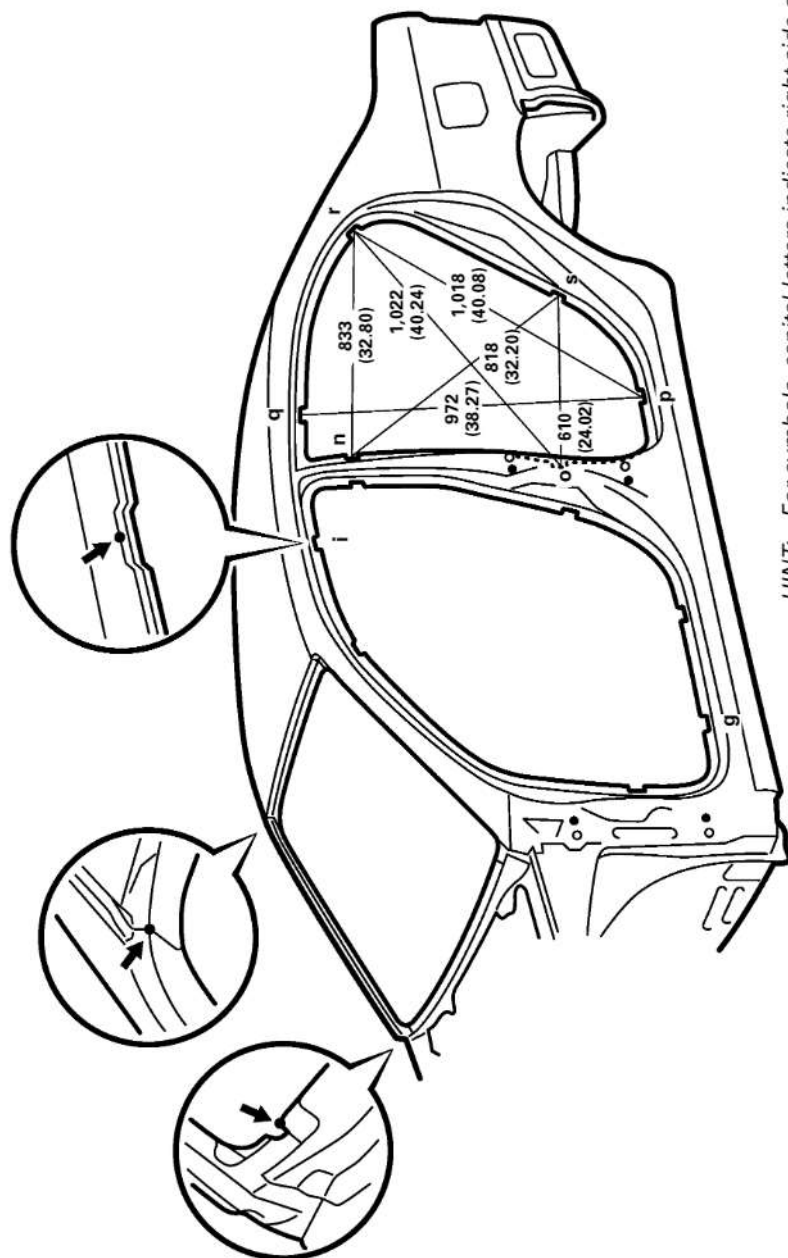

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

Vehicle Dimensions Left ↔ Right

N-n	O-o	P-p	Q-q	R-r	S-s
1,266 (49.34)	1,418 (55.53)	1,444 (56.85)	1,054 (41.50)	1,262 (49.69)	1,423 (56.02)


G-p or g-P	I-q or i-Q	N-r or n-R	N-s or n-S	O-s or o-S	P-q or p-Q	R-s or r-S
1,794 (70.63)	1,146 (45.12)	1,514 (59.61)	1,572 (61.89)	1,546 (60.87)	1,571 (61.95)	1,499 (59.02)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
G, g	Rocker panel assembly mark	—	P, p	Rocker panel assembly mark	—
I, i	Roof side rail assembly mark	—	Q, q	Roof side rail assembly mark	—
N, n	Center body pillar assembly mark	—	R, r	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	S, s	Quarter panel assembly mark	—

BODY OPENING AREAS

(Side View: Liftback – Rear)

(Three-Dimensional Distance)

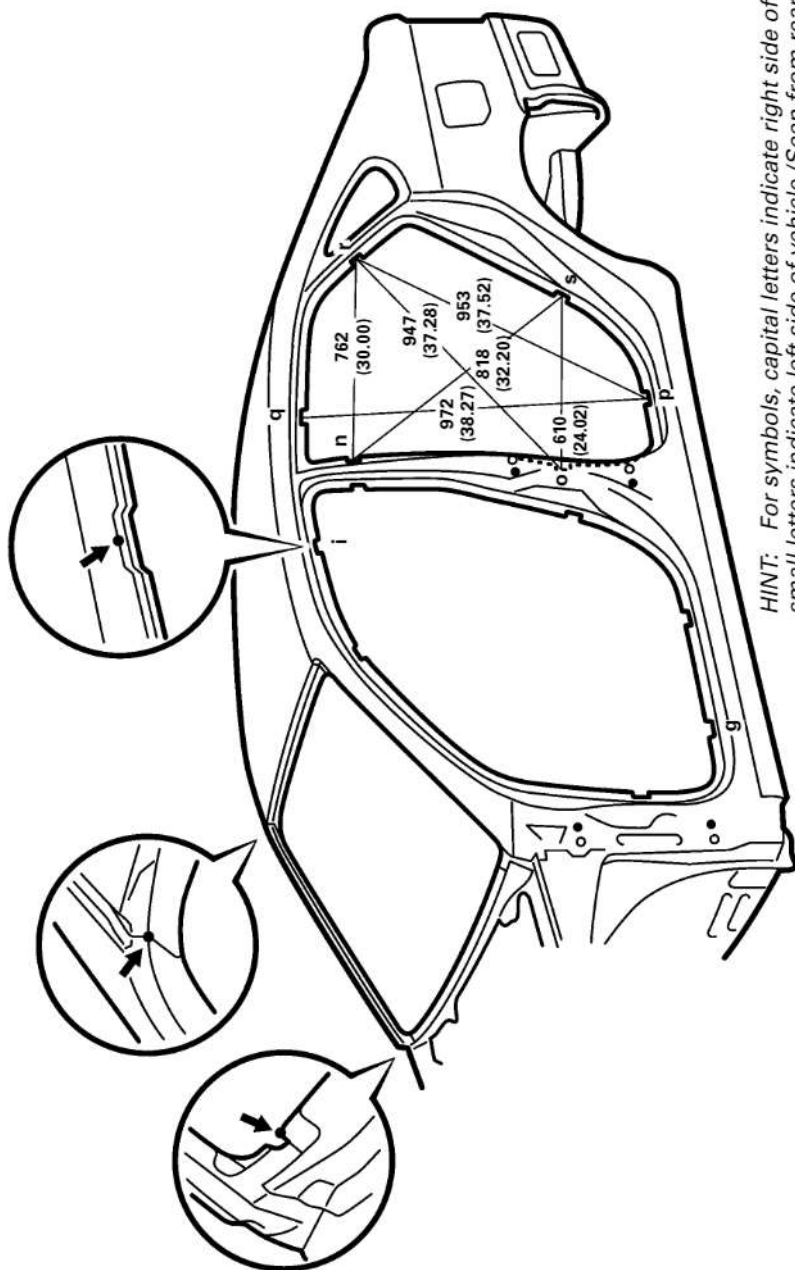

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

Vehicle Dimensions Left ↔ Right


N-n	O-o	P-p	Q-q	R-r	S-s
1,266 (49.84)	1,418 (55.83)	1,444 (56.85)	1,054 (41.50)	1,286 (50.63)	1,423 (56.02)

G-p or g-p	I-q or i-q	N-r or n-r	N-s or n-s	O-s or o-s	P-q or p-q	R-s or r-s
1,794 (70.63)	1,146 (45.12)	1,486 (58.50)	1,572 (61.89)	1,546 (60.87)	1,571 (61.85)	1,488 (58.58)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
G, g	Rocker panel assembly mark	—	P, p	Rocker panel assembly mark	—
I, i	Roof side rail assembly mark	—	Q, q	Roof side rail assembly mark	—
N, n	Center body pillar assembly mark	—	R, r	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	S, s	Quarter panel assembly mark	—

BODY OPENING AREAS (Side View: Wagon – Rear)

(Three-Dimensional Distance)

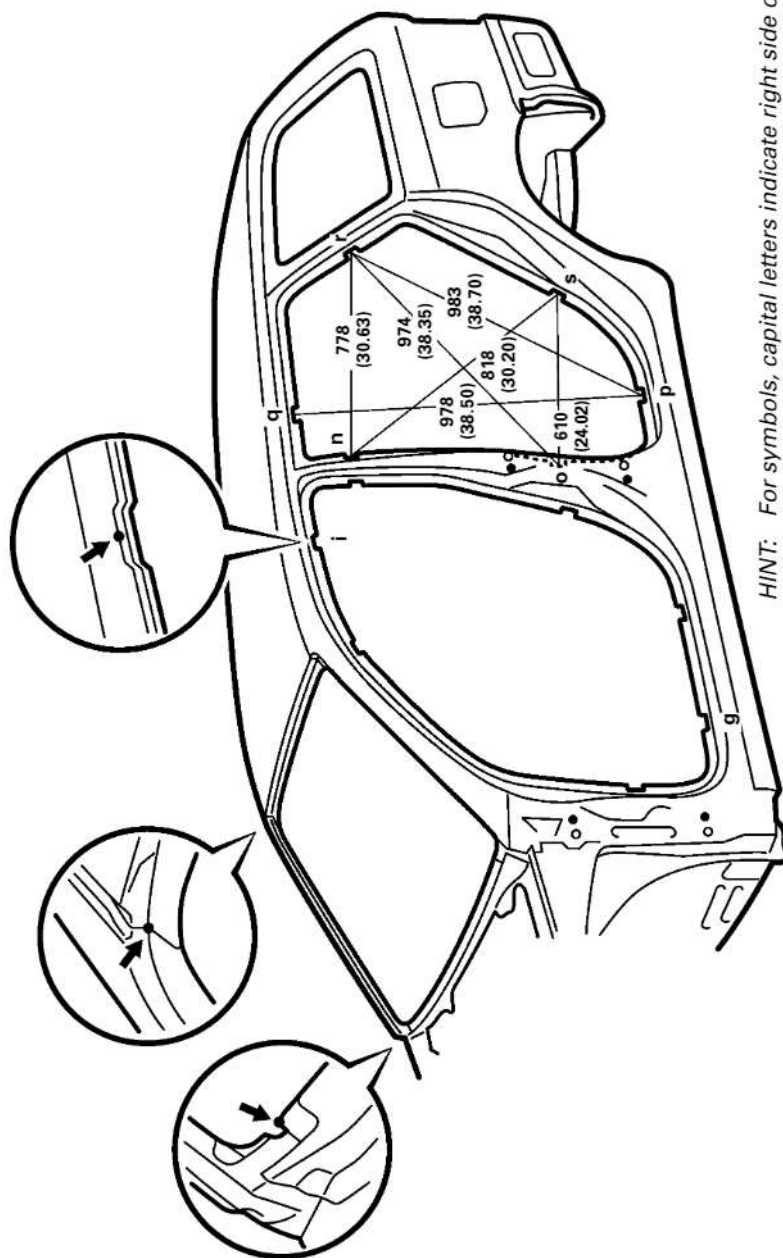

HINT: For symbols, capital letters indicate right side of vehicle,
small letters indicate left side of vehicle (Seen from rear).

Vehicle Dimensions Left ↔ Right


N-n	O-o	P-p	Q-q	R-r	S-s
1,266 (49.84)	1,418 (55.83)	1,444 (56.85)	1,048 (41.26)	1,264 (49.76)	1,423 (56.02)

G-p or g-p	I-q or i-Q	N-r or n-R	O-s or o-S	P-q or p-Q	R-s or r-S
1,794 (70.63)	1,125 (44.29)	1,485 (58.46)	1,572 (61.89)	1,571 (61.85)	1,490 (58.66)

Symbol		Name		Hole dia.	Hole dia.
G, g	Rocker panel assembly mark	P, p	Rocker panel assembly mark	—	—
I, i	Roof side rail assembly mark	Q, q	Roof side rail assembly mark	—	—
N, n	Center body pillar assembly mark	R, r	Quarter panel assembly mark	—	—
O, o	Center body pillar assembly mark	S, s	Quarter panel assembly mark	—	—


mm (in.)

BODY OPENING AREAS
(Rear View: Sedan)

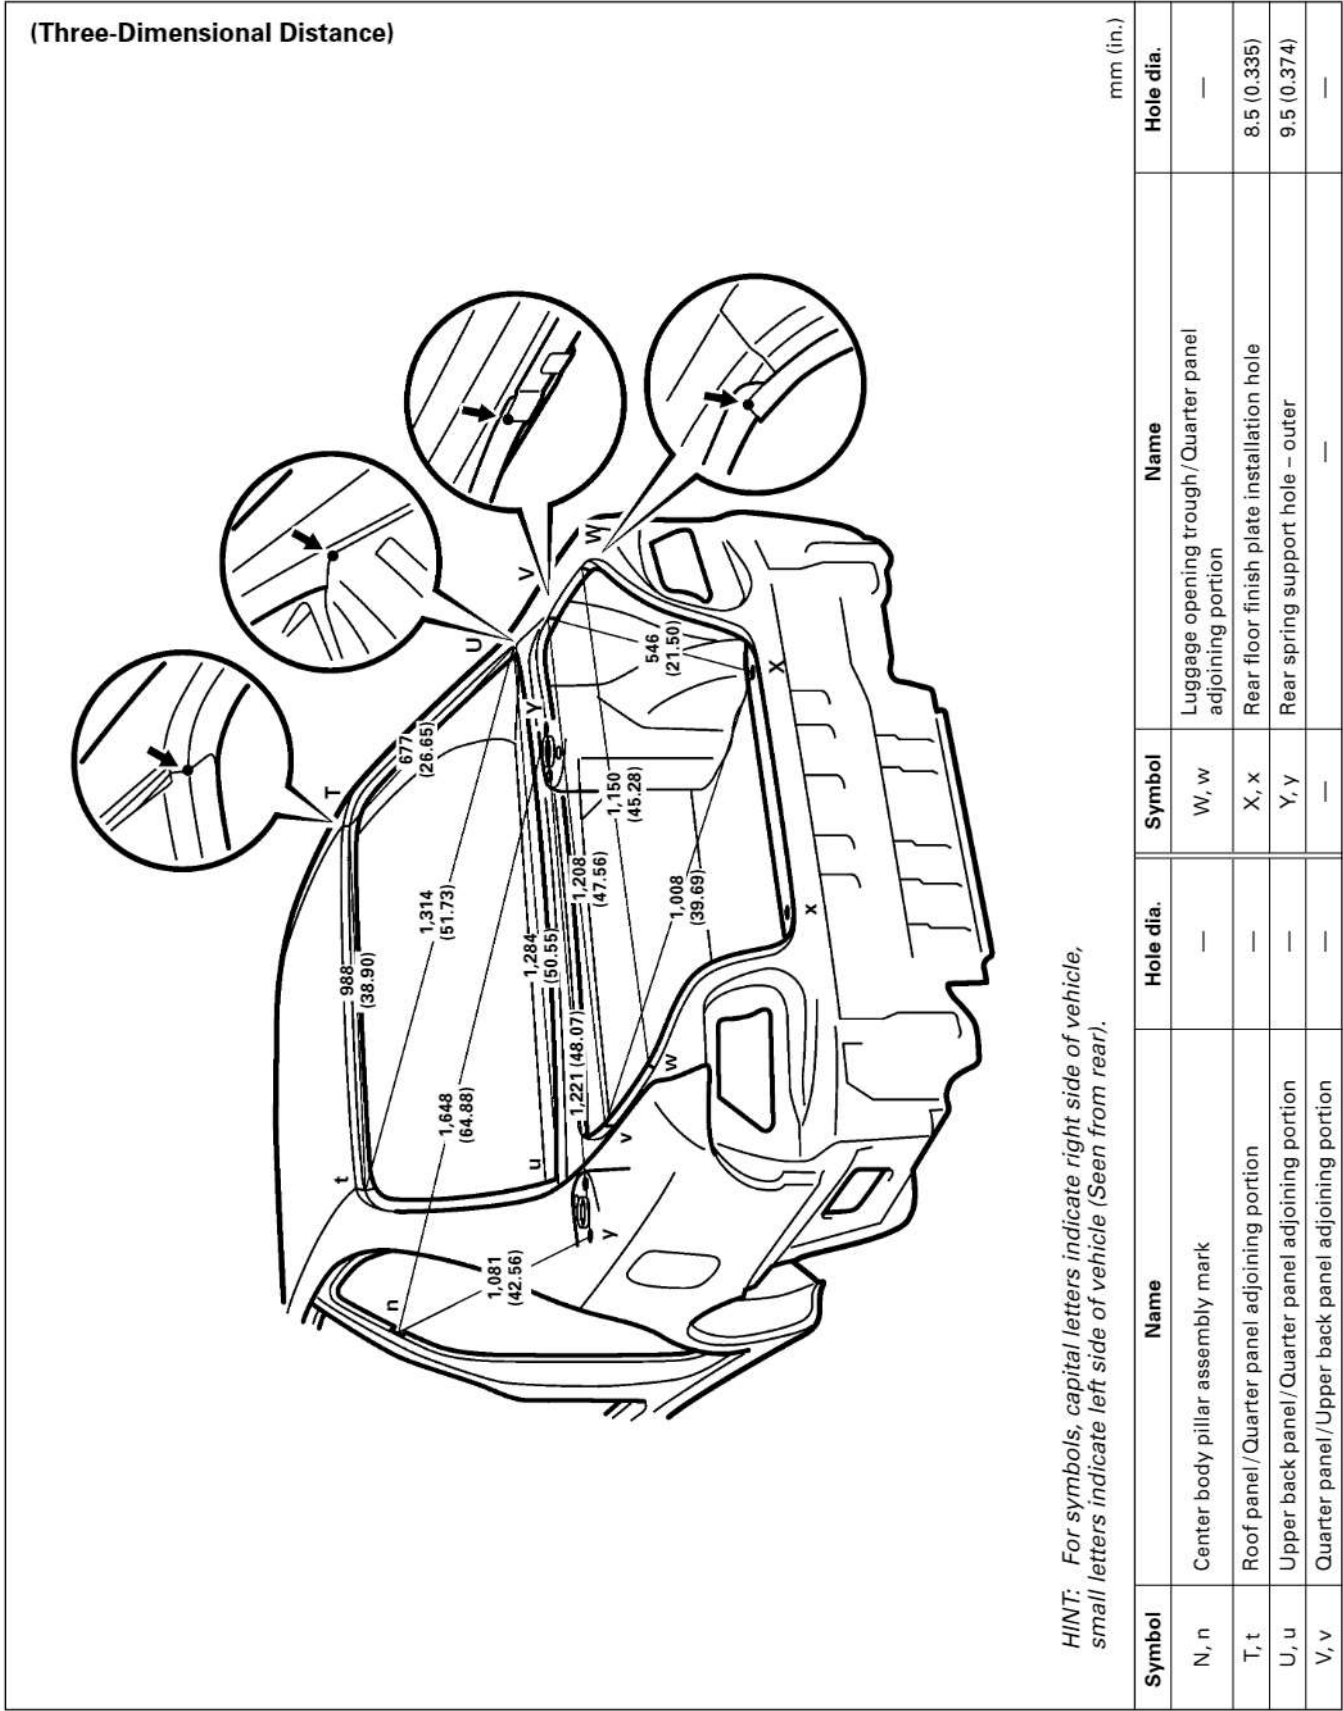

BODY OPENING AREAS
(Rear View: Liftback)


(Three-Dimensional Distance)

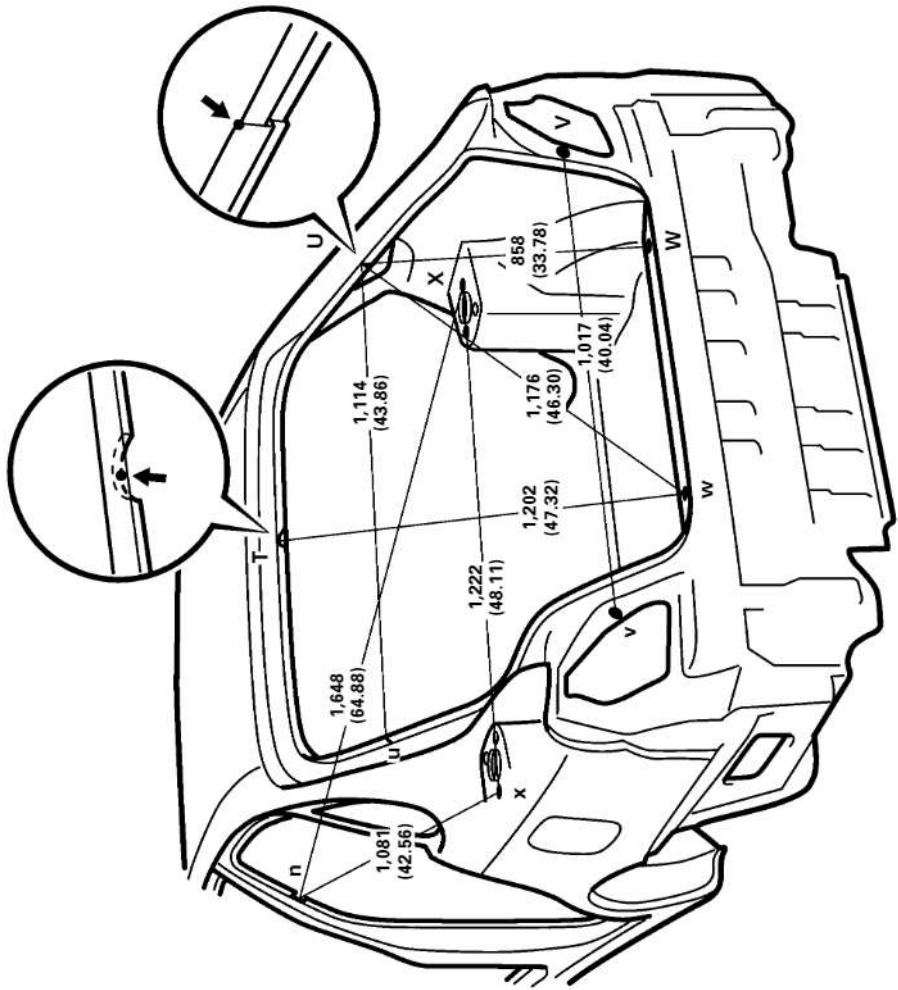

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
N, n	Center body pillar assembly mark	—	V, v	Rear combination light installation hole	10 (0.39)
T	Back door opening frame center mark	—	W, w	Rear floor finish plate installation hole	8.5 (0.335)
U, u	Roof side inner panel/Quarter panel adjoining portion	—	X, x	Rear spring support hole – outer	9.5 (0.374)

BODY OPENING AREAS
(Rear View: Wagon)

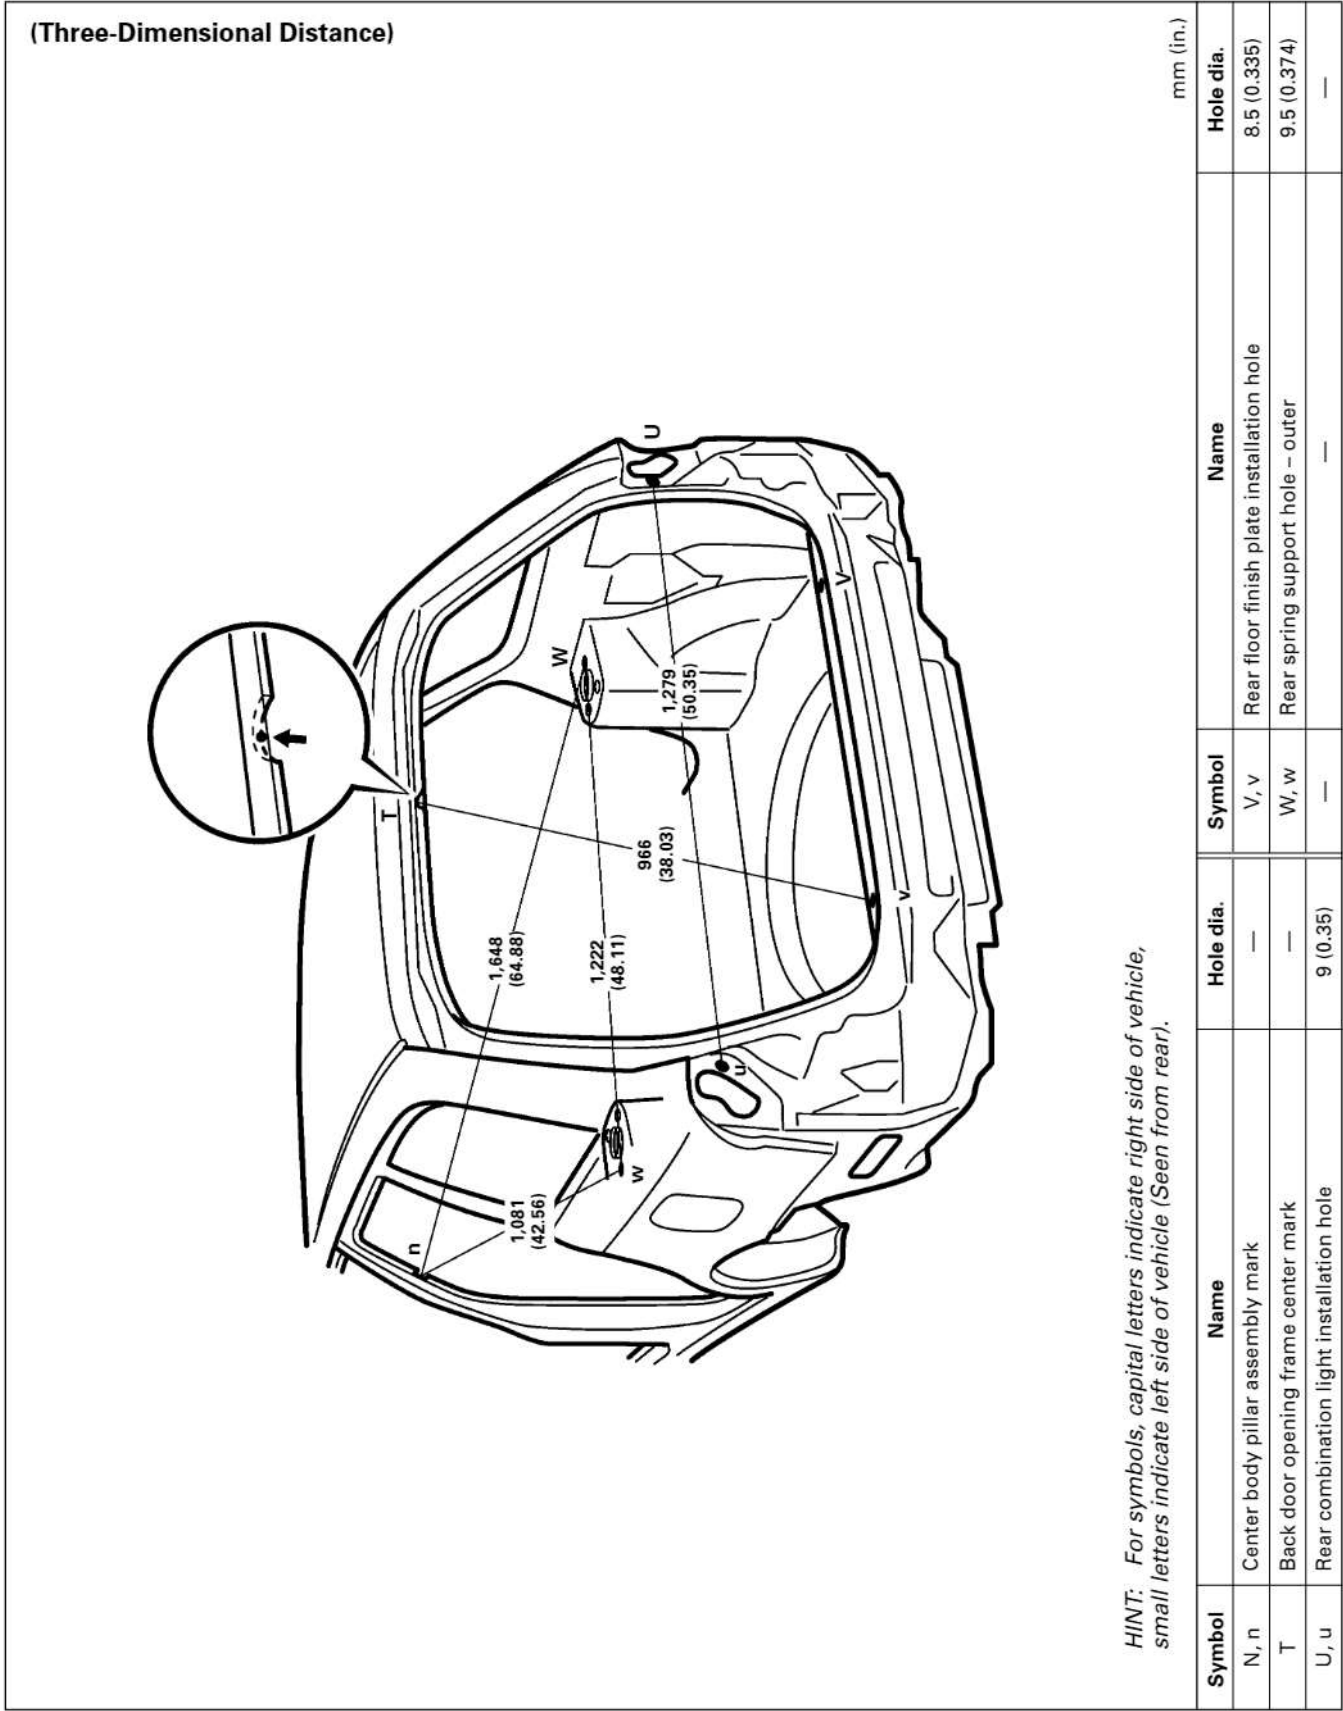


UNDER BODY

(Three-Dimensional Distance)

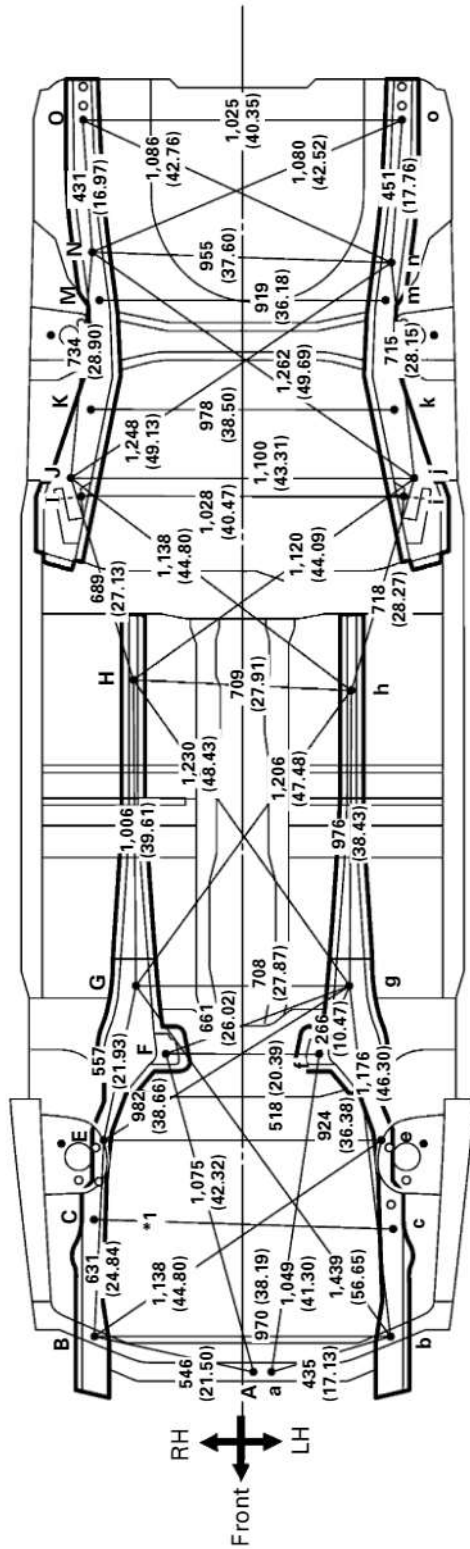

#1	AT series	970 (38.19)
	ST, CT series	961 (37.83)

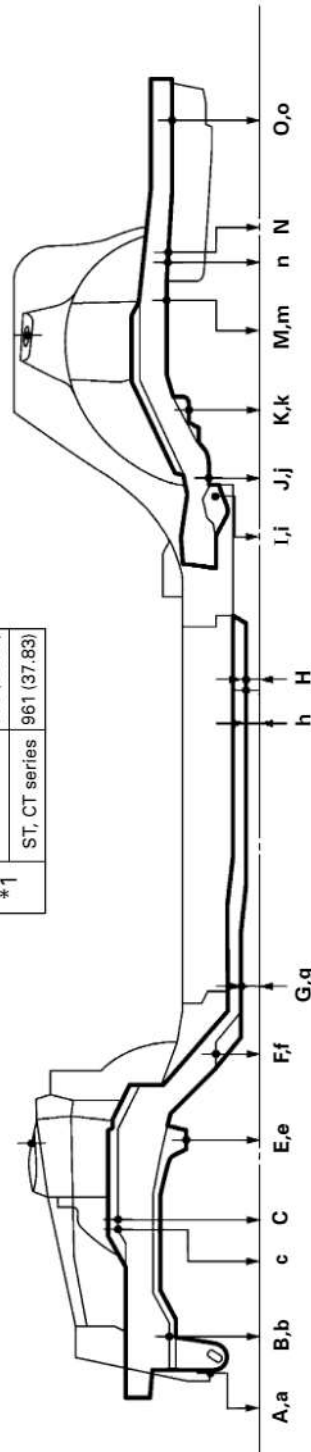

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Engine mounting member installation nut	10 (0.39) nut	I, i	Strut bar installation hole – inner	12 (0.47)
B, b	Front side member standard hole	25 (0.98)	J, j	Rear floor side member standard hole	18 (0.71)
C, c	Engine mounting bracket installation nut – front	10 (0.39) nut	K, k	Rear suspension member installation nut	12 (0.47) nut
E, e	Front suspension crossmember installation nut	14 (0.55) nut	M, m	Rear suspension member installation nut	12 (0.47) nut
F, f	Front suspension crossmember installation nut	14 (0.55) nut	N, n	Rear floor side member standard hole	18 (0.71)
G, g	Front side member standard hole	25 (0.98)	O, o	Rear floor side member standard hole	18 (0.71)
H, h	Front floor under reinforcement standard hole	15 (0.59)	—	—	—

UNDER BODY (Cont'd)

