


■ ENGINE PROPER

1. Cylinder Head Cover





- A lightweight yet high-strength aluminum cylinder head cover is used.
- Acrylic rubber, which excels in heat resistance and reliability, is used for the cylinder head cover gasket.
- PCV (Positive Crankcase Ventilation) paths are provided on the left and right side of the cylinder head cover. Accordingly, the capacity of the PCV paths is increased to ensure pollution control performance.

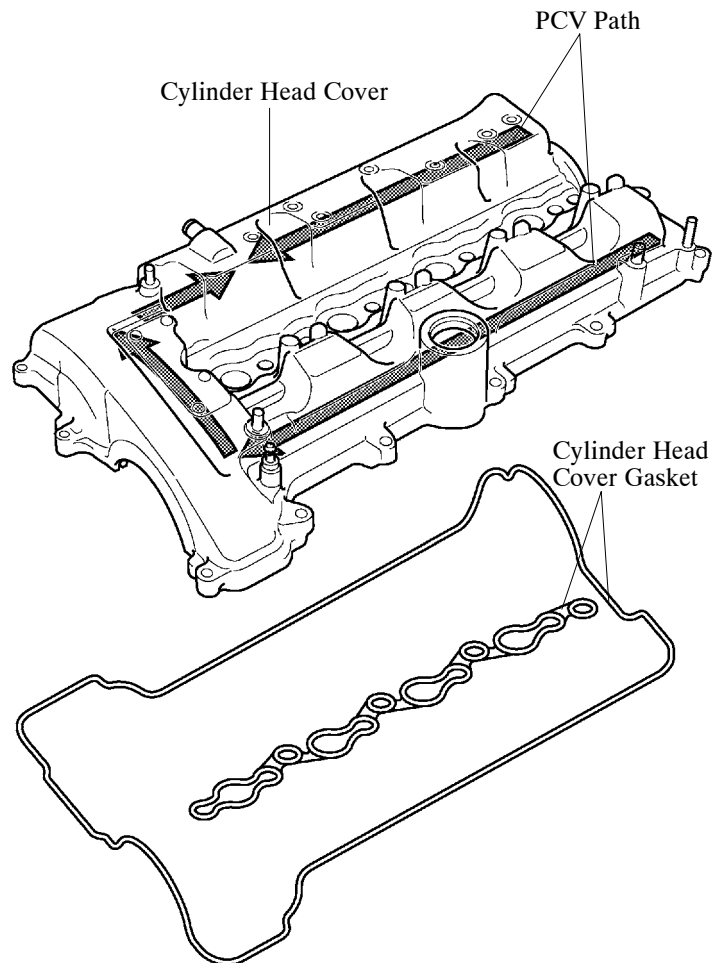

0151EG03C


2. Cylinder Head

- The cylinder head is made of aluminum alloy.
- The injector is located in the center of the combustion chamber to allow the diameters of the intake valves and the exhaust valves to be enlarged, reducing pumping losses. This contributes to enhancing fuel efficiency.
- A glow plug is placed between the intake ports of each cylinder to ensure startability.
- A water jacket is provided close to the intake and exhaust ports respectively to realize excellent cooling performance.
- A passage for the EGR is provided in the cylinder head. By cooling the exhaust gas, this makes it possible to re-circulate a greater amount of exhaust gas.
- An installation hole for the exhaust fuel addition injector is located on the No.4 exhaust port of the cylinder head.

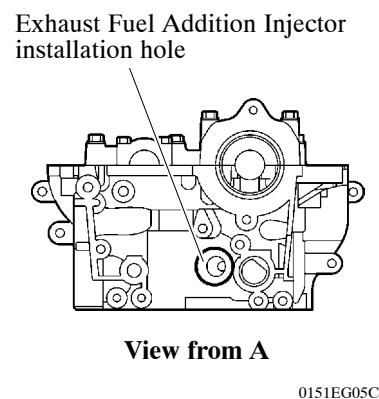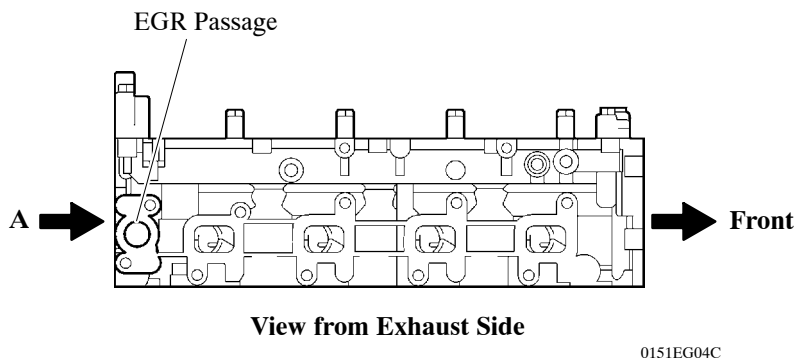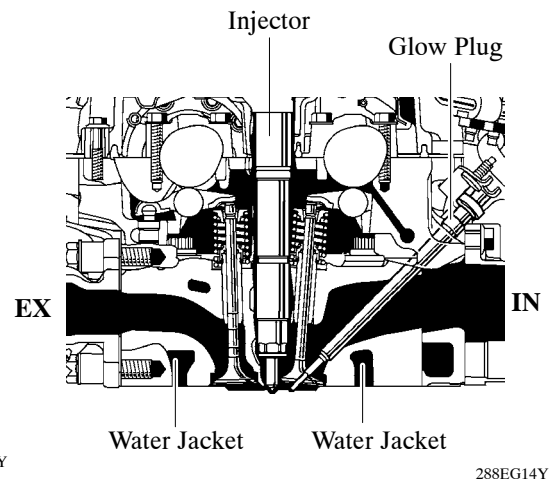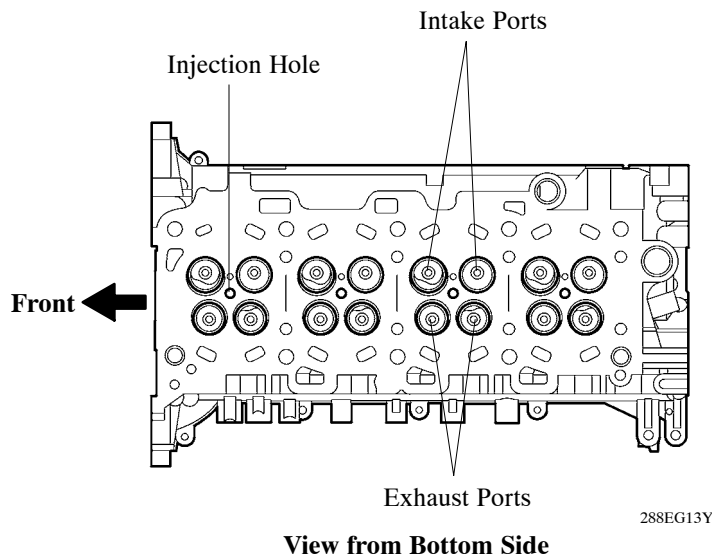


3. Cylinder Block

- The cylinder block is made of aluminum alloy.
- A water passage is provided between the cylinder bores. By allowing the engine coolant to flow between the cylinder bores, this construction enables the temperature of the cylinder walls to be kept uniform.
- The liners are a spiny-type, which are manufactured so that their casting exterior forms a large irregular surface in order to enhance the adhesion between the liners and the aluminum cylinder block. The enhanced adhesion helps improve heat dissipation, resulting in a lower overall temperature and less heat deformation of the cylinder bores.
- The crankshaft bearing caps integrated in the cylinder block lower case are used to reduce noise and to increase the coupling rigidity with the crankshaft.
- Cast-iron is used as the material for part of the bearing journal of crankshaft bearing cap to help prevent deformation due to high loads from the crankshaft.
- Plastic region tightening bolts are used for tightening the crankshaft bearing caps.
- The liners are thin, reboring is not possible.

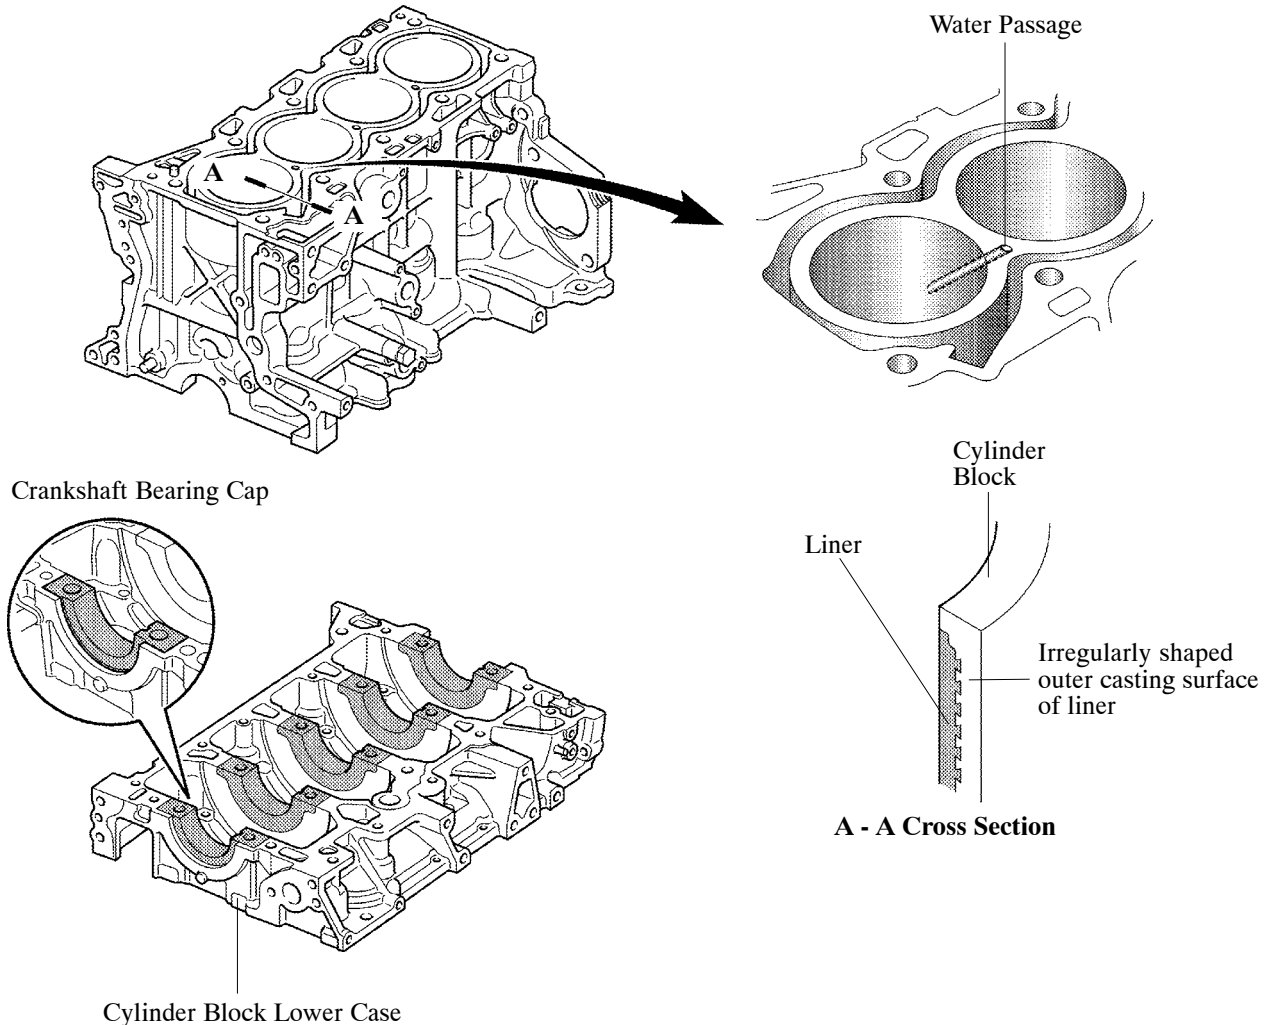

4. Piston


- The pistons are made of aluminum alloy.
- The combustion chamber is integrated into the piston due to the adoption of direct injection.
- The shape of the combustion chamber is optimized to realize a low compression ratio, high engine output, and low fuel consumption.
- A cooling channel is provided to realize excellent piston cooling performance.
- To improve the wear resistance of the top ring groove, a Ni-resist cast iron ring carrier is used.
- Along with the improved engine performance, a resin coating is applied to the piston skirts to reduce friction losses.
- Full floating type piston pins are used.
- Due to increased machining precision of the cylinder bore diameter, only one size piston is required.

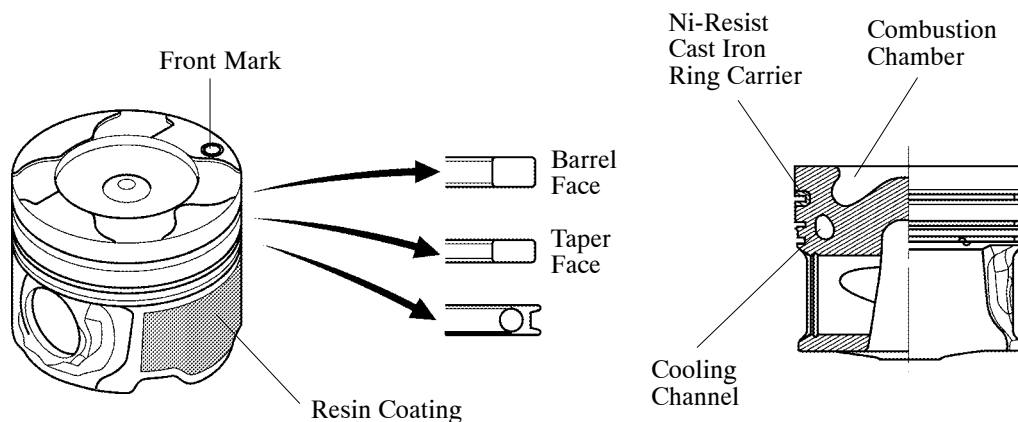

288EG09C

5. Connecting Rod and Connecting Rod Bearing


- The connecting rods and caps are made of high-strength steel for weight reduction.
- Knock pins are used at the mating surfaces of the bearing caps of the connecting rod to minimize the shifting of the bearing caps during assembly.
- Nutless-type plastic region tightening bolts are used on the connecting rods for a lighter design.
- The connecting rod bearings are reduced in width to reduce friction.

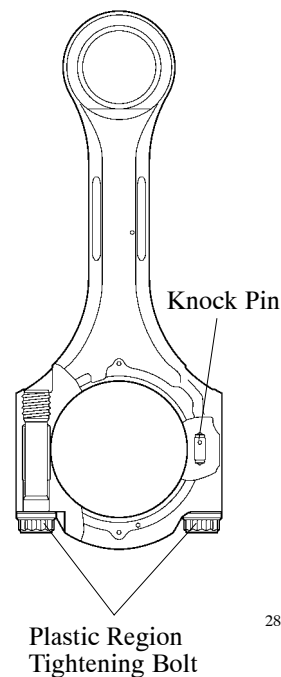

288EG23Y

6. Crankshaft


- A crankshaft made of forged steel, which excels in rigidity and wear resistance, is used.
- The crankshaft has 5 journals, 7 counterweights and balance shaft drive gear.

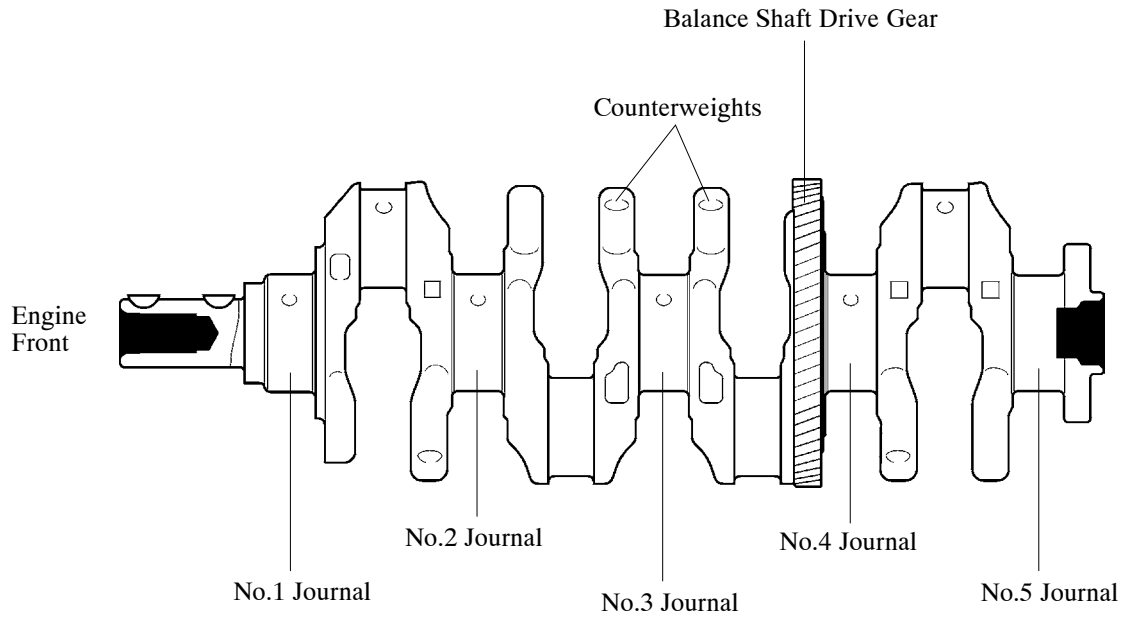

0151EG07C

7. Crankshaft Pulley

The rigidity of the crankshaft pulley with its built-in torsional damper rubber reduces noise.

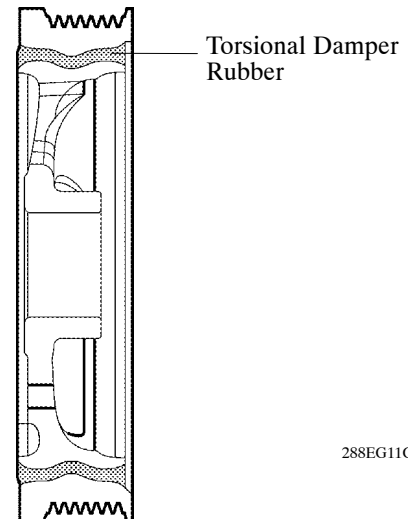


288EG11C

8. Balance Shaft


General

- Two balance shafts are used to reduce vibration.
- The crankshaft directly drives the No.1 balance shaft.
- A scissors gear is used between the crankshaft and No.1 balance shaft to reduce gear noise.

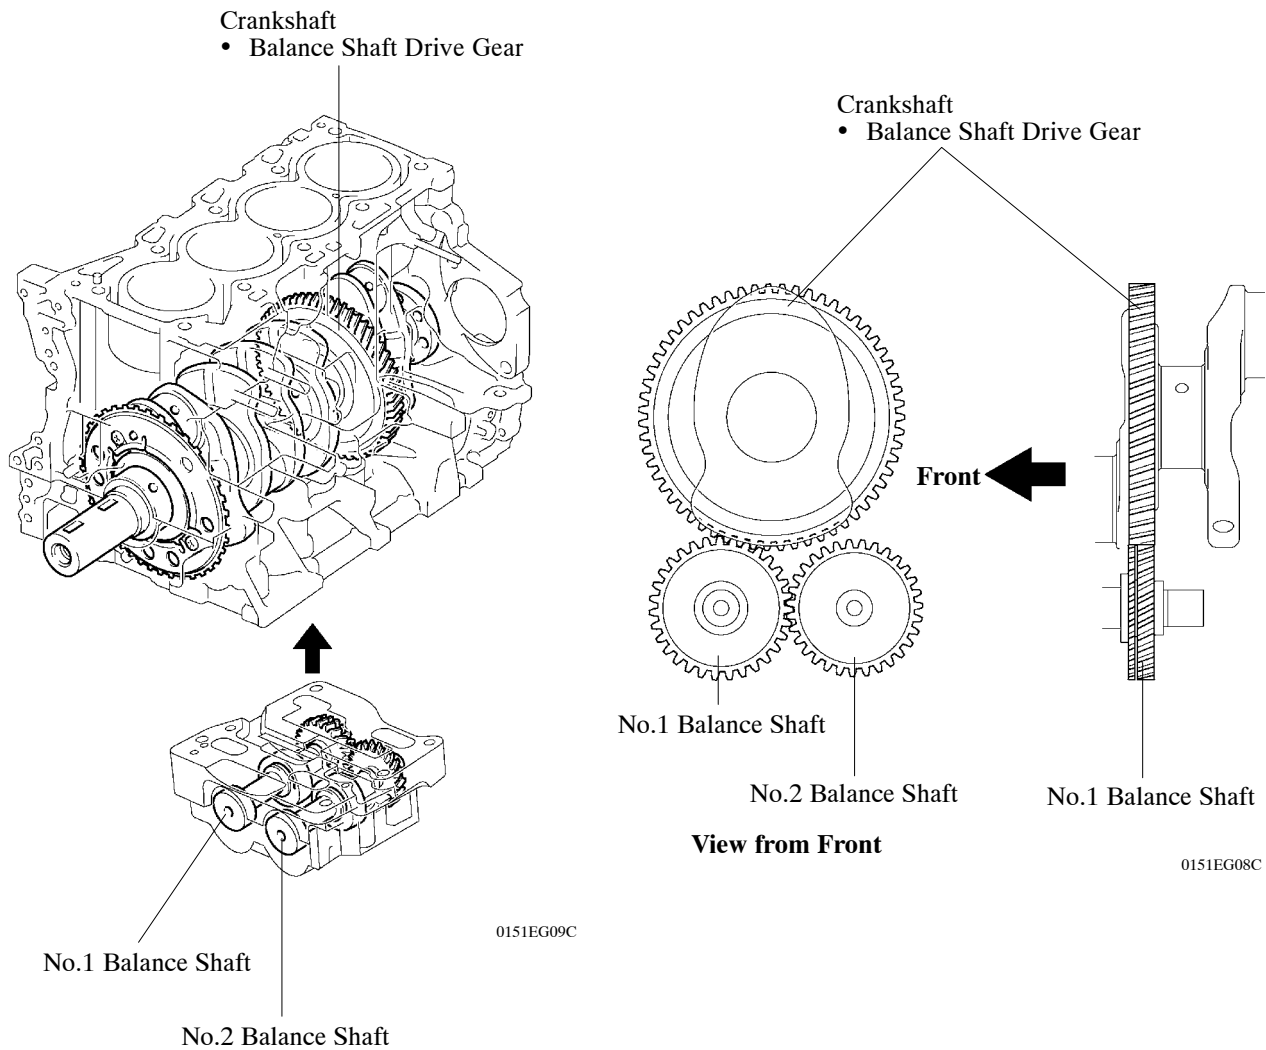


Operation

In an in-line 4-cylinder engine, the crankshaft angle for cylinders No.1 and No.4 are exactly at the opposite (180°) position of cylinders No.2 and No.3. Therefore, the inertial force of the pistons and the connecting rods of the former 2 cylinders and of the latter 2 cylinders almost cancel each other. However, because the position at which the piston reaches its maximum speed is located toward the top-dead-center from the center of the stroke, the upward inertial force is greater than the downward inertial force. This unbalanced secondary inertial force is generated at twice the crankshaft speed.

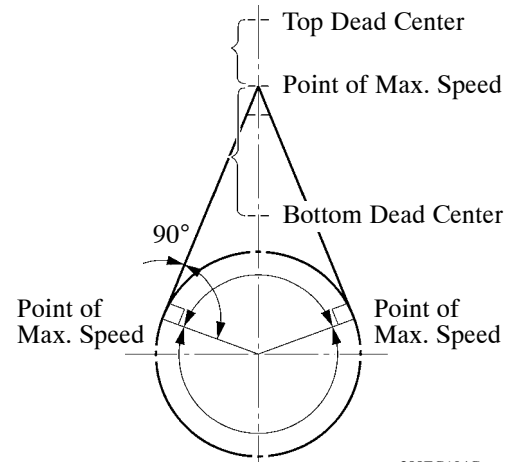


288EG104C

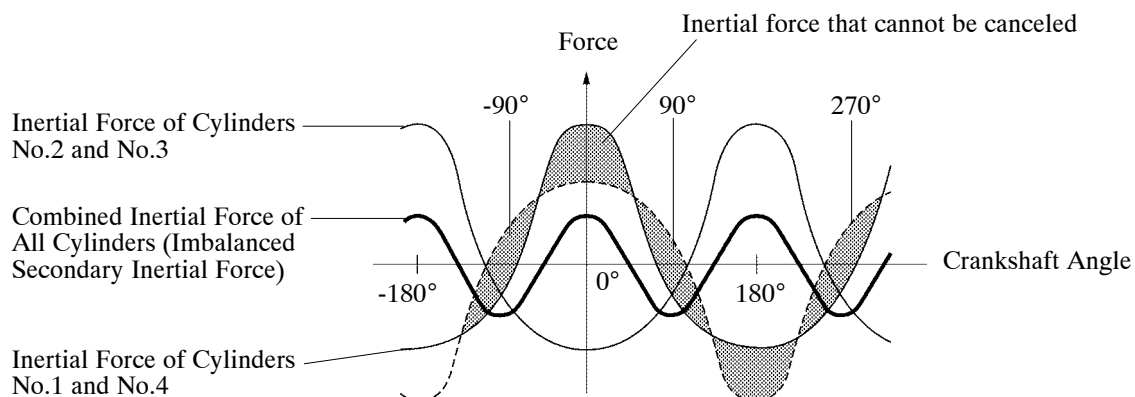

288EG105C

Inertial Force Generated by In-Line 4 Cylinders Engines

To cancel the imbalanced secondary inertial force, 2 balance shafts are rotated at twice the crankshaft speed and generate inertial force in the opposite direction. Also, in order to cancel the inertial force generated by the balance shaft itself, the balance shaft actually consists of 2 shafts rotating in opposite directions.

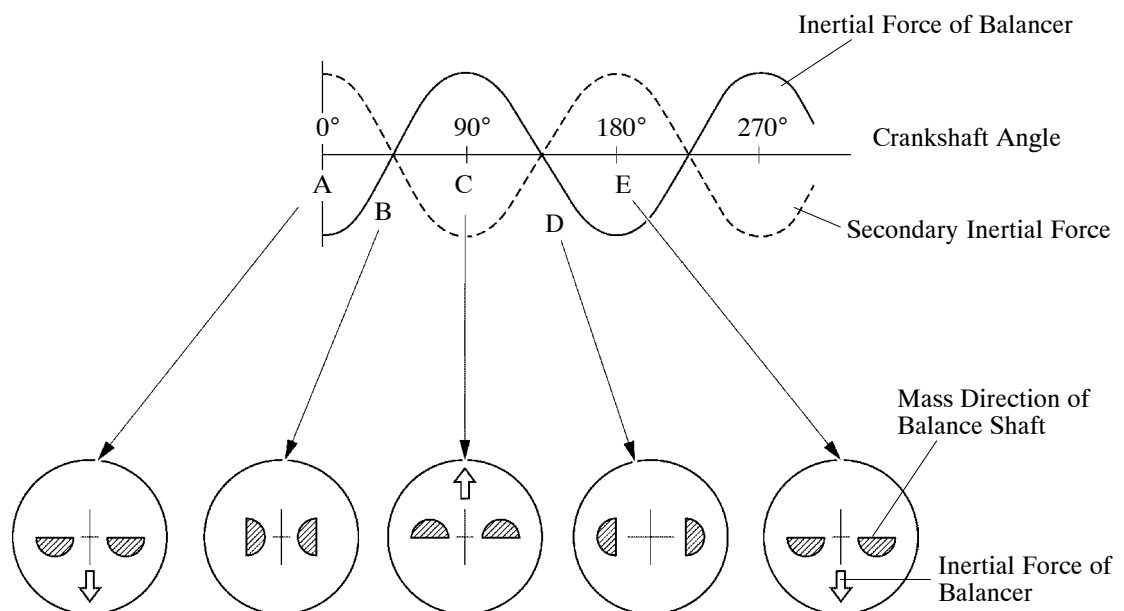

Mass Direction of Balance Shaft at Crankshaft Angle

288EG106C