


BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT

(Three - Dimensional Distance)

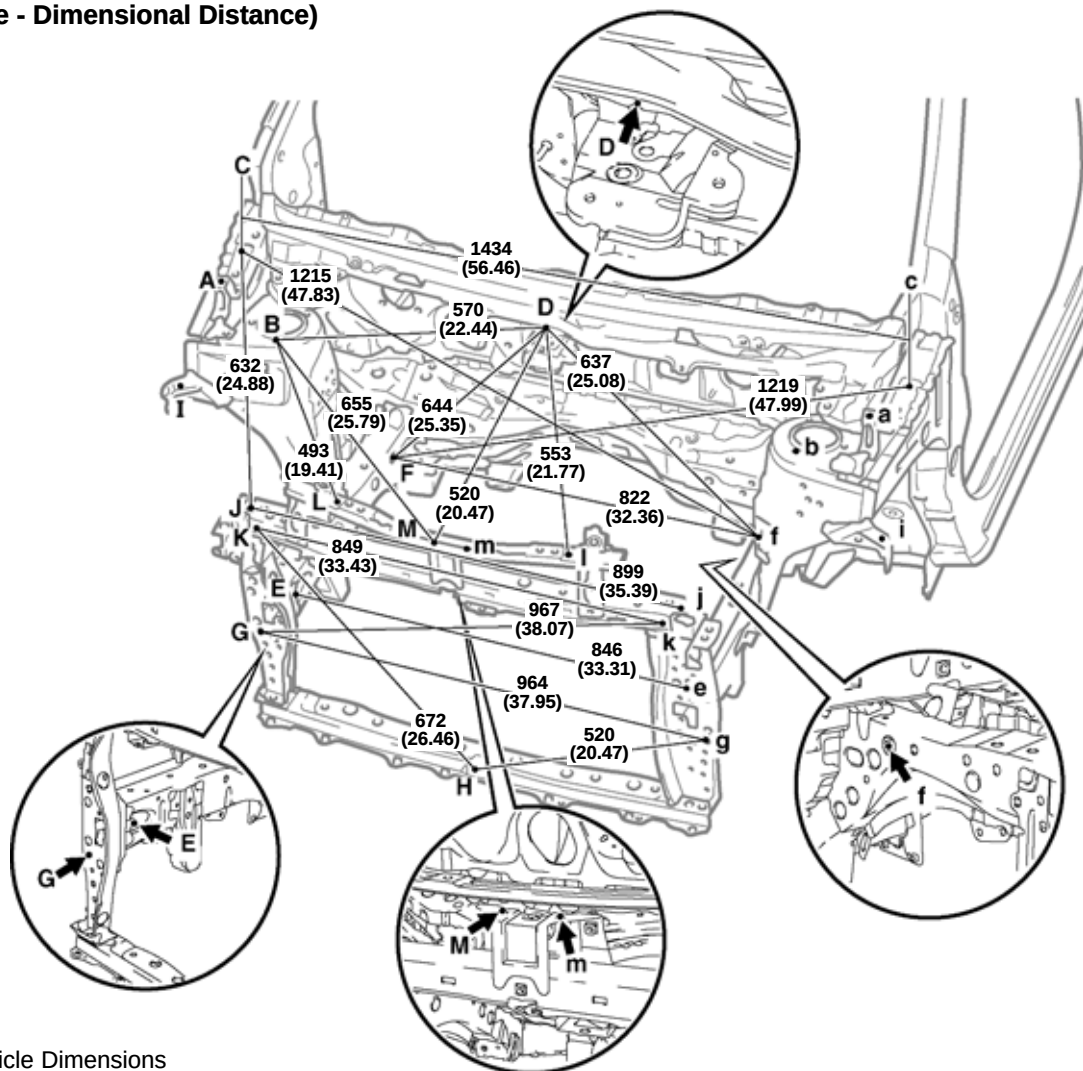

Vehicle Dimensions

A-a	A-c or a-C	A-J or a-j	A-j or a-J	A-M or a-m	A-m or a-M	B-b	B-c or b-C
1374 (54.09)	1412 (55.59)	510 (20.08)	1223 (48.15)	799 (31.46)	854 (33.62)	1107 (43.58)	1285 (50.59)
B-f	b-F	C-j or c-J	C-M or c-m	D-E or D-e	I-i	J-l or j-L	J-M or j-m
1055 (41.54)	1060 (41.73)	1299 (51.14)	903 (35.55)	759 (29.88)	1497 (58.94)	696 (27.40)	421 (16.57)

Height from Imaginary Datum Line

A-a	C-c	K-k
862 (33.94)	827 (32.56)	633 (24.92)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut	M6 (0.24)	H	Hood lock support installation nut	M6 (0.24)
B, b	Front suspension support installation hole-inner	ø11 (0.43)	I, i	Front fender mounting bracket standard hole	ø10 (0.39)
C, c	Hood hinge installation nut-rear	M8 (0.31)	J, j	Radiator support upper installation nut	M6 (0.24)
D	Cowl top outer panel center mark	—	K, k	Radiator support upper installation nut	M6 (0.24)
E, e	Front side member standard hole	ø18 (0.71)	L, l	Radiator support upper standard hole	ø13 (0.51)
F, f	Front side member standard hole	ø15 (0.59)	M, m	Hood lock support brace standard hole	ø10 (0.39)
G, g	Front bumper reinforcement installation nut	M10 (0.39)	—	—	—

BODY OPENING AREAS (Side View)

(Three - Dimensional Distance)

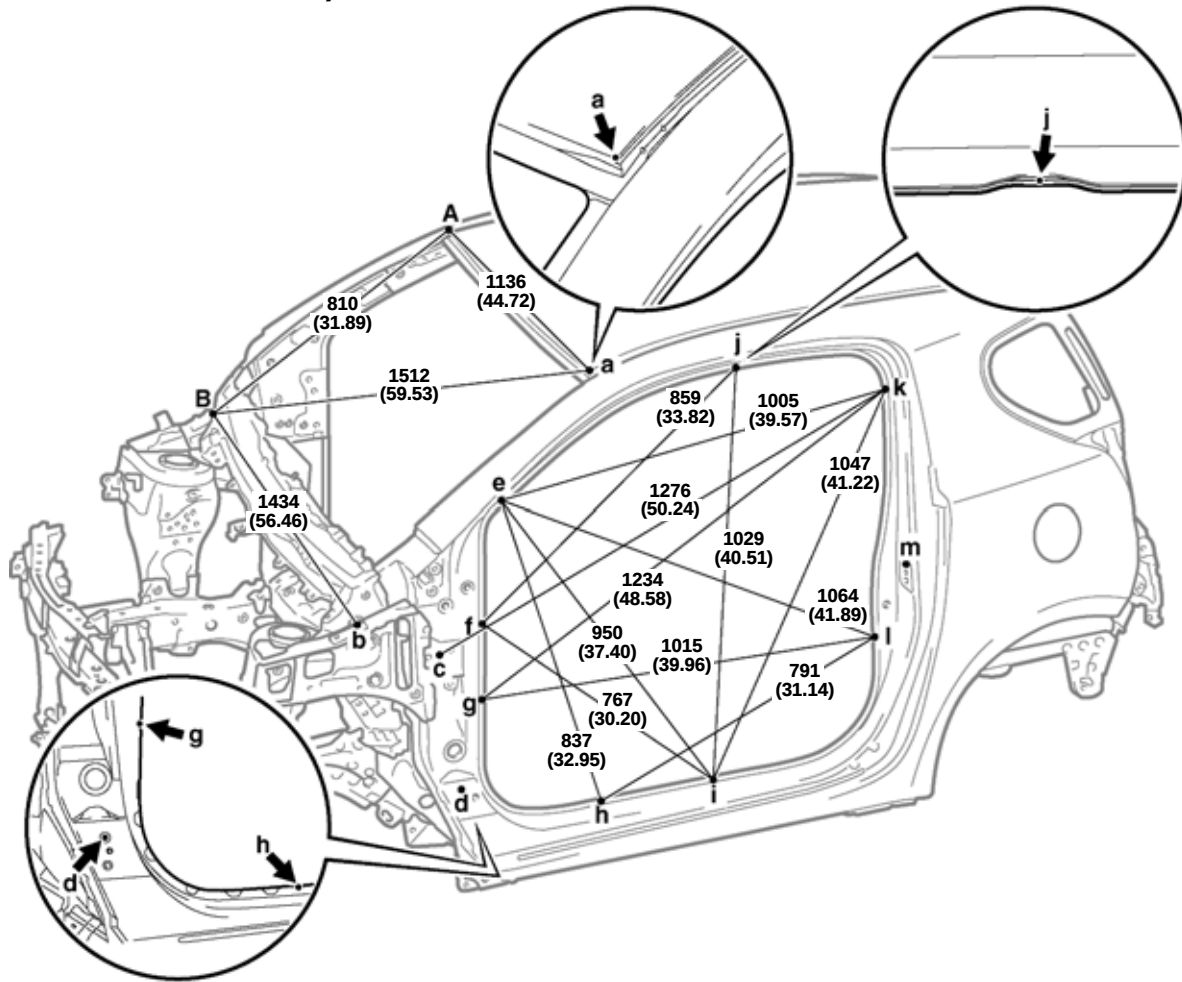

Vehicle Dimensions

E-e	F-f	G-g	H-h	I-i	J-j	K-k	L-l	M-m
1330 (52.36)	1378 (54.25)	1375 (54.13)	1417 (55.79)	1417 (55.79)	1143 (45.00)	1205 (47.44)	1390 (54.72)	1465 (57.68)


C-M or c-m	D-M or d-m	E-f or e-F	E-h or e-H	E-i or e-I	E-k or e-K	F-j or f-J	F-l or f-L	G-i or g-I	H-i or h-I	H-J or h-j
1197 (47.13)	1218 (47.95)	1387 (54.61)	1608 (63.31)	1670 (65.75)	1616 (63.62)	1521 (59.88)	1723 (67.83)	1543 (60.75)	1447 (56.97)	1105 (43.50)

HINT: For symbols, capital letters indicate right side of vehicle,
small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel corner	—	H, h	Rocker panel assembly mark	—
B, b	Hood hinge installation nut-rear	M8 (0.31)	I, i	Rocker panel assembly mark	—
C, c	Front door hinge installation nut-front	M8 (0.31)	J, j	Roof side rail assembly mark	—
D, d	Front door hinge installation nut-upper	M8 (0.31)	K, k	Quarter panel assembly mark	—
E, e	Front body pillar assembly mark	—	L, l	Quarter panel assembly mark	—
F, f	Front body pillar assembly mark	—	M, m	Front door lock striker installation nut-upper	M8 (0.31)
G, g	Front body pillar assembly mark	—	—	—	—

(Three - Dimensional Distance)

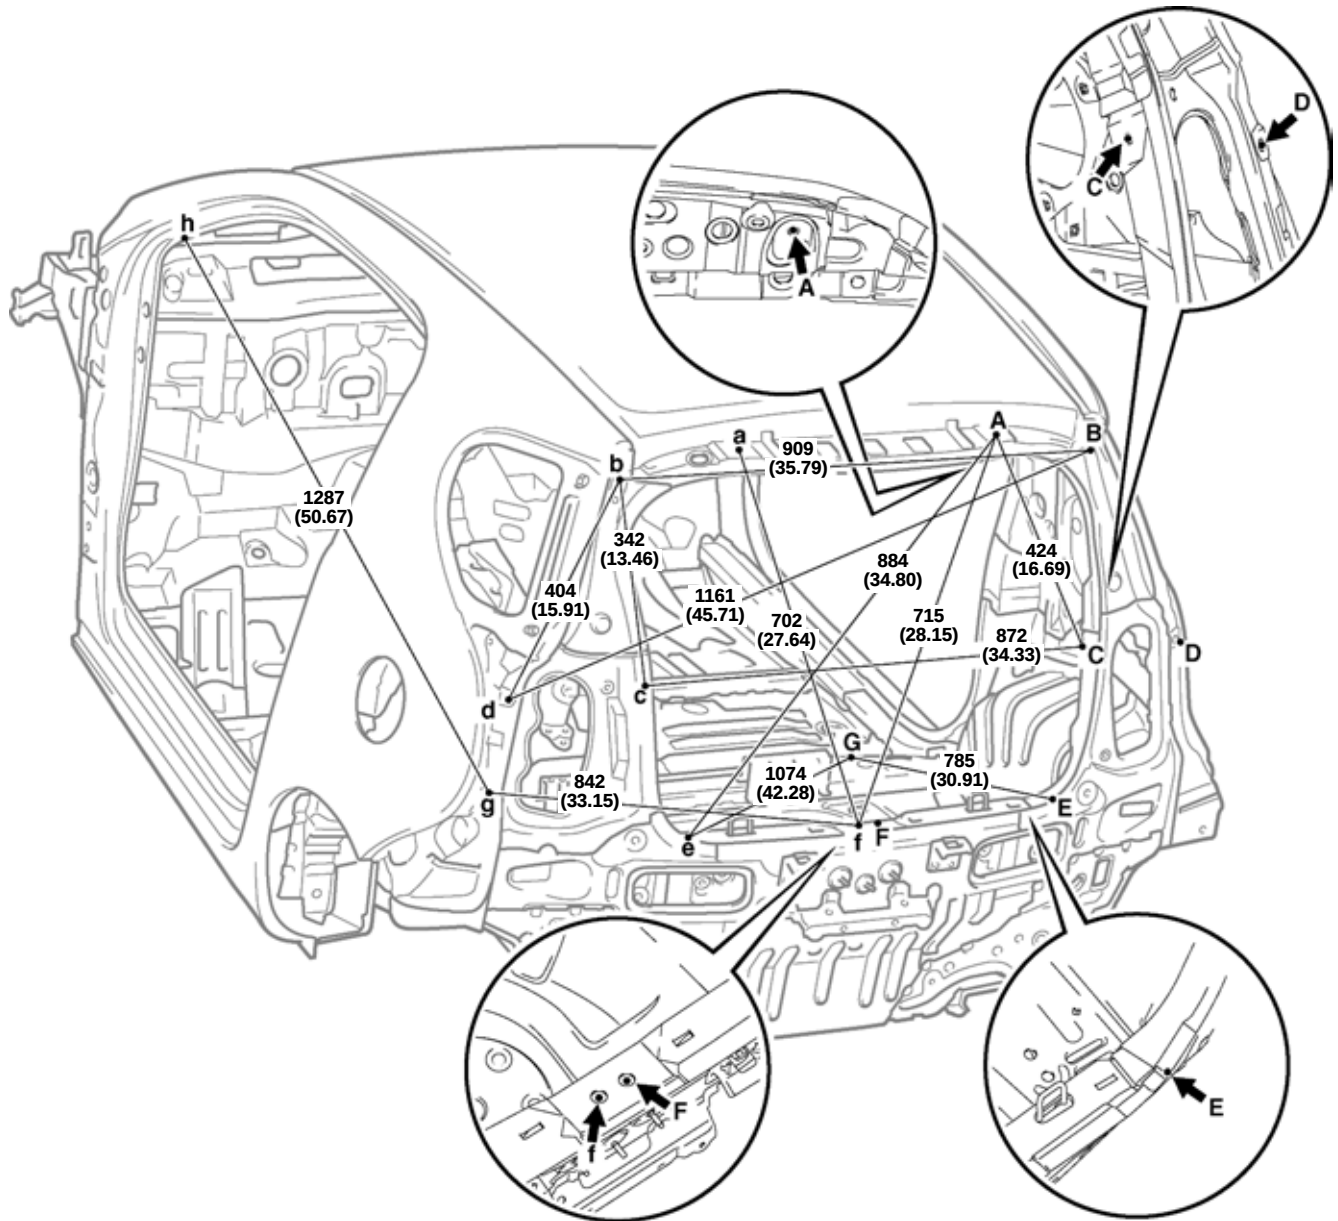


A-a	B-c or b-C	C-d or c-D	D-d	E-e	F-g or f-G	G-g	G-h or g-H
500 (19.69)	953 (37.52)	1088 (42.83)	1302 (51.26)	710 (27.95)	858 (33.78)	758 (29.84)	1632 (64.25)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A	Back door hinge installation hole	ø10.2 (0.40)	E, e	Back door opening reinforcement lower, Quarter panel extension inner adjoining portion	—
a	Back door hinge installation hole	$\frac{12 \times 10.2}{(0.47 \times 0.40)}$	F, f	Back door lock striker installation nut	M8 (0.31)
B, b	Back door stay installation hole	ø11 (0.43)	G, g	Rear floor crossmember standard hole	ø18 (0.71)
C, c	Deck side trim installation hole	ø8.5 (0.33)	H, h	Center body pillar assembly mark	—
D, d	Quarter panel standard hole	ø13 (0.51)	—	—	—

UNDER BODY

(Two - Dimensional Distance)

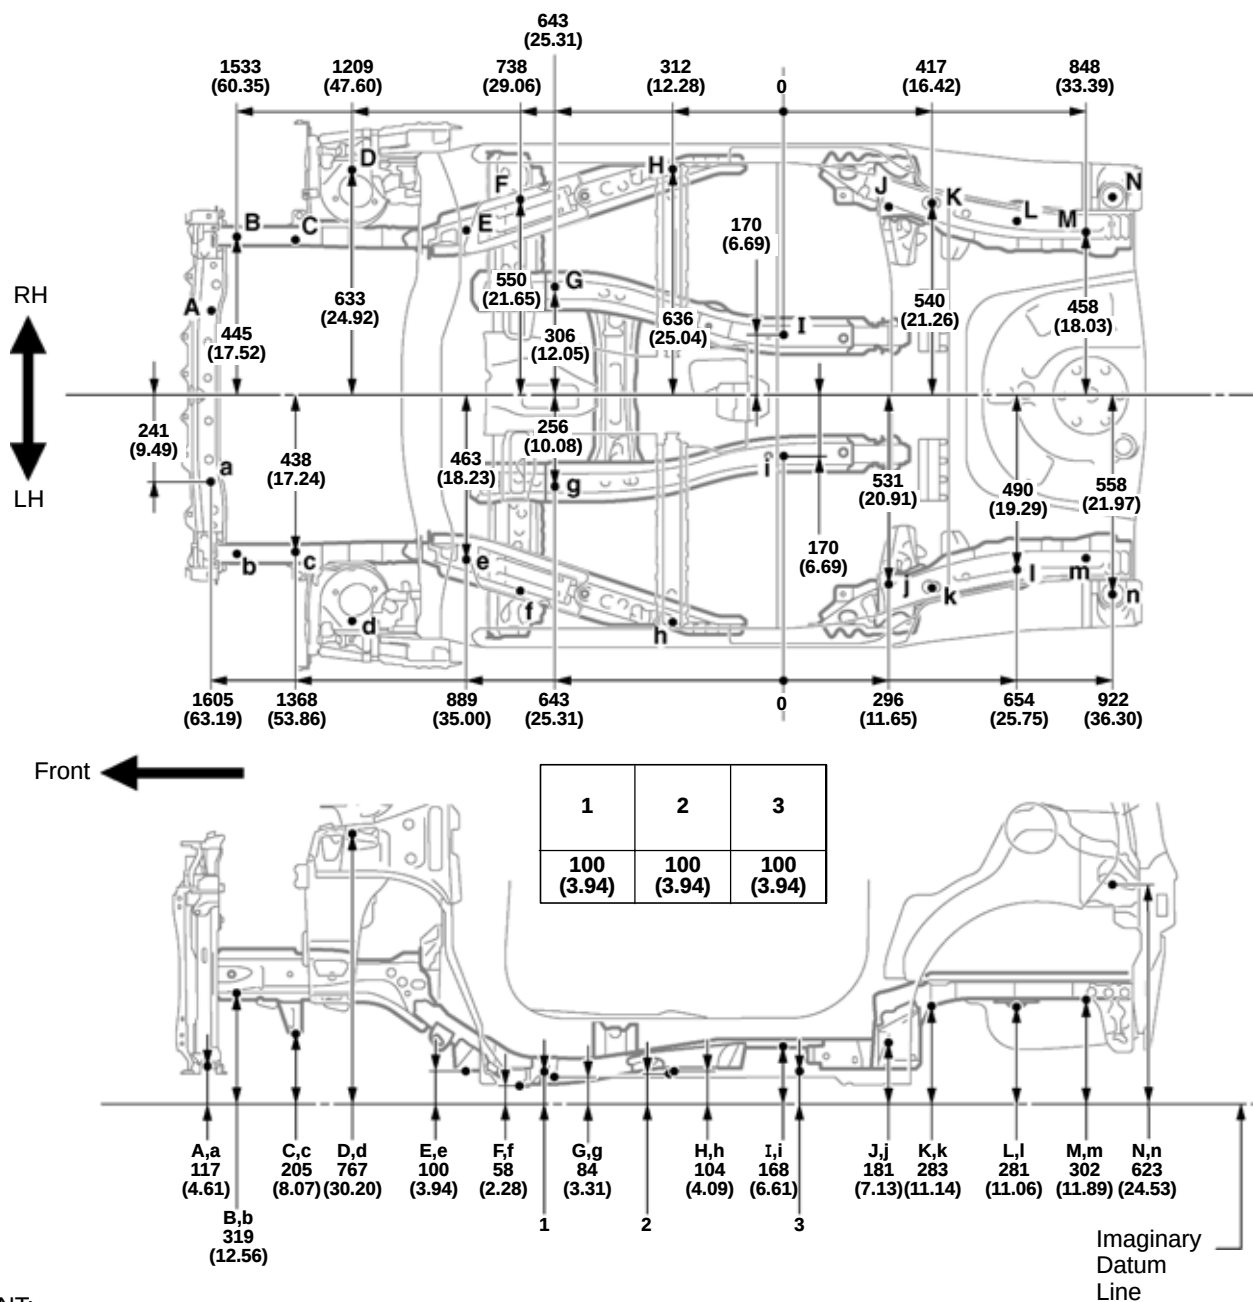

HINT:


- For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).
- Point G,g on the vehicle are asymmetrical.

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Radiator support standard hole	ø18 (0.71)	H, h	Front side member inner rear standard hole	ø10 (0.39)
B, b	Front side member inner standard hole	ø18 (0.71)	I, i	Front floor under reinforcement standard hole	ø10 (0.39)
C, c	Front suspension member standard hole	ø15 (0.59)	J, j	Trailing arm installation hole	ø13 (0.51)
D, d	Front suspension installation hole	ø11 (0.43)	K, k	Rear floor side member standard hole	ø18 (0.71)
E, e	Front suspension member installation nut	M14 (0.55)	L, l	Rear spring plate standard hole	ø18 (0.71)
F, f	Torque box standard hole	ø25 (0.98)	M, m	Rear floor side member front standard hole	ø18 (0.71)
G, g	Front side member bracket standard hole	ø11 (0.43)	N, n	Rear suspension installation hole	ø18 (0.71)


FRONT SUSPENSION CROSSMEMBER

(Three - Dimensional Distance)

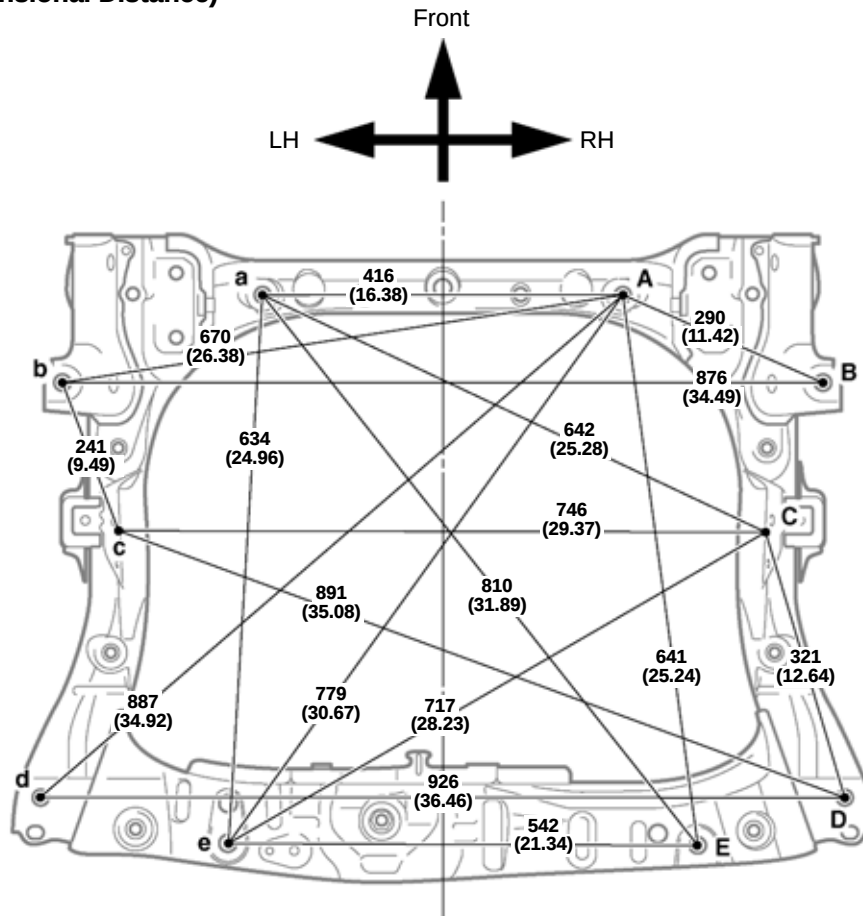

Vehicle Dimensions

B-c or b-C	B-E	B-e	b-e	b-E	C-E	c-e	D-E	D-e	d-e	d-E
844 (33.23)	567 (22.32)	876 (34.49)	578 (22.76)	915 (36.02)	372 (14.65)	382 (15.04)	178 (7.01)	712 (28.03)	222 (8.74)	759 (29.88)

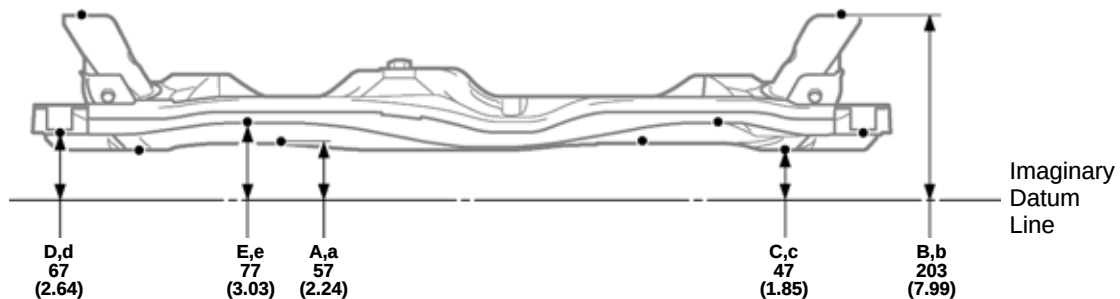


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front suspension member standard hole	ø10 (0.39)	D, d	Front suspension member installation hole	ø19 (0.87)
B, b	Front side member installation hole	ø19 (0.87)	E, e	Front suspension member installation hole	ø19 (0.87)
C, c	Front suspension member standard hole	ø10 (0.39)	—	—	—

FRONT SUSPENSION CROSSMEMBER

(Two - Dimensional Distance)

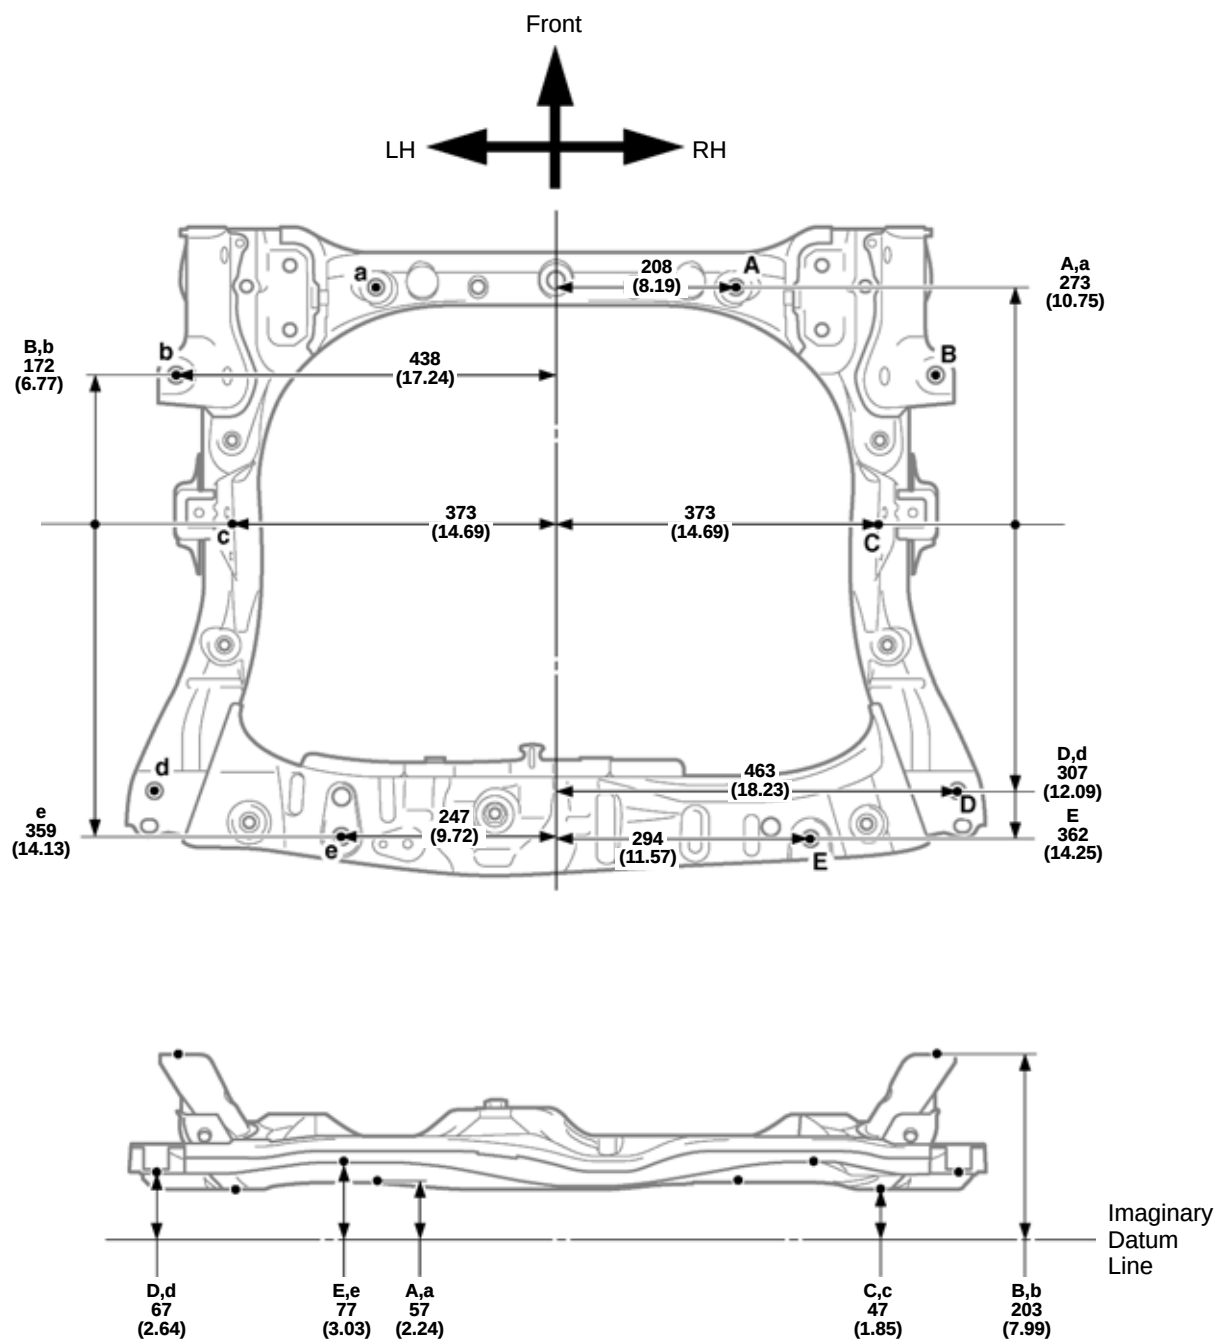

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front suspension member standard hole	ø10 (0.39)	D, d	Front suspension member installation hole	ø19 (0.87)
B, b	Front side member installation hole	ø19 (0.87)	E, e	Front suspension member installation hole	ø19 (0.87)
C, c	Front suspension member standard hole	ø10 (0.39)	—	—	—