




Part Number

H1410LS000

Installation instructions for: **SPORT ACTIVITY LIGHTS**

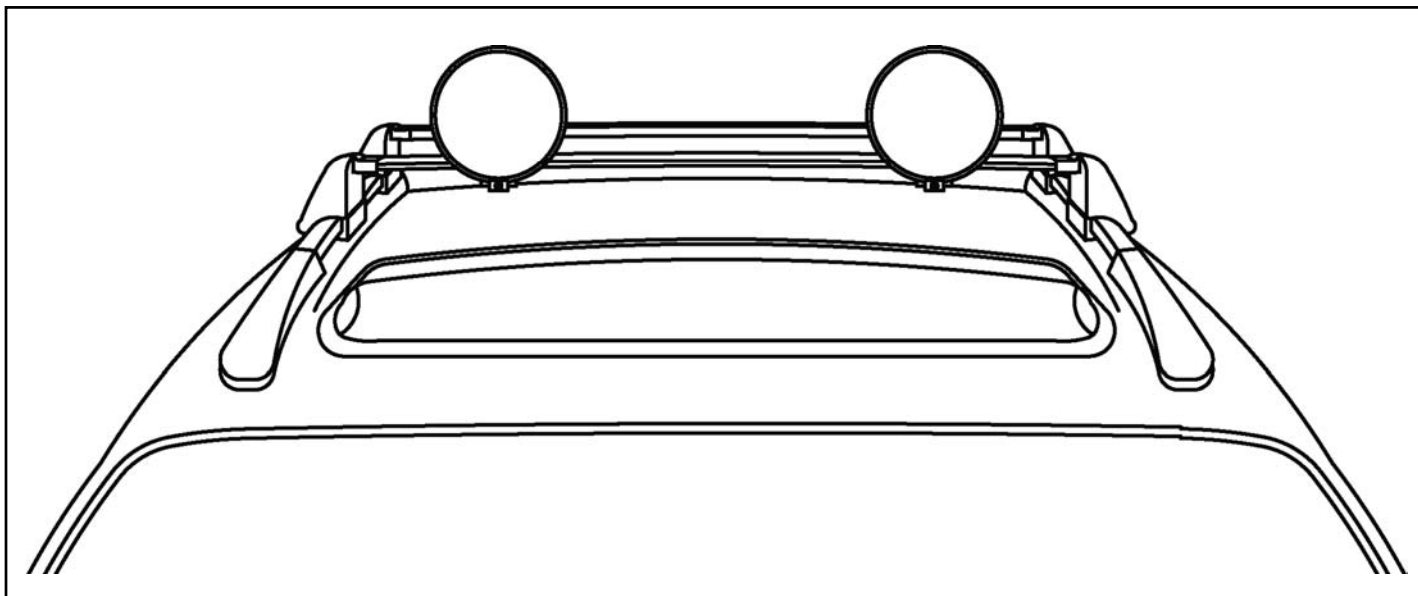

Kit components:

- (2) Lamps with harness and bracket attached
- (2) Attachment brackets
- (1) Roof harness with extrusion
- (1) Switch bezel
- (1) Switch
- (1) Relay
- (1) 12mm socket tool
- (4) 12mm bolt
- (2) Rear Harness clips
- (1) Front "J" clip
- (3) Screws
- (2) Alcohol wipes
- (10) Velcro straps
- (5) Trim caps
- (4) Pink clips
- (1) Blue clip

Tools required:

- | | |
|---------------------------------------|-------------------|
| Nylon pry tool | T-30 Torx |
| 12 mm socket wrench | T-25 Torx |
| Philips screwdriver | Electrical tape |
| Small hand file | Torque wrench |
| Drill & 1/16" drill bit | Clip Removal Tool |
| Cutting shears (plastic cutting tool) | |



Part number
H1410LS000

Date
9/16/02


Subaru of America

Page
1/7





Meaning of Characters:

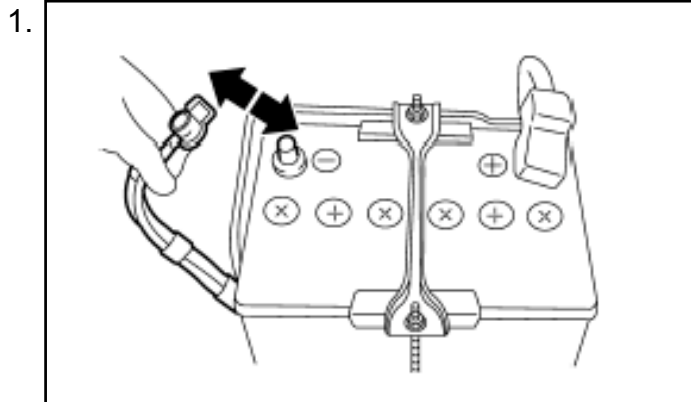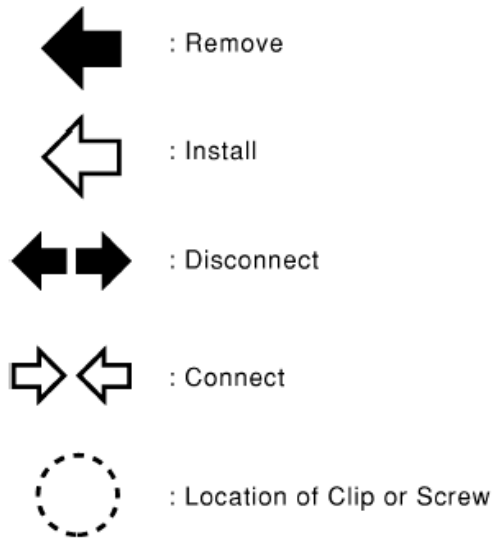


NOTE:
Disconnect the negative battery terminal, before starting installation. Reconnect the negative battery terminal, upon completion of the sport activity lamp installation.

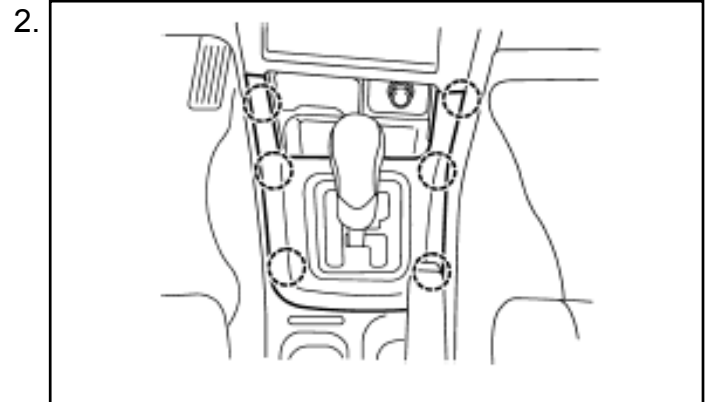


NOTE:
Manual transmission: The shift knob must be removed by unscrewing.
Automatic transmission: The shifter must temporarily be placed into neutral.

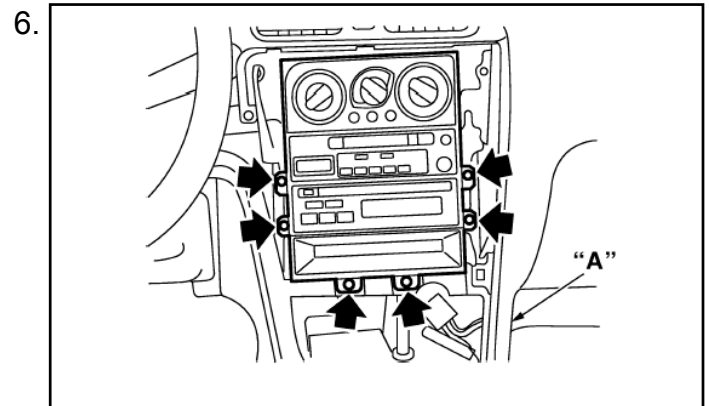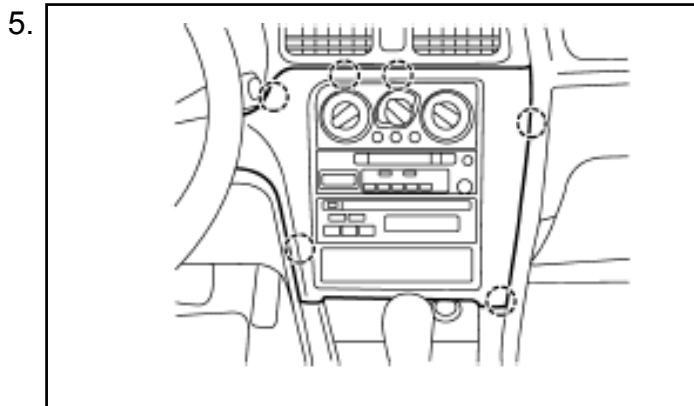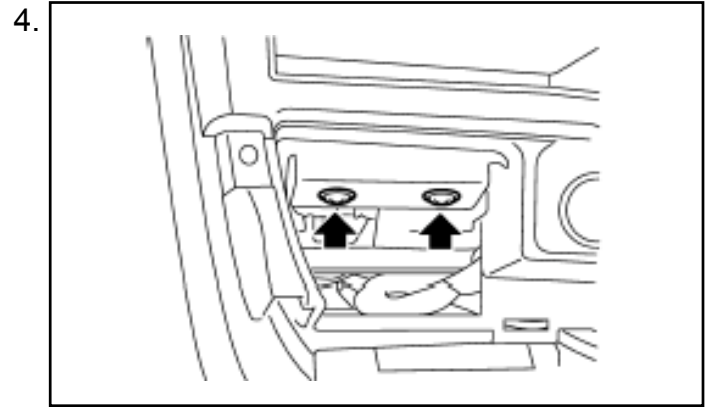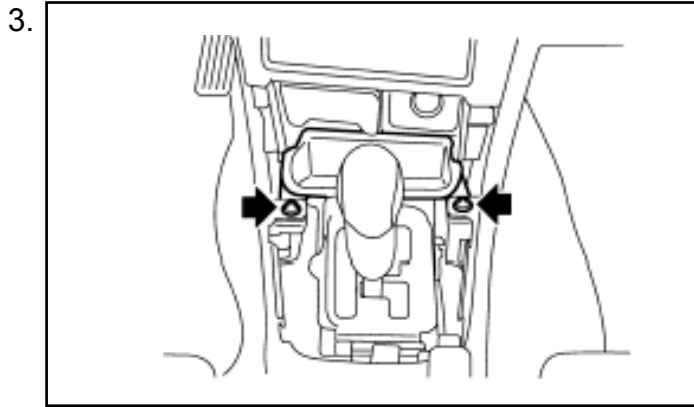


NOTE: Do not disconnect any radio connectors.

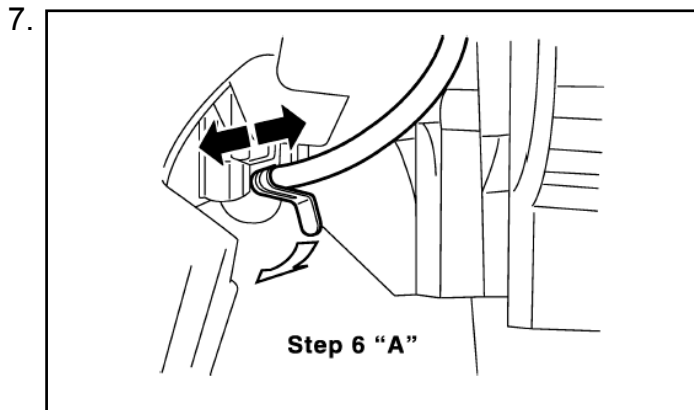


NOTE: This cable must be disconnected at the heater box to prevent damage when moving the radio/HVAC unit forward. Failure to do this may result in damage to the HVAC unit.

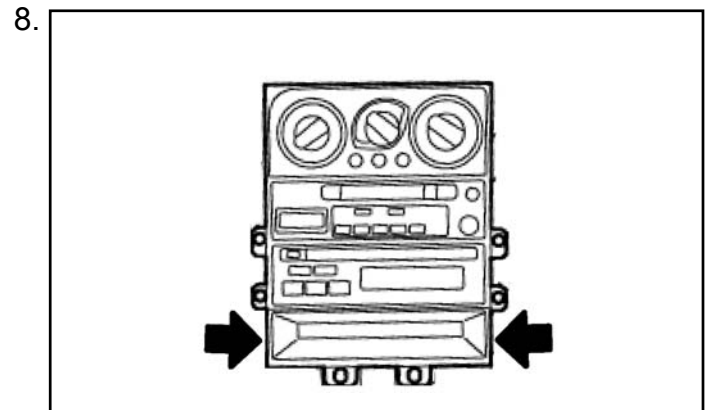


Remove the lower bezel (2 screws) and save the screws for installation of the switch bezel.

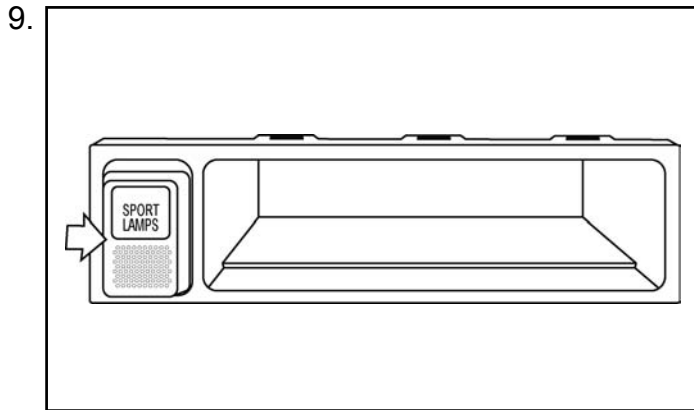



NOTE: Insert the switch into the switch bezel.

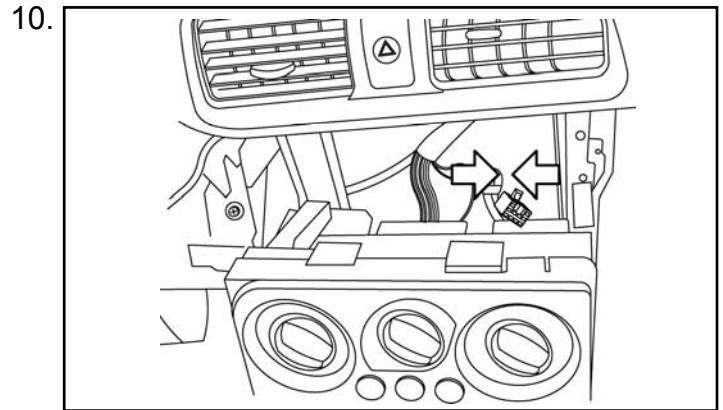


NOTE: Untape switch connector from harness and connect to switch .

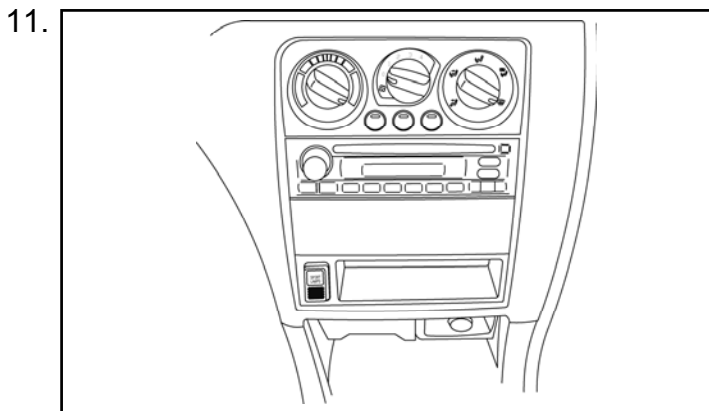


Install switch and trim bezel, and reassemble console in reverse order of removal.

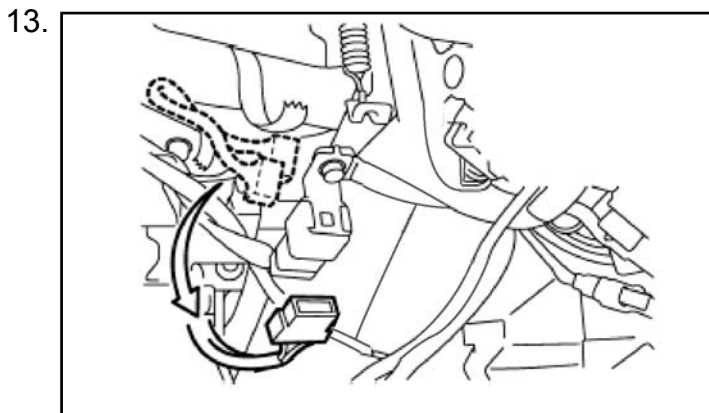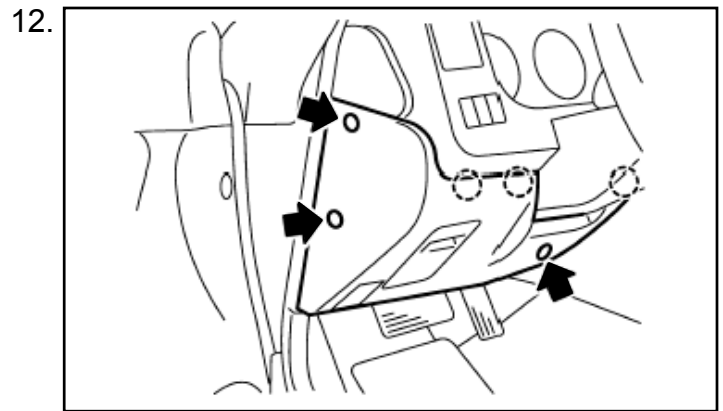


Locate four pin relay connector and untape from harness and connect to relay.

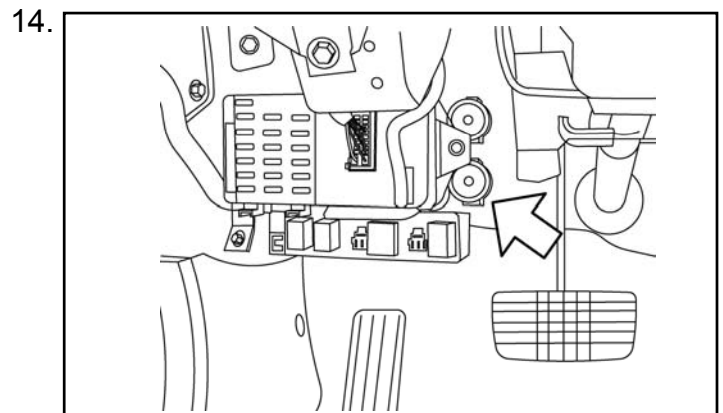



Place relay where shown.

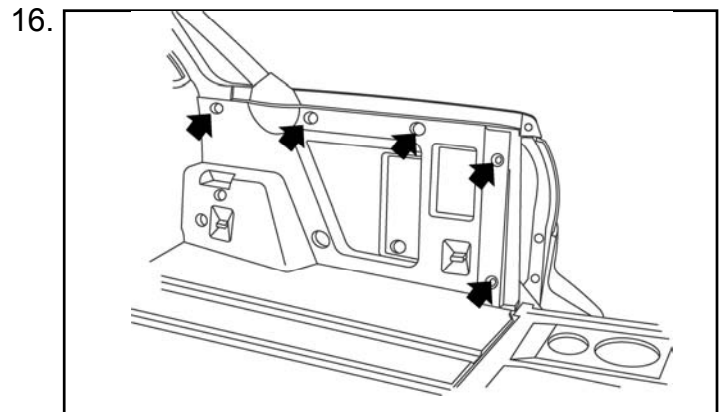


Remove (5) T-30 screws.

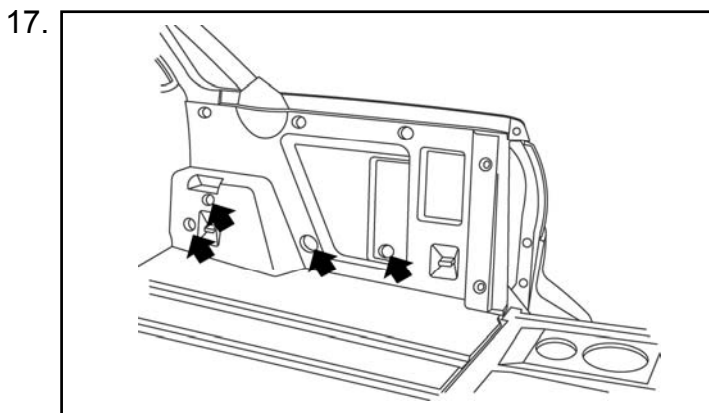


Remove (4) clips.

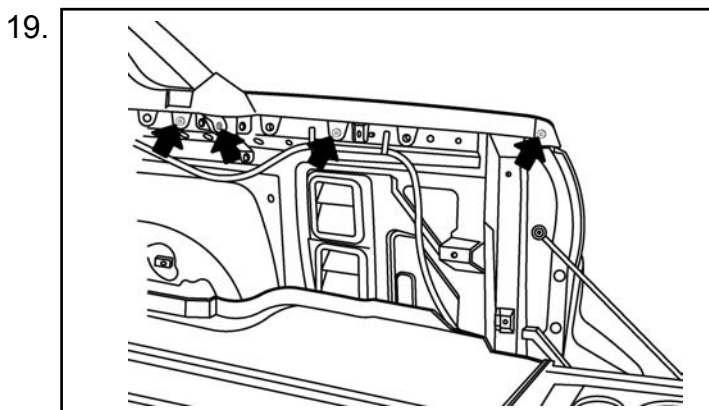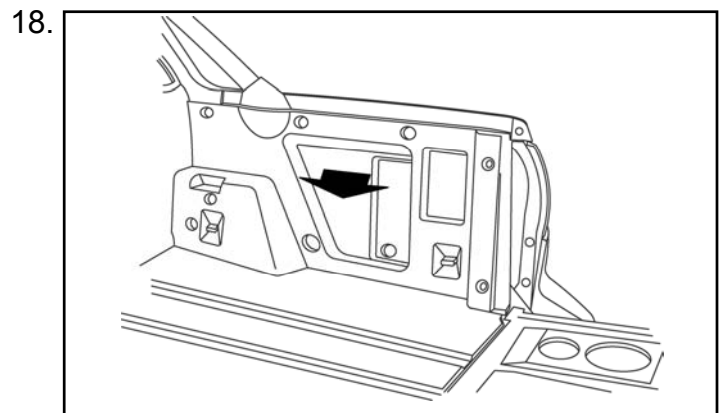


Remove (4) T-25 screws.

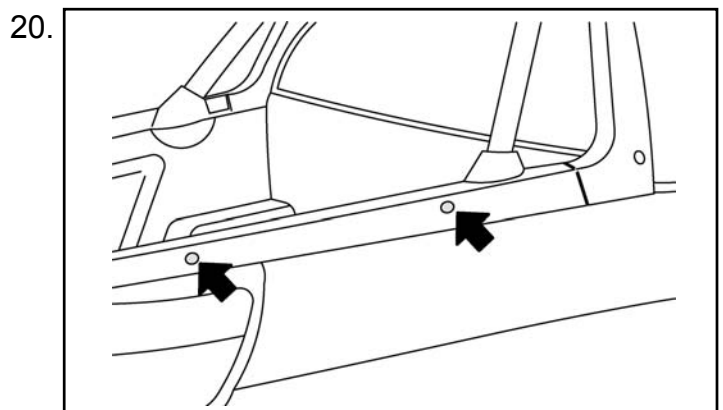

Remove (2) side rail trim covers.

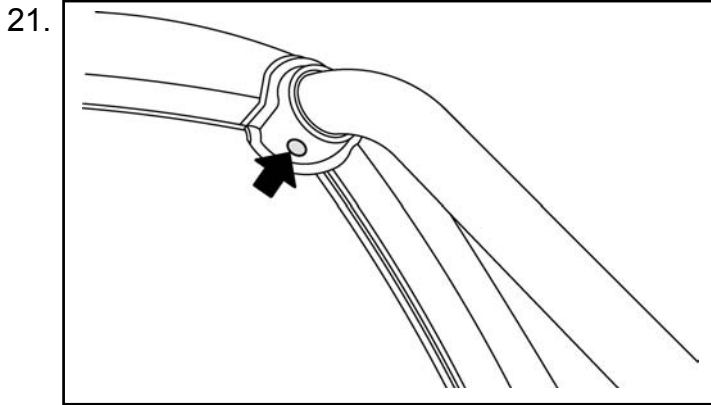


Remove (1) trim cap and pull back roll bar cover.

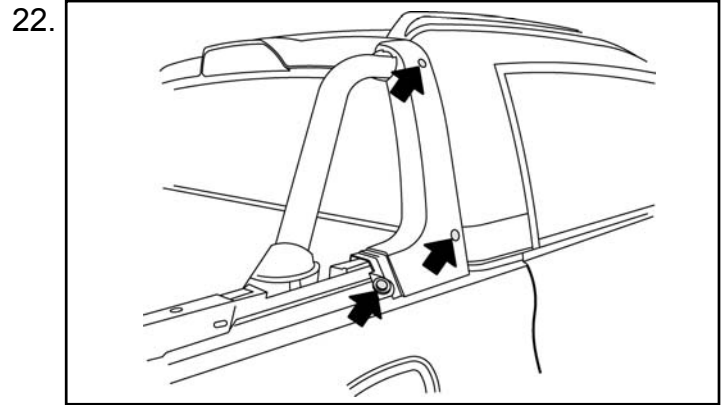


Remove (1) clip and (2) trim caps and remove side cover.

Note: The exterior trim cover assembly's (2) Pink mounting clips must be replaced with the enclosed clips. Make sure that the foam gasket on the clips is properly aligned. Upon reinstallation of the exterior trim cover, the trim clips should be seated firmly by pressing on the exterior trim cover with the palm of the hand.

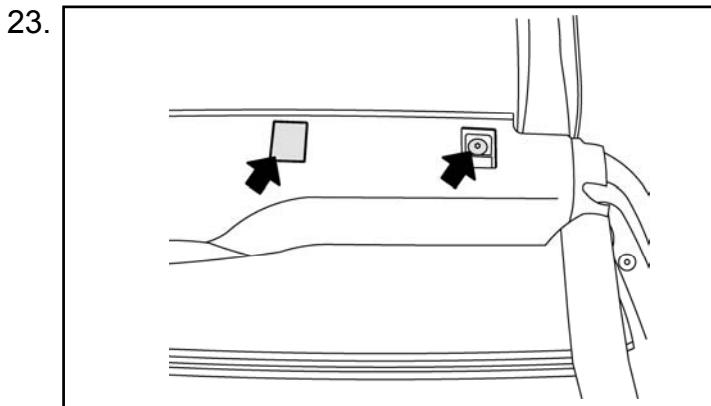


Remove (4) caps and (4) T-25 screws and pull back rear lamp housing.


Note: The high mount lamp assembly's (2) Pink mounting clips and (1) blue mounting clip must be replaced with the enclosed clips. Make sure that the foam gasket on the clips is properly aligned. Upon reinstallation of the high mount lamp assembly, the trim clips should be seated firmly by pressing on the high mount lamp assembly with the palm of the hand.

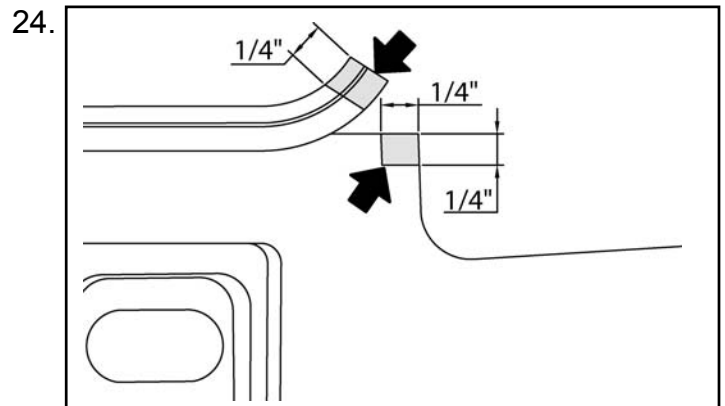


Clip off a $\frac{1}{4}$ " x $\frac{1}{4}$ " section of the rear lamp housing where it meets the side rail.

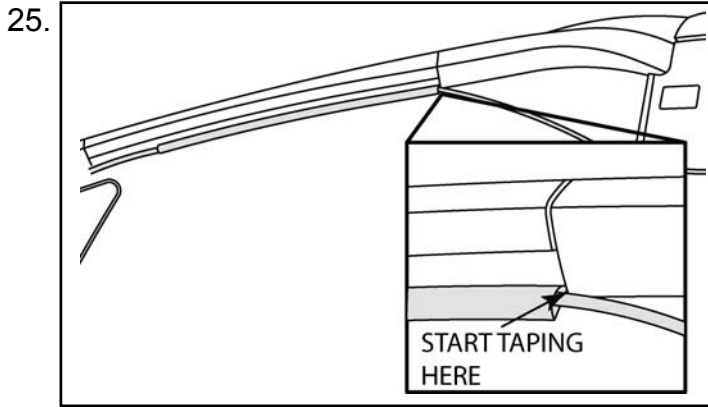


Clean roof with alcohol wipes (passenger side rail) and allow to dry. Starting at the location shown, tape the harness cover along the side rail. Note: Do not tape onto the side rail's rubber gasket.

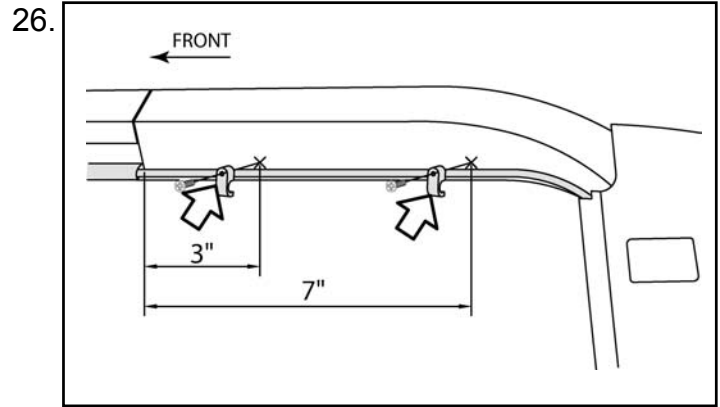


Attach the rear harness clips where shown (3" and 7") by drilling a 1/16" pilot hole. Note: Do not overtighten screws. Do not deform clips.

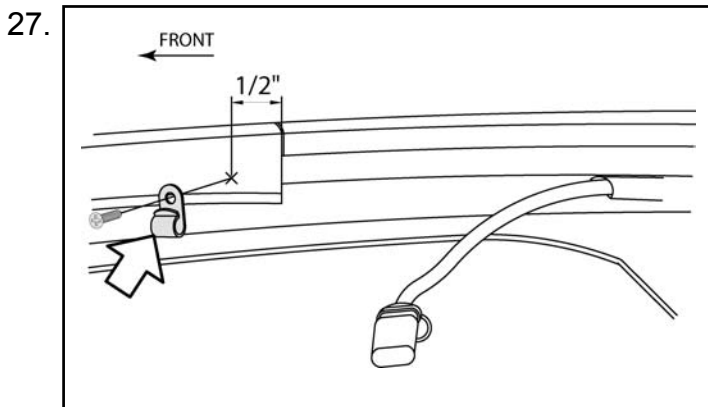


Attach harness J clip to the front side rail end cap (1/2") by drilling a 1/16" pilot hole.

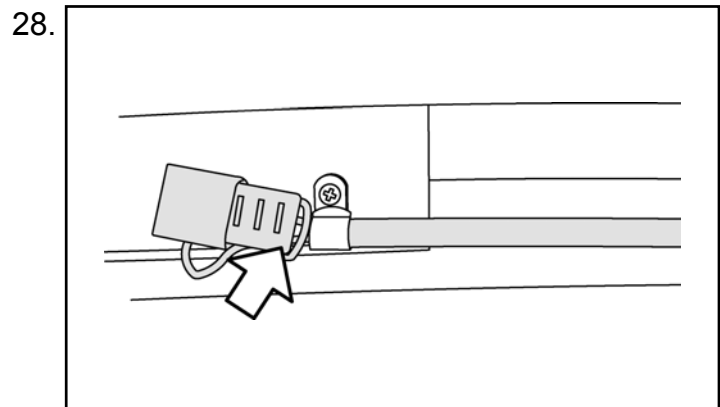

The harness should be slipped into the J clip when not attached to the cross bar harness.

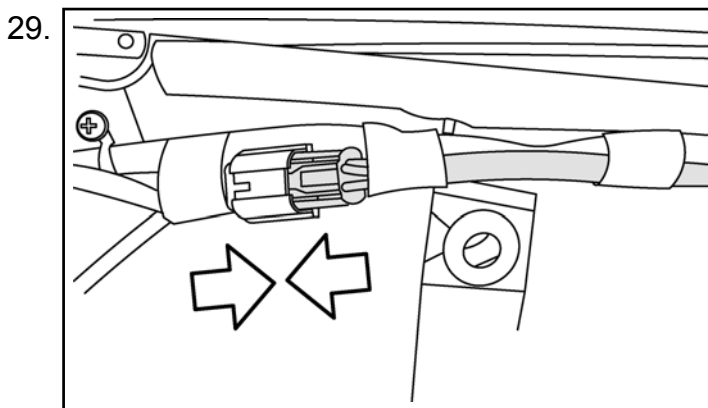

Remove the "dummy plug". Connect the roof harness to vehicle harness and route along lamp housing. Secure Sport lamp harness to vehicle

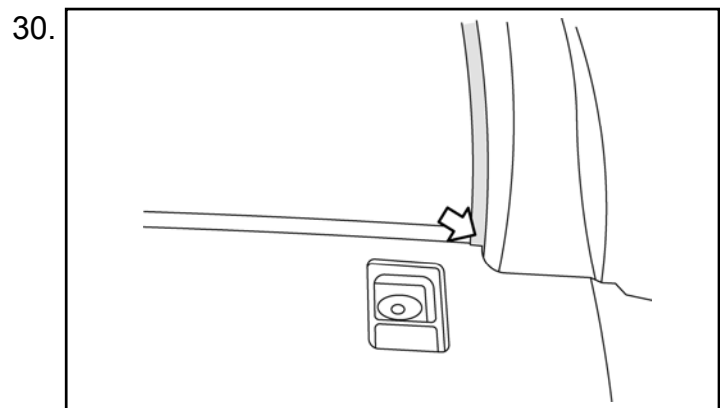

Route the harness through notch in the lamp housing.

31. Reassemble the lamp housing and all of the bed trim in reverse order of removal.
 NOTE: The five (5) round trim clips must be replaced with trim clips provided.
 NOTE: T-25 and T-30 screws are to be torqued to: 5.5 ± 1.5 ft-lbs.



Part Number

H1410LS000

Sport Activity Lights installation instructions and owner's information

Kit components:

(2) Lamps with harness and bracket attached
(5) Velcro straps








(2) Attachment brackets
(5) Extra Velcro straps (for future use)

(4) 12mm bolt


Tools required:

12mm socket tool (provided with lamps)

T-30 Torx hand tool (provided with crossbar)

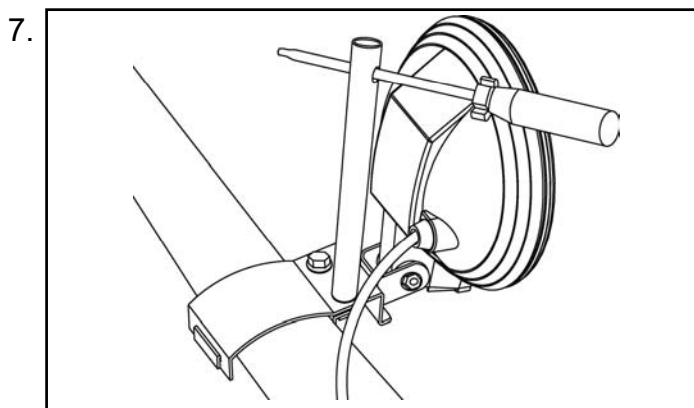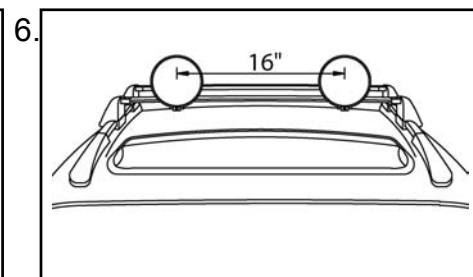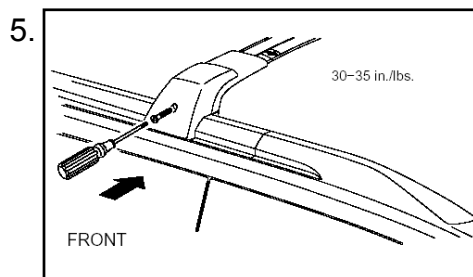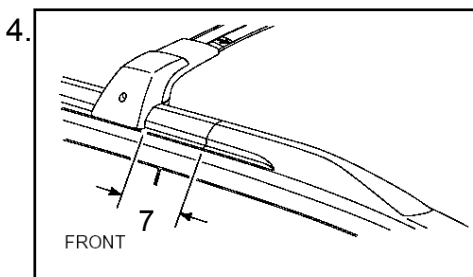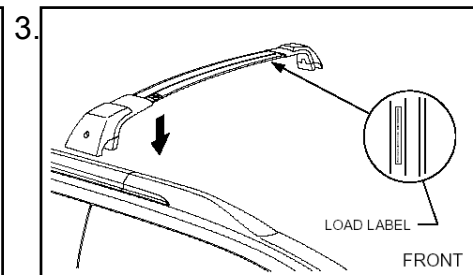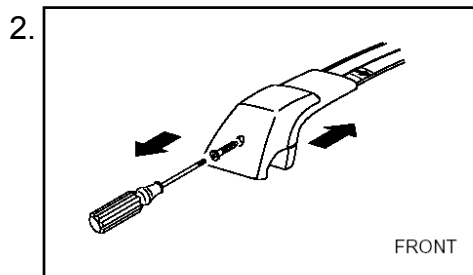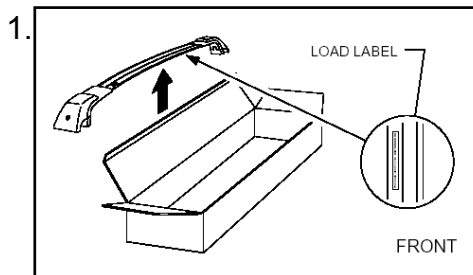

Center lamps on cross bar with 16" between them and clamp the lamps to the cross bar with the 12 mm wrench tool (supplied with lamps) and the Torx hand drive (supplied with crossbar).

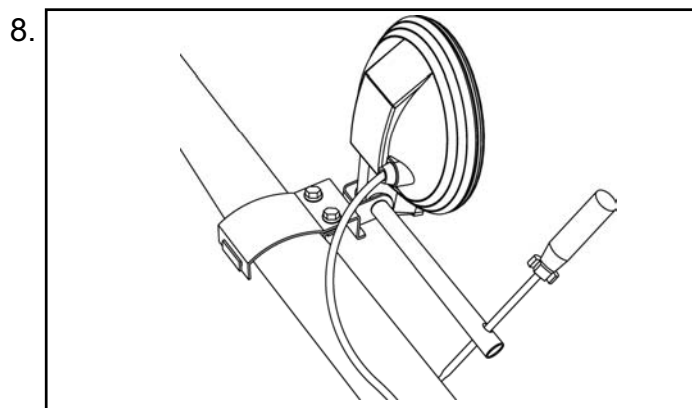

Aim lamps straight ahead and tighten the aiming bolt with the 12 mm wrench tool (supplied with lamps) and the Torx hand drive (supplied with crossbar).


Part number
H1410LS000

Date
7/16/02

Subaru of America


Page
1/2

9.

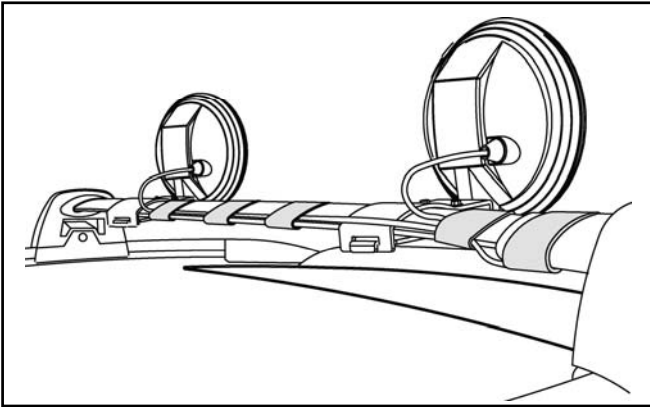


Connect the bar harness to the roof harness. Secure the harnesses to the crossbar using 5 Velcro straps.


10.

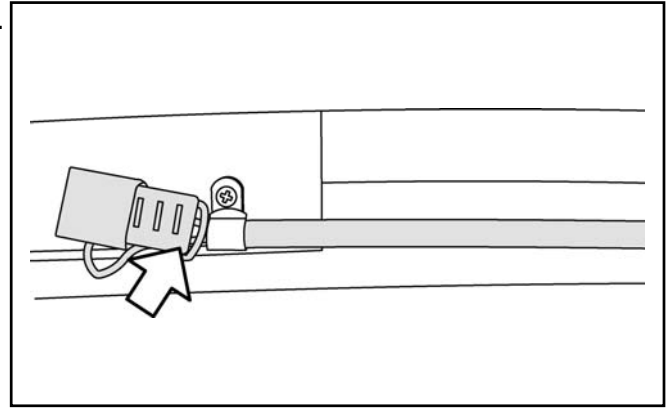

NOTE: If you remove the lamps from the vehicle, be sure to place the connector cap over connector, and slip the roof harness into the side rail mounting clip.

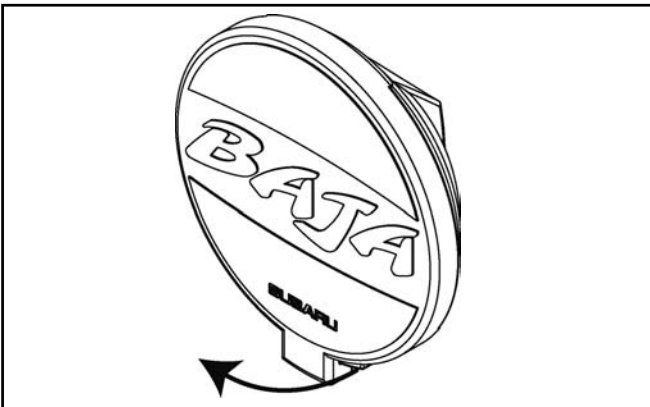

To remove stone shield, pull bottom tabs.

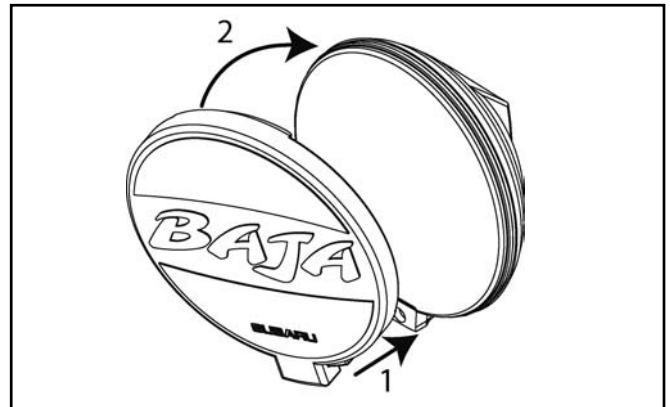

To install stone shield, attach the bottom of the stone shield to the lamp and snap the top into place.

Owner's Information:

Note:

- In most states, the Sport Activity Lights must have stone shields installed when the vehicle is operated on public roads.
- In most states, the Sport Activity Lights may not be operated when the vehicle is in motion on a public road.
- Lamp operation instructions and bulb replacement information are noted in the Baja Owner's Manual.
- If objectionable wind noise is noted or when entering a car wash, be sure to lower lamps by loosening aiming bolt in Step 8, laying the lamps forward, and tightening the aiming bolt.
- For your convenience, five additional Velcro straps are provided with the Sport Activity Lamps kit.

Part number H1410LS000	Date 7/16/02	Subaru of America	Page 2/2
---------------------------	-----------------	-------------------	-------------