



27.A/C Filter

A: REPLACEMENT


1) Remove the glove box damper.

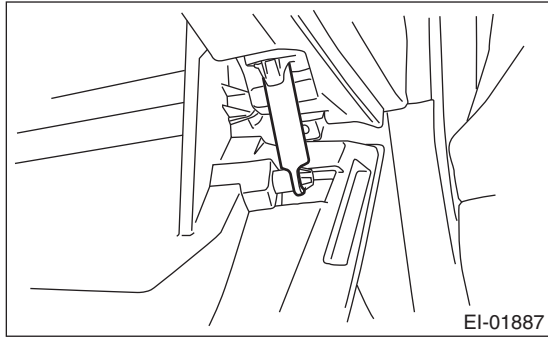

2) Disengage the stopper section and pull the glove box lid to remove it.

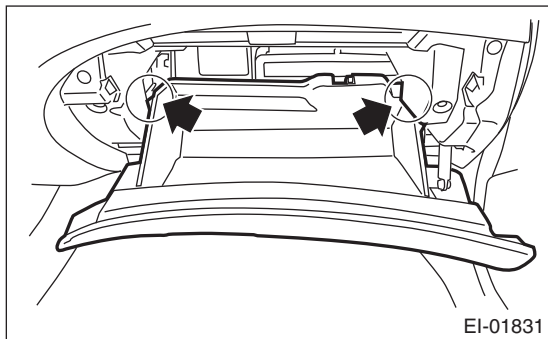

3) Pinch the claw to unlock and remove the A/C filter.

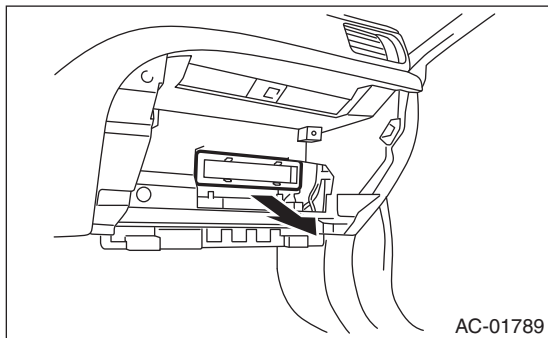

4) Install in the reverse order of removal.