


13. Rear Accessory Power Supply Socket

A: WIRING DIAGRAM

<Ref. to WI-125, WIRING DIAGRAM, Rear Accessory Power Supply Socket System.>

B: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the console box. <Ref. to EI-46, REMOVAL, Console Box.>
- 3) Disconnect the harness connector, and remove the accessory power supply socket.

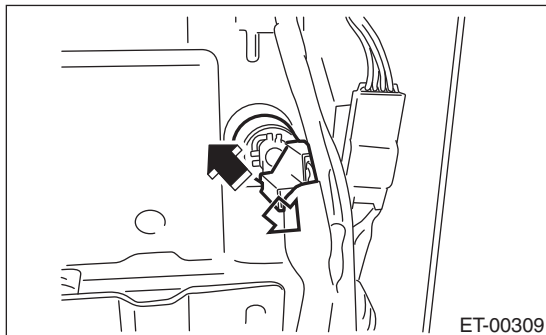

NOTE:

Remove the accessory power supply socket by pushing out from the backside.

C: INSTALLATION

Install in the reverse order of removal.