


## 14.AUX Input Terminal

### A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the console box. <Ref. to EI-46, REMOVAL, Console Box.>
- 3) Disconnect the harness connector.
- 4) Remove the claws to remove the AUX input terminal assembly by pushing it into the console box.

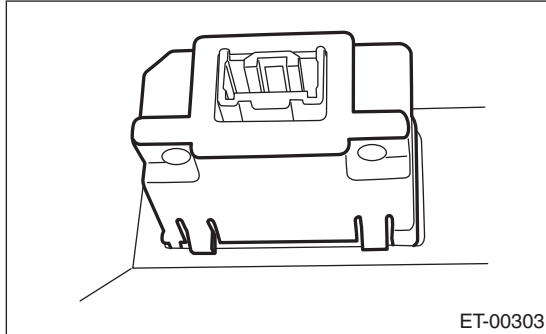

### B: INSTALLATION

Install in the reverse order of removal.

# COMMUNICATION SYSTEM

*COM*

---

|                              | Page |
|------------------------------|------|
| 1. General Description ..... | 2    |
| 2. Horn System .....         | 3    |
| 3. Horn .....                | 4    |
| 4. Horn Switch .....         | 5    |

