



4. Audio

A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the center panel. <Ref. to EI-47, CENTER PANEL, REMOVAL, Center Console.>
- 3) Remove the fitting screws, and slightly pull the audio out from the center console.

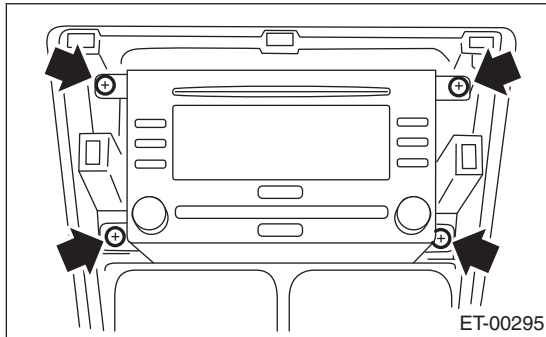

- 4) Disconnect the harness connectors and antenna feeder cord.
- 5) Remove the audio.
- 6) Remove the mounting screws and detach the satellite radio unit.

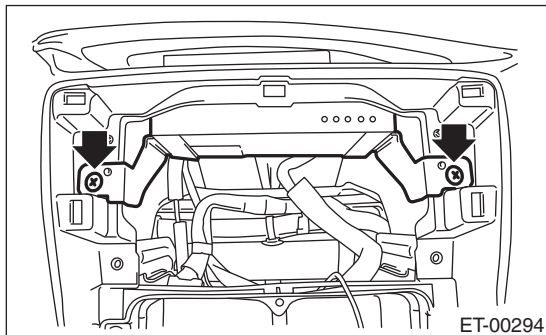

B: INSTALLATION

Install in the reverse order of removal.