


6. Tweeter

A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Disconnect the harness connector and remove the front door gusset cover.
- 3) Remove the claws and detach the tweeter.

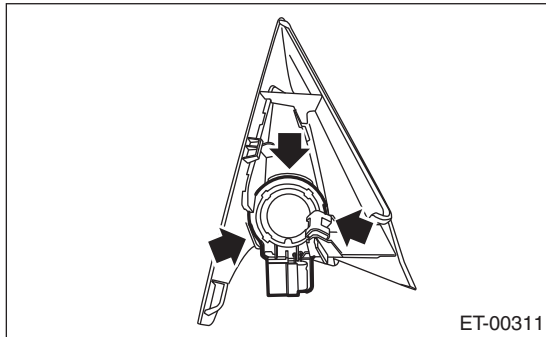

B: INSTALLATION

Install in the reverse order of removal.