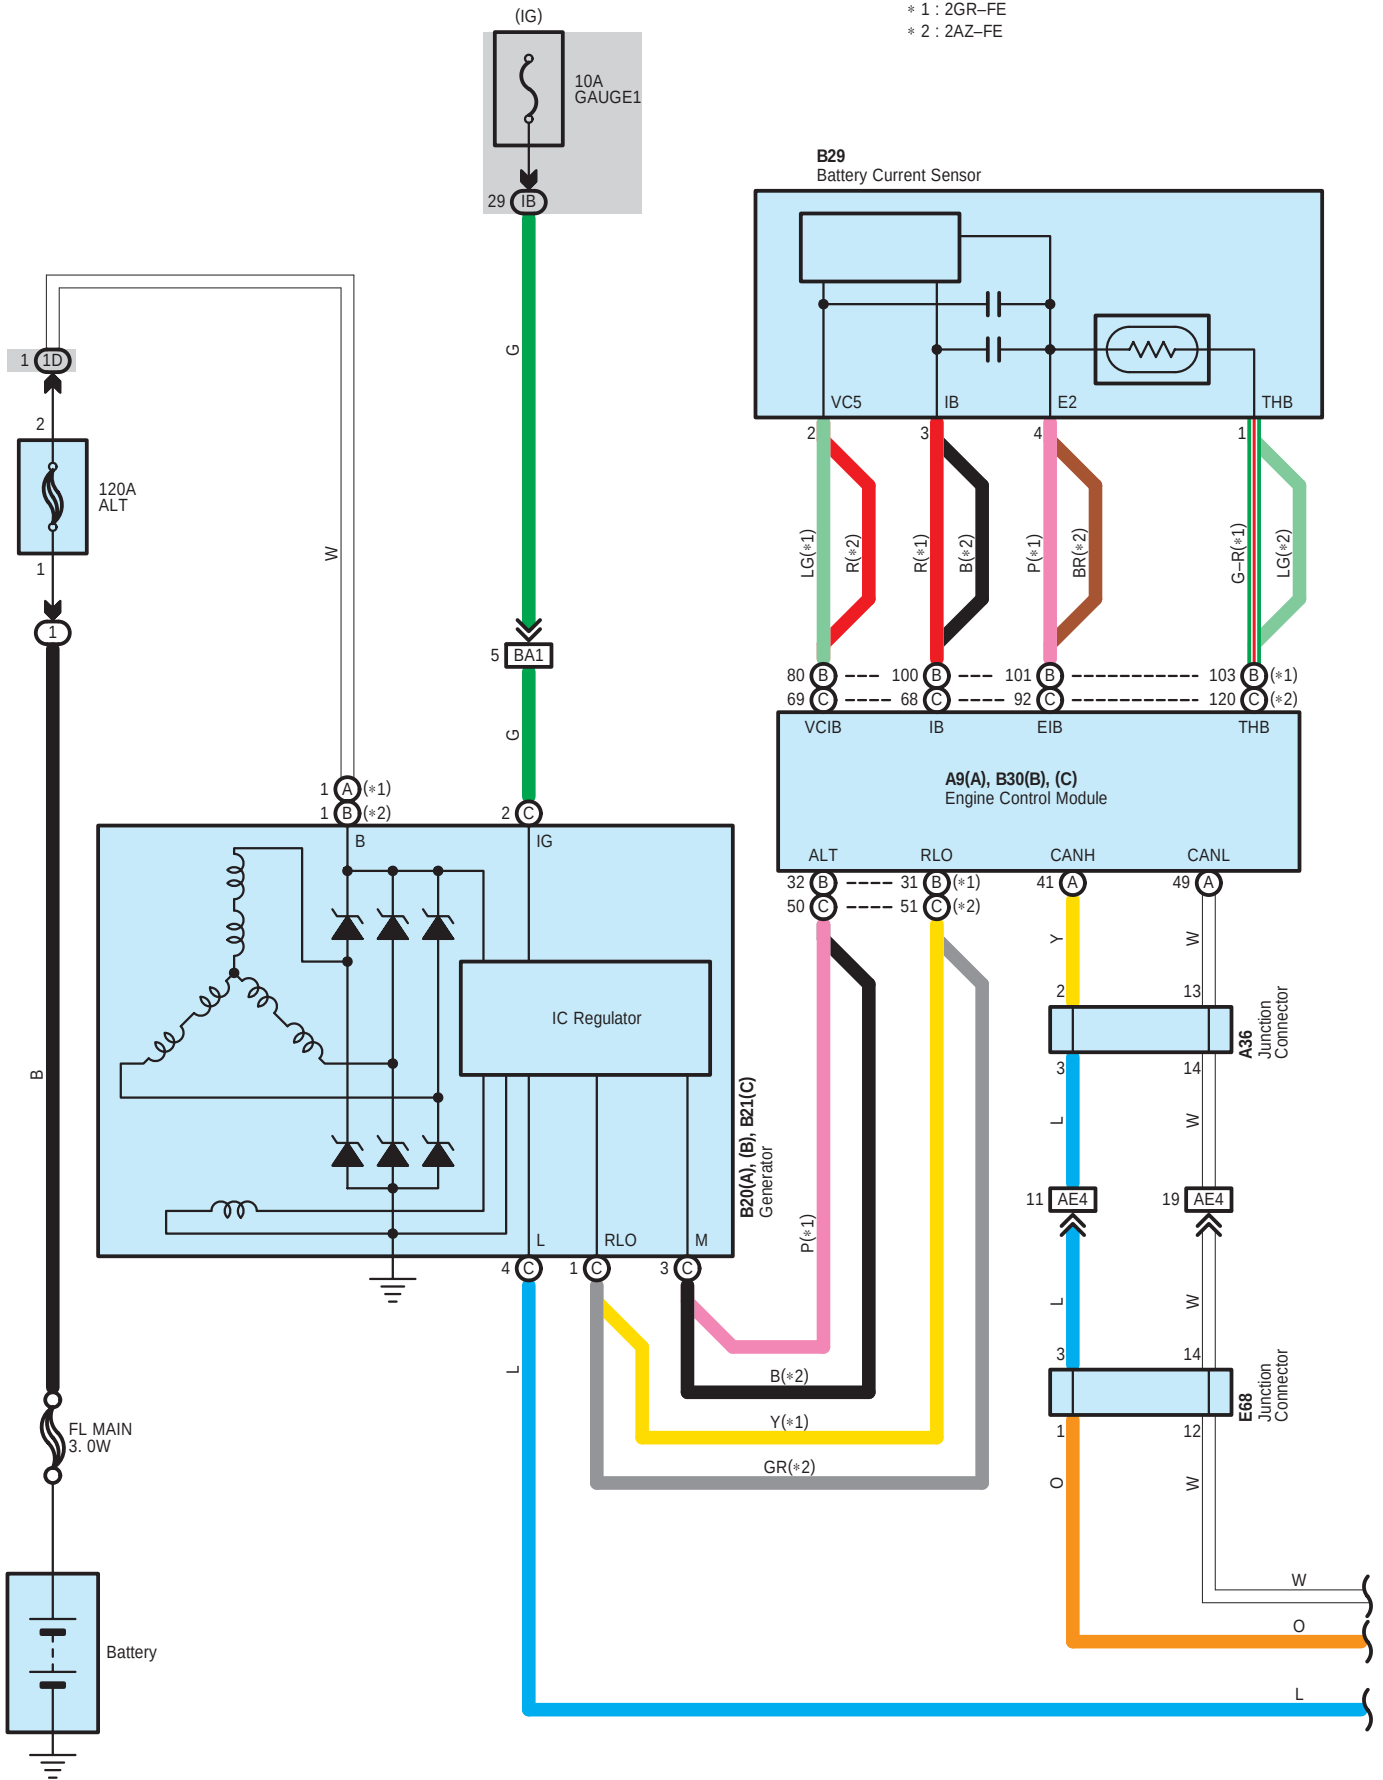
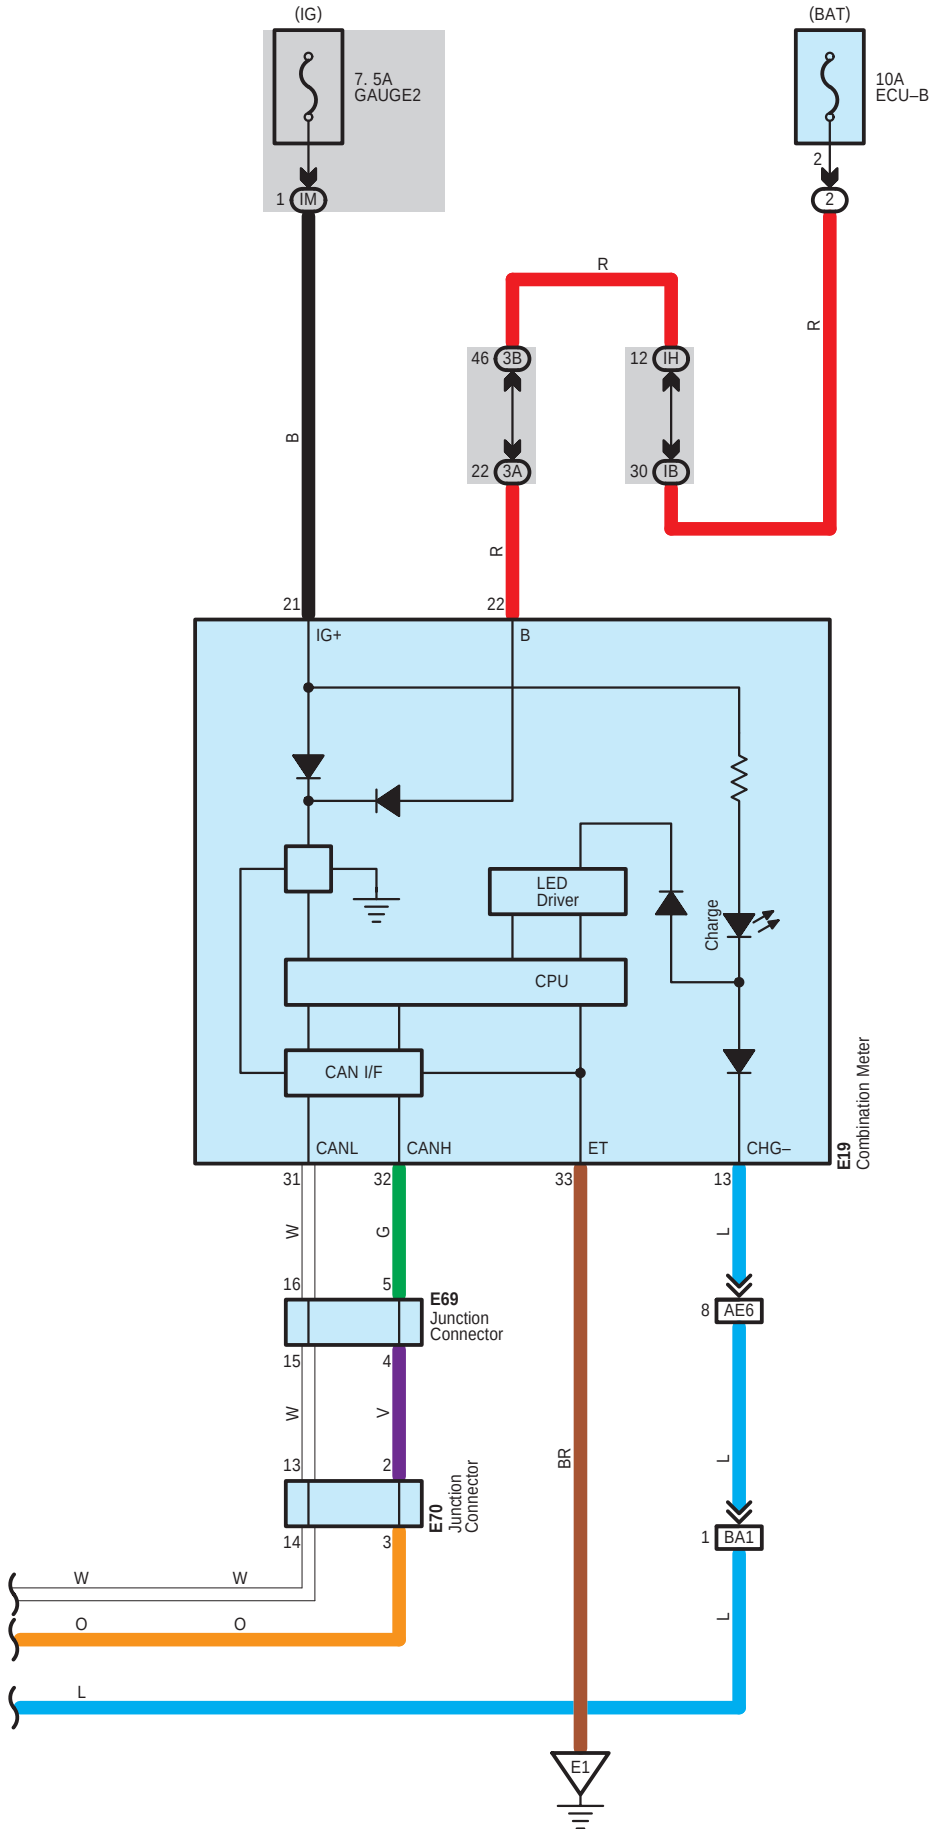


* 1 : 2GR-FE
* 2 : 2AZ-FE





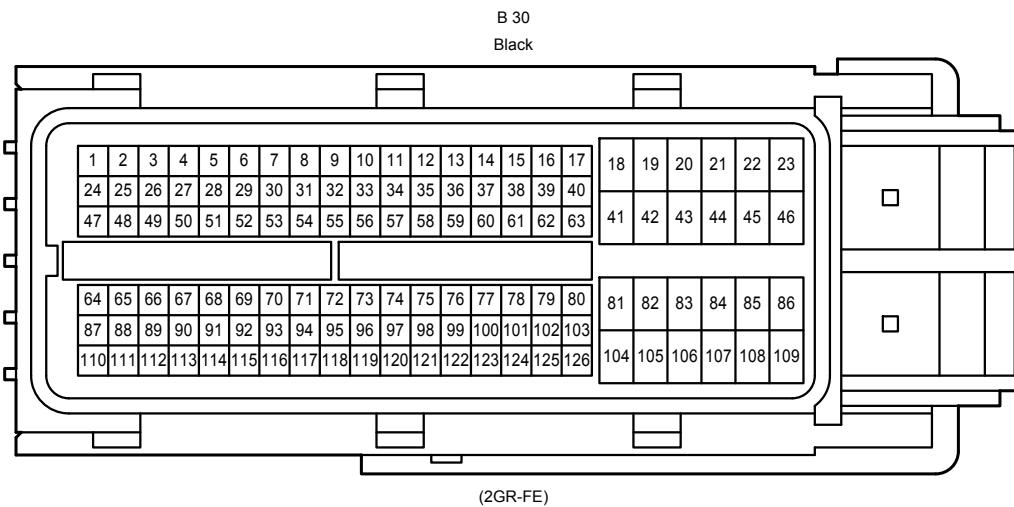
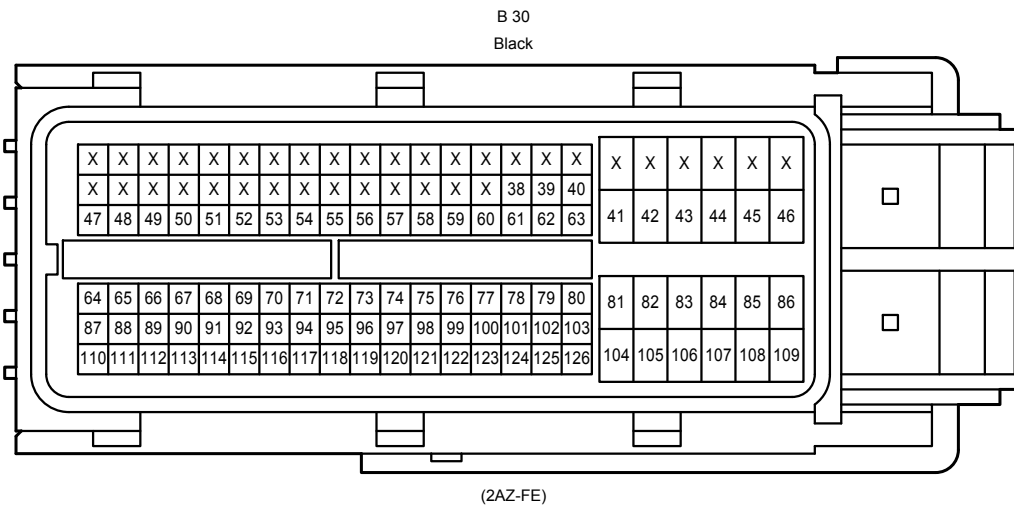
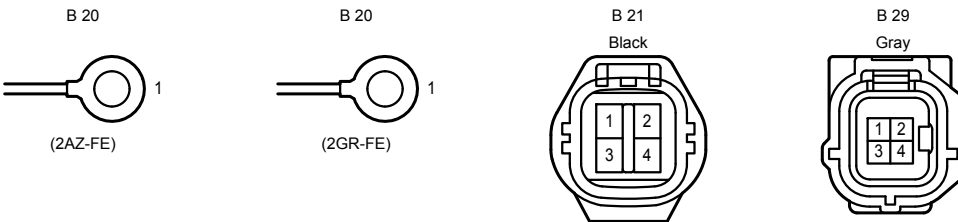
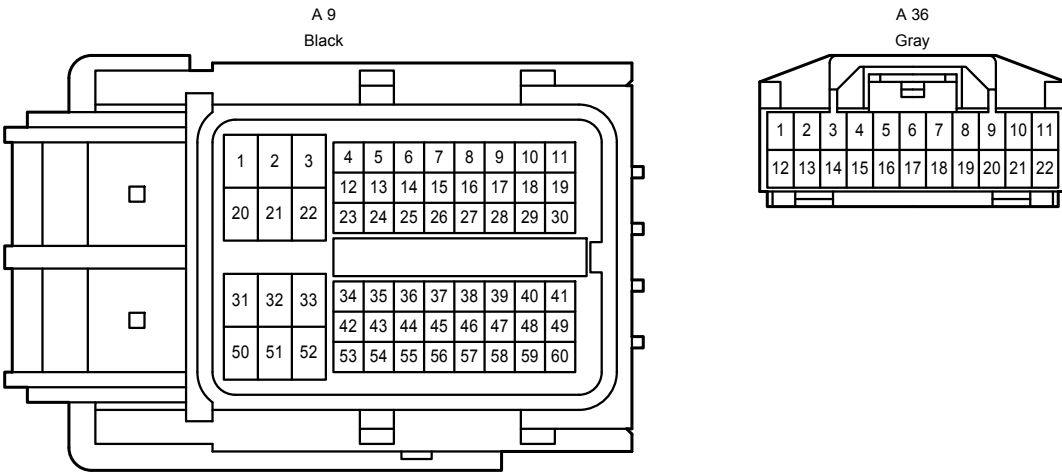


Diagram of a 40-pin D-sub connector. The diagram shows the top and side views of the connector. The top view is a rectangle with 40 pins arranged in two rows of 20. The side view shows the connector's profile with a central latch mechanism. The pins are numbered 1 through 40, starting from the top left and moving right, then down to the bottom row.

A diagram showing a 22-column grid. The grid is divided into two rows of 11 columns each. The top row is labeled with numbers 1 through 11, and the bottom row is labeled with numbers 12 through 22. Above the grid, there is a central structure with a roof and a door, representing a building or a stage set.

1	2	3	4	5	6	7	8	9	10	11	12
13	14	15	16	17	18	19	20	21	22	23	24
25	26	27	28	29	30	31	32	33	34	35	36
37	38	39	40	41	42	43	44	45	46	47	48
49	50	51	52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69	70	71	72
73	74	75	76	77	78	79	80	81	82	83	84

The diagram shows a rectangular room with a stage at the top and a screen at the bottom. The room is filled with 12 rows of 12 seats each, totaling 144 seats. The seats are arranged in a grid with aisle seats on the left and right sides of each row. The rows are numbered 1 to 12 from top to bottom, and the seats in each row are numbered 1 to 12 from left to right.

1	2	3	4	5	6	7	8	9	10	11	12
13	14	15	16	17	18	19	20	21	22	23	24
25	26	27	28	29	30	31	32	33	34	35	36
37	38	39	40	41	42	43	44	45	46	47	48
49	50	51	52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69	70	71	72

A diagram of a 36-hole golf green layout, showing three groups of 12 holes each, arranged in a row. Each group consists of two rows of six holes. The holes are numbered 1 through 36, starting from the left group and moving right, then top to bottom within each group.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36

A diagram of a 18-pin connector. It is a rectangular board with 18 pins arranged in two rows of nine. A house-shaped cutout is located in the center of the top edge, spanning pins 3 through 7. The pins are numbered 1 through 18, starting from the top left and moving right, then down to the bottom row.

A diagram of a 12-pin D-sub connector. The pins are arranged in two rows of six. The top row is numbered 1 to 6 from left to right, and the bottom row is numbered 7 to 12 from left to right. The connector has a D-shaped shield and a mounting bracket on top.

The diagram illustrates the correct and incorrect methods for connecting a 24-pin D-sub connector. On the left, a 24-pin cable is correctly connected to the 24-pin D-sub connector. On the right, a 15-pin cable is incorrectly connected, leaving pins 16 through 24 unconnected. The 24-pin connector is shown with pins numbered 1 through 24. The 15-pin connector is shown with pins numbered 1 through 15.

