


24.Rear Gate Trim

A: REMOVAL


CAUTION:

Be careful not to damage clips or their holes.


- 1) Remove clips and detach rear gate lower trim (A).

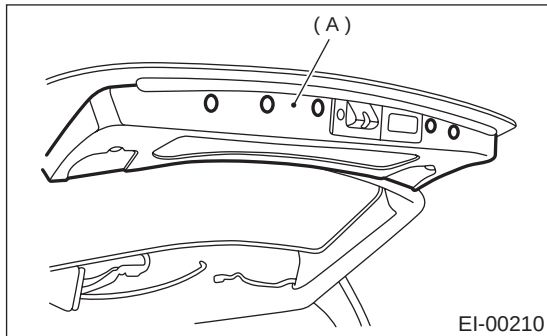

- 2) Remove caps and screws, and then detach high-mounted stop light cover (A).

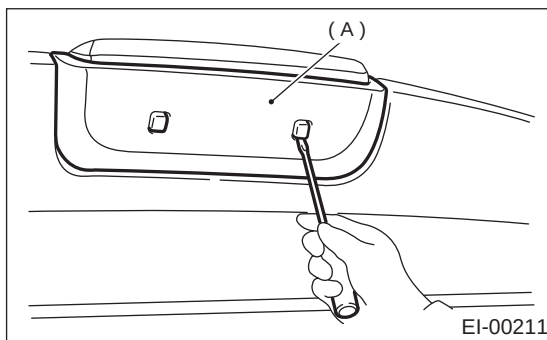

- 3) Remove rear gate upper trim (A).

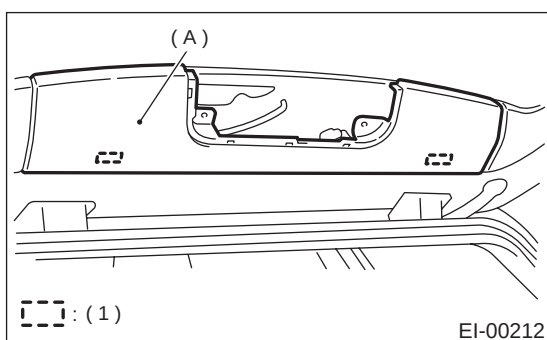

(1) Hook pawl

B: INSTALLATION

Install in the reverse order of removal.