


12.Wiper Control Relay

A: REMOVAL

1. WAGON

- 1) Remove right quarter lower trim. <Ref. to EI-43, REMOVAL, Rear Quarter Trim.>
- 2) Remove quarter pocket.
- 3) Loosen nut to remove control unit.

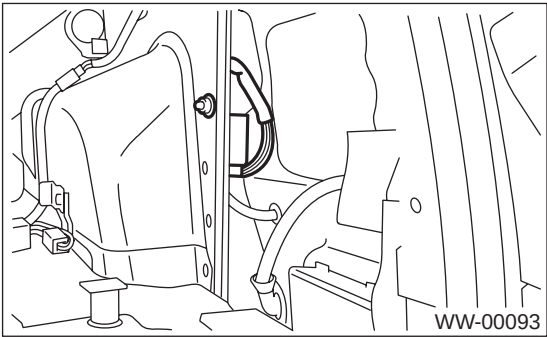

B: INSTALLATION



1. WAGON

Install in the reverse order of removal.

C: INSPECTION

1. WAGON

- 1) Apply battery voltage to the rear terminals 8 and 2, and then inspect the voltage of 6 and 2. (Measure the voltage from after the second time the wiper stops.)

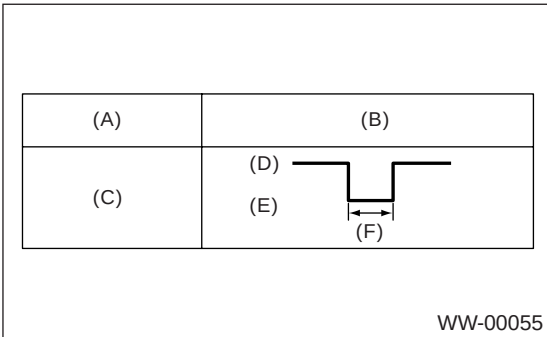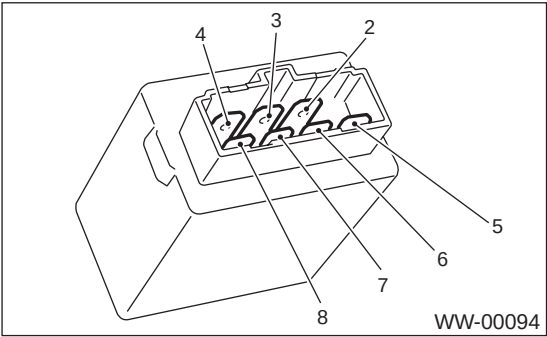

- (A) Switch position
- (B) Voltage
- (C) ON
- (D) 12 V
- (E) 0 V
- (F)  $9 \pm 2$  sec.

If operation is not as specified, replace the switch.

## WIPER CONTROL RELAY

WIPER AND WASHER SYSTEMS

---

**MEMO:**