SECTION EC
ENGINE CONTROL SYSTEM

CONTENTS

VQ35DE

PRECAUTION 9

PRECAUTIONS 9
Precaution for Supplemental Restraint System (SRS) "AIR BAG" and "SEAT BELT PRE-TENSIONER" 9
Precaution for Procedure without Cowl Top Cover 9
Precautions For Xenon Headlamp Service 9
Precautions for Removing Battery Terminal 10
On Board Diagnostic (OBD) System of Engine and CVT 10
General Precautions 11

PREPARATION 15

PREPARATION 15
Special Service Tools 15
Commercial Service Tools 15

SYSTEM DESCRIPTION 17

COMPONENT PARTS 17

ENGINE CONTROL SYSTEM 17
ENGINE CONTROL SYSTEM : Component Parts Location 17
ECM 20
Malfunction Indicator lamp (MIL) 21
Accelerator Pedal Position Sensor 21
Electric Throttle Control Actuator 21
Ignition Coil (With Power Transistor) 22
Fuel Injector 23
Mass Air Flow Sensor (With Intake Air Temperature Sensor) 23
Camshaft Position Sensor (PHASE) 24
Crankshaft Position Sensor (POS) 24
Intake Valve Timing Control Solenoid Valve 25
Intake Valve Timing Intermediate Lock Control Solenoid Valve 25
Exhaust Valve Timing Control Position Sensor 25
Exhaust Valve Timing Control Solenoid Valve 25
Engine Coolant Temperature Sensor 26
Engine Oil Pressure Sensor 26
Engine Oil Temperature Sensor 26
Knock Sensor 27
VIAS Control Solenoid Valve 1 and 2 27
Power Valve Actuator 1 and 2 27
Electronic Controlled Engine Mount 27
Refrigerant Pressure Sensor 28
Battery Current Sensor (With Battery Temperature Sensor) 28
Cooling Fan 28
EVAP Canister 28
EVAP Canister Purge Volume Control Solenoid Valve 29
EVAP Canister Vent Control Valve 29
EVAP Control System Pressure Sensor 29
Air Fuel Ratio (A/F) Sensor 1 29
Heated Oxygen Sensor 2 30
Fuel Level Sensor Unit and Fuel Pump 30
Fuel Tank Temperature Sensor 31
ASCD Steering Switch 31
Stop Lamp Switch & Brake Pedal Position Switch 31

STRUCTURE AND OPERATION 32
Positive Crankcase Ventilation (PCV) 32
On Board Refueling Vapor Recovery (ORVR) 33

SYSTEM 34

ENGINE CONTROL SYSTEM 34
ENGINE CONTROL SYSTEM : System Description 34
ENGINE CONTROL SYSTEM : Circuit Diagram 36
ENGINE CONTROL SYSTEM : Fail-safe 39

MULTIPORT FUEL INJECTION SYSTEM 41
MULTIPORT FUEL INJECTION SYSTEM : System Description 42

ELECTRIC IGNITION SYSTEM 44

cardiagn.com

ELECTRIC IGNITION SYSTEM : System Description 44

AIR CONDITIONING CUT CONTROL 45
AIR CONDITIONING CUT CONTROL : System Description 45

AUTOMATIC SPEED CONTROL DEVICE (ASCD).. 45
AUTOMATIC SPEED CONTROL DEVICE (ASCD) : System Description 46

COOLING FAN CONTROL 47
COOLING FAN CONTROL : System Description... 47

ELECTRONIC CONTROLLED ENGINE MOUNT ... 48
ELECTRONIC CONTROLLED ENGINE MOUNT : System Description 48

EVAPORATIVE EMISSION SYSTEM 50
EVAPORATIVE EMISSION SYSTEM : System Description 51

INTAKE VALVE TIMING CONTROL 51
INTAKE VALVE TIMING CONTROL : System Description 51

EXHAUST VALVE TIMING CONTROL 54
EXHAUST VALVE TIMING CONTROL : System Description 54

FUEL FILLER CAP WARNING SYSTEM 55
FUEL FILLER CAP WARNING SYSTEM : System Description 55

VARIABLE INDUCTION AIR SYSTEM 56
VARIABLE INDUCTION AIR SYSTEM : System Description 56

CAN COMMUNICATION 57
CAN COMMUNICATION : System Description 57

STARTER MOTOR DRIVE CONTROL 58
STARTER MOTOR DRIVE CONTROL : System Description 58

ENGINE PROTECTION CONTROL AT LOW ENGINE OIL PRESSURE 58
ENGINE PROTECTION CONTROL AT LOW ENGINE OIL PRESSURE : System Description 58

OPERATION 60

AUTOMATIC SPEED CONTROL DEVICE (ASCD).. 60
AUTOMATIC SPEED CONTROL DEVICE (ASCD) : Switch Name and Function 60

ON BOARD DIAGNOSTIC (OBD) SYSTEM 62
Diagnosis Description 62
GST (Generic Scan Tool) 62

DIAGNOSIS SYSTEM (ECM) 63

DIAGNOSIS DESCRIPTION 63
DIAGNOSIS DESCRIPTION : 1st Trip Detection Logic and Two Trip Detection Logic 63
DIAGNOSIS DESCRIPTION : DTC and Freeze Frame Data 63
DIAGNOSIS DESCRIPTION : Counter System 64
DIAGNOSIS DESCRIPTION : Driving Pattern 67
DIAGNOSIS DESCRIPTION : System Readiness Test (SRT) Code 68
DIAGNOSIS DESCRIPTION : Permanent Diagnostic Trouble Code (Permanent DTC) 69
DIAGNOSIS DESCRIPTION : Malfunction Indicator Lamp (MIL) 70
On Board Diagnosis Function 70
CONSULT Function 73

ECU DIAGNOSIS INFORMATION 83

ECM 83
Reference Value 83
Fail-safe 99
DTC Inspection Priority Chart 101
DTC Index 103
Test Value and Test Limit 107

WIRING DIAGRAM 116

ENGINE CONTROL SYSTEM 116
Wiring Diagram 116

BASIC INSPECTION 136

DIAGNOSIS AND REPAIR WORKFLOW 136
Work Flow 136
Diagnostic Work Sheet 139

BASIC INSPECTION 141
Work Procedure 141

ADDITIONAL SERVICE WHEN REPLACING ECM 145
Description 145
Work Procedure 145

ACCELERATOR PEDAL RELEASED POSITION LEARNING 147
Description 147
Work Procedure 147

THROTTLE VALVE CLOSED POSITION LEARNING 148
Description 148
Work Procedure 148

IDLE AIR VOLUME LEARNING 149
Description 149
Work Procedure 149

MIXTURE RATIO SELF-LEARNING VALUE CLEAR 151
Description 151
Work Procedure 151

cardiagn.com

VIN REGISTRATION 152
Description 152
Work Procedure 152

FUEL PRESSURE 153
Work Procedure 153

HOW TO SET SRT CODE 155
Description 155
SRT Set Driving Pattern 156
Work Procedure 158

HOW TO ERASE PERMANENT DTC 161
Description 161
Work Procedure (Group A) 162
Work Procedure (Group B) 164

DTC/CIRCUIT DIAGNOSIS 167

TROUBLE DIAGNOSIS - SPECIFICATION VALUE 167
Description 167
Component Function Check 167
Diagnosis Procedure 168

POWER SUPPLY AND GROUND CIRCUIT ... 175
Diagnosis Procedure 175

U0101 CAN COMM CIRCUIT 179
Description 179
DTC Logic 179
Diagnosis Procedure 179

U1000 CAN COMM CIRCUIT 180
Description 180
DTC Logic 180
Diagnosis Procedure 180

P0011, P0021 IVT CONTROL 181
DTC Logic 181
Diagnosis Procedure 182
Component Inspection 183

P0014, P0024 EVT CONTROL 184
DTC Description 184
Diagnosis Procedure 185
Component Inspection (Camshaft Position Sensor) 187
Component Inspection (Crankshaft Position Sensor) 187
Component Inspection (Exhaust Valve Timing Control Position Sensor) 188
Component Inspection (Exhaust Valve Timing Control Solenoid Valve) 189

P0030, P0031, P0032, P0036, P0051, P0052 A/F SENSOR 1 HEATER 190
DTC Logic 190
Diagnosis Procedure 190
Component Inspection 191

P0037, P0038, P0057, P0058 HO2S2 HEATER 193
DTC Logic 193
Diagnosis Procedure 194
Component Inspection 194

P0075, P0081 IVT CONTROL SOLENOID VALVE 196
DTC Logic 196
Diagnosis Procedure 196
Component Inspection 197

P0078, P0084 EVT CONTROL SOLENOID VALVE 198
DTC Description 198
Diagnosis Procedure 198
Component Inspection (Exhaust Valve Timing Control Solenoid Valve) 199

P0101 MAF SENSOR 201
DTC Logic 201
Diagnosis Procedure 201
Component Inspection 203

P0102, P0103 MAF SENSOR 206
DTC Logic 206
Diagnosis Procedure 206
Component Inspection 208

P0111 IAT SENSOR 211
DTC Logic 211
Component Function Check 212
Diagnosis Procedure 212
Component Inspection 212

P0112, P0113 IAT SENSOR 213
DTC Logic 213
Diagnosis Procedure 213
Component Inspection 214

P0116 ECT SENSOR 215
DTC Logic 215
Component Function Check 216
Diagnosis Procedure 216
Component Inspection 216

P0117, P0118 ECT SENSOR 217
DTC Logic 217
Diagnosis Procedure 217
Component Inspection 218

P0122, P0123 TP SENSOR 219
DTC Logic 219
Diagnosis Procedure 219
Component Inspection 220

P0125 ECT SENSOR 222
DTC Logic 222
Diagnosis Procedure 222
Component Inspection 223

cardiagn.com

P0127 IAT SENSOR 224
DTC Logic 224
Diagnosis Procedure 224
Component Inspection 225

P0128 THERMOSTAT FUNCTION 226
DTC Logic 226
Diagnosis Procedure 227
Component Inspection 227

P0130, P0150 A/F SENSOR 1 229
DTC Logic 229
Component Function Check 230
Diagnosis Procedure 231

P0131, P0151 A/F SENSOR 1 233
DTC Logic 233
Diagnosis Procedure 234

P0132, P0152 A/F SENSOR 1 236
DTC Logic 236
Diagnosis Procedure 237

P0137, P0157 HO2S2 239
DTC Logic 239
Component Function Check 240
Diagnosis Procedure 241
Component Inspection 242

P0138, P0158 HO2S2 245
DTC Logic 245
Component Function Check 246
Diagnosis Procedure 248
Component Inspection 250

P0139, P0159 HO2S2 252
DTC Logic 252
Component Function Check 253
Diagnosis Procedure 255
Component Inspection 256

P0141, P0161 HEATED OXYGEN SENSOR 2 HEATER 258
DTC Logic 258
Diagnosis Procedure 258
Component Inspection 259

P014C, P014D, P014E, P014F, P015A, P015B, P015C, P015D A/F SENSOR 1 261
DTC Logic 261
Diagnosis Procedure 263

P0171, P0174 FUEL INJECTION SYSTEM FUNCTION 267
DTC Logic 267
Diagnosis Procedure 268

P0172, P0175 FUEL INJECTION SYSTEM FUNCTION 271
DTC Logic 271
Diagnosis Procedure 272

P0181 FTT SENSOR 275
DTC Logic 275
Component Function Check 276
Diagnosis Procedure 277
Component Inspection 278

P0182, P0183 FTT SENSOR 279
DTC Logic 279
Diagnosis Procedure 279
Component Inspection 280

P0196 EOT SENSOR 281
DTC Logic 281
Component Function Check 283
Diagnosis Procedure 283
Component Inspection 283

P0197, P0198 EOT SENSOR 285
DTC Logic 285
Diagnosis Procedure 285
Component Inspection 286

P0222, P0223 TP SENSOR 287
DTC Logic 287
Diagnosis Procedure 287
Component Inspection 288

P0300, P0301, P0302, P0303, P0304, P0305, P0306 MISFIRE 290
DTC Logic 290
Diagnosis Procedure 291

P0327, P0328, P0332, P0333 KS 296
DTC Logic 296
Diagnosis Procedure 296
Component Inspection 297

P0335 CKP SENSOR (POS) 298
DTC Logic 298
Diagnosis Procedure 298
Component Inspection 299

P0340, P0345 CMP SENSOR (PHASE) 301
DTC Logic 301
Diagnosis Procedure 301
Component Inspection 303

P0420, P0430 THREE WAY CATALYST FUNCTION 305
DTC Logic 305
Component Function Check 306
Diagnosis Procedure 307

P0441 EVAP CONTROL SYSTEM 310
DTC Logic 310
Component Function Check 311
Diagnosis Procedure 312

P0443 EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE 315
DTC Logic 315

cardiagn.com

Diagnosis Procedure 316
Component Inspection 318

P0444, P0445 EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE 320
DTC Logic 320
Diagnosis Procedure 320
Component Inspection 321

P0447 EVAP CANISTER VENT CONTROL VALVE 323
DTC Logic 323
Diagnosis Procedure 323
Component Inspection 325

P0448 EVAP CANISTER VENT CONTROL VALVE 327
DTC Logic 327
Diagnosis Procedure 327
Component Inspection 329

P0451 EVAP CONTROL SYSTEM PRESSURE SENSOR 331
DTC Logic 331
Diagnosis Procedure 332
Component Inspection 333

P0452 EVAP CONTROL SYSTEM PRESSURE SENSOR 334
DTC Logic 334
Diagnosis Procedure 335
Component Inspection 336

P0453 EVAP CONTROL SYSTEM PRESSURE SENSOR 337
DTC Logic 337
Diagnosis Procedure 338
Component Inspection 340

P0456 EVAP CONTROL SYSTEM 341
DTC Logic 341
Diagnosis Procedure 342
Component Inspection 346

P0460 FUEL LEVEL SENSOR 347
DTC Logic 347
Diagnosis Procedure 347

P0461 FUEL LEVEL SENSOR 348
DTC Logic 348
Component Function Check 348
Diagnosis Procedure 349

P0462, P0463 FUEL LEVEL SENSOR 350
DTC Logic 350
Diagnosis Procedure 350

P0500 VSS 351
Description 351
DTC Logic 351
Diagnosis Procedure 351

P0506 ISC SYSTEM 353
Description 353
DTC Logic 353
Diagnosis Procedure 353

P0507 ISC SYSTEM 355
Description 355
DTC Logic 355
Diagnosis Procedure 355

P050A, P050E COLD START CONTROL 357
Description 357
DTC Logic 357
Diagnosis Procedure 358

P0520 EOP SENSOR 359
DTC Logic 359
Diagnosis Procedure 359
Component Inspection 361

P0524 ENGINE OIL PRESSURE 362
DTC Logic 362
Diagnosis Procedure 363
Component Inspection 364

P052A, P052B, P052C, P052D INTAKE VALVE TIMING CONTROL 365
DTC Logic 365
Diagnosis Procedure 366
Component Inspection (Intake Valve Timing Control Solenoid Valve) 367
Component Inspection (Intake Valve Timing Intermediate Lock Control Solenoid Valve) 368
Component Inspection (Crankshaft Position sensor) 368
Component Inspection (Camshaft position sensor) 369

P0603, P062F ECM 371
DTC Description 371
Diagnosis Procedure 372

P0604 ECM 373
DTC Logic 373
Diagnosis Procedure 373

P0605 ECM 374
DTC Logic 374
Diagnosis Procedure 374

P0606 ECM 375
DTC Logic 375
Diagnosis Procedure 375

P0607 ECM 376
DTC Logic 376
Diagnosis Procedure 376

P060A ECM 377
DTC Logic 377
Diagnosis Procedure 377

cardiagn.com

P060B ECM 378
DTC Logic 378
Diagnosis Procedure 378

P0643 SENSOR POWER SUPPLY 379
DTC Logic 379
Diagnosis Procedure 379

P0850 PNP SWITCH 381
Description 381
DTC Logic 381
Component Function Check 382
Diagnosis Procedure 382

P1078, P1084 EVT CONTROL POSITION SENSOR 384
DTC Description 384
Diagnosis Procedure 385
Component Inspection (Exhaust Valve Timing Control Position Sensor) 386

P1148, P1168 CLOSED LOOP CONTROL 388
DTC Logic 388

P1212 TCS COMMUNICATION LINE 389
Description 389
DTC Logic 389
Diagnosis Procedure 389

P1217 ENGINE OVER TEMPERATURE 390
DTC Logic 390
Component Function Check 390
Diagnosis Procedure 391

P1225 TP SENSOR 394
DTC Logic 394
Diagnosis Procedure 394

P1226 TP SENSOR 395
DTC Logic 395
Diagnosis Procedure 395

P1550 BATTERY CURRENT SENSOR 396
DTC Logic 396
Diagnosis Procedure 396
Component Inspection 397

P1551, P1552 BATTERY CURRENT SENSOR 399
DTC Logic 399
Diagnosis Procedure 399
Component Inspection 400

P1553 BATTERY CURRENT SENSOR 402
DTC Logic 402
Diagnosis Procedure 402
Component Inspection 403

P1554 BATTERY CURRENT SENSOR 405
DTC Logic 405
Component Function Check 405
Diagnosis Procedure 406
Component Inspection 407

P1556, P1557 BATTERY TEMPERATURE SENSOR 408
DTC Logic 408
Diagnosis Procedure 408
Component Inspection (Battery Temperature Sensor) 409

P1564 ASCD STEERING SWITCH 410
DTC Logic 410
Diagnosis Procedure 410
Component Inspection 412

P1572 BRAKE PEDAL POSITION SWITCH .. 413
Description 413
DTC Logic 413
Component Function Check 414
Diagnosis Procedure 415
Component Inspection (Brake Pedal Position Switch) 417
Component Inspection (Stop Lamp Switch) 418

P1574 ASCD VEHICLE SPEED SENSOR 419
Description 419
DTC Logic 419
Diagnosis Procedure 419

P1650 STARTER MOTOR RELAY 2 421
Description 421
DTC Logic 421
Diagnosis Procedure 422

P1651 STARTER MOTOR RELAY 424
Description 424
DTC Logic 424
Diagnosis Procedure 425

P1652 STARTER MOTOR SYSTEM COMM .. 427
Description 427
DTC Logic 427
Diagnosis Procedure 427

P1700 CVT CONTROL SYSTEM 429
Description 429

P1715 INPUT SPEED SENSOR (PRIMARY SPEED SENSOR) 430
Description 430
DTC Logic 430
Diagnosis Procedure 430

P1800 VIAS CONTROL SOLENOID VALVE 1. 431
DTC Logic 431
Diagnosis Procedure 431
Component Inspection 432

P1801 VIAS CONTROL SOLENOID VALVE 2. 433
DTC Logic 433
Diagnosis Procedure 433

cardiagn.com

Component Inspection 434

P1805 BRAKE SWITCH 435
Description 435
DTC Logic 435
Diagnosis Procedure 435
Component Inspection (Stop Lamp Switch) 436

P2096, P2097, P2098, P2099 A/F SENSOR 1. 437
DTC Logic 437
Diagnosis Procedure 437

P2100, P2103 THROTTLE CONTROL MOTOR RELAY 441
DTC Logic 441
Diagnosis Procedure 441

P2101 ELECTRIC THROTTLE CONTROL FUNCTION 443
DTC Logic 443
Diagnosis Procedure 443
Component Inspection 445

P2118 THROTTLE CONTROL MOTOR 446
DTC Logic 446
Diagnosis Procedure 446
Component Inspection 447

P2119 ELECTRIC THROTTLE CONTROL ACTUATOR 448
DTC Logic 448
Diagnosis Procedure 448

P2122, P2123 APP SENSOR 450
DTC Logic 450
Diagnosis Procedure 450
Component Inspection 451

P2127, P2128 APP SENSOR 452
DTC Logic 452
Diagnosis Procedure 452
Component Inspection 454

P2135 TP SENSOR 455
DTC Logic 455
Diagnosis Procedure 455
Component Inspection 456

P2138 APP SENSOR 457
DTC Logic 457
Diagnosis Procedure 457
Component Inspection 459

P219A, P219B AIR FUEL RATIO 460
DTC Logic 460
Diagnosis Procedure 461

P2610 ECM INTERNAL TIMER 465
Description 465
DTC Logic 465
Diagnosis Procedure 466

BRAKE PEDAL POSITION SWITCH 467
Component Function Check 467
Diagnosis Procedure 467
Component Inspection (Brake Pedal Position Switch) 468

ASCD INDICATOR 469
Component Function Check 469
Diagnosis Procedure 469

COOLING FAN 470
Component Function Check 470
Diagnosis Procedure 470
Component Inspection (Cooling Fan Motor) 472
Component Inspection (Cooling Fan Relay) 473

ELECTRICAL LOAD SIGNAL 474
Description 474
Component Function Check 474
Diagnosis Procedure 474

ELECTRONIC CONTROLLED ENGINE MOUNT 476
Component Function Check 476
Diagnosis Procedure 476
Component Inspection 477

FUEL INJECTOR 479
Component Function Check 479
Diagnosis Procedure 479
Component Inspection 480

FUEL PUMP 482
Component Function Check 482
Diagnosis Procedure 482
Component Inspection (Fuel Pump) 483

IGNITION SIGNAL 484
Component Function Check 484
Diagnosis Procedure 484
Component Inspection (Ignition Coil with Power Transistor) 487
Component Inspection (Condenser) 488

INFORMATION DISPLAY (ASCD) 489
Component Function Check 489
Diagnosis Procedure 489

MALFUNCTION INDICATOR LAMP 490
Component Function Check 490
Diagnosis Procedure 490

ON BOARD REFUELING VAPOR RECOVERY (ORVR) 491
Component Function Check 491
Diagnosis Procedure 491
Component Inspection 493

REFRIGERANT PRESSURE SENSOR 495
Component Function Check 495
Diagnosis Procedure 495

cardiagn.com

SENSOR POWER SUPPLY2 CIRCUIT 497
Description 497
Diagnosis Procedure 497

VARIABLE INDUCTION AIR SYSTEM 499
Component Function Check 499
Diagnosis Procedure 500

SYMPTOM DIAGNOSIS 503

ENGINE CONTROL SYSTEM SYMPTOMS .. 503
Symptom Table 503

NORMAL OPERATING CONDITION 507
Description 507

PERIODIC MAINTENANCE 508

IDLE SPEED 508
Work Procedure 508

IGNITION TIMING 509
Work Procedure 509

EVAP LEAK CHECK 510
Work Procedure 510

POSITIVE CRANKCASE VENTILATION 512
Work Procedure 512

REMOVAL AND INSTALLATION 513

ECM 513
Removal and Installation 513

SERVICE DATA AND SPECIFICATIONS (SDS) 514

SERVICE DATA AND SPECIFICATIONS (SDS) 514
Idle Speed 514
Ignition Timing 514
Calculated Load Value 514
Mass Air Flow Sensor 514

cardiagn.com

PRECAUTION

PRECAUTIONS

Precaution for Supplemental Restraint System (SRS) "AIR BAG" and "SEAT BELT PRE-TENSIONER"

INFOID:0000000012406239

The Supplemental Restraint System such as “AIR BAG” and “SEAT BELT PRE-TENSIONER”, used along with a front seat belt, helps to reduce the risk or severity of injury to the driver and front passenger for certain types of collision. This system includes seat belt switch inputs and dual stage front air bag modules. The SRS system uses the seat belt switches to determine the front air bag deployment, and may only deploy one front air bag, depending on the severity of a collision and whether the front occupants are belted or unbelted. Information necessary to service the system safely is included in the “SRS AIR BAG” and “SEAT BELT” of this Service Manual.

WARNING:

Always observe the following items for preventing accidental activation.

- **To avoid rendering the SRS inoperative, which could increase the risk of personal injury or death in the event of a collision that would result in air bag inflation, all maintenance must be performed by an authorized NISSAN/INFINITI dealer.**
- **Improper maintenance, including incorrect removal and installation of the SRS, can lead to personal injury caused by unintentional activation of the system. For removal of Spiral Cable and Air Bag Module, see “SRS AIR BAG”.**
- **Never use electrical test equipment on any circuit related to the SRS unless instructed to in this Service Manual. SRS wiring harnesses can be identified by yellow and/or orange harnesses or harness connectors.**

PRECAUTIONS WHEN USING POWER TOOLS (AIR OR ELECTRIC) AND HAMMERS

WARNING:


Always observe the following items for preventing accidental activation.

- **When working near the Air Bag Diagnosis Sensor Unit or other Air Bag System sensors with the ignition ON or engine running, never use air or electric power tools or strike near the sensor(s) with a hammer. Heavy vibration could activate the sensor(s) and deploy the air bag(s), possibly causing serious injury.**
- **When using air or electric power tools or hammers, always switch the ignition OFF, disconnect the battery, and wait at least 3 minutes before performing any service.**

Precaution for Procedure without Cowl Top Cover

INFOID:0000000012406241

When performing the procedure after removing cowl top cover, cover the lower end of windshield with urethane, etc to prevent damage to windshield.

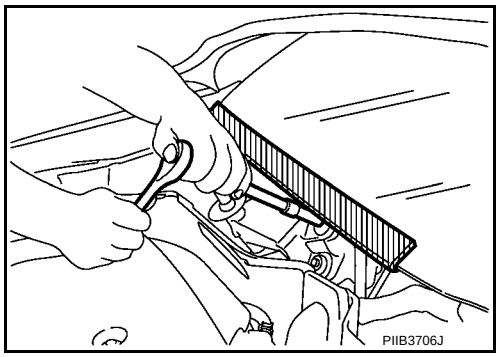

Precautions For Xenon Headlamp Service

INFOID:0000000012406240

WARNING:

Comply with the following warnings to prevent any serious accident.

- **Disconnect the battery cable (negative terminal) or the power supply fuse before installing, removing, or touching the xenon headlamp (bulb included). The xenon headlamp contains high-voltage generated parts.**
- **Never work with wet hands.**
- **Check the xenon headlamp ON-OFF status after assembling it to the vehicle. Never turn the xenon headlamp ON in other conditions. Connect the power supply to the vehicle-side connector.**

cardiagn.com

(Turning it ON outside the lamp case may cause fire or visual impairments.)
- **Never touch the bulb glass immediately after turning it OFF. It is extremely hot.**

CAUTION:


Comply with the following cautions to prevent any error and malfunction.
- **Install the xenon bulb securely. (Insufficient bulb socket installation may melt the bulb, the connector, the housing, etc. by high-voltage leakage or corona discharge.)**
- **Never perform HID circuit inspection with a tester.**
- **Never touch the xenon bulb glass with hands. Never put oil and grease on it.**
- **Dispose of the used xenon bulb after packing it in thick vinyl without breaking it.**
- **Never wipe out dirt and contamination with organic solvent (thinner, gasoline, etc.).**

Precautions for Removing Battery Terminal

INFOID:0000000013053810

When disconnecting the battery terminal, pay attention to the following.
- Always use a 12V battery as power source.
- Never disconnect battery terminal while engine is running.
- When removing the 12V battery terminal, turn OFF the ignition switch and wait at least 30 seconds.
- For vehicles with the engine listed below, remove the battery terminal after a lapse of the specified time:

D4D engine	: 20 minutes	YS23DDT	: 4 minutes
HRA2DDT	: 12 minutes	YS23DDTT	: 4 minutes
K9K engine	: 4 minutes	ZD30DDTi	: 60 seconds
M9R engine	: 4 minutes	ZD30DDTT	: 60 seconds
R9M engine	: 4 minutes		
V9X engine	: 4 minutes		
YD25DDTi	: 2 minutes		

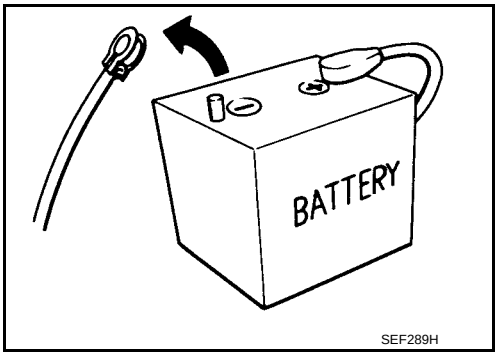

SEF289H

NOTE:
ECU may be active for several tens of seconds after the ignition switch is turned OFF. If the battery terminal is removed before ECU stops, then a DTC detection error or ECU data corruption may occur.
- After high-load driving, if the vehicle is equipped with the V9X engine, turn the ignition switch OFF and wait for at least 15 minutes to remove the battery terminal.

NOTE:
- Turbocharger cooling pump may operate in a few minutes after the ignition switch is turned OFF.
- Example of high-load driving
  - Driving for 30 minutes or more at 140 km/h (86 MPH) or more.
  - Driving for 30 minutes or more on a steep slope.
- For vehicles with the 2-batteries, be sure to connect the main battery and the sub battery before turning ON the ignition switch.

NOTE:
If the ignition switch is turned ON with any one of the terminals of main battery and sub battery disconnected, then DTC may be detected.
- After installing the 12V battery, always check "Self Diagnosis Result" of all ECUs and erase DTC.

NOTE:
The removal of 12V battery may cause a DTC detection error.

On Board Diagnostic (OBD) System of Engine and CVT

INFOID:0000000012406243

The ECM has an on board diagnostic system. It will illuminate the malfunction indicator lamp (MIL) to warn the driver of a malfunction causing emission deterioration.

CAUTION:
- **Always to turn the ignition switch OFF and disconnect the negative battery cable before any repair or inspection work. The open/short circuit of related switches, sensors, solenoid valves, etc. will cause the MIL to illuminate.**
- **Always to connect and lock the connectors securely after work. A loose (unlocked) connector will cause the MIL to illuminate due to the open circuit. (Be sure the connector is free from water, grease, dirt, bent terminals, etc.)**


cardiagn.com

- **Certain systems and components, especially those related to OBD, may use a new style slide-locking type harness connector. For description and how to disconnect, refer to PG-6, "Harness Connector".**
- **Always route and secure the harnesses properly after work. The interference of the harness with a bracket, etc. may cause the MIL to illuminate due to the short circuit.**
- **Always to connect rubber tubes properly after work. A misconnected or disconnected rubber tube may cause the MIL to illuminate due to the malfunction of the EVAP system or fuel injection system, etc.**
- **Always to erase the unnecessary malfunction information (repairs completed) from the ECM and TCM (Transmission control module) before returning the vehicle to the customer.**


General Precautions

INFOID:0000000012406244

- **Always use a 12 volt battery as power source.**
- **Never attempt to disconnect battery cables while engine is running.**
- **Before connecting or disconnecting the ECM harness connector, turn ignition switch OFF and disconnect negative battery cable. Failure to do so may damage the ECM because battery voltage is applied to ECM even if ignition switch is turned OFF.**
- **Before removing parts, turn ignition switch OFF and then disconnect battery ground cable.**

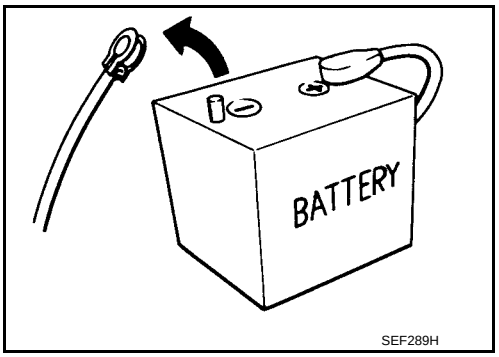



- **Never disassemble ECM.**
- **If a battery cable is disconnected, the memory will return to the ECM value.**
  The ECM will now start to self-control at its initial value. Thus, engine operation can vary slightly in this case. However, this is not an indication of a malfunction. Never replace parts because of a slight variation.
- **If the battery is disconnected, the following emission-related diagnostic information will be lost within 24 hours.**
  - **Diagnostic trouble codes**
  - **1st trip diagnostic trouble codes**
  - **Freeze frame data**
  - **1st trip freeze frame data**
  - **System readiness test (SRT) codes**
  - **Test values**
- **When connecting ECM harness connector, fasten (B) it securely with a lever (1) as far as it will go as shown in the figure.**
  - **ECM (2)**
  - **Loosen (A)**

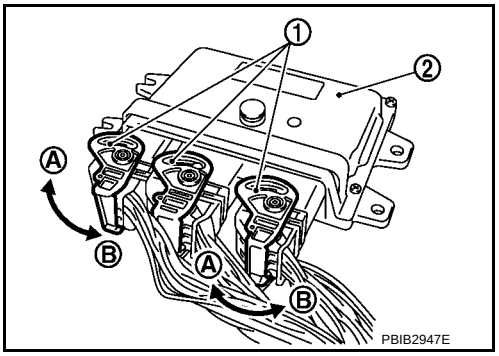


cardiagn.com

- **When connecting or disconnecting pin connectors into or from ECM, never damage pin terminals (bends or break).**
  Check that there are not any bends or breaks on ECM pin terminal, when connecting pin connectors.
- **Securely connect ECM harness connectors.**
  A poor connection can cause an extremely high (surge) voltage to develop in coil and condenser, thus resulting in damage to ICs.
- **Keep engine control system harness at least 10 cm (4 in) away from adjacent harness, to prevent engine control system malfunctions due to receiving external noise, degraded operation of ICs, etc.**
- **Keep engine control system parts and harness dry.**
- **Before replacing ECM, perform ECM Terminals and Reference Value inspection and check ECM functions properly. Refer to EC-83, "Reference Value".**
- **Handle mass air flow sensor carefully to avoid damage.**
- **Never clean mass air flow sensor with any type of detergent.**
- **Never disassemble electric throttle control actuator.**
- **Even a slight leakage in the air intake system can cause serious incidents.**
- **Never shock or jar the camshaft position sensor (PHASE), crankshaft position sensor (POS).**

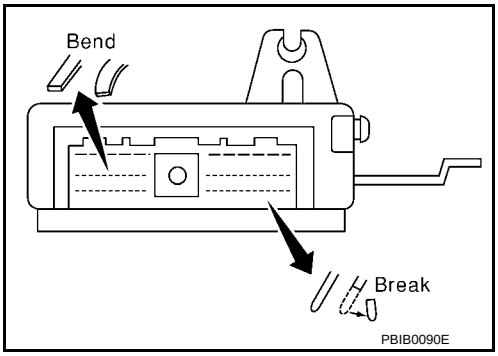

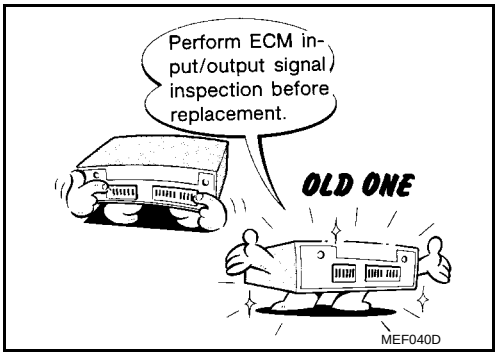


- **After performing each TROUBLE DIAGNOSIS, perform DTC Confirmation Procedure or Component Function Check.**
  The DTC should not be displayed in the DTC Confirmation Procedure if the repair is completed. The Component Function Check should be a good result if the repair is completed.

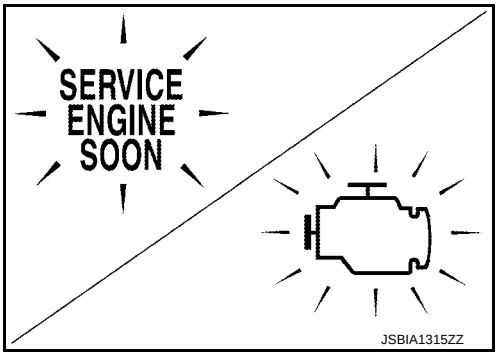


cardiagn.com


- **When measuring ECM signals with a circuit tester, never allow the two tester probes to contact.**
  Accidental contact of probes will cause a short circuit and damage the ECM power transistor.

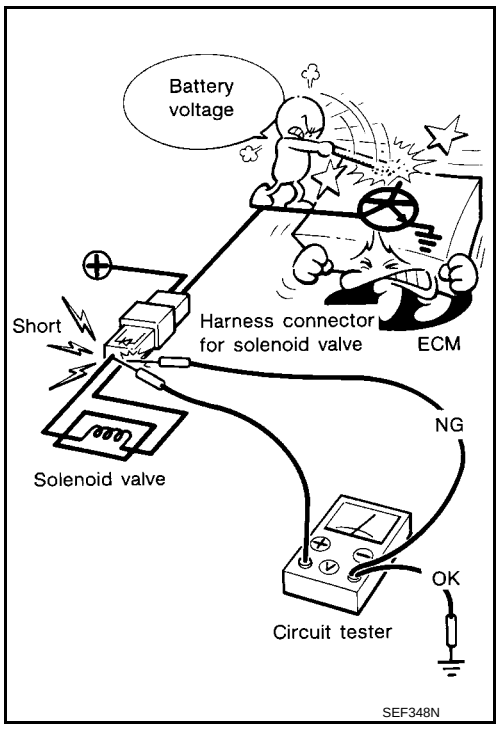

- **B1 indicates bank 1, B2 indicates bank 2 as shown in the figure.**
- **Never operate fuel pump when there is no fuel in lines.**
- **Tighten fuel hose clamps to the specified torque.**

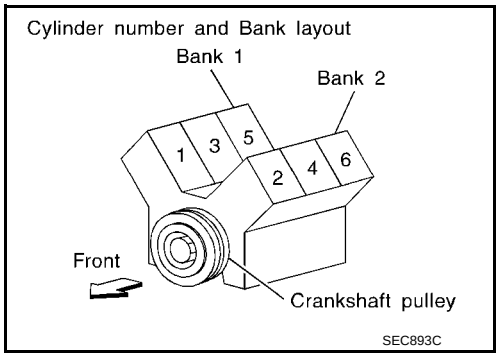


- **Never depress accelerator pedal when starting.**
- **Immediately after starting, never rev up engine unnecessarily.**
- **Never rev up engine just prior to shutdown.**

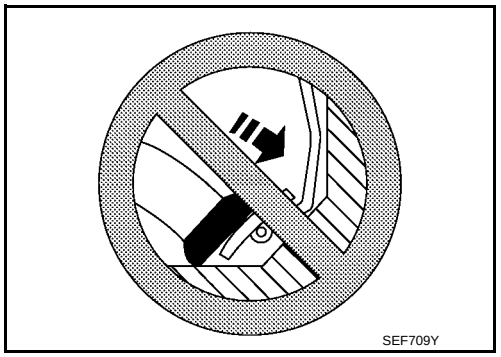

cardiagn.com

- **When installing C.B. ham radio or a mobile phone, be sure to observe the following as it may adversely affect electronic control systems depending on installation location.**
- **Keep the antenna as far as possible from the electronic control units.**
- **Keep the antenna feeder line more than 20 cm (8 in) away from the harness of electronic controls.**
  Never let them run parallel for a long distance.
- **Adjust the antenna and feeder line so that the standing-wave ratio can be kept smaller.**
- **Be sure to ground the radio to vehicle body.**

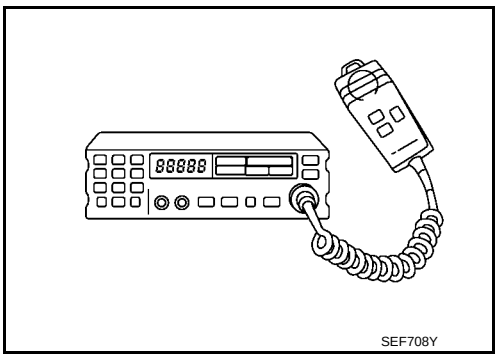

cardiagn.com



PREPARATION

PREPARATION

Special Service Tools




INFOID:0000000012406245

The actual shapes of TechMate tools may differ from those of special service tools illustrated here.





Tool number (TechMate No.) Tool name	Description
(J-44321) Fuel pressure gauge kit  LEC642	Checks fuel pressure
(J-44321-6) Fuel pressure adapter  LBIA0376E	Connects fuel pressure gauge to quick connector type fuel lines

Commercial Service Tools

INFOID:0000000012406246

Tool name (TechMate No.)	Description
(J-45488) Quick connector release  PBIC0198E	Removes fuel tube quick connectors in engine room
Leak detector i.e.: (J-41416)  S-NT703	Locates the EVAP leakage
EVAP service port adapter i.e.: (J-41413-OBD)  S-NT704	Applys positive pressure through EVAP service port

cardiagn.com

Tool name (TechMate No.)	Description
Fuel filler cap adapter i.e.: (J-42909)  ALBIA1353ZZ	Checks fuel tank vacuum relief valve opening pressure
Socket wrench  S-NT705	Removes and installs engine coolant temperature sensor. Refer to CO-27, "Exploded View".
Oxygen sensor thread cleaner i.e.: (J-43897-18) (J-43897-12)  AEM488	Reconditions the exhaust system threads before installing a new oxygen sensor. Use with anti-seize lubricant shown below. **a: 18 mm diameter with pitch 1.5 mm for Zirconia Oxygen Sensor** **b: 12 mm diameter with pitch 1.25 mm for Titania Oxygen Sensor**
Anti-seize lubricant i.e.: (Permatex™ 133AR or equivalent meeting MIL specification MIL-A-907)  S-NT779	Lubricates oxygen sensor thread cleaning tool when reconditioning exhaust system threads.

cardiagn.com

SYSTEM DESCRIPTION


COMPONENT PARTS

ENGINE CONTROL SYSTEM

ENGINE CONTROL SYSTEM : Component Parts Location

INFOID:0000000012406247

ENGINE ROOM

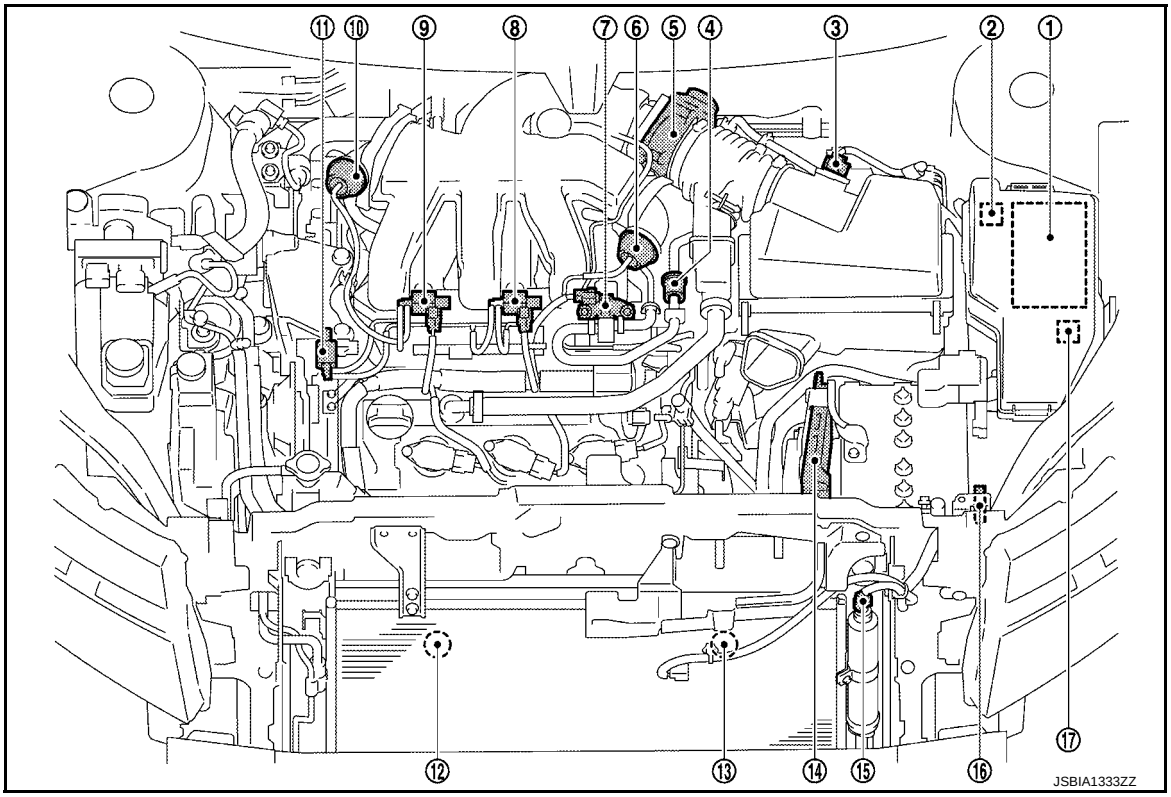


No.	Component	Function
1.	IPDM E/R	IPDM E/R activates the internal control circuit to perform the relay-ON-OFF control according to the input signals from various sensors and the request signals received from control units via CAN communication. Refer to PCS-34, "Exploded View" for detailed installationlocation.
2.	Cooling fan motor relay-3	EC-28, "Cooling Fan"
3.	Mass air flow sensor (with intake air temperature sensor)	EC-23, "Mass Air Flow Sensor (With Intake Air Temperature Sensor)"
4.	EVAP service port	—
5.	Electric throttle control actuator	EC-21, "Electric Throttle Control Actuator"
6.	Power valve actuator 2	EC-27, "Power Valve Actuator 1 and 2"
7.	EVAP canister purge volume control solenoid valve	EC-29, "EVAP Canister Purge Volume Control Solenoid Valve"
8.	VIAS control solenoid valve 2	EC-27, "VIAS Control Solenoid Valve 1 and 2"
9.	VIAS control solenoid valve 1	EC-27, "VIAS Control Solenoid Valve 1 and 2"
10.	Power valve actuator 1	EC-27, "Power Valve Actuator 1 and 2"
11.	Electronic controlled engine mount control solenoid valve	EC-27, "Electronic Controlled Engine Mount"
12.	Cooling fan motor-2	EC-28, "Cooling Fan"
13.	Cooling fan motor-1	EC-28, "Cooling Fan"
14.	ECM	EC-20, "ECM"

cardiagn.com

No.	Component	Function
15.	Refrigerant pressure sensor	EC-28, "Refrigerant Pressure Sensor" Refer to HA-43, "Exploded View" for detailed installationlocation.
16.	Battery current sensor (With Battery Temperrature Sensor)*	EC-28, "Battery Current Sensor (With Battery Temperature Sensor)"
17.	Cooling fan motor relay-2	EC-28, "Cooling Fan"

*: Not used for engine control system.

ENGINE

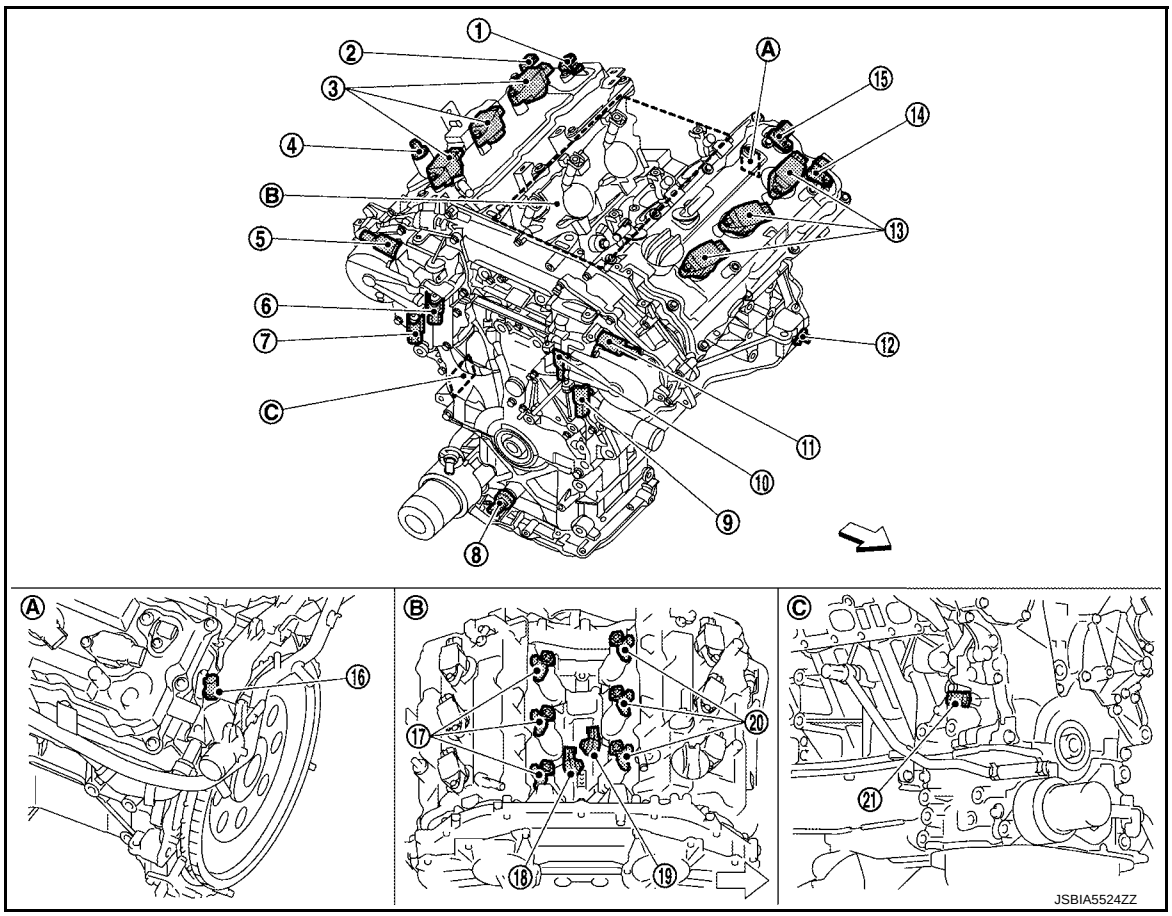

Ⓐ Engine rear upper-left Ⓑ Engine top center Ⓒ Engine front lower-right


⇦ : Vehicle front

No.	Component	Function
①	Camshaft position sensor (PHASE) (bank 1)	EC-24, "Camshaft Position Sensor (PHASE)"
②	Exhaust valve timing control position sensor (bank 1)	EC-25, "Exhaust Valve Timing Control Position Sensor"
③	Ignition coil (with power transistor) (bank 1)	EC-22, "Ignition Coil (With Power Transistor)"
④	PCV valve	EC-32, "Positive Crankcase Ventilation (PCV)"
⑤	Intake valve timing intermediate lock control solenoid valve (bank 1)	EC-25, "Intake Valve Timing Intermediate Lock Control Solenoid Valve"
⑥	Intake valve timing control solenoid valve (bank 1)	EC-25, "Exhaust Valve Timing Control Solenoid Valve"
⑦	Exhaust valve timing control solenoid valve (bank 1)	EC-25, "Exhaust Valve Timing Control Solenoid Valve"
⑧	Engine oil pressure sensor	EC-26, "Engine Oil Pressure Sensor"

cardiagn.com

No.	Component	Function
⑨	Exhaust valve timing control solenoid valve (bank 2)	EC-25, "Exhaust Valve Timing Control Solenoid Valve"
⑩	Intake valve timing control solenoid valve (bank 2)	EC-25, "Intake Valve Timing Control Solenoid Valve"
⑪	Intake valve timing intermediate lock control solenoid valve (bank 2)	EC-25, "Intake Valve Timing Intermediate Lock Control Solenoid Valve"
⑫	Crankshaft position sensor (POS)	EC-24, "Crankshaft Position Sensor (POS)"
⑬	Ignition coil (with power transistor) (bank 2)	EC-22, "Ignition Coil (With Power Transistor)"
⑭	Exhaust valve timing control position sensor (bank 2)	EC-25, "Exhaust Valve Timing Control Position Sensor"
⑮	Camshaft position sensor (PHASE) (bank 2)	EC-24, "Camshaft Position Sensor (PHASE)"
⑯	Engine coolant temperature sensor	EC-26, "Engine Coolant Temperature Sensor"
⑰	Fuel injector (bank 1)	EC-23, "Fuel Injector"
⑱	Knock sensor (bank 1)	EC-27, "Knock Sensor"
⑲	Knock sensor (bank 2)	EC-27, "Knock Sensor"
⑳	Fuel injector (bank 2)	EC-23, "Fuel Injector"
㉑	Engine oil temperature sensor	EC-26, "Engine Oil Temperature Sensor"


EXHAUST

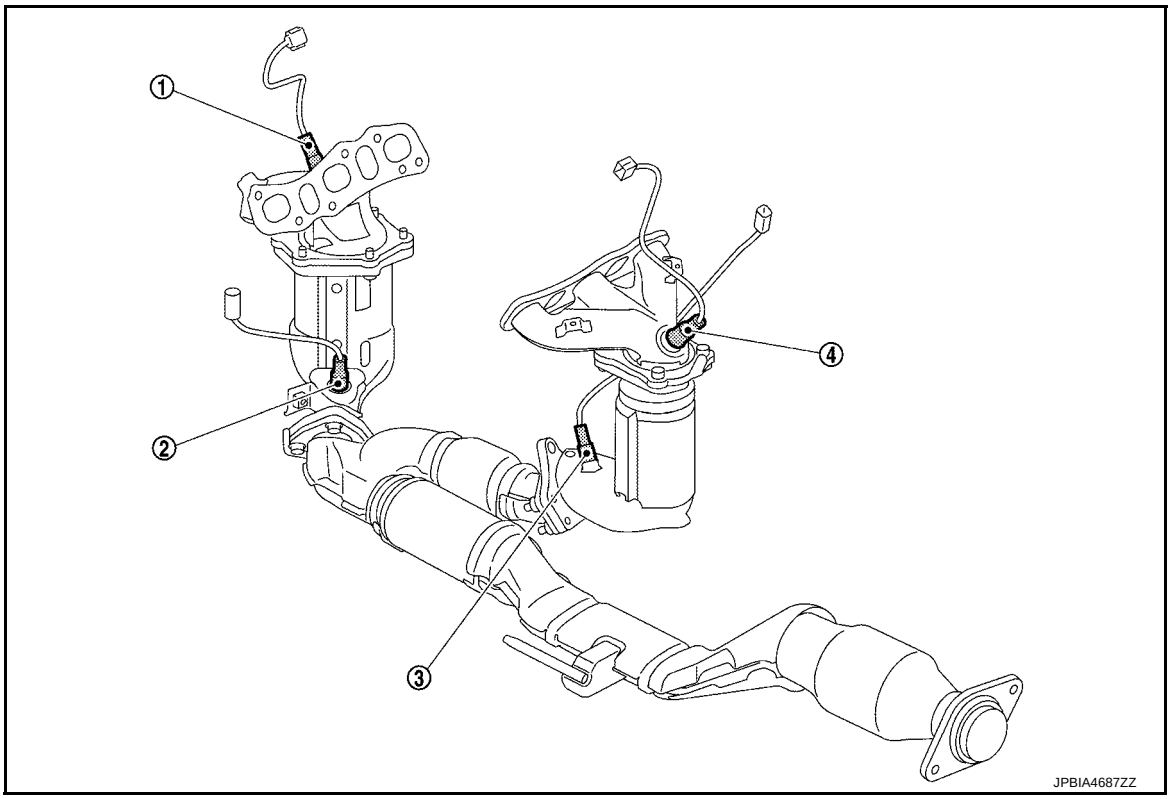

No.	Component	Function
1.	Air fuel ratio (A/F) sensor 1 (bank 2)	EC-29, "Air Fuel Ratio (A/F) Sensor 1"
2.	Heated oxygen sensor 2 (bank 2)	EC-30, "Heated Oxygen Sensor 2"
3.	Heated oxygen sensor 2 (bank 1)	EC-30, "Heated Oxygen Sensor 2"
4.	Air fuel ratio (A/F) sensor 1 (bank 1)	EC-29, "Air Fuel Ratio (A/F) Sensor 1"

BODY

cardiagn.com

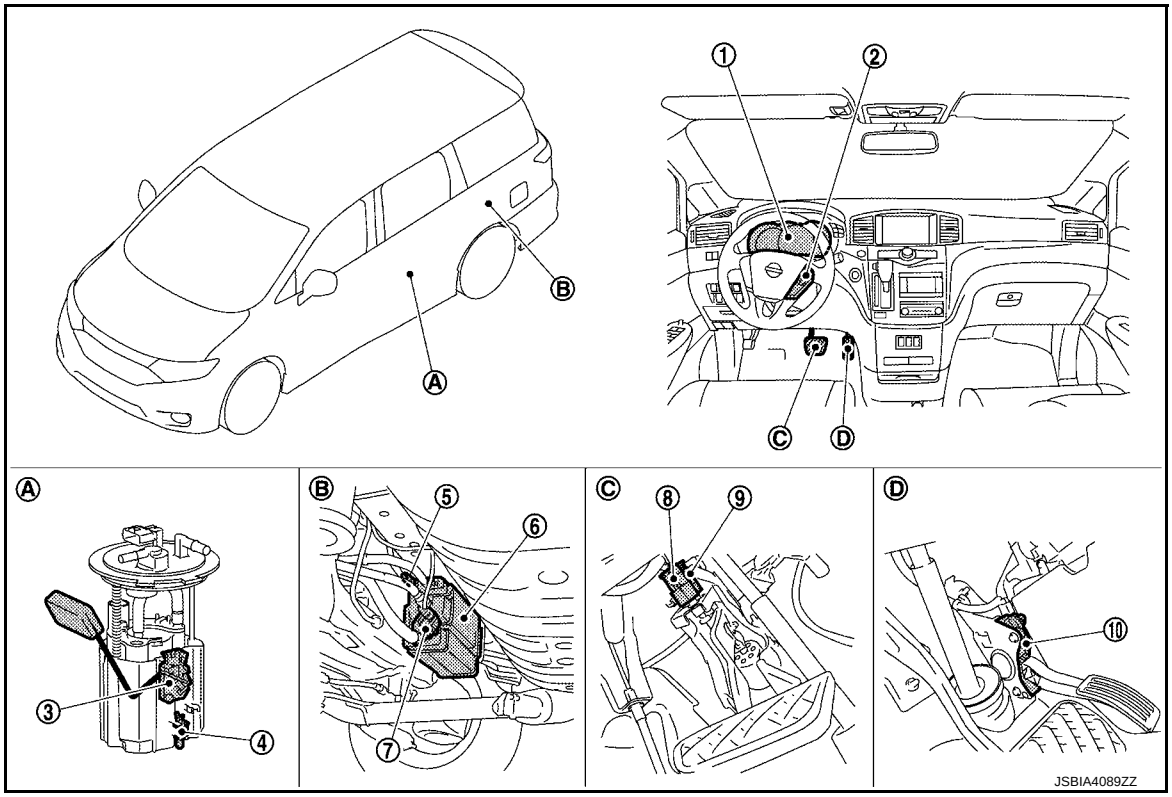

A. Fuel tank top center B. Rear suspension member periphery C. Pedal periphery
D. Pedal periphery

No.	Component		Function
1.	Combination meter	Malfunction indicator lamp (MIL)	EC-21, "Malfunction Indicator lamp (MIL)"
		Information display	The operation mode of the ASCD is indicated on the information display in the combination meter. ECM transmits the status signal to the combination meter via CAN communication according to ASCD operation.
2.	ASCD steering switch		EC-31, "ASCD Steering Switch"
3.	Fuel level sensor unit and fuel pump		EC-30, "Fuel Level Sensor Unit and Fuel Pump" Refer to FL-6, "Exploded View" for detailed installationlocation.
4.	Fuel tank temperature sensor		EC-31, "Fuel Tank Temperature Sensor"
5.	EVAP canister vent control valve		EC-29, "EVAP Canister Vent Control Valve"
6.	EVAP canister		EC-29, "EVAP Canister Vent Control Valve"
7.	EVAP control system pressure sensor		EC-29, "EVAP Control System Pressure Sensor"
8.	Brake pedal position switch		EC-31, "Stop Lamp Switch & Brake Pedal Position Switch"
9.	Stop lamp switch		
10.	Accelerator pedal position sensor		EC-21, "Accelerator Pedal Position Sensor"


ECM

INFOID:0000000012406248

- ECM (Engine Control Module) controls the engine.

cardiagn.com


- ECM consists of a microcomputer and connectors for signal input and output and for power supply.
- Battery voltage is supplied to the ECM even when the ignition switch is turned OFF for the ECM memory function of the DTC memory, the air-fuel ratio feedback compensation value memory, the idle air volume learning value memory, etc.

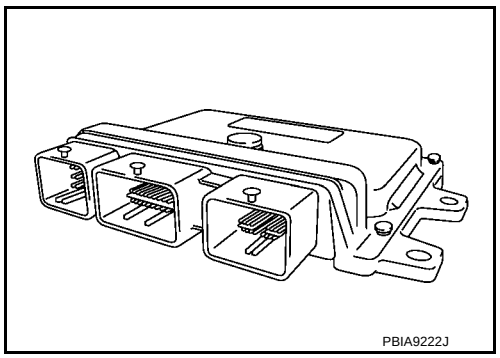
PBIA9222J

Malfunction Indicator lamp (MIL)

INFOID:0000000012406249

Malfunction Indicator lamp (MIL) is located on the combination meter.
MIL will illuminate when the ignition switch is turned ON without the engine running. This is a bulb check.
When the engine is started, MIL should turn OFF. If the MIL remains illuminated, the on board diagnostic system has detected an engine system malfunction.
For details, refer to EC-62, "Diagnosis Description".

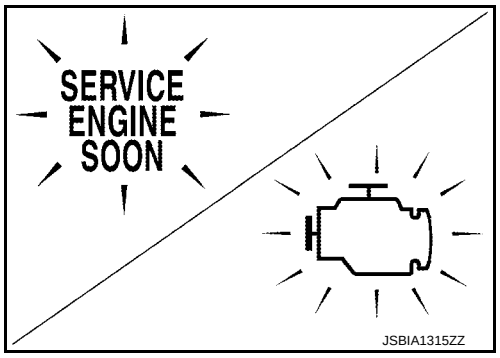


JSBIA1315ZZ


Accelerator Pedal Position Sensor

INFOID:0000000012406250

The accelerator pedal position sensor is installed on the upper end of the accelerator pedal assembly. The sensor detects the accelerator position and sends a signal to the ECM.

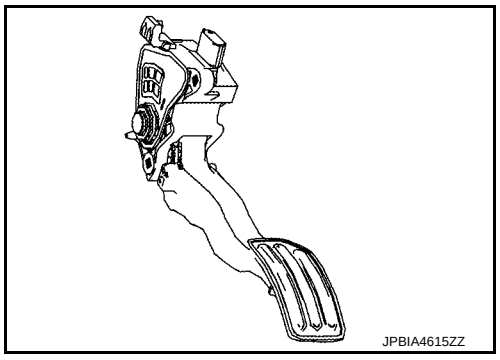
JPBIA4615ZZ

Accelerator pedal position sensor has two sensors. These sensors are a kind of potentiometers which transform the accelerator pedal position into output voltage, and emit the voltage signal to the ECM. In addition, these sensors detect the opening and closing speed of the accelerator pedal and feed the voltage signals to the ECM. The ECM judges the current opening angle of the accelerator pedal from these signals and controls the throttle control motor based on these signals.
Idle position of the accelerator pedal is determined by the ECM receiving the signal from the accelerator pedal position sensor. The ECM uses this signal for the engine operation such as fuel cut.

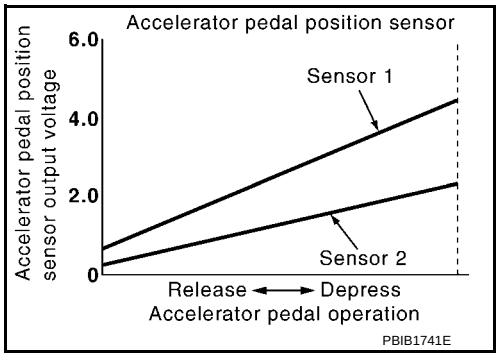

PBIB1741E


Electric Throttle Control Actuator

INFOID:0000000012406251

OUTLINE

cardiagn.com

Electric throttle control actuator consists of throttle body, throttle valve, throttle control motor and throttle position sensor.

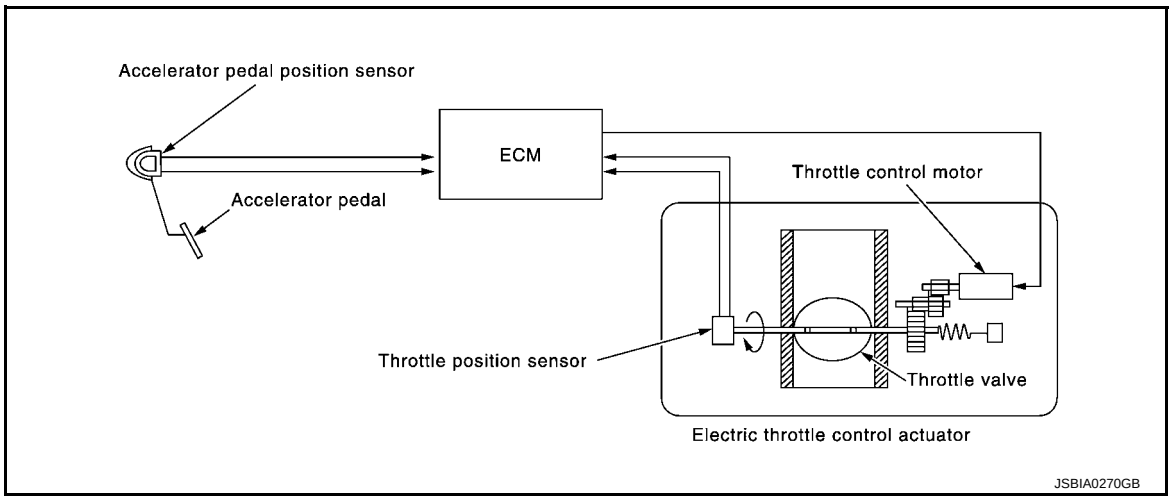


THROTTLE CONTROL MOTOR

The throttle control motor is operated by the ECM and it opens and closes the throttle valve.
The current opening angle of the throttle valve is detected by the throttle position sensor and it provides feedback to the ECM to control the throttle control motor to make the throttle valve opening angle properly in response to driving condition.

THROTTLE POSITION SENSOR


The throttle position sensor responds to the throttle valve movement.
The throttle position sensor has two sensors. These sensors are a kind of potentiometers which transform the throttle valve position into output voltage, and emit the voltage signal to the ECM. In addition, these sensors detect the opening and closing speed of the throttle valve and feed the voltage signals to the ECM. The ECM judges the current opening angle of the throttle valve from these signals and the ECM controls the throttle control motor to make the throttle valve opening angle properly in response to driving condition.

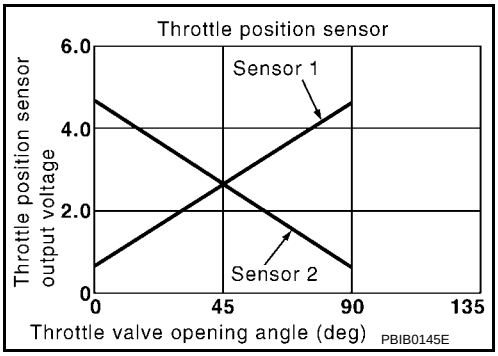

Ignition Coil (With Power Transistor)

INFOID:0000000012406252

The ignition signal from the ECM is sent to and amplified by the power transistor. The power transistor turns ON and OFF the ignition coil primary circuit. This ON/OFF operation induces the proper high voltage in the coil secondary circuit.

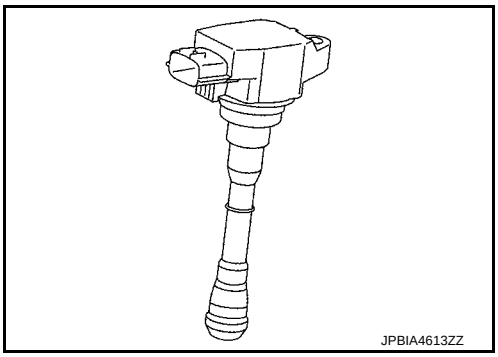


cardiagn.com

Fuel Injector

INFOID:0000000012406253

The fuel injector is a small, precise solenoid valve. When the ECM supplies a ground to the fuel injector circuit, the coil in the fuel injector is energized. The energized coil pulls the ball valve back and allows fuel to flow through the fuel injector into the intake manifold. The amount of fuel injected depends upon the injection pulse duration. Pulse duration is the length of time the fuel injector remains open. The ECM controls the injection pulse duration based on engine fuel needs.

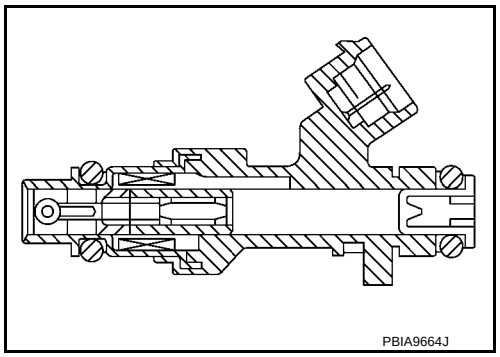


Mass Air Flow Sensor (With Intake Air Temperature Sensor)

INFOID:0000000012406254

MASS AIR FLOW SENSOR

The mass air flow sensor (1) is placed in the stream of intake air. It measures the intake flow rate by measuring a part of the entire intake flow. The mass air flow sensor controls the temperature of the hot wire to a certain amount. The heat generated by the hot wire is reduced as the intake air flows around it. The more air, the greater the heat loss.
Therefore, the electric current supplied to hot wire is changed to maintain the temperature of the hot wire as air flow increases. The ECM detects the air flow by means of this current change.

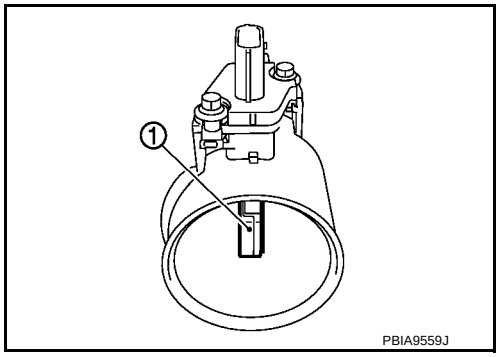


INTAKE AIR TEMPERATURE SENSOR

The intake air temperature sensor is built-into mass air flow sensor. The sensor detects intake air temperature and transmits a signal to the ECM.
The temperature sensing unit uses a thermistor which is sensitive to the change in temperature. Electrical resistance of the thermistor decreases in response to the temperature rise.

<Reference data>

Intake air temperature [°C (°F)]	Voltage* (V)	Resistance (kΩ)
25 (77)	3.3	1.800 - 2.200
80 (176)	1.2	0.283 - 0.359

*: These data are reference values and are measured between ECM terminals.

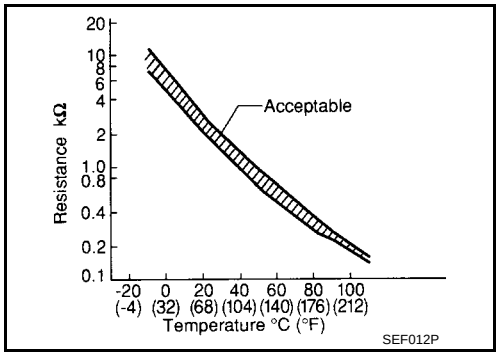



cardiagn.com

Camshaft Position Sensor (PHASE)

INFOID:0000000012406255

The camshaft position sensor (PHASE) senses the retraction of intake camshaft to identify a particular cylinder. The camshaft position sensor (PHASE) senses the piston position.
When the crankshaft position sensor (POS) system becomes inoperative, the camshaft position sensor (PHASE) provides various controls of engine parts instead, utilizing timing of cylinder identification signals.
The sensor consists of a permanent magnet and Hall IC.
When engine is running, the high and low parts of the teeth cause the gap with the sensor to change.
The changing gap causes the magnetic field near the sensor to change.
Due to the changing magnetic field, the voltage from the sensor changes.
ECM receives the signals as shown in the figure.

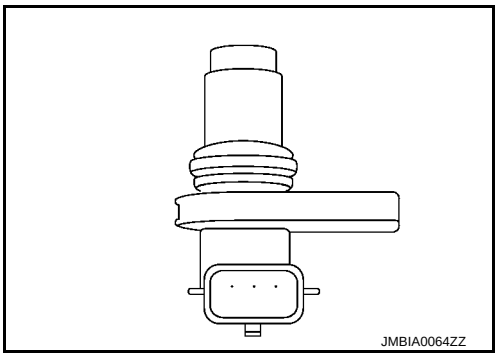

JMBIA0064ZZ

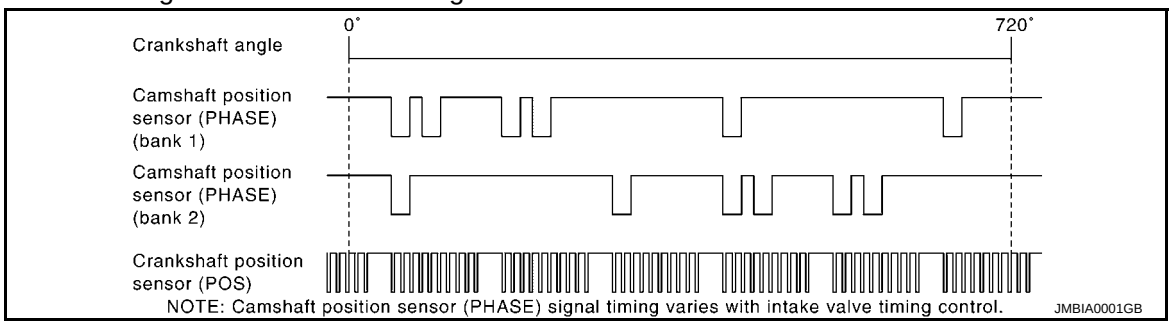


Crankshaft Position Sensor (POS)

INFOID:0000000012406256

The crankshaft position sensor (POS) is located on the oil pan facing the gear teeth (cogs) of the signal plate. It detects the fluctuation of the engine revolution.
The sensor consists of a permanent magnet and Hall IC.
When the engine is running, the high and low parts of the teeth cause the gap with the sensor to change.
The changing gap causes the magnetic field near the sensor to change.
Due to the changing magnetic field, the voltage from the sensor changes.
The ECM receives the voltage signal and detects the fluctuation of the engine revolution.
ECM receives the signals as shown in the figure.

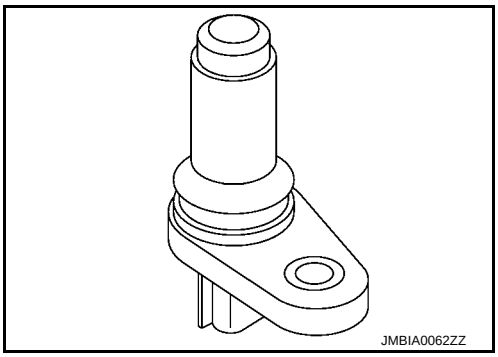
JMBIA0062ZZ

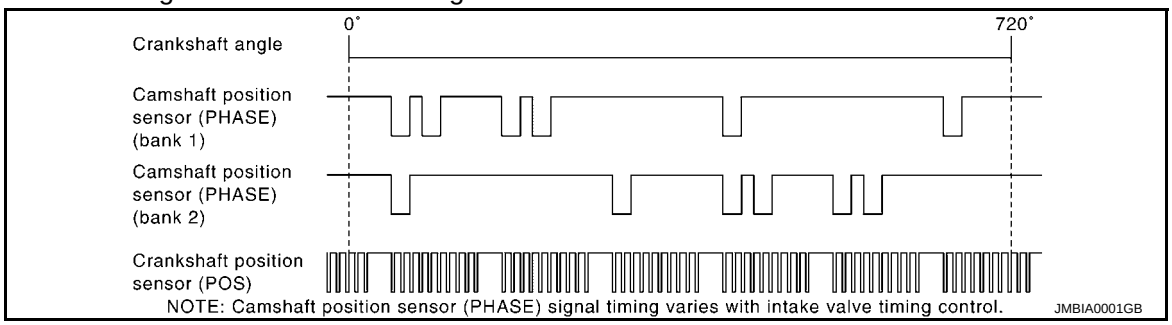


cardiagn.com

Intake Valve Timing Control Solenoid Valve

INFOID:0000000012406257


Intake valve timing control solenoid valve is activated by ON/OFF pulse duty (ratio) signals from the ECM.
The intake valve timing control solenoid valve changes the oil amount and direction of flow through intake valve timing control unit or stops oil flow.
The longer pulse width advances valve angle.
The shorter pulse width retards valve angle.
When ON and OFF pulse widths become equal, the solenoid valve stops oil pressure flow to fix the intake valve angle at the control position.

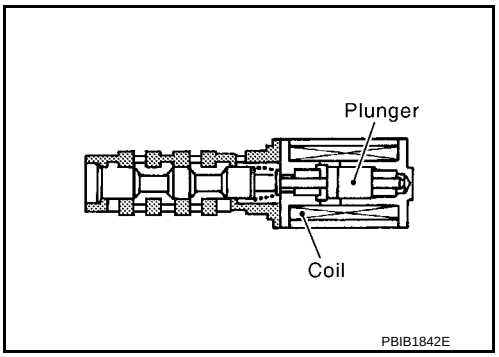

Intake Valve Timing Intermediate Lock Control Solenoid Valve

INFOID:0000000012406258


Intake valve timing intermediate lock control solenoid valve is activated by ON/OFF signals from the ECM.
The intake valve timing intermediate lock control solenoid valve opens/closes the path of oil pressure acting on the lock pin in the camshaft sprocket (INT).
- When the solenoid valve becomes ON, oil pressure to the lock pin is drained to perform intermediate lock.
- When the solenoid valve becomes OFF, oil pressure is acted on the lock pin to release the intermediate lock.

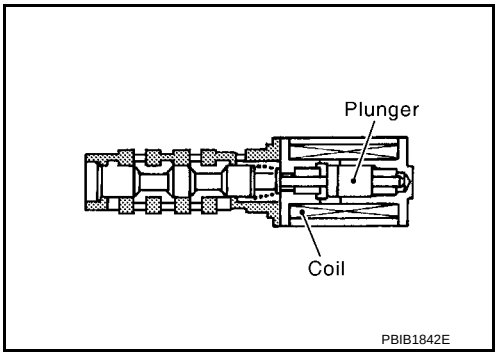

Exhaust Valve Timing Control Position Sensor

INFOID:0000000012406259


Exhaust valve timing control position sensor detects the protrusion of the signal plate installed to the exhaust camshaft front end.
This sensor signal is used for sensing a position of the exhaust camshaft.
The sensor consists of a permanent magnet and Hall IC.
When engine is running, the high and low parts of the teeth cause the gap with the sensor to change.
The changing gap causes the magnetic field near the sensor to change.
Due to the changing magnetic field, the voltage from the sensor changes.

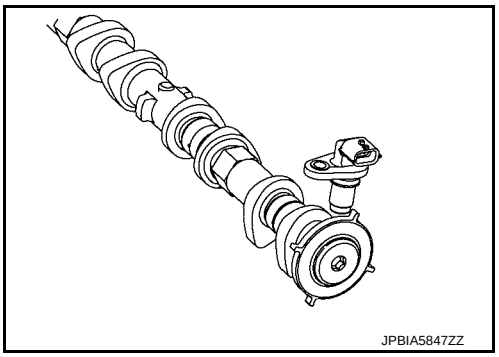

Exhaust Valve Timing Control Solenoid Valve

INFOID:0000000012406260

Exhaust valve timing control solenoid valve is activated by ON/OFF pulse duty (ratio) signals from the ECM.
The exhaust valve timing control solenoid valve changes the oil amount and direction of flow through exhaust valve timing control unit or stops oil flow.
The longer pulse width retards valve angle.
The shorter pulse width advances valve angle.
When ON and OFF pulse widths become equal, the solenoid valve stops oil pressure flow to fix the exhaust valve angle at the control position.

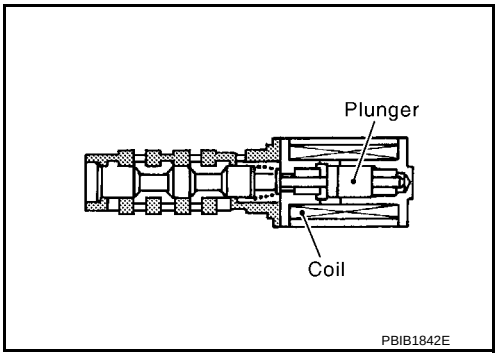


cardiagn.com

Engine Coolant Temperature Sensor

INFOID:0000000012406261


The engine coolant temperature sensor is used to detect the engine coolant temperature. The sensor modifies a voltage signal from the ECM. The modified signal returns to the ECM as the engine coolant temperature input. The sensor uses a thermistor which is sensitive to the change in temperature. The electrical resistance of the thermistor decreases as temperature increases.

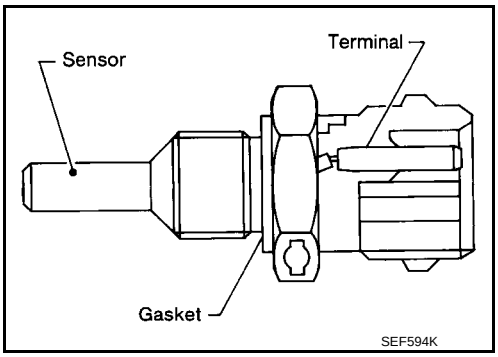

<Reference data>

Engine coolant temperature [°C (°F)]	Voltage* (V)	Resistance (kΩ)
–10 (14)	4.4	7.0 - 11.4
20 (68)	3.5	2.1 - 2.9
50 (122)	2.2	0.68 - 1.00
90 (194)	0.9	0.236 - 0.260


*: These data are reference values and are measured between ECM terminals.

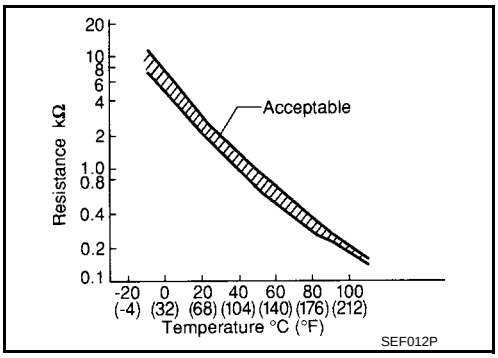

Engine Oil Pressure Sensor

INFOID:0000000012406262


The engine oil pressure (EOP) sensor is detects engine oil pressure and transmits a voltage signal to the ECM.

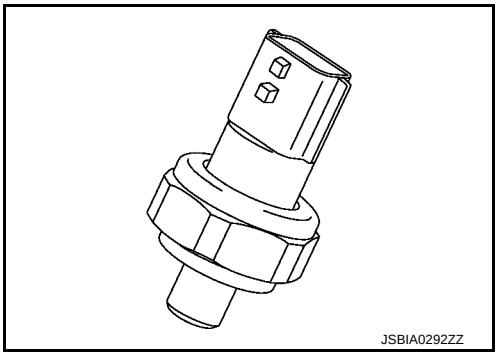

Engine Oil Temperature Sensor

INFOID:0000000012406263

The engine oil temperature sensor is used to detect the engine oil temperature. The sensor modifies a voltage signal from the ECM. The modified signal returns to the ECM as the engine oil temperature input. The sensor uses a thermistor which is sensitive to the change in temperature. The electrical resistance of the thermistor decreases as temperature increases.

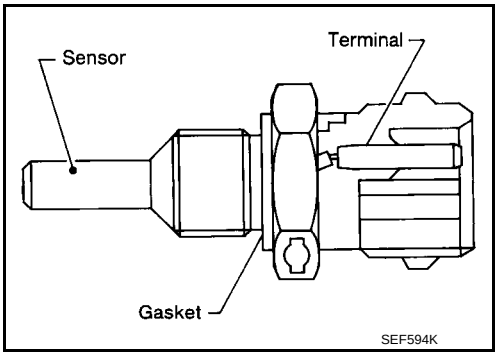


cardiagn.com

<Reference data>

Engine oil temperature [°C (°F)]	Voltage* (V)	Resistance (kΩ)
–10 (14)	4.4	7.0 - 11.4
20 (68)	3.5	2.37 - 2.63
50 (122)	2.2	0.68 - 1.00
90 (194)	0.9	0.236 - 0.260
110 (230)	0.6	0.143 - 0.153


*: These data are reference values and are measured between ECM terminals.

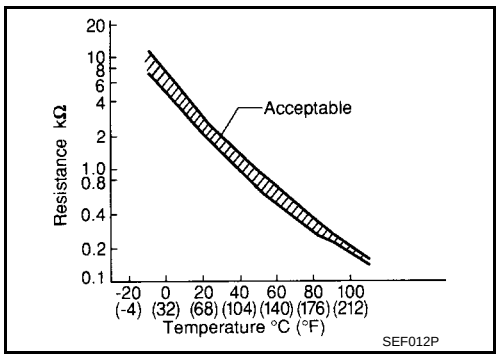

Knock Sensor

INFOID:0000000012406264

The knock sensor is attached to the cylinder block. It senses engine knocking using a piezoelectric element. A knocking vibration from the cylinder block is sensed as vibrational pressure. This pressure is converted into a voltage signal and sent to the ECM.

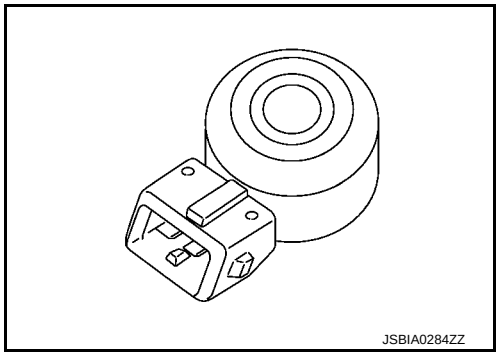

VIAS Control Solenoid Valve 1 and 2

INFOID:0000000012406265

The VIAS control solenoid valve cuts the intake manifold vacuum signal for power valve control. It responds to ON/OFF signals from the ECM. When the solenoid is OFF, the vacuum signal from the intake manifold is cut. When the ECM sends an ON signal the coil pulls the plunger downward and sends the vacuum signal to the power valve actuator.

Power Valve Actuator 1 and 2

INFOID:0000000012406266

The power valves are used to control the suction passage of the variable induction air control system. They are set in the fully closed or fully opened position by the power valve actuators operated by the vacuum stored in the vacuum tank. The vacuum to power valve actuators is controlled by the VIAS control solenoid valves.

Electronic Controlled Engine Mount

INFOID:0000000012406267


In the idle range, ECM turns OFF the electronically-controlled engine mount control solenoid valve and applies manifold pressure to the electronically-controlled engine mount. This decreases damping force of the electronically-controlled engine mount and absorbs vibrations traveling from the engine to the body for improving the quietness.
In the driving range, ECM turns ON the electronically-controlled engine mount control solenoid valve and cuts manifold pressure applied on the electronically-controlled engine mount. This increases damping force of the electronically-controlled engine mount and reduces vibrations generated during driving.

cardiagn.com

Refrigerant Pressure Sensor

INFOID:0000000012406268

The refrigerant pressure sensor is installed at the condenser of the air conditioner system. The sensor uses an electrostatic volume pressure transducer to convert refrigerant pressure to voltage. The voltage signal is sent to ECM, and ECM controls cooling fan system.

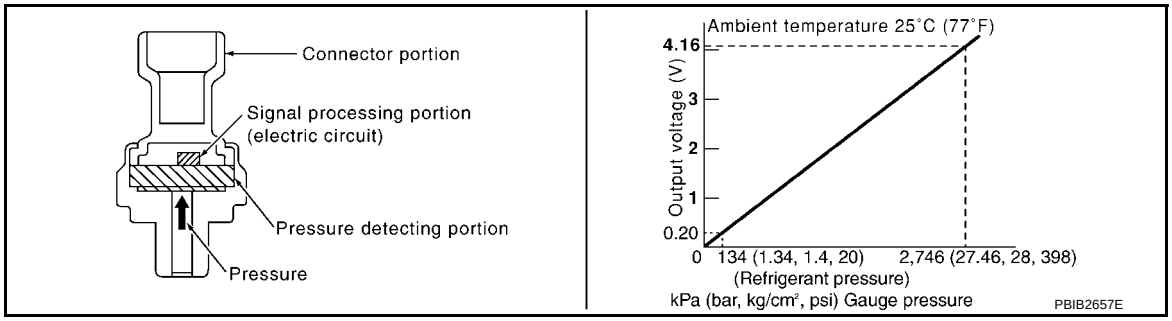


Battery Current Sensor (With Battery Temperature Sensor)

INFOID:0000000012406269

BATTERY CURRENT SENSOR

The battery current sensor is installed to the battery cable at the negative terminal. The sensor measures the charging/discharging current of the battery.

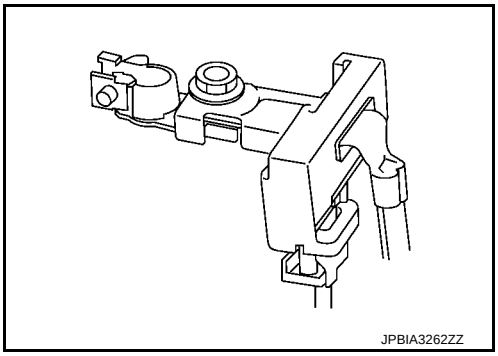


BATTERY TEMPERATURE SENSOR

Battery temperature sensor is integrated in battery current sensor.
The sensor measures temperature around the battery.
The electrical resistance of the thermistor decreases as temperature increases.

<Reference data>

Temperature [°C (°F)]	Voltage* (V)	Resistance (kΩ)
25 (77)	3.333	1.9 - 2.1
90 (194)	0.969	0.222 - 0.258

*: These data are reference values and are measured between battery temperature sensor signal terminal and sensor ground.

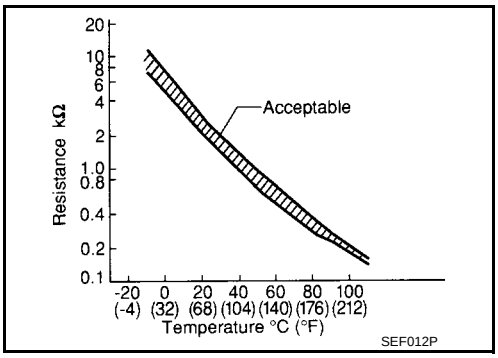

Cooling Fan

INFOID:0000000012406270

DESCRIPTION

The ECM controls the cooling fan corresponding to the vehicle speed, engine coolant temperature, refrigerant pressure, and air conditioner ON signal. The control system has 4-step control [HIGH/MIDDLE/LOW/OFF].
Refer to EC-47, "COOLING FAN CONTROL : System Description" for cooling fan operation.

COOLING FAN MOTOR RELAY

Power supply for the cooling fan motor is provided via cooling fan motor relay.

EVAP Canister

INFOID:0000000012406271


The fuel vapor in the sealed fuel tank is led into the EVAP canister which contains activated carbon and the vapor is stored there when the engine is not operating or when refueling to the fuel tank.
For details, refer to EC-51, "EVAPORATIVE EMISSION SYSTEM : System Description".

cardiagn.com

EVAP Canister Purge Volume Control Solenoid Valve

INFOID:0000000012406272


The EVAP canister purge volume control solenoid valve is used to control the flow rate of fuel vapor from the EVAP canister. The EVAP canister purge volume control solenoid valve is moved by ON/OFF pulses from the ECM. The longer the ON pulse, the greater the amount of fuel vapor that will flow through the valve.

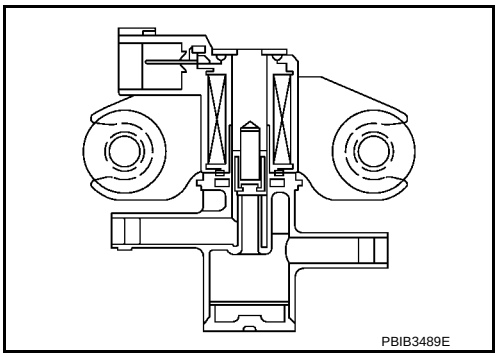

EVAP Canister Vent Control Valve

INFOID:0000000012406273


The EVAP canister vent control valve is located on the EVAP canister and is used to seal the canister vent.
This solenoid valve responds to signals from the ECM. When the ECM sends an ON signal, the coil in the solenoid valve is energized. A plunger will then move to seal the canister vent. The ability to seal the vent is necessary for the on board diagnosis of other evaporative emission control system components.
This solenoid valve is used only for diagnosis, and usually remains opened.
When the vent is closed, under normal purge conditions, the evaporative emission control system is depressurized and allows “EVAP Control System” diagnosis.

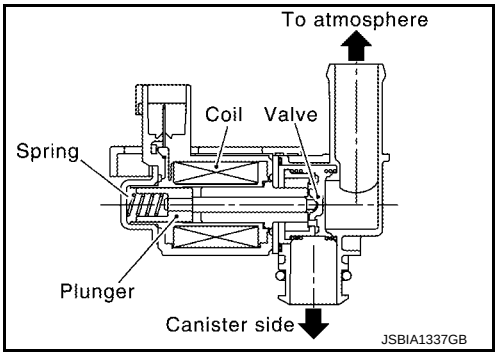

EVAP Control System Pressure Sensor

INFOID:0000000012406274

The EVAP control system pressure sensor detects pressure in the purge line. The sensor output voltage to the ECM increases as pressure increases.

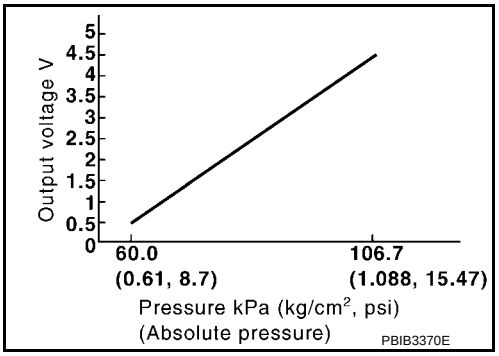


Air Fuel Ratio (A/F) Sensor 1

INFOID:0000000012406275


DESCRIPTION

The air fuel ratio (A/F) sensor 1 is a planar one-cell limit current sensor. The sensor element of the A/F sensor 1 is composed an electrode layer, which transports ions. It has a heater in the element.
The sensor is capable of precise measurement $\lambda = 1$, but also in the lean and rich range. Together with its control electronics, the sensor outputs a clear, continuous signal throughout a wide λ range.
The exhaust gas components diffuse through the diffusion layer at the sensor cell. An electrode layer is applied voltage, and this current relative oxygen density in lean. Also this current relative hydrocarbon density in rich.

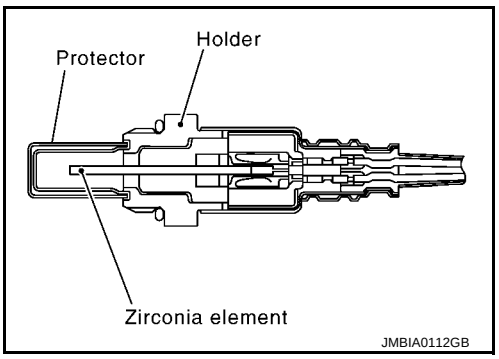

cardiagn.com

Therefore, the A/F sensor 1 is able to indicate air fuel ratio by this electrode layer of current. In addition, a heater is integrated in the sensor to ensure the required operating temperature of approximately 800°C (1,472°F).

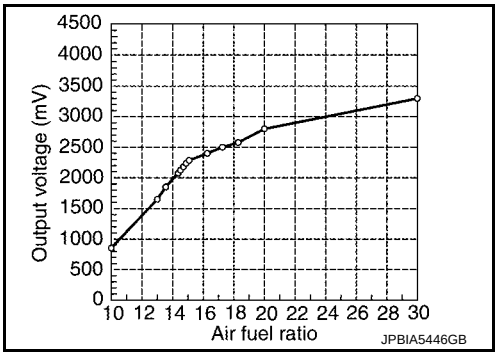

A/F SENSOR 1 HEATER


A/F sensor 1 heater is integrated in the sensor.
The ECM performs ON/OFF duty control of the A/F sensor 1 heater corresponding to the engine operating condition to keep the temperature of A/F sensor 1 element within the specified range.

Heated Oxygen Sensor 2

INFOID:0000000012406276

DESCRIPTION

The heated oxygen sensor 2, after three way catalyst (manifold), monitors the oxygen level in the exhaust gas.
Even if switching characteristics of the air fuel ratio (A/F) sensor 1 are shifted, the air fuel ratio is controlled to stoichiometric, by the signal from the heated oxygen sensor 2.
This sensor is made of ceramic zirconia. The zirconia generates voltage from approximately 1 V in richer conditions to 0 V in leaner conditions.
Under normal conditions the heated oxygen sensor 2 is not used for engine control operation.

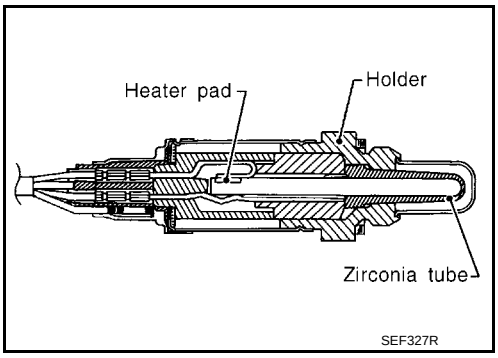

HEATED OXYGEN SENSOR 2 HEATER

Heated oxygen sensor 2 heater is integrated in the sensor.
The ECM performs ON/OFF control of the heated oxygen sensor 2 heater corresponding to the engine speed, amount of intake air and engine coolant temperature.


Engine speed	Heated oxygen sensor 2 heater
Above 3,600 rpm	OFF
Below 3,600 rpm after the following conditions are met. • Engine: After warming up • Keeping the engine speed between 3,500 and 4,000 rpm for 1 minute and at idle for 1 minute under no load	ON

Fuel Level Sensor Unit and Fuel Pump

INFOID:0000000012406277

FUEL PUMP

The ECM activates the fuel pump for 1 second after the ignition switch is turned ON to improve engine start ability. If the ECM receives a engine speed signal from the camshaft position sensor (PHASE), it knows that the engine is rotating, and causes the pump to operate. If the engine speed signal is not received when the ignition switch is ON, the engine stalls. The ECM stops pump operation and prevents battery discharging, thereby improving safety. The ECM does not directly drive the fuel pump. It controls the ON/OFF fuel pump relay, which in turn controls the fuel pump.

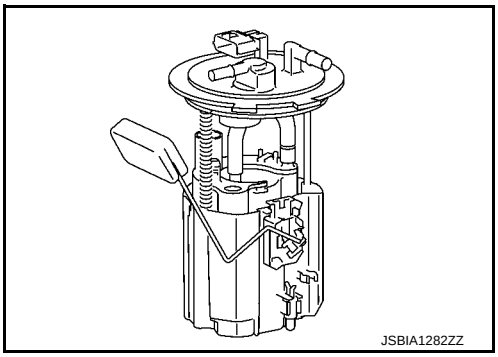

cardiagn.com

Condition	Fuel pump operation
Ignition switch is turned to ON.	Operates for 1 second.
Engine running and cranking	Operates.
When engine is stopped	Stops in 1.5 seconds.
Except as shown above	Stops.


FUEL LEVEL SENSOR

The fuel level sensor is mounted in the fuel level sensor unit.
The sensor detects a fuel level in the fuel tank and transmits a signal to the combination meter. The combination meter sends the fuel level sensor signal to the ECM via the CAN communication line.
It consists of two parts, one is mechanical float and the other is variable resistor. Fuel level sensor output voltage changes depending on the movement of the fuel mechanical float.

Fuel Tank Temperature Sensor

INFOID:0000000012406278

The fuel tank temperature sensor is used to detect the fuel temperature inside the fuel tank. The sensor modifies a voltage signal from the ECM. The modified signal returns to the ECM as the fuel temperature input. The sensor uses a thermistor which is sensitive to the change in temperature. The electrical resistance of the thermistor decreases as temperature increases.
<Reference data>

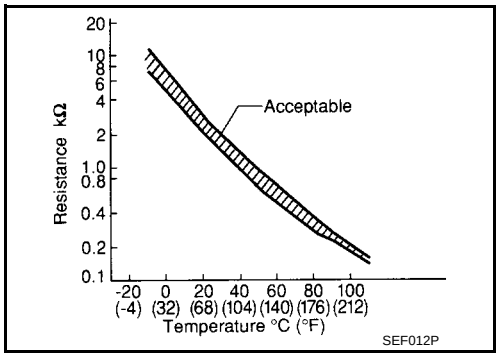

Fluid temperature [°C (°F)]	Voltage* (V)	Resistance (kΩ)
20 (68)	3.5	2.3 - 2.7
50 (122)	2.2	0.79 - 0.90

*: These data are reference values and are measured between ECM terminals 95 (Fuel tank temperature sensor) and ground.

ASCD Steering Switch

INFOID:0000000012406279

ASCD steering switch has variant values of electrical resistance for each button. ECM reads voltage variation of switch, and determines which button is operated.
Refer to EC-46, "AUTOMATIC SPEED CONTROL DEVICE (ASCD) : System Description" for the ASCD function.

Stop Lamp Switch & Brake Pedal Position Switch

INFOID:0000000012406280

Stop lamp switch and brake pedal position switch are installed to brake pedal bracket.
ECM detects the state of the brake pedal by those two types of input (ON/OFF signal).


Brake pedal	Brake pedal position switch	Stop lamp switch
Released	ON	OFF
Depressed	OFF	ON

cardiagn.com

STRUCTURE AND OPERATION

Positive Crankcase Ventilation (PCV)

INFOID:0000000012406281

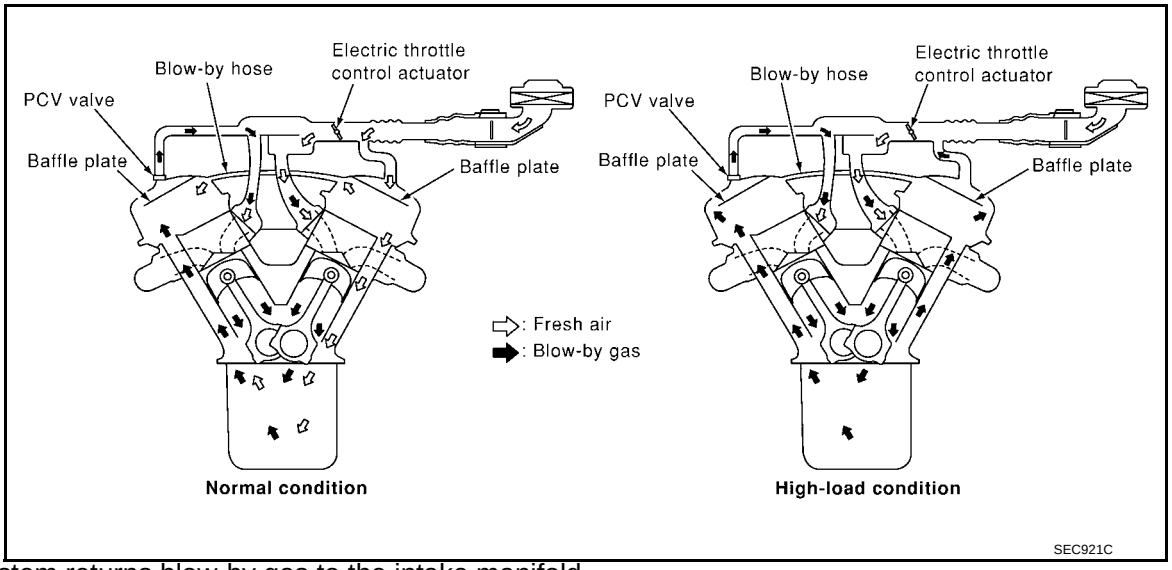

This system returns blow-by gas to the intake manifold.

The positive crankcase ventilation (PCV) valve is provided to conduct crankcase blow-by gas to the intake manifold.


During partial throttle operation of the engine, the intake manifold sucks the blow-by gas through the PCV valve.

Normally, the capacity of the valve is sufficient to handle any blow-by and a small amount of ventilating air.

The ventilating air is drawn from the air inlet tubes into the crankcase. In this process the air passes through the hose connecting air inlet tubes to rocker cover.

Under full-throttle condition, the manifold vacuum is insufficient to draw the blow-by flow through the valve. The flow goes through the hose connection in the reverse direction.


On vehicles with an excessively high blow-by, the valve does not meet the requirement. This is because some of the flow will go through the hose connection to the air inlet tubes under all conditions.

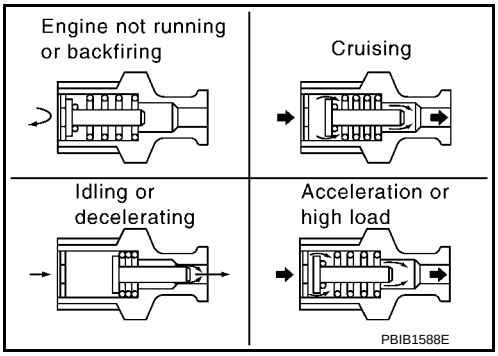

cardiagn.com

On Board Refueling Vapor Recovery (ORVR)

INFOID:0000000012406282

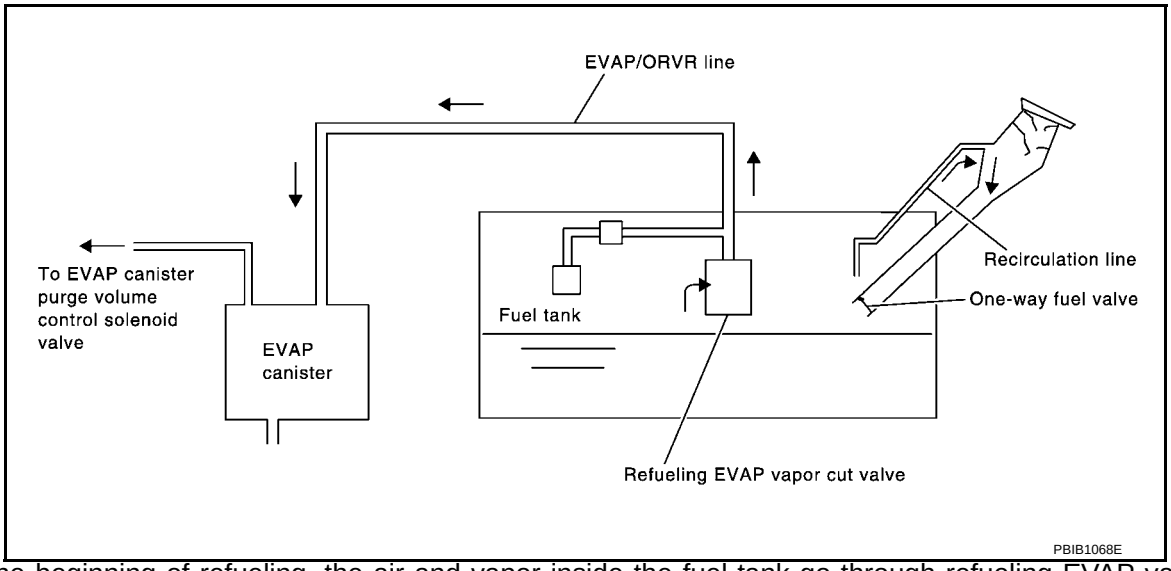

From the beginning of refueling, the air and vapor inside the fuel tank go through refueling EVAP vapor cut valve and EVAP/ORVR line to the EVAP canister. The vapor is absorbed by the EVAP canister and the air is released to the atmosphere.

When the refueling has reached the full level of the fuel tank, the refueling EVAP vapor cut valve is closed and refueling is stopped because of auto shut-off. The vapor which was absorbed by the EVAP canister is purged during driving.

WARNING:

When conducting inspections below, be sure to observe the following:

- **Put a "CAUTION: FLAMMABLE" sign in workshop.**
- **Never smoke while servicing fuel system. Keep open flames and sparks away from work area.**
- **Always to furnish the workshop with a CO_2 fire extinguisher.**

CAUTION:


- **Before removing fuel line parts, carry out the following procedures:**
- **Put drained fuel in an explosion-proof container and put lid on securely.**
- **Release fuel pressure from fuel line. Refer to EC-153, "Work Procedure".**
- **Disconnect battery ground cable.**
- **Always replace O-ring when the fuel gauge retainer is removed.**
- **Never kink or twist hose and tube when they are installed.**
- **Never tighten hose and clamps excessively to avoid damaging hoses.**
- **After installation, run engine and check for fuel leakage at connections.**
- **Never attempt to top off the fuel tank after the fuel pump nozzle shuts off automatically. Continued refueling may cause fuel overflow, resulting in fuel spray and possibly a fire.**

cardiagn.com

SYSTEM
ENGINE CONTROL SYSTEM
ENGINE CONTROL SYSTEM : System Description

INFOID:0000000012406283

SYSTEM DIAGRAM

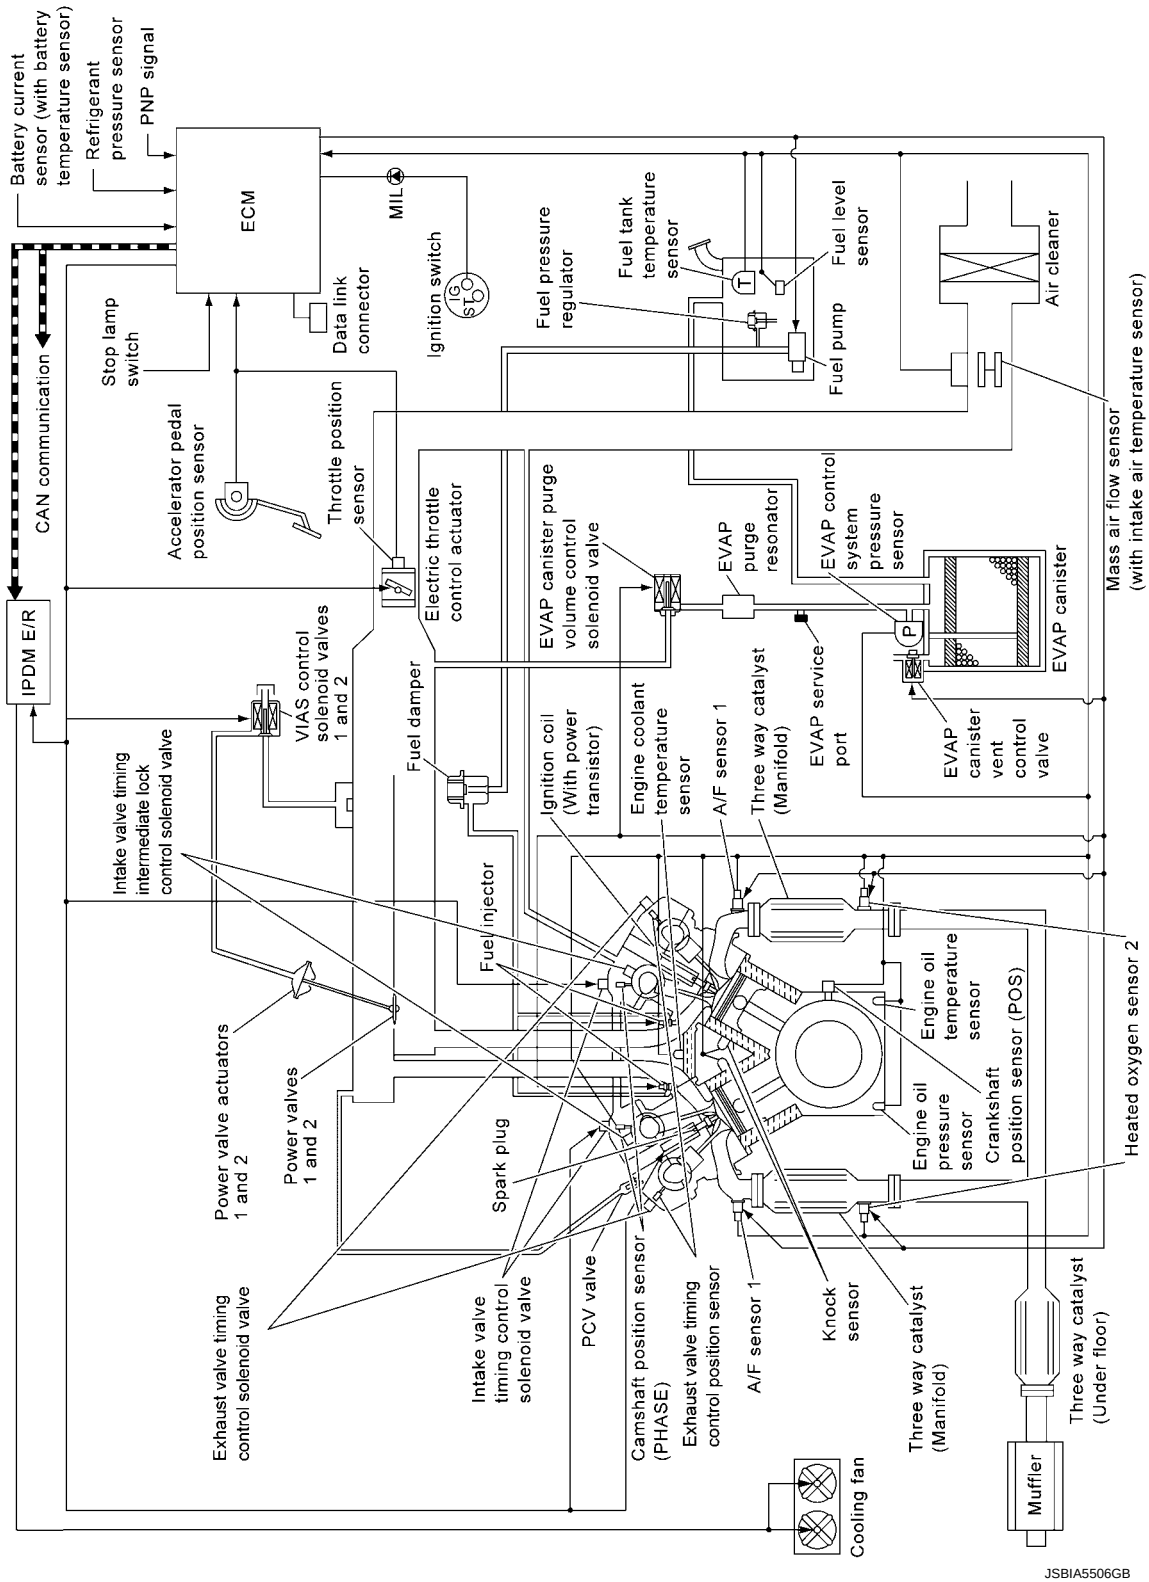

SYSTEM DESCRIPTION

cardiagn.com


ECM controls the engine by various functions.

Function	Reference
MULTIPORT FUEL INJECTION SYSTEM	EC-42, "MULTIPORT FUEL INJECTION SYSTEM : System Description"
ELECTRIC IGNITION SYSTEM	EC-44, "ELECTRIC IGNITION SYSTEM : System Description"
AIR CONDITIONING CUT CONTROL	EC-45, "AIR CONDITIONING CUT CONTROL : System Description"
AUTOMATIC SPEED CONTROL DEVICE (ASCD)	EC-46, "AUTOMATIC SPEED CONTROL DEVICE (ASCD) : System Description"
COOLING FAN CONTROL	EC-47, "COOLING FAN CONTROL : System Description"
ELECTRONIC CONTROLLED ENGINE MOUNT	EC-48, "ELECTRONIC CONTROLLED ENGINE MOUNT : System Description"
EVAPORATIVE EMISSION SYSTEM	EC-51, "EVAPORATIVE EMISSION SYSTEM : System Description"
INTAKE VALVE TIMING CONTROL	EC-51, "INTAKE VALVE TIMING CONTROL : System Description"
EXHAUST VALVE TIMING CONTROL	EC-54, "EXHAUST VALVE TIMING CONTROL : System Description"
FUEL FILLER CAP WARNING SYSTEM	EC-55, "FUEL FILLER CAP WARNING SYSTEM : System Description"
CAN COMMUNICATION	EC-57, "CAN COMMUNICATION : System Description"


cardiagn.com

ENGINE CONTROL SYSTEM : Circuit Diagram


INFOID:0000000012406284

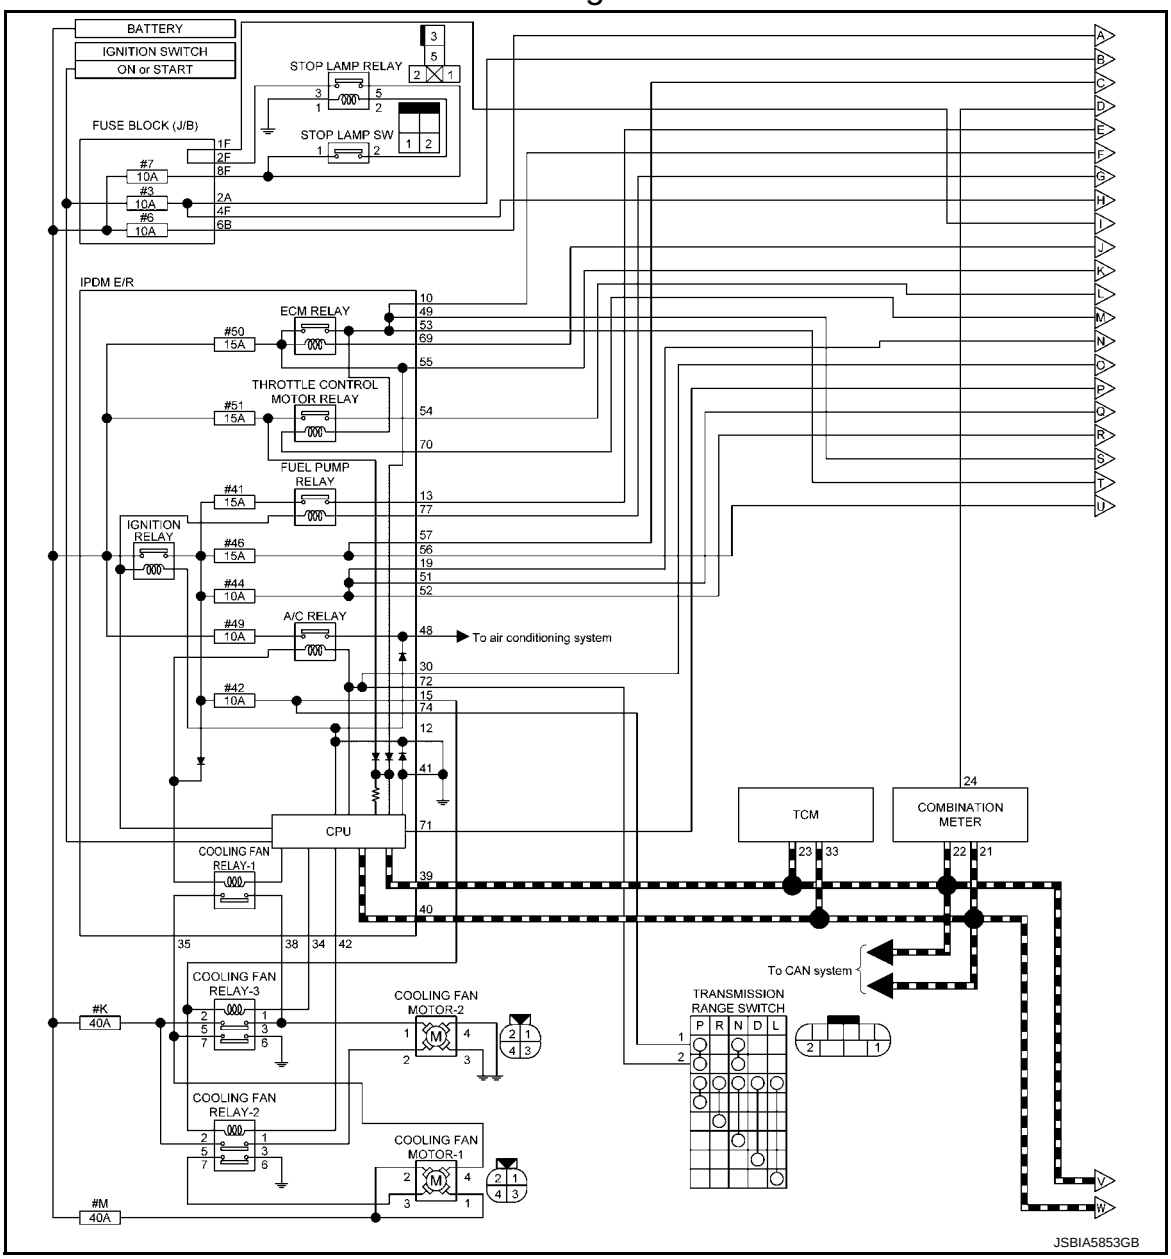


cardiagn.com

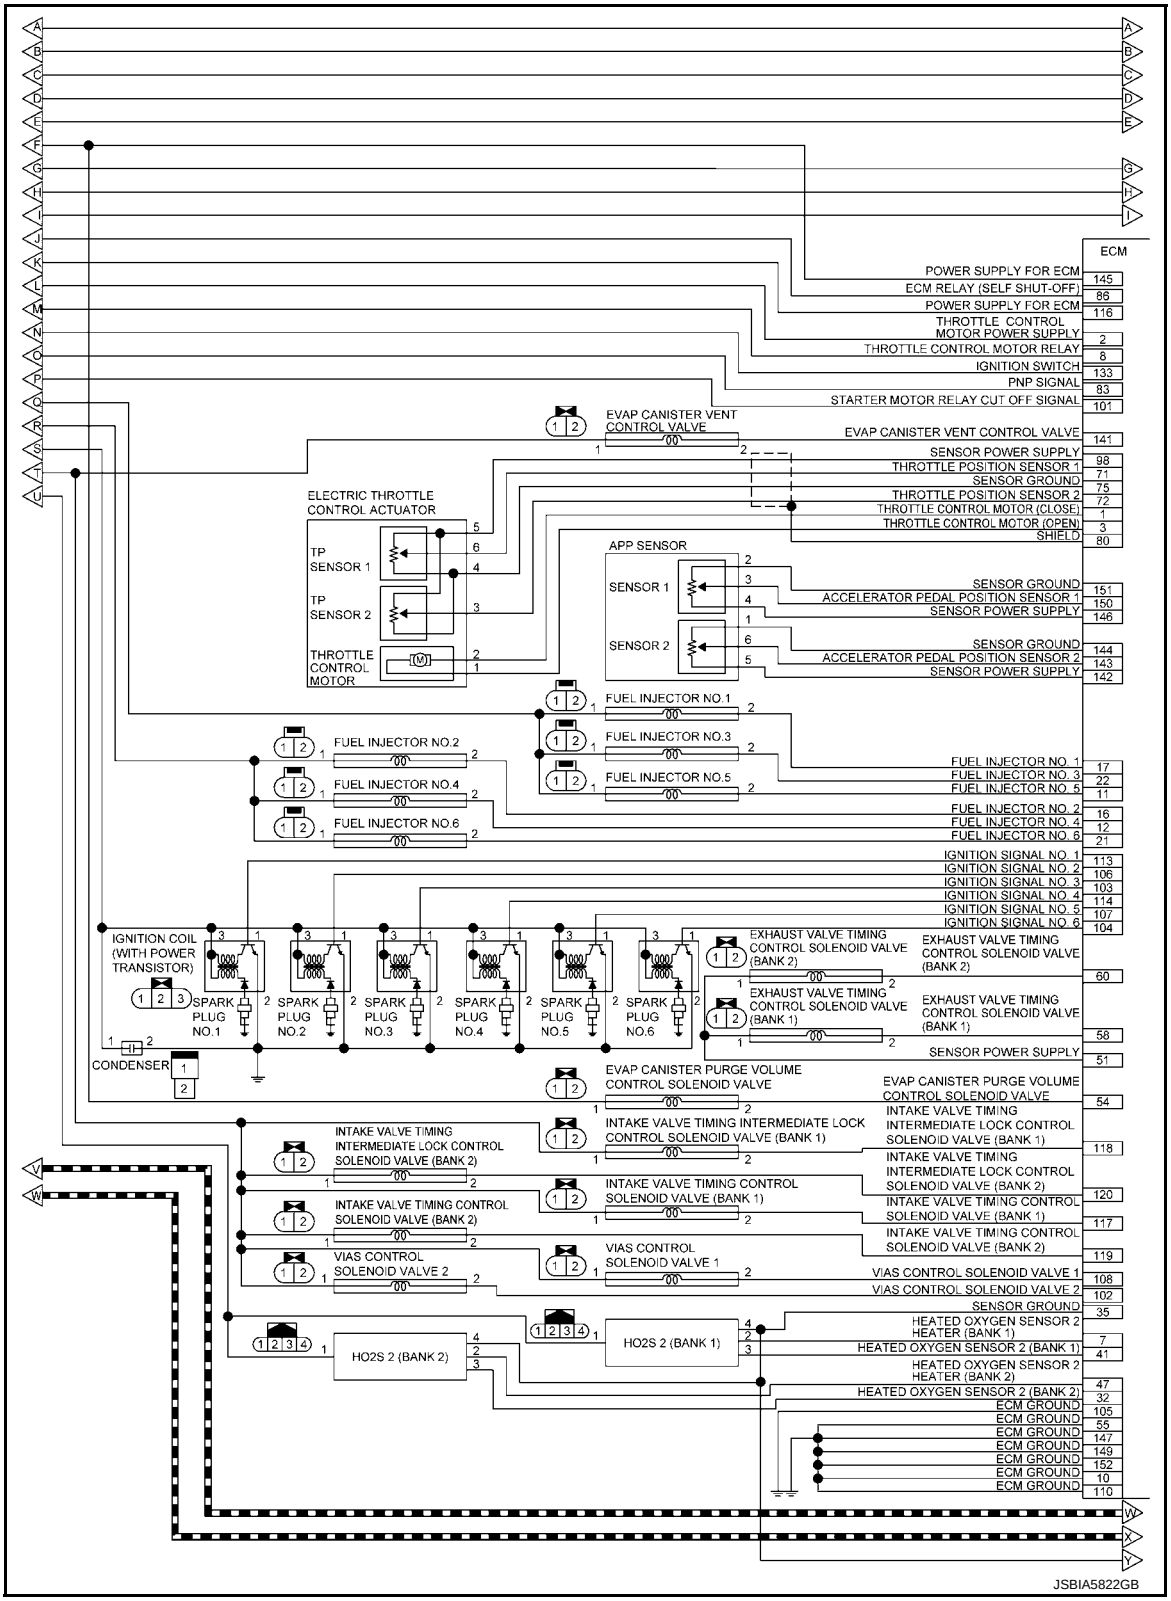

cardiagn.com

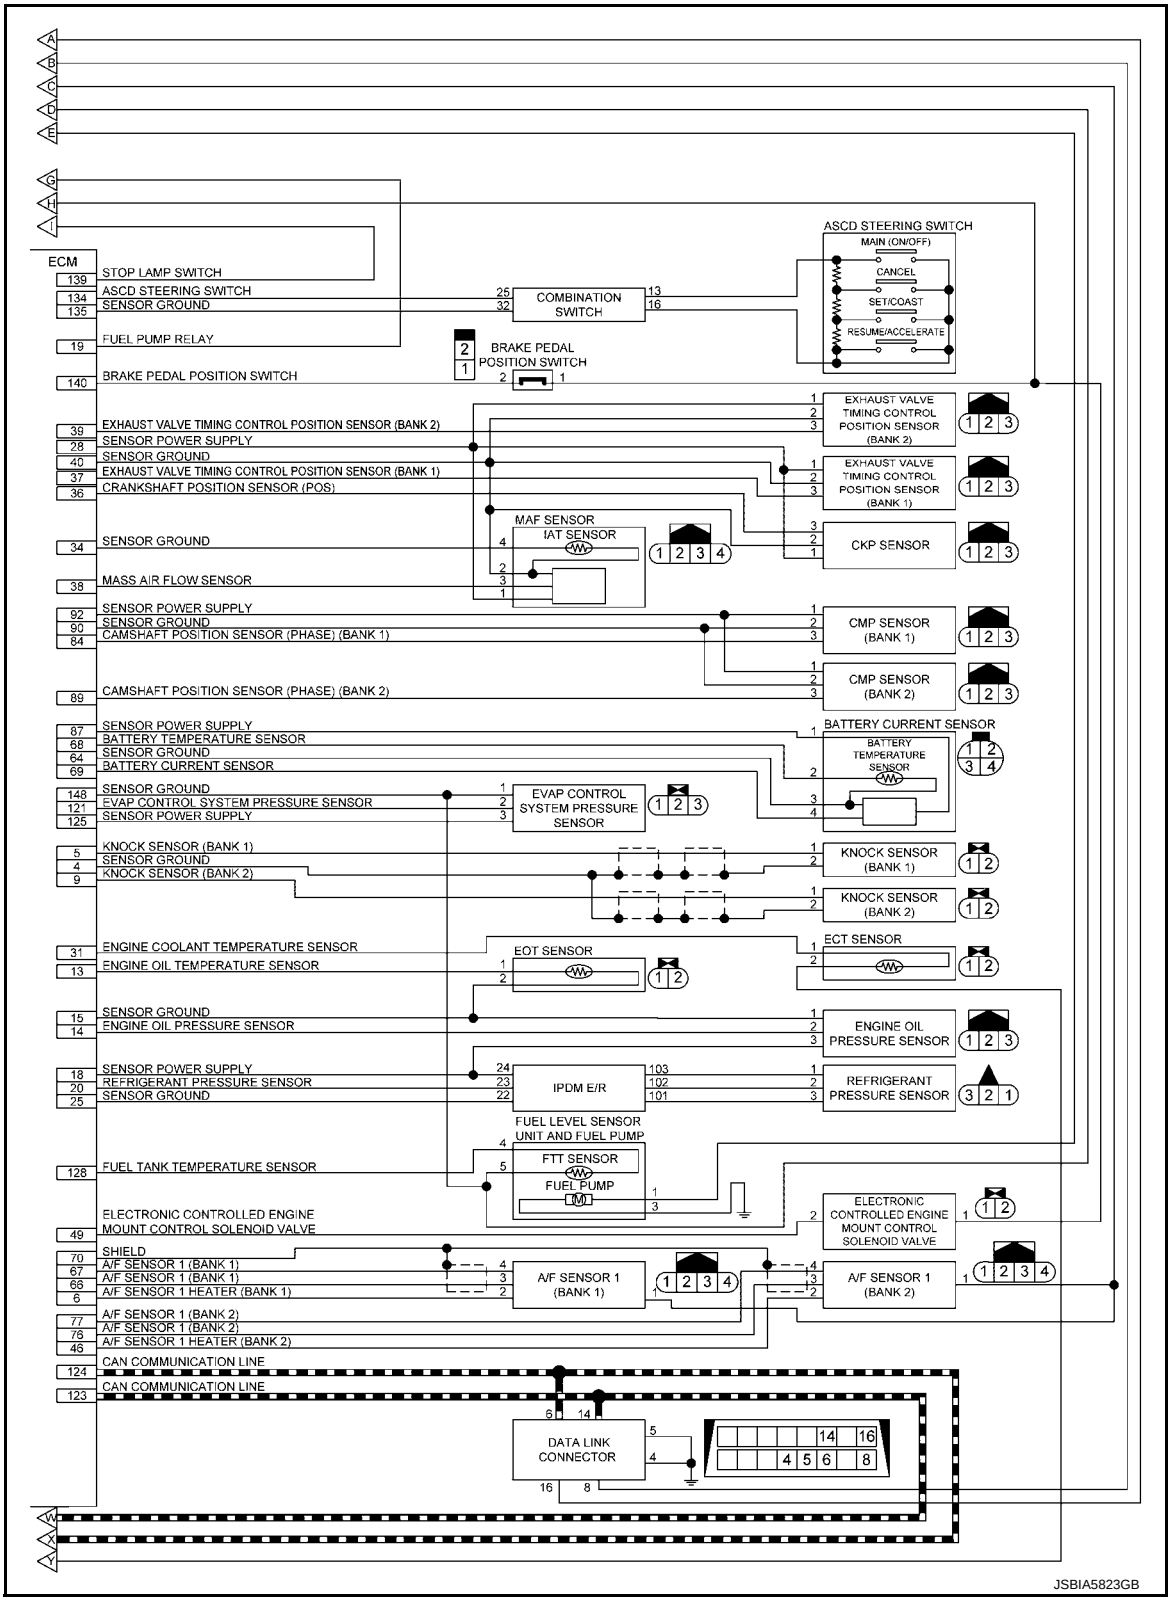

cardiagn.com

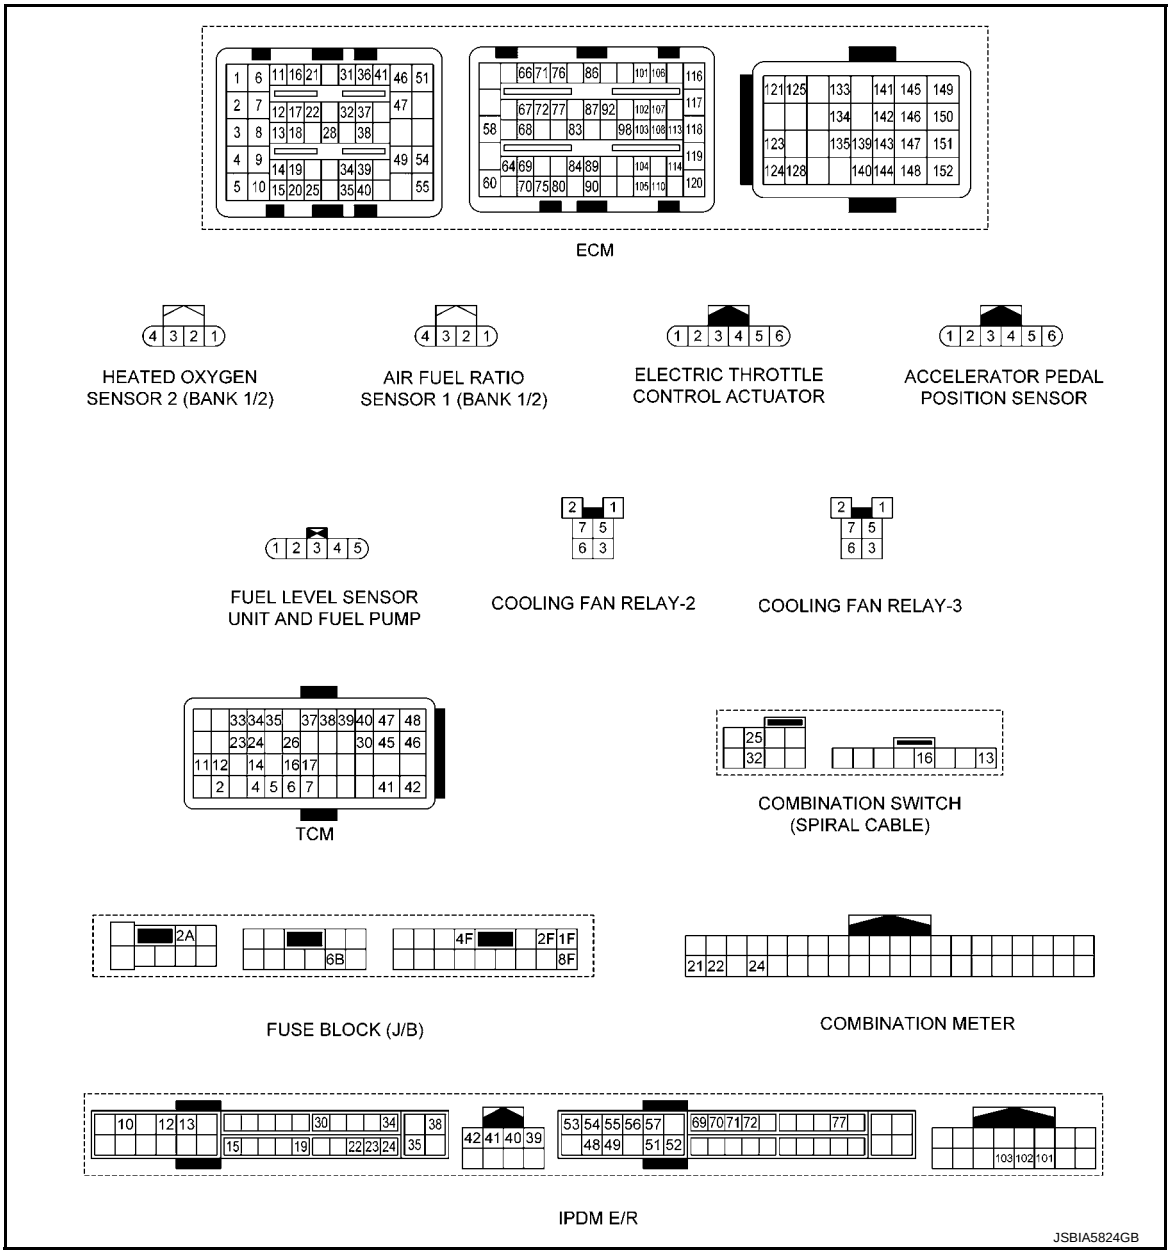

ENGINE CONTROL SYSTEM : Fail-safe

INFOID:0000000012406285

DTC No.	Detected items	Engine operating condition in fail-safe mode
P0011 P0021	Intake valve timing control	The signal is not energized to the intake valve timing control solenoid valve and the valve control does not function.
P0014 P0024	Exhaust valve timing control	The signal is not energized to the exhaust valve timing control solenoid valve and the valve control does not function.
P0101 P0102 P0103	Mass air flow sensor circuit	Engine speed will not rise more than 2,400 rpm due to the fuel cut.

cardiagn.com

<table>
<tr><th>DTC No.</th><th>Detected items</th><th colspan="2">Engine operating condition in fail-safe mode</th></tr>
<tr><td rowspan="5">P0117
P0118</td><td rowspan="5">Engine coolant temperature sensor circuit</td><td colspan="2">Engine coolant temperature will be determined by ECM based on the following condition.
CONSULT displays the engine coolant temperature decided by ECM.</td></tr>
<tr><td>Condition</td><td>Engine coolant temperature decided
(CONSULT display)</td></tr>
<tr><td>Just as ignition switch is turned ON or START</td><td>40°C (104°F)</td></tr>
<tr><td>Approx 4 minutes or more after engine starting</td><td>80°C (176°F)</td></tr>
<tr><td>Except as shown above</td><td>40 - 80°C (104 - 176°F)
(Depends on the time)</td></tr>
<tr><td></td><td></td><td colspan="2">When the fail-safe system for engine coolant temperature sensor is activated, the cooling fan operates while engine is running.</td></tr>
<tr><td>P0122
P0123
P0222
P0223
P2135</td><td>Throttle position sensor</td><td colspan="2">The ECM controls the electric throttle control actuator in regulating the throttle opening in order for the idle position to be within +10 degrees.
The ECM regulates the opening speed of the throttle valve to be slower than the normal condition.
Therefore, the acceleration will be poor.</td></tr>
<tr><td>P0196
P0197
P0198</td><td>Engine oil temperature sensor</td><td colspan="2">Intake valve timing control does not function.</td></tr>
<tr><td>P0500</td><td>Vehicle speed sensor</td><td colspan="2">The cooling fan operates (Highest) while engine is running.</td></tr>
<tr><td>P052A
P052B
P052C
P052D</td><td>Intake valve timing intermediate lock control</td><td colspan="2">—</td></tr>
<tr><td>P0603
P0607</td><td>ECM</td><td colspan="2">Engine torque may be limited.</td></tr>
<tr><td>P0604</td><td>ECM</td><td colspan="2">• ECM stops the electric throttle control actuator control, throttle valve is maintained at a fixed opening (approx. 5 degrees) by the return spring.
• The position of the following components is fixed.
- Intake valve timing control solenoid valve
- Intake valve timing intermediate lock control solenoid valve
- Exhaust valve timing control solenoid valve
• ASCD operation may be deactivated.</td></tr>
<tr><td>P0605
P0606
P060B</td><td>ECM</td><td colspan="2">NOTE:
Fail-safe may not occur depending on malfunction type.
• ECM stops the electric throttle control actuator control, throttle valve is maintained at a fixed opening (approx. 5 degrees) by the return spring.
• The position of the following components is fixed.
- Intake valve timing control solenoid valve
- Intake valve timing intermediate lock control solenoid valve
- Exhaust valve timing control solenoid valve
• ASCD operation may be deactivated.</td></tr>
<tr><td>P060A</td><td>ECM</td><td colspan="2">NOTE:
Fail-safe may not occur depending on malfunction type.
• ECM stops the electric throttle control actuator control, throttle valve is maintained at a fixed opening (approx. 5 degrees) by the return spring.
• The position of the following components is fixed.
- Intake valve timing control solenoid valve
- Intake valve timing intermediate lock control solenoid valve
- Exhaust valve timing control solenoid valve
• Engine torque may be limited.
• ASCD operation may be deactivated.</td></tr>
</table>

cardiagn.com

<table>
<tr><th>DTC No.</th><th>Detected items</th><th>Engine operating condition in fail-safe mode</th></tr>
<tr><td>P0643</td><td>Sensor power supply</td><td>• ECM stops the electric throttle control actuator control, throttle valve is maintained at a fixed opening (approx. 5 degrees) by the return spring.
• The position of the following components is fixed.
- Intake valve timing control solenoid valve
- Intake valve timing intermediate lock control solenoid valve
- Exhaust valve timing control solenoid valve</td></tr>
<tr><td>P1805</td><td>Brake switch</td><td>ECM controls the electric throttle control actuator by regulating the throttle opening to a small range.
Therefore, acceleration will be poor.
<table><tr><th>Vehicle condition</th><th>Driving condition</th></tr><tr><td>When engine is idling</td><td>Normal</td></tr><tr><td>When accelerating</td><td>Poor acceleration</td></tr></table></td></tr>
<tr><td>P2100
P2103</td><td>Throttle control motor relay</td><td>ECM stops the electric throttle control actuator control, throttle valve is maintained at a fixed opening (approx. 5 degrees) by the return spring.</td></tr>
<tr><td>P2101</td><td>Electric throttle control function</td><td>ECM stops the electric throttle control actuator control, throttle valve is maintained at a fixed opening (approx. 5 degrees) by the return spring.</td></tr>
<tr><td>P2118</td><td>Throttle control motor</td><td>ECM stops the electric throttle control actuator control, throttle valve is maintained at a fixed opening (approx. 5 degrees) by the return spring.</td></tr>
<tr><td>P2119</td><td>Electric throttle control actuator</td><td>(When electric throttle control actuator does not function properly due to the return spring malfunction:)
ECM controls the electric throttle actuator by regulating the throttle opening around the idle position. The engine speed will not rise more than 2,000 rpm.</td></tr>
<tr><td></td><td></td><td>(When throttle valve opening angle in fail-safe mode is not in specified range:)
ECM controls the electric throttle control actuator by regulating the throttle opening to 20 degrees or less.</td></tr>
<tr><td></td><td></td><td>(When ECM detects the throttle valve is stuck open:)
While the vehicle is being driven, it slows down gradually because of fuel cut. After the vehicle stops, the engine stalls.
The engine can restart in the N or P position, and engine speed will not exceed 1,000 rpm or more.</td></tr>
<tr><td>P2122
P2123
P2127
P2128
P2138</td><td>Accelerator pedal position sensor</td><td>The ECM controls the electric throttle control actuator in regulating the throttle opening in order for the idle position to be within +10 degrees.
The ECM regulates the opening speed of the throttle valve to be slower than the normal condition.
Therefore, the acceleration will be poor.</td></tr>
</table>


MULTIPORT FUEL INJECTION SYSTEM

cardiagn.com

MULTIPORT FUEL INJECTION SYSTEM : System Description

INFOID:0000000012406286

SYSTEM DIAGRAM

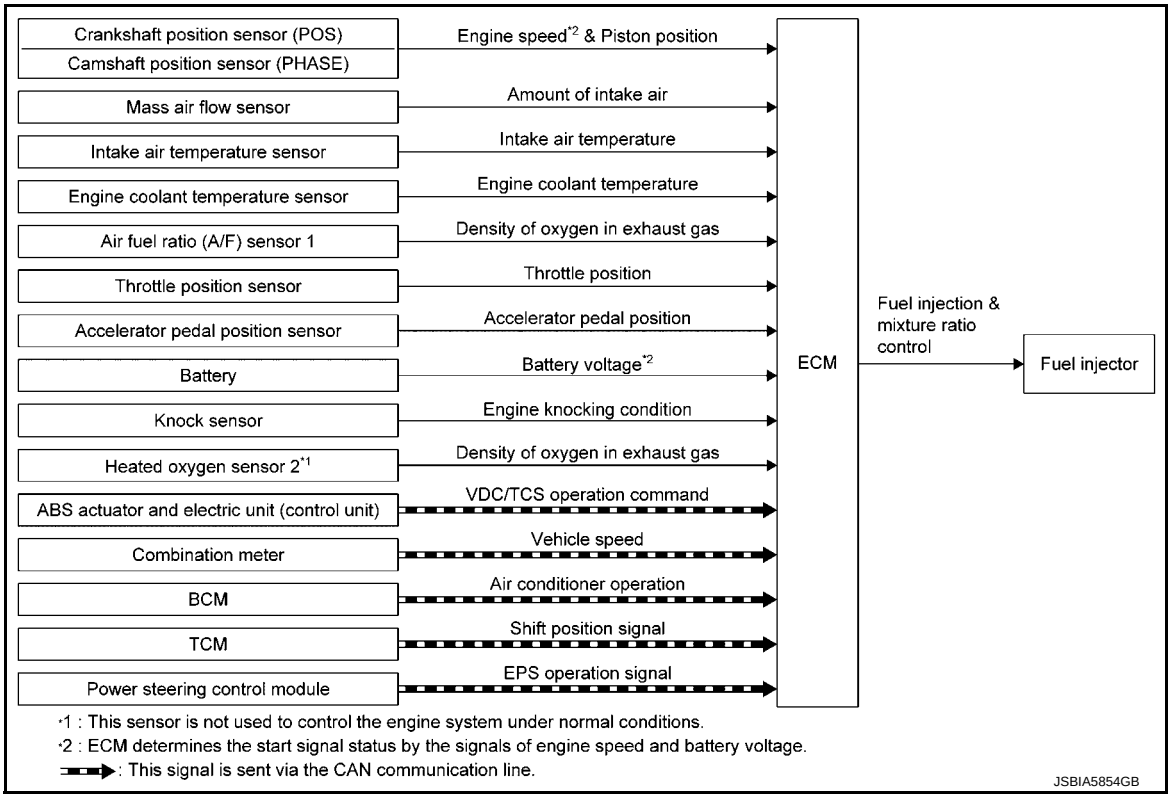

SYSTEM DESCRIPTION

The amount of fuel injected from the fuel injector is determined by the ECM. The ECM controls the length of time the valve remains open (injection pulse duration). The amount of fuel injected is a program value in the ECM memory. The program value is preset by engine operating conditions. These conditions are determined by input signals (for engine speed and intake air) from the crankshaft position sensor (POS), camshaft position sensor (PHASE) and the mass air flow sensor.

VARIOUS FUEL INJECTION INCREASE/DECREASE COMPENSATION


In addition, the amount of fuel injected is compensated to improve engine performance under various operating conditions as listed below.

<Fuel increase>
- During warm-up
- When starting the engine
- During acceleration
- Hot-engine operation
- When selector lever position is changed from N to D
- High-load, high-speed operation

<Fuel decrease>
- During deceleration
- During high engine speed operation

cardiagn.com

MIXTURE RATIO FEEDBACK CONTROL (CLOSED LOOP CONTROL)

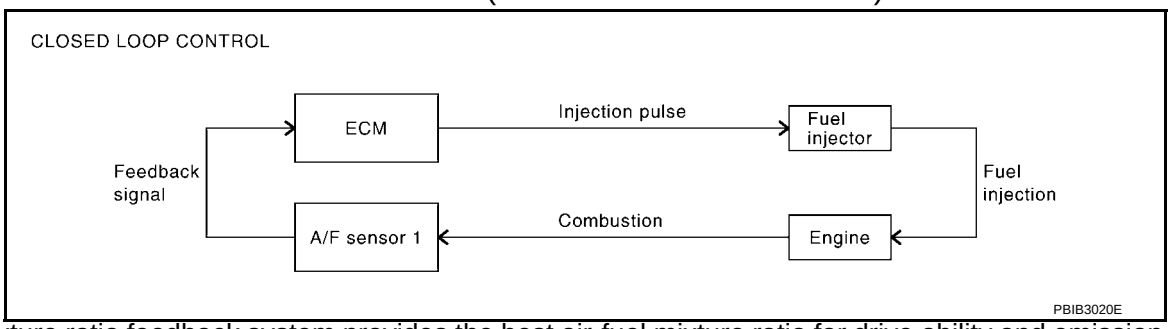

The mixture ratio feedback system provides the best air-fuel mixture ratio for drive ability and emission control. The three way catalyst (manifold) can better reduce CO, HC and NOx emissions. This system uses A/F sensor 1 in the exhaust manifold to monitor whether the engine operation is rich or lean. The ECM adjusts the injection pulse width according to the sensor voltage signal. For more information about A/F sensor 1, refer to EC-29, "Air Fuel Ratio (A/F) Sensor 1". This maintains the mixture ratio within the range of stoichiometric (ideal air-fuel mixture).
This stage is referred to as the closed loop control condition.
Heated oxygen sensor 2 is located downstream of the three way catalyst (manifold). Even if the switching characteristics of A/F sensor 1 shift, the air-fuel ratio is controlled to stoichiometric by the signal from heated oxygen sensor 2.

- Open Loop Control
  The open loop system condition refers to when the ECM detects any of the following conditions. Feedback control stops in order to maintain stabilized fuel combustion.


- Deceleration and acceleration
- High-load, high-speed operation
- Malfunction of A/F sensor 1 or its circuit
- Insufficient activation of A/F sensor 1 at low engine coolant temperature
- High engine coolant temperature
- During warm-up
- After shifting from N to D
- When starting the engine

MIXTURE RATIO SELF-LEARNING CONTROL

The mixture ratio feedback control system monitors the mixture ratio signal transmitted from A/F sensor 1. This feedback signal is then sent to the ECM. The ECM controls the basic mixture ratio as close to the theoretical mixture ratio as possible. However, the basic mixture ratio is not necessarily controlled as originally designed. Both manufacturing differences (i.e., mass air flow sensor hot wire) and characteristic changes during operation (i.e., fuel injector clogging) directly affect mixture ratio.
Accordingly, the difference between the basic and theoretical mixture ratios is monitored in this system. This is then computed in terms of “injection pulse duration” to automatically compensate for the difference between the two ratios.
“Fuel trim” refers to the feedback compensation value compared against the basic injection duration. Fuel trim includes “short-term fuel trim” and “long-term fuel trim”.
“Short-term fuel trim” is the short-term fuel compensation used to maintain the mixture ratio at its theoretical value. The signal from A/F sensor 1 indicates whether the mixture ratio is RICH or LEAN compared to the theoretical value. The signal then triggers a reduction in fuel volume if the mixture ratio is rich, and an increase in fuel volume if it is lean.
“Long-term fuel trim” is overall fuel compensation carried out over time to compensate for continual deviation of the “short-term fuel trim” from the central value. Continual deviation will occur due to individual engine differences, wear over time and changes in the usage environment.

cardiagn.com

FUEL INJECTION TIMING

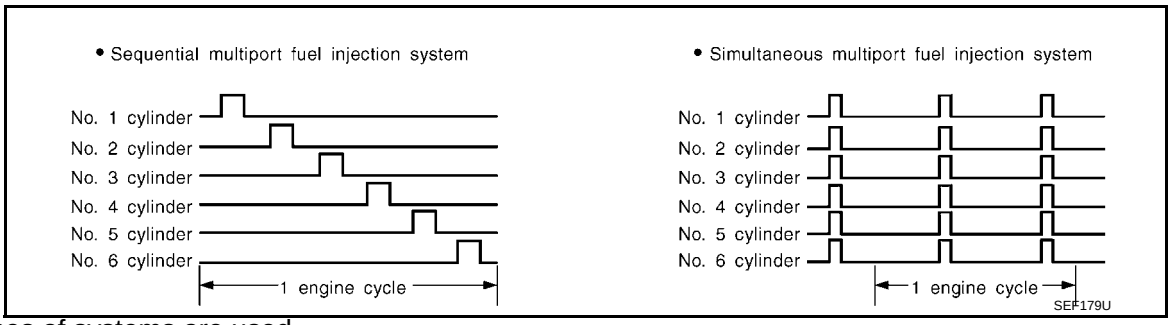

Two types of systems are used.

- Sequential Multiport Fuel Injection System
  Fuel is injected into each cylinder during each engine cycle according to the ignition order. This system is used when the engine is running.
- Simultaneous Multiport Fuel Injection System
  Fuel is injected simultaneously into all six cylinders twice each engine cycle. In other words, pulse signals of the same width are simultaneously transmitted from the ECM.
  The six injectors will then receive the signals 2 times for each engine cycle.
  This system is used when the engine is being started and/or if the fail-safe system (CPU) is operating.

FUEL SHUT-OFF


Fuel to each cylinder is cut off during deceleration, operation of the engine at excessively high speeds or operation of the vehicle at excessively high speeds.

ELECTRIC IGNITION SYSTEM

ELECTRIC IGNITION SYSTEM : System Description

INFOID:0000000012406287

SYSTEM DIAGRAM

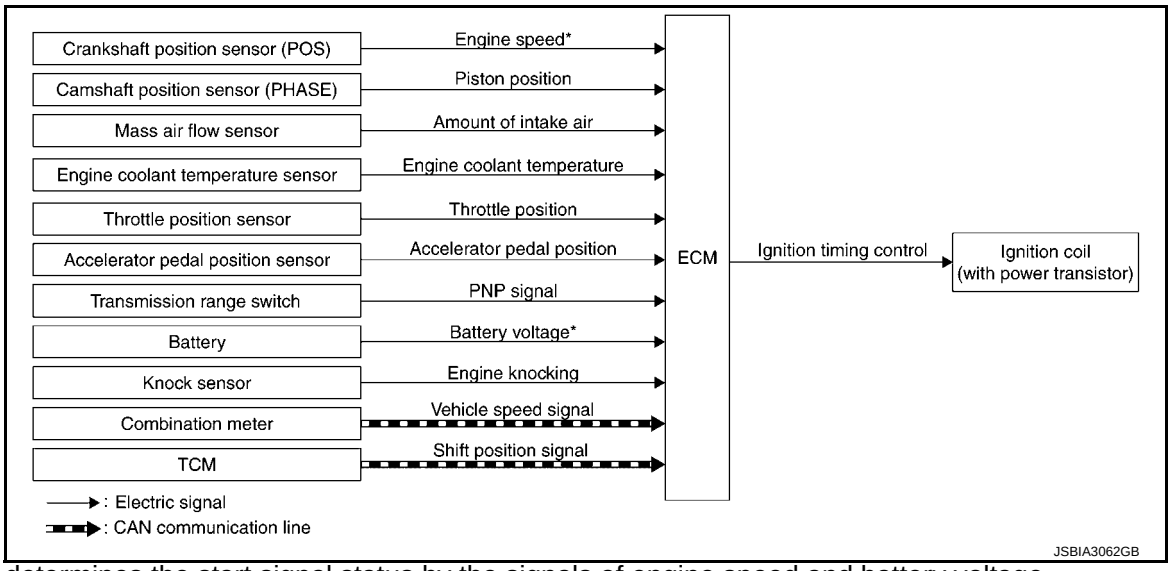

*: ECM determines the start signal status by the signals of engine speed and battery voltage.

SYSTEM DESCRIPTION

Ignition order: 1 - 2 - 3 - 4 - 5 - 6

The ignition timing is controlled by the ECM to maintain the best air-fuel ratio for every running condition of the engine. The ignition timing data is stored in the ECM.

The ECM receives information such as the injection pulse width and camshaft position sensor (PHASE) signal. Computing this information, ignition signals are transmitted to the power transistor.

During the following conditions, the ignition timing is revised by the ECM according to the other data stored in the ECM.

- At starting
- During warm-up
- At idle
- At low battery voltage

cardiagn.com

• During acceleration


The knock sensor retard system is designed only for emergencies. The basic ignition timing is programmed within the anti-knocking zone, if recommended fuel is used under dry conditions. The retard system does not operate under normal driving conditions. If engine knocking occurs, the knock sensor monitors the condition. The signal is transmitted to the ECM. The ECM retards the ignition timing to eliminate the knocking condition.

AIR CONDITIONING CUT CONTROL

AIR CONDITIONING CUT CONTROL : System Description

INFOID:0000000012406288

SYSTEM DIAGRAM

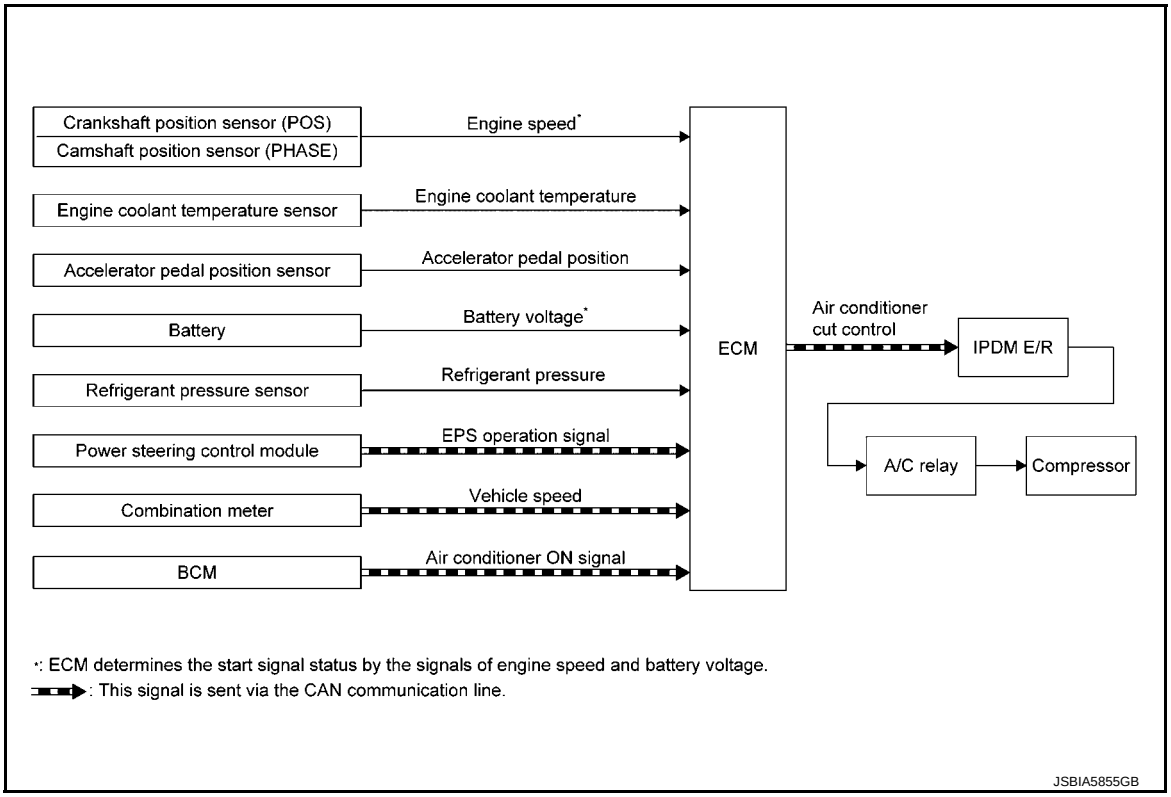

SYSTEM DESCRIPTION

This system improves engine operation when the air conditioner is used.
Under the following conditions, the air conditioner is turned OFF.

- When the accelerator pedal is fully depressed.
- When cranking the engine.
- At high engine speeds.
- When the engine coolant temperature becomes excessively high.
- When operating power steering during low engine speed or low vehicle speed.
- When engine speed is excessively low.
- When refrigerant pressure is excessively low or high.


AUTOMATIC SPEED CONTROL DEVICE (ASCD)

cardiagn.com

AUTOMATIC SPEED CONTROL DEVICE (ASCD) : System Description

INFOID:0000000012406289

SYSTEM DIAGRAM

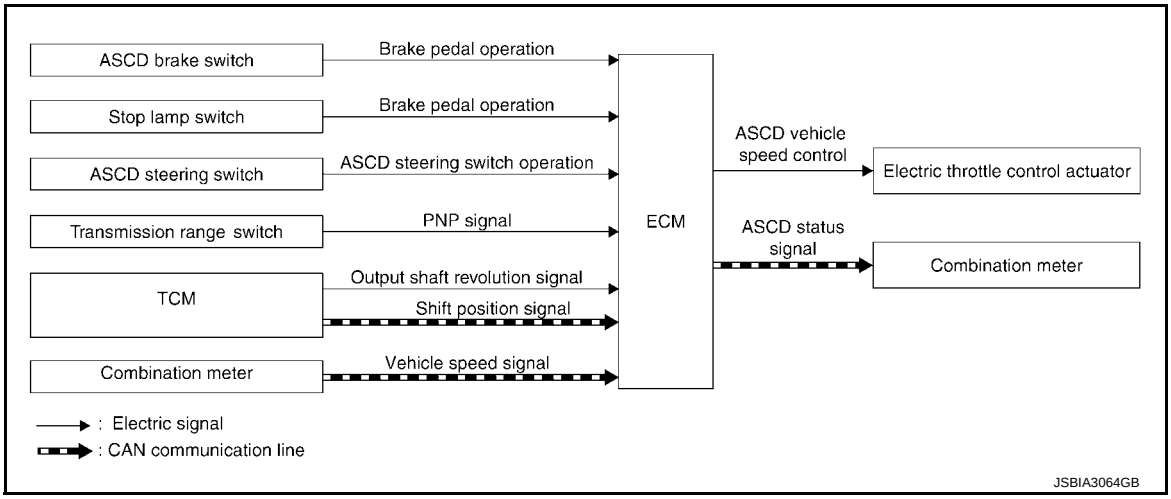

BASIC ASCD SYSTEM

Refer to Owner's Manual for ASCD operating instructions.

Automatic Speed Control Device (ASCD) allows a driver to keep vehicle at predetermined constant speed without depressing accelerator pedal. Driver can set vehicle speed in advance between approximately 40 km/h (25 MPH) and 144 km/h (89 MPH).

ECM controls throttle angle of electric throttle control actuator to regulate engine speed.

Operation status of ASCD is indicated by CRUISE on combination meter. If any malfunction occurs in the ASCD system, it automatically deactivates control.

NOTE:

Always drive vehicle in a safe manner according to traffic conditions and obey all traffic laws.

SET OPERATION

Press MAIN switch. (The CRUISE on combination meter illuminates.)

When vehicle speed reaches a desired speed between approximately 40 km/h (25 MPH) and 144 km/h (89 MPH), press SET/COAST switch.

ACCELERATE OPERATION

If the RESUME/ACCELERATE switch is pressed during cruise control driving, increase the vehicle speed until the switch is released or vehicle speed reaches maximum speed controlled by the system.

And then ASCD will maintain the new set speed.

CANCEL OPERATION

When any of following conditions exist, cruise operation will be canceled.

- CANCEL switch is pressed
- More than 2 switches on ASCD steering switch are pressed at the same time (Set speed will be cleared)
- Brake pedal is depressed
- Selector lever position changed to N, P or R
- Vehicle speed decreased to 13 km/h (8 MPH) lower than the set speed
- TCS system is operated
- CVT control system has a malfunction. Refer to EC-429, "Description".
- Engine coolant temperature is slightly higher than the normal operating temperature

When the ECM detects any of the following conditions, the ECM will cancel the cruise operation and inform the driver by blinking indicator lamp.

- Malfunction for some self-diagnoses regarding ASCD control: CRUISE will blink quickly.

If MAIN switch is turned to OFF while ASCD is activated, all of ASCD operations will be canceled and vehicle speed memory will be erased.

COAST OPERATION

When the SET/COAST switch is pressed during cruise control driving, decrease vehicle set speed until the switch is released. And then ASCD will maintain the new set speed.

RESUME OPERATION

cardiagn.com

When the RESUME/ACCELERATE switch is pressed after canceling operation other than pressing the MAIN switch is performed, vehicle speed will return to last set speed. To resume vehicle set speed, vehicle condition must meet following conditions.


- Brake pedal is released
- Selector lever position is other than P and N
- Vehicle speed is greater than 40 km/h (25 MPH) and less than 144 km/h (89 MPH)

COOLING FAN CONTROL

COOLING FAN CONTROL : System Description

INFOID:0000000012406290


SYSTEM DIAGRAM

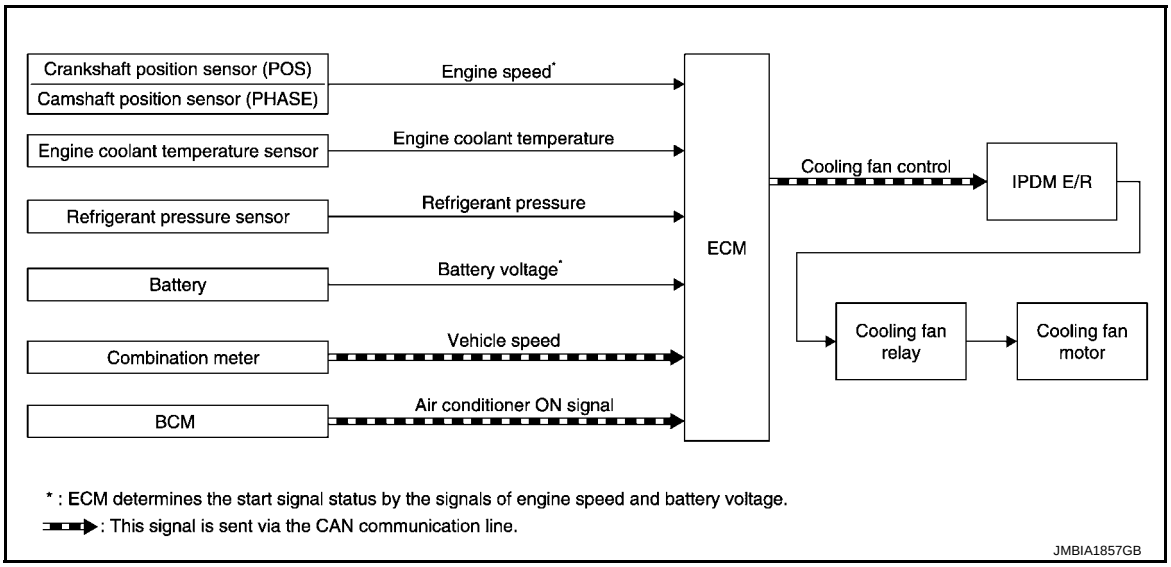

SYSTEM DESCRIPTION

The ECM controls the cooling fan corresponding to the vehicle speed, engine coolant temperature, refrigerant pressure, and air conditioner ON signal. The control system has 4-step control [HIGH/MIDDLE/LOW/OFF].

Cooling Fan Operation

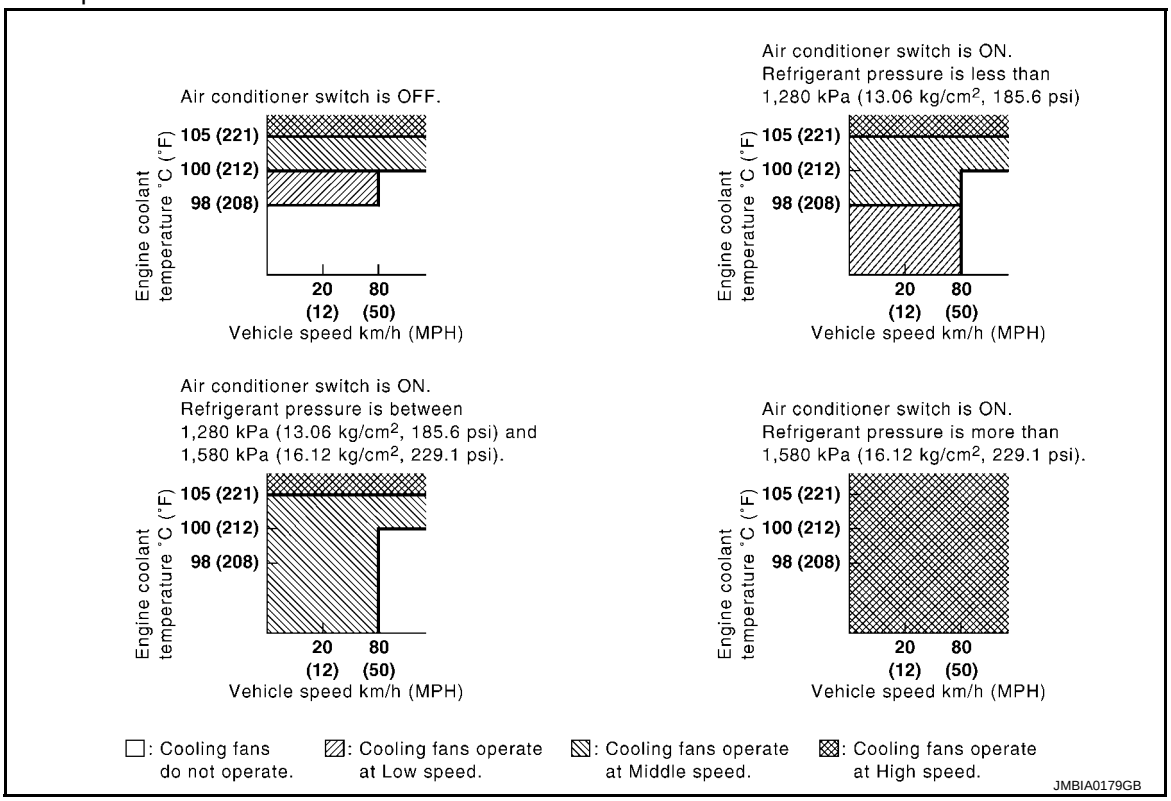

cardiagn.com

Cooling Fan Relay Operation

The ECM controls cooling fan relays in the IPDM E/R through CAN communication line.


Cooling fan speed	Cooling fan relay		
	1	2	3
Stop (OFF)	OFF	OFF	OFF
Low (LOW)	ON	OFF	OFF
Middle (MID)	OFF	ON	OFF
High (HI)	OFF	ON	ON

ELECTRONIC CONTROLLED ENGINE MOUNT

ELECTRONIC CONTROLLED ENGINE MOUNT : System Description

INFOID:0000000012406291

SYSTEM DIAGRAM

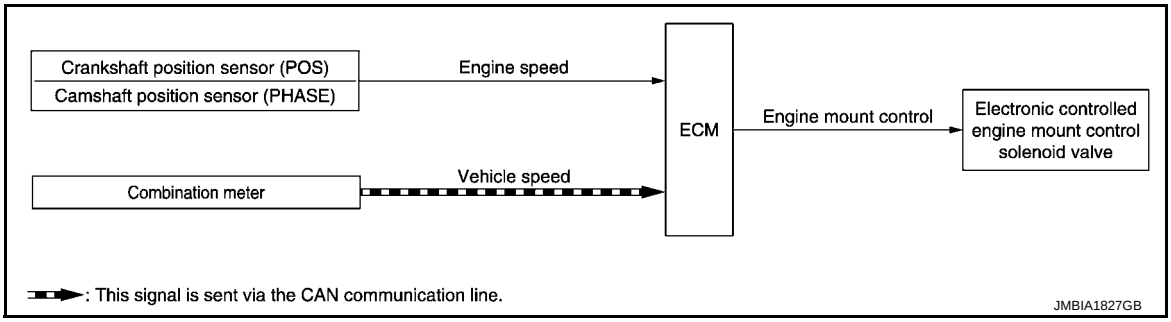


SYSTEM DESCRIPTION

The ECM controls the engine mount operation corresponding to the engine speed. The control system has a 2-step control [Soft/Hard]

Vehicle condition	Engine mount control
Idle (With vehicle stopped)	Soft
Except above conditions	Hard

ELECTRONIC CONTROLLED ENGINE MOUNT LINE DRAWING


cardiagn.com

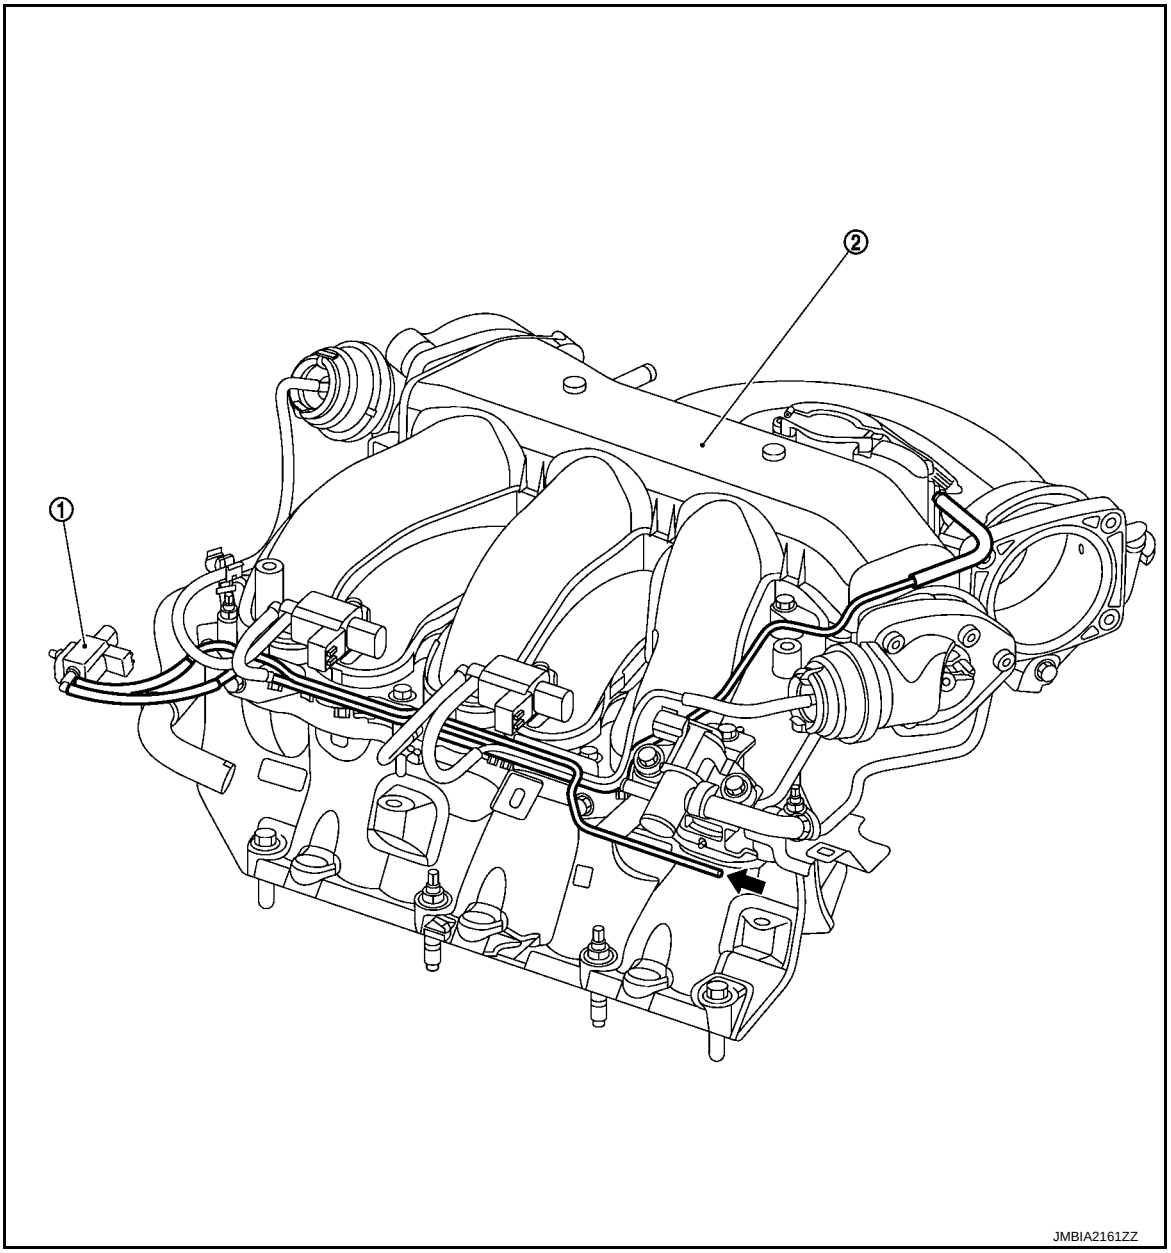

1. Electronic controlled engine mount control solenoid valve
2. Intake manifold collector

⬅ : From next figure

cardiagn.com

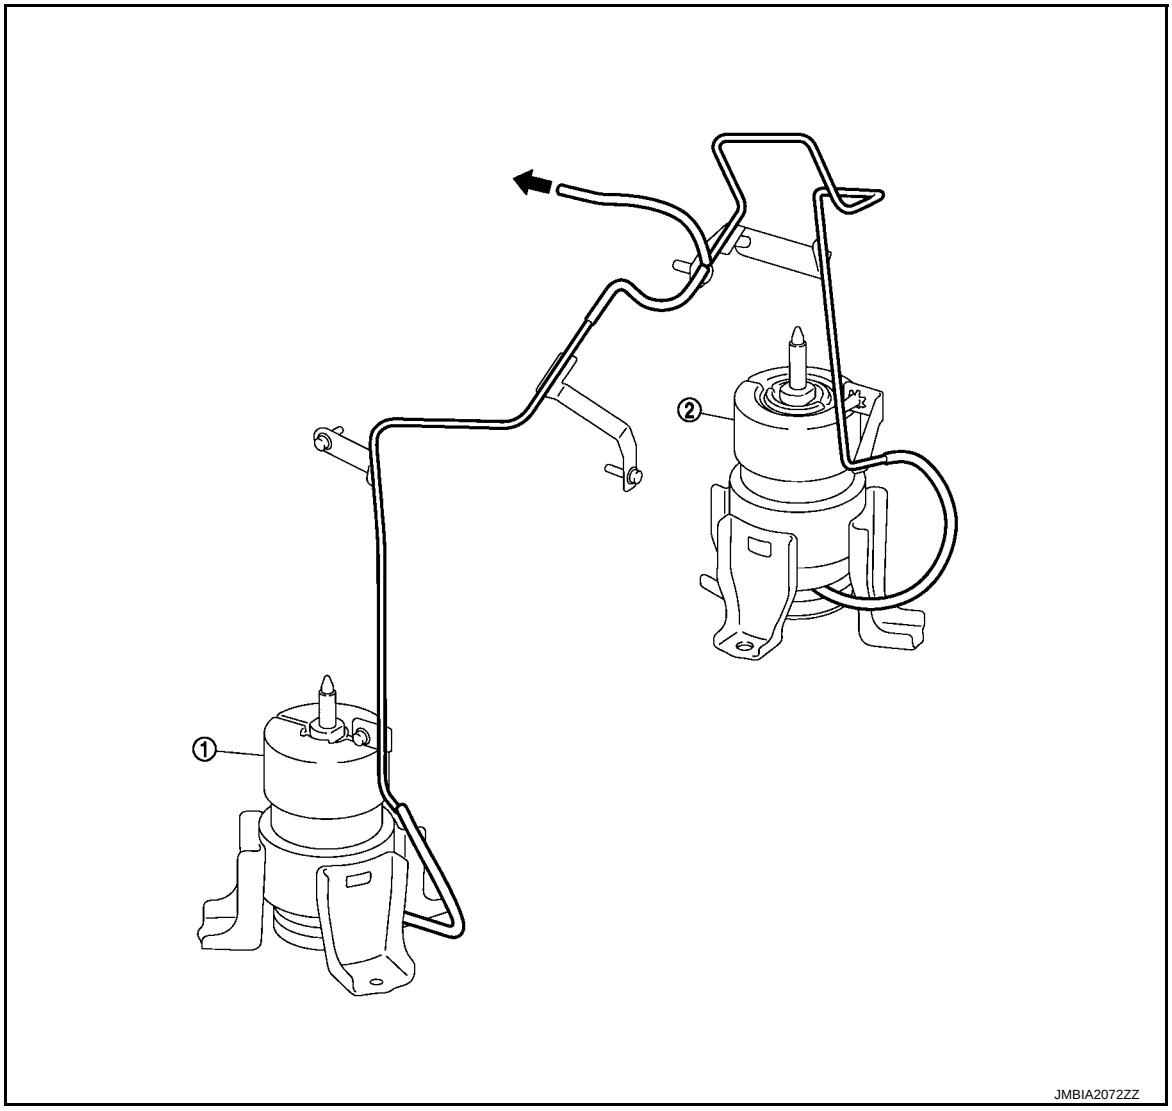

1. Front electronic controlled engine mount 2. Rear electronic controlled engine mount

⬅ : To previous figure

NOTE:
Do not use soapy water or any type of solvent while installing vacuum hose.


EVAPORATIVE EMISSION SYSTEM

cardiagn.com


EVAPORATIVE EMISSION SYSTEM : System Description

INFOID:0000000012406292

SYSTEM DIAGRAM

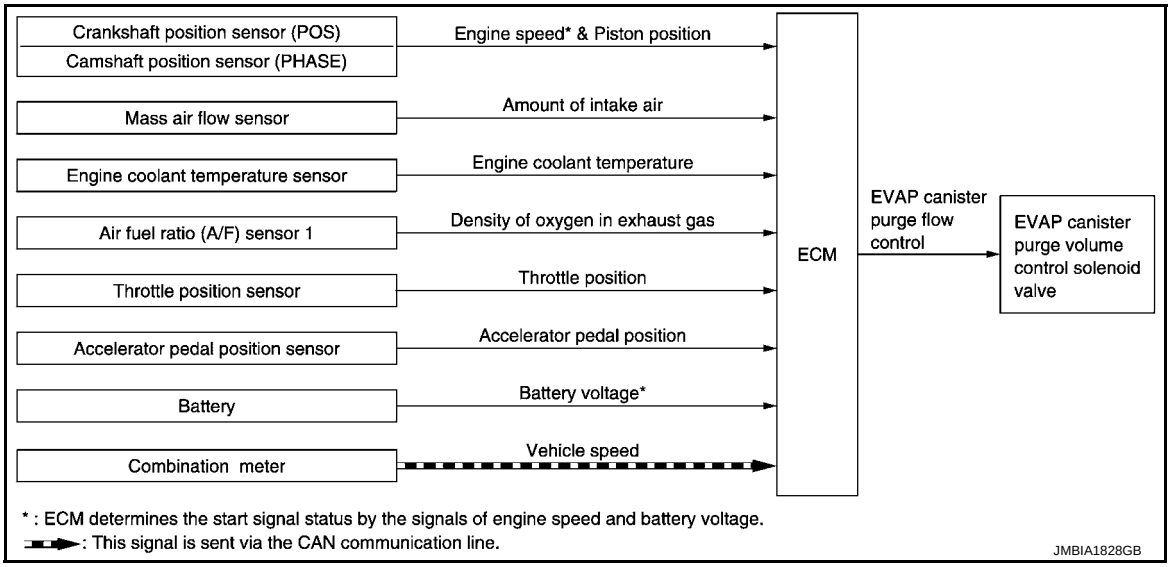

SYSTEM DESCRIPTION

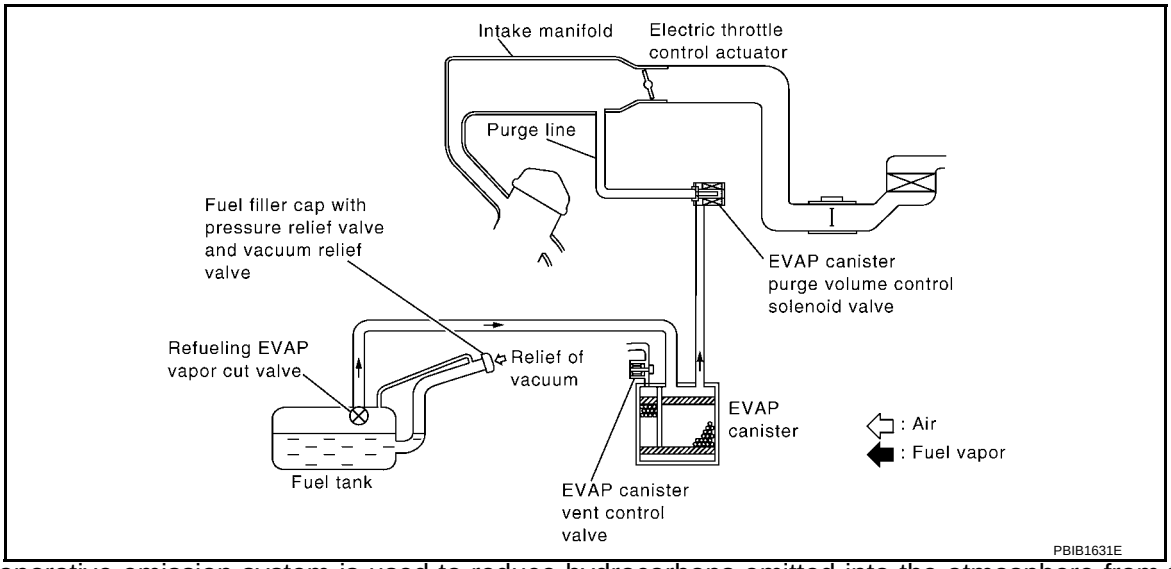

The evaporative emission system is used to reduce hydrocarbons emitted into the atmosphere from the fuel system. This reduction of hydrocarbons is accomplished by activated charcoals in the EVAP canister.
The fuel vapor in the sealed fuel tank is led into the EVAP canister which contains activated carbon and the vapor is stored there when the engine is not operating or when refueling to the fuel tank.
The vapor in the EVAP canister is purged by the air through the purge line to the intake manifold when the engine is operating. EVAP canister purge volume control solenoid valve is controlled by ECM. When the engine operates, the flow rate of vapor controlled by EVAP canister purge volume control solenoid valve is proportionally regulated as the air flow increases.
EVAP canister purge volume control solenoid valve also shuts off the vapor purge line during decelerating and idling.

INTAKE VALVE TIMING CONTROL


INTAKE VALVE TIMING CONTROL : System Description

INFOID:0000000012406293


INTAKE VALVE TIMING CONTROL

cardiagn.com

System Diagram

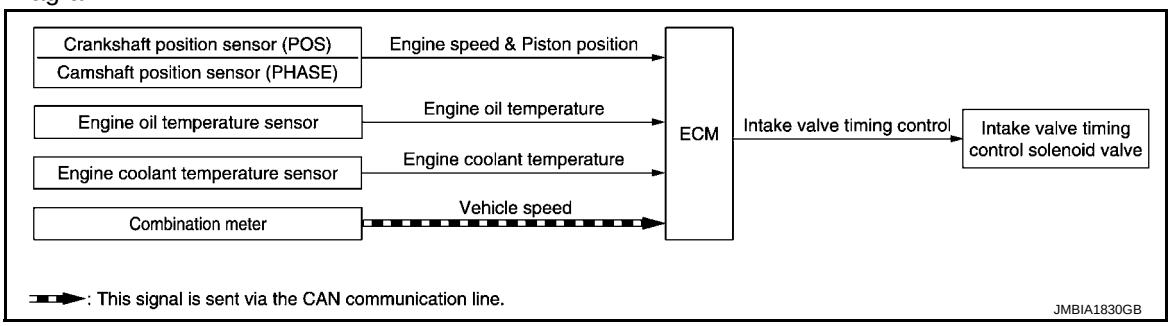

System Description

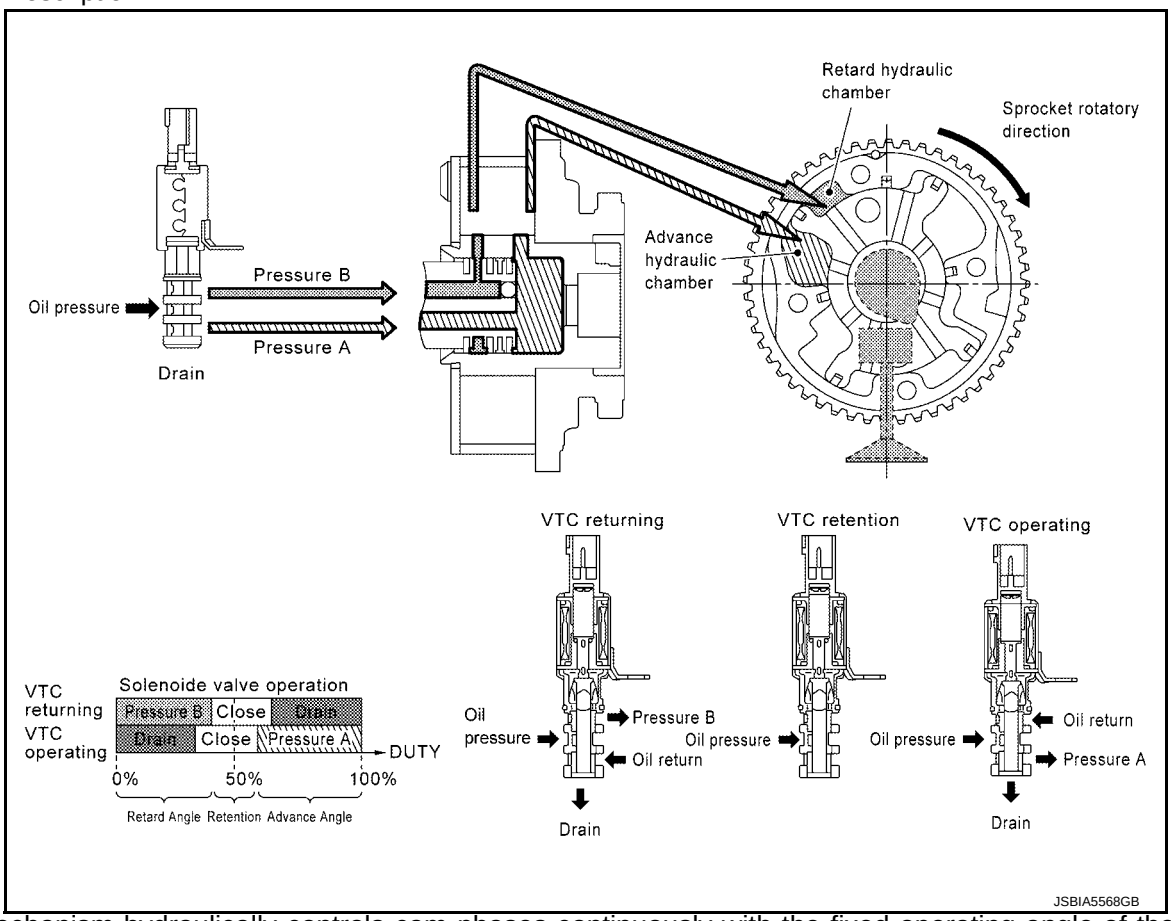


This mechanism hydraulically controls cam phases continuously with the fixed operating angle of the intake valve.

The ECM receives signals such as crankshaft position, camshaft position, engine speed, and engine coolant temperature. Then, the ECM sends ON/OFF pulse duty signals to the intake valve timing (IVT) control solenoid valve depending on driving status. This makes it possible to control the shut/open timing of the intake valve to increase engine torque in low/mid speed range and output in high-speed range.

INTAKE VALVE TIMING INTERMEDIATE LOCK CONTROL


cardiagn.com

System Diagram

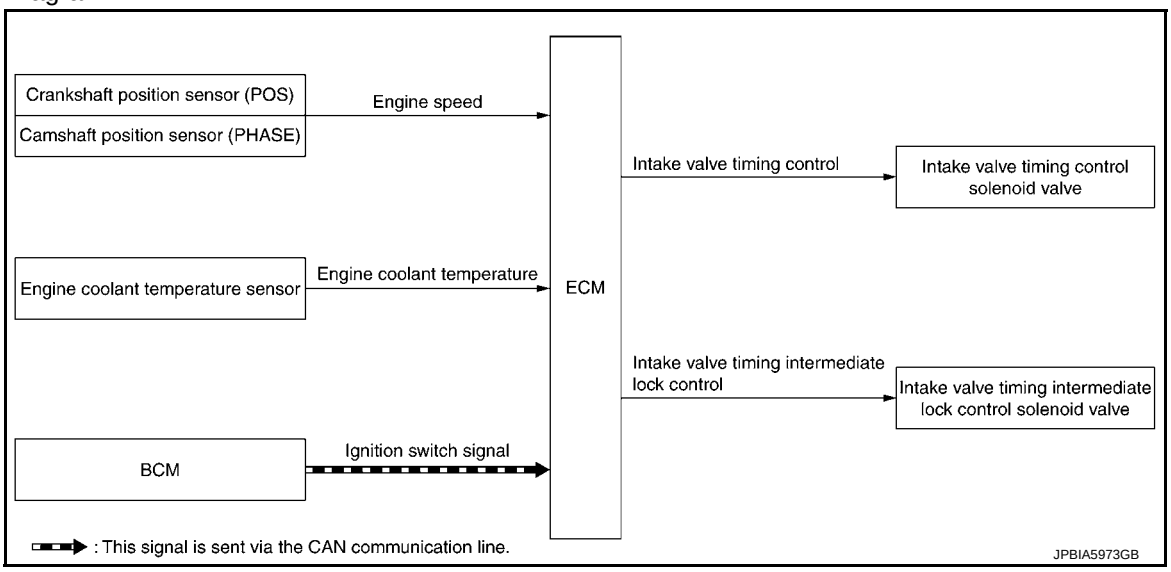

System Description

The intake valve timing intermediate lock control improves the cleaning ability of exhaust gas at cold starting by fixing the camshaft sprocket (INT) with two lock pins and bringing the cam phase into intermediate phase.

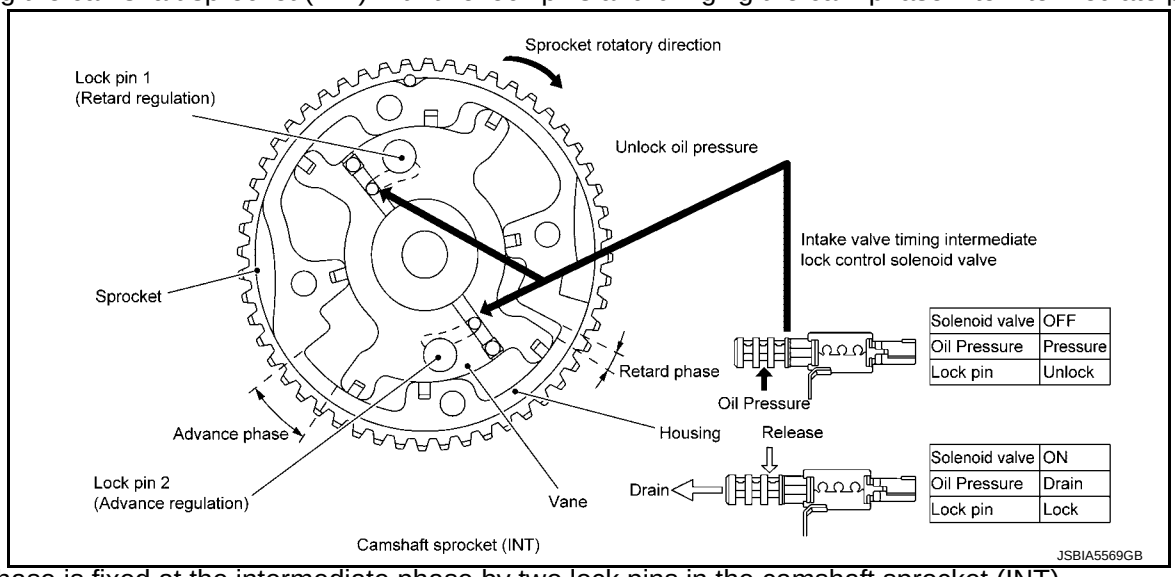


Cam phase is fixed at the intermediate phase by two lock pins in the camshaft sprocket (INT).

ECM controls the intermediate phase lock by opening/closing the intake valve timing intermediate lock control solenoid valve to control oil pressure acting on the lock pins and locking/unlocking the lock pins.

cardiagn.com

Lock/Unlock Activation

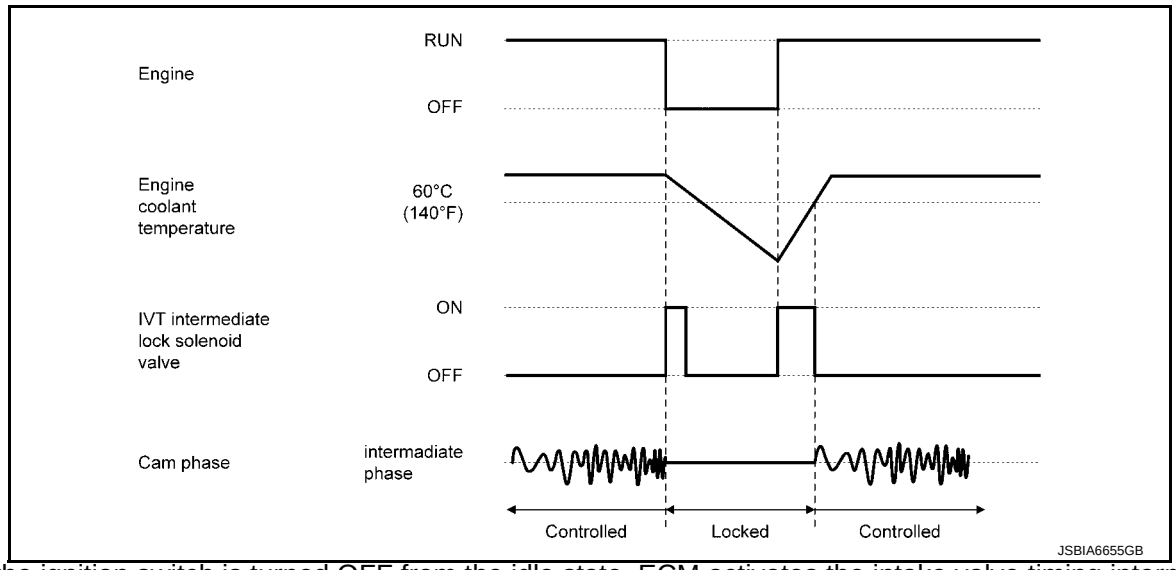


When the ignition switch is turned OFF from the idle state, ECM activates the intake valve timing intermediate lock control solenoid valve to drain oil pressure. Accordingly, the lock pins is activated by the spring, and the cam phase is fixed at the intermediate position.
When starting the engine by cold start, ECM activates the solenoid valve to maintain the condition that the cam phase is fixed at the intermediate position.
When the engine coolant temperature exceeds 60°C (140°F), ECM turns OFF the solenoid valve and starts normal intake valve timing control.

EXHAUST VALVE TIMING CONTROL

EXHAUST VALVE TIMING CONTROL : System Description

INFOID:0000000012406294

SYSTEM DIAGRAM

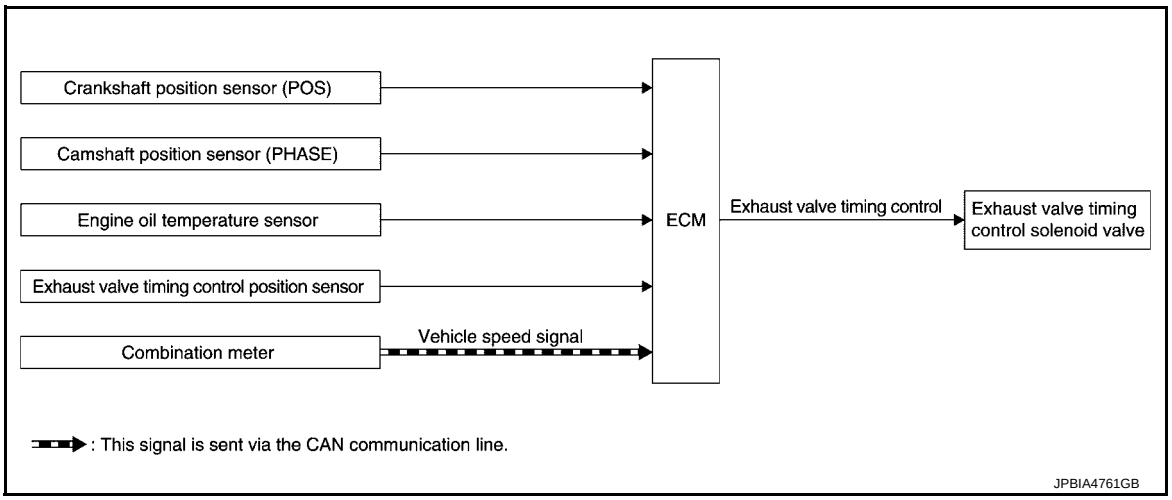


INPUT/OUTPUT SIGNAL CHART

Sensor	Input signal to ECM		ECM function	Actuator
Crankshaft position sensor (POS)	Engine speed and piston position		Exhaust valve timing control	Exhaust valve timing control solenoid valve
Camshaft position sensor (PHASE)				
Engine oil temperature sensor	Engine oil temperature			
Exhaust valve timing control position sensor	Exhaust valve timing signal			
Combination meter	CAN communication	Vehicle speed signal		

cardiagn.com

SYSTEM DESCRIPTION

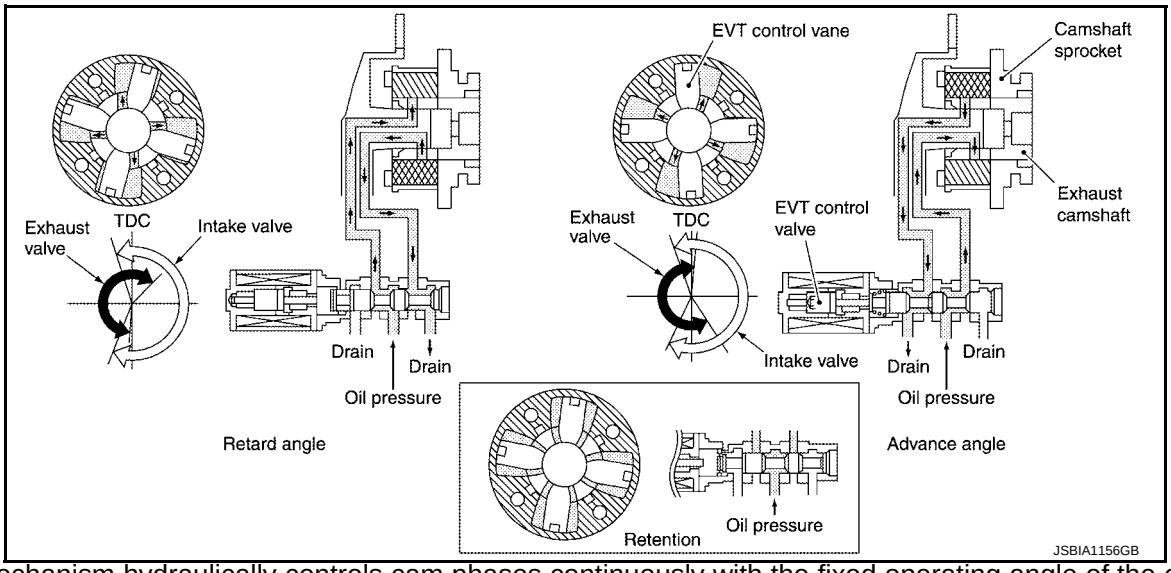


This mechanism hydraulically controls cam phases continuously with the fixed operating angle of the exhaust valve.
The ECM receives signals such as crankshaft position, camshaft position, engine speed, and engine oil temperature. Then, the ECM sends ON/OFF pulse duty signals to the exhaust valve timing (EVT) control solenoid valve depending on driving status. This makes it possible to control the shut/open timing of the exhaust valve to increase engine torque and output in a range of high engine speed.

FUEL FILLER CAP WARNING SYSTEM

FUEL FILLER CAP WARNING SYSTEM : System Description

INFOID:0000000012406295

SYSTEM DIAGRAM

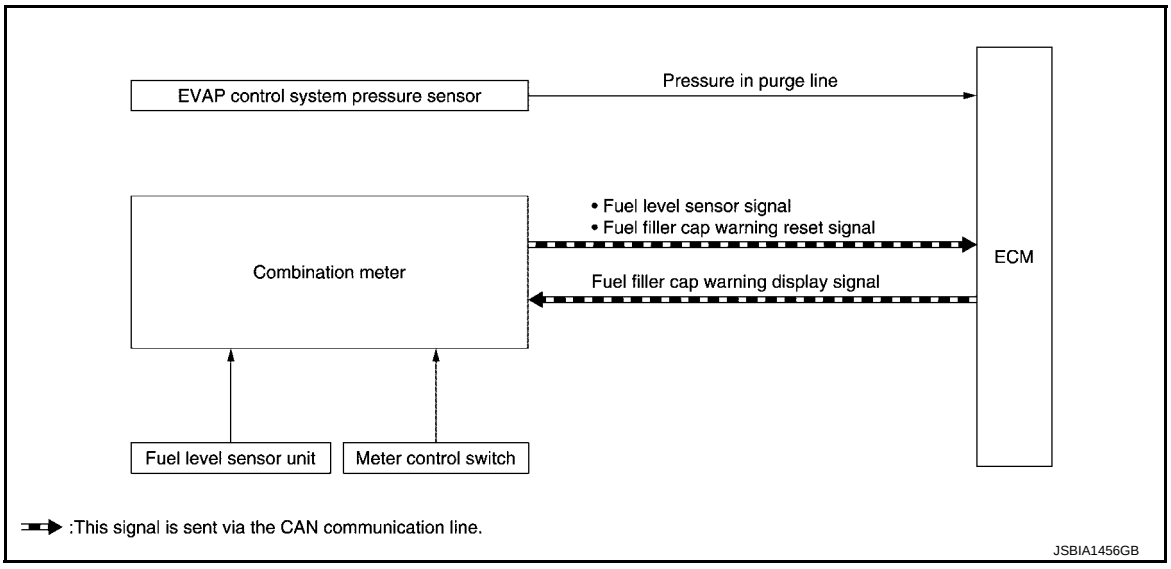

SYSTEM DESCRIPTION

The fuel filler cap warning system alerts the driver to the prevention of the fuel filler being left uncapped and malfunction occurrences after refueling, by turning ON the fuel filler cap warning display on the combination meter.
ECM judges a refueled state, based on a fuel level signal transmitted from the combination meter.
When a very small leak is detected through the EVAP leak diagnosis performed after judging the refueled state, ECM transmits a fuel filler cap warning display signal (request for display ON) to the combination meter via CAN communication.
When receiving the signal, the combination meter turns ON the fuel filler cap warning display.

CAUTION:

Check fuel filler cap installation condition when the fuel filler cap warning display turns ON.

cardiagn.com

Reset Operation

The fuel filler cap warning lamp tunes OFF, according to any condition listed below:

- Reset operation is performed by operating the meter control switch on the combination meter.
- When the reset operation is performed, the combination meter transmits a fuel filler cap warning reset signal to ECM via CAN communication. ECM transmits a fuel filler cap warning display signal (request for display OFF) to the combination meter via CAN communication. When receiving the signal, the combination meter turns OFF the fuel filler cap warning display.
- EVAP leak diagnosis result is normal.
- Fuel refilled.
- DTC erased by using CONSULT.

NOTE:


MIL turns ON if a malfunction is detected in leak diagnosis results again at the trip after the fuel filler cap warning display turns ON/OFF.

VARIABLE INDUCTION AIR SYSTEM


VARIABLE INDUCTION AIR SYSTEM : System Description

INFOID:0000000012406296

SYSTEM DIAGRAM

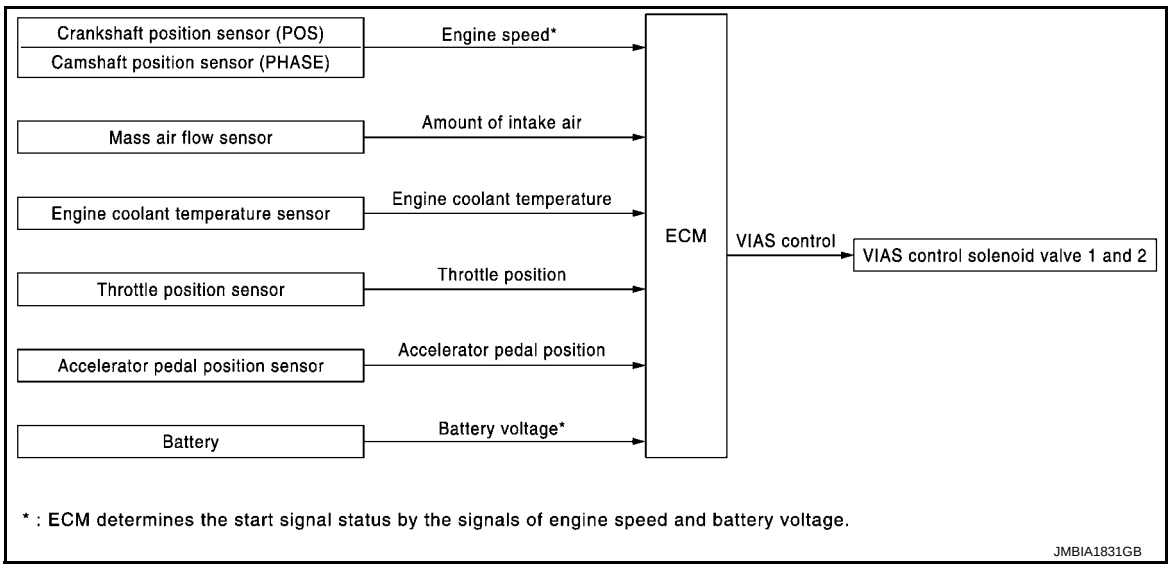

SYSTEM DESCRIPTION

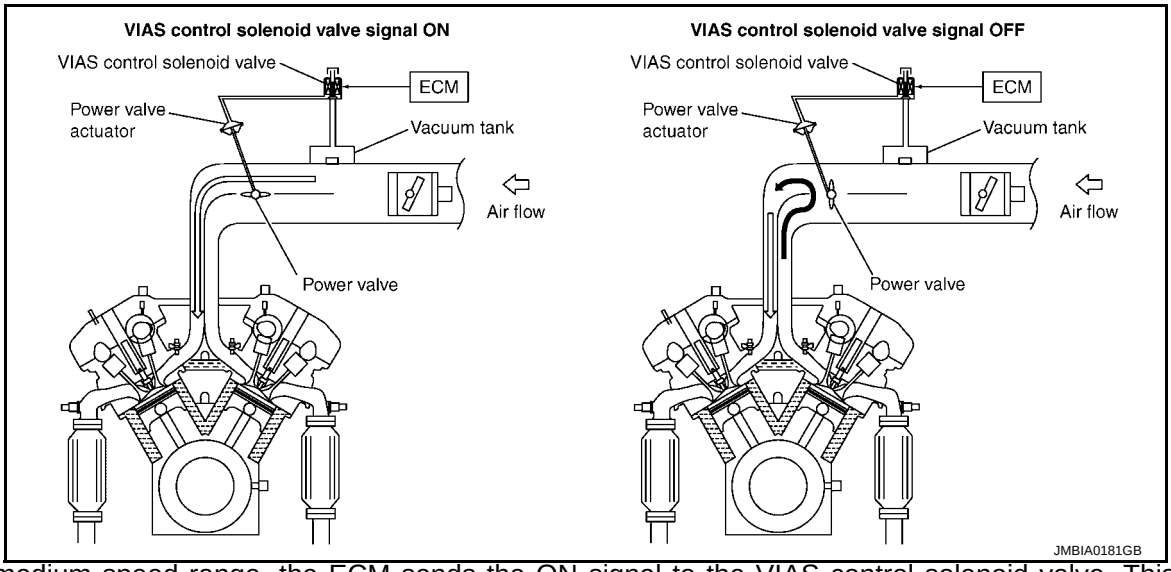


In the medium speed range, the ECM sends the ON signal to the VIAS control solenoid valve. This signal introduces the intake manifold vacuum into the power valve actuator and therefore closes the power valve. Under this condition, the pressure waves of the exhaust stroke do not disturb the pressure waves of the intake stroke of each opposite bank. Therefore, charging efficiency is increased together with the effect of the long intake passage.

cardiagn.com

However, in the high speed range, the ECM sends the OFF signal to the VIAS control solenoid valve and the power valve is opened. Under this condition, the pressure waves of intake stroke are resonant with those of each opposite bank exhaust stroke. Therefore, charging efficiency is also increased.
In addition, both valves 1 and 2 are opened or closed in other ranges mentioned above. Thus maximum charging efficiency is obtained for the various driving conditions.

VACUUM HOSE DRAWING

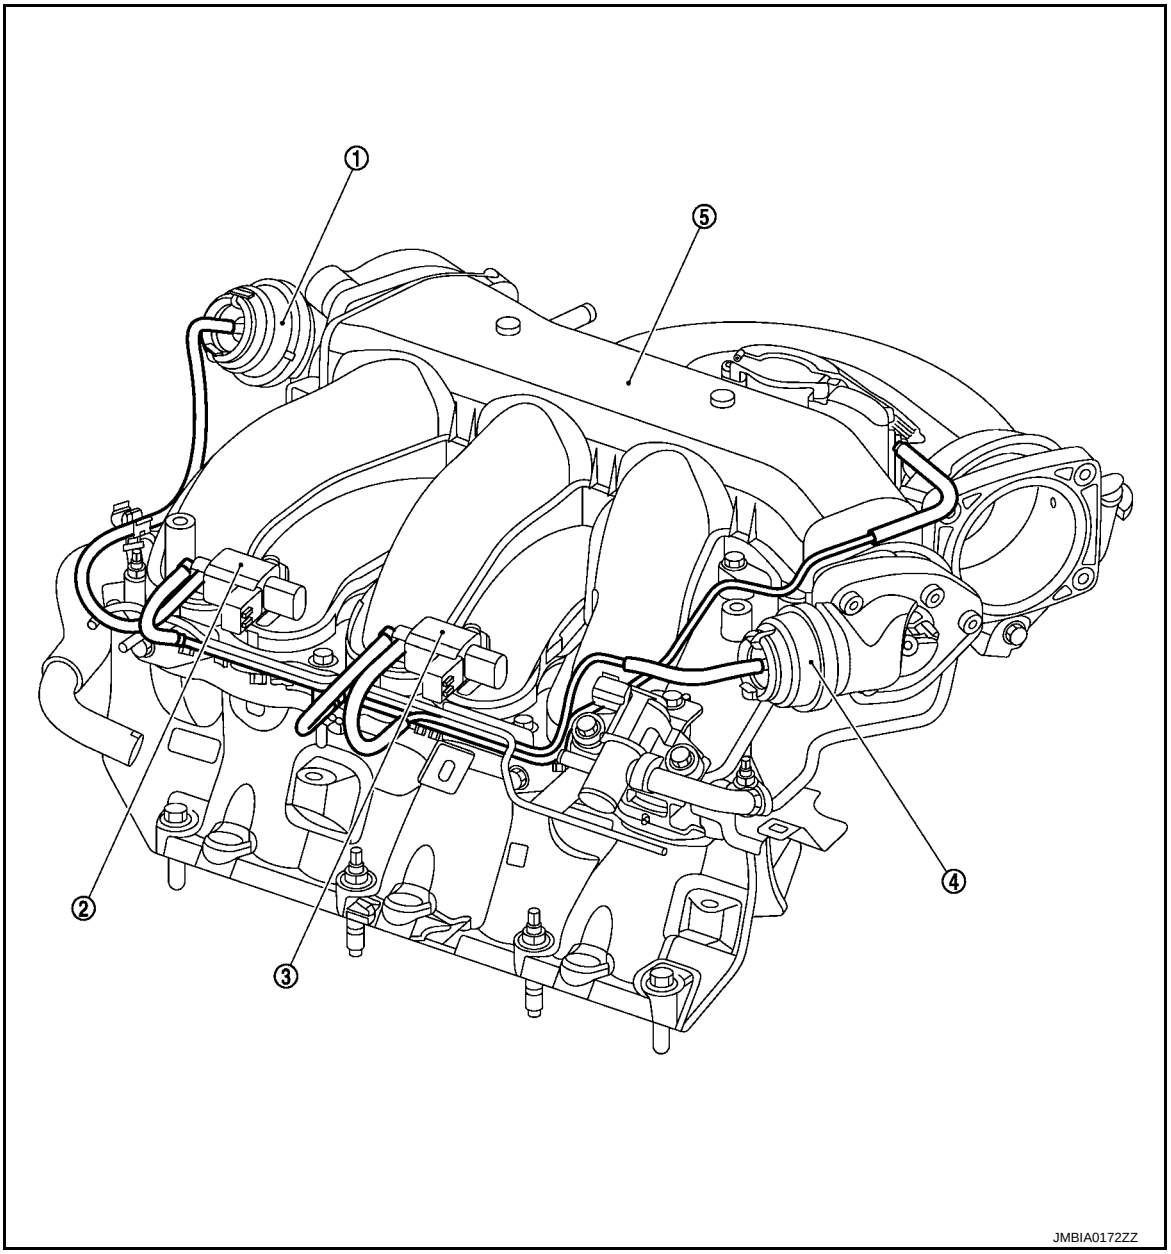

1. Power valve actuator 1
2. VIAS control solenoid valve 1
3. VIAS control solenoid valve 2
4. Power valve actuator 2
5. Intake manifold collector

CAN COMMUNICATION

CAN COMMUNICATION : System Description

INFOID:0000000012406297

CAN (Controller Area Network) is a serial communication line for real time application. It is an on-vehicle multiplex communication line with high data communication speed and excellent error detection ability. Many electronic control units are equipped onto a vehicle, and each control unit shares information and links with other control units during operation (not independent). In CAN communication, control units are connected with 2

cardiagn.com


communication lines (CAN H line, CAN L line) allowing a high rate of information transmission with less wiring. Each control unit transmits/receives data but selectively reads required data only.
Refer to LAN-32, "CAN COMMUNICATION SYSTEM : CAN Communication Signal Chart", about CAN communication for detail.

STARTER MOTOR DRIVE CONTROL

STARTER MOTOR DRIVE CONTROL : System Description

INFOID:0000000012406298

SYSTEM DIAGRAM

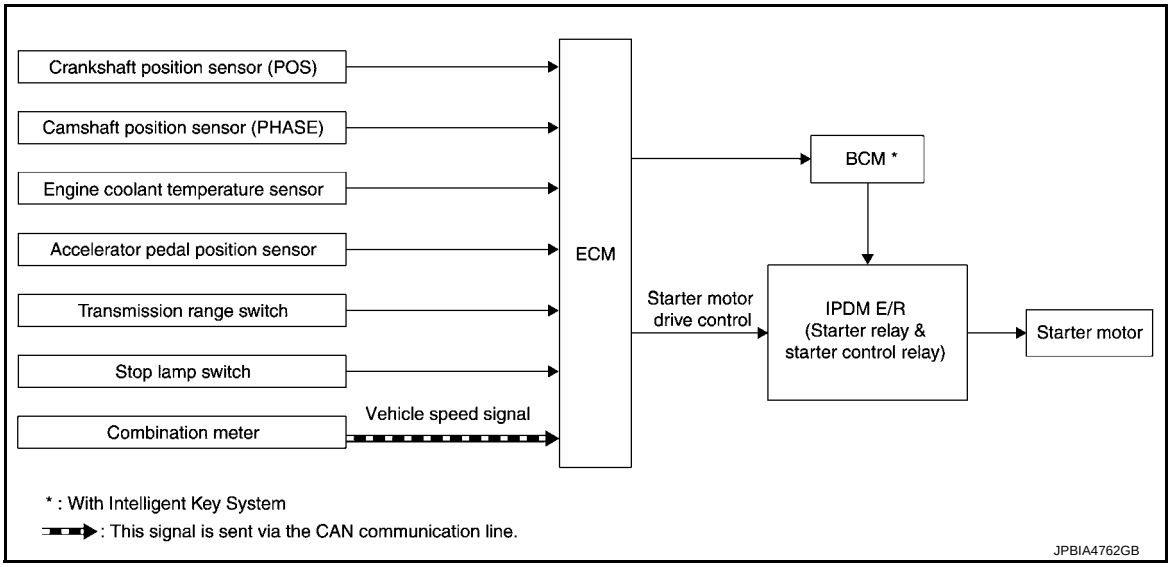

SYSTEM DESCRIPTION

When rapid deceleration occurs during engine runs or idle speed decreases due to heavy load conditions, ECM detects a decrease in idle speed and restarts the engine to secure reliability in handleability by transmitting a cranking request signal to IPDM E/R for activating the starter motor under the following conditions:

- Selector lever: P or any position other than N
- Idle switch: ON (Accelerator pedal not depressed)
- Stop lamp switch: ON (Brake pedal depressed)


Models with no Intelligent Key System transmit a control signal directly to IPDM E/R. On the other hand, models with the Intelligent Key System transmit a control signal to IPDM E/R by way of BCM via CAN communication.
IPDM E/R detects an operating state of the starter motor relay and the starter motor control relay and transmits a feed back signal to ECM via CAN Communication.

ENGINE PROTECTION CONTROL AT LOW ENGINE OIL PRESSURE

ENGINE PROTECTION CONTROL AT LOW ENGINE OIL PRESSURE : System Description

INFOID:0000000012406299

SYSTEM DIAGRAM

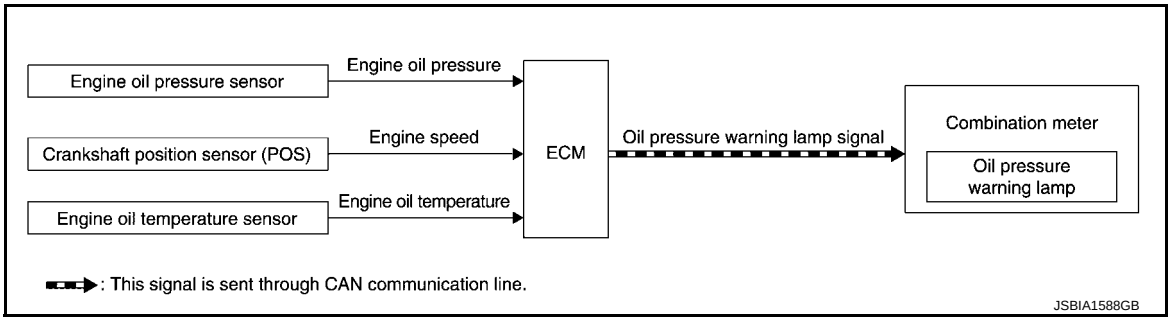

SYSTEM DESCRIPTION

- The engine protection control at low engine oil pressure warns the driver of a decrease in engine oil pressure by the oil pressure warning lamp before the engine becomes damaged.

cardiagn.com

- When detecting a decrease in engine oil pressure at an engine speed less than 1,000 rpm, ECM transmits an oil pressure warning lamp signal to the combination meter.The combination meter turns ON the oil pressure warning lamp, according to the signal.
- When detecting a decrease in engine oil pressure at an engine speed 1,000 rpm or more, ECM transmits an oil pressure warning lamp signal to the combination meter.
  The combination meter turns ON the oil pressure warning lamp, according to the signals. When detecting a decrease in engine oil pressure, ECM cuts fuel if the engine speed exceeds the specified value.

Decrease in engine oil pressure	Engine speed	Combination meter	Fuel cut
		Oil pressure warning lamp	
Detection	Less than 1,000 rpm	ON*	NO
	1,000 rpm or more	ON	YES

*: When detecting a normal engine oil pressure, ECM turns OFF the oil pressure warning lamp.

cardiagn.com


OPERATION

AUTOMATIC SPEED CONTROL DEVICE (ASCD)

AUTOMATIC SPEED CONTROL DEVICE (ASCD) : Switch Name and Function

INFOID:0000000012406300

SWITCHES AND INDICATORS

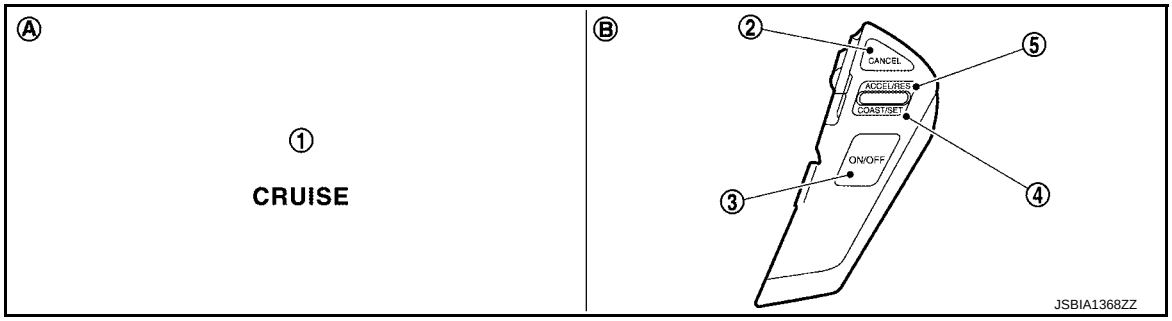

1. CRUISE indicator
2. CANCEL switch
3. ASCD MAIN switch
4. SET / - switch (SET/COAST)
5. RES / + switch (RESUME/ACCELERATE)

A. On the combination meter

B. On the steering wheel

SET SPEED RANGE

ASCD system can be set the following vehicle speed.

Minimum speed (Approx.)	Maximum speed (Approx.)
40 km/h (25 MPH)	144 km/h (89 MPH)

SWITCH OPERATION

Item	Function
CANCEL switch	Cancels the cruise control driving.
RES / + switch (RESUME/ACCELERATE)	• Resumes the set speed. • Increases speed incrementally during cruise control driving.
SET / – switch (SET/COAST)	• Sets desired cruise speed. • Decreases speed incrementally during cruise control driving.
ASCD MAIN switch	Master switch to activate the ASCD system.

CANCEL CONDITION

• When any of following conditions exist, the cruise operation is canceled.
- CANCEL switch is pressed
- ASCD MAIN switch pressed (Set speed is cleared)
- More than two switches at ASCD steering switch are pressed at the same time (Set speed is cleared)
- Brake pedal is depressed
- Selector lever position is changed to N, P or R
- Vehicle speed decreased to 13 km/h (8 MPH) lower than the set speed
- TCS system is operated

• When the ECM detects any of the following conditions, the ECM cancels the cruise operation and informs the driver by blinking CRUISE indicator lamp.
- Engine coolant temperature is slightly higher than the normal operating temperature. Then CRUISE indicator lamp is blinked slowly.

NOTE:

Engine coolant temperature decreases to the normal operating temperature, CRUISE indicator lamp stop blinking and the cruise operation is able to work.

- Malfunction for some self-diagnoses regarding ASCD system. SET indicator lamp is blinked quickly.

cardiagn.com

- When ASCD MAIN switch is turned to OFF during the cruise control driving, all of ASCD operations is canceled and vehicle speed memory is erased.

cardiagn.com

ON BOARD DIAGNOSTIC (OBD) SYSTEM

Diagnosis Description

INFOID:0000000012406301

This system is an on board diagnostic system that records exhaust emission-related diagnostic information and detects a sensors/actuator-related malfunction. A malfunction is indicated by the malfunction indicator lamp (MIL) and stored in ECU memory as a DTC. The diagnostic information can be obtained with the diagnostic tool (GST: Generic Scan Tool).

GST (Generic Scan Tool)

INFOID:0000000012406302

When GST is connected with a data link connector equipped on the vehicle side, it will communicate with the control unit equipped in the vehicle and then enable various kinds of diagnostic tests. Refer to EC-62, "Diagnosis Description".

NOTE:

Service $0A is not applied for regions where it is not mandated.

cardiagn.com

DIAGNOSIS SYSTEM (ECM)

DIAGNOSIS DESCRIPTION

DIAGNOSIS DESCRIPTION : 1st Trip Detection Logic and Two Trip Detection Logic

INFOID:0000000012406303

When a malfunction is detected for the first time, 1st trip DTC and 1st trip Freeze Frame data are stored in the ECM memory. The MIL will not illuminate at this stage. <1st trip>
If the same malfunction is detected again during the next drive, the DTC and Freeze Frame data are stored in the ECM memory, and the MIL illuminates. The MIL illuminates at the same time when the DTC is stored. <2nd trip> The “trip” in the “Two Trip Detection Logic” means a driving mode in which self-diagnosis is performed during vehicle operation. Specific on board diagnostic items will cause the ECM to illuminate or blink the MIL, and store DTC and Freeze Frame data, even in the 1st trip, as shown below.

×: Applicable —: Not applicable

Items	MIL				DTC		1st trip DTC	
	1st trip		2nd trip		1st trip displaying	2nd trip displaying	1st trip displaying	2nd trip displaying
	Blinking	Illuminated	Blinking	Illuminated				
Misfire (Possible three way catalyst damage) — DTC: P0300 – P0306 is being detected	×	—	—	—	—	—	×	—
Misfire (Possible three way catalyst damage) — DTC: P0300 – P0306 is being detected	—	—	×	—	—	×	—	—
One trip detection diagnoses (Refer to EC-103, "DTC Index".)	—	×	—	—	×	—	—	—
Except above	—	—	—	×	—	×	×	—

DIAGNOSIS DESCRIPTION : DTC and Freeze Frame Data

INFOID:0000000012406304

DTC AND 1ST TRIP DTC

The 1st trip DTC (whose number is the same as the DTC number) is displayed for the latest self-diagnostic result obtained. If the ECM memory was cleared previously, and the 1st trip DTC did not recur, the 1st trip DTC will not be displayed.
If a malfunction is detected during the 1st trip, the 1st trip DTC is saved in the ECM memory. The MIL will not light up (two trip detection logic). If the same malfunction is not detected in the 2nd trip (meeting the required driving pattern), the 1st trip DTC is cleared from the ECM memory. If the same malfunction is detected in the 2nd trip, both the 1st trip DTC and DTC are saved in the ECM memory and the MIL lights up. In other words, the DTC is stored in the ECM memory and the MIL lights up when the same malfunction occurs in two consecutive trips. If a 1st trip DTC is stored and a non-diagnostic operation is performed between the 1st and 2nd trips, only the 1st trip DTC will continue to be stored. For malfunctions that blink or light up the MIL during the 1st trip, the DTC and 1st trip DTC are stored in the ECM memory.
For malfunctions in which 1st trip DTCs are displayed, refer to EC-103, "DTC Index". These items are required by legal regulations to continuously monitor the system/component. In addition, the items monitored non-continuously are also displayed on CONSULT.
1st trip DTC is specified in Service $07 of SAE J1979/ISO 15031-5. 1st trip DTC detection occurs without illuminating the MIL and therefore does not warn the driver of a malfunction.
When a 1st trip DTC is detected, check, print out or write down and erase (1st trip) DTC and Freeze Frame data as specified in Work Flow procedure Step 2, refer to EC-136, "Work Flow". Then perform DTC Confirmation Procedure or Component Function Check to try to duplicate the malfunction. If the malfunction is duplicated, the item requires repair.

FREEZE FRAME DATA AND 1ST TRIP FREEZE FRAME DATA

The ECM records the driving conditions such as fuel system status, calculated load value, engine coolant temperature, short term fuel trim, long term fuel trim, engine speed, vehicle speed, absolute throttle position, base fuel schedule and intake air temperature at the moment a malfunction is detected.
Data which are stored in the ECM memory, along with the 1st trip DTC, are called 1st trip freeze frame data. The data, stored together with the DTC data, are called freeze frame data and displayed on CONSULT or GST. The 1st trip freeze frame data can only be displayed on the CONSULT screen.

cardiagn.com

Only one set of freeze frame data (either 1st trip freeze frame data or freeze frame data) can be stored in the ECM. 1st trip freeze frame data is stored in the ECM memory along with the 1st trip DTC. There is no priority for 1st trip freeze frame data and it is updated each time a different 1st trip DTC is detected. However, once freeze frame data (2nd trip detection/MIL on) is stored in the ECM memory, 1st trip freeze frame data is no longer stored. Remember, only one set of freeze frame data can be stored in the ECM. The ECM has the following priorities to update the data.

Priority	Items	
1	Freeze frame data	Misfire — DTC: P0300 – P0306 Fuel Injection System Function — DTC: P0171, P0172, P0174, P0175
2		Except the above items
3	1st trip freeze frame data	

For example, the EGR malfunction (Priority: 2) was detected and the freeze frame data was saved in the 2nd trip. After that when the misfire (Priority: 1) is detected in another trip, the freeze frame data will be updated from the EGR malfunction to the misfire. The 1st trip freeze frame data is updated each time a different malfunction is detected. There is no priority for 1st trip freeze frame data. However, once freeze frame data is stored in the ECM memory, 1st trip freeze data is no longer stored (because only one freeze frame data or 1st trip freeze frame data can be stored in the ECM). If freeze frame data is stored in the ECM memory and freeze frame data with the same priority occurs later, the first (original) freeze frame data remains unchanged in the ECM memory.
Both 1st trip freeze frame data and freeze frame data (along with the DTCs) are cleared when the ECM memory is erased.

DIAGNOSIS DESCRIPTION : Counter System

INFOID:0000000012406305

RELATIONSHIP BETWEEN MIL, 1ST TRIP DTC, DTC, AND DETECTABLE ITEMS

- When a malfunction is detected for the first time, the 1st trip DTC and the 1st trip freeze frame data are stored in the ECM memory.
- When the same malfunction is detected in two consecutive trips, the DTC and the freeze frame data are stored in the ECM memory, and the MIL will come on.
- The MIL will turn OFF after the vehicle is driven 3 times (driving pattern B) with no malfunction. The drive is counted only when the recorded driving pattern is met (as stored in the ECM). If another malfunction occurs while counting, the counter will reset.
- The DTC and the freeze frame data will be stored until the vehicle is driven 40 times (driving pattern A) without the same malfunction recurring (except for Misfire and Fuel Injection System). For Misfire and Fuel Injection System, the DTC and freeze frame data will be stored until the vehicle is driven 80 times (driving pattern C) without the same malfunction recurring. The “TIME” in “SELF-DIAGNOSTIC RESULTS” mode of CONSULT will count the number of times the vehicle is driven.
- The 1st trip DTC is not displayed when the self-diagnosis results in OK for the 2nd trip.

COUNTER SYSTEM CHART


Items	Fuel Injection System	Misfire	Other
MIL (turns OFF)	3 (pattern B)	3 (pattern B)	3 (pattern B)
DTC, Freeze Frame Data (no display)	80 (pattern C)	80 (pattern C)	40 (pattern A)
1st Trip DTC (clear)	1 (pattern C), *1	1 (pattern C), *1	1 (pattern B)
1st Trip Freeze Frame Data (clear)	*1, *2	*1, *2	1 (pattern B)

For details about patterns B and C under “Fuel Injection System” and “Misfire”, see “EXPLANATION FOR DRIVING PATTERNS FOR “MISFIRE <EXHAUST QUALITY DETERIORATION>”, “FUEL INJECTION SYSTEM”.
For details about patterns A and B under Other, see “EXPLANATION FOR DRIVING PATTERNS FOR “MISFIRE <EXHAUST QUALITY DETERIORATION>”, “FUEL INJECTION SYSTEM”.

- *1: Clear timing is at the moment OK is detected.
- *2: Clear timing is when the same malfunction is detected in the 2nd trip.

Relationship Between MIL, DTC, 1st Trip DTC and Driving Patterns for “Misfire <Exhaust Quality Deterioration>”, “Fuel Injection System”

cardiagn.com

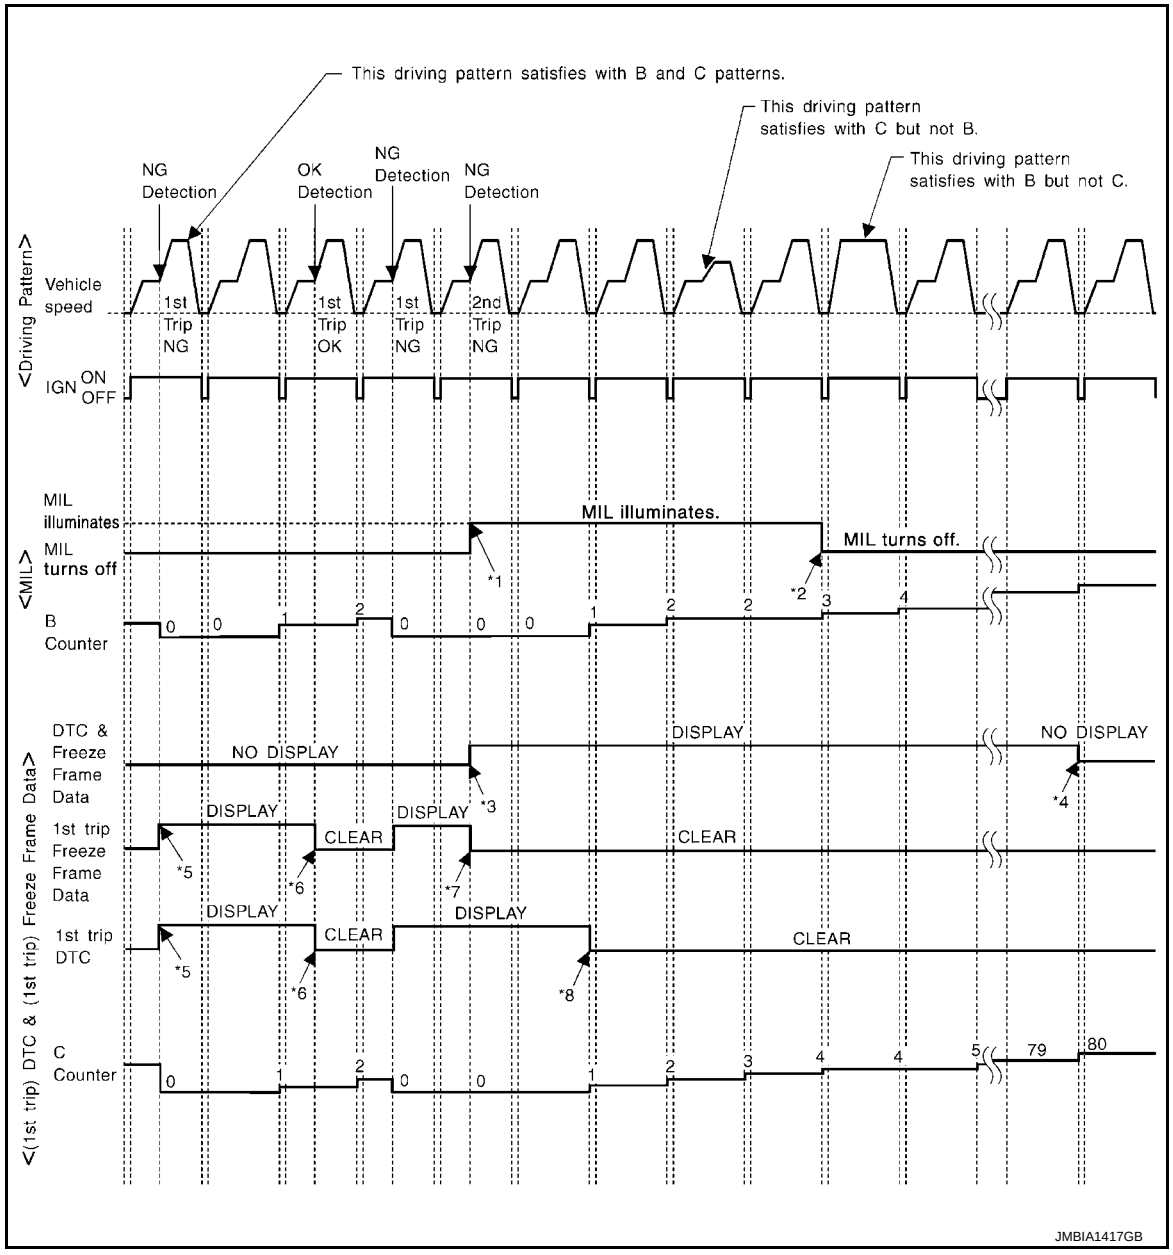

*1: When the same malfunction is detected in two consecutive trips, MIL will light up.

*2: MIL will turn OFF after vehicle is driven 3 times (pattern B) without any malfunctions.

*3: When the same malfunction is detected in two consecutive trips, the DTC and the freeze frame data will be stored in ECM.

*4: The DTC and the freeze frame data will not be displayed any longer after vehicle is driven 80 times (pattern C) without the same malfunction. (The DTC and the freeze frame data still remain in ECM.)

*5: When a malfunction is detected for the first time, the 1st trip DTC and the 1st trip freeze frame data will be stored in ECM.

*6: The 1st trip DTC and the 1st trip freeze frame data will be cleared at the moment OK is detected.

*7: When the same malfunction is detected in the 2nd trip, the 1st trip freeze frame data will be cleared.

*8: 1st trip DTC will be cleared when vehicle is driven once (pattern C) without the same malfunction after DTC is stored in ECM.

Explanation for Driving Patterns for “Misfire <Exhaust Quality Deterioration>”, “Fuel Injection System”

Driving Pattern B

Refer to EC-67, "DIAGNOSIS DESCRIPTION : Driving Pattern".

cardiagn.com

Driving Pattern C

Refer to EC-67, "DIAGNOSIS DESCRIPTION : Driving Pattern".

Example:


If the stored freeze frame data is as per the following:

Engine speed: 850 rpm, Calculated load value: 30%, Engine coolant temperature: 80°C (176°F)

To be satisfied with driving pattern C, the vehicle should run under the following conditions:

Engine speed: 475 – 1,225 rpm, Calculated load value: 27 – 33%, Engine coolant temperature: more than 70°C (158°F)

Relationship Between MIL, DTC, 1st Trip DTC and Driving Patterns Except For “Misfire <Exhaust Quality Deterioration>”, “Fuel Injection System”

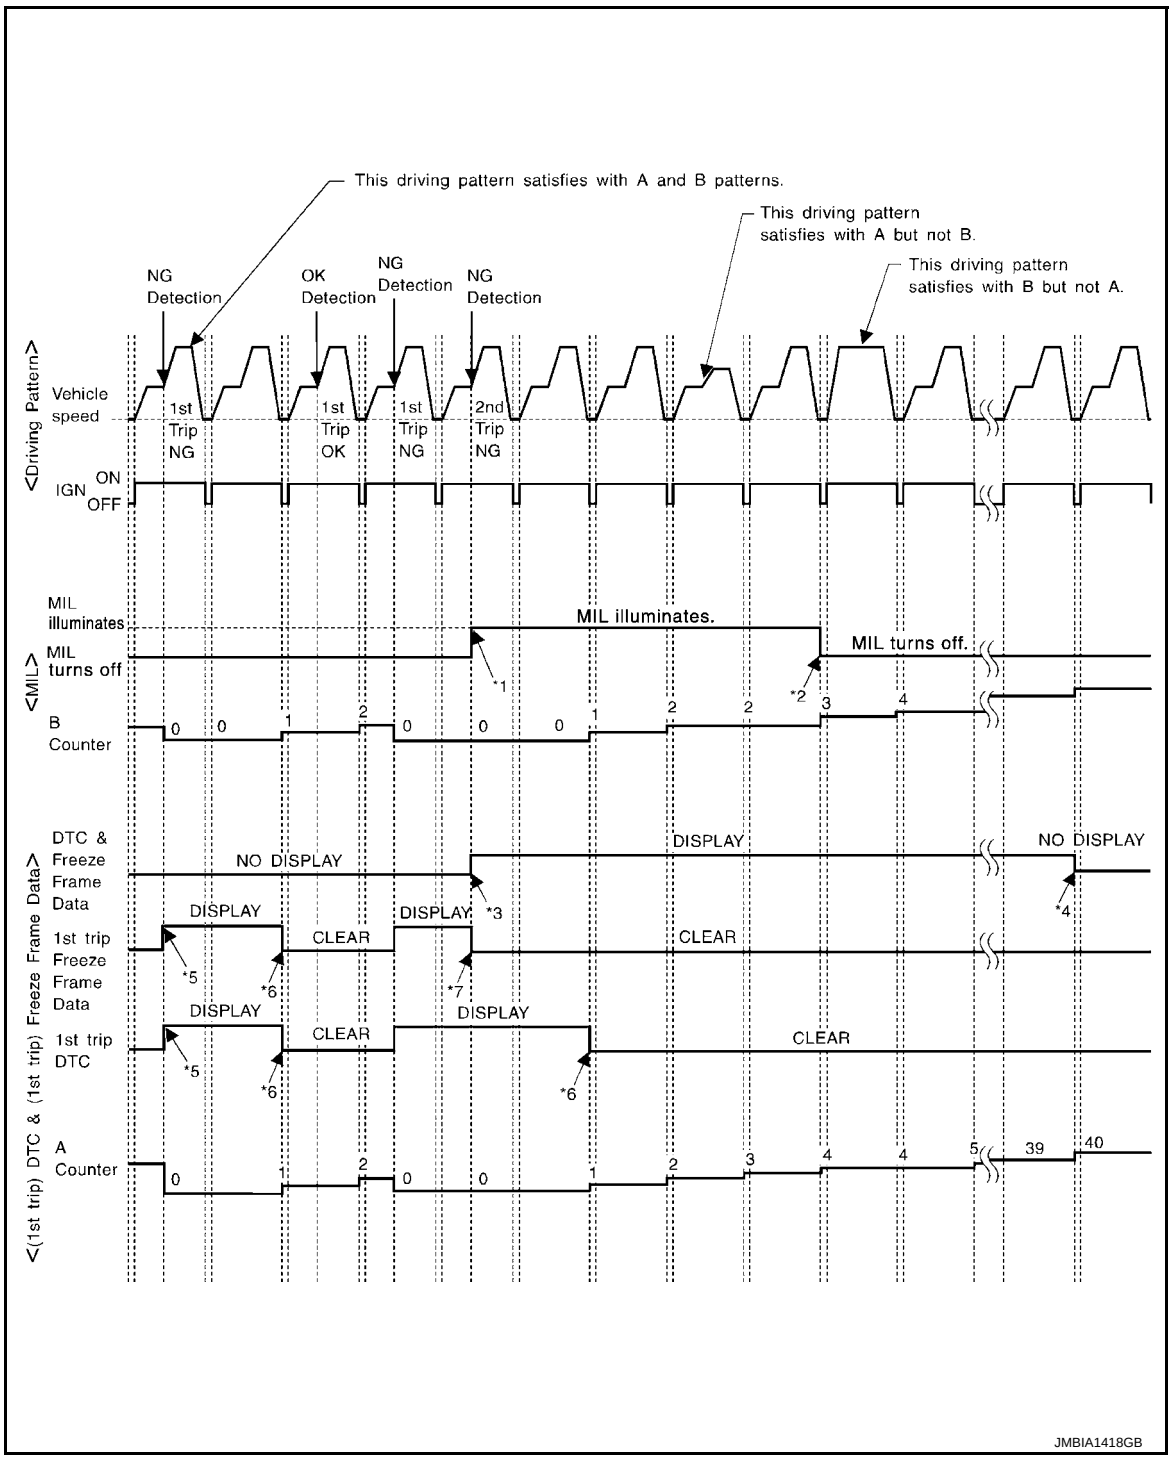

cardiagn.com

*1: When the same malfunction is detected in two consecutive trips, MIL will light up.

*2: MIL will turn OFF after vehicle is driven 3 times (pattern B) without any malfunctions.

*3: When the same malfunction is detected in two consecutive trips, the DTC and the freeze frame data will be stored in ECM.

*4: The DTC and the freeze frame data will not be displayed any longer after vehicle is driven 40 times (pattern A) without the same malfunction. (The DTC and the freeze frame data still remain in ECM.)

*5: When a malfunction is detected for the first time, the 1st trip DTC and the 1st trip freeze frame data will be stored in ECM.

*6: 1st trip DTC will be cleared after vehicle is driven once (pattern B) without the same malfunction.

*7: When the same malfunction is detected in the 2nd trip, the 1st trip freeze frame data will be cleared.

Explanation for Driving Patterns Except for “Misfire <Exhaust Quality Deterioration>”, “Fuel Injection System”

Driving Pattern A
Refer to EC-67, "DIAGNOSIS DESCRIPTION : Driving Pattern".

Driving Pattern B
Refer to EC-67, "DIAGNOSIS DESCRIPTION : Driving Pattern".

DIAGNOSIS DESCRIPTION : Driving Pattern

INFOID:0000000012406306

CAUTION:
Always drive at a safe speed.

DRIVING PATTERN A

Driving pattern A means a trip satisfying the following conditions.
- Engine speed reaches 400 rpm or more.
- Engine coolant temperature rises by 20°C (36°F) or more after starting the engine.
- Engine coolant temperature reaches 70°C (158°F) or more.
- The ignition switch is turned from ON to OFF.

NOTE:
- When the same malfunction is detected regardless of driving conditions, reset the counter of driving pattern A.
- When the above conditions are satisfied without detecting the same malfunction, reset the counter of driving pattern A.

DRIVING PATTERN B

Driving pattern B means a trip satisfying the following conditions.
- Engine speed reaches 400 rpm or more.
- Engine coolant temperature reaches 70°C (158°F) or more.
- Vehicle speed of 70 – 120 km/h (44 – 75 MPH) is maintained for 60 seconds or more under the control of closed loop.
- Vehicle speed of 30 – 60 km/h (19 – 37 MPH) is maintained for 10 seconds or more under the control of closed loop.
- Under the closed loop control condition, the following state reaches 12 seconds or more in total: Vehicle speed of 4 km/h (2 MPH) or less with idling condition.
- The state of driving at 10 km/h (7 MPH) or more reaches 10 minutes or more in total.
- A lapse of 22 minutes or more after engine start.

NOTE:
- Drive the vehicle at a constant velocity.
- When the same malfunction is detected regardless of driving conditions, reset the counter of driving pattern B.
- When the above conditions are satisfied without detecting the same malfunction, reset the counter of driving pattern B.

DRIVING PATTERN C

Driving pattern C means operating vehicle as per the following:
The following conditions should be satisfied at the same time:
Engine speed: (Engine speed in the freeze frame data) ±375 rpm

cardiagn.com

Calculated load value: (Calculated load value in the freeze frame data) x (1±0.1) [%]
Engine coolant temperature condition:
- When the freeze frame data shows lower than 70°C (158°F), engine coolant temperature should be lower than 70°C (158°F).
- When the freeze frame data shows higher than or equal to 70°C (158°F), engine coolant temperature should be higher than or equal to 70°C (158°F).

NOTE:
- When the same malfunction is detected regardless of the above vehicle conditions, reset the counter of driving pattern C.
- When the above conditions are satisfied without detecting the same malfunction, reset the counter of driving pattern C.
- The 1st trip DTC will be cleared when C counter is counted once without the same malfunction after DTC is stored in ECM.

DRIVING PATTERN D

Driving pattern D means a trip satisfying the following conditions.
- The state of driving at 40 km/h (25 MPH) reaches 300 seconds or more in total.
- Idle speed lasts 30 seconds or more.
- A lapse of 600 seconds or more after engine start.

NOTE:
- When the same malfunction is detected regardless of driving conditions, reset the counter of driving pattern D.
- When the above conditions are satisfied without detecting the same malfunction, reset the counter of driving pattern D.

DIAGNOSIS DESCRIPTION : System Readiness Test (SRT) Code

INFOID:0000000012406307

System Readiness Test (SRT) code is specified in Service $01 of SAE J1979/ISO 15031-5.
As part of an enhanced emissions test for Inspection & Maintenance (I/M), certain states require the status of SRT be used to indicate whether the ECM has completed self-diagnosis of major emission systems and components. Completion must be verified in order for the emissions inspection to proceed.
If a vehicle is rejected for a State emissions inspection due to one or more SRT items indicating “INCMP”, use the information in this Service Manual to set the SRT to “CMPLT”.
In most cases the ECM will automatically complete its self-diagnosis cycle during normal usage, and the SRT status will indicate “CMPLT” for each application system. Once set as “CMPLT”, the SRT status remains “CMPLT” until the self-diagnosis memory is erased.
Occasionally, certain portions of the self-diagnostic test may not be completed as a result of the customer's normal driving pattern; the SRT will indicate “INCMP” for these items.

NOTE:
The SRT will also indicate “INCMP” if the self-diagnosis memory is erased for any reason or if the ECM memory power supply is interrupted for several hours.
If, during the state emissions inspection, the SRT indicates “CMPLT” for all test items, the inspector will continue with the emissions test. However, if the SRT indicates “INCMP” for one or more of the SRT items the vehicle is returned to the customer untested.

NOTE:
If permanent DTC is stored or MIL illuminates during the state emissions inspection, the vehicle is also returned to the customer untested even though the SRT indicates “CMPLT” for all test items. Therefore, it is important to check SRT (“CMPLT”), DTC (No DTCs) and permanent DTC (NO permanent DTCs) before the inspection.

SRT SET TIMING

SRT is set as “CMPLT” after self-diagnosis has been performed one or more times. Completion of SRT is done regardless of whether the result is OK or NG. The set timing is different between OK and NG results and is shown in the table below.

cardiagn.com

Self-diagnosis result		Example				
		Diagnosis	Ignition cycle ← ON → OFF ← ON → OFF ← ON → OFF ← ON →			
All OK	Case 1	P0400	OK (1)	— (1)	OK (2)	— (2)
		P0402	OK (1)	— (1)	— (1)	OK (2)
		P1402	OK (1)	OK (2)	— (2)	— (2)
		SRT of EGR	“CMPLT”	“CMPLT”	“CMPLT”	“CMPLT”
	Case 2	P0400	OK (1)	— (1)	— (1)	— (1)
		P0402	— (0)	— (0)	OK (1)	— (1)
		P1402	OK (1)	OK (2)	— (2)	— (2)
		SRT of EGR	“INCMP”	“INCMP”	“CMPLT”	“CMPLT”
NG exists	Case 3	P0400	OK	OK	—	—
		P0402	—	—	—	—
		P1402	NG	—	NG	NG (Consecutive NG)
		(1st trip) DTC	1st trip DTC	—	1st trip DTC	DTC (= MIL ON)
		SRT of EGR	“INCMP”	“INCMP”	“INCMP”	“CMPLT”

OK: Self-diagnosis is carried out and the result is OK.

NG: Self-diagnosis is carried out and the result is NG.

—: Self-diagnosis is not carried out.

When all SRT related self-diagnoses show OK results in a single cycle (Ignition OFF-ON-OFF), the SRT will indicate “CMPLT”. → Case 1 above

When all SRT related self-diagnoses show OK results through several different cycles, the SRT will indicate “CMPLT” at the time the respective self-diagnoses have at least one OK result. → Case 2 above

If one or more SRT related self-diagnoses show NG results in 2 consecutive cycles, the SRT will also indicate “CMPLT”. → Case 3 above

The table above shows that the minimum number of cycles for setting SRT as “INCMP” is the number one (1) for each self-diagnosis (Case 1 & 2) or the number two (2) for one of self-diagnoses (Case 3). However, in preparation for the state emissions inspection, it is unnecessary for each self-diagnosis to be executed twice (Case 3) for the following reasons:

- The SRT will indicate “CMPLT” at the time the respective self-diagnoses have one (1) OK result.
- The emissions inspection requires “CMPLT” of the SRT only with OK self-diagnosis results.
- During SRT driving pattern, the 1st trip DTC (NG) is detected prior to “CMPLT” of SRT and the self-diagnosis memory must be erased from the ECM after repair.
- If the 1st trip DTC is erased, all the SRT will indicate “INCMP”.

NOTE:

SRT can be set as “CMPLT” together with the DTC(s). Therefore, DTC check must always be carried out prior to the state emission inspection even though the SRT indicates “CMPLT”.

DIAGNOSIS DESCRIPTION : Permanent Diagnostic Trouble Code (Permanent DTC)

INFOID:0000000012406308

Permanent DTC is defined in SAE J1979/ISO 15031-5 Service $0A.

ECM stores a DTC issuing a command of turning on MIL as a permanent DTC and keeps storing the DTC as a permanent DTC until ECM judges that there is no presence of malfunction.

Permanent DTCs cannot be erased by using the Erase function of CONSULT-III or Generic Scan Tool (GST) and by disconnecting the battery to shut off power to ECM. This prevents a vehicle from passing the state emission inspection without repairing a malfunctioning part.

When not passing the state emission inspection due to more than one permanent DTC, permanent DTCs should be erased, referring to this manual.

NOTE:

- The important items in state emission inspection are that MIL is not ON, SRT test items are set, and permanent DTCs are not included.
- Permanent DTCs do not apply for regions that permanent DTCs are not regulated by law.

cardiagn.com


PERMANENT DTC SET TIMING

The setting timing of permanent DTC is stored in ECM with the lighting of MIL when a DTC is confirmed.

DIAGNOSIS DESCRIPTION : Malfunction Indicator Lamp (MIL)

INFOID:0000000012406309

When emission-related ECU detects a malfunction in the emission control systems components and/or the powertrain control components (which affect vehicle emissions), it turns on/blinks MIL to inform the driver that a malfunction has been detected.

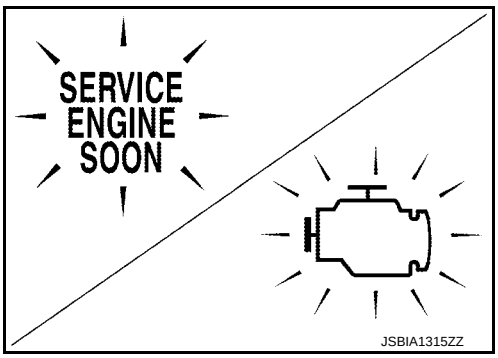

1. The MIL illuminates when ignition switch is turned ON (engine is not running).
   NOTE:
   Check the MIL circuit if MIL does not illuminate. Refer to EC-490, "Component Function Check".
2. When the engine is started, the MIL should go off.
   NOTE:
   If MIL continues to illuminate/blink, perform self-diagnoses and inspect/repair accordingly because an emission-related ECU has detected a malfunction in the emission control systems components and/or the powertrain control components (which affect vehicle emissions).

On Board Diagnosis Function

INFOID:0000000012406310

ON BOARD DIAGNOSIS ITEM

The on board diagnostic system has the following functions.

Diagnostic test mode	Function
Bulb check	MIL can be checked.
SRT status	ECM can read if SRT codes are set.
Malfunction warning	If ECM detects a malfunction, it illuminates or blinks MIL to inform the driver that a malfunction has been detected.
Self-diagnostic results	DTCs or 1st trip DTCs stored in ECM can be read.
Accelerator pedal released position learning	ECM can learn the accelerator pedal released position. Refer to EC-147, "Description".
Throttle valve closed position learning	ECM can learn the throttle valve closed position. Refer to EC-148, "Description".
Idle air volume learning	ECM can learn the idle air volume. Refer to EC-149, "Description".
Mixture ratio self-learning value clear	Mixture ratio self-learning value can be erased. Refer to EC-151, "Description".

BULB CHECK MODE

Description

This function allows damage inspection in the MIL bulb (blown, open circuit, etc.).

Operation Procedure

1. Turn ignition switch ON.
2. The MIL on the instrument panel should stay ON.
   If it remains OFF, check MIL circuit. Refer to EC-490, "Diagnosis Procedure".

SRT STATUS MODE

Description


This function allows to read if ECM has completed the self-diagnoses of major emission control systems and components. For SRT, refer to EC-68, "DIAGNOSIS DESCRIPTION : System Readiness Test (SRT) Code".

Operation Procedure

1. Turn ignition switch ON and wait 20 seconds.
2. SRT status is indicated as shown blow.
   - ECM continues to illuminate MIL if all SRT codes are set.

cardiagn.com

- ECM blinks MIL for about 10 seconds if all SRT codes are not set.

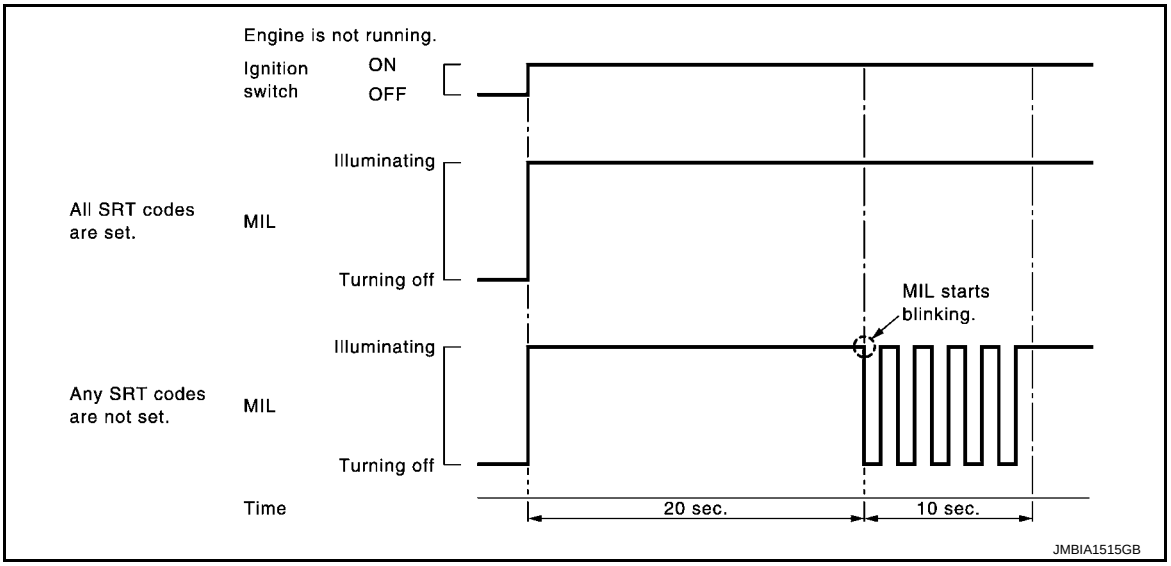

MALFUNCTION WARNING MODE

Description

In this function ECM turns on or blinks MIL when it detects a malfunction in the emission control system components and/or the powertrain control components (which affect vehicle emissions) to inform the driver that a malfunction has been detected.

Operation Procedure

1. Turn ignition switch ON.
2. Check that MIL illuminates.
   If it remains OFF, check MIL circuit. Refer to EC-490, "Diagnosis Procedure".
3. Start engine and let it idle.
   - For two trip detection logic diagnoses, ECM turns on MIL when it detects the same malfunction twice in the two consecutive driving cycles.
   - For 1st trip detection logic diagnoses, ECM turns on MIL when it detects a malfunction in one driving cycle.
   - ECM blinks MIL when it detects a malfunction that may damage the three way catalyst (misfire).

SELF-DIAGNOSTIC RESULTS MODE

Description

This function allows to indicate DTCs or 1st trip DTCs stored in ECM according to the number of times MIL is blinking.

How to Set Self-diagnostic Results Mode


NOTE:

- It is better to count the time accurately with a clock.
- It is impossible to switch the diagnostic mode when an accelerator pedal position sensor circuit has a malfunction.
- After ignition switch is turned off, ECM is always released from the “self-diagnostic results” mode.

1. Confirm that accelerator pedal is fully released, turn ignition switch ON and wait 3 seconds.
2. Repeat the following procedure quickly five times within 5 seconds.
   - Fully depress the accelerator pedal.
   - Fully release the accelerator pedal.
3. Wait 7 seconds, fully depress the accelerator pedal and keep it depressed for approx. 10 seconds until the MIL starts blinking.
   NOTE:
   Do not release the accelerator pedal for 10 seconds if MIL starts blinking during this period. This blinking is displaying SRT status and is continued for another 10 seconds.
4. Fully release the accelerator pedal.
   ECM has entered to “Self-diagnostic results” mode.

cardiagn.com


NOTE:
Wait until the same DTC (or 1st trip DTC) appears to completely confirm all DTCs.

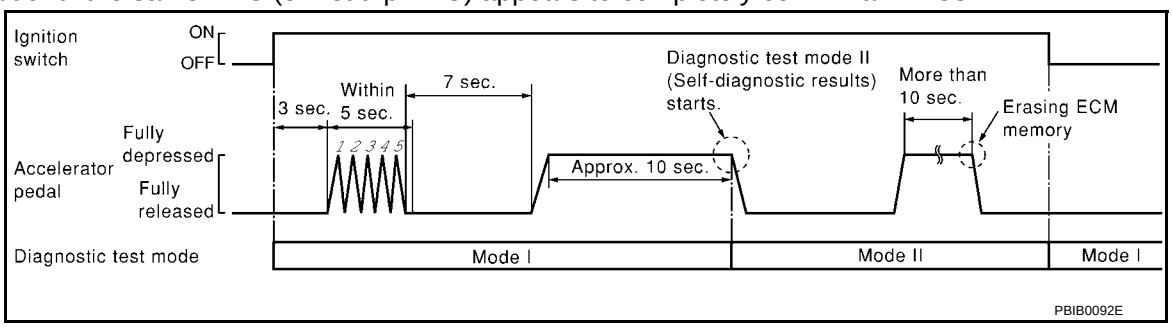

How to Read Self-diagnostic Results

The DTC and 1st trip DTC are indicated by the number of blinks of the MIL as shown below.

The DTC and 1st trip DTC are displayed at the same time. If the MIL does not illuminate in diagnostic test mode I (Malfunction warning), all displayed items are 1st trip DTCs. If only one code is displayed when the MIL illuminates in “malfunction warning” mode, it is a DTC; if two or more codes are displayed, they may be either DTCs or 1st trip DTCs. DTC No. is same as that of 1st trip DTC. These unidentified codes can be identified by using the CONSULT or GST. A DTC will be used as an example for how to read a code.

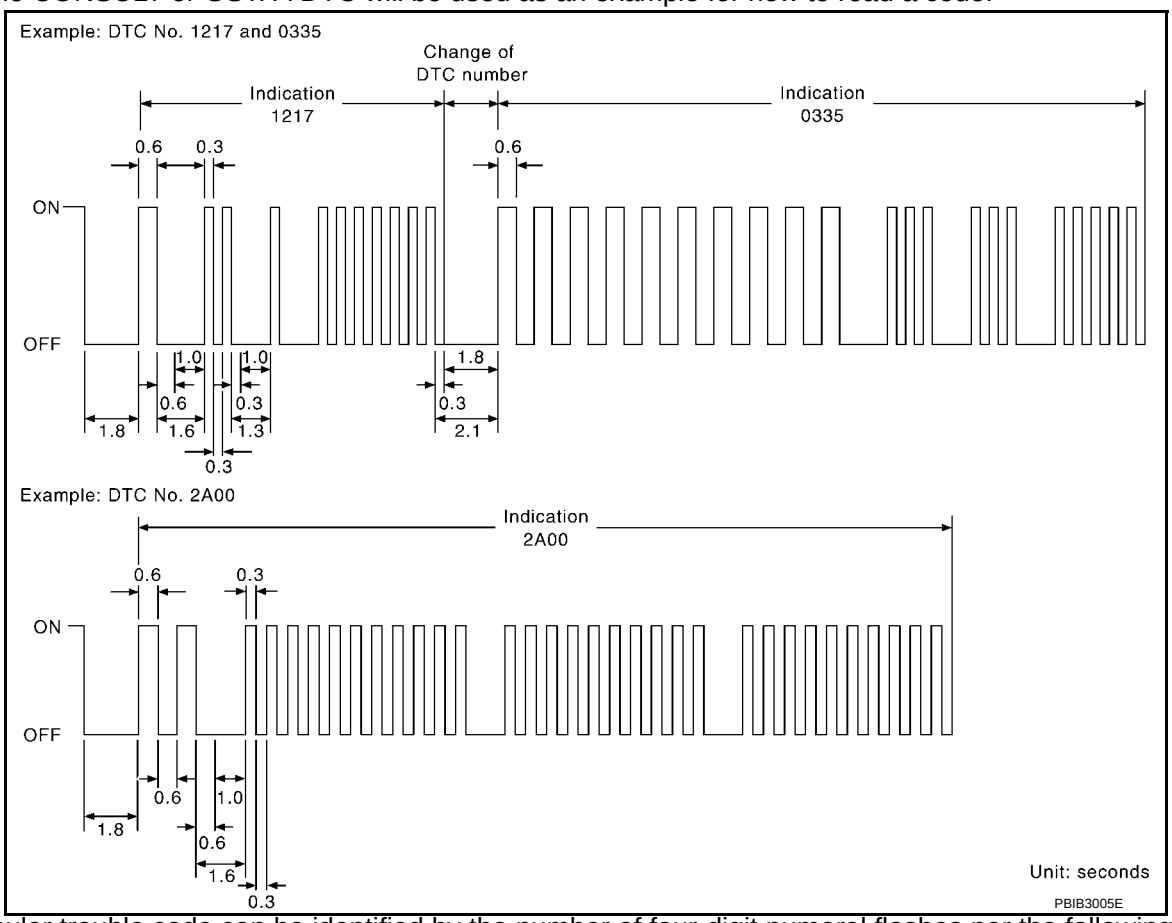

A particular trouble code can be identified by the number of four-digit numeral flashes per the following.

Number	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
Flashes	10	1	2	3	4	5	6	7	8	9	11	12	13	14	15	16

The length of time the 1,000th-digit numeral flashes on and off is 1.2 seconds consisting of an ON (0.6-seconds) - OFF (0.6-seconds) cycle.

The 100th-digit numeral and lower digit numerals consist of a 0.3-seconds ON and 0.3-seconds OFF cycle.

A change from one digit numeral to another occurs at an interval of 1.0-second OFF. In other words, the later numeral appears on the display 1.3 seconds after the former numeral has disappeared.

A change from one trouble code to another occurs at an interval of 1.8-seconds OFF.

cardiagn.com

In this way, all the detected malfunctions are classified by their DTC numbers. The DTC 0000 refers to no malfunction. Refer to EC-103, "DTC Index".

How to Erase Self-diagnostic Results

By performing this procedure, ECM memory is erased and the following diagnostic information is erased as well.

- Diagnostic trouble codes
- 1st trip diagnostic trouble codes
- Freeze frame data
- 1st trip freeze frame data
- System readiness test (SRT) codes
- Test values

NOTE:

Also, if a battery terminal is disconnected, ECM memory is erased and the diagnostic information as listed above is erased. (The amount of time required for erasing may vary from a few seconds to several hours.)

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. Set ECM in “self-diagnostic results” mode.
6. The diagnostic information has been erased from the backup memory in the ECM.
   Fully depress the accelerator pedal and keep it depressed for more than 10 seconds.
7. Fully release the accelerator pedal, and confirm the DTC 0000 is displayed.

CONSULT Function

INFOID:0000000012406311

FUNCTION

Diagnostic test mode	Function
Self Diagnostic Result	Self-diagnostic results such as 1st trip DTC, DTCs and 1st trip freeze frame data or freeze frame data can be read and erased quickly.*
Data Monitor	Input/Output data in the ECM can be read.
Work support	This mode enables a technician to adjust some devices faster and more accurately by following the indications on the CONSULT unit.
Active Test	Diagnostic Test Mode in which CONSULT drives some actuators apart from the ECMs and also shifts some parameters in a specified range.
ECU Identification	ECM part number can be read.
DTC Work Support	The status of system monitoring tests and the self-diagnosis status/results can be confirmed.

*: The following emission-related diagnostic information is cleared when the ECM memory is erased.

- Diagnostic trouble codes
- 1st trip diagnostic trouble codes
- Freeze frame data
- 1st trip freeze frame data
- System readiness test (SRT) codes
- Test values

SELF DIAGNOSTIC RESULT MODE

Self Diagnostic Item

Regarding items of DTC and 1st trip DTC, refer to EC-103, "DTC Index".

How to Read DTC and 1st Trip DTC

DTCs and 1st trip DTCs related to the malfunction are displayed in “self-diag results”.

- When ECM detects a 1st trip DTC, 1t” is displayed for “TIME”.
- When ECM has detected a current DTC, “0” is displayed for “TIME”.
- If “TIME” is neither “0” nor “1t”, the DTC occurred in the past and ECM shows the number of times the vehicle has been driven since the last detection of the DTC.

cardiagn.com

How to Erase DTC and 1st Trip DTC

NOTE:

- If the ignition switch stays ON after repair work, be sure to turn ignition switch OFF once. Wait at least 10 seconds and then turn it ON (engine stopped) again.
- If the DTC is not for A/T related items (see EC-103, "DTC Index"), skip step 1.

1. Select “ENGINE” with CONSULT.
2. Select “SELF-DIAG RESULTS”.
3. Touch “ERASE”. (DTC in ECM will be erased.)

Freeze Frame Data and 1st Trip Freeze Frame Data

Freeze frame data item*	Description
DIAG TROUBLE CODE [PXXXX]	• The engine control component part/control system has a trouble code that is displayed as PXXXX. (Refer to EC-103, "DTC Index".)
FUEL SYS-B1	• “Fuel injection system status” at the moment a malfunction is detected is displayed. • One of the following mode is displayed. Mode2: Open loop due to detected system malfunction Mode3: Open loop due to driving conditions (power enrichment, deceleration enleanment) Mode4: Closed loop - using oxygen sensor(s) as feedback for fuel control Mode5: Open loop - has not yet satisfied condition to go to closed loop
FUEL SYS-B2	
CAL/LD VALUE [%]	• The calculated load value at the moment a malfunction is detected is displayed.
COOLANT TEMP [°C] or [°F]	• The engine coolant temperature at the moment a malfunction is detected is displayed.
L-FUEL TRM-B1 [%]	• “Long-term fuel trim” at the moment a malfunction is detected is displayed. • The long-term fuel trim indicates much more gradual feedback compensation to the base fuel schedule than short-term fuel trim.
L-FUEL TRM-B2 [%]	
S-FUEL TRM-B1 [%]	• “Short-term fuel trim” at the moment a malfunction is detected is displayed. • The short-term fuel trim indicates dynamic or instantaneous feedback compensation to the base fuel schedule.
S-FUEL TRM-B2 [%]	
ENGINE SPEED [rpm]	• The engine speed at the moment a malfunction is detected is displayed.
VEHICL SPEED [km/h] or [mph]	• The vehicle speed at the moment a malfunction is detected is displayed.
ABSOL TH·P/S [%]	• The throttle valve opening angle at the moment a malfunction is detected is displayed.
B/FUEL SCHDL [msec]	• The base fuel schedule at the moment a malfunction is detected is displayed.
INT/A TEMP SE [°C] or [°F]	• The intake air temperature at the moment a malfunction is detected is displayed.
INT MANI PRES [kPa]	• These items are displayed but are not applicable to this model.
COMBUST CONDITION	

*: The items are the same as those of 1st trip freeze frame data.

DATA MONITOR MODE

NOTE:

The following table includes information (items) inapplicable to this vehicle. For information (items) applicable to this vehicle, refer to CONSULT display items.

Monitored Item

For reference values of the following items, refer to EC-83, "Reference Value".

Monitored item	Unit	Description	Remarks
ENG SPEED	rpm	• Indicates the engine speed computed from the signal of the crankshaft position sensor (POS) and camshaft position sensor (PHASE).	• Accuracy becomes poor if engine speed drops below the idle rpm. • If the signal is interrupted while the engine is running, an abnormal value may be indicated.
MASS AIR FLOW SENSOR (Hz)	Hz	• The signal frequency of the mass air flow sensor is displayed.	

cardiagn.com

Monitored item	Unit	Description	Remarks
B/FUEL SCHDL	msec	• "Base fuel schedule" indicates the fuel injection pulse width programmed into ECM, prior to any learned on board correction.	• When engine is running, specification range is indicated in "SPEC".
A/F ALPHA-B1 A/F ALPHA-B2	%	• The mean value of the air-fuel ratio feedback correction factor per cycle is indicated.	• When the engine is stopped, a certain value is indicated. • This data also includes the data for the air-fuel ratio learning control. • When engine is running, specification range is indicated in "SPEC".
COOLAN TEMP/S	°C or °F	• The engine coolant temperature (determined by the signal voltage of the engine coolant temperature sensor) is displayed.	• When the engine coolant temperature sensor is open or short-circuited, ECM enters fail-safe mode. The engine coolant temperature determined by the ECM is displayed.
A/F SEN1 (B1) A/F SEN1 (B2)	V	• The A/F signal computed from the input signal of the air fuel ratio (A/F) sensor 1 is displayed.	
HO2S2 (B1) HO2S2 (B2)	V	• The signal voltage of the heated oxygen sensor 2 is displayed.	
HO2S2 MNTR(B1) HO2S2 MNTR(B2)	RICH/LEAN	• Display of heated oxygen sensor 2 signal: RICH: means the amount of oxygen after three way catalyst is relatively small. LEAN: means the amount of oxygen after three way catalyst is relatively large.	• When the engine is stopped, a certain value is indicated.
VHCL SPEED SE	km/h or mph	• The vehicle speed computed from the vehicle speed signal sent from combination meter is displayed.	
BATTERY VOLT	V	• The power supply voltage of ECM is displayed.	
ACCEL SEN 1 ACCEL SEN 2	V	• The accelerator pedal position sensor signal voltage is displayed.	• ACCEL SEN 2 signal is converted by ECM internally. Thus, it differs from ECM terminal voltage signal.
TP SEN 1-B1 TP SEN 2-B1	V	• The throttle position sensor signal voltage is displayed.	• TP SEN 2-B1 signal is converted by ECM internally. Thus, it differs from ECM terminal voltage signal.
FUEL T/TMP SE	°C or °F	• The fuel temperature (determined by the signal voltage of the fuel tank temperature sensor) is displayed.	
INT/A TEMP SE	°C or °F	• The intake air temperature (determined by the signal voltage of the intake air temperature sensor) is indicated.	
EVAP SYS PRES	V	• The signal voltage of EVAP control system pressure sensor is displayed.	
FUEL LEVEL SE	V	• The signal voltage of the fuel level sensor is displayed.	
START SIGNAL	ON/OFF	• Indicates start signal status [ON/OFF] computed by the ECM according to the signals of engine speed and battery voltage.	• After starting the engine, [OFF] is displayed regardless of the starter signal.
CLSD THL POS	ON/OFF	• Indicates idle position [ON/OFF] computed by ECM according to the accelerator pedal position sensor signal.	
AIR COND SIG	ON/OFF	• Indicates [ON/OFF] condition of the air conditioner switch as determined by the air conditioner signal.	
P/N POSI SW	ON/OFF	• Indicates [ON/OFF] condition from the park/neutral position (PNP) signal.	

cardiagn.com

Monitored item	Unit	Description	Remarks
PW/ST SIGNAL	ON/OFF	• [ON/OFF] condition of the power steering system (determined by the signal voltage of the power steering pressure sensor) is indicated.	
LOAD SIGNAL	ON/OFF	• Indicates [ON/OFF] condition from the electrical load signal. ON: Rear window defogger switch is ON and/or lighting switch is in 2nd position. OFF: Both rear window defogger switch and lighting switch are OFF.	
IGNITION SW	ON/OFF	• Indicates [ON/OFF] condition from ignition switch signal.	
HEATER FAN SW	ON/OFF	• Indicates [ON/OFF] condition from the heater fan switch signal.	
BRAKE SW	ON/OFF	• Indicates [ON/OFF] condition from the stop lamp switch signal.	
INJ PULSE-B1 INJ PULSE-B2	msec	• Indicates the actual fuel injection pulse width compensated by ECM according to the input signals.	• When the engine is stopped, a certain computed value is indicated.
IGN TIMING	BTDC	• Indicates the ignition timing computed by ECM according to the input signals.	• When the engine is stopped, a certain value is indicated.
CAL/LD VALUE	%	• “Calculated load value” indicates the value of the current air flow divided by peak air flow.	
MASS AIRFLOW	g/s	• Indicates the mass air flow computed by ECM according to the signal voltage of the mass air flow sensor.	
PURG VOL C/V	%	• Indicates the EVAP canister purge volume control solenoid valve control value computed by the ECM according to the input signals. • The opening becomes larger as the value increases.	
INT/V TIM (B1) INT/V TIM (B2)	°CA	• Indicates [°CA] of intake camshaft advance angle.	
INT/V SOL-B1 INT/V SOL-B2	%	• The control value of the intake valve timing control solenoid valve (determined by ECM according to the input signals) is indicated. • The advance angle becomes larger as the value increases.	
VIAS S/V-1	ON/OFF	• The control condition of the VIAS control solenoid valve 1 (determined by ECM according to the input signals) is indicated. ON: VIAS control solenoid valve 1 is operating. OFF: VIAS control solenoid valve 1 is not operating.	
VIAS S/V-2	ON/OFF	• The control condition of the VIAS control solenoid valve 2 (determined by ECM according to the input signals) is indicated. ON: VIAS control solenoid valve 2 is operating. OFF: VIAS control solenoid valve 2 is not operating.	
AIR COND RLY	ON/OFF	• The air conditioner relay control condition (determined by ECM according to the input signals) is indicated.	
ENGINE MOUNT	IDLE/TRVL	• The control condition of the electronic controlled engine mount (determined by ECM according to the input signals) is indicated. IDLE: Engine speed is below 950 rpm TRVL: Engine speed is above 950 rpm	

cardiagn.com

Monitored item	Unit	Description	Remarks
VENT CONT/V	ON/OFF	• The control condition of the EVAP canister vent control valve (determined by ECM according to the input signals) is indicated. ON: Closed OFF: Open	
THRTL RELAY	ON/OFF	• Indicates the throttle control motor relay control condition determined by the ECM according to the input signals.	
COOLING FAN	HI/MID/LOW/ OFF	• The control condition of the cooling fan (determined by ECM according to the input signals) is indicated. HI: High speed operation MID: Middle speed operation LOW: Low speed operation OFF: Stop	
HO2S2 HTR (B1)	ON/OFF	• Indicates [ON/OFF] condition of heated oxygen sensor 2 heater determined by ECM according to the input signals.	
HO2S2 HTR (B2)			
I/P PULLY SPD	rpm	• Indicates the engine speed computed from the input speed sensor signal.	
VEHICLE SPEED	km/h or mph	• The vehicle speed computed from the vehicle speed signal sent from TCM is displayed.	
IDL A/V LEARN	YET/CMPLT	• Displays the condition of idle air volume learning YET: Idle Air Volume Learning has not been performed yet. CMPLT: Idle Air Volume Learning has already been performed successfully.	
ENG OIL TEMP	°C or °F	• The engine oil temperature (determined by the signal voltage of the engine oil temperature sensor) is displayed.	
TRVL AFTER MIL	km or mile	• Distance traveled while MIL is activated.	
A/F S1 HTR(B1)	%	• Air fuel ratio (A/F) sensor 1 heater control value computed by ECM according to the input signals. • The current flow to the heater becomes larger as the value increases.	
A/F S1 HTR(B2)			
AC PRESS SEN	V	• The signal voltage from the refrigerant pressure sensor is displayed.	
VHCL SPEED SE	km/h or mph	• The vehicle speed computed from the vehicle speed signal sent from combination meter is displayed.	
SET VHCL SPD	km/h or mph	• The preset vehicle speed is displayed.	
MAIN SW	ON/OFF	• Indicates [ON/OFF] condition from MAIN switch signal.	
CANCEL SW	ON/OFF	• Indicates [ON/OFF] condition from CANCEL switch signal.	
RESUME/ACC SW	ON/OFF	• Indicates [ON/OFF] condition from RESUME/ACCELERATE switch signal.	
SET SW	ON/OFF	• Indicates [ON/OFF] condition from SET/COAST switch signal.	
BRAKE SW1	ON/OFF	• Indicates [ON/OFF] condition from brake pedal position switch signal or ASCD clutch switch.	
BRAKE SW2	ON/OFF	• Indicates [ON/OFF] condition of stop lamp switch signal.	

cardiagn.com

Monitored item	Unit	Description	Remarks
VHCL SPD CUT	NON/CUT	• Indicates the vehicle cruise condition. NON: Vehicle speed is maintained at the ASCD set speed. CUT: Vehicle speed decreased to excessively low compared with the ASCD set speed, and ASCD operation is cut off.	
LO SPEED CUT	NON/CUT	• Indicates the vehicle cruise condition. NON: Vehicle speed is maintained at the ASCD set speed. CUT: Vehicle speed decreased to excessively low, and ASCD operation is cut off.	
AT OD MONITOR	ON/OFF	• Indicates [ON/OFF] condition of CVT O/D according to the input signal from the TCM.	
AT OD CANCEL	ON/OFF	• Indicates [ON/OFF] condition of CVT O/D cancel request signal.	
CRUISE LAMP	ON/OFF	• Indicates [ON/OFF] condition of CRUISE lamp determined by the ECM according to the input signals.	
SET LAMP	ON/OFF	• Indicates [ON/OFF] condition of SET lamp determined by the ECM according to the input signals.	
BAT CUR SEN	mV	• The signal voltage of battery current sensor is displayed.	
ALT DUTY SIG	ON/OFF	• The control condition of the power generation voltage variable control (determined by ECM according to the input signals) is indicated. ON: Power generation voltage variable control is active. OFF: Power generation voltage variable control is inactive.	
A/F ADJ-B1 A/F ADJ-B2	—	• Indicates the correction of a factor stored in ECM. The factor is calculated from the difference between the target air-fuel ratio stored in ECM and the air-fuel ratio calculated from A/F sensor 1 signal.	
ALT DUTY	%	• Indicates the duty ratio of the power generation command value. The ratio is calculated by ECM based on the battery current sensor signal.	
EVAP LEAK DIAG	YET/CMPLT	• Indicates the condition of EVAP leak diagnosis. - YET: EVAP leak diagnosis has not been performed yet. - CMPLT: EVAP leak diagnosis has been performed successfully.	
EVAP DIAG READY	ON/OFF	• Indicates the ready condition of EVAP leak diagnosis. - ON: Diagnosis has been ready condition. - OFF: Diagnosis has not been ready condition.	
HO2 S2 DIAG1 (B1)	INCMP/CMPLT	• Indicates DTC P0139 self-diagnosis (delayed responce) condition. INCMP: Self-diagnosis is incomplete. CMPLT: Self-diagnosis is complete.	
HO2 S2 DIAG1 (B2)	INCMP/CMPLT	• Indicates DTC P0139 self-diagnosis (delayed responce) condition. INCMP: Self-diagnosis is incomplete. CMPLT: Self-diagnosis is complete.	
HO2 S2 DIAG2 (B1)	INCMP/CMPLT	• Indicates DTC P0139 self-diagnosis (slow responce) condition. INCMP: Self-diagnosis is incomplete. CMPLT: Self-diagnosis is complete.	

cardiagn.com

Monitored item	Unit	Description	Remarks
HO2 S2 DIAG2 (B2)	INCMP/CMPLT	• Indicates DTC P0139 self-diagnosis (slow responce) condition. INCMP: Self-diagnosis is incomplete. CMPLT: Self-diagnosis is complete.	
THRTL STK CNT B1*	—	—	
FUEL PUMP DUTY	%	• The control condition of the fuel pump control module (FPCM) (determined by ECM according to the input signals) is indicated.	
BAT TEMP SEN	V	• The signal voltage from the battery temperature sensor is displayed.	
EOP SENSOR	mV	The signal voltage of EOP sensor is displayed.	
VTC DTY EX B1*	%	—	
VTC DTY EX B2*	%	—	
A/F-S ATMSPHRC CRCT B1	—	Displays a determined value of atmospheric correction factor necessary for correcting an A/F sensor signal input to ECM. The signal used for the correction is an A/F sensor signal transmitted while driving under atmospheric pressure.	
A/F-S ATMSPHRC CRCT B2	—	Displays a determined value of atmospheric correction factor necessary for correcting an A/F sensor signal input to ECM. The signal used for the correction is an A/F sensor signal transmitted while driving under atmospheric pressure.	
A/F-S ATMSPHRC CRCT UP B1	count	Displays the number of updates of the A/F sensor atmospheric correction factor.	
A/F-S ATMSPHRC CRCT UP B2	count	Displays the number of updates of the A/F sensor atmospheric correction factor.	
SYSTEM 1 DIAGNOSIS A B2	INCMP/CMPLT	• Indicates DTC P219B self-diagnosis condition. - INCMP: Self-diagnosis is incomplete. - CMPLT: Self-diagnosis is complete.	
SYSTEM 1 DIAGNOSIS A B1	INCMP/CMPLT	• Indicates DTC P219A self-diagnosis condition. - INCMP: Self-diagnosis is incomplete. - CMPLT: Self-diagnosis is complete.	
SYSTEM 1 DIAGNOSIS B B2	ABSNT/PRSNT	• Indicates DTC P219B self-diagnosis condition. - ABSNT: Self-diagnosis standby - PRSNT: Under self-diagnosis	
SYSTEM 1 DIAGNOSIS B B1	ABSNT/PRSNT	• Indicates DTC P219A self-diagnosis condition. - ABSNT: Self-diagnosis standby - PRSNT: Under self-diagnosis	

*: The item is indicated, but not used.

NOTE:

Any monitored item that does not match the vehicle being diagnosed is deleted from the display automatically.

WORK SUPPORT MODE

Work Item

WORK ITEM	CONDITION	USAGE
FUEL PRESSURE RELEASE	• Fuel pump will stop by touching “START” during idling. crank a few times after engine stalls.	When releasing fuel pressure from fuel line
IDLE AIR VOL LEARN	• The idle air volume that keeps the engine within the specified range is memorized in ecm.	When learning the idle air volume
SELF-LEARNING CONT	• The coefficient of self-learning control mixture ratio returns to the original coefficient.	When clearing mixture ratio self-learning value

cardiagn.com

WORK ITEM	CONDITION	USAGE
EVAP SYSTEM CLOSE	Close the EVAP canister vent control valve in order to make EVAP system close under the following conditions. • Ignition switch ON • Engine not running • Ambient temperature is above 0°C (32°F). • No vacuum and no high pressure in EVAP system • Fuel tank temperature is more than 0°C (32°F). • Within 10 minutes after starting “EVAP SYSTEM CLOSE” • When trying to execute “EVAP SYSTEM CLOSE” under the condition except above, CONSULT will discontinue it and display appropriate instruction. **NOTE:** **When starting engine, CONSULT may display “BATTERY VOLTAGE IS LOW. CHARGE BATTERY”, even in using charged battery.**	When detecting EVAP vapor leakage in the EVAP system
VIN REGISTRATION	• In this mode, VIN is registered in ECM	When registering VIN in ECM
TARGET IDLE RPM ADJ*	• Idle condition	When setting target idle speed
TARGET IGN TIM ADJ*	• Idle condition	When adjusting target ignition timing
CLSD THL POS LEARN	• Ignition on and engine stopped.	When learning the throttle valve closed position
SAVING DATA FOR REPLC CPU	In this mode, save data that is in ECM.	When ECM is replaced.
WRITING DATA FOR REPLC CPU	In this mode, write data stored by “SAVE DATA FOR CPU REPLC” in work support mode to ECM.	When ECM is replaced.

*: This function is not necessary in the usual service procedure.

ACTIVE TEST MODE

Test Item

TEST ITEM	CONDITION	JUDGMENT	CHECK ITEM (REMEDY)
FUEL INJECTION	• Engine: Return to the original non-standard condition • Change the amount of fuel injection using CONSULT.	If malfunctioning symptom disappears, see CHECK ITEM.	• Harness and connectors • Fuel injector • Air fuel ratio (A/F) sensor 1
IGNITION TIMING	• Engine: Return to the original non-standard condition • Timing light: Set • Retard the ignition timing using CONSULT.	If malfunctioning symptom disappears, see CHECK ITEM.	• Perform Idle Air Volume Learning.
POWER BALANCE	• Engine: After warming up, idle the engine. • A/C switch OFF • Selector lever: P or N position • Cut off each injector signal one at a time using CONSULT.	Engine runs rough or stops.	• Harness and connectors • Compression • Fuel injector • Power transistor • Spark plug • Ignition coil
COOLING FAN*	• Ignition switch: ON • Turn the cooling fan “HI”, “MID”, “LOW” and “OFF” using CONSULT.	Cooling fan moves and stops.	• Harness and connectors • Cooling fan motor • IPDM E/R
ENG COOLANT TEMP	• Engine: Return to the original non-standard condition • Change the engine coolant temperature using CONSULT.	If malfunctioning symptom disappears, see CHECK ITEM.	• Harness and connectors • Engine coolant temperature sensor • Fuel injector
FUEL PUMP RELAY	• Ignition switch: ON (Engine stopped) • Turn the fuel pump relay “ON” and “OFF” using CONSULT and listen to operating sound.	Fuel pump relay makes the operating sound.	• Harness and connectors • Fuel pump relay

cardiagn.com

TEST ITEM	CONDITION	JUDGMENT	CHECK ITEM (REMEDY)
VIAS S/V-1	• Ignition switch: ON • Turn solenoid valve “ON” and “OFF” using CONSULT and listen to operating sound.	Solenoid valve makes the operating sound.	• Harness and connectors • Solenoid valve
VIAS S/V-2	• Ignition switch: ON • Turn solenoid valve “ON” and “OFF” using CONSULT and listen to operating sound.	Solenoid valve makes the operating sound.	• Harness and connectors • Solenoid valve
ENGINE MOUNTING	• Ignition switch: ON • Turn electronic controlled engine mount “IDLE” and “TRVL” with CONSULT.	Electronic controlled engine mount makes the operating sound.	• Harness and connectors • Electronic controlled engine mount
PURG VOL CONT/V	• Engine: After warming up, run engine at 1,500 rpm. • Change the EVAP canister purge volume control solenoid valve opening percent using CONSULT.	Engine speed changes according to the opening percent.	• Harness and connectors • Solenoid valve
FUEL/T TEMP SEN	• Change the fuel tank temperature using CONSULT.		
VENT CONTROL/V	• Ignition switch: ON (Engine stopped) • Turn solenoid valve “ON” and “OFF” with the CONSULT and listen to operating sound.	Solenoid valve makes an operating sound.	• Harness and connectors • Solenoid valve
INT V/T ASSIGN ANGLE	• Engine: Return to the original non-standard condition • Change intake valve timing using CONSULT.	If malfunctioning symptom disappears, see CHECK ITEM.	• Harness and connectors • Intake valve timing control solenoid valve
EXH V/T ASSIGN ANGLE	• Engine: Return to the original non-standard condition • Change exhaust valve timing using CONSULT.	If malfunctioning symptom disappears, see CHECK ITEM.	• Harness and connectors • Exhaust valve timing control solenoid valve

*: Leaving cooling fan OFF with CONSULT while engine is running may cause the engine to overheat.

DTC WORK SUPPORT MODE

Test Item

Test mode	Test item	Corresponding DTC No.	Reference page
EVAPORATIVE SYSTEM	EVP V/S LEAK P0456/P1456*	P0456	EC-341
	PURG VOL CN/V P1444	P0443	EC-315
	PURG FLOW P0441	P0441	EC-310
A/F SEN1	A/F SEN1(B1) P1278/P1279	—	—
	A/F SEN1(B1) P1276	P0130	EC-229
	A/F SEN1(B2) P1288/P1289	—	—
	A/F SEN1(B2) P1286	P0150	EC-229
HO2S2	HO2S2(B1) P1146	P0138	EC-245
	HO2S2(B1) P1147	P0137	EC-239
	HO2S2(B1) P0139	P0139	EC-252
	HO2S2(B2) P1166	P0158	EC-245
	HO2S2(B2) P1167	P0157	EC-239
	HO2S2(B2) P0159	P0159	EC-252

*: DTC P1442 and P1456 does not apply to this model but appears in DTC Work Support Mode screens.

cardiagn.com

SRT & P-DTC MODE

SRT STATUS Mode

- For items whose SRT codes are set, “CMPLT” is displayed on the CONSULT screen; for items whose SRT codes are not set, “INCMP” is displayed.
- “SRT STATUS” provides the presence or absence of permanent DTCs stored in ECM memory.

PERMANENT DTC STATUS Mode

How to display permanent DTC status

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. Select “PERMANENT DTC STATUS” in “DTC & SRT CONFIRMATION” mode with CONSULT.

NOTE:
Permanent DTCs stored in ECM memory are displayed on the CONSULT screen to show if a driving pattern required for erasing permanent DTCs is complete (CMPLT) or incomplete (INCMP).

CAUTION:
Since the “PERMANENT DTC STATUS” screen displays the previous trip information, repeat the following twice to update the information: “Ignition switch OFF”, “Wait for more than 10 seconds” and “Ignition switch ON”.

PERMANENT DTC & SRT CONFIRMATION : PERMANENT DTC STATUS

CAUTION:
Turn ignition switch from ON to OFF twice to update the information on the status screen.

PERMANENT DTC	DRIVING PATTERN B	DRIVING PATTERN D
XXXX	INCMP	INCMP
XXXX	CMPLT	INCMP
XXXX	INCMP	CMPLT
XXXX	CMPLT	INCMP
XXXX	INCMP	INCMP
XXXX	INCMP	INCMP

The previous trip information is displayed.

JSBIA0062GB

NOTE:
This mode is not used in regions that permanent DTCs are not regulated by law.

SRT WORK SUPPORT Mode

This mode enables a technician to drive a vehicle to set the SRT while monitoring the SRT status.

PERMANENT DTC WORK SUPPORT Mode

This mode enables a technician to drive a vehicle to complete the driving pattern that is required for erasing permanent DTC.

NOTE:
This mode is not used in regions that permanent DTCs are not regulated by law.

cardiagn.com

ECU DIAGNOSIS INFORMATION

ECM

Reference Value

INFOID:0000000012406312

VALUES ON THE DIAGNOSIS TOOL

NOTE:

- The following table includes information (items) inapplicable to this vehicle. For information (items) applicable to this vehicle, refer to CONSULT display items.
- Numerical values in the following table are reference values.
- These values are input/output values that ECM receives/transmits and may differ from actual operations.

Example: The ignition timing shown by the timing light may differ from the ignition timing displayed on the data monitor. This occurs because the timing light shows a value calculated by ECM according to signals received from the cam shaft position sensor and other sensors related to ignition timing.

For outlines of following items, refer to EC-73, "CONSULT Function".

Monitor Item	Condition		Values/Status
ENG SPEED	Run engine and compare CONSULT value with the tachometer indication.		Almost the same speed as the tachometer indication.
MASS AIR FLOW SENSOR (Hz)	See EC-167, "Description".		
B/FUEL SCHDL	See EC-167, "Description".		
A/F ALPHA-B1	See EC-167, "Description".		
A/F ALPHA-B2	See EC-167, "Description".		
COOLANT TEMP/S	• Engine: After warming up		More than 70°C (158°F)
A/F SEN1 (B1)	• Engine: After warming up	Maintaining engine speed at 2,000 rpm	Fluctuates around 2.2 V
A/F SEN1 (B2)	• Engine: After warming up	Maintaining engine speed at 2,000 rpm	Fluctuates around 2.2 V
HO2S2 (B1)	• Revving engine from idle to 3,000 rpm quickly after the following conditions are met. - Engine: After warming up - After keeping engine speed between 3,500 and 4,000 rpm for 1 minute and at idle for 1 minute under no load		0 - 0.3 V ←→ Approx. 0.6 - 1.0 V
HO2S2 (B2)	• Revving engine from idle to 3,000 rpm quickly after the following conditions are met. - Engine: After warming up - After keeping engine speed between 3,500 and 4,000 rpm for 1 minute and at idle for 1 minute under no load		0 - 0.3 V ←→ Approx. 0.6 - 1.0 V
HO2S2 MNTR (B1)	• Revving engine from idle to 3,000 rpm quickly after the following conditions are met. - Engine: After warming up - After keeping engine speed between 3,500 and 4,000 rpm for 1 minute and at idle for 1 minute under no load		LEAN ←→ RICH
HO2S2 MNTR (B2)	• Revving engine from idle to 3,000 rpm quickly after the following conditions are met. - Engine: After warming up - After keeping engine speed between 3,500 and 4,000 rpm for 1 minute and at idle for 1 minute under no load		LEAN ←→ RICH
VHCL SPEED SE	• Turn drive wheels and compare CONSULT value with the speedometer indication.		Almost the same speed as speedometer indication
BATTERY VOLT	• Ignition switch: ON (Engine stopped)		11 - 14 V
ACCEL SEN 1	• Ignition switch: ON (Engine stopped)	Accelerator pedal: Fully released	0.5 - 1.0 V
		Accelerator pedal: Fully depressed	4.2 - 4.8 V
ACCEL SEN 2*1	• Ignition switch: ON (Engine stopped)	Accelerator pedal: Fully released	0.5 - 1.0 V
		Accelerator pedal: Fully depressed	4.2 - 4.8 V

cardiagn.com

Monitor Item	Condition		Values/Status
TP SEN 1-B1	• Ignition switch: ON (Engine stopped) • Selector lever: D position	Accelerator pedal: Fully released	More than 0.36 V
		Accelerator pedal: Fully depressed	Less than 4.75 V
TP SEN 2-B1*1	• Ignition switch: ON (Engine stopped) • Selector lever: D position	Accelerator pedal: Fully released	More than 0.36 V
		Accelerator pedal: Fully depressed	Less than 4.75 V
FUEL T/TMP SE	• Ignition switch: ON		Indicates fuel tank temperature
INT/A TEMP SE	• Ignition switch: ON		Indicates intake air temperature
EVAP SYS PRES	• Ignition switch: ON		Approx. 1.8 - 4.8 V
FUEL LEVEL SE	• Ignition switch: ON		Depending on fuel level of fuel tank
START SIGNAL	• Ignition switch: ON → START → ON		OFF → ON → OFF
CLSD THL POS	• Ignition switch: ON (Engine stopped)	Accelerator pedal: Fully released	ON
		Accelerator pedal: Slightly depressed	OFF
AIR COND SIG	• Engine: After warming up, idle the engine	Air conditioner switch: OFF	OFF
		Air conditioner switch: ON (Compressor operates.)	ON
P/N POSI SW	• Ignition switch: ON	Selector lever: P or N position	ON
		Selector lever: Except above position	OFF
PW/ST SIGNAL	• Engine: After warming up, idle the engine	Steering wheel: Not being turned	OFF
		Steering wheel: Being turned	ON
LOAD SIGNAL	• Ignition switch: ON	Rear window defogger switch: ON and/or Lighting switch: 2nd position	ON
		Rear window defogger switch and lighting switch: OFF	OFF
IGNITION SW	• Ignition switch: ON → OFF → ON		ON → OFF → ON
HEATER FAN SW	• Engine: After warming up, idle the engine	Heater fan switch: ON	ON
		Heater fan switch: OFF	OFF
BRAKE SW	• Ignition switch: ON	Brake pedal: Fully released	OFF
		Brake pedal: Slightly depressed	ON
INJ PULSE-B1	• Engine: After warming up • Selector lever: P or N position • Air conditioner switch: OFF • No load	Idle	2.0 - 3.0 msec
		2,000 rpm	1.9 - 2.9 msec
INJ PULSE-B2	• Engine: After warming up • Selector lever: P or N position • Air conditioner switch: OFF • No load	Idle	2.0 - 3.0 msec
		2,000 rpm	1.9 - 2.9 msec
IGN TIMING	• Engine: After warming up • Selector lever: P or N position • Air conditioner switch: OFF • No load	Idle	7 - 17°BTDC
		2,000 rpm	25 - 45°BTDC
CAL/LD VALUE	• Engine: After warming up • Selector lever: P or N position • Air conditioner switch: OFF • No load	Idle	5 - 35%
		2,500 rpm	5 - 35%
MASS AIRFLOW	• Engine: After warming up • Selector lever: P or N position • Air conditioner switch: OFF • No load	Idle	2.0 - 6.0 g/s
		2,500 rpm	7.0 - 20.0 g/s

cardiagn.com

Monitor Item	Condition		Values/Status
PURG VOL C/V	• Engine: After warming up • Selector lever: P or N position • Air conditioner switch: OFF • No load	Idle (Accelerator pedal: Not depressed even slightly, after engine starting.)	0%
		2,000 rpm	—
INT/V TIM (B1)	• Engine: After warming up • Selector lever: P or N position • Air conditioner switch: OFF • No load	Idle	–5 - 5°CA
		2,000 rpm	Approx. 0 - 30°CA
INT/V TIM (B2)	• Engine: After warming up • Selector lever: P or N position • Air conditioner switch: OFF • No load	Idle	–5 - 5°CA
		2,000 rpm	Approx. 0 - 30°CA
INT/V SOL (B1)	• Engine: After warming up • Selector lever: P or N position • Air conditioner switch: OFF • No load	Idle	0 - 2%
		2,000 rpm	Approx. 0 - 50%
INT/V SOL (B2)	• Engine: After warming up • Selector lever: P or N position • Air conditioner switch: OFF • No load	Idle	0 - 2%
		2,000 rpm	Approx. 0 - 50%
VIAS S/V-1	• Engine: After warming up • Selector lever: P or N position • Air conditioner switch: OFF • No load	When revving engine up to 5,000 rpm quickly	OFF →ON → OFF
VIAS S/V-2	• Engine: After warming up • Selector lever: P or N position • Air conditioner switch: OFF • No load	When revving engine up to 5,000 rpm quickly	OFF →ON → OFF
AIR COND RLY	• Engine: After warming up, idle the engine	Air conditioner switch: OFF	OFF
		Air conditioner switch: ON (Compressor operates)	ON
ENGINE MOUNT	• Engine: After warming up	Below 950 rpm	IDLE
		Above 950 rpm	TRVL
FUEL PUMP RLY	• For 1 second after turning ignition switch: ON • Engine running or cranking		ON
	• Except above		OFF
VENT CONT/V	• Ignition switch: ON		OFF
THRTL RELAY	• Ignition switch: ON		ON
COOLING FAN	• Engine: After warming up, idle the engine • Air conditioner switch: OFF	Engine coolant temperature: 97°C (206°F) or less	OFF
		Engine coolant temperature: Between 98°C (208°F) and 99°C (210°F)	LOW
		Engine coolant temperature: Between 100°C (212°F) and 104°C (219°F)	MID
		Engine coolant temperature: 105°C (221°F) or more	HI
HO2S2 HTR (B1)	• Engine speed: Below 3,600 rpm after the following conditions are met. - Engine: After warming up - Keeping the engine speed between 3,500 and 4,000 rpm for 1 minute and at idle for 1 minute under no load		ON
	• Engine speed: Above 3,600 rpm		OFF

cardiagn.com

Monitor Item	Condition		Values/Status
HO2S2 HTR (B2)	• Engine speed: Below 3,600 rpm after the following conditions are met. - Engine: After warming up - Keeping the engine speed between 3,500 and 4,000 rpm for 1 minute and at idle for 1 minute under no load		ON
	• Engine speed: Above 3,600 rpm		OFF
I/P PULLY SPD	• Vehicle speed: More than 20 km/h (12 MPH)		Almost the same speed as the tachometer indication
VEHICLE SPEED	• Turn drive wheels and compare CONSULT value with the speedometer indication.		Almost the same speed as the speedometer indication
IDL A/V LEARN	• Engine: Running	Idle air volume learning has not been performed yet.	YET
		Idle air volume learning has already been performed successfully.	CMPLT
ENG OIL TEMP	• Engine: After warming up		More than 70°C (158°F)
TRVL AFTER MIL	• Ignition switch: ON	Vehicle has traveled after MIL has illuminated.	0 - 65,535 km (0 - 40,723 miles)
A/F S1 HTR (B1)	• Engine: After warming up, idle the engine (More than 140 seconds after starting engine)		4 - 100%
A/F S1 HTR (B2)	• Engine: After warming up, idle the engine (More than 140 seconds after starting engine)		4 - 100%
AC PRESS SEN	• Engine: Idle • Both A/C switch and blower fan switch: ON (Compressor operates)		1.0 - 4.0 V
VHCL SPEED SE	• Turn drive wheels and compare CONSULT value with the speedometer indication.		Almost the same speed as the speedometer indication
SET VHCL SPD	• Engine: Running	ASCD: Operating	The preset vehicle speed is displayed
MAIN SW	• Ignition switch: ON	MAIN switch: Pressed	ON
		MAIN switch: Released	OFF
CANCEL SW	• Ignition switch: ON	CANCEL switch: Pressed	ON
		CANCEL switch: Released	OFF
RESUME/ACC SW	• Ignition switch: ON	RESUME/ACCELERATE switch: Pressed	ON
		RESUME/ACCELERATE switch: Released	OFF
SET SW	• Ignition switch: ON	SET/COAST switch: Pressed	ON
		SET/COAST switch: Released	OFF
BRAKE SW1 (Brake pedal position switch)	• Ignition switch: ON	Brake pedal: Fully released	ON
		Brake pedal: Slightly depressed	OFF
BRAKE SW2 (Stop lamp switch)	• Ignition switch: ON	Brake pedal: Fully released	OFF
		Brake pedal: Slightly depressed	ON
VHCL SPD CUT	• Ignition switch: ON		NON
LO SPEED CUT	• Ignition switch: ON		NON
AT OD MONITOR	• Ignition switch: ON		OFF
AT OD CANCEL	• Ignition switch: ON		OFF
CRUISE LAMP	• Ignition switch: ON	MAIN switch: Pressed at the 1st time → at the 2nd time	ON → OFF
SET LAMP	• MAIN switch: ON • When vehicle speed is between 40 km/h (25 MPH) and 144 km/h (89 MPH)	ASCD: Operating	ON
		ASCD: Not operating	OFF

cardiagn.com


Monitor Item	Condition		Values/Status
ALT DUTY	• Engine: Idle		0 - 80%
A/F ADJ-B1	• Engine: Running		−0.330 - 0.330
A/F ADJ-B2	• Engine: Running		−0.330 - 0.330
BAT CUR SEN	• Engine speed: Idle • Battery: Fully charged*2 • Selector lever: P or N position • Air conditioner switch: OFF • No load		Approx. 2,600 - 3,500 mV
ALT DUTY SIG	• Power generation voltage variable control: Operating		ON
	• Power generation voltage variable control: Not operating		OFF
EVAP LEAK DIAG	Ignition switch: ON		Indicates the condition of EVAP leak diagnosis.
EVAP DIAG READY	Ignition switch: ON		Indicates the ready condition of EVAP leak diagnosis.
HO2 S2 DIAG1 (B1)	DTC P0139 self-diagnosis (delayed response) is incomplete.		INCMP
	DTC P0139 self-diagnosis (delayed response) is complete.		CMPLT
HO2 S2 DIAG1 (B2)	DTC P0159 self-diagnosis (delayed response) is incomplete.		INCMP
	DTC P0159 self-diagnosis (delayed response) is complete.		CMPLT
HO2 S2 DIAG2 (B1)	DTC P0139 self-diagnosis (slow response) is incomplete.		INCMP
	DTC P0139 self-diagnosis (slow response) is complete.		CMPLT
HO2 S2 DIAG2 (B2)	DTC P0159 self-diagnosis (slow response) is incomplete.		INCMP
	DTC P0159 self-diagnosis (slow response) is complete.		CMPLT
THRTL STK CNT B1*3	—		—
BAT TEMP SEN	• Engine: After warming up • Selector lever: P or N position • Air conditioner switch: OFF • No load	Idle	Indicates the temperature around the battery.
FUEL PUMP DUTY	• Engine: After warming up • Selector lever: P or N position • Air conditioner switch: OFF • No load	Idle	30 – 40%
EOP SENSOR	• Engine: After warming up • Selector lever: P or N • Air conditioner switch: OFF • No load	Idle	Approx. 1.45 V
		2,000 rpm	Approx. 2.85 V
VTC DTY EX B1*3	—		—
VTC DTY EX B2*3	—		—
A/F-S ATMSPHRC CRCT B1	Engine: After warming up, idle the engine		Varies depending on vehicle environment.
A/F-S ATMSPHRC CRCT B2	Engine: After warming up, idle the engine		Varies depending on vehicle environment.
A/F-S ATMSPHRC CRCT UP B1	Engine: Running		Varies depending on the number of updates.
SYSTEM 1 DIAG-NOSIS A B1	DTC P219A self-diagnosis is incomplete.		INCMP
	DTC P219A self-diagnosis is incomplete.		CMPLT
SYSTEM 1 DIAG-NOSIS A B2	DTC P219B self-diagnosis is incomplete.		INCMP
	DTC P219B self-diagnosis is incomplete.		CMPLT
SYSTEM 1 DIAG-NOSIS B B1	DTC P219A self-diagnosis is on standby.		ABSENT
	DTC P219A self-diagnosis is under diagnosis.		PRSENT

cardiagn.com

Monitor Item	Condition	Values/Status
SYSTEM 1 DIAG-NOSIS B B2	DTC P219B self-diagnosis is on standby.	ABSENT
	DTC P219B self-diagnosis is under diagnosis.	PRSENT
A/F-S ATMSPHRC CRCT UP B2	Engine: Running	Varies depending on the number of updates.


*1: Accelerator pedal position sensor 2 signal and throttle position sensor 2 signal are converted by ECM internally. Thus, they differ from ECM terminals voltage signal.
*2: Before measuring the terminal voltage, confirm that the battery is fully charged. Refer to PG-128, "How to Handle Battery".
*3: The item is indicated, but not used.

TERMINAL LAYOUT




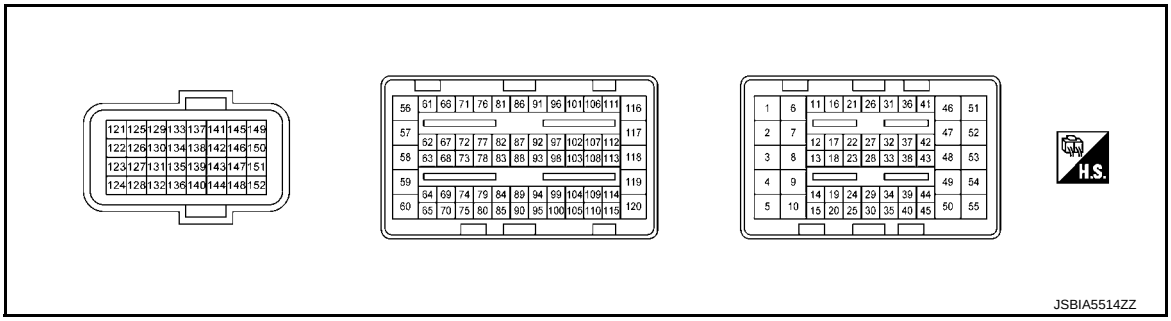


PHYSICAL VALUES





NOTE:
- ECM is located in the engine room left side near battery.
- Specification data are reference values.
- Pulse signal is measured by CONSULT.

Terminal No.		Description		Condition	Value (Approx.)
+	–	Signal name	Input/ Output		
1 (P)	152 (B)	Throttle control motor (Close)	Output	[Ignition switch: ON] • Engine stopped • Selector lever: D position • Accelerator pedal: Fully released	0 - 14 V★  JMBIA1125GB
2 (G/W)	152 (B)	Throttle control motor power supply	Input	[Ignition switch: ON]	BATTERY VOLTAGE (11 - 14 V)



cardiagn.com

Terminal No.		Description		Condition	Value (Approx.)
+	−−	Signal name	Input/ Output		
3 (L)	152 (B)	Throttle control motor (Open)	Output	[Ignition switch: ON] • Engine stopped • Selector lever: D position • Accelerator pedal: Fully depressed	0 - 14 V★ 
				[Ignition switch: ON] • Engine stopped • Selector lever: D position • Accelerator pedal: Fully released	0 - 14 V★ 
4 (GR)	—	Sensor ground [Knock sensor (bank 1), Knock sensor (bank 2)]	—	—	—
5 (B)	4 (GR)	Knock sensor (bank 1)	Input	[Engine is running] Idle speed	2.5 V*1
6 (BR/Y)	152 (B)	A/F sensor 1 heater (bank 1)	Output	[Engine is running] • Warm-up condition • Idle speed (More than 140 seconds after starting engine)	2.9 - 8.8 V★ 
7 (P/B)	152 (B)	Heated oxygen sensor 2 heater (bank 1)	Output	[Engine is running] Engine speed: Below 3,600 rpm after the following conditions are met • Engine: after warming up • Keeping the engine speed between 3,500 and 4,000 rpm for 1 minute and at idle for 1 minute under no load	10 V★ 
				• [Ignition switch: ON] Engine stopped • [Engine is running] Engine speed: Above 3,600 rpm	BATTERY VOLTAGE (11 - 14 V)
8 (O)	152 (B)	Throttle control motor relay	Output	[Ignition switch: ON → OFF]	0 - 1.0 V → BATTERY VOLTAGE (11 - 14 V) → 0 V
				[Ignition switch: ON]	0 - 1.0 V
9 (W)	4 (GR)	Knock sensor (bank 2)	Input	[Engine is running] Idle speed	2.5 V*1
10 (B)	—	ECM ground	—	—	—






cardiagn.com

Terminal No.		Description		Condition	Value (Approx.)
+	–	Signal name	Input/ Output		
11 (L/W) 12 (LG/R) 16 (R/W) 17 (R/B) 21 (P/B) 22 (R/Y)	152 (B)	Fuel injector No. 5 Fuel injector No. 4 Fuel injector No. 2 Fuel injector No. 1 Fuel injector No. 6 Fuel injector No. 3	Output	[Engine is running] • Warm-up condition • Engine speed: 2,000 rpm	BATTERY VOLTAGE (11 - 14 V)★  JMBIA0048GB
				[Engine is running] • Warm-up condition • Idle speed **NOTE:** The pulse cycle changes depending on rpm at idle	BATTERY VOLTAGE (11 - 14 V)★  JMBIA0047GB
13 (G)	15 (B)	Engine oil temperature sensor	Input	[Engine is running]	0 - 4.8 V Output voltage varies with engine oil temperature.
14 (LG)	18 (Y)	Engine oil pressure sensor	Input	[Engine is running] • Warm-up condition • Idle speed	1.3 V★  JPBIA3359ZZ
				[Engine is running] • Warm-up condition • Engine speed is 2,000 rpm	2.7 V★  JPBIA3360ZZ
15 (B)	—	Sensor ground (Engine oil temperature sensor, engine oil pressure sensor)	—	—	—
18 (Y)	15 (B)	Sensor power supply (Engine oil pressure sensor)	—	[Ignition switch: ON]	5 V
	25 (G)	Sensor power supply (Refrigerant pressure sensor)			
19 (B)	152 (B)	Fuel pump relay	Output	• [Ignition switch: ON] For 1 second after turning ignition switch ON • [Engine is running]	0 - 1.0 V
20 (R)	25 (G)	Refrigerant pressure sensor	Input	[Engine is running] • Warm-up condition • Both A/C switch and blower fan motor switch: ON (Compressor operates)	1.0 - 4.0 V





cardiagn.com

Terminal No.		Description		Condition	Value (Approx.)
+	-–	Signal name	Input/ Output		
25 (G)	—	Sensor ground (Refrigerant pressure sensor)	—	—	—
28 (BR)	40 (LG)	Sensor power supply [Exhaust valve timing control position sensor (bank 1), exhaust valve timing control position sensor (bank 2), crankshaft position sensor (POS), mass air flow sensor]	Input	[Engine is running]	5 V
31 (Y)	35 (B)	Engine coolant temperature sensor	Input	[Engine is running]	0 - 4.8 V Output voltage varies with engine coolant temperature.
32 (W/L)	152 (B)	Heated oxygen sensor 2 (bank 2)	Input	[Engine is running] Revving engine from idle to 3,000 rpm quickly after the following conditions are met • Engine: after warming up • Keeping the engine speed between 3,500 and 4,000 rpm for 1 minute and at idle for 1 minute under no load	0 - 1.0 V
34 (L/Y)	40 (LG)	Intake air temperature sensor	Input	[Engine is running]	0 - 4.8 V Output voltage varies with intake air temperature.
35 (B)	—	Sensor ground (Heated oxygen sensor 2, engine coolant temperature sensor)	—	—	—
36 (W/B)	40 (LG)	Crankshaft position sensor (POS)	Input	[Engine is running] • Warm-up condition • Idle speed **NOTE:** The pulse cycle changes depending on rpm at idle	4.0 - 5.0 V★  JMBIA0041GB
				[Engine is running] Engine speed: 2,000 rpm	4.0 - 5.0 V★  JMBIA0042GB



cardiagn.com

Terminal No.		Description		Condition	Value (Approx.)
+	–	Signal name	Input/ Output		
37 (GR)	152 (B)	Exhaust valve timing control position sensor (bank 1)	Input	[Engine is running] • Warm-up condition • Idle speed **NOTE:** The pulse cycle changes depending on rpm at idle	4.0 – 5.0 V★  JMBIA0043GB
				[Engine is running] • Warm-up condition • Engine speed: 2,000 rpm	4.0 – 5.0 V★  JMBIA0044GB
38 (O)	40 (LG)	Mass air flow sensor	Input	[Ignition switch: ON] • Engine stopped	3,720 Hz  JSBIA2957ZZ
				[Engine is running] • Warm-up condition • Idle speed	4,100 – 4,700 Hz  JSBIA2957ZZ
				[Engine is running] • Warm-up condition • Engine speed: idle to about 4,000 rpm **NOTE:** Check for linear frequency rise in response to engine being increased to about 4,000 rpm	4,100 – 4,700 → 8000 Hz  JSBIA2957ZZ



cardiagn.com

Terminal No.		Description		Condition	Value (Approx.)
+	–	Signal name	Input/ Output		
39 (LG)	152 (B)	Exhaust valve timing control position sensor (bank 2)	Input	[Engine is running] • Warm-up condition • Idle speed **NOTE:** The pulse cycle changes depending on rpm at idle	4.0 – 5.0 V★ 
				[Engine is running] • Warm-up condition • Engine speed: 2,000 rpm	4.0 – 5.0 V★ 
40 (LG)	—	Sensor ground (Exhaust valve timing control position sensor (bank 1), exhaust valve timing control position sensor (bank 2), crankshaft position sensor (POS), mass air flow sensor)	—	—	—
41 (W)	152 (B)	Heated oxygen sensor 2 (bank 1)	Input	[Engine is running] Revving engine from idle to 3,000 rpm quickly after the following conditions are met • Engine: after warming up • Keeping the engine speed between 3,500 and 4,000 rpm for 1 minute and at idle for 1 minute under no load	0 - 1.0 V
46 (SB)	152 (B)	A/F sensor 1 heater (bank 2)	Output	[Engine is running] • Warm-up condition • Idle speed (More than 140 seconds after starting engine)	2.9 - 8.8 V★ 
47 (R)	152 (B)	Heated oxygen sensor 2 heater (bank 2)	Output	[Engine is running] Engine speed: Below 3,600 rpm after the following conditions are met • Engine: after warming up • Keeping the engine speed between 3,500 and 4,000 rpm for 1 minute and at idle for 1 minute under no load	10 V★ 
				• [Ignition switch: ON] Engine stopped • [Engine is running] Engine speed: Above 3,600 rpm	BATTERY VOLTAGE (11 - 14 V)



cardiagn.com

Terminal No.		Description		Condition	Value (Approx.)
+	–	Signal name	Input/ Output		
49 (BR/W)	152 (B)	Electronic controlled engine mount control solenoid valve	Output	[Engine is running] Idle speed	0 - 1.0 V
				[Engine is running] Engine speed: More than 950 rpm	BATTERY VOLTAGE (11 - 14 V)
51 (L)	152 (B)	Power supply for ECM (Valve)	Input	[Ignition switch: ON]	BATTERY VOLTAGE (11 - 14 V)
54 (P/L)	152 (B)	EVAP canister purge volume control solenoid valve	Output	[Engine is running] • Idle speed • Accelerator pedal: Not depressed even slightly, after engine starting	BATTERY VOLTAGE (11 - 14 V)★ 
				[Engine is running] Engine speed: approximately 2,000 rpm (More than 100 seconds after starting engine)	BATTERY VOLTAGE (11 - 14 V)★ 
55 (B/Y)	—	ECM ground	—	—	—
58 (P/B)	152 (B)	Exhaust valve timing control solenoid valve (bank 1)	Output	[Engine is running] • Warm-up condition • Idle speed	0 V
				[Engine is running] • Warm-up condition • Engine speed: 2,000rpm	BATTERY VOLTAGE (11 – 14 V)
60 (W)	152 (B)	Exhaust valve timing control solenoid valve (bank 2)	Output	[Engine is running] • Warm-up condition • Idle speed	0 V
				[Engine is running] • Warm-up condition • Engine speed: 2,000rpm	BATTERY VOLTAGE (11 – 14 V)
64 (G/B)	—	Sensor ground (Battery current sensor, battery temperature sensor)	—	—	—
66 (L)	152 (B)	A/F sensor 1 (bank 1)	Input	[Engine is running] • Warm-up condition • Engine speed: 2,000 rpm	1.8 V
67 (P)	152 (B)	A/F sensor 1 (bank 1)	Input	[Ignition switch: ON]	2.2 V Output voltage varies with air fuel ratio.
68 (W)	—	—	—	—	—
69 (BR)	—	—	—	—	—
70 (GR)	—	Shield	—	—	—



cardiagn.com

Terminal No.		Description		Condition	Value (Approx.)
+	–	Signal name	Input/ Output		
71 (W)	152 (B)	Throttle position sensor 1	Input	[Ignition switch: ON] • Engine stopped • Selector lever: D position • Accelerator pedal: Fully released	More than 0.36 V
				[Ignition switch: ON] • Engine stopped • Selector lever: D position • Accelerator pedal: Fully depressed	Less than 4.75 V
72 (R)	152 (B)	Throttle position sensor 2	Input	[Ignition switch: ON] • Engine stopped • Selector lever: D position • Accelerator pedal: Fully released	Less than 4.75 V
				[Ignition switch: ON] • Engine stopped • Selector lever: D position • Accelerator pedal: Fully depressed	More than 0.36 V
75 (B)	—	Sensor ground (Throttle position sensor)	—	—	—
76 (LG)	152 (B)	A/F sensor 1 (bank 2)	Input	[Engine is running] • Warm-up condition • Engine speed: 2,000 rpm	1.8 V
77 (V)	152 (B)	A/F sensor 1 (bank 2)	Input	[Ignition switch: ON]	2.2 V Output voltage varies with air fuel ratio.
80 (GR)	—	Shield	—	—	—
83 (R)	152 (B)	PNP signal	Input	[Ignition switch: ON] Selector lever: P or N position	BATTERY VOLTAGE (11 - 14 V)
				[Ignition switch: ON] Selector lever: Except above position	0 V
84 (W/R)	90 (B/R)	Camshaft position sensor (PHASE) (bank 1)	Input	[Engine is running] • Warm-up condition • Idle speed **NOTE:** The pulse cycle changes depending on rpm at idle	3.0 - 5.0 V★  JMBIA0045GB
				[Engine is running] Engine speed is 2,000 rpm	3.0 - 5.0 V★  JMBIA0046GB

cardiagn.com

Terminal No.		Description		Condition	Value (Approx.)
+	–	Signal name	Input/ Output		
86 (W/B)	152 (B)	ECM relay (Self shut-off)	Output	• [Engine is running] • [Ignition switch: OFF] A few seconds after turning ignition switch OFF	0 - 1.5 V
				[Ignition switch: OFF] More than a few seconds after turning ignition switch OFF	BATTERY VOLTAGE (11 - 14 V)
87 (R/Y)	64 (G/B)	Sensor power supply (Battery current sensor)	—	[Ignition switch: ON]	5 V
89 (BR/W)	90 (B/R)	Camshaft position sensor (PHASE) (bank 2)	Input	[Engine is running] • Warm-up condition • Idle speed **NOTE:** The pulse cycle changes depending on rpm at idle	3.0 - 5.0 V★ 
				[Engine is running] Engine speed is 2,000 rpm	3.0 - 5.0 V★ 
90 (B/R)	—	Sensor ground [Camshaft position sensor (PHASE) (bank 1), camshaft position sensor (PHASE) (bank 2)]	—	—	—
92 (G/W)	90 (B/R)	Sensor power supply [Camshaft position sensor (PHASE) (bank 1), camshaft position sensor (PHASE) (bank 2)]	—	[Ignition switch: ON]	5 V
98 (G)	75 (B)	Sensor power supply (Throttle position sensor)	—	[Ignition switch: ON]	5 V
101 (P)	10 (B)	Starter motor relay cut off signal	Output	[Ignition switch: ON]	0 V
				[Engine is running] • Idle speed	BATTERY VOLTAGE (11 - 14 V)
102 (GR/B)	152 (B)	VIAS control solenoid valve 2	Output	[Engine is running] • Warm-up condition • Idle speed	BATTERY VOLTAGE (11 - 14 V)
				[Engine is running] • Warm-up condition • When revving engine up to 5,000 rpm quickly	BATTERY VOLTAGE (11 - 14 V) ↓ 0 - 1.0 V ↓ BATTERY VOLTAGE (11 - 14 V)

cardiagn.com

Terminal No.		Description		Condition	Value (Approx.)
+	–	Signal name	Input/ Output		
103 (L/B) 104 (GR/R) 106 (G/R) 107 (P) 113 (Y/R) 114 (W)	152 (B)	Ignition signal No. 3 Ignition signal No. 6 Ignition signal No. 2 Ignition signal No. 5 Ignition signal No. 1 Ignition signal No. 4	Output	[Engine is running] • Warm-up condition • Idle speed **NOTE:** The pulse cycle changes depending on rpm at idle	0 - 0.2 V★ 
				[Engine is running] • Warm-up condition • Engine speed: 2,000 rpm	0.1 - 0.4 V★ 
105 (B)	—	ECM ground	—	—	—
108 (V)	152 (B)	VIAS control solenoid valve 1	Output	[Engine is running] • Warm-up condition • Idle speed	BATTERY VOLTAGE (11 - 14 V)
				[Engine is running] • Warm-up condition • When revving engine up to 5,000 rpm quickly	BATTERY VOLTAGE (11 - 14 V) ↓ 0 - 1.0 V ↓ BATTERY VOLTAGE (11 - 14 V)
110 (B)	—	ECM ground	—	—	—
116 (W/L)	152 (B)	Power supply for ECM (Back-up)	Input	[Ignition switch: OFF]	BATTERY VOLTAGE (11 - 14 V)
117 (R)	152 (B)	Intake valve timing control solenoid valve (bank 1)	Output	[Engine is running] • Warm-up condition • Idle speed	0 V
				[Engine is running] • Warm-up condition • When revving engine up to 2,000rpm quickly	BATTERY VOLTAGE (11 - 14 V)
118 (V)	152 (B)	Intake valve timing intermediate lock control solenoid valve (bank 1)	Output	[Engine is running] • Warm-up condition • Idle speed	0 V
				[Engine is running] • Cold condition [Engine coolant temperature: below 60°C (140°F)] • Idle speed	Battery voltage (11 - 14 V)
119 (Y)	152 (B)	Intake valve timing control solenoid valve (bank 2)	Output	[Engine is running] • Warm-up condition • Idle speed	0 V
				[Engine is running] • Warm-up condition • When revving engine up to 2,000rpm quickly	BATTERY VOLTAGE (11 - 14 V)

cardiagn.com

Terminal No.		Description		Condition	Value (Approx.)
+	–	Signal name	Input/ Output		
120 (BR)	152 (B)	Intake valve timing intermediate lock control solenoid valve (bank 2)	Output	[Engine is running] • Warm-up condition • Idle speed	0 V
				[Engine is running] • Cold condition [Engine coolant temperature: below 60°C (140°F)] • Idle speed	Battery voltage (11 - 14 V)
121 (LG)	148 (V)	EVAP control system pressure sensor	Input	[Ignition switch: ON]	1.8 - 4.8 V
123 (P)	—	CAN communication line (CAN-L)	Input/ Output	—	—
124 (L)	—	CAN communication line (CAN-H)	Input/ Output	—	—
125 (W)	148 (V)	Sensor power supply (EVAP control system pressure sensor)	—	[Ignition switch: ON]	5 V
128 (Y)	148 (V)	Fuel tank temperature sensor	Input	[Engine is running]	0 - 4.8 V Output voltage varies with fuel tank temperature.
133 (BR)	152 (B)	Ignition switch	Input	[Ignition switch: OFF]	0 V
				[Ignition switch: ON]	Battery voltage (11 - 14 V)
134 (Y)	135 (BR)	ASCD steering switch	Input	[Ignition switch: ON] ASCD steering switch: OFF	4 V
				[Ignition switch: ON] MAIN switch: Pressed	0 V
				[Ignition switch: ON] CANCEL switch: Pressed	1 V
				[Ignition switch: ON] RESUME/ACCELERATE switch: Pressed	3 V
				[Ignition switch: ON] SET/COAST switch: Pressed	2 V
135 (BR)	—	Sensor ground (ASCD steering switch)	—	—	—
139 (SB)	152 (B)	Stop lamp switch	Input	[Ignition switch: OFF] Brake pedal: Fully released	0 V
				[Ignition switch: OFF] Brake pedal: Slightly depressed	BATTERY VOLTAGE (11 - 14 V)
140 (BR)	152 (B)	Brake pedal position switch	Input	[Ignition switch: ON] Brake pedal: Slightly depressed	0 V
				[Ignition switch: ON] Brake pedal: Fully released	BATTERY VOLTAGE (11 - 14 V)
141 (V)	152 (B)	EVAP canister vent control valve	Output	[Ignition switch: ON]	BATTERY VOLTAGE (11 - 14 V)
142 (GR)	144 (G)	Sensor power supply (Accelerator pedal position sensor 2)	—	[Ignition switch: ON]	5 V

cardiagn.com

Terminal No.		Description		Condition	Value (Approx.)
+	–	Signal name	Input/ Output		
143 (O)	144 (G)	Accelerator pedal position sensor 2	Input	[Ignition switch: ON] • Engine stopped • Accelerator pedal: Fully released	0.25 - 0.50 V
				[Ignition switch: ON] • Engine stopped • Accelerator pedal: Fully depressed	2.0 - 2.5 V
144 (G)	—	Sensor ground (Accelerator pedal position sensor 2)	—	—	—
145 (L)	152 (B)	Power supply for ECM	Input	[Ignition switch: ON]	BATTERY VOLTAGE (11 - 14 V)
146 (P)	151 (B)	Sensor power supply (Accelerator pedal position sensor 1)	—	[Ignition switch: ON]	5 V
147 (B) 149 (B) 152 (B)	—	ECM ground	—	—	—
148 (V)	—	Sensor ground (EVAP control system pressure sensor, Fuel tank temperature sensor)	—	—	—
150 (W)	151 (B)	Accelerator pedal position sensor 1	Input	[Ignition switch: ON] • Engine stopped • Accelerator pedal: Fully released	0.5 - 1.0 V
				[Ignition switch: ON] • Engine stopped • Accelerator pedal: Fully depressed	4.2 - 4.8 V
151 (B)	—	Sensor ground (Accelerator pedal position sensor 1)	—	—	—

★: Average voltage for pulse signal (Actual pulse signal can be confirmed by oscilloscope.)
*1: This may vary depending on internal resistance of the tester.
*2: Before measuring the terminal voltage, confirm that the battery is fully charged. Refer to PG-128, "How to Handle Battery".

Fail-safe

INFOID:0000000012406313

DTC No.	Detected items	Engine operating condition in fail-safe mode
P0011 P0021	Intake valve timing control	The signal is not energized to the intake valve timing control solenoid valve and the valve control does not function.
P0014 P0024	Exhaust valve timing control	The signal is not energized to the exhaust valve timing control solenoid valve and the valve control does not function.
P0101 P0102 P0103	Mass air flow sensor circuit	Engine speed will not rise more than 2,400 rpm due to the fuel cut.

cardiagn.com

<table>
<tr><th>DTC No.</th><th>Detected items</th><th>Engine operating condition in fail-safe mode</th></tr>
<tr><td>P0117
P0118</td><td>Engine coolant temperature sensor circuit</td><td>Engine coolant temperature will be determined by ECM based on the following condition.
CONSULT displays the engine coolant temperature decided by ECM.
<table>
<tr><th>Condition</th><th>Engine coolant temperature decided
(CONSULT display)</th></tr>
<tr><td>Just as ignition switch is turned ON or START</td><td>40°C (104°F)</td></tr>
<tr><td>Approx 4 minutes or more after engine starting</td><td>80°C (176°F)</td></tr>
<tr><td>Except as shown above</td><td>40 - 80°C (104 - 176°F)
(Depends on the time)</td></tr>
</table>
When the fail-safe system for engine coolant temperature sensor is activated, the cooling fan operates while engine is running.</td></tr>
<tr><td>P0122
P0123
P0222
P0223
P2135</td><td>Throttle position sensor</td><td>The ECM controls the electric throttle control actuator in regulating the throttle opening in order for the idle position to be within +10 degrees.
The ECM regulates the opening speed of the throttle valve to be slower than the normal condition.
Therefore, the acceleration will be poor.</td></tr>
<tr><td>P0196
P0197
P0198</td><td>Engine oil temperature sensor</td><td>Intake valve timing control does not function.</td></tr>
<tr><td>P0500</td><td>Vehicle speed sensor</td><td>The cooling fan operates (Highest) while engine is running.</td></tr>
<tr><td>P052A
P052B
P052C
P052D</td><td>Intake valve timing intermediate lock control</td><td>—</td></tr>
<tr><td>P0603
P0607</td><td>ECM</td><td>Engine torque may be limited.</td></tr>
<tr><td>P0604</td><td>ECM</td><td>• ECM stops the electric throttle control actuator control, throttle valve is maintained at a fixed opening (approx. 5 degrees) by the return spring.
• The position of the following components is fixed.
- Intake valve timing control solenoid valve
- Intake valve timing intermediate lock control solenoid valve
- Exhaust valve timing control solenoid valve
• ASCD operation may be deactivated.</td></tr>
<tr><td>P0605
P0606
P060B</td><td>ECM</td><td>NOTE:
Fail-safe may not occur depending on malfunction type.
• ECM stops the electric throttle control actuator control, throttle valve is maintained at a fixed opening (approx. 5 degrees) by the return spring.
• The position of the following components is fixed.
- Intake valve timing control solenoid valve
- Intake valve timing intermediate lock control solenoid valve
- Exhaust valve timing control solenoid valve
• ASCD operation may be deactivated.</td></tr>
<tr><td>P060A</td><td>ECM</td><td>NOTE:
Fail-safe may not occur depending on malfunction type.
• ECM stops the electric throttle control actuator control, throttle valve is maintained at a fixed opening (approx. 5 degrees) by the return spring.
• The position of the following components is fixed.
- Intake valve timing control solenoid valve
- Intake valve timing intermediate lock control solenoid valve
- Exhaust valve timing control solenoid valve
• Engine torque may be limited.
• ASCD operation may be deactivated.</td></tr>
</table>

cardiagn.com

DTC No.	Detected items	Engine operating condition in fail-safe mode
P0643	Sensor power supply	• ECM stops the electric throttle control actuator control, throttle valve is maintained at a fixed opening (approx. 5 degrees) by the return spring. • The position of the following components is fixed. - Intake valve timing control solenoid valve - Intake valve timing intermediate lock control solenoid valve - Exhaust valve timing control solenoid valve
P1805	Brake switch	ECM controls the electric throttle control actuator by regulating the throttle opening to a small range. Therefore, acceleration will be poor.
		Vehicle condition: When engine is idling — Driving condition: Normal
		Vehicle condition: When accelerating — Driving condition: Poor acceleration
P2100 P2103	Throttle control motor relay	ECM stops the electric throttle control actuator control, throttle valve is maintained at a fixed opening (approx. 5 degrees) by the return spring.
P2101	Electric throttle control function	ECM stops the electric throttle control actuator control, throttle valve is maintained at a fixed opening (approx. 5 degrees) by the return spring.
P2118	Throttle control motor	ECM stops the electric throttle control actuator control, throttle valve is maintained at a fixed opening (approx. 5 degrees) by the return spring.
P2119	Electric throttle control actuator	(When electric throttle control actuator does not function properly due to the return spring malfunction:) ECM controls the electric throttle actuator by regulating the throttle opening around the idle position. The engine speed will not rise more than 2,000 rpm.
		(When throttle valve opening angle in fail-safe mode is not in specified range:) ECM controls the electric throttle control actuator by regulating the throttle opening to 20 degrees or less.
		(When ECM detects the throttle valve is stuck open:) While the vehicle is being driven, it slows down gradually because of fuel cut. After the vehicle stops, the engine stalls. The engine can restart in the N or P position, and engine speed will not exceed 1,000 rpm or more.
P2122 P2123 P2127 P2128 P2138	Accelerator pedal position sensor	The ECM controls the electric throttle control actuator in regulating the throttle opening in order for the idle position to be within +10 degrees. The ECM regulates the opening speed of the throttle valve to be slower than the normal condition. Therefore, the acceleration will be poor.

DTC Inspection Priority Chart

INFOID:0000000012406314

If some DTCs are displayed at the same time, perform inspections one by one based on the following priority chart.

cardiagn.com

Priority	Detected items (DTC)
1	• U0101 U1000 CAN communication line • P0101 P0102 P0103 Mass air flow sensor • P0111 P0112 P0113 P0127 Intake air temperature sensor • P0116 P0117 P0118 P0125 Engine coolant temperature sensor • P0122 P0123 P0222 P0223 P1225 P1226 P2135 Throttle position sensor • P0128 Thermostat function • P0181 P0182 P0183 Fuel tank temperature sensor • P0196 P0197 P0198 Engine oil temperature sensor • P0327 P0328 P0332 P0333 Knock sensor • P0335 Crankshaft position sensor (POS) • P0340 P0345 Camshaft position sensor (PHASE) • P0460 P0461 P0462 P0463 Fuel level sensor • P0500 Vehicle speed sensor • P0520 EOP sensor • P0603, P0604, P0605, P0606, P0607, P060A, P060B, P062F, P2610 ECM • P0643 Sensor power supply • P0850 Park/Neutral position (PNP) switch • P1078, P1084 Exhaust valve timing control position sensor • P1550 P1551 P1552 P1553 P1554 Battery current sensor • P1556 P1557 Battery temperature sensor • P1610 - P1615 NATS • P1650 Starter motor relay 2 • P1651 Starter motor relay • P1652 Starter motor communication line • P2122 P2123 P2127 P2128 P2138 Accelerator pedal position sensor
2	• P0030 P0031 P0032 P0036 P0051 P0052 Air fuel ratio (A/F) sensor 1 heater • P0037 P0038 P0057 P0058 P0141 P0161 Heated oxygen sensor 2 heater • P0078, P0084 Exhaust valve timing control solenoid valve • P0075 P0081 Intake valve timing control solenoid valve • P0130 P0131 P0132 P014C P014D P014E P014F P0150 P0151 P0152 P015A P015B P015C P015D P2096 P2097 P2098 P2099 Air fuel ratio (A/F) sensor 1 • P0137 P0138 P0139 P0157 P0158 P0159 Heated oxygen sensor 2 • P0441 EVAP control system purge flow monitoring • P0443 P0444 P0445 EVAP canister purge volume control solenoid valve • P0447 P0448 EVAP canister vent control valve • P0451 P0452 P0453 EVAP control system pressure sensor • P1217 Engine over temperature (OVERHEAT) • P1800 P1801 VIAS control solenoid valve • P1805 Brake switch • P2100 P2103 Throttle control motor relay • P2101 Electric throttle control function • P2118 Throttle control motor
3	• P0011 P0021 P052A P052B P052C P052D Intake valve timing control • P0014, P0024 Exhaust valve timing control • P0171 P0172 P0174 P0175 Fuel injection system function • P0300 - P0306 Misfire • P0420 P0430 Three way catalyst function • P0456 EVAP control system (SMALL LEAK, VERY SMALL LEAK) • P0506 P0507 Idle speed control system • P050A P050E Cold start control • P0524 Engine oil pressure • P1148 P1168 Closed loop control • P1212 TCS communication line • P1564 ASCD steering switch • P1572 Brake pedal position switch • P1574 ASCD vehicle speed sensor • P1715 Primary speed sensor • P2119 Electric throttle control actuator • P219A P219B Air fuel ratio (A/F) sensor 1

cardiagn.com

DTC Index

INFOID:0000000012406315

×:Applicable —: Not applicable

DTC[*1]		Items (CONSULT screen terms)	SRT code	Trip	MIL	Permanent DTC group[*4]	Refer-ence page
CONSULT GST[*2]	ECM[*3]						
U0101	0101[*5]	LOST COMM (ECM)	—	1	×	B	EC-179
U1000	1000[*5]	CAN COMM CIRCUIT	—	2	—	—	EC-180
P0000	**0000**	**NO DTC IS DETECTED. FURTHER TESTING MAY BE REQUIRED.**	—	—	**Blinking**[*8]	—	**—**
P0011	0011	INT/V TIM CONT-B1	×	2	×	B	EC-181
P0014	0014	EXH/V TIM CONT-B1	—	2	×	B	EC-184
P0021	0021	INT/V TIM CONT-B2	×	2	×	B	EC-181
P0024	0024	EXH/V TIM CONT-B2	—	2	×	B	EC-184
P0030	0030	A/F SEN1 HTR (B1)	—	2	×	B	EC-190
P0031	0031	A/F SEN1 HTR (B1)	—	2	×	B	EC-190
P0032	0032	A/F SEN1 HTR (B1)	—	2	×	B	EC-190
P0036	0036	A/F SEN1 HTR (B2)	—	2	×	B	EC-190
P0037	0037	HO2S2 HTR (B1)	—	2	×	B	EC-193
P0038	0038	HO2S2 HTR (B1)	—	2	×	B	EC-193
P0051	0051	A/F SEN1 HTR (B2)	—	2	×	B	EC-190
P0052	0052	A/F SEN1 HTR (B2)	—	2	×	B	EC-190
P0057	0057	HO2S2 HTR (B2)	—	2	×	B	EC-193
P0058	0058	HO2S2 HTR (B2)	—	2	×	B	EC-193
P0075	0075	INT/V TIM V/CIR-B1	—	2	×	B	EC-196
P0078	0078	EX V/T ACT/CIRC-B1	—	2	×	B	EC-198
P0081	0081	INT/V TIM V/CIR-B2	—	2	×	B	EC-196
P0084	0084	EX V/T ACT/CIRC-B2	—	2	×	B	EC-198
P0101	0101	MAF SEN/CIRCUIT-B1	—	2	×	B	EC-201
P0102	0102	MAF SEN/CIRCUIT-B1	—	1	×	B	EC-206
P0103	0103	MAF SEN/CIRCUIT-B1	—	1	×	B	EC-206
P0111	0111	IAT SENSOR 1 B1	—	2	×	A	EC-211
P0112	0112	IAT SEN/CIRCUIT-B1	—	2	×	B	EC-213
P0113	0113	IAT SEN/CIRCUIT-B1	—	2	×	B	EC-213
P0116	0116	ECT SEN/CIRC	—	2	×	A	EC-215
P0117	0117	ECT SEN/CIRC	—	1	×	B	EC-217
P0118	0118	ECT SEN/CIRC	—	1	×	B	EC-217
P0122	0122	TP SEN 2/CIRC-B1	—	1	×	B	EC-219
P0123	0123	TP SEN 2/CIRC-B1	—	1	×	B	EC-219
P0125	0125	ECT SENSOR	—	2	×	B	EC-222
P0127	0127	IAT SENSOR-B1	—	2	×	B	EC-224
P0128	0128	THERMSTAT FNCTN	—	2	×	A	EC-226
P0130	0130	A/F SENSOR1 (B1)	—	2	×	A	EC-229
P0131	0131	A/F SENSOR1 (B1)	—	2	×	B	EC-233
P0132	0132	A/F SENSOR1 (B1)	—	2	×	B	EC-236

cardiagn.com

DTC[*1]		Items (CONSULT screen terms)	SRT code	Trip	MIL	Permanent DTC group[*4]	Refer-ence page
CONSULT GST[*2]	ECM[*3]						
P0137	0137	HO2S2 (B1)	×	2	×	A	EC-239
P0138	0138	HO2S2 (B1)	×	2	×	A	EC-245
P0139	0139	HO2S2 (B1)	×	2	×	A	EC-252
P0141	0141	HO2S2 HTR (B1)	—	2	×	B	EC-193
P014C	014C	A/F SENSOR1 (B1)	×	2	×	A	EC-261
P014D	014D	A/F SENSOR1 (B1)	×	2	×	A	EC-261
P014E	014E	A/F SENSOR1 (B2)	×	2	×	A	EC-261
P014F	014F	A/F SENSOR1 (B2)	×	2	×	A	EC-261
P0150	0150	A/F SENSOR1 (B2)	—	2	×	A	EC-229
P0151	0151	A/F SENSOR1 (B2)	—	2	×	B	EC-233
P0152	0152	A/F SENSOR1 (B2)	—	2	×	B	EC-236
P0157	0157	HO2S2 (B2)	×	2	×	A	EC-239
P0158	0158	HO2S2 (B2)	×	2	×	A	EC-245
P0159	0159	HO2S2 (B2)	×	2	×	A	EC-252
P015A	015A	A/F SENSOR1 (B1)	×	2	×	A	EC-261
P015B	015B	A/F SENSOR1 (B1)	×	2	×	A	EC-261
P015C	015C	A/F SENSOR1 (B2)	×	2	×	A	EC-261
P015D	015D	A/F SENSOR1 (B2)	×	2	×	A	EC-261
P0161	0161	HO2S2 HTR (B2)	—	2	×	B	EC-193
P0171	0171	FUEL SYS-LEAN-B1	—	2	×	B	EC-267
P0172	0172	FUEL SYS-RICH-B1	—	2	×	B	EC-271
P0174	0174	FUEL SYS-LEAN-B2	—	2	×	B	EC-267
P0175	0175	FUEL SYS-RICH-B2	—	2	×	B	EC-271
P0181	0181	FTT SENSOR	—	2	×	A and B	EC-31
P0182	0182	FTT SEN/CIRCUIT	—	2	×	B	EC-279
P0183	0183	FTT SEN/CIRCUIT	—	2	×	B	EC-279
P0196	0196	EOT SENSOR	—	2	×	A and B	EC-281
P0197	0197	EOT SEN/CIRC	—	2	×	B	EC-285
P0198	0198	EOT SEN/CIRC	—	2	×	B	EC-285
P0222	0222	TP SEN 1/CIRC-B1	—	1	×	B	EC-287
P0223	0223	TP SEN 1/CIRC-B1	—	1	×	B	EC-287
P0300	0300	MULTI CYL MISFIRE	—	1 or 2	×	B	EC-290
P0301	0301	CYL 1 MISFIRE	—	1 or 2	×	B	EC-290
P0302	0302	CYL 2 MISFIRE	—	1 or 2	×	B	EC-290
P0303	0303	CYL 3 MISFIRE	—	1 or 2	×	B	EC-290
P0304	0304	CYL 4 MISFIRE	—	1 or 2	×	B	EC-290
P0305	0305	CYL 5 MISFIRE	—	1 or 2	×	B	EC-290
P0306	0306	CYL 6 MISFIRE	—	1 or 2	×	B	EC-290
P0327	0327	KNOCK SEN/CIRC-B1	—	2	—	—	EC-296
P0328	0328	KNOCK SEN/CIRC-B1	—	2	—	—	EC-296
P0332	0332	KNOCK SEN/CIRC-B2	—	2	—	—	EC-296
P0333	0333	KNOCK SEN/CIRC-B2	—	2	—	—	EC-296

cardiagn.com

DTC[*1]		Items (CONSULT screen terms)	SRT code	Trip	MIL	Permanent DTC group[*4]	Refer-ence page
CONSULT GST[*2]	ECM[*3]						
P0335	0335	CKP SEN/CIRCUIT	—	2	×	B	EC-298
P0340	0340	CMP SEN/CIRC-B1	—	2	×	B	EC-301
P0345	0345	CMP SEN/CIRC-B2	—	2	×	B	EC-301
P0420	0420	TW CATALYST SYS-B1	×	2	×	A	EC-305
P0430	0430	TW CATALYST SYS-B2	×	2	×	A	EC-305
P0441	0441	EVAP PURG FLOW/MON	×	2	×	A	EC-310
P0443	0443	PURG VOLUME CONT/V	—	2	×	A	EC-29
P0444	0444	PURG VOLUME CONT/V	—	2	×	B	EC-320
P0445	0445	PURG VOLUME CONT/V	—	2	×	B	EC-320
P0447	0447	VENT CONTROL VALVE	—	2	×	B	EC-29
P0448	0448	VENT CONTROL VALVE	—	2	×	B	EC-327
P0451	0451	EVAP SYS PRES SEN	—	2	×	A	EC-29
P0452	0452	EVAP SYS PRES SEN	—	2	×	B	EC-334
P0453	0453	EVAP SYS PRES SEN	—	2	×	B	EC-337
P0456	0456	EVAP VERY SML LEAK	×[*7]	2	×	A	EC-341
P0460	0460	FUEL LEV SEN SLOSH	—	2	×	A	EC-347
P0461	0461	FUEL LEVEL SENSOR	—	2	×	B	EC-348
P0462	0462	FUEL LEVL SEN/CIRC	—	2	×	B	EC-350
P0463	0463	FUEL LEVL SEN/CIRC	—	2	×	B	EC-350
P0500	0500	VEH SPEED SEN/CIRC[*6]	—	2	×	B	EC-351
P0506	0506	ISC SYSTEM	—	2	×	B	EC-353
P0507	0507	ISC SYSTEM	—	2	×	B	EC-355
P050A	050A	COLD START CONTROL	—	2	×	A	EC-357
P050E	050E	COLD START CONTROL	—	2	×	A	EC-357
P0520	0520	EOP SENSOR/SWITCH	—	2	—	—	EC-359
P0524	0524	ENGINE OIL PRESSURE	—	1	—	—	EC-362
P052A	052A	CAMSHAFT POSITION TIM-ING B1	—	2	×	B	EC-365
P052B	052B	CAMSHAFT POSITION TIM-ING B1	—	2	×	B	EC-365
P052C	052C	CAMSHAFT POSITION TIM-ING B2	—	2	×	B	EC-365
P052D	052D	CAMSHAFT POSITION TIM-ING B2	—	2	×	B	EC-365
P0603	0603	ECM BACK UP/CIRCUIT[*10]	—	2	× or —	B	EC-371
P0604	0604	ECM	—	1	×	B	EC-373
P0605	0605	ECM	—	1	× or —	B	EC-374
P0606	0606	CONTROL MODULE	—	1	× or —	B	EC-375
P0607	0607	ECM	—	1 or 2	× or —	B	EC-376
P060A	060A	CONTROL MODULE	—	1	×	B	EC-377
P060B	060B	CONTROL MODULE	—	1	×	B	EC-378
P062F	062F	CONTROL MODULE	—	1	×	B	EC-371
P0643	0643	SENSOR POWER/CIRC	—	1	×	B	EC-379

cardiagn.com

DTC[*1]		Items (CONSULT screen terms)	SRT code	Trip	MIL	Permanent DTC group[*4]	Refer-ence page
CONSULT GST[*2]	ECM[*3]						
P0850	0850	P-N POS SW/CIRCUIT	—	2	×	B	EC-381
P1078	1078	EXH TIM SEN/CIRC-B1	—	2	×	B	EC-384
P1084	1084	EXH TIM SEN/CIRC-B2	—	2	×	B	EC-384
P1148	1148	CLOSED LOOP-B1	—	1	×	A	EC-388
P1168	1168	CLOSED LOOP-B2	—	1	×	A	EC-388
P1212	1212	TCS/CIRC	—	2	—	—	EC-389
P1217	1217	ENG OVER TEMP	—	1	×	B	EC-390
P1225	1225	CTP LEARNING-B1	—	2	—	—	EC-394
P1226	1226	CTP LEARNING-B1	—	2	—	—	EC-395
P1550	1550	BAT CURRENT SENSOR	—	2	—	—	EC-396
P1551	1551	BAT CURRENT SENSOR	—	2	—	—	EC-399
P1552	1552	BAT CURRENT SENSOR	—	2	—	—	EC-399
P1553	1553	BAT CURRENT SENSOR	—	2	—	—	EC-402
P1554	1554	BAT CURRENT SENSOR	—	2	—	—	EC-405
P1556	1556	BAT TMP SEN/CIRC	—	2	—	—	EC-408
P1557	1557	BAT TMP SEN/CIRC	—	2	—	—	EC-408
P1564	1564	ASCD SW	—	1	—	—	EC-410
P1572	1572	ASCD BRAKE SW	—	1	—	—	EC-413
P1574	1574	ASCD VHL SPD SEN	—	1	—	—	EC-419
P1610	1610	LOCK MODE	—	2	—	—	SEC-62
P1611	1611	ID DISCORD, IMM-ECM	—	2	—	—	SEC-63
P1612	1612	CHAIN OF ECM-IMMU	—	2	—	—	SEC-64
P1650	1650	STR MTR RELAY2	—	2	× or —	B	EC-421
P1651	1651	STR MTR RELAY	—	2	× or —	B	EC-424
P1652	1652	STR MTR SYS COMM	—	1	×	B	EC-427
P1715	1715	IN PULY SPEED	—	2	—	—	EC-430
P1800	1800	VIAS S/V-1	—	2	—	—	EC-431
P1801	1801	VIAS S/V-2	—	2	—	—	EC-27
P1805	1805	BRAKE SW/CIRCUIT	—	2	—	—	EC-435
P2096	2096	A/F SENSOR1 (B1)	—	2	×	A	EC-437
P2097	2097	A/F SENSOR1 (B1)	—	2	×	A	EC-437
P2098	2098	A/F SENSOR1 (B2)	—	2	×	A	EC-437
P2099	2099	A/F SENSOR1 (B2)	—	2	×	A	EC-437
P2100	2100	ETC MOT PWR-B1	—	1	×	B	EC-441
P2101	2101	ETC FNCTN/CIRC-B1	—	1	×	B	EC-443
P2103	2103	ETC MOT PWR	—	1	×	B	EC-441
P2118	2118	ETC MOT-B1	—	1	×	B	EC-446
P2119	2119	ETC ACTR-B1	—	1	×	B	EC-448
P2122	2122	APP SEN 1/CIRC	—	1	×	B	EC-450
P2123	2123	APP SEN 1/CIRC	—	1	×	B	EC-450
P2127	2127	APP SEN 2/CIRC	—	1	×	B	EC-452
P2128	2128	APP SEN 2/CIRC	—	1	×	B	EC-452

cardiagn.com

DTC*1		Items (CONSULT screen terms)	SRT code	Trip	MIL	Permanent DTC group*4	Refer-ence page
CONSULT GST*2	ECM*3						
P2135	2135	TP SENSOR-B1	—	1	×	B	EC-455
P2138	2138	APP SENSOR	—	1	×	B	EC-457
P219A	219A	AIR FUEL RATIO IMBAL-ANCE B1	—	2	×	A	EC-460
P219B	219B	AIR FUEL RATIO IMBAL-ANCE B2	—	2	×	A	EC-460
P2610	2610	ECM/PCM INTERNAL ENG OFF TIMER	—	2	×	A and B	EC-465

*1: 1st trip DTC No. is the same as DTC No.

*2: This number is prescribed by SAE J2012/ISO 15031-6.

*3: In Diagnostic Test Mode II (Self-diagnostic results), this number is controlled by NISSAN.

*4: Refer to EC-161, "Description", “HOW TO ERASE PERMANENT DTC”.

*5: The troubleshooting for this DTC needs CONSULT.

*6: When the fail-safe operations for both self-diagnoses occur, the MIL illuminates.

*7: SRT code will not be set if the self-diagnostic result is NG.

*8: When the ECM is in the mode displays SRT status, MIL may blink. For the details, refer to “How to Display SRT Status”.

*9: When erasing this DTC, always use CONSULT or GST.

*10: This self-diagnosis is not for ECM power supply circuit, even though “ECM BACK UP/CIRCUIT” is displayed on CONSULT screen.

Test Value and Test Limit

INFOID:0000000013053829

The following is the information specified in Service $06 of SAE J1979/ISO 15031-5.
The test value is a parameter used to determine whether a system/circuit diagnostic test is OK or NG while being monitored by the ECM during self-diagnosis. The test limit is a reference value which is specified as the maximum or minimum value and is compared with the test value being monitored.
These data (test value and test limit) are specified by On Board Monitor ID (OBDMID), Test ID (TID), Unit and Scaling ID and can be displayed on the GST screen.
The items of the test value and test limit will be displayed with GST screen which items are provided by the ECM. (e.g., if bank 2 is not applied on this vehicle, only the items of bank 1 are displayed)

cardiagn.com

Item	OBD-MID	Self-diagnostic test item	DTC	Test value and Test limit (GST display)		Description
				TID	Unit and Scaling ID	
HO2S	01H	Air fuel ratio (A/F) sensor 1 (Bank 1)	P0131	83H	0BH	Minimum sensor output voltage for test cycle
			P0131	84H	0BH	Maximum sensor output voltage for test cycle
			P0130	85H	0BH	Minimum sensor output voltage for test cycle
			P0130	86H	0BH	Maximum sensor output voltage for test cycle
			P0133	87H	04H	Response rate: Response ratio (lean to rich)
			P0133	88H	04H	Response rate: Response ratio (rich to lean)
			P2A00 or P2096	89H	84H	The amount of shift in air fuel ratio (too lean)
			P2A00 or P2097	8AH	84H	The amount of shift in air fuel ratio (too rich)
			P0130	8BH	0BH	Difference in sensor output voltage
			P0133	8CH	83H	Response gain at the limited frequency
			P014C	8DH	04H	O2 sensor slow response - Rich to lean bank 1 sensor 1
			P014C	8EH	04H	O2 sensor slow response - Rich to lean bank 1 sensor 1
			P014D	8FH	84H	O2 sensor slow response - Lean to rich bank 1 sensor 1
			P014D	90H	84H	O2 sensor slow response - Lean to rich bank 1 sensor 1
			P015A	91H	01H	O2 sensor delayed response - Rich to lean bank 1 sensor 1
			P015A	92H	01H	O2 sensor delayed response - Rich to lean bank 1 sensor 1
			P015B	93H	01H	O2 sensor delayed response - Lean to rich bank 1 sensor 1
			P015B	94H	01H	O2 sensor delayed response - Lean to rich bank 1 sensor 1
			P0133	95H	04H	Response rate: Response ratio (lean to rich)
			P0133	96H	84H	Response rate: Response ratio (rich to lean)

cardiagn.com

Item	OBD-MID	Self-diagnostic test item	DTC	Test value and Test limit (GST display)		Description
				TID	Unit and Scaling ID	
HO2S	02H	Heated oxygen sensor 2 (Bank 1)	P0138	07H	0CH	Minimum sensor output voltage for test cycle
			P0137	08H	0CH	Maximum sensor output voltage for test cycle
			P0138	80H	0CH	Sensor output voltage
			P0139	81H	0CH	Difference in sensor output voltage
			P0139	82H	11H	Rear O2 sensor delay response diagnosis
	03H	Heated oxygen sensor 3 (Bank 1)	P0143	07H	0CH	Minimum sensor output voltage for test cycle
			P0144	08H	0CH	Maximum sensor output voltage for test cycle
			P0146	80H	0CH	Sensor output voltage
			P0145	81H	0CH	Difference in sensor output voltage
	05H	Air fuel ratio (A/F) sensor 1 (Bank 2)	P0151	83H	0BH	Minimum sensor output voltage for test cycle
			P0151	84H	0BH	Maximum sensor output voltage for test cycle
			P0150	85H	0BH	Minimum sensor output voltage for test cycle
			P0150	86H	0BH	Maximum sensor output voltage for test cycle
			P0153	87H	04H	Response rate: Response ratio (lean to rich)
			P0153	88H	04H	Response rate: Response ratio (rich to lean)
			P2A03 or P2098	89H	84H	The amount of shift in air fuel ratio (too lean)
			P2A03 or P2099	8AH	84H	The amount of shift in air fuel ratio (too rich)
			P0150	8BH	0BH	Difference in sensor output voltage
			P0153	8CH	83H	Response gain at the limited frequency
			P014E	8DH	04H	O2 sensor slow response - Rich to lean bank 2 sensor 1
			P014E	8EH	04H	O2 sensor slow response - Rich to lean bank 2 sensor 1
			P014F	8FH	84H	O2 sensor slow response - Lean to rich bank 2 sensor 1
			P014F	90H	84H	O2 sensor slow response - Lean to rich bank 2 sensor 1
			P015C	91H	01H	O2 sensor delayed response - Rich to lean bank 2 sensor 1
			P015C	92H	01H	O2 sensor delayed response - Rich to lean bank 2 sensor 1
			P015D	93H	01H	O2 sensor delayed response - Lean to rich bank 2 sensor 1

cardiagn.com

Item	OBD-MID	Self-diagnostic test item	DTC	Test value and Test limit (GST display)		Description
				TID	Unit and Scaling ID	
HO2S	05H	Air fuel ratio (A/F) sensor 1 (Bank 2)	P015D	94H	01H	O2 sensor delayed response - Lean to rich bank 2 sensor 1
			P0153	95H	04H	Response rate: Response ratio (lean to rich)
			P0153	96H	84H	Response rate: Response ratio (rich to lean)
	06H	Heated oxygen sensor 2 (Bank 2)	P0158	07H	0CH	Minimum sensor output voltage for test cycle
			P0157	08H	0CH	Maximum sensor output voltage for test cycle
			P0158	80H	0CH	Sensor output voltage
			P0159	81H	0CH	Difference in sensor output voltage
			P0159	82H	11H	Rear O2 sensor delay response diagnosis
	07H	Heated oxygen sensor 3 (Bank2)	P0163	07H	0CH	Minimum sensor output voltage for test cycle
			P0164	08H	0CH	Maximum sensor output voltage for test cycle
			P0166	80H	0CH	Sensor output voltage
			P0165	81H	0CH	Difference in sensor output voltage
CATALYST	21H	Three way catalyst function (Bank1)	P0420	80H	01H	O2 storage index
			P0420	82H	01H	Switching time lag engine exhaust index value
			P2423	83H	0CH	Difference in 3rd O2 sensor output voltage
			P2423	84H	84H	O2 storage index in HC trap catalyst
	22H	Three way catalyst function (Bank2)	P0430	80H	01H	O2 storage index
			P0430	82H	01H	Switching time lag engine exhaust index value
			P2424	83H	0CH	Difference in 3rd O2 sensor output voltage
			P2424	84H	84H	O2 storage index in HC trap catalyst
EGR SYSTEM	31H	EGR function	P0400	80H	96H	Low flow faults: EGR temp change rate (short term)
			P0400	81H	96H	Low flow faults: EGR temp change rate (long term)
			P0400	82H	96H	Low flow faults: Difference between max EGR temp and EGR temp under idling condition
			P0400	83H	96H	Low flow faults: Max EGR temp
			P1402	84H	96H	High Flow Faults: EGR temp increase rate
			P0402	85H	FCH	EGR differential pressure high flow
			P0401	86H	37H	EGR differential pressure low flow
			P2457	87H	96H	EGR temperature

cardiagn.com

Item	OBD-MID	Self-diagnostic test item	DTC	Test value and Test limit (GST display)		Description
				TID	Unit and Scaling ID	
VVT SYSTEM	35H	VVT Monitor (Bank1)	P0011	80H	9DH	VTC intake function diagnosis (VTC alignment check diagnosis)
			P0014	81H	9DH	VTC exhaust function diagnosis (VTC alignment check diagnosis)
			P0011	82H	9DH	VTC intake function diagnosis (VTC drive failure diagnosis)
			P0014	83H	9DH	VTC exhaust function diagnosis (VTC drive failure diagnosis)
			P100A	84H	10H	VEL slow response diagnosis
			P1090	85H	10H	VEL servo system diagnosis
			P0011	86H	9DH	VTC intake intermediate lock function diagnosis (VTC intermediate position alignment check diagnosis)
			Advanced: P052A Retarded: P052B	87H	9DH	VTC intake intermediate lock system diagnosis (VTC intermediate lock position check diagnosis)
	36H	VVT Monitor (Bank2)	P0021	80H	9DH	VTC intake function diagnosis (VTC alignment check diagnosis)
			P0024	81H	9DH	VTC exhaust function diagnosis (VTC alignment check diagnosis)
			P0021	82H	9DH	VTC intake function diagnosis (VTC drive failure diagnosis)
			P0024	83H	9DH	VTC exhaust function diagnosis (VTC drive failure diagnosis)
			P100B	84H	10H	VEL slow response diagnosis
			P1093	85H	10H	VEL servo system diagnosis
			P0021	86H	9DH	VTC intake intermediate lock function diagnosis (VTC intermediate position alignment check diagnosis)
			Advanced: P052C Retarded: P052D	87H	9DH	VTC intake intermediate lock system diagnosis (VTC intermediate lock position check diagnosis)
EVAP SYSTEM	39H	EVAP control system leak (Cap Off)	P0455	80H	0CH	Difference in pressure sensor output voltage before and after pull down
	3BH	EVAP control system leak (Small leak)	P0442	80H	05H	Leak area index (for more than 0.04 inch)
	3CH	EVAP control system leak (Very small leak)	P0456	80H	05H	Leak area index (for more than 0.02 inch)
			P0456	81H	FDH	Maximum internal pressure of EVAP system during monitoring
			P0456	82H	FDH	Internal pressure of EVAP system at the end of monitoring
	3DH	Purge flow system	P0441	83H	0CH	Difference in pressure sensor output voltage before and after vent control valve close

cardiagn.com

Item	OBD-MID	Self-diagnostic test item	DTC	Test value and Test limit (GST display)		Description
				TID	Unit and Scaling ID	
O2 SENSOR HEATER	41H	A/F sensor 1 heater (Bank 1)	Low Input: P0031 High Input: P0032	81H	0BH	Converted value of heater electric current to voltage
			P0030	83H	0BH	A/F sensor heater circuit malfunction
	42H	Heated oxygen sensor 2 heater (Bank 1)	Low Input: P0037 High Input: P0038	80H	0CH	Converted value of heater electric current to voltage
			P0141	81H	14H	Rear O2 sensor internal impedance
	43H	Heated oxygen sensor 3 heater (Bank 1)	P0043	80H	0CH	Converted value of heater electric current to voltage
	45H	A/F sensor 1 heater (Bank 2)	Low Input: P0051 High Input: P0052	81H	0BH	Converted value of heater electric current to voltage
			P0036	83H	0BH	A/F sensor heater circuit malfunction
	46H	Heated oxygen sensor 2 heater (Bank 2)	Low Input: P0057 High Input: P0058	80H	0CH	Converted value of heater electric current to voltage
			P0161	81H	14CH	Rear O2 sensor internal impedance
	47H	Heated oxygen sensor 3 heater (Bank 2)	P0063	80H	0CH	Converted value of heater electric current to voltage
SECONDARY AIR	71H	Secondary air system	P0411	80H	01H	Secondary air injection system incorrect flow detected
			Bank1: P0491 Bank2: P0492	81H	01H	Secondary air injection system insufficient flow
			P2445	82H	01H	Secondary air injection system pump stuck off
			P2448	83H	01H	Secondary air injection system high airflow
			Bank1: P2440 Bank2: P2442	84H	01H	Secondary air injection system switching valve stuck open
			P2440	85H	01H	Secondary air injection system switching valve stuck open
			P2444	86H	01H	Secondary air injection system pump stuck on

cardiagn.com

Item	OBD-MID	Self-diagnostic test item	DTC	Test value and Test limit (GST display)		Description
				TID	Unit and Scaling ID	
FUEL SYSTEM	81H	Fuel injection system function (Bank 1)	P0171 or P0172	80H	2FH	Long term fuel trim
			P0171 or P0172	81H	24H	The number of lambda control clamped
			P117A / P219A	82H	03H	Cylinder A/F imbalance monitoring
			P219C	83H	83H	Air-fuel ratio cylinder imbalance diagnosis CPS (Crankshaft Position Sensor) method #1 cylinder parameter
			P219D	84H	83H	Air-fuel ratio cylinder imbalance diagnosis CPS (Crankshaft Position Sensor) method #2 cylinder parameter
			P219E	85H	83H	Air-fuel ratio cylinder imbalance diagnosis CPS (Crankshaft Position Sensor) method #3 cylinder parameter
			P219F	86H	83H	Air-fuel ratio cylinder imbalance diagnosis CPS (Crankshaft Position Sensor) method #4 cylinder parameter
			P21A0	87H	83H	Air-fuel ratio cylinder imbalance diagnosis CPS (Crankshaft Position Sensor) method #5 cylinder parameter
			P21A2	89H	83H	Air-fuel ratio cylinder imbalance diagnosis CPS (Crankshaft Position Sensor) method #7 cylinder parameter
	82H	Fuel injection system function (Bank 2)	P0174 or P0175	80H	2FH	Long term fuel trim
			P0174 or P0175	81H	24H	The number of lambda control clamped
			P117B / P219B	82H	03H	Cylinder A/F imbalance monitoring
			P219D	84H	83H	Air-fuel ratio cylinder imbalance diagnosis CPS (Crankshaft Position Sensor) method #2 cylinder parameter
			P219F	86H	83H	Air-fuel ratio cylinder imbalance diagnosis CPS (Crankshaft Position Sensor) method #4 cylinder parameter
			P21A1	88H	83H	Air-fuel ratio cylinder imbalance diagnosis CPS (Crankshaft Position Sensor) method #6 cylinder parameter
			P21A3	8AH	83H	Air-fuel ratio cylinder imbalance diagnosis CPS (Crankshaft Position Sensor) method #8 cylinder parameter

cardiagn.com

Item	OBD-MID	Self-diagnostic test item	DTC	Test value and Test limit (GST display)		Description
				TID	Unit and Scaling ID	
MISFIRE	A1H	Multiple cylinder misfires	P0301	80H	24H	Misfiring counter at 1000 revolution of the first cylinder
			P0302	81H	24H	Misfiring counter at 1000 revolution of the second cylinder
			P0303	82H	24H	Misfiring counter at 1000 revolution of the third cylinder
			P0304	83H	24H	Misfiring counter at 1000 revolution of the fourth cylinder
			P0305	84H	24H	Misfiring counter at 1000 revolution of the fifth cylinder
			P0306	85H	24H	Misfiring counter at 1000 revolution of the sixth cylinder
			P0307	86H	24H	Misfiring counter at 1000 revolution of the seventh cylinder
			P0308	87H	24H	Misfiring counter at 1000 revolution of the eighth cylinder
			P0300	88H	24H	Misfiring counter at 1000 revolution of the multiple cylinders
			P0301	89H	24H	Misfiring counter at 200 revolution of the first cylinder
			P0302	8AH	24H	Misfiring counter at 200 revolution of the second cylinder
			P0303	8BH	24H	Misfiring counter at 200 revolution of the third cylinder
			P0304	8CH	24H	Misfiring counter at 200 revolution of the fourth cylinder
			P0305	8DH	24H	Misfiring counter at 200 revolution of the fifth cylinder
			P0306	8EH	24H	Misfiring counter at 200 revolution of the sixth cylinder
			P0307	8FH	24H	Misfiring counter at 200 revolution of the seventh cylinder
			P0308	90H	24H	Misfiring counter at 200 revolution of the eighth cylinder
			P0300	91H	24H	Misfiring counter at 1000 revolution of the single cylinder
			P0300	92H	24H	Misfiring counter at 200 revolution of the single cylinder
			P0300	93H	24H	Misfiring counter at 200 revolution of the multiple cylinders

cardiagn.com

Item	OBD-MID	Self-diagnostic test item	DTC	Test value and Test limit (GST display)		Description
				TID	Unit and Scaling ID	
MISFIRE	A2H	No. 1 cylinder misfire	P0301	0BH	24H	EWMA (Exponential Weighted Moving Average) misfire counts for last 10 driving cycles
			P0301	0CH	24H	Misfire counts for last/current driving cycles
	A3H	No. 2 cylinder misfire	P0302	0BH	24H	EWMA (Exponential Weighted Moving Average) misfire counts for last 10 driving cycles
			P0302	0CH	24H	Misfire counts for last/current driving cycles
	A4H	No. 3 cylinder misfire	P0303	0BH	24H	EWMA (Exponential Weighted Moving Average) misfire counts for last 10 driving cycles
			P0303	0CH	24H	Misfire counts for last/current driving cycles
	A5H	No. 4 cylinder misfire	P0304	0BH	24H	EWMA (Exponential Weighted Moving Average) misfire counts for last 10 driving cycles
			P0304	0CH	24H	Misfire counts for last/current driving cycles
	A6H	No. 5 cylinder misfire	P0305	0BH	24H	EWMA (Exponential Weighted Moving Average) misfire counts for last 10 driving cycles
			P0305	0CH	24H	Misfire counts for last/current driving cycles
	A7H	No. 6 cylinder misfire	P0306	0BH	24H	EWMA (Exponential Weighted Moving Average) misfire counts for last 10 driving cycles
			P0306	0CH	24H	Misfire counts for last/current driving cycles
	A8H	No. 7 cylinder misfire	P0307	0BH	24H	EWMA (Exponential Weighted Moving Average) misfire counts for last 10 driving cycles
			P0307	0CH	24H	Misfire counts for last/current driving cycles
	A9H	No. 8 cylinder misfire	P0308	0BH	24H	EWMA (Exponential Weighted Moving Average) misfire counts for last 10 driving cycles
			P0308	0CH	24H	Misfire counts for last/current driving cycles


cardiagn.com

WIRING DIAGRAM


ENGINE CONTROL SYSTEM

Wiring Diagram


INFOID:0000000012406317

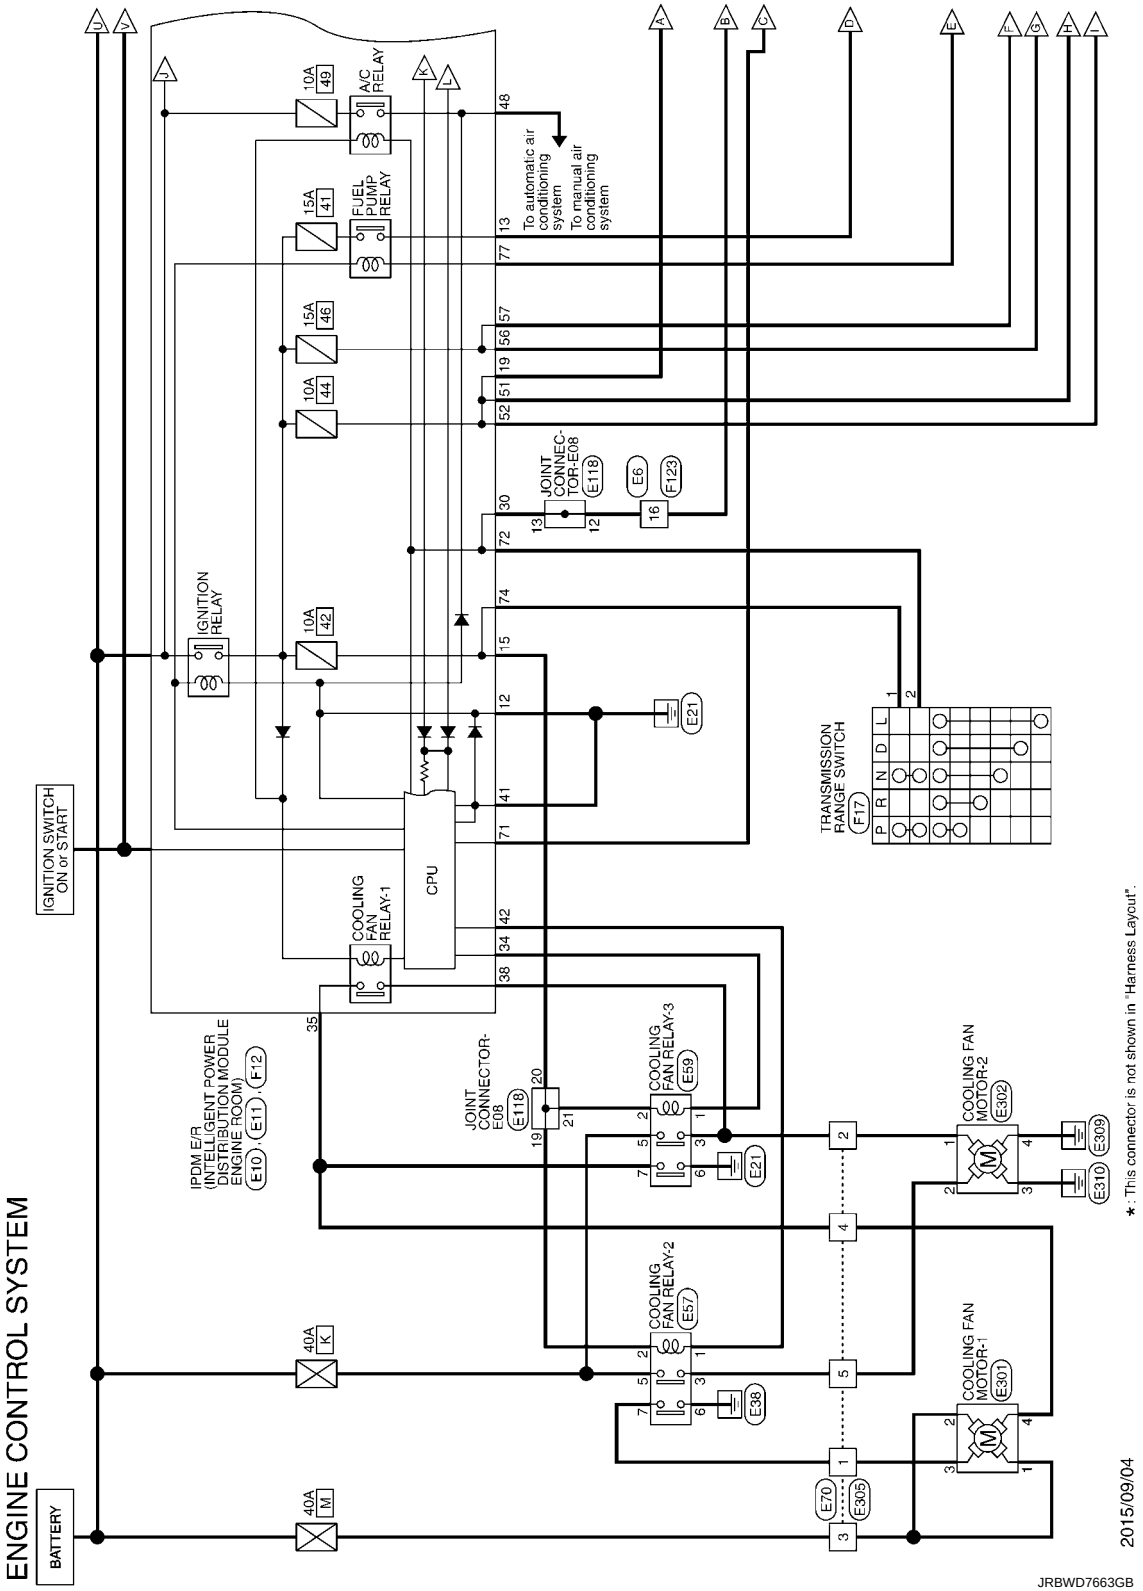


cardiagn.com

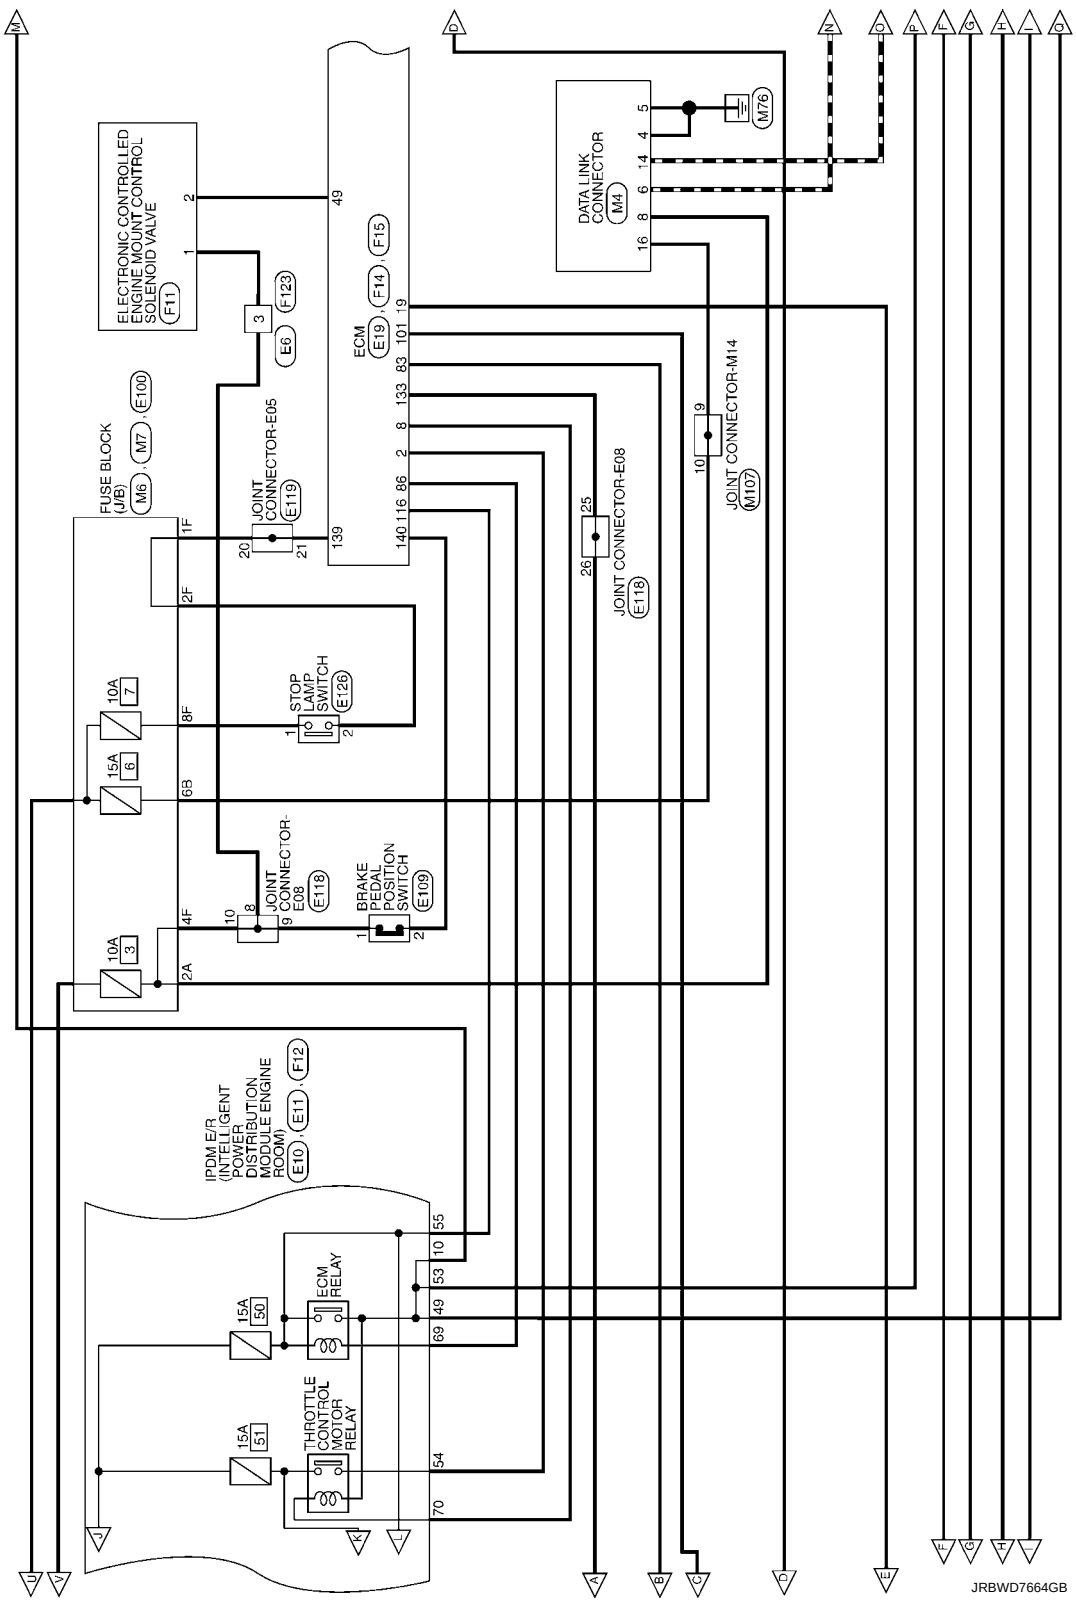


cardiagn.com

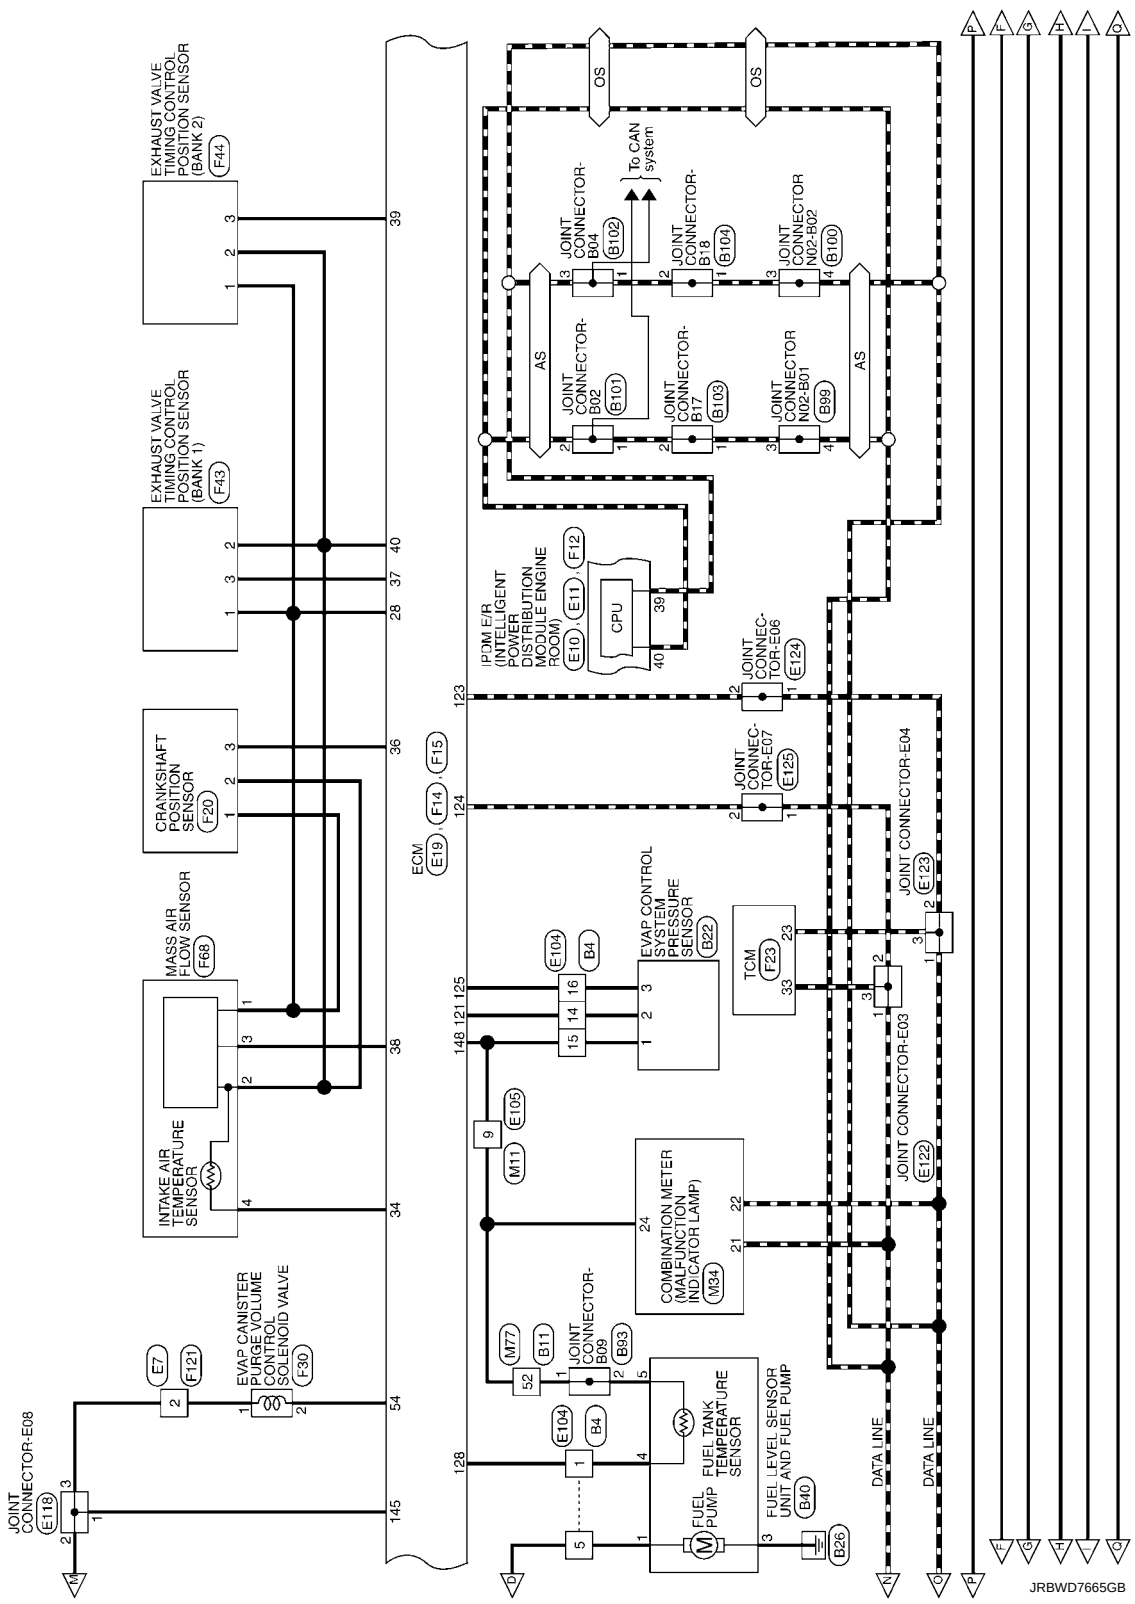


cardiagn.com

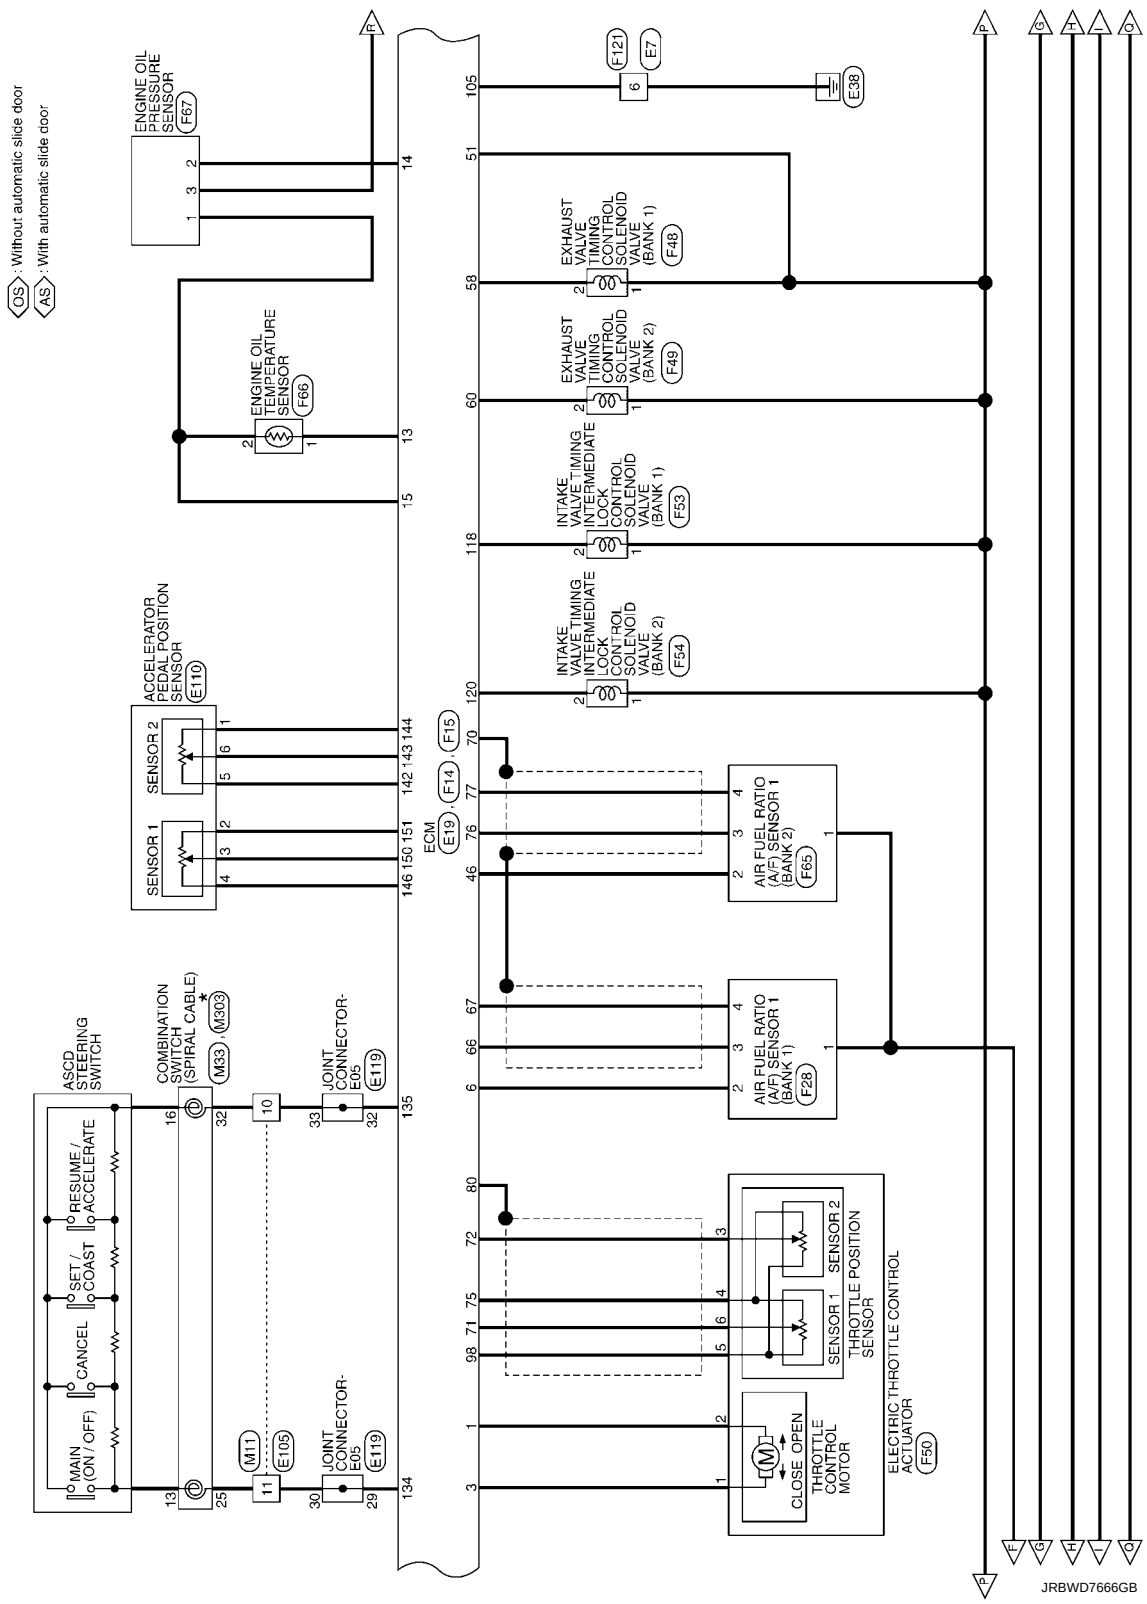


cardiagn.com

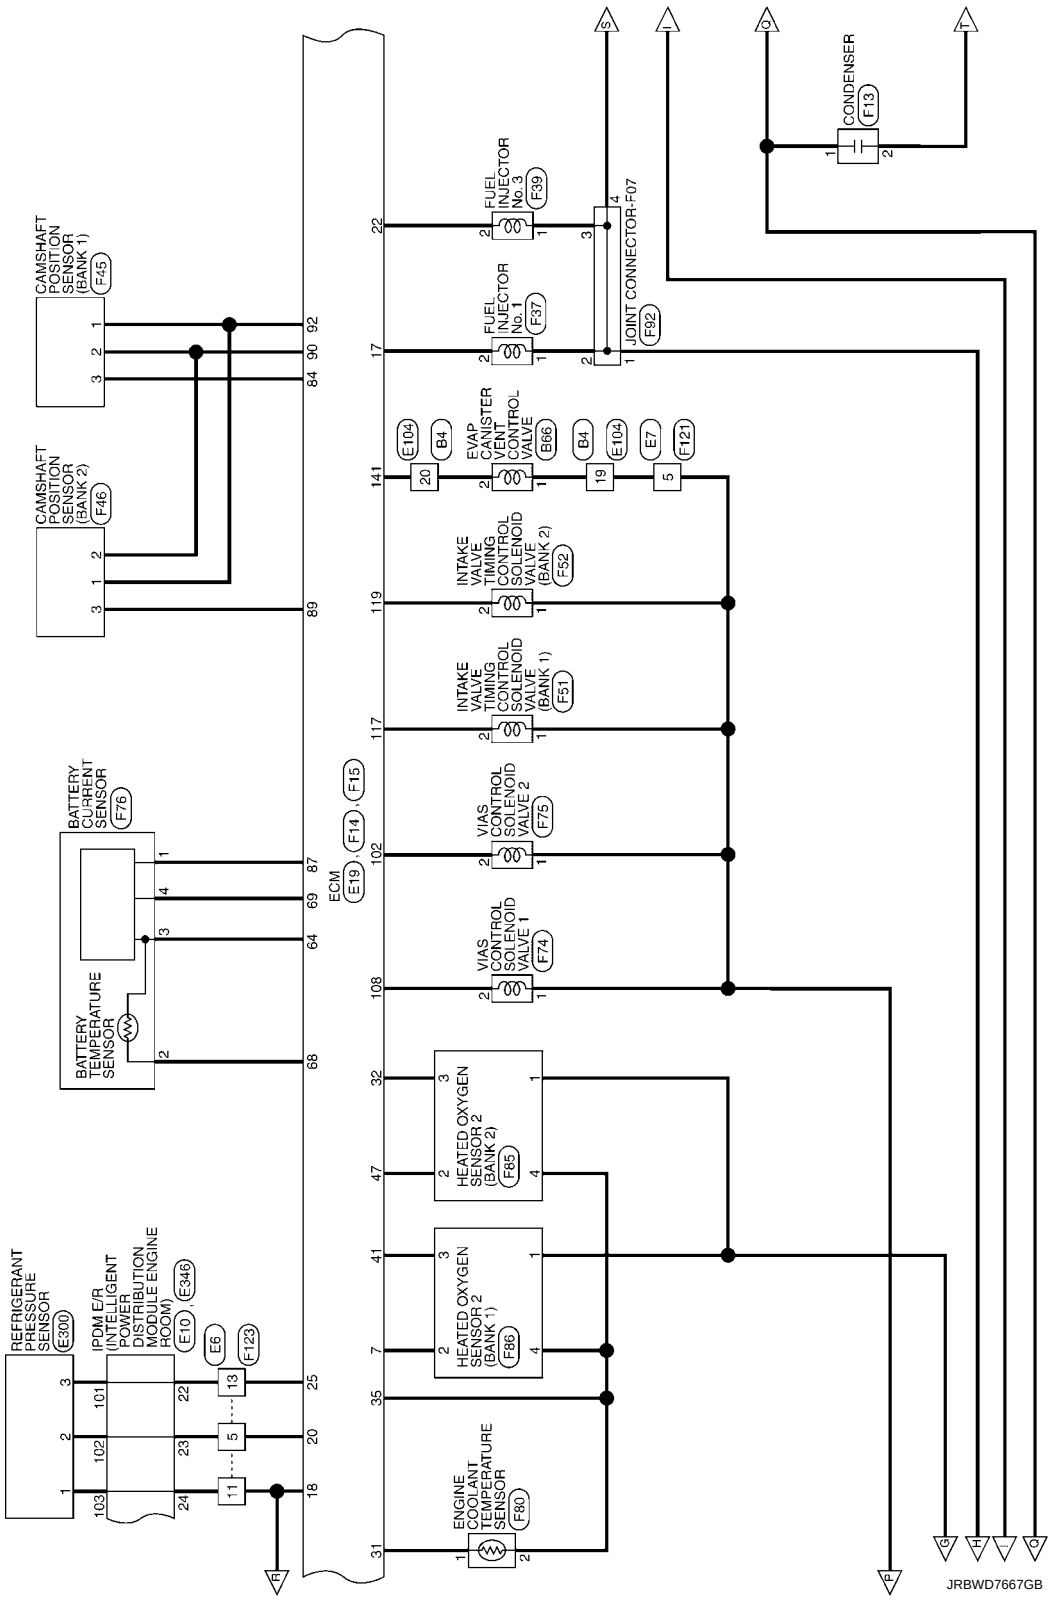

cardiagn.com

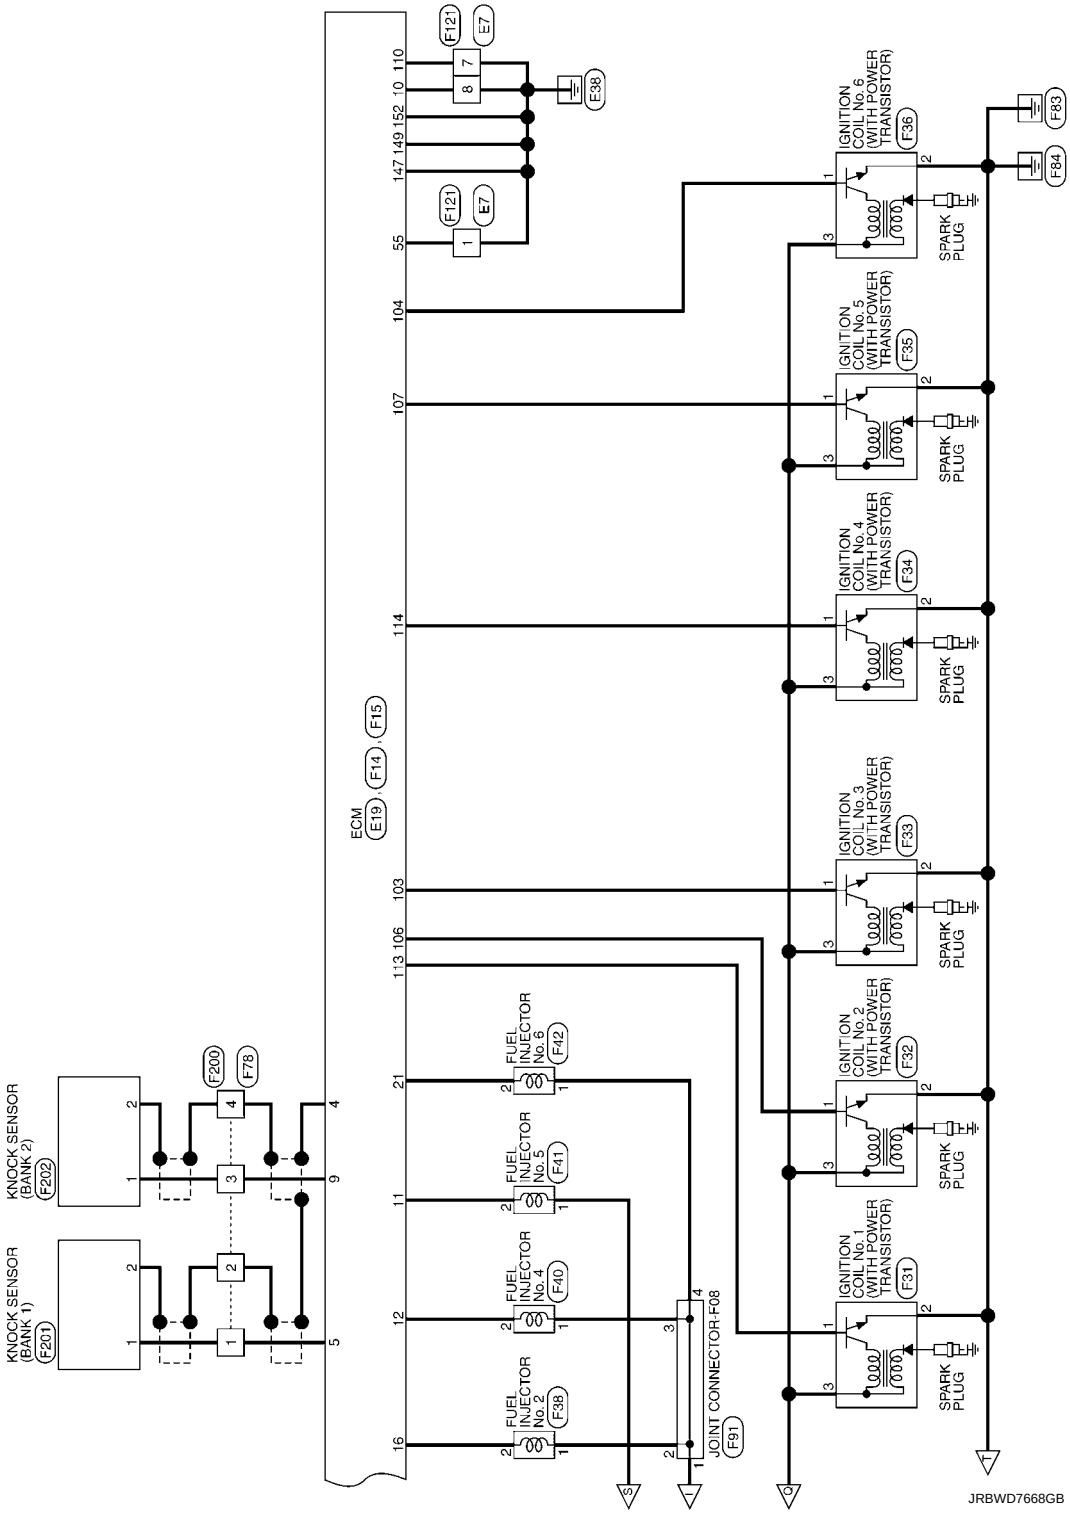

cardiagn.com

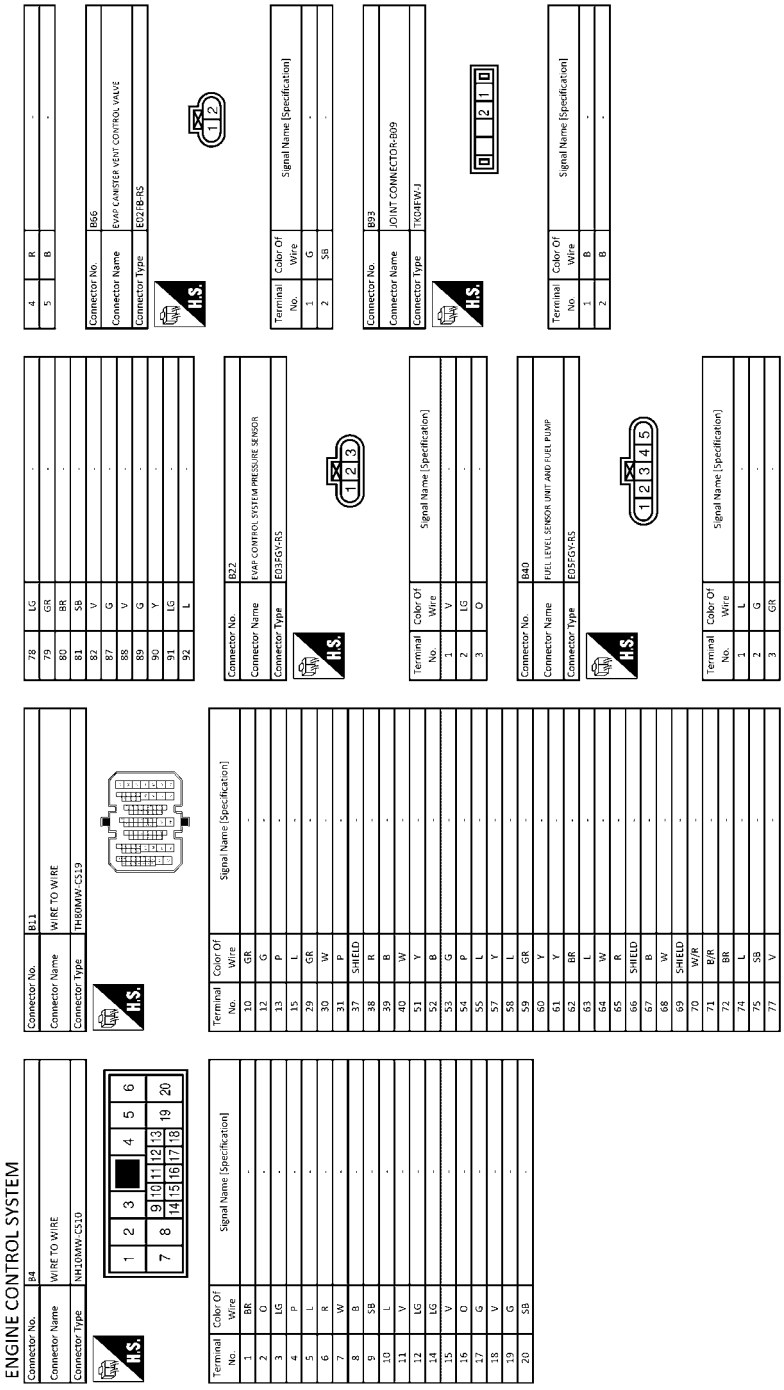

Terminal No.	Color Of Wire	Signal Name [Specification]
1	BR	-
2	O	-
3	LG	-
4	P	-
5	L	-
6	R	-
7	W	-
8	B	-
9	SB	-
10	L	-
11	V	-
12	LG	-
14	LG	-
15	V	-
16	O	-
17	G	-
18	V	-
19	G	-
20	SB	-

Terminal No.	Color Of Wire	Signal Name [Specification]
10	GR	-
12	G	-
13	P	-
15	L	-
29	GR	-
30	W	-
31	P	-
37	SHIELD	-
38	R	-
39	B	-
40	W	-
51	Y	-
52	B	-
53	G	-
54	P	-
55	L	-
57	Y	-
58	L	-
59	GR	-
60	Y	-
61	Y	-
62	BR	-
63	L	-
64	W	-
65	R	-
66	SHIELD	-
67	B	-
68	W	-
69	SHIELD	-
70	W/R	-
71	B/R	-
72	BR	-
74	L	-
75	SB	-
77	V	-

Terminal No.	Color Of Wire	Signal Name [Specification]
78	LG	-
79	GR	-
80	BR	-
81	SB	-
82	V	-
87	G	-
88	V	-
89	G	-
90	Y	-
91	LG	-
92	L	-

Terminal No.	Color Of Wire	Signal Name [Specification]
1	V	-
2	LG	-
3	O	-

Terminal No.	Color Of Wire	Signal Name [Specification]
1	L	-
2	G	-
3	GR	-


Terminal No.	Color Of Wire	Signal Name [Specification]
4	R	-
5	B	-

Terminal No.	Color Of Wire	Signal Name [Specification]
1	G	-
2	SB	-

Terminal No.	Color Of Wire	Signal Name [Specification]
1	B	-
2	B	-


JRBWD7669GB

cardiagn.com

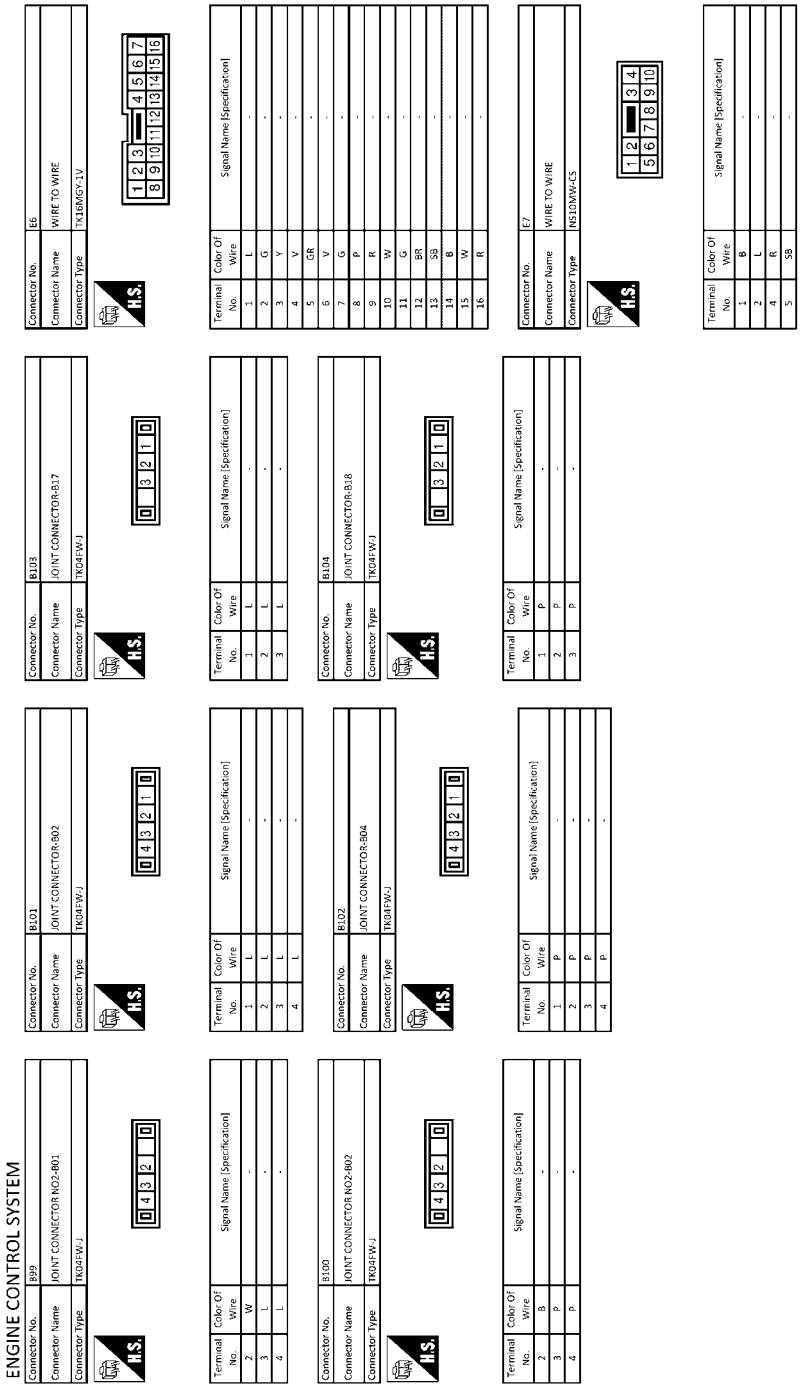


JRBWD7670GB

cardiagn.com

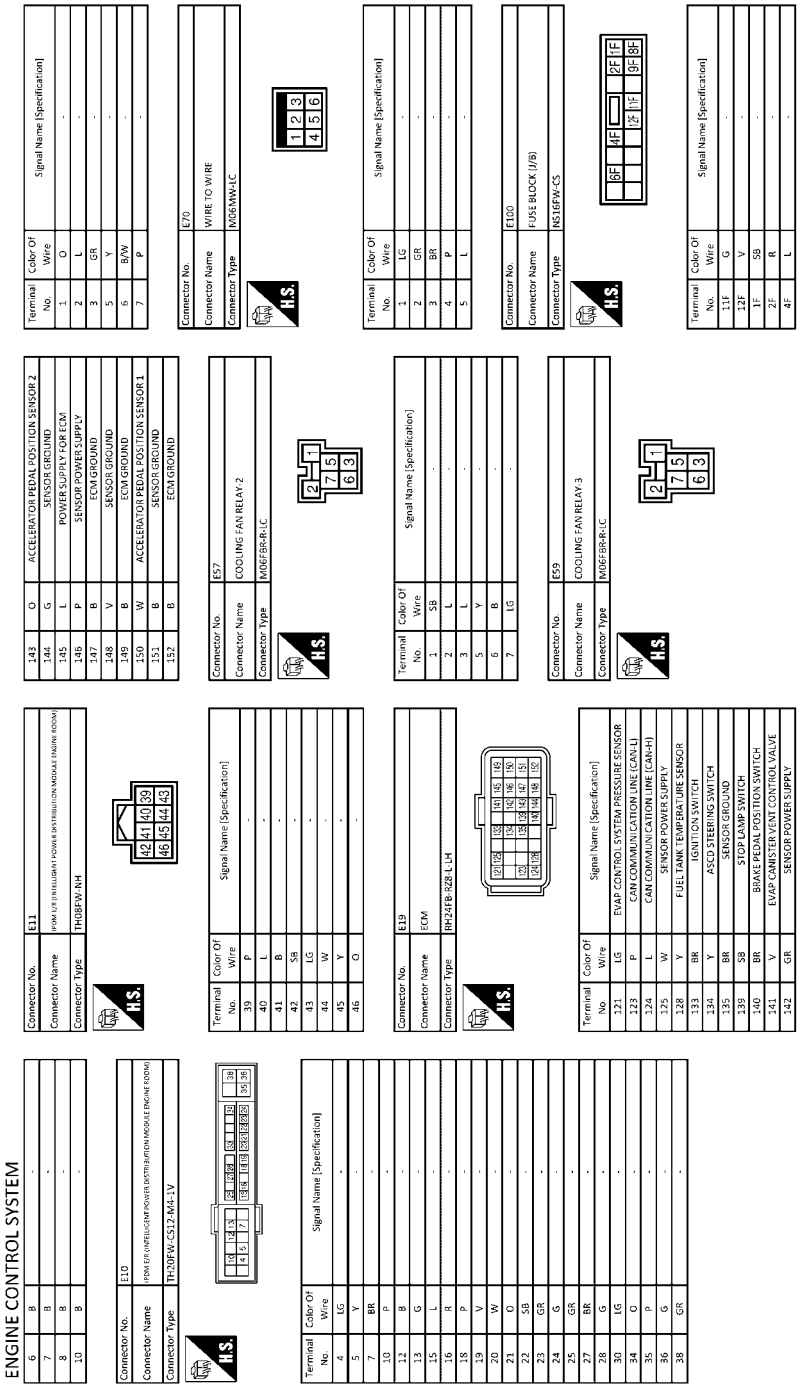


JRBWD7671GB

cardiagn.com

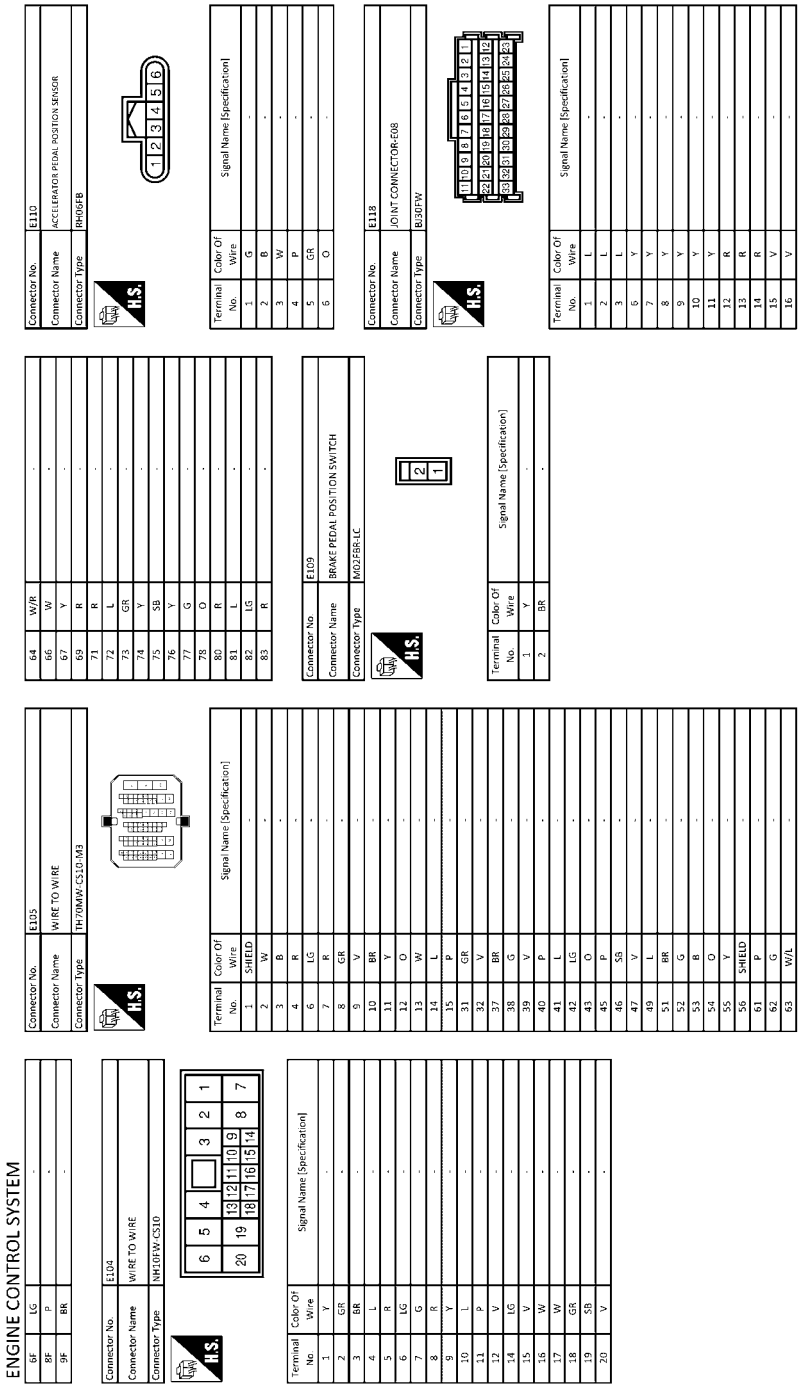

JRBWD7672GB

cardiagn.com

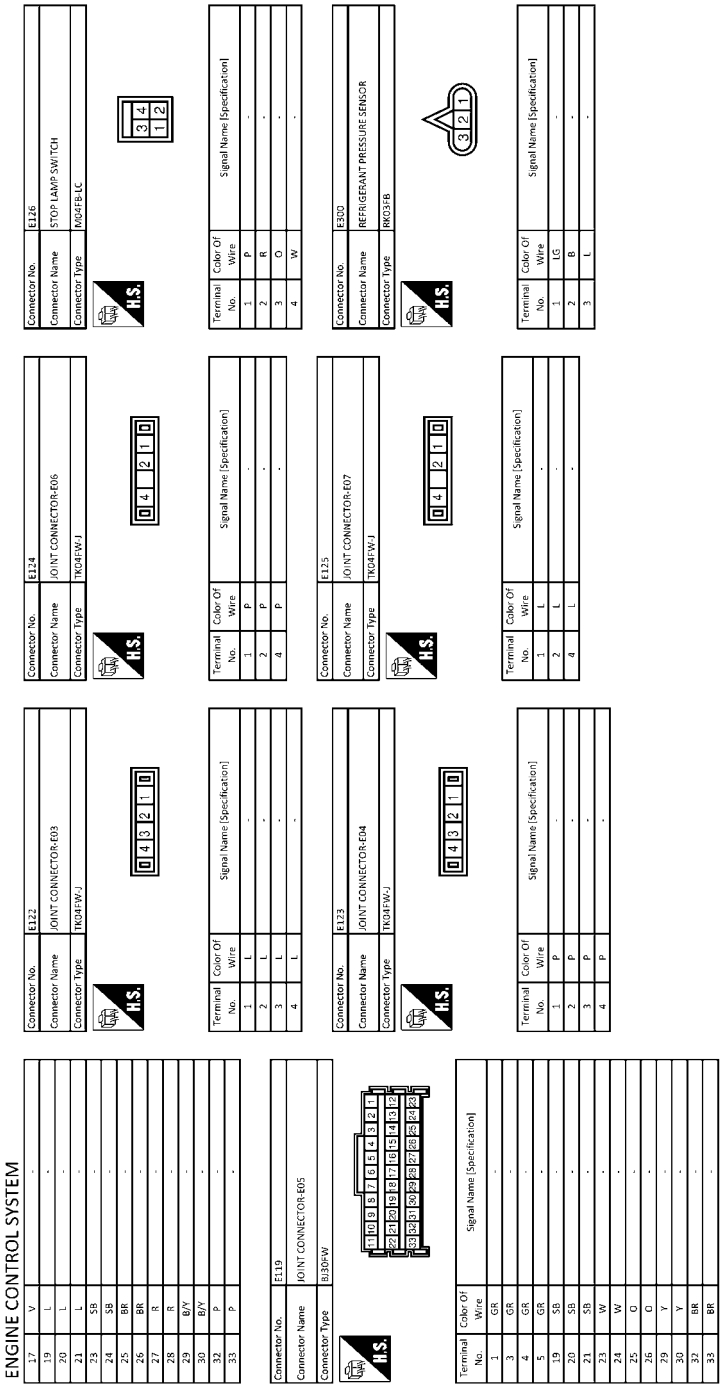

JRBWD7673GB

cardiagn.com

ENGINE CONTROL SYSTEM

Connector No.	E301
Connector Name	COOLING FAN MOTOR-1
Connector Type	RS04FGY-PR



Terminal No.	Color Of Wire	Signal Name [Specification]
1	L	-
2	L	-
3	P	-
4	Y	-


Connector No.	E302
Connector Name	COOLING FAN MOTOR-2
Connector Type	RS04FGY-PR

Terminal No.	Color Of Wire	Signal Name [Specification]
1	R	-
2	G	-
3	B/Y	-
4	B/W	-

Connector No.	E305
Connector Name	WIRE TO WIRE
Connector Type	M06FW-LC

Terminal No.	Color Of Wire	Signal Name [Specification]
1	P	-
2	R	-
3	L	-
4	Y	-
5	G	-

Connector No.	E346
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH-16FW-NH



Terminal No.	Color Of Wire	Signal Name [Specification]
91	LG	-
92	P	-
93	W	-
94	O	-
99	Y	-
100	V	-
101	O	-
102	G	-
103	BR	-

Connector No.	F11
Connector Name	ELECTRONIC CONTROLLED ENGINE MOUNT CONTROL SOLENOID VALVE
Connector Type	E02-BR-RS

Terminal No.	Color Of Wire	Signal Name [Specification]
1	G/R	-
2	BR/W	-

Connector No.	F12
Connector Name	IPDM E/R (INTELLIGENT POWER DISTRIBUTION MODULE ENGINE ROOM)
Connector Type	TH-20FW-CS12-NM4



Terminal No.	Color Of Wire	Signal Name [Specification]
48	W	-
49	R/B	-
51	LG	-
52	Y/G	-
53	R/W	-
54	G/W	-
55	W/L	-
56	R/Y	-
57	O	-
58	Y	-
69	W/B	-
70	O	-
71	P	-
72	R/B	-
74	LG	-
76	GR	-
77	B	-
80	B	-

Connector No.	F13
Connector Name	CONDENSER
Connector Type	M02FW-GY-LC

Terminal No.	Color Of Wire	Signal Name [Specification]
1	R/B	-
2	B	-

Connector No.	F14
Connector Name	ECM
Connector Type	MA836FB-MEB20-LH



Terminal No.	Color Of Wire	Signal Name [Specification]
1	P	THROTTLE CONTROL MOTOR (CLOSE)
2	G/W	THROTTLE CONTROL MOTOR POWER SUPPLY
3	L	THROTTLE CONTROL MOTOR (OPEN)
4	GR	SENSOR GROUND
5	B	KNOCK SENSOR (BANK 1)
6	BR/Y	A/F SENSOR 1 HEATER (BANK 1)
7	P/B	HEATED OXYGEN SENSOR 2 HEATER (BANK 1)
8	O	THROTTLE CONTROL MOTOR RELAY
9	W	K/K2
10	B	ECM GROUND
11	L/W	FUEL INJECTOR No. 5
12	LG/R	FUEL INJECTOR No. 4
13	G	ENGINE OIL TEMPERATURE SENSOR
14	LG	ENGINE OIL PRESSURE SENSOR
15	B	SENSOR GROUND
16	R/W	FUEL INJECTOR No. 2
17	R/B	FUEL INJECTOR No. 1
18	Y	SENSOR POWER SUPPLY

JRBWD7674GB

cardiagn.com

ENGINE CONTROL SYSTEM

19	B	FUEL PUMP RELAY
20	R	REFRIGERANT PRESSURE SENSOR
21	P/B	FUEL INJECTOR No. 6
22	R/Y	FUEL INJECTOR No. 3
25	G	SENSOR GROUND
28	BR	SENSOR POWER SUPPLY
31	Y	ENGINE COOLANT TEMPERATURE SENSOR
32	W/L	HEATED OXYGEN SENSOR 2 (BANK 2)
34	L/Y	INTAKE AIR TEMPERATURE SENSOR
35	B	SENSOR GROUND
36	W/B	CRANKSHAFT POSITION SENSOR
37	GR	EXHAUST VALVE TIMING CONTROL POSITION SENSOR (BANK 1)
38	O	MASS AIR FLOW SENSOR
39	LG	EXHAUST VALVE TIMING CONTROL POSITION SENSOR (BANK 2)
40	LG	SENSOR GROUND
41	W	HEATED OXYGEN SENSOR 2 (BANK 1)
46	SB	A/F SENSOR 1 HEATER (BANK 2)
47	R	HEATED OXYGEN SENSOR 2 HEATER (BANK 2)
49	BR/W	ELECTRONIC CONTROLLED THERMOSTAT CONTROL SOLENOID VALVE
51	L	SENSOR POWER SUPPLY
54	P/L	EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE
55	B/Y	ECM GROUND

77	V	A/F SENSOR 1 (BANK 2)
80	GR	SHIELD
83	R	PNP SIGNAL
84	W/R	CAMSHAFT POSITION SENSOR (BANK 1)
86	W/B	ECM RELAY (SELF SHUT—OFF)
87	R/Y	SENSOR POWER SUPPLY
89	BR/W	CAMSHAFT POSITION SENSOR (BANK 2)
90	B/R	SENSOR GROUND
92	G/W	SENSOR POWER SUPPLY
98	G	SENSOR POWER SUPPLY
101	P	STARTER MOTOR RELAY CUT OFF SIGNAL
102	GR/B	VIAS CONTROL SOLENOID VALVE 2
103	L/B	IGNITION SIGNAL No. 3
104	GR/R	IGNITION SIGNAL No. 6
105	B	ECM GROUND
106	G/R	IGNITION SIGNAL No. 2
107	P	IGNITION SIGNAL No. 5
108	V	VIAS CONTROL SOLENOID VALVE 1
110	B	ECM GROUND
113	Y/R	IGNITION SIGNAL No. 1
114	W	IGNITION SIGNAL No. 4
116	W/L	POWER SUPPLY FOR ECM (BACK-UP)
117	R	INTAKE VALVE TIMING CONTROL SOLENOID VALVE (BANK 1)
118	V	INTAKE VALVE TIMING CONTROL SOLENOID VALVE (BANK 2)
119	Y	INTAKE VALVE TIMING CONTROL SOLENOID VALVE (BANK 2)
120	BR	INTAKE VALVE TIMING CONTROL SOLENOID VALVE (BANK 1)

37	L/W	SELECT SOLENOID VALVE
38	V/R	TORQUE CONVERTER CLUTCH SOLENOID VALVE
39	W/B	SECONDARY PRESSURE SOLENOID VALVE
40	B/R	PRIMARY PRESSURE SOLENOID VALVE
41	B	GROUND
42	B	GROUND
45	LG	BATTERY POWER SUPPLY
46	LG	BATTERY POWER SUPPLY
47	Y	IGNITION POWER SUPPLY
48	Y	IGNITION POWER SUPPLY

Connector No. F15
Connector Name ECM
Connector Type MA85SFB-MB8B10-LH

Terminal No.	Color Of Wire	Signal Name [Specification]
58	P/B	E-CVTCan
60	W	E-CVTCan2
64	G/B	SENSOR GROUND
66	L	A/F SENSOR 1 (BANK 1)
67	P	A/F SENSOR 1 (BANK 1)
68	W	BATTERY TEMPERATURE SENSOR
69	BR	BATTERY CURRENT SENSOR
70	GR	SHIELD
71	W	THROTTLE POSITION SENSOR 1
72	R	THROTTLE POSITION SENSOR 2
75	B	SENSOR GROUND
76	LG	A/F SENSOR 1 (BANK 2)

Connector No. F17
Connector Name TRANSMISSION RANGE SWITCH
Connector Type YDU06FB-HS4

Terminal No.	Color Of Wire	Signal Name [Specification]
1	LG	-
2	R/B	-
3	LG	-
4	BR/W	-
5	P/B	-
6	P/L	-
7	G/O	-
8	GR	-

Connector No. F20
Connector Name CRANKSHAFT POSITION SENSOR
Connector Type RH03FB

Terminal No.	Color Of Wire	Signal Name [Specification]
1	R/G	-
2	Y/B	-
3	W/B	-

Connector No. F23
Connector Name TCM
Connector Type RH40FB-RZ8-L-RH

Terminal No.	Color Of Wire	Signal Name [Specification]
2	GR	L_RANGE_SW
4	G/O	D_RANGE_SW
5	P/L	N_RANGE_SW
6	P/B	R_RANGE_SW
7	BR/W	P_RANGE_SW
11	W/R	SENSOR GROUND
12	V	CVT FLUID TEMPERATURE SENSOR
14	W	G SENSOR
16	V/W	SECONDARY PRESSURE SENSOR
17	LG	PRIMARY PRESSURE SENSOR
23	P	CAN-L
24	BR	INPUT SPEED SENSOR
26	L/O	SENSOR POWER
30	R/Y	LINE PRESSURE SOLENOID VALVE
33	L	CAN-H
34	LG/R	OUTPUT SPEED SENSOR
35	LG	PRIMARY SPEED SENSOR

Connector No. F28
Connector Name AIR FUEL RATIO (A/F) SENSOR 1 (BANK 1)
Connector Type RH04FBDY-P


Terminal No.	Color Of Wire	Signal Name [Specification]
1	O	-
2	BR/Y	-
3	L	-
4	P	-

Connector No. F30
Connector Name EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE
Connector Type E02FL-RS-LGY

Terminal No.	Color Of Wire	Signal Name [Specification]
1	R/Y	-
2	P/L	-

JRBWD7675GB

cardiagn.com

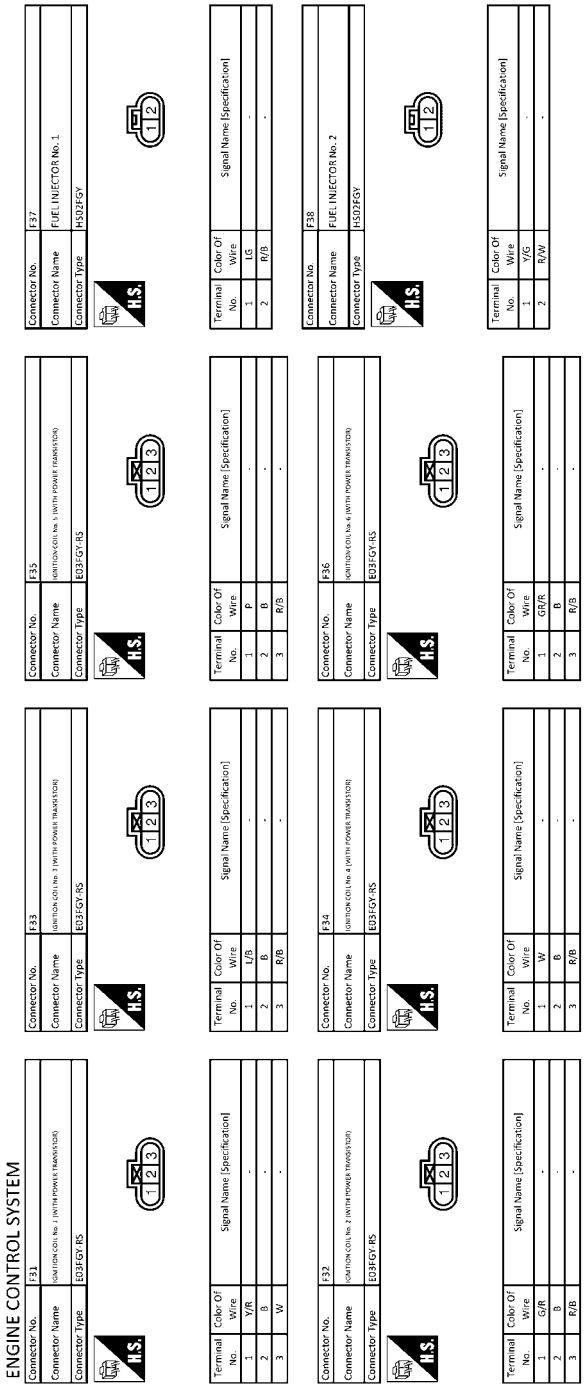

JRBWD7676GB

cardiagn.com

ENGINE CONTROL SYSTEM

Connector No.	F39
Connector Name	FUEL INJECTOR No. 3
Connector Type	H5O2FGY

H.S.



Terminal No.	Color Of Wire	Signal Name [Specification]
1	LG	-
2	R/Y	-

Connector No.	F40
Connector Name	FUEL INJECTOR No. 4
Connector Type	H5O2FGY

H.S.

Terminal No.	Color Of Wire	Signal Name [Specification]
1	Y/G	-
2	LG/R	-

Connector No.	F41
Connector Name	FUEL INJECTOR No. 5
Connector Type	H5O2FGY

H.S.



Terminal No.	Color Of Wire	Signal Name [Specification]
1	LG	-
2	L/W	-

Connector No.	F42
Connector Name	FUEL INJECTOR No. 6
Connector Type	H5O2FGY

H.S.

Terminal No.	Color Of Wire	Signal Name [Specification]
1	Y/G	-
2	P/B	-

Connector No.	F43
Connector Name	EXHAUST VALVE TIMING CONTROL POSITION SENSOR (BANK 1)
Connector Type	RH03FB

H.S.



Terminal No.	Color Of Wire	Signal Name [Specification]
1	BR	-
2	LG	-
3	GR	-

Connector No.	F44
Connector Name	EXHAUST VALVE TIMING CONTROL POSITION SENSOR (BANK 2)
Connector Type	RH03FB

H.S.

Terminal No.	Color Of Wire	Signal Name [Specification]
1	V	-
2	SB	-
3	LG	-

Connector No.	F45
Connector Name	CAMSHAFT POSITION SENSOR (BANK 1)
Connector Type	RH03FB

H.S.



Terminal No.	Color Of Wire	Signal Name [Specification]
1	G/W	-
2	B/R	-
3	W/R	-

Connector No.	F46
Connector Name	CAMSHAFT POSITION SENSOR (BANK 2)
Connector Type	RH03FB


H.S.

Terminal No.	Color Of Wire	Signal Name [Specification]
1	R/W	-
2	Y/G	-
3	BR/W	-

JRBWD7677GB

cardiagn.com


ENGINE CONTROL SYSTEM

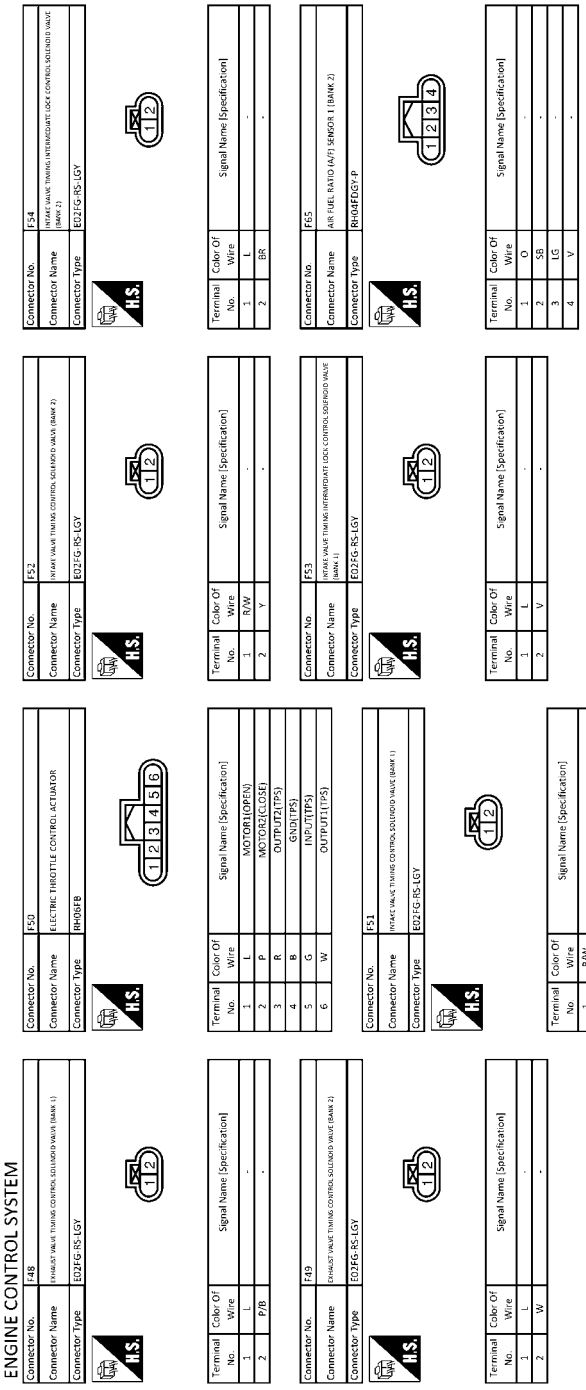

JRBWD7678GB


cardiagn.com

ENGINE CONTROL SYSTEM

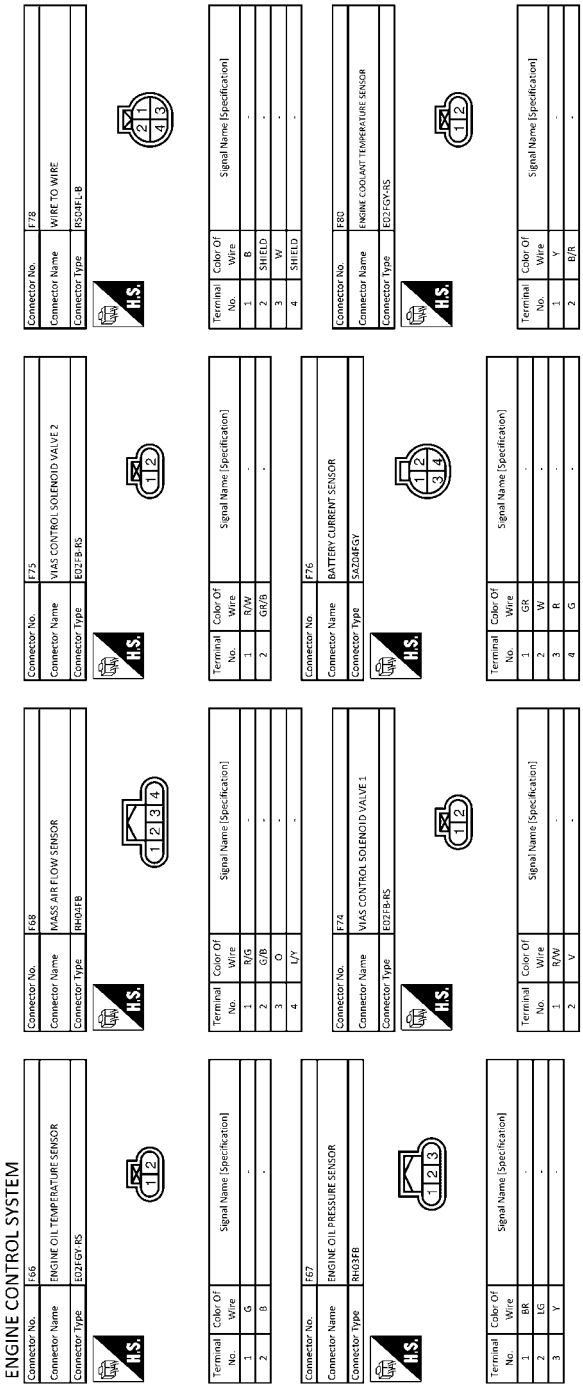


JRBWD7679GB

cardiagn.com

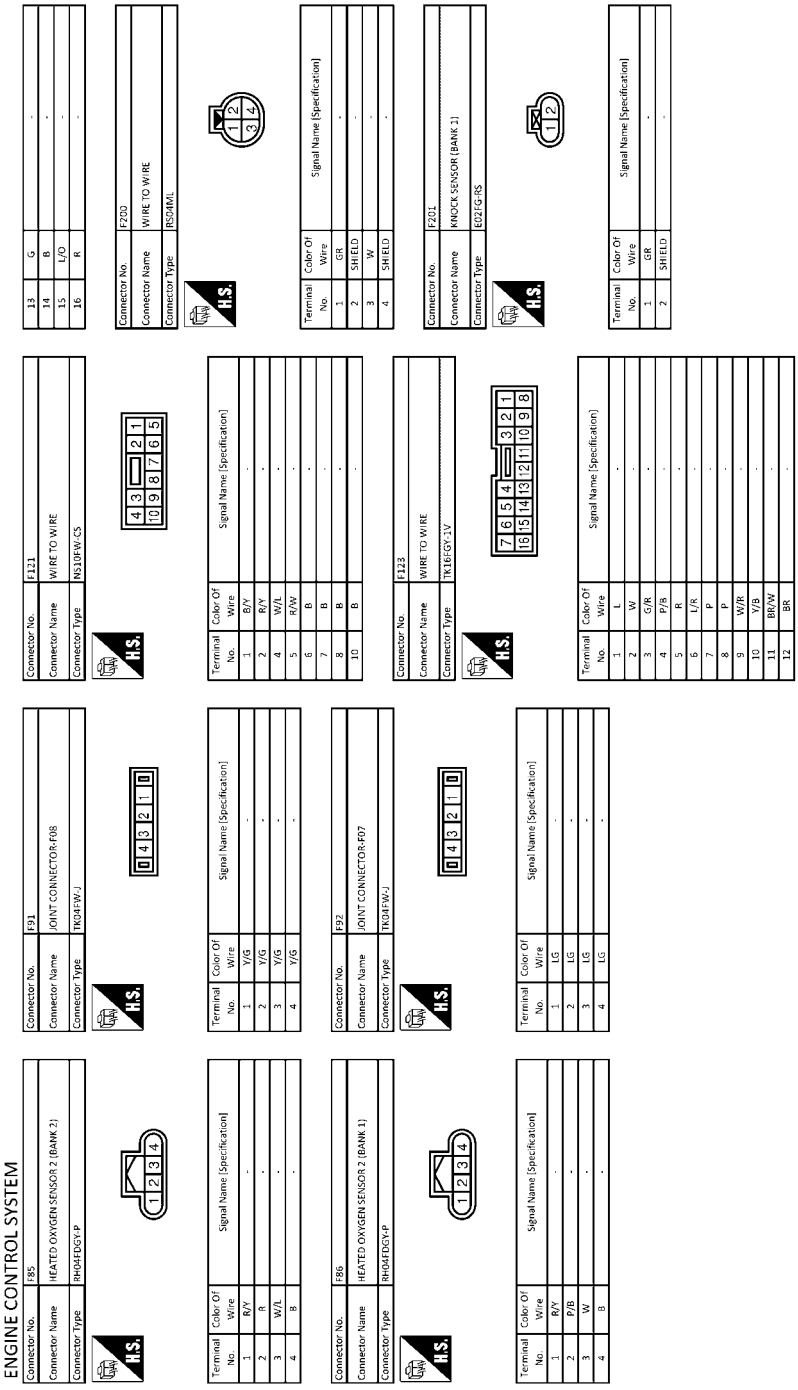


JRBWD7680GB

cardiagn.com

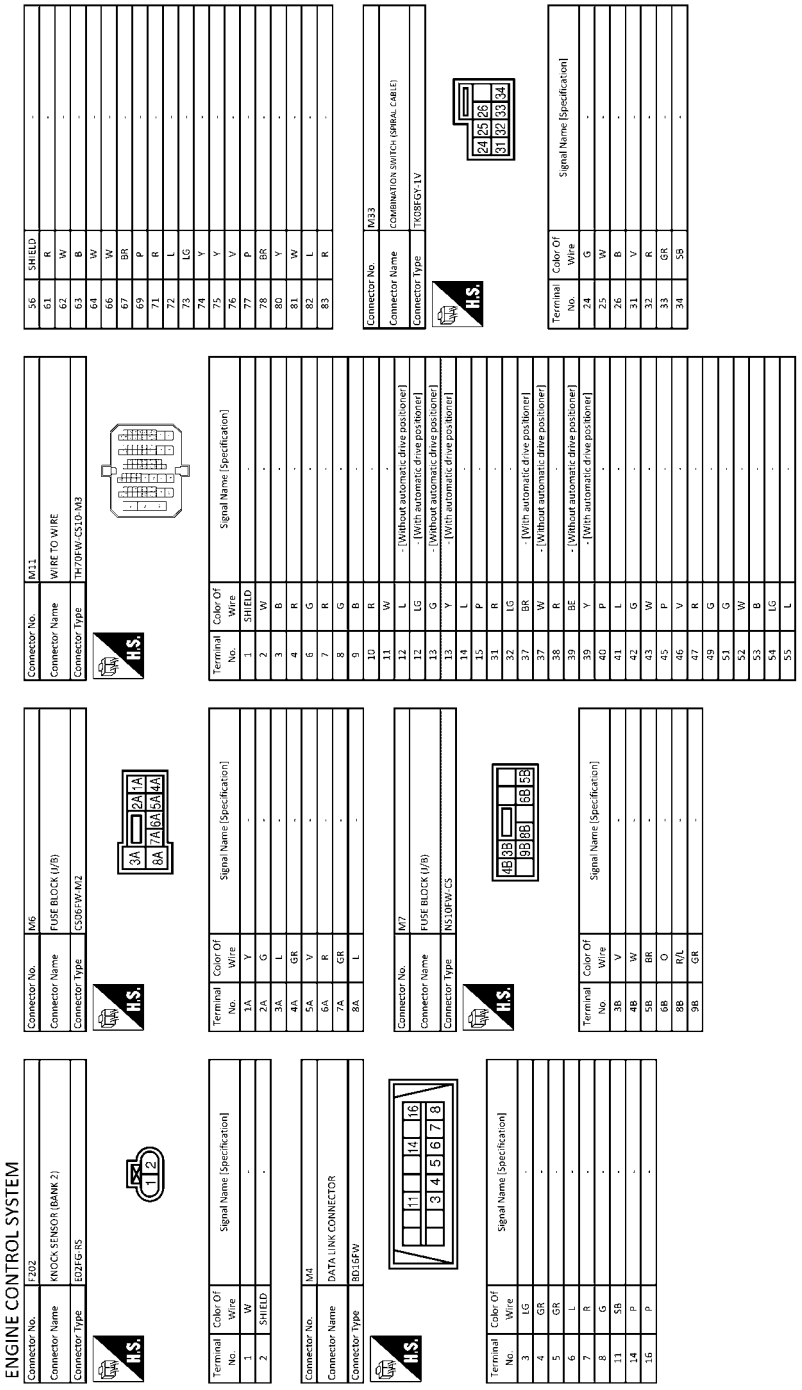

JRBWD7681GB

cardiagn.com

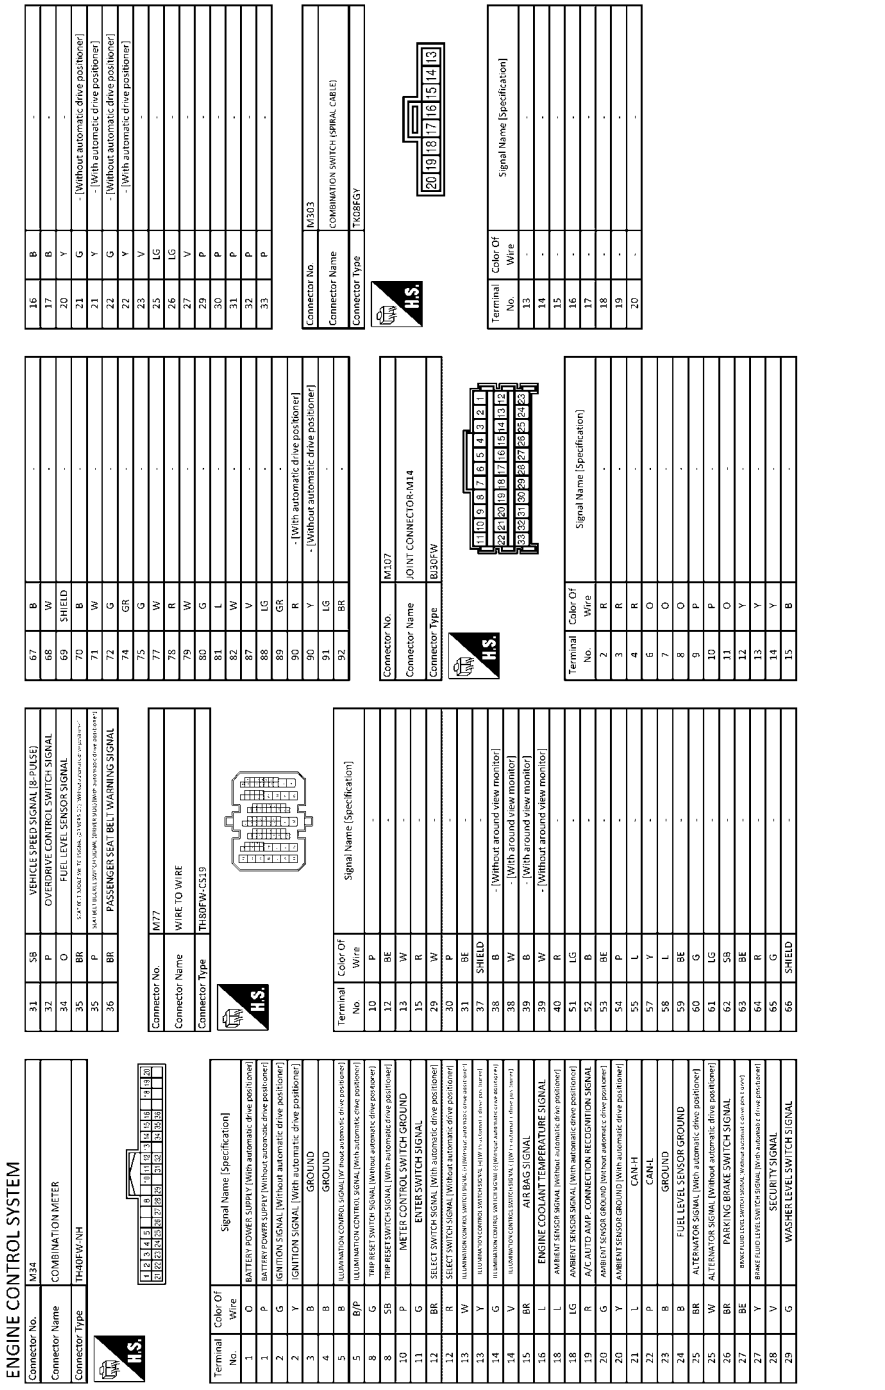

JRBWD7682GB

cardiagn.com


BASIC INSPECTION

DIAGNOSIS AND REPAIR WORKFLOW

Work Flow

INFOID:0000000012406318

OVERALL SEQUENCE

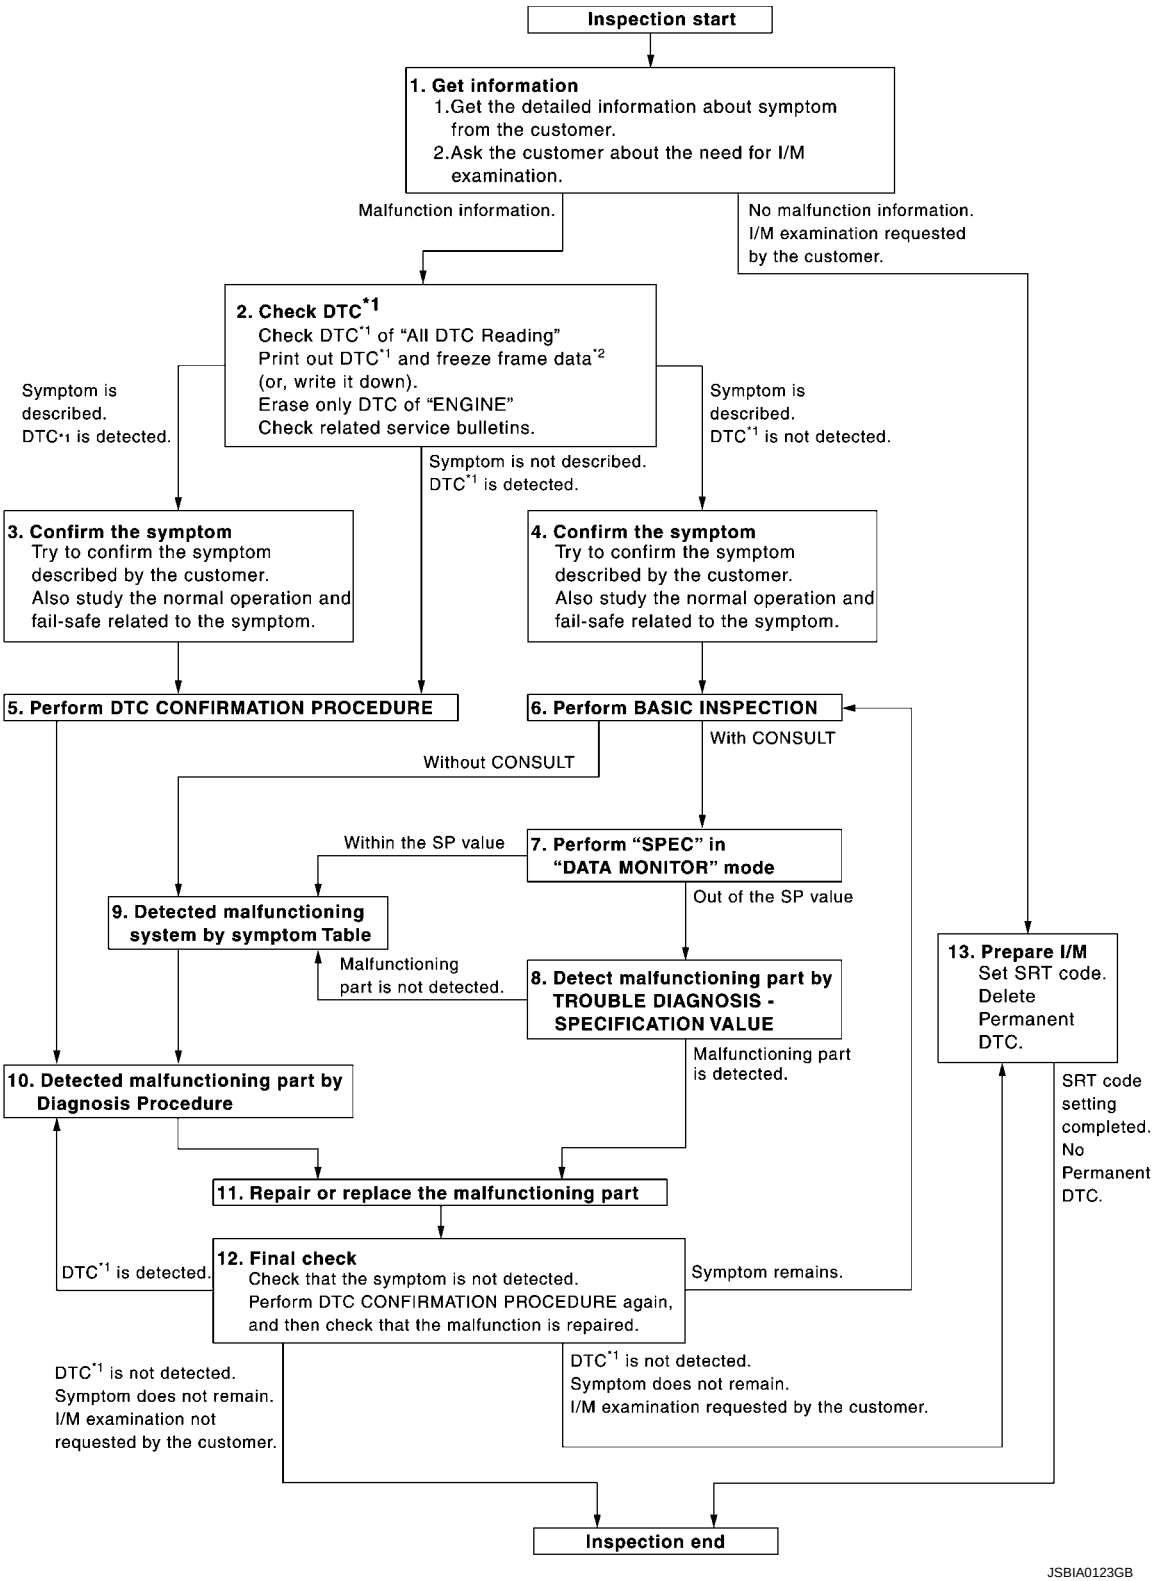

JSBIA0123GB

cardiagn.com

*1: Include 1st trip DTC.

*2: Include 1st trip freeze frame data.

DETAILED FLOW

1.GET INFORMATION FOR SYMPTOM

1. Get the detailed information from the customer about the symptom (the condition and the environment when the incident/malfunction occurred) using the “Diagnostic Work Sheet”. (Refer to EC-139, "Diagnostic Work Sheet".)
2. Ask if the customer requests I/M examination.

Malfunction information, obtained>>GO TO 2.
No Malfunction information, but a request for I/M examination>>GO TO 13.

2.CHECK DTC

1. Check DTC of “All DTC Reading”.
2. Perform the following procedure if DTC is displayed.

- Record DTC and freeze frame data. (Print them out with CONSULT or GST.)
- Erase only DTC of “ENGINE”.
  - With CONSULT: Refer to “How to Erase DTC and 1st Trip DTC” in EC-73, "CONSULT Function".
  - Without CONSULT: Refer to “How to Erase Self-diagnostic Results” in EC-70, "On Board Diagnosis Function".
- Turn ignition switch OFF.
- Study the relationship between the cause detected by DTC and the symptom described by the customer. (Symptom Table is useful. Refer to EC-503, "Symptom Table".)

3. Check related service bulletins for information.

Are any symptoms described and any DTCs detected?

Symptom is described, DTC is detected>>GO TO 3.
Symptom is described, DTC is not detected>>GO TO 4.
Symptom is not described, DTC is detected>>GO TO 5.

3.CONFIRM THE SYMPTOM

Try to confirm the symptom described by the customer (except MIL ON).
Also study the normal operation and fail-safe related to the symptom. Refer to EC-507, "Description" and EC-99, "Fail-safe".
Diagnosis Work Sheet is useful to verify the incident.
Verify relation between the symptom and the condition when the symptom is detected.

>> GO TO 5.

4.CONFIRM THE SYMPTOM

Try to confirm the symptom described by the customer.
Also study the normal operation and fail-safe related to the symptom. Refer to EC-507, "Description" and EC-99, "Fail-safe".
Diagnosis Work Sheet is useful to verify the incident.
Verify relation between the symptom and the condition when the symptom is detected.

>> GO TO 6.

5.PERFORM DTC CONFIRMATION PROCEDURE

Perform DTC CONFIRMATION PROCEDURE for the displayed DTC, and then make sure that DTC is detected again.
If two or more DTCs are detected, refer to EC-101, "DTC Inspection Priority Chart" and determine trouble diagnosis order.

NOTE:

- Freeze frame data is useful if the DTC is not detected.

cardiagn.com

- Perform Component Function Check if DTC CONFIRMATION PROCEDURE is not included on Service Manual. This simplified check procedure is an effective alternative though DTC cannot be detected during this check.
  If the result of Component Function Check is NG, it is the same as the detection of DTC by DTC CONFIRMATION PROCEDURE.

Is DTC detected?

YES >> GO TO 10.
NO >> Check according to GI-41, "Intermittent Incident".

6.PERFORM BASIC INSPECTION

Perform EC-141, "Work Procedure".

Do you have CONSULT?

YES >> GO TO 7.
NO >> GO TO 9.

7.PERFORM SPEC IN DATA MONITOR MODE

With CONSULT
Make sure that “MASS AIR FLOW SENSOR (Hz)”, “B/FUEL SCHDL”, “A/F ALPHA-B1” and “A/F ALPHA-B2” are within the SP value using CONSULT “SPEC” in “DATA MONITOR” mode of “ENGINE”. Refer to EC-167, "Component Function Check".

Is the measurement value within the SP value?

YES >> GO TO 9.
NO >> GO TO 8.

8.DETECT MALFUNCTIONING PART BY TROUBLE DIAGNOSIS - SPECIFICATION VALUE

Detect malfunctioning part according to EC-168, "Diagnosis Procedure".

Is a malfunctioning part detected?

YES >> GO TO 11.
NO >> GO TO 9.

9.DETECT MALFUNCTIONING SYSTEM BY SYMPTOM TABLE

Detect malfunctioning system according to EC-503, "Symptom Table" based on the confirmed symptom in step 4, and determine the trouble diagnosis order based on possible causes and symptoms.

>> GO TO 10.

10.DETECT MALFUNCTIONING PART BY DIAGNOSIS PROCEDURE

Inspect according to Diagnosis Procedure of the system.
NOTE:
The Diagnosis Procedure in EC section described based on open circuit inspection. A short circuit inspection is also required for the circuit check in the Diagnosis Procedure. For details, refer to GI-44, "Circuit Inspection".

Is a malfunctioning part detected?

YES >> GO TO 11.
NO >> Monitor input data from related sensors or check voltage of related ECM terminals using CONSULT. Refer to EC-83, "Reference Value".

11.REPAIR OR REPLACE THE MALFUNCTIONING PART

1. Repair or replace the malfunctioning part.
2. Reconnect parts or connectors disconnected during Diagnosis Procedure again after repair and replacement.
3. Check DTC. If DTC is displayed, erase it.
   With CONSULT: Refer to “How to Erase DTC and 1st Trip DTC” in EC-73, "CONSULT Function".
   Without CONSULT: Refer to “How to Erase Self-diagnostic Results” in EC-70, "On Board Diagnosis Function".

>> GO TO 12.

cardiagn.com

12.FINAL CHECK

When DTC was detected in step 2, perform DTC CONFIRMATION PROCEDURE or Component Function Check again, and then make sure that the malfunction have been completely repaired.
When symptom was described from the customer, refer to confirmed symptom in step 3 or 4, and make sure that the symptom is not detected.

Is DTC detected and does symptom remain?

YES-1 >> DTC is detected: GO TO 10.
YES-2 >> Symptom remains: GO TO 6.
NO-1 >> No request for I/M examination from the customer: Before returning the vehicle to the customer, always erase unnecessary DTC in ECM and TCM (⊠ With CONSULT: Refer to “How to Read DTC and 1st Trip DTC” in EC-73, "CONSULT Function", ⊠ Without CONSULT: Refer to “How to Read Self-diagnostic Results” in EC-70, "On Board Diagnosis Function").
NO-2 >> I/M examination, requested from the customer: GO TO 13.

13.PREPARE FOR I/M EXAMINATION

1. Set SRT codes. Refer to EC-155, "Description".
2. Erase permanent DTCs. Refer to EC-161, "Description".

>> INSPECTION END.

Diagnostic Work Sheet

INFOID:0000000012406319

DESCRIPTION

There are many operating conditions that lead to the malfunction of engine components. A good grasp of such conditions can make troubleshooting faster and more accurate.
In general, each customer feels differently about symptoms. It is important to fully understand the symptoms or conditions for a customer complaint.
Utilize a diagnostic worksheet like the WORKSHEET SAMPLE below in order to organize all the information for troubleshooting.
Some conditions may cause the MIL to illuminate or blink, and DTC to be detected. Examples:

- Vehicle ran out of fuel, which caused the engine to misfire.
- Fuel filler cap was left off or incorrectly screwed on, allowing fuel to evaporate into the atmosphere.

KEY POINTS

WHAT ..... Vehicle & engine model
WHEN ..... Date, Frequencies
WHERE..... Road conditions
HOW ..... Operating conditions, Weather conditions, Symptoms

SEF907L

cardiagn.com

WORKSHEET SAMPLE

Customer name MR/MS		Model & Year	VIN
Engine #		Trans.	Mileage
Incident Date		Manuf. Date	In Service Date
Fuel and fuel filler cap		☐ Vehicle ran out of fuel causing misfire ☐ Fuel filler cap was left off or incorrectly screwed on.	
Symptoms	☐ Startability	☐ Impossible to start ☐ No combustion ☐ Partial combustion ☐ Partial combustion affected by throttle position ☐ Partial combustion NOT affected by throttle position ☐ Possible but hard to start ☐ Others [ ]	
	☐ Idling	☐ No fast idle ☐ Unstable ☐ High idle ☐ Low idle ☐ Others [ ]	
	☐ Driveability	☐ Stumble ☐ Surge ☐ Knock ☐ Lack of power ☐ Intake backfire ☐ Exhaust backfire ☐ Others [ ]	
	☐ Engine stall	☐ At the time of start ☐ While idling ☐ While accelerating ☐ While decelerating ☐ Just after stopping ☐ While loading	
Incident occurrence		☐ Just after delivery ☐ Recently ☐ In the morning ☐ At night ☐ In the daytime	
Frequency		☐ All the time ☐ Under certain conditions ☐ Sometimes	
Weather conditions		☐ Not affected	
	Weather	☐ Fine ☐ Raining ☐ Snowing ☐ Others [ ]	
	Temperature	☐ Hot ☐ Warm ☐ Cool ☐ Cold ☐ Humid °F	
Engine conditions		☐ Cold ☐ During warm-up ☐ After warm-up Engine speed 0 2,000 4,000 6,000 8,000 rpm	
Road conditions		☐ In town ☐ In suburbs ☐ Highway ☐ Off road (up/down)	
Driving conditions		☐ Not affected ☐ At starting ☐ While idling ☐ At racing ☐ While accelerating ☐ While cruising ☐ While decelerating ☐ While turning (RH/LH) Vehicle speed 0 10 20 30 40 50 60 MPH	
Malfunction indicator lamp		☐ Turned on ☐ Not turned on	

MTBL0017

cardiagn.com

BASIC INSPECTION

Work Procedure

INFOID:0000000012406320


1.INSPECTION START

1. Check service records for any recent repairs that may indicate a related malfunction, or a current need for scheduled maintenance.
2. Open engine hood and check the following:


- Harness connectors for improper connections
- Wiring harness for improper connections, pinches and cut
- Vacuum hoses for splits, kinks and improper connections
- Hoses and ducts for leakage
- Air cleaner clogging
- Gasket

3. Check that electrical or mechanical loads are not applied.

- Head lamp switch is OFF.
- Air conditioner switch is OFF.
- Rear window defogger switch is OFF.
- Steering wheel is in the straight-ahead position, etc.

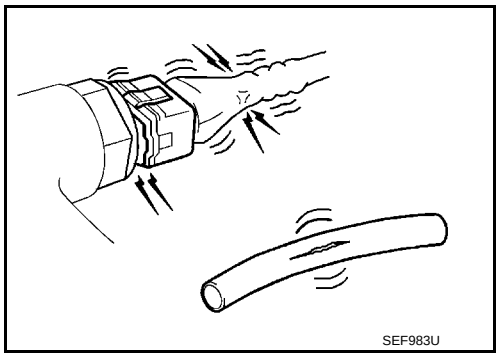
SEF983U

4. Start engine and warm it up until engine coolant temperature indicator points to the middle of gauge.
   Check that engine stays below 1,000 rpm.

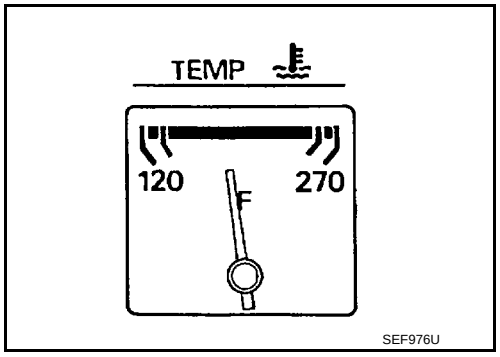


SEF976U

5. Run engine at approximately 2,000 rpm for approximately 2 minutes under no load.
6. Check that no DTC is displayed with CONSULT or GST.

Are any DTCs detected?

YES >> GO TO 2.
NO >> GO TO 3.

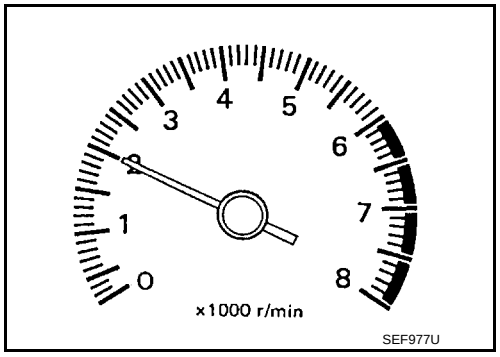

SEF977U

2.REPAIR OR REPLACE

Repair or replace components as necessary according to corresponding Diagnostic Procedure.

>> GO TO 3

3.CHECK TARGET IDLE SPEED


1. Run engine at approximately 2,000 rpm for approximately 2 minutes under no load.

cardiagn.com

2. Rev engine (2,000 to 3,000 rpm) 2 or 3 times under no load, then run engine at idle speed for approximately 1 minute.
3. Check idle speed.
   For procedure, refer to EC-508, "Work Procedure".
   For specification, refer to EC-514, "Idle Speed".

Is the inspection result normal?

YES >> GO TO 10.
NO >> GO TO 4.

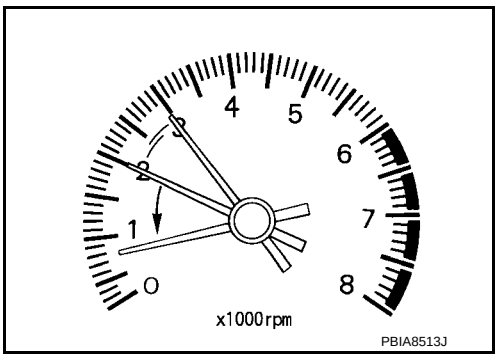

4. PERFORM ACCELERATOR PEDAL RELEASED POSITION LEARNING

1. Stop engine.
2. Perform EC-147, "Description".

>> GO TO 5.

5. PERFORM THROTTLE VALVE CLOSED POSITION LEARNING

Perform EC-148, "Description".

>> GO TO 6.

6. PERFORM IDLE AIR VOLUME LEARNING

Perform EC-149, "Description".

Is Idle Air Volume Learning carried out successfully?

YES >> GO TO 7.
NO >> Follow the instruction of Idle Air Volume Learning. Then GO TO 4.

7. CHECK IDLE SPEED AGAIN

1. Start engine and warm it up to normal operating temperature.
2. Check idle speed.
   For procedure, refer to EC-508, "Work Procedure".
   For specification, refer to EC-514, "Idle Speed".

Is the inspection result normal?

YES >> GO TO 10.
NO >> GO TO 8.

8. DETECT MALFUNCTIONING PART

Check the Following.
- Check camshaft position sensor (PHASE) and circuit. Refer to EC-301, "Diagnosis Procedure".
- Check crankshaft position sensor (POS) and circuit. Refer to EC-298, "Diagnosis Procedure".

Is the inspection result normal?

YES >> GO TO 9.
NO >> Repair or replace malfunctioning part. Then GO TO 4.

9. CHECK ECM FUNCTION

1. Substitute with a non-malfunctioning ECM to check ECM function. (ECM may be the cause of the incident, although this is rare.)
2. Perform initialization of NVIS (NATS) system and registration of all NVIS (NATS) ignition key IDs. Refer to SEC-60, "ECM : Work Procedure".

>> GO TO 4.

10. CHECK IGNITION TIMING

1. Run engine at idle.
2. Check ignition timing with a timing light.
   For procedure, refer to EC-509, "Work Procedure".

cardiagn.com

For specification, refer to EC-514, "Ignition Timing".

Is the inspection result normal?

YES >> GO TO 19.
NO >> GO TO 11.

11. PERFORM ACCELERATOR PEDAL RELEASED POSITION LEARNING

1. Stop engine.
2. Perform EC-147, "Description".

>> GO TO 12.

12. PERFORM THROTTLE VALVE CLOSED POSITION LEARNING

Perform EC-148, "Description".

>> GO TO 13.

13. PERFORM IDLE AIR VOLUME LEARNING

Perform EC-149, "Description".

Is Idle Air Volume Learning carried out successfully?

YES >> GO TO 14.
NO >> Follow the instruction of Idle Air Volume Learning. Then GO TO 4.

14. CHECK IDLE SPEED AGAIN

1. Start engine and warm it up to normal operating temperature.
2. Check idle speed.
   For procedure, refer to EC-508, "Work Procedure".
   For specification, refer to EC-514, "Idle Speed".

Is the inspection result normal?

YES >> GO TO 15.
NO >> GO TO 17.

15. CHECK IGNITION TIMING AGAIN

1. Run engine at idle.
2. Check ignition timing with a timing light.
   For procedure, refer to EC-509, "Work Procedure".
   For specification, refer to EC-514, "Ignition Timing".

Is the inspection result normal?

YES >> GO TO 19.
NO >> GO TO 16.

16. CHECK TIMING CHAIN INSTALLATION

Check timing chain installation. Refer to EM-85, "Inspection".

Is the inspection result normal?

YES >> GO TO 17.
NO >> Repair the timing chain installation. Then GO TO 4.

17. DETECT MALFUNCTIONING PART

Check the following.
- Check camshaft position sensor (PHASE) and circuit. Refer to EC-301, "Diagnosis Procedure".
- Check crankshaft position sensor (POS) and circuit. Refer to EC-298, "Diagnosis Procedure".

Is the inspection result normal?

YES >> GO TO 18.
NO >> Repair or replace malfunctioning part. Then GO TO 4.

18. CHECK ECM FUNCTION

1. Substitute with a non-malfunctioning ECM to check ECM function. (ECM may be the cause of the incident, although this is rare.)

cardiagn.com

2. Perform initialization of NVIS (NATS) system and registration of all NVIS (NATS) ignition key IDs. Refer to EC-145, "Description".

>> GO TO 4.

19. INSPECTION END

If ECM is replaced during this BASIC INSPECTION procedure, perform EC-145, "Description".

>> INSPECTION END

cardiagn.com

ADDITIONAL SERVICE WHEN REPLACING ECM

Description

INFOID:0000000012406321

When replacing ECM, the following procedure must be performed. (For details, refer to EC-145, "Work Procedure".)

PROGRAMMING OPERATION

NOTE:
After replacing with a blank ECM, programming is required to write ECM information. Be sure to follow the procedure to perform the programming.

BEFORE REPLACEMENT

When replacing ECM, perform “SAVING DATA FOR REPLC CPU” in “WORK SUPPORT” of “ENGINE” by using CONSULT to save current ECM data before replacement.

AFTER REPLACEMENT

After replacing ECM, the following items must be performed:
- Write data after replace CPU
- Accelerator pedal released position learning
- Throttle valve closed position learning
- Idle air volume learning

Work Procedure

INFOID:0000000012406322

1.SAVE ECM DATA

With CONSULT
1. Turn ignition switch OFF.
2. Reconnect all harness connectors disconnected.
3. Turn ignition switch ON.
4. Select “SAVING DATA FOR REPLC CPU” in “WORK SUPPORT” mode of “ENGINE” using CONSULT.
5. Follow the instruction of CONSULT display.

NOTE:
- Necessary data in ECM is copied and saved to CONSULT.
- Go to Step 2 regardless of with or without success in saving data.

>> GO TO 2.

2.CHECK ECM PART NUMBER

Check ECM part number to see whether it is blank ECM or not.
NOTE:
- Part number of blank ECM is 23703 - ××××.
- Check part number when ordering ECM or the one included in the label on the container box.

Is the ECM a blank ECM?

YES >> GO TO 3.
NO >> GO TO 5.

3.SAVE ECM PART NUMBER

Read out the part number from the old ECM and save the number, following the programming instructions. Refer to CONSULT Operation Manual.
NOTE:
- The ECM part number is saved in CONSULT.
- Even when ECM part number is not saved in CONSULT, go to 4.

>> GO TO 4.

4.PERFORM ECM PROGRAMMING

After replacing ECM, perform the ECM programming. Refer to CONSULT Operation Manual.
NOTE:
- Refer to EC-513, "Removal and Installation" for replacement of ECM.

cardiagn.com

• During programming, maintain the following conditions:
- Ignition switch: ON
- Electric load: OFF
- Brake pedal: Not depressed
- Battery voltage: 12 – 13.5 V (Be sure to check the value of battery voltage by selecting “BATTERY VOLT” in “Data monitor” of CONSULT.)

>> GO TO 6.

5.REPLACE ECM

Replace ECM. Refer to EC-513, "Removal and Installation".

>> GO TO 6.

6.PERFORM INITIALIZATION OF IVIS (NATS) SYSTEM AND REGISTRATION OF ALL IVIS (NATS) IGNITION KEY IDS

Refer to SEC-60, "ECM : Description".

>> GO TO 7.

7.CHECK ECM DATA STATUS

Check if the data is successfully copied from the ECM at Step 1 (before replacement) and saved in CONSULT.

Is the data saved successfully?

YES >> GO TO 8.
NO >> GO TO 9.

8.WRITE ECM DATA

With CONSULT
1. Select “WRITING DATA FOR REPLC CPU” in “WORK SUPPORT” mode of “ENGINE” using CONSULT.
2. Follow the instruction of CONSULT display.

NOTE:
The data saved by “SAVING DATA FOR REPLC CPU” is written to ECM.

>> GO TO 10.

9.PERFORM VIN REGISTRATION

Refer to EC-152, "Description".

>> GO TO 10.

10.PERFORM ACCELERATOR PEDAL RELEASED POSITION LEARNING

Perform Accelerator Pedal Released Position Learning. Refer to EC-147, "Description".

>> GO TO 11.

11.PERFORM THROTTLE VALVE CLOSED POSITION LEARNING

Perform Throttle Valve Closed Position Learning. Refer to EC-148, "Description".

>> GO TO 12.

12.PERFORM IDLE AIR VOLUME LEARNING

Perform Idle Air Volume Learning. Refer to EC-149, "Description".

>> END

cardiagn.com

ACCELERATOR PEDAL RELEASED POSITION LEARNING

Description

INFOID:0000000012406323

Accelerator Pedal Released Position Learning is a function of ECM to learn the fully released position of the accelerator pedal by monitoring the accelerator pedal position sensor output signal. It must be performed each time the harness connector of the accelerator pedal position sensor or ECM is disconnected. (For details, refer to EC-147, "Work Procedure".)

Work Procedure

INFOID:0000000012406324

1.START

1. Check that accelerator pedal is fully released.
2. Turn ignition switch ON and wait at least 2 seconds.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON and wait at least 2 seconds.
5. Turn ignition switch OFF and wait at least 10 seconds.

>> END

cardiagn.com

THROTTLE VALVE CLOSED POSITION LEARNING

Description

INFOID:0000000012406325

Throttle Valve Closed Position Learning is a function of ECM to learn the fully closed position of the throttle valve by monitoring the throttle position sensor output signal. It must be performed each time the harness connector of electric throttle control actuator or ECM is disconnected or electric throttle control actuator is cleaned. (For details, refer to EC-148, "Work Procedure".)

Work Procedure

INFOID:0000000012406326

1.START

WITH CONSULT

1. Turn ignition switch ON.
2. Select “CLSD THL POS LEARN” in “WORK SUPPORT” mode.
3. Follow the instructions on the CONSULT display.
4. Turn ignition switch OFF and wait at least 10 seconds.
   Check that throttle valve moves during the above 10 seconds by confirming the operating sound.

WITHOUT CONSULT

1. Start the engine.
   NOTE:
   Coolant temperature is less than 25°C (77°F) before engine starts.
2. Warm up the engine.
   NOTE:
   Warm up the engine until “COOLAN TEMP/S” on “DATA MONITOR” of CONSULT reaches more than 65°C (149°F).
3. Turn ignition switch OFF and wait at least 10 seconds.
   NOTE:
   Check that throttle valve moves during the above 10 seconds by confirming the operating sound.

>> END

cardiagn.com

IDLE AIR VOLUME LEARNING

Description

INFOID:0000000012406327

Idle Air Volume Learning is a function of ECM to learn the idle air volume that keeps engine idle speed within the specific range. (For details, refer to EC-149, "Work Procedure".) It must be performed under the following conditions:

- Each time the electric throttle control actuator or ECM is replaced.
- Idle speed or ignition timing is out of the specification.

Work Procedure

INFOID:0000000012406328

1.PRECONDITIONING

Check that all of the following conditions are satisfied.
Learning will be cancelled if any of the following conditions are missed for even a moment.

- Battery voltage: More than 12.9 V (At idle)
- Engine coolant temperature: 70 - 100°C (158 - 212°F)
- Selector lever position: P or N
- Electric load switch: OFF
  (Air conditioner, head lamp, rear window defogger)
  On vehicles equipped with daytime light systems, if the parking brake is applied before the engine is started the head lamp will not illuminate.
- Steering wheel: Neutral (Straight-ahead position)
- Vehicle speed: Stopped
- Transmission: Warmed-up
- With CONSULT: Drive vehicle until “ATF TEMP SEN” in “DATA MONITOR” mode of “CVT” system indicates less than 0.9 V.
- Without CONSULT: Drive vehicle for 10 minutes.

Will CONSULT be used?

YES >> GO TO 2.
NO >> GO TO 3.

2.PERFORM IDLE AIR VOLUME LEARNING

With CONSULT

1. Perform EC-147, "Description".
2. Perform EC-148, "Description".
3. Start engine and warm it up to normal operating temperature.
4. Select “IDLE AIR VOL LEARN” in “WORK SUPPORT” mode.
5. Touch “START” and wait 20 seconds.

Is “CMPLT” displayed on CONSULT screen?

YES >> GO TO 4.
NO >> GO TO 5.

3.PERFORM IDLE AIR VOLUME LEARNING

Without CONSULT

NOTE:

- **It is better to count the time accurately with a clock.**
- **It is impossible to switch the diagnostic mode when an accelerator pedal position sensor circuit has a malfunction.**


1. Perform EC-147, "Description".
2. Perform EC-148, "Description".
3. Start engine and warm it up to normal operating temperature.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Confirm that accelerator pedal is fully released, turn ignition switch ON and wait 3 seconds.
6. Repeat the following procedure quickly 5 times within 5 seconds.

- Fully depress the accelerator pedal.
- Fully release the accelerator pedal.

7. Wait 7 seconds, fully depress the accelerator pedal for approx. 20 seconds until the MIL stops blinking and turns ON.

cardiagn.com

8. Fully release the accelerator pedal within 3 seconds after the MIL turns ON.
9. Start engine and let it idle.
10. Wait 20 seconds.

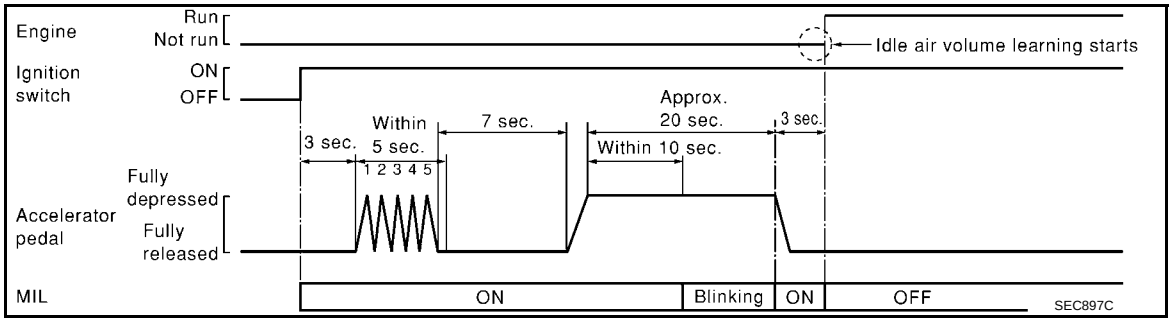

>> GO TO 4.

4. CHECK IDLE SPEED AND IGNITION TIMING

Rev up the engine 2 or 3 times and check that idle speed and ignition timing are within the specifications.
For procedure, refer to EC-508, "Work Procedure" and EC-509, "Work Procedure".
For specifications, refer to EC-514, "Idle Speed" and EC-514, "Ignition Timing".

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 5.

5. DETECT MALFUNCTIONING PART-I

Check the following
- Check that throttle valve is fully closed.
- Check PCV valve operation.
- Check that downstream of throttle valve is free from air leakage.

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair or replace malfunctioning part.

6. DETECT MALFUNCTIONING PART-II

Engine component parts and their installation condition are questionable. Check and eliminate the cause of the incident.
It is useful to perform “TROUBLE DIAGNOSIS - SPECIFICATION VALUE”. Refer to EC-167, "Description".
If any of the following conditions occur after the engine has started, eliminate the cause of the incident and perform Idle Air Volume Learning again:
- Engine stalls.
- Incorrect idle.

>> INSPECTION END

cardiagn.com

MIXTURE RATIO SELF-LEARNING VALUE CLEAR

Description

INFOID:0000000012406329

This describes show to erase the mixture ratio self-learning value. For the actual procedure, follow the instructions in “Diagnosis Procedure”. (For details, refer to EC-151, "Work Procedure".)

Work Procedure

INFOID:0000000012406330

1.START

With CONSULT

1. Start engine and warm it up to normal operating temperature.
2. Select “SELF-LEARNING CONT” in “WORK SUPPORT” mode with CONSULT.
3. Clear mixture ratio self-learning value by touching “CLEAR”.

With GST

1. Start engine and warm it up to normal operating temperature.
2. Turn ignition switch OFF.
3. Disconnect mass air flow sensor harness connector.
4. Restart engine and let it idle for at least 5 seconds.
5. Stop engine and reconnect mass air flow sensor harness connector.
6. Select Service $03 with GST. Check that DTC P0102 is detected.
7. Select Service $04 with GST to erase the DTC P0102.

>> END

cardiagn.com

VIN REGISTRATION

Description

INFOID:0000000012406331

VIN Registration is an operation to register VIN in ECM. It must be performed each time ECM is replaced. (For details, refer to EC-152, "Work Procedure".)

NOTE:

Accurate VIN which is registered in ECM may be required for Inspection & Maintenance (I/M).

Work Procedure

INFOID:0000000012406332

1.CHECK VIN

Check the VIN of the vehicle and note it. Refer to GI-33, "Information About Identification or Model Code".

>> GO TO 2.

2.PERFORM VIN REGISTRATION

With CONSULT

1. Turn ignition switch ON with engine stopped.
2. Select “VIN REGISTRATION” in “WORK SUPPORT” mode.
3. Follow the instructions on the CONSULT display.

>> END

cardiagn.com

FUEL PRESSURE

Work Procedure

INFOID:0000000012406333

FUEL PRESSURE RELEASE

With CONSULT

1. Turn ignition switch ON.
2. Perform “FUEL PRESSURE RELEASE” in “WORK SUPPORT” mode with CONSULT.
3. Start engine.
4. After engine stalls, crank it 2 or 3 times to release all fuel pressure.
5. Turn ignition switch OFF.

Without CONSULT

1. Remove fuel pump fuse located in IPDM E/R.
2. Start engine.
3. After engine stalls, crank it 2 or 3 times to release all fuel pressure.
4. Turn ignition switch OFF.
5. Reinstall fuel pump fuse after servicing fuel system.

FUEL PRESSURE CHECK


CAUTION:

Before disconnecting fuel line, release fuel pressure from fuel line to eliminate danger.

NOTE:

- **Prepare pans or saucers under the disconnected fuel line because the fuel may spill out. The fuel pressure cannot be completely released because this models do not have fuel return system.**
- **Be careful not to scratch or get the fuel hose connection area dirty when servicing, so that the quick connector o-ring maintains seal ability.**
- **Use Fuel Pressure Gauge Kit [SST: — (J-44321)] and Fuel Pressure Adapter [SST: — (J-44321-6)] to check fuel pressure.**

1. Release fuel pressure to zero.
2. Remove fuel hose using Quick Connector Release [SST: — (J-45488)].
   - Do not twist or kink fuel hose because it is plastic hose.
   - Do not remove fuel hose (1) from quick connector.
   - Keep fuel hose connections clean.
3. Install Fuel Pressure Adapter [SST: — (J-44321-6)] (B) and Fuel Pressure Gauge kit [SST: — (J44321)] (A) as shown in figure.
   - Do not distort or bend fuel rail tube when installing fuel pressure gauge adapter.
   - When reconnecting fuel hose, check the original fuel hose for damage and abnormality.

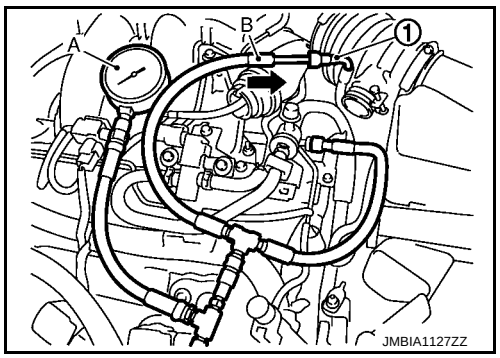

4. Turn ignition switch ON (reactivate fuel pump) and check for fuel leakage.
5. Start engine and check for fuel leakage.
6. Read the indication of fuel pressure gauge kit [SST: — (J-44321)].
   - During fuel pressure check, check for fuel leakage from fuel connection every 3 minutes.

At idling : Approximately 350 kPa (3.57 kg/cm^2, 51 psi)

7. If result is unsatisfactory, go to next step.
8. Check the following.
   - Fuel hoses and fuel tubes for clogging
   - Fuel filter for clogging
   - Fuel pump
   - Fuel pressure regulator for clogging

cardiagn.com

9. If OK, replace fuel pressure regulator.
   If NG, repair or replace malfunctioning part.
10. Before disconnecting Fuel Pressure Gauge kit [SST: — (J-44321)] and Fuel Pressure Adapter [SST: — (J-44321-6)], release fuel pressure to zero.

cardiagn.com

HOW TO SET SRT CODE

Description

INFOID:0000000012406334

OUTLINE

In order to set all SRTs, the self-diagnoses as in the “SRT ITEM” table must have been performed at least once. Each diagnosis may require actual driving for a long period of time under various conditions.

SRT ITEM

The table below shows required self-diagnostic items to set the SRT to “CMPLT”.


SRT item*1 (CONSULT indication)	Performance Priority*2	Required self-diagnostic items to set the SRT to “CMPLT”	Corresponding DTC No.
CATALYST	1	Three way catalyst function	P0420, P0430
EVAP SYSTEM	1	EVAP control system purge flow monitoring	P0441
		EVAP control system	P0456
HO2S	1	Air fuel ratio (A/F) sensor 1	P014C, P014D,P014E, P014F,P015A, P015B,P015C, P015D
		Heated oxygen sensor 2	P0137, P0157
		Heated oxygen sensor 2	P0138, P0158
		Heated oxygen sensor 2	P0139, P0159
EGR/VVT SYSTEM	2	Intake value timing control function	P0011, P0021, P052A, P052B, P052C, P052D

*1: Though displayed on the CONSULT screen, “HO2S HTR” is not SRT item.
*2: If completion of several SRTs is required, perform driving patterns (DTC confirmation procedure), one by one based on the priority for models with CONSULT.

SRT SERVICE PROCEDURE

cardiagn.com

If a vehicle has failed the state emissions inspection due to one or more SRT items indicating “INCMP”, review the flowchart diagnostic sequence, referring to the following flowchart.

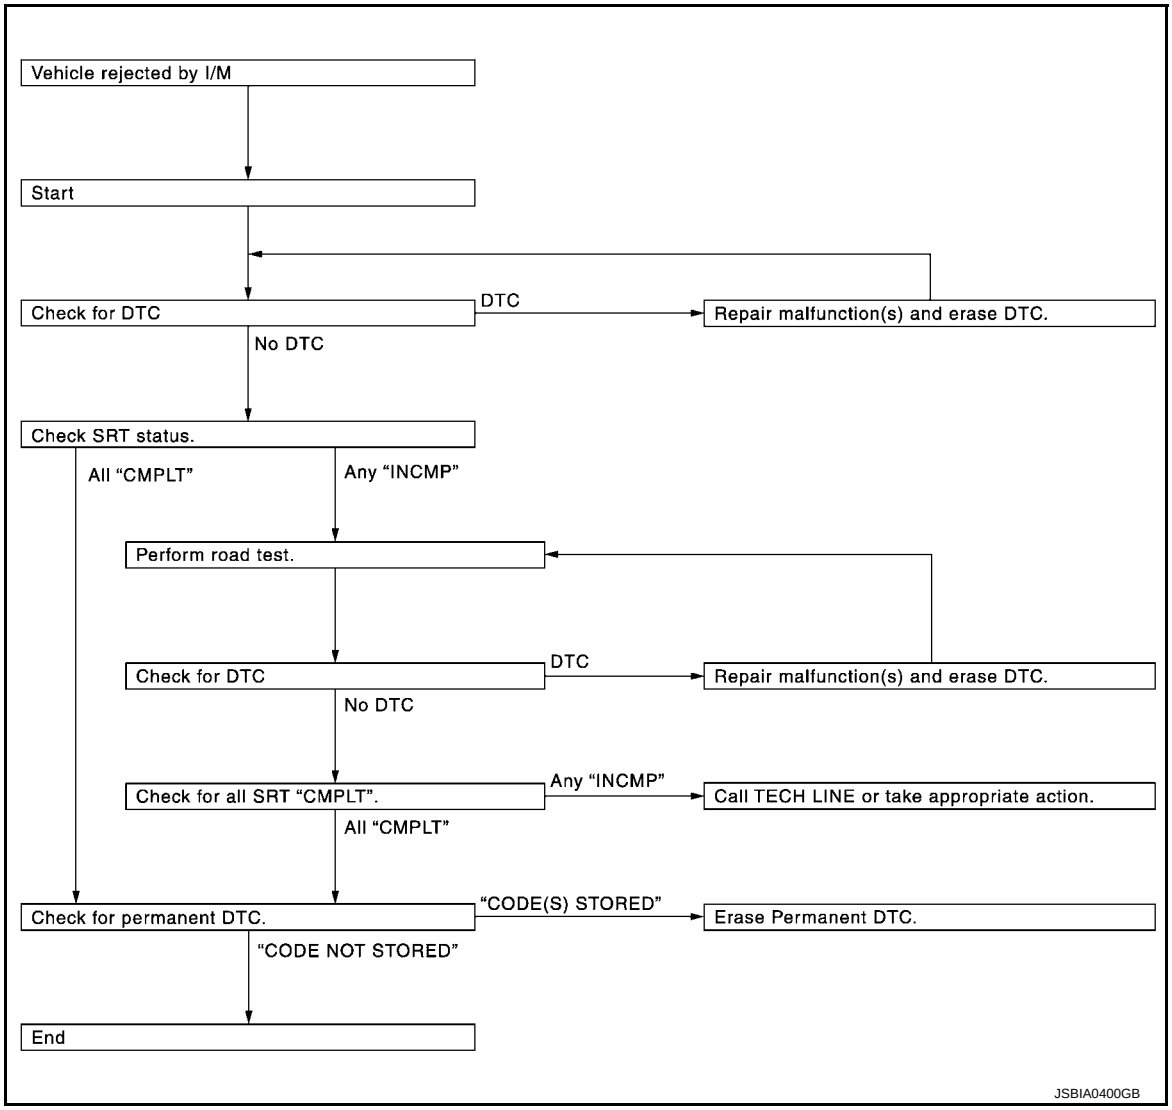


SRT Set Driving Pattern

INFOID:0000000012406335

CAUTION:

cardiagn.com

Always drive the vehicle in safe manner according to traffic conditions and obey all traffic laws.

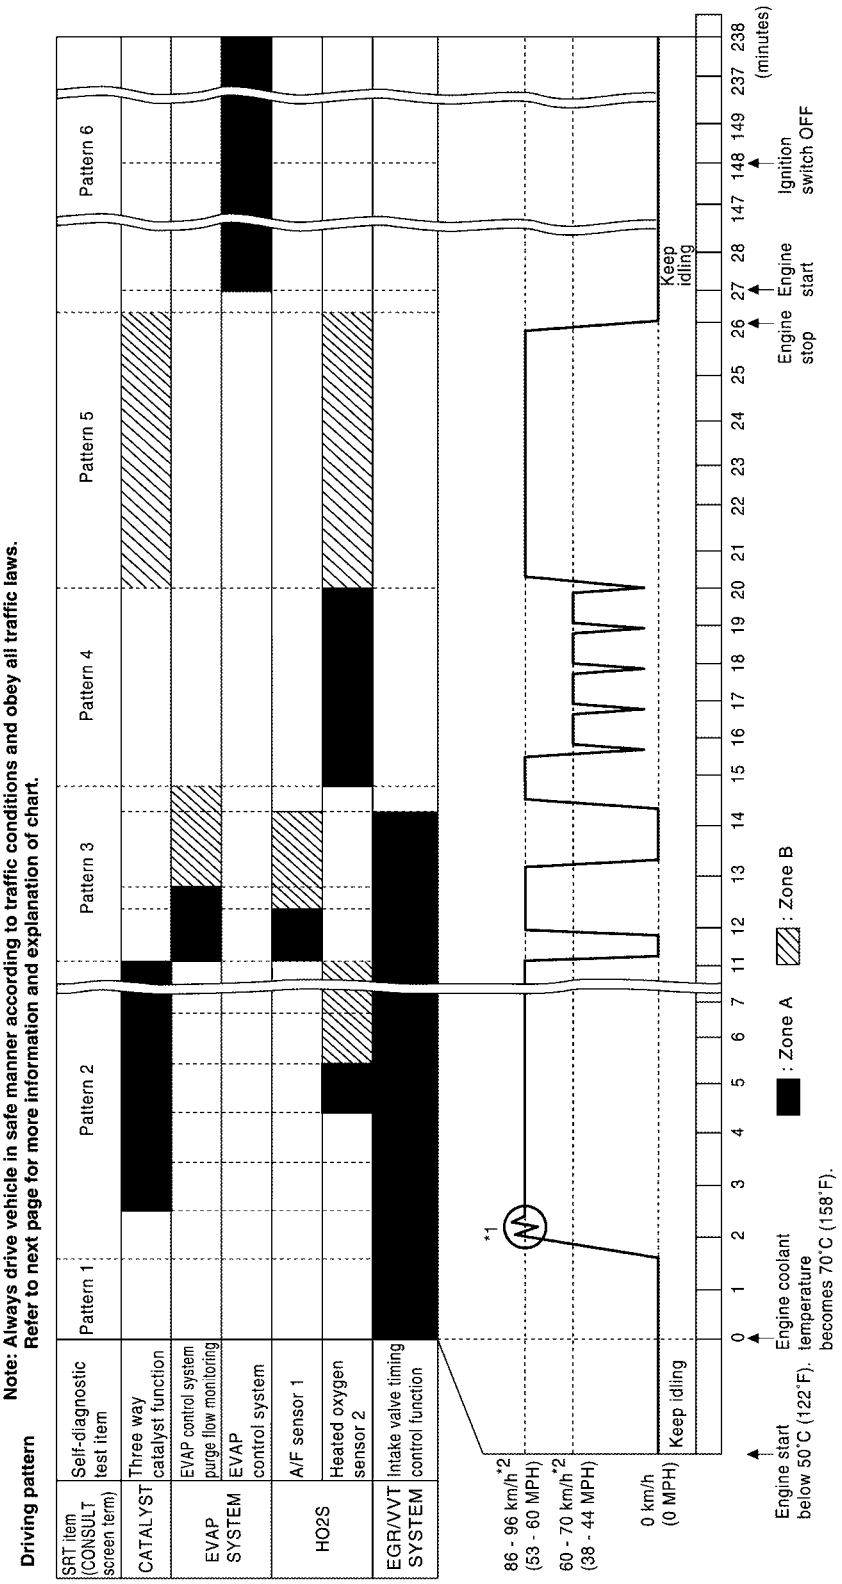

*1: Depress the accelerator pedal until vehicle speed is 90 km/h (56 MPH), then release the accelerator pedal and keep it released for more than 10 seconds. Depress the accelerator pedal until vehicle speed is 90 km/h (56 MPH) again.

*2: Checking the vehicle speed with GST is advised.

- The time required for each diagnosis varies with road surface conditions, weather, altitude, individual driving habits, etc.
- “Zone A” is the fastest time where required for the diagnosis under normal conditions*. If the diagnosis is not completed within “Zone A”, the diagnosis can still be performed within “Zone B”.

cardiagn.com

*: Normal conditions
- Sea level
- Flat road
- Ambient air temperature: 20 – 30°C (68 – 86°F)

NOTE:
Diagnosis is performed as quickly as possible under normal conditions. However, under other conditions, diagnosis may also be performed. [For example: ambient air temperature other than 20 – 30°C (68 – 86°F)]

Work Procedure

INFOID:0000000012406336

1.CHECK DTC

Check DTC.

Is any DTC detected?

YES >> Repair malfunction(s) and erase DTC. Refer to EC-103, "DTC Index".
NO >> GO TO 2.

2.CHECK SRT STATUS

With CONSULT
Select “SRT STATUS” in “DTC & SRT CONFIRMATION” mode with CONSULT.

Without CONSULT
Perform “SRT status” mode with EC-70, "On Board Diagnosis Function".

With GST
Select Service $01 with GST.

Is SRT code(s) set?

YES >> GO TO 12.
NO-1 >> With CONSULT: GO TO 3.
NO-2 >> Without CONSULT: GO TO 4.

3.DTC CONFIRMATION PROCEDURE

1. Select “SRT WORK SUPPORT” in “DTC & SRT CONFIRMATION” mode with CONSULT.
2. For SRT(s) that is not set, perform the corresponding “DTC CONFIRMATION PROCEDURE” according to the “Performance Priority” in the “SRT ITEM” table. Refer to EC-155, "Description".
3. Check DTC.

Is any DTC detected?

YES >> Repair malfunction(s) and erase DTC. Refer to EC-103, "DTC Index".
NO >> GO TO 11.

4.PERFORM ROAD TEST

- Check the “Performance Priority” in the “SRT ITEM” table. Refer to EC-155, "Description".
- Perform the most efficient SRT set driving pattern to set the SRT properly. Refer to EC-156, "SRT Set Driving Pattern".
  In order to set all SRTs, the SRT set driving pattern must be performed at least once.

>> GO TO 5.

5.PATTERN 1

1. Check the vehicle condition;
- Engine coolant temperature is −10 to 35°C (14 to 95°F).
- Fuel tank temperature is more than 0°C (32°F).
2. Start the engine.
3. Keep engine idling until the engine coolant temperature is greater than 70°C (158°F)

NOTE:
ECM terminal voltage is follows;
- Engine coolant temperature
  - −10 to 35°C (14 to 95°F): 3.0 – 4.3 V
  - 70°(158°F): Less than 4.1 V
- Fuel tank temperature: Less than 1.4 V

Refer to EC-83, "Reference Value".

cardiagn.com

>> GO TO 6.

6.PATTERN 2


1. Drive the vehicle. And depress the accelerator pedal until vehicle speed is 90 km/h (56 MPH), then release the accelerator pedal and keep it released for more than 10 seconds.
2. Depress the accelerator pedal until vehicle speed is 90 km/h (56 MPH) again

NOTE:
- Checking the vehicle speed with GST is advised.
- When steady-state driving is performed again even after it is interrupted, each diagnosis can be conducted. In this case, the time required for diagnosis may be extended.

>> GO TO 7.

7.PATTERN 3


- Operate vehicle following the driving pattern shown in the figure.
- Release the accelerator pedal during deceleration of vehicle speed from 90 km/h (56 MPH) to 0 km/h (0 MPH).

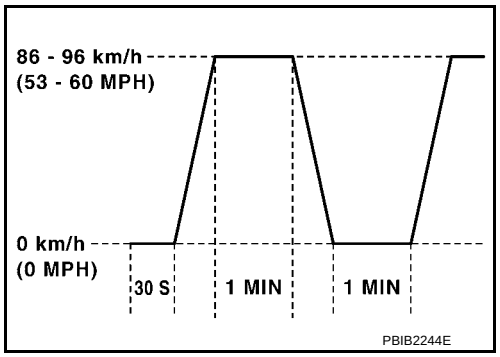

>> GO TO 8.

8.PATTERN 4

- Operate vehicle, following the driving pattern shown in the figure.
- Drive the vehicle in a proper gear at 60 km/h (38 MPH) and maintain the speed.
- Release the accelerator pedal fully at least 5 seconds.
- Repeat the above two steps at least 5 times.

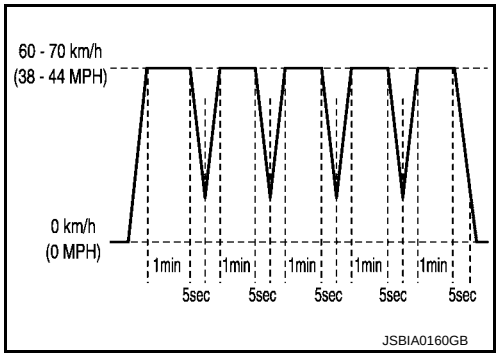

>> GO TO 9.

9.PATTERN 5

- The accelerator pedal must be held very steady during steady-state driving.
- If the accelerator pedal is moved, the test must be conducted again.

>> GO TO 10.

10.PATTERN 6

1. Start the engine and wait at least 2 hours.
2. Turn ignition OFF and wait at least 90 minutes.

>> GO TO 11.

11.CHECK SRT STATUS

With CONSULT
Select “SRT STATUS” in “DTC & SRT CONFIRMATION” mode with CONSULT.
Without CONSULT
Perform “SRT status” mode with EC-70, "On Board Diagnosis Function".

cardiagn.com

With GST
Select Service $01 with GST.

Is SRT(s) set?

YES >> GO TO 12.
NO >> Call TECH LINE or take appropriate action.

12.CHECK PERMANENT DTC

NOTE:
Permanent DTC cannot be checked with a tool other than CONSULT or GST.

With CONSULT
Select “SRT STATUS” in “DTC & SRT CONFIRMATION” mode with CONSULT.

With GST
Select Service $0A with GST.

Is permanent DTC(s) detected?

YES >> Proceed to EC-161, "Description".
NO >> END

cardiagn.com

HOW TO ERASE PERMANENT DTC


Description

INFOID:0000000012406337

OUTLINE

When a DTC is stored in ECM

When a DTC is stored in ECM and MIL is ON, a permanent DTC is erased with MIL shutoff if the same malfunction is not detected after performing the driving pattern for MIL shutoff three times in a raw.

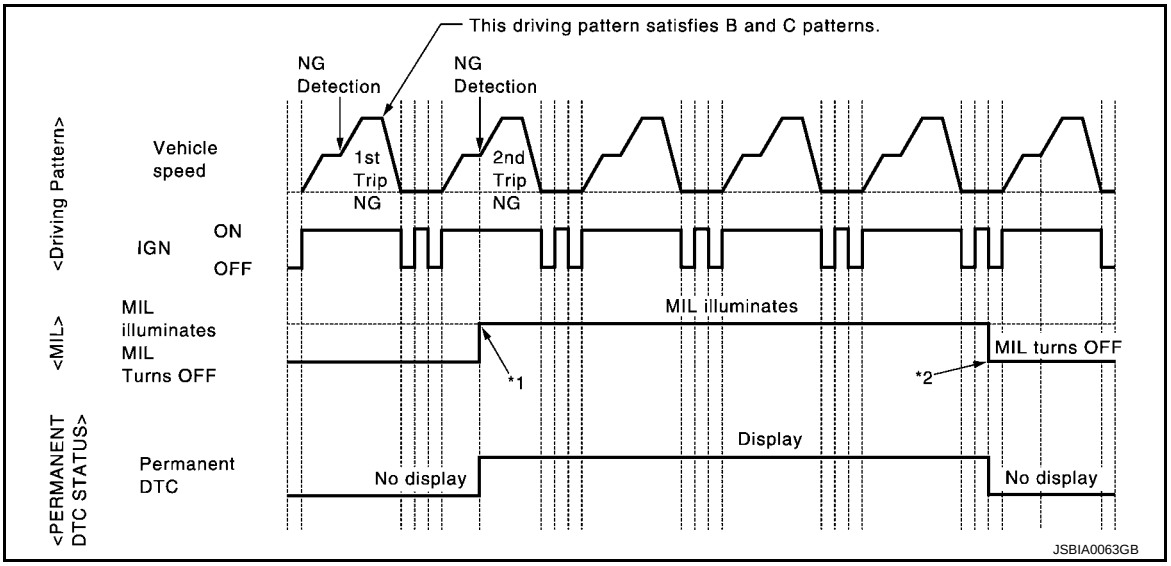

*1: When the same malfunction is detected in two consecutive trips, MIL will illuminate.

*2: MIL will turn off after vehicle is driven 3 times (driving pattern B) without any malfunctions.

When a DTC is not stored in ECM

The erasing method depends on a permanent DTC stored in ECM. Refer to the following table.

NOTE:

If the applicable permanent DTC includes multiple groups, perform the procedure of Group B first. If the permanent DTC is not erased, perform the procedure of Group A.

×: Applicable —: Not applicable

Group*	Perform "DTC CONFIRMATION PROCEDURE" for applicable DTCs.	Driving pattern		Reference
		B	D	
A	×	—	—	EC-162, "Work Procedure (Group A)"
B	—	×	×	EC-164, "Work Procedure (Group B)"


*: For group, refer to EC-103, "DTC Index".

PERMANENT DTC ITEM

For permanent DTC items, MIL turns ON. Refer to EC-103, "DTC Index".


cardiagn.com

PERMANENT DTC SERVICE PROCEDURE

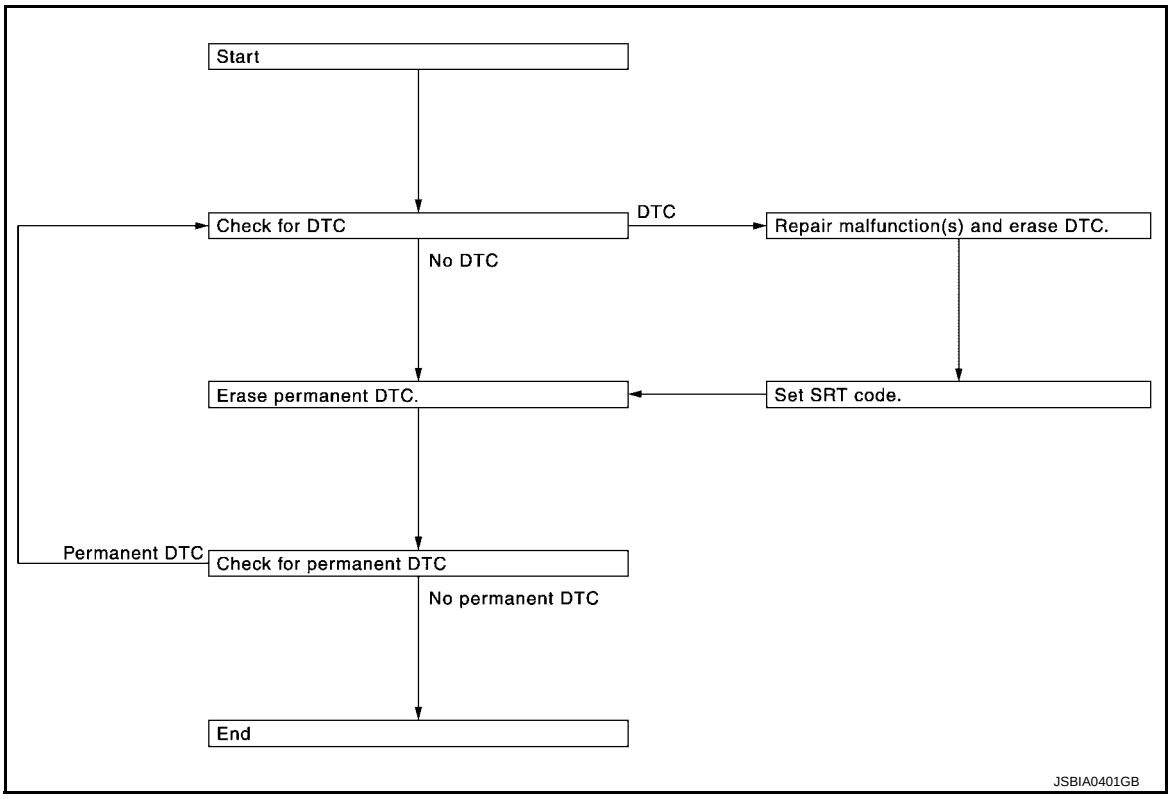

Work Procedure (Group A)

INFOID:0000000012406338

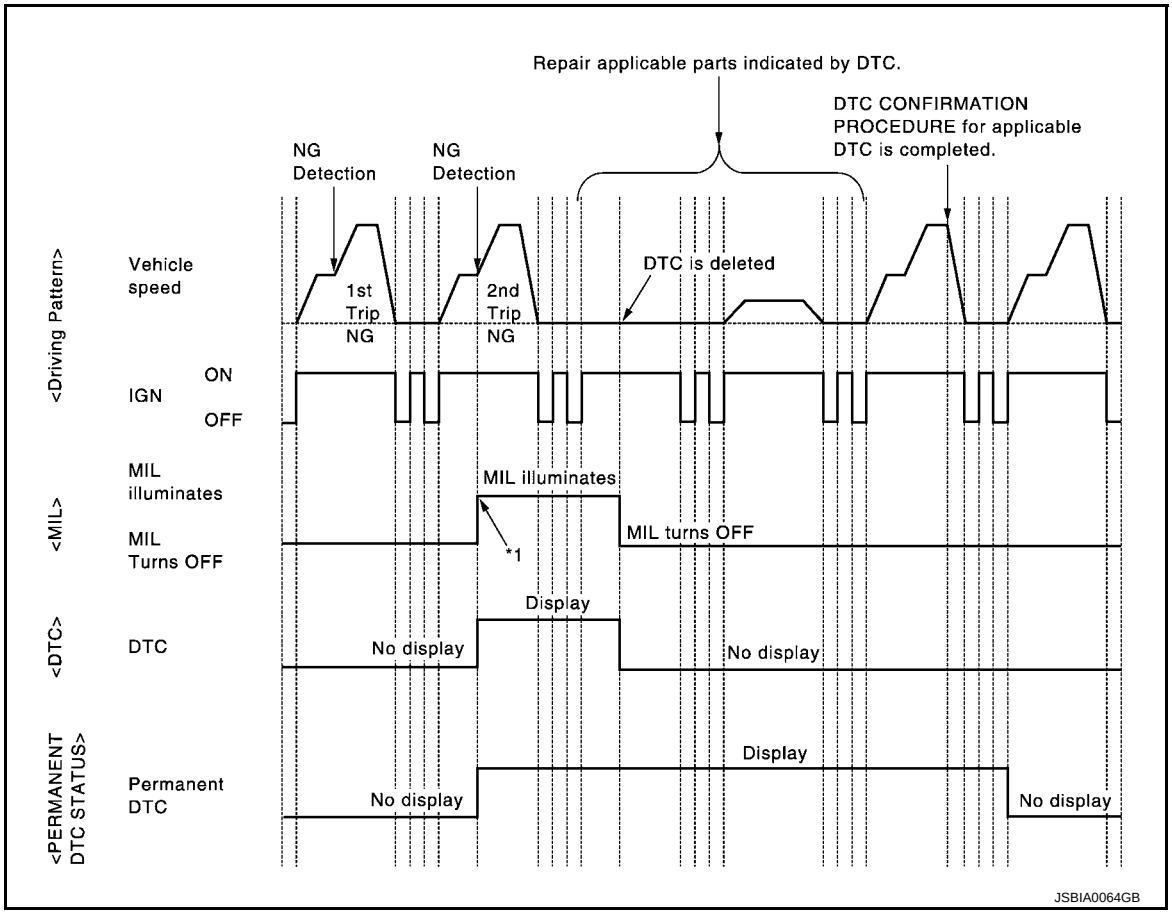

cardiagn.com

*1: When the same malfunction is detected in two consecutive trips, MIL will illuminate.

1.CHECK DTC

Check DTC.

Is any DTC detected?

YES >> Repair malfunction(s) and erase DTC. EC-70, "On Board Diagnosis Function" or EC-73, "CONSULT Function".

NO >> GO TO 2.

2.CHECK PERMANENT DTC

With CONSULT

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. Select “PERMANENT DTC STATUS” mode with CONSULT.

With GST

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. Select Service $0A with GST.

Is any permanent DTC detected?

YES >> GO TO 3.

NO >> END

3.PERFORM DTC CONFIRMATION PROCEDURE

Perform “DTC CONFIRMATION PROCEDURE” for DTCs which are the same as permanent DTCs stored in ECM. Refer to EC-103, "DTC Index".

>> GO TO 4.

4.CHECK PERMANENT DTC

With CONSULT

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. Select “PERMANENT DTC STATUS” mode with CONSULT.

With GST

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. Select Service $0A with GST.

Is any permanent DTC detected?


YES >> GO TO 1.

NO >> END

cardiagn.com

Work Procedure (Group B)

INFOID:0000000012406339

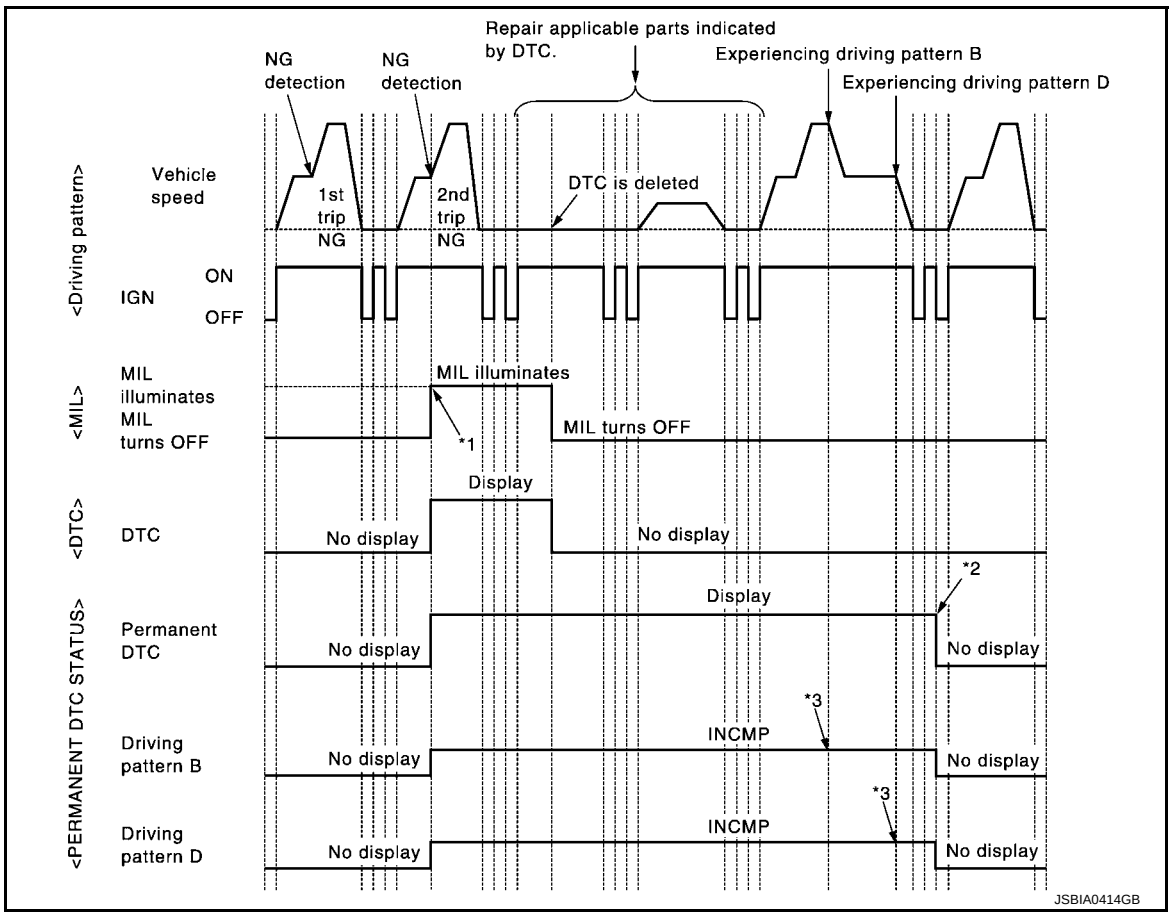

*1: When the same malfunction is detected in two consecutive trips, MIL will illuminate.

*2: After experiencing driving pattern B and D, permanent DTC is erased.

*3: Indication does not change unless the ignition switch is turned from ON to OFF twice even after experiencing driving pattern B or D.

NOTE:
Drive the vehicle according to only driving patterns indicating “INCMP” in driving patterns B and D on the “PERMANENT DTC STATUS” screen.

1.CHECK DTC

Check DTC.

Is any DTC detected?

YES >> Repair malfunction(s) and erase DTC. Refer to EC-70, "On Board Diagnosis Function" or EC-73, "CONSULT Function".

NO >> GO TO 2.

2.CHECK PERMANENT DTC

With CONSULT

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. Select “PERMANENT DTC STATUS” mode with CONSULT.

With GST

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

cardiagn.com

4. Turn ignition switch ON.
5. Select Service $0A with GST.

Is any permanent DTC detected?

YES >> GO TO 3.
NO >> END

3. DRIVE DRIVING PATTERN B

CAUTION:
- **Always drive at a safe speed.**
- **Never erase self-diagnosis results.**
- **If self-diagnosis results are erased during the trip of driving pattern B or D, the counter of driving pattern B and D is reset.**

With CONSULT
1. Start engine and warm it up to normal operating temperature.
2. Use “PERMANENT DTC WORK SUPPORT” mode with CONSULT to drive the vehicle according to driving pattern B. Refer to EC-73, "CONSULT Function", EC-67, "DIAGNOSIS DESCRIPTION : Driving Pattern".

With GST
1. Start engine and warm it up to normal operating temperature.
2. Drive the vehicle according to driving pattern B. Refer to EC-67, "DIAGNOSIS DESCRIPTION : Driving Pattern".

>> GO TO 4.

4. CHECK PERMANENT DTC

With CONSULT
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. Select “PERMANENT DTC STATUS” mode with CONSULT.

With GST
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. Select Service $0A with GST.

Is any permanent DTC detected?

YES >> GO TO 5.
NO >> END

5. DRIVE DRIVING PATTERN D

CAUTION:
- **Always drive at a safe speed.**
- **Never erase self-diagnosis results.**
- **If self-diagnosis results are erased during the trip of driving pattern B or D, the counter of driving pattern B and D is reset.**

1. Drive the vehicle according to driving pattern D. Refer to EC-67, "DIAGNOSIS DESCRIPTION : Driving Pattern".

>> GO TO 6.

6. CHECK PERMANENT DTC

With CONSULT
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.

cardiagn.com

5. Select “PERMANENT DTC STATUS” mode with CONSULT.

With GST

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. Select Service $0A with GST.

Is any permanent DTC detected?

YES >> GO TO 1.
NO >> END

cardiagn.com

DTC/CIRCUIT DIAGNOSIS

TROUBLE DIAGNOSIS - SPECIFICATION VALUE

Description

INFOID:0000000012406340

The specification (SP) value indicates the tolerance of the value that is displayed in “SPEC” in “DATA MONITOR” mode of CONSULT during normal operation of the Engine Control System. When the value in “SPEC” in “DATA MONITOR” mode is within the SP value, the Engine Control System is confirmed OK. When the value in “SPEC” in “DATA MONITOR” mode is NOT within the SP value, the Engine Control System may have one or more malfunctions.
The SP value is used to detect malfunctions that may affect the Engine Control System, but will not illuminate the MIL.
The SP value will be displayed for the following three items:
- B/FUEL SCHDL (The fuel injection pulse width programmed into ECM prior to any learned on board correction)
- A/F ALPHA-B1/B2 (The mean value of air-fuel ratio feedback correction factor per cycle)
- MASS AIR FLOW SENSOR (Hz) (The signal frequency of the mass air flow sensor)

Component Function Check

INFOID:0000000012406341

1. START

Check that all of the following conditions are satisfied.
- Vehicle driven distance: More than 5,000 km (3,107 miles)
- Barometric pressure: 98.3 - 104.3 kPa (1.003 - 1.064 kg/cm^2, 14.25 - 15.12 psi)
- Atmospheric temperature: 20 - 30°C (68 - 86°F)
- Engine coolant temperature: 75 - 95°C (167 - 203°F)
- Transmission: Warmed-up
- After the engine is warmed up to normal operating temperature, drive vehicle until “FLUID TEMP SE” (CVT fluid temperature sensor signal) indicates more than 60°C (140°F).
- Electrical load: Not applied
- Rear window defogger switch, air conditioner switch lighting switch are OFF. Steering wheel is straight ahead.
- Engine speed: Idle

>> GO TO 2.

2. PERFORM “SPEC” OF “DATA MONITOR” MODE

With CONSULT
NOTE:
Perform “SPEC” in “DATA MONITOR” mode in maximum scale display.
1. Perform “EC-141, "Work Procedure"”.
2. Select “B/FUEL SCHDL”, “A/F ALPHA-B1”, “A/F ALPHA-B2” and “MASS AIR FLOW SENSOR (Hz)” in “SPEC” of “DATA MONITOR” mode with CONSULT.
3. Check that monitor items are within the SP value.

Is the measurement value within the SP value?


YES >> INSPECTION END
NO >> Proceed to EC-168, "Diagnosis Procedure".

cardiagn.com

Diagnosis Procedure


INFOID:0000000012406342

OVERALL SEQUENCE

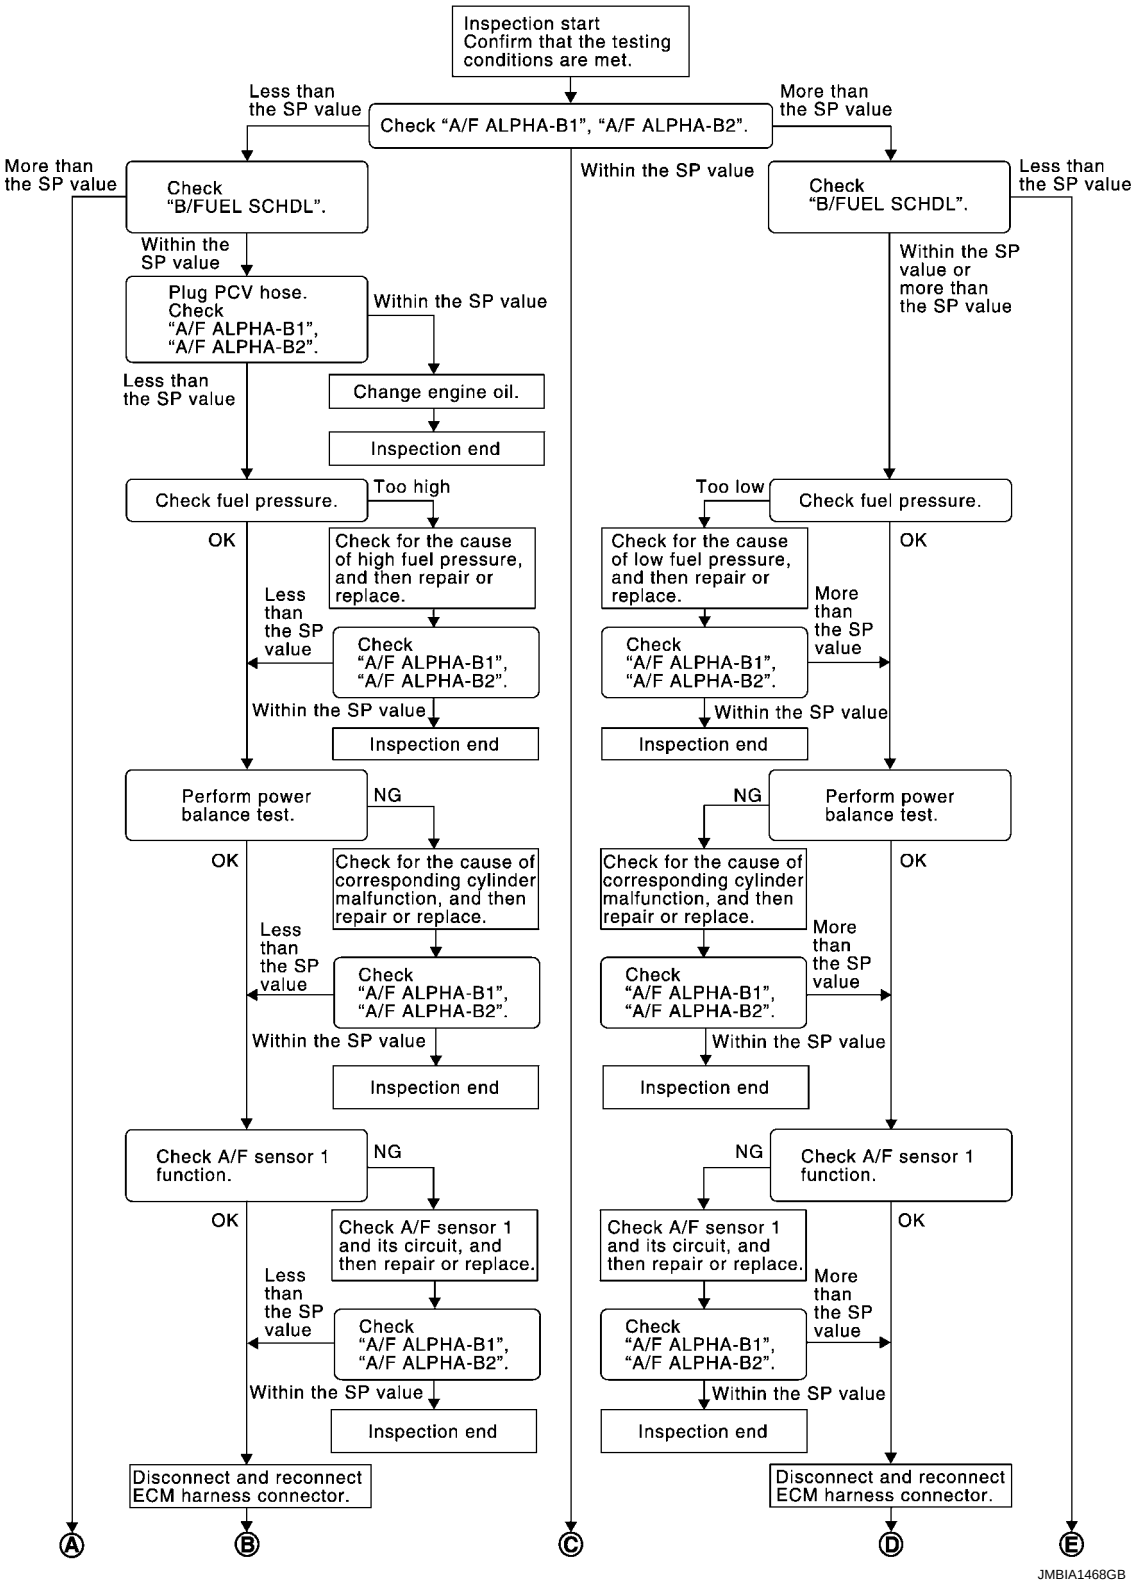

JMBIA1468GB

cardiagn.com

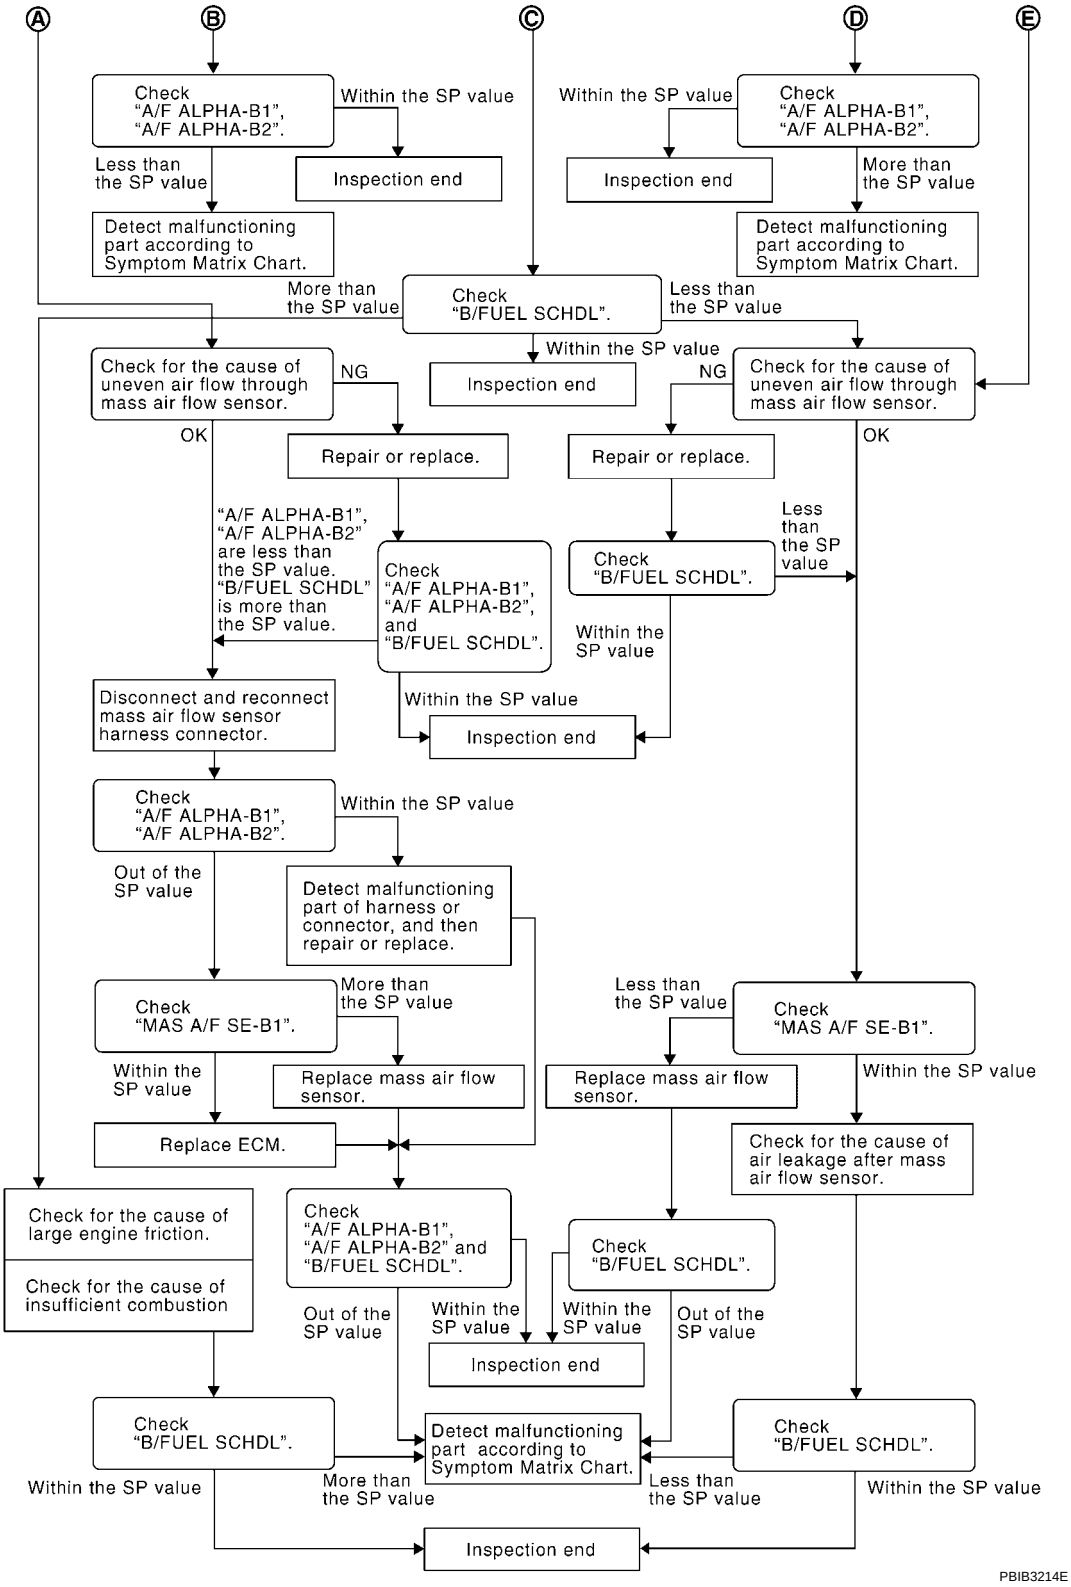

DETAILED PROCEDURE

1. CHECK “A/F ALPHA-B1”, “A/F ALPHA-B2”

With CONSULT

1. Start engine.
2. Confirm that the testing conditions are met. Refer to EC-167, "Component Function Check".
3. Select “A/F ALPHA-B1”, “A/F ALPHA-B2” in “SPEC” of “DATA MONITOR” mode, and check that each indication is within the SP value.

cardiagn.com

NOTE:
Check “A/F ALPHA-B1”, “A/F ALPHA-B2” for approximately 1 minute because they may fluctuate. It is NG if the indication is out of the SP value even a little.

Is the measurement value within the SP value?

YES >> GO TO 17.
NO-1 >> Less than the SP value: GO TO 2.
NO-2 >> More than the SP value: GO TO 3.

2.CHECK “B/FUEL SCHDL”

Select “B/FUEL SCHDL” in “SPEC” of “DATA MONITOR” mode, and check that the indication is within the SP value.

Is the measurement value within the SP value?

YES >> GO TO 4.
NO >> More than the SP value: GO TO 19.

3.CHECK “B/FUEL SCHDL”

Select “B/FUEL SCHDL” in “SPEC” of “DATA MONITOR” mode, and check that the indication is within the SP value.

Is the measurement value within the SP value?

YES >> GO TO 6.
NO-1 >> More than the SP value: GO TO 6.
NO-2 >> Less than the SP value: GO TO 25.

4.CHECK “A/F ALPHA-B1”, “A/F ALPHA-B2”

1. Stop the engine.
2. Disconnect PCV hose, and then plug it.
3. Start engine.
4. Select “A/F ALPHA-B1”, “A/F ALPHA-B2” in “SPEC” of “DATA MONITOR” mode, and check that each indication is within the SP value.

Is the measurement value within the SP value?

YES >> GO TO 5.
NO >> GO TO 6.

5.CHANGE ENGINE OIL

1. Stop the engine.
2. Change engine oil.

NOTE:
This symptom may occur when a large amount of gasoline is mixed with engine oil because of driving conditions (such as when engine oil temperature does not rise enough since a journey distance is too short during winter). The symptom will not be detected after changing engine oil or changing driving conditions.

>> INSPECTION END

6.CHECK FUEL PRESSURE

Check fuel pressure. (Refer to EC-153, "Work Procedure".)

Is the inspection result normal?

YES >> GO TO 9.
NO-1 >> Fuel pressure is too high: Replace “fuel filter and fuel pump assembly”, refer to FL-6, "Exploded View", and then GO TO 8.
NO-2 >> Fuel pressure is too low: GO TO 7.

7.DETECT MALFUNCTIONING PART

Check fuel hoses and fuel tubes for clogging.

Is the inspection result normal?

YES >> Replace “fuel filter and fuel pump assembly”, refer to FL-6, "Exploded View", and then GO TO 8.
NO >> Repair or replace malfunctioning part and then GO TO 8.

cardiagn.com

8. CHECK “A/F ALPHA-B1”, “A/F ALPHA-B2”

1. Start engine.
2. Select “A/F ALPHA-B1”, “A/F ALPHA-B2” in “SPEC” of “DATA MONITOR” mode, and check that each indication is within the SP value.

Is the measurement value within the SP value?

YES >> INSPECTION END
NO >> GO TO 9.

9. PERFORM POWER BALANCE TEST

1. Perform “POWER BALANCE” in “ACTIVE TEST” mode.
2. Check that the each cylinder produces a momentary engine speed drop.

Is the inspection result normal?

YES >> GO TO 12.
NO >> GO TO 10.

10. DETECT MALFUNCTIONING PART

Check the following below.
- Ignition coil and its circuit (Refer to EC-484, "Component Function Check".)
- Fuel injector and its circuit (Refer to EC-479, "Component Function Check".)
- Intake air leakage
- Low compression pressure (Refer to EM-24, "Inspection".)

Is the inspection result normal?

YES >> Replace fuel injector, refer to EM-49, "Exploded View", and then GO TO 11.
NO >> Repair or replace malfunctioning part and then GO TO 11.

11. CHECK “A/F ALPHA-B1”, “A/F ALPHA-B2”

1. Start engine.
2. Select “A/F ALPHA-B1”, “A/F ALPHA-B2” in “SPEC” of “DATA MONITOR” mode, and check that each indication is within the SP value.

Is the measurement value within the SP value?

YES >> INSPECTION END
NO >> GO TO 12.

12. CHECK A/F SENSOR 1 FUNCTION

Perform all DTC CONFIRMATION PROCEDURE related with A/F sensor 1.
- For DTC P0130, P0150, refer to EC-229, "DTC Logic".
- For DTC P0131, P0151, refer to EC-233, "DTC Logic".
- For DTC P0132, P0152, refer to EC-236, "DTC Logic".
- For DTC P014C, P014D, P014E, P014F, refer to EC-261, "DTC Logic".
- For DTC P2096, P2097, P2098, P2099, refer to EC-437, "DTC Logic".

Are any DTCs detected?

YES >> GO TO 15.
NO >> GO TO 13.

13. CHECK A/F SENSOR 1 CIRCUIT

Perform Diagnostic Procedure according to corresponding DTC.

>> GO TO 14.

14. CHECK “A/F ALPHA-B1”, “A/F ALPHA-B2”

1. Start engine.
2. Select “A/F ALPHA-B1”, “A/F ALPHA-B2” in “SPEC” of “DATA MONITOR” mode, and check that each indication is within the SP value.

Is the measurement value within the SP value?

YES >> INSPECTION END
NO >> GO TO 15.

cardiagn.com

15. DISCONNECT AND RECONNECT ECM HARNESS CONNECTOR

1. Stop the engine.
2. Disconnect ECM harness connector. Check pin terminal and connector for damage, and then reconnect it.

>> GO TO 16.

16. CHECK “A/F ALPHA-B1”, “A/F ALPHA-B2”

1. Start engine.
2. Select “A/F ALPHA-B1”, “A/F ALPHA-B2” in “SPEC” of “DATA MONITOR” mode, and check that each indication is within the SP value.

Is the measurement value within the SP value?

YES >> INSPECTION END
NO >> Detect malfunctioning part according to EC-503, "Symptom Table".

17. CHECK “B/FUEL SCHDL”

Select “B/FUEL SCHDL” in “SPEC” of “DATA MONITOR” mode, and check that the indication is within the SP value.

Is the measurement value within the SP value?

YES >> INSPECTION END
NO-1 >> More than the SP value: GO TO 18.
NO-2 >> Less than the SP value: GO TO 25.

18. DETECT MALFUNCTIONING PART

1. Check for the cause of large engine friction. Refer to the following.
- Engine oil level is too high
- Engine oil viscosity
- Belt tension of power steering, alternator, A/C compressor, etc. is excessive
- Noise from engine
- Noise from transmission, etc.
2. Check for the cause of insufficient combustion. Refer to the following.
- Valve clearance malfunction
- Intake valve timing control function malfunction
- Camshaft sprocket installation malfunction, etc.

>> Repair or replace malfunctioning part, and then GO TO 30.

19. CHECK INTAKE SYSTEM

Check for the cause of uneven air flow through mass air flow sensor. Refer to the following.
- Crushed air ducts
- Malfunctioning seal of air cleaner element
- Uneven dirt of air cleaner element
- Improper specification of intake air system

Is the inspection result normal?

YES >> GO TO 21.
NO >> Repair or replace malfunctioning part, and then GO TO 20.

20. CHECK “A/F ALPHA-B1”, “A/F ALPHA-B2”, AND “B/FUEL SCHDL”

Select “A/F ALPHA-B1”, “A/F ALPHA-B2”, and “B/FUEL SCHDL” in “SPEC” of “DATA MONITOR” mode, and check that each indication is within the SP value.

Is the measurement value within the SP value?

YES >> INSPECTION END
NO >> “B/FUEL SCHDL” is more, “A/F ALPHA-B1”, “A/F ALPHA-B2” are less than the SP value: GO TO 21.

21. DISCONNECT AND RECONNECT MASS AIR FLOW SENSOR HARNESS CONNECTOR

1. Stop the engine.

cardiagn.com

2. Disconnect mass air flow sensor harness connector. Check pin terminal and connector for damage and then reconnect it again.

>> GO TO 22.

22. CHECK “A/F ALPHA-B1”, “A/F ALPHA-B2”

1. Start engine.
2. Select “A/F ALPHA-B1”, “A/F ALPHA-B2” in “SPEC” of “DATA MONITOR” mode, and check that each indication is within the SP value.

Is the measurement value within the SP value?

YES >> Detect malfunctioning part of mass air flow sensor circuit and repair it. Refer to EC-206, "Diagnosis Procedure". Then GO TO 29.
NO >> GO TO 23.

23. CHECK “MASS AIR FLOW SENSOR (HZ)”

Select “MASS AIR FLOW SENSOR (Hz)” in “SPEC” of “DATA MONITOR” mode, and check that the indication is within the SP value.

Is the measurement value within the SP value?

YES >> GO TO 24.
NO >> More than the SP value: Replace mass air flow sensor, refer to EM-27, "Exploded View", and then GO TO 29.

24. REPLACE ECM

1. Replace ECM.
2. Refer to EC-145, "Description".

>> GO TO 29.

25. CHECK INTAKE SYSTEM

Check for the cause of uneven air flow through mass air flow sensor. Refer to the following.
- Crushed air ducts
- Malfunctioning seal in air cleaner element
- Uneven dirt in air cleaner element
- Improper specification in intake air system

Is the inspection result normal?

YES >> GO TO 27.
NO >> Repair or replace malfunctioning part, and then GO TO 26.

26. CHECK “B/FUEL SCHDL”

Select “B/FUEL SCHDL” in “SPEC” of “DATA MONITOR” mode, and check that the indication is within the SP value.

Is the measurement value within the SP value?

YES >> INSPECTION END
NO >> Less than the SP value: GO TO 27.

27. CHECK “MASS AIR FLOW SENSOR (HZ)”

Select “MASS AIR FLOW SENSOR (Hz)” in “SPEC” of “DATA MONITOR” mode, and check that the indication is within the SP value.

Is the measurement value within the SP value?

YES >> GO TO 28.
NO >> Less than the SP value: Replace mass air flow sensor, refer to EM-27, "Exploded View",and then GO TO 30.

28. CHECK INTAKE SYSTEM

Check for the cause of air leakage after the mass air flow sensor. Refer to the following.
- Disconnection, looseness, and cracks in air duct
- Looseness of oil filler cap
- Disconnection of oil level gauge

cardiagn.com

- Open stuck, breakage, hose disconnection, or cracks in PCV valve
- Disconnection or cracks in EVAP purge hose, stuck open EVAP canister purge volume control solenoid valve
- Malfunctioning seal in rocker cover gasket
- Disconnection, looseness, or cracks in hoses, such as a vacuum hose, connecting to intake air system parts
- Malfunctioning seal in intake air system, etc.

>> GO TO 30.

29. CHECK “A/F ALPHA-B1”, “A/F ALPHA-B2”, AND “B/FUEL SCHDL”

Select “A/F ALPHA-B1”, “A/F ALPHA-B2”, and “B/FUEL SCHDL” in “SPEC” of “DATA MONITOR” mode, and check that each indication is within the SP value.

Is the measurement value within the SP value?

YES >> INSPECTION END
NO >> Detect malfunctioning part according to EC-503, "Symptom Table".

30. CHECK “B/FUEL SCHDL”

Select “B/FUEL SCHDL” in “SPEC” of “DATA MONITOR” mode, and then check that the indication is within the SP value.

Is the measurement value within the SP value?

YES >> INSPECTION END
NO >> Detect malfunctioning part according to EC-503, "Symptom Table".

cardiagn.com

POWER SUPPLY AND GROUND CIRCUIT

Diagnosis Procedure

INFOID:0000000012406343

1.CHECK FUSE

Check that the following fuse is not blowing.

Location	Fuse No.	Capacity
IPDM E/R	#44	10 A
	#50	15 A

Is the fuse blown (open)?

YES >> Replace the fuse after repairing the applicable circuit. (If the replaced fuse is blown again, check the power supply circuit upstream of IPDM E/R.)
NO >> GO TO 2.

2.CHECK GROUND CONNECTION

1. Turn ignition switch OFF.
2. Check ground connection E38. Refer to GI-44, "Circuit Inspection".

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair or replace ground connection.

3.CHECK ECM GROUND CIRCUIT

1. Disconnect ECM harness connectors.
2. Check the continuity between ECM harness connector and ground.

+		–	Continuity
ECM			
Connector	Terminal		
E19	147	Ground	Existed
	149		
	152		
F14	10		
	55		
F15	105		
	110		

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair or replace error-detected parts.

4.CHECK ECM POWER SUPPLY (MAIN)-I

1. Reconnect ECM harness connector.
2. Turn ignition switch ON.
3. Check the voltage between ECM harness connector terminals.

ECM			Voltage
Connector	+	–	
	Terminal		
E19	145	152	Battery voltage

Is the inspection result normal?

YES >> GO TO 5.

cardiagn.com

NO >> GO TO 6.

5. CHECK ECM POWER SUPPLY (MAIN)-II

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Check the voltage between ECM harness connector terminals as per the following.

ECM			Condition	Voltage (Approx.)
Connector	+	–		
	Terminal			
E19	145	152	After turning ignition switch OFF, battery voltage will exist for a few seconds	Drop to 0 V

Is the inspection result normal?

YES >> GO TO 9.
NO >> GO TO 7.

6. CHECK ECM POWER SUPPLY (MAIN) CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connectors.
3. Disconnect IPDM E/R harness connector.
4. Check the continuity between ECM harness connector and IPDM E/R harness connector.

+		–		Continuity
ECM		IPDM E/R		
Connector	Terminal	Connector	Terminal	
E19	145	E10	10	Existed

5. Also check harness for short to ground.

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

7. CHECK ECM RELAY CONTROL SIGNAL

Check the voltage between ECM harness connector terminals as per the following.

ECM				Condition	Voltage (Approx.)
+		–			
Connector	Terminal	Connector	Terminal		
F15	86	E19	152	Ignition switch ON	0 V
				Turn ignition switch OFF and wait at least 10 seconds.	Battery voltage

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> GO TO 8.

8. CHECK ECM RELAY CONTROL SIGNAL CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Disconnect IPDM E/R harness connector.
4. Check the continuity between ECM harness connector and IPDM E/R harness connector.

cardiagn.com

+		–		Continuity
ECM		IPDM E/R		
Connector	Terminal	Connector	Terminal	
F15	86	F12	69	Existed

5. Also check harness for short to ground and to power.

Is the inspection result normal?

YES >> Replace IPDM E/R. Refer to PCS-34, "Removal and Installation".
NO >> Repair or replace error-detected parts.

9. CHECK IGNITION SWITCH SIGNAL

1. Turn ignition switch ON.
2. Check the voltage between ECM harness connector terminals.

ECM			Condition	Voltage (Approx.)
Connector	+	–		
	Terminal			
E19	133	152	Ignition switch OFF	0 V
			Ignition switch ON	Battery voltage

Is the inspection result normal?

YES >> GO TO 11.
NO >> GO TO 10.

10. CHECK IGNITION SWITCH SIGNAL CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Disconnect IPDM E/R harness connector.
4. Check the continuity between ECM harness connector and IPDM E/R harness connector.

+		–		Continuity
ECM		IPDM E/R		
Connector	Terminal	Connector	Terminal	
E19	133	E10	19	Existed

5. Also check harness for short to ground and to power.

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

11. CHECK ECM POWER SUPPLY (BACK-UP)

Check the voltage between ECM harness connector terminals.

ECM				Voltage
+		–		
Connector	Terminal	Connector	Terminal	
F15	116	E19	152	Battery voltage

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> GO TO 12.

12. CHECK ECM POWER SUPPLY (BACK-UP) CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.

cardiagn.com

3. Disconnect IPDM E/R harness connector.
4. Check the continuity between ECM harness connector and IPDM E/R harness connector.

+		–		Continuity
ECM		IPDM E/R		
Connector	Terminal	Connector	Terminal	
F15	116	F12	55	Existed

5. Also check harness for short to ground.

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

cardiagn.com

U0101 CAN COMM CIRCUIT

Description

INFOID:0000000012406344

CAN (Controller Area Network) is a serial communication line for real time application. It is an on-vehicle multiplex communication line with high data communication speed and excellent error detection ability. Many electronic control units are equipped onto a vehicle, and each control unit shares information and links with other control units during operation (not independent). In CAN communication, control units are connected with 2 communication lines (CAN H line, CAN L line) allowing a high rate of information transmission with less wiring. Each control unit transmits/receives data but selectively reads required data only.

DTC Logic

INFOID:0000000012406345

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
U0101	Lost communication with TCM	When ECM is not transmitting or receiving CAN communication signal of OBD (emission-related diagnosis) with TCM for 2 seconds or more.	• CAN communication line between TCM and ECM • CAN communication line open or shorted

DTC CONFIRMATION PROCEDURE

1. PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON and wait at least 3 seconds.
2. Check DTC.

Is DTC detected?

YES >> Proceed to EC-179, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406346

Perform the trouble diagnosis for CAN communication system. Refer to LAN-17, "Trouble Diagnosis Flow Chart".

cardiagn.com

U1000 CAN COMM CIRCUIT

Description

INFOID:0000000012406347

CAN (Controller Area Network) is a serial communication line for real time application. It is an on-vehicle multiplex communication line with high data communication speed and excellent error detection ability. Many electronic control units are equipped onto a vehicle, and each control unit shares information and links with other control units during operation (not independent). In CAN communication, control units are connected with 2 communication lines (CAN H line, CAN L line) allowing a high rate of information transmission with less wiring. Each control unit transmits/receives data but selectively reads required data only.

DTC Logic

INFOID:0000000012406348

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
U1000	CAN communication line	When ECM is not transmitting or receiving CAN communication signal of OBD (emission related diagnosis) for 2 seconds or more.	• Harness or connectors (CAN communication line is open or shorted)

DTC CONFIRMATION PROCEDURE

1.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON and wait at least 3 seconds.
2. Check DTC.

Is DTC detected?

YES >> Proceed to EC-180, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406349

Perform the trouble diagnosis for CAN communication system. Refer to LAN-17, "Trouble Diagnosis Flow Chart".

cardiagn.com

P0011, P0021 IVT CONTROL

DTC Logic

INFOID:0000000012406350

DTC DETECTION LOGIC

NOTE:
If DTC P0011 or P0021 is displayed with DTC P0075 or P0081, first perform the trouble diagnosis for DTC P0075, P0081. Refer to EC-196, "DTC Logic".

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0011	Intake valve timing control performance (bank 1)	There is a gap between angle of target and phase-control angle degree.	• Crankshaft position sensor (POS) • Camshaft position sensor (PHASE) • Intake valve timing control solenoid valve • Accumulation of debris to the signal pick-up portion of the camshaft • Timing chain installation • Foreign matter caught in the oil groove for intake valve timing control
P0021	Intake valve timing control performance (bank 2)		

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is between 10 V and 16 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE-I

With CONSULT

1. Turn ignition switch ON and select “DATA MONITOR” mode with CONSULT.
2. Start engine and warm it up to the normal operating temperature.
3. Maintain the following conditions for at least 6 consecutive seconds. Hold the accelerator pedal as steady as possible.

ENG SPEED	1,200 - 2,000 rpm
COOLAN TEMP/S	More than 60°C (140°F)
B/FUEL SCHDL	More than 7.3 msec
Selector lever	D position

CAUTION:
Always drive at a safe speed.

4. Stop vehicle with engine running and let engine idle for 10 seconds.
5. Check 1st trip DTC.

With GST

Follow the procedure “With CONSULT” above.

Is 1st trip DTC detected?

YES >> Proceed to EC-182, "Diagnosis Procedure"
NO >> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE-II

With CONSULT

cardiagn.com

1. Maintain the following conditions for at least 20 consecutive seconds.

ENG SPEED	1,400 - 3,175 rpm (A constant rotation is maintained.)
COOLAN TEMP/S	More than 60°C (140°F)
Selector lever	1st or 2nd position
Driving location uphill	Driving vehicle uphill (Increased engine load will help maintain the driving conditions required for this test.)

CAUTION:
Always drive at a safe speed.

2. Check 1st trip DTC.

With GST
Follow the procedure “With CONSULT” above.

Is 1st trip DTC detected?


YES >> Proceed to EC-182, "Diagnosis Procedure"
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406351

1.CHECK OIL PRESSURE WARNING LAMP

1. Start engine.
2. Check oil pressure warning lamp and confirm it is not illuminated.

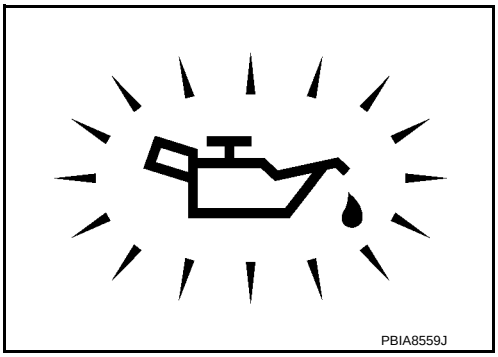

Is oil pressure warming lamp illuminated?

YES >> Check the engine oil level. Refer to LU-8, "Inspection".
NO >> GO TO 2.

2.CHECK INTAKE VALVE TIMING CONTROL SOLENOID VALVE

Check intake valve timing control solenoid valve. Refer to EC-183, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 3.
NO >> Replace malfunctioning intake valve timing control solenoid valve. Refer to EM-68, "Exploded View".

3.CHECK CRANKSHAFT POSITION SENSOR (POS)

Check crankshaft position sensor (POS). Refer to EC-299, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 4.
NO >> Replace crankshaft position sensor (POS). Refer to EM-39, "Exploded View".

4.CHECK CAMSHAFT POSITION SENSOR (PHASE)

Check camshaft position sensor (PHASE). Refer to EC-303, "Component Inspection".

Is the inspection result normal?


YES >> GO TO 5.
NO >> Replace malfunctioning camshaft position sensor (PHASE). Refer to EM-54, "Exploded View".

5.CHECK CAMSHAFT (INTAKE)

Check the following.

cardiagn.com

- Accumulation of debris on the signal plate of camshaft rear end
- Chipping signal plate of camshaft rear end

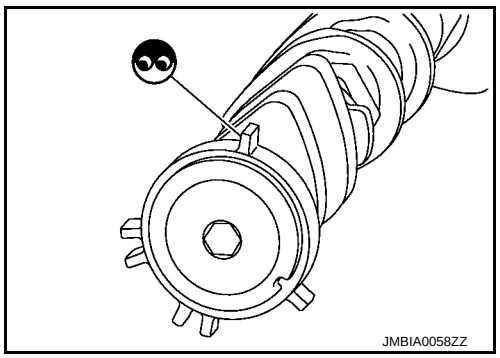

Is the inspection result normal?

YES >> GO TO 6.
NO >> Remove debris and clean the signal plate of camshaft rear end or replace camshaft. Refer to EM-87, "Exploded View".

6. CHECK TIMING CHAIN INSTALLATION

Check service records for any recent repairs that may cause timing chain misalignment.

Are there any service records that may cause timing chain misalignment?

YES >> Check timing chain installation. Refer to EM-85, "Inspection".
NO >> GO TO 7.

7. CHECK LUBRICATION CIRCUIT

Check lubrication circuit. Refer to EM-91, "Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Clean lubrication line.

Component Inspection

INFOID:0000000012406352

1. CHECK INTAKE VALVE TIMING CONTROL SOLENOID VALVE-I

1. Disconnect intake valve timing control solenoid valve harness connector.
2. Check resistance between intake valve timing control solenoid valve terminals as per the following.


Terminals	Resistance
1 and 2	7.0 - 7.8 Ω [at 20°C (68°F)]
1 or 2 and ground	∞Ω (Continuity should not exist)

Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace malfunctioning intake valve timing control solenoid valve. Refer to EM-68, "Exploded View".

2. CHECK INTAKE VALVE TIMING CONTROL SOLENOID VALVE-II

1. Remove intake valve timing control solenoid valve. Refer to EM-68, "Exploded View".
2. Provide 12 V DC between intake valve timing control solenoid valve terminals 1 and 2, and then interrupt it. Check that the plunger moves as shown in the figure.

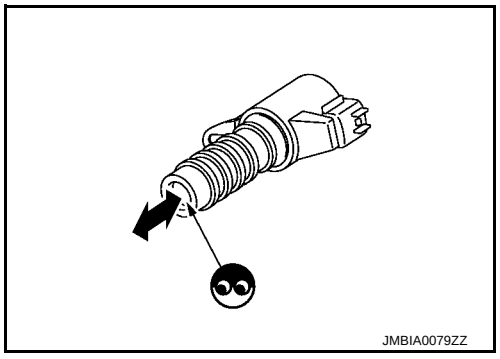

CAUTION:
Never apply 12 V DC continuously for 5 seconds or more. Doing so may result in damage to the coil in intake valve timing control solenoid valve.
NOTE:
Always replace O-ring when intake valve timing control solenoid valve is removed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning intake valve timing control solenoid valve. Refer to EM-68, "Exploded View".

cardiagn.com

P0014, P0024 EVT CONTROL

DTC Description

INFOID:0000000012406353

DTC DETECTION LOGIC

DTC No.	CONSULT screen terms (Trouble diagnosis content)	DTC detecting condition
P0014	EXH/V TIM CONT-B1 [Exhaust valve timing control performance (bank 1)]	There is a gap between angle of target and phase-control angle degree.
P0024	EXH/V TIM CONT-B2 [Exhaust valve timing control performance (bank 2)]	

POSSIBLE CAUSE

- Crankshaft position sensor
- Camshaft position sensor
- Exhaust valve timing control position sensor
- Exhaust valve timing control solenoid valve
- Accumulation of debris to the signal pick-up portion of the camshaft
- Timing chain installation
- Foreign matter caught in the oil groove for exhaust valve timing control

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is between 10 V and 16 V at idle.

DTC CONFIRMATION PROCEDURE

1.CHECK DTC PRIORITY

If DTC P0014 or P0024 is displayed with DTC P0078, P0084, P1078, or P1084, first perform the confirmation procedure (trouble diagnosis) for DTC P0078, P0084, P1078, or P1084.

Is applicable DTC detected?

YES >> Perform diagnosis of applicable.
- DTC P0078: Refer to EC-198, "DTC Description".
- DTC P0084: Refer to EC-198, "DTC Description".
- DTC P1078: Refer to EC-384, "DTC Description".
- DTC P1084: Refer to EC-384, "DTC Description".

NO >> GO TO 2.

2.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is between 10 V and 16 V at idle.

>> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE - 1

With CONSULT

1. Turn the ignition switch ON and select “DATA MONITOR” mode of “ENGINE” using CONSULT.
2. Warm engine up to the normal operating temperature.
3. Maintain the following conditions for at least 6 consecutive seconds. Hold the accelerator pedal as steady as possible.

cardiagn.com

ENG SPEED	500 – 2,000 rpm (A constant rotation is maintained)
COOLAN TEMP/S	More than 20°C (68°F)
Selector lever	P or N position

4. Let engine idle for 10 seconds.
5. Check 1st trip DTC.

With GST
Follow the procedure “With CONSULT” above.

Is 1st trip DTC detected?

YES >> Proceed to EC-185, "Diagnosis Procedure"
NO >> GO TO 4.

4. PERFORM DTC CONFIRMATION PROCEDURE - 2

With CONSULT
1. Select “DATA MONITOR” mode of “ENGINE” using CONSULT.
2. Maintain the following conditions for at least 20 consecutive seconds.

ENG SPEED	1,400 – 3,175 rpm (A constant rotation is maintained.)
COOLAN TEMP/S	More than 60°C (140°F)
Selector lever	1st or 2nd position
Driving location uphill	Driving vehicle uphill (Increased engine load will help maintain the driving conditions required for this test.)

CAUTION:
Always drive vehicle at a safe speed.

3. Check 1st trip DTC.

With GST
Follow the procedure “With CONSULT” above.

Is 1st trip DTC detected?

YES >> Proceed to EC-185, "Diagnosis Procedure".
NO-1 >> To check malfunction symptom before repair: Refer to GI-41, "Intermittent Incident".
NO-2 >> Confirmation after repair: INSPECTION END

Diagnosis Procedure

INFOID:0000000012406354

1. CHECK DTC PRIORITY

If DTC P0014 or P0024 is displayed with DTC P0078, P0084, P1078, or P1084, first perform the confirmation procedure (trouble diagnosis) for DTC P0078, P0084, P1078, or P1084.

Is applicable DTC detected?

YES >> Perform diagnosis of applicable.
- DTC P0078: Refer to EC-198, "DTC Description".
- DTC P0084: Refer to EC-198, "DTC Description".
- DTC P1078: Refer to EC-384, "DTC Description".
- DTC P1084: Refer to EC-384, "DTC Description".

NO >> GO TO 2.

2. CHECK ENGINE OIL PRESSURE WARNING LAMP


1. Start the engine.

cardiagn.com

2. Check that engine oil pressure warning lamp is not illuminated.

Is engine oil pressure warning lamp illuminated?

YES >> Proceed to LU-8, "Inspection".
NO >> GO TO 3.

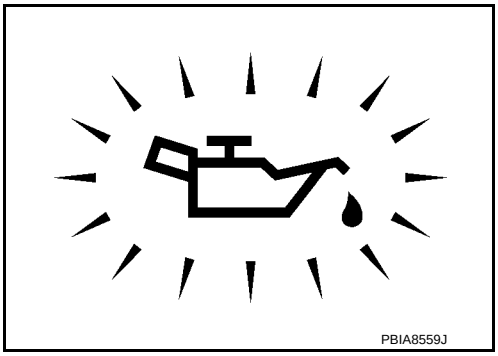
PBIA8559J

3. CHECK EXHAUST VALVE TIMING CONTROL SOLENOID VALVE

Check exhaust valve timing control solenoid valve. Refer to EC-189, "Component Inspection (Exhaust Valve Timing Control Solenoid Valve)".

Is the inspection result normal?

YES >> GO TO 4.
NO >> Replace malfunctioning exhaust valve timing control solenoid valve. Refer to EM-68, "Exploded View".

4. CHECK EXHAUST VALVE TIMING CONTROL POSITION SENSOR

Check exhaust valve timing control position sensor. Refer to EC-188, "Component Inspection (Exhaust Valve Timing Control Position Sensor)".

Is the inspection result normal?

YES >> GO TO 5.
NO >> Replace malfunctioning exhaust valve timing control position sensor. Refer to EM-68, "Exploded View".

5. CHECK CRANKSHAFT POSITION SENSOR

Check crankshaft position sensor. Refer to EC-187, "Component Inspection (Crankshaft Position Sensor)".

Is the inspection result normal?

YES >> GO TO 6.
NO >> Replace crankshaft position sensor. Refer to EM-39, "Exploded View".

6. CHECK CAMSHAFT POSITION SENSOR

Check camshaft position sensor. Refer to EC-187, "Component Inspection (Camshaft Position Sensor)".

Is the inspection result normal?


YES >> GO TO 7.
NO >> Replace malfunctioning camshaft position sensor. Refer to EM-87, "Exploded View".

7. CHECK CAMSHAFT (EXH)

Check the following.
- Accumulation of debris on the signal plate of camshaft rear end
- Chipping signal plate of camshaft rear end

Is the inspection result normal?

YES >> GO TO 8.
NO >> Remove debris and clean the signal plate of camshaft rear end or replace camshaft. Refer to EM-88, "Removal and Installation".

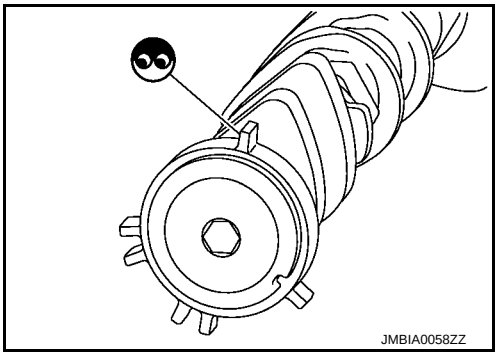
JMBIA0058ZZ

8. CHECK TIMING CHAIN INSTALLATION

Check service records for any recent repairs that may cause timing chain misaligned.

Are there any service records that may cause timing chain misaligned?

YES >> Check timing chain installation. Refer to EM-69, "Removal and Installation".

cardiagn.com

NO >> GO TO 9.

9. CHECK LUBRICATION CIRCUIT

Perform “Inspection of Camshaft Sprocket (EXT) Oil Groove”. Refer to EM-91, "Inspection".

Is the inspection result normal?

YES >> INSPECTION END
NO >> Clean lubrication line.

Component Inspection (Camshaft Position Sensor)


INFOID:0000000012406355

1. CHECK CAMSHAFT POSITION SENSOR (PHASE) - 1

1. Turn ignition switch OFF.
2. Loosen the fixing bolt of the sensor.
3. Disconnect camshaft position sensor (PHASE) harness connector.
4. Remove the sensor. Refer to EM-54, "Removal and Installation".
5. Visually check the sensor for chipping.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace malfunctioning camshaft position sensor (PHASE). Refer to EM-54, "Removal and Installation".

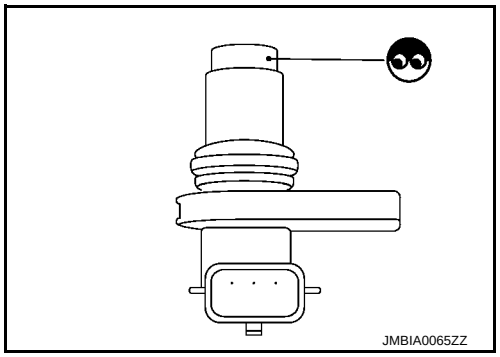

2. CHECK CAMSHAFT POSITION SENSOR (PHASE) - 2

Check resistance camshaft position sensor (PHASE) terminals as follows.

Crankshaft position sensor		Condition		Resistance
+	–			
Terminals				
1	2	Temperature	25°C (77°F)	Except 0 Ω or ∞
1	3			
2	3			

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning camshaft position sensor (PHASE). Refer to EM-54, "Removal and Installation".

Component Inspection (Crankshaft Position Sensor)

INFOID:0000000012406356

1. CHECK CRANKSHAFT POSITION SENSOR (POS) - 1


1. Turn ignition switch OFF.
2. Loosen the fixing bolt of the sensor.
3. Disconnect crankshaft position sensor (POS) harness connector.
4. Remove the sensor. Refer to EM-39, "Exploded View".

cardiagn.com

5. Visually check the sensor for chipping.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace crankshaft position sensor (POS). Refer to EM-39, "Exploded View".

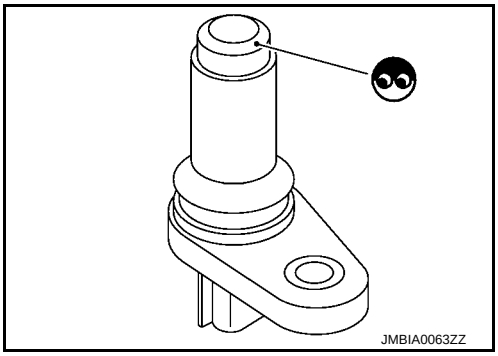

2.CHECK CRANKSHAFT POSITION SENSOR (POS) - 2

Check resistance between crankshaft position sensor (POS) terminals as follows.

Crankshaft position sensor		Condition		Resistance
+	–			
Terminals				
1	2	Temperature	25°C (77°F)	Except 0 Ω or ∞
1	3			
2	3			

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace crankshaft position sensor (POS). Refer to EM-39, "Exploded View".

Component Inspection (Exhaust Valve Timing Control Position Sensor)


INFOID:0000000012406357

1.EXHAUST VALVE TIMING CONTROL POSITION SENSOR - 1

1. Turn ignition switch OFF.
2. Disconnect exhaust valve timing control position sensor harness connector.
3. Loosen the fixing bolt of the sensor.
4. Remove the sensor. Refer to EM-54, "Exploded View".
5. Visually check the sensor for chipping.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace malfunctioning exhaust valve timing control position sensor. Refer to EM-54, "Exploded View".

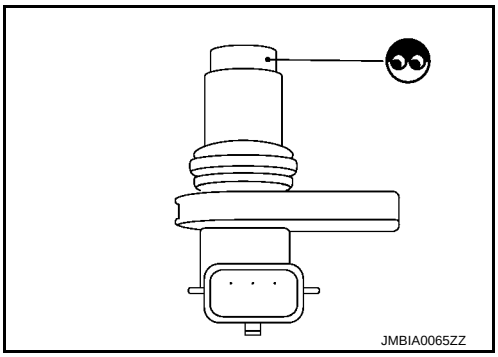

2.EXHAUST VALVE TIMING CONTROL POSITION SENSOR - 2

Check resistance exhaust valve timing control position sensor terminals as follows.

Exhaust valve timing control position sensor		Condition		Resistance
+	–			
Terminal				
1	2	Temperature	25°C (77°F)	Except 0 Ω or ∞ Ω
1	3			
2	3			

Is the inspection result normal?

cardiagn.com

YES >> INSPECTION END
NO >> Replace malfunctioning exhaust valve timing control position sensor. Refer to EM-54, "Exploded View".

Component Inspection (Exhaust Valve Timing Control Solenoid Valve)

INFOID:0000000012406358

1. CHECK EXHAUST VALVE TIMING CONTROL SOLENOID VALVE - 1

1. Turn ignition switch OFF.
2. Disconnect exhaust valve timing control solenoid valve harness connector.
3. Check resistance between exhaust valve timing control solenoid valve terminals as follows.

Exhaust valve timing control solenoid valve		Condition		Resistance
+	–			
Terminal				
1	2	Temperature	20°C (68°F)	7.0 – 7.8 Ω
1	Ground			∞ (Continuity should not exist)
2				


Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace malfunctioning exhaust valve timing control solenoid valve. Refer to EM-68, "Exploded View".

2. CHECK EXHAUST VALVE TIMING CONTROL SOLENOID VALVE - 2

1. Remove intake valve timing control solenoid valve. Refer to EM-68, "Exploded View".
2. Apply 12 V between exhaust valve timing control solenoid valve terminals 1 and 2, and then interrupt it. Check that the plunger moves as shown in the figure.

CAUTION:
Never apply 12 V continuously for 5 seconds or more. Doing so may result in damage to the coil in exhaust valve timing control solenoid valve.
NOTE:
Always replace O-ring when exhaust valve timing control solenoid valve is removed.

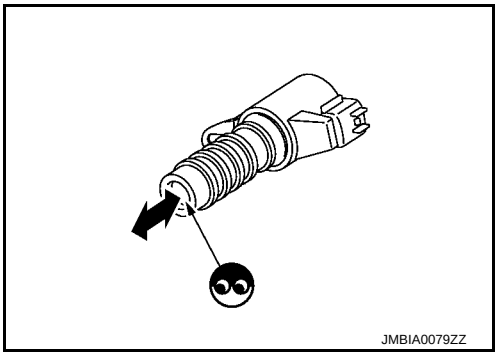

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning exhaust valve timing control solenoid valve. Refer to EM-68, "Exploded View".

cardiagn.com

P0030, P0031, P0032, P0036, P0051, P0052 A/F SENSOR 1 HEATER

DTC Logic

INFOID:0000000012406359

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0030	Air fuel ratio (A/F) sensor 1 heater (bank 1) performance	Deterioration in A/F sensor 1 heater performance. (Voltage signal transmitted from A/F sensor 1 heater to ECM is higher/lower than voltage in the normal range.)	• Harness or connectors (The A/F sensor 1 heater circuit is open or shorted.) • A/F sensor 1 heater
P0031	Air fuel ratio (A/F) sensor 1 heater (bank 1) control circuit low	The current amperage in the A/F sensor 1 heater circuit is out of the normal range. (An excessively low voltage signal is sent to ECM through the A/F sensor 1 heater.)	• Harness or connectors (The A/F sensor 1 heater circuit is open or shorted.) • A/F sensor 1 heater
P0032	Air fuel ratio (A/F) sensor 1 heater (bank 1) control circuit high	The current amperage in the A/F sensor 1 heater circuit is out of the normal range. (An excessively high voltage signal is sent to ECM through the A/F sensor 1 heater.)	• Harness or connectors (The A/F sensor 1 heater circuit is shorted.) • A/F sensor 1 heater
P0036	Air fuel ratio (A/F) sensor 1 heater (bank 2) performance	Deterioration in A/F sensor 1 heater performance. (Voltage signal transmitted from A/F sensor 1 heater to ECM is higher/lower than voltage in the normal range.)	• Harness or connectors (The A/F sensor 1 heater circuit is open or shorted.) • A/F sensor 1 heater
P0051	Air fuel ratio (A/F) sensor 1 heater (bank 2) control circuit low	The current amperage in the A/F sensor 1 heater circuit is out of the normal range. (An excessively low voltage signal is sent to ECM through the A/F sensor 1 heater.)	• Harness or connectors (The A/F sensor 1 heater circuit is open or shorted.) • A/F sensor 1 heater
P0052	Air fuel ratio (A/F) sensor 1 heater (bank 2) control circuit high	The current amperage in the A/F sensor 1 heater circuit is out of the normal range. (An excessively high voltage signal is sent to ECM through the A/F sensor 1 heater.)	• Harness or connectors (The A/F sensor 1 heater circuit is shorted.) • A/F sensor 1 heater

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 11 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for at least 10 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-190, "Diagnosis Procedure".
NG >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406360

1.CHECK AIR FUEL RATIO (A/F) SENSOR 1 POWER SUPPLY

1. Disconnect air fuel ratio (A/F) sensor 1 harness connector.
2. Turn ignition switch ON.
3. Check the voltage between A/F sensor 1 harness connector and ground.

cardiagn.com

DTC	A/F sensor 1			Ground	Voltage
	Bank	Connector	Terminal		
P0030, P0031, P0032	1	F28	1	Ground	Battery voltage
P0036, P0051, P0052	2	F65	1		

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2.CHECK AIR FUEL RATIO (A/F) SENSOR 1 POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Check the continuity between A/F sensor 1 harness connector and IPDM E/R harness connector.

DTC	A/F sensor 1			IPDM E/R		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0030, P0031, P0032	1	F28	1	F12	57	Existed
P0036, P0051, P0052	2	F65	1			

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

3.CHECK A/F SENSOR 1 HEATER OUTPUT SIGNAL CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check harness continuity between A/F sensor 1 harness connector and ECM harness connector.

DTC	A/F sensor 1			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0030, P0031, P0032	1	F28	2	F14	6	Existed
P0036, P0051, P0052	2	F65	2		46	

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK A/F SENSOR 1 HEATER

Check A/F sensor 1 heater. Refer to EC-191, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace malfunctioning air fuel ratio (A/F) sensor 1. Refer to EM-34, "Exploded View".

Component Inspection

INFOID:0000000012406361

1.CHECK AIR FUEL RATIO (A/F) SENSOR 1

Check resistance between A/F sensor terminals as per the following.

Terminal No.	Resistance
2 and 1	1.8 - 2.44 Ω [at 25°C (77°F)]
2 and 3, 4	∞ Ω (Continuity should not exist)
1 and 3, 4	

Is the inspection result normal?

cardiagn.com

YES >> INSPECTION END
NO >> Replace malfunctioning air fuel ratio (A/F) sensor 1. Refer to EM-34, "Exploded View".

cardiagn.com

P0037, P0038, P0057, P0058 HO2S2 HEATER

DTC Logic

INFOID:0000000012406362

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0037	Heated oxygen sensor 2 heater (bank 1) control circuit low	The current amperage in the heated oxygen sensor 2 heater circuit is out of the normal range. (An excessively low voltage signal is sent to ECM through the heated oxygen sensor 2 heater.)	• Harness or connectors (The heated oxygen sensor 2 heater circuit is open or shorted.) • Heated oxygen sensor 2 heater
P0038	Heated oxygen sensor 2 heater (bank 1) control circuit high	The current amperage in the heated oxygen sensor 2 heater circuit is out of the normal range. (An excessively high voltage signal is sent to ECM through the heated oxygen sensor 2 heater.)	• Harness or connectors (The heated oxygen sensor 2 heater circuit is shorted.) • Heated oxygen sensor 2 heater
P0057	Heated oxygen sensor 2 heater (bank 2) control circuit low	The current amperage in the heated oxygen sensor 2 heater circuit is out of the normal range. (An excessively low voltage signal is sent to ECM through the heated oxygen sensor 2 heater.)	• Harness or connectors (The heated oxygen sensor 2 heater circuit is open or shorted.) • Heated oxygen sensor 2 heater
P0058	Heated oxygen sensor 2 heater (bank 2) control circuit high	The current amperage in the heated oxygen sensor 2 heater circuit is out of the normal range. (An excessively high voltage signal is sent to ECM through the heated oxygen sensor 2 heater.)	• Harness or connectors (The heated oxygen sensor 2 heater circuit is shorted.) • Heated oxygen sensor 2 heater
P0141	Heated oxygen sensor 2 heater (bank 1) circuit	The current amperage in the heated oxygen sensor 2 heater circuit is out of the normal range. (An excessively high voltage signal is sent to ECM through the heated oxygen sensor 2 heater.)	• Harness or connectors (The heated oxygen sensor 2 heater circuit is shorted.) • Heated oxygen sensor 2 heater • ECM
P0161	Heated oxygen sensor 2 heater (bank 2) circuit	The current amperage in the heated oxygen sensor 2 heater circuit is out of the normal range. (An excessively high voltage signal is sent to ECM through the heated oxygen sensor 2 heater.)	• Harness or connectors (The heated oxygen sensor 2 heater circuit is shorted.) • Heated oxygen sensor 2 heater • ECM

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is between 10.5 V and 16 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and warm it up to the normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
6. Let engine idle for 1 minute.
7. Check 1st trip DTC.

Is 1st tip DTC detected?

YES >> Proceed to EC-194, "Diagnosis Procedure".
NO >> INSPECTION END

cardiagn.com

Diagnosis Procedure

INFOID:0000000012406363

1.CHECK HO2S2 POWER SUPPLY

1. Disconnect heated oxygen sensor 2 (HO2S2) harness connector.
2. Turn ignition switch ON.
3. Check the voltage between HO2S2 harness connector and ground.

DTC	HO2S2			Ground	Voltage
	Bank	Connector	Terminal		
P0037, P0038	1	F86	1	Ground	Battery voltage
P0057, P0058	2	F85	1		

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2.CHECK HO2S2 SENSOR 1 POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Check the continuity between HO2S2 harness connector and IPDM E/R harness connector.

DTC	HO2S2			IPDM E/R		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0037, P0038	1	F86	1	F12	56	Existed
P0057, P0058	2	F85	1			

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

3.CHECK HO2S2 HEATER OUTPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between HO2S2 harness connector and ECM harness connector.

DTC	HO2S2			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0037, P0038	1	F86	2	F14	7	Existed
P0057, P0058	2	F85	2		47	

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK HEATED OXYGEN SENSOR 2 HEATER

Check heated oxygen sensor 2 heater. Refer to EC-194, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace malfunctioning heated oxygen sensor 2. Refer to EM-34, "Exploded View".

Component Inspection

INFOID:0000000012406364

1.CHECK HEATED OXYGEN SENSOR 2 HEATER

Check resistance between HO2S2 terminals as per the following.

cardiagn.com

Terminal No.	Resistance (Approx.)
1 and 2	3.0 Ω [at 25°C (77°F)]
3 and 1, 2, 4	∞ Ω (Continuity should not exist)
4 and 1, 2, 3	

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning heated oxygen sensor 2. Refer to EM-34, "Exploded View".

cardiagn.com

P0075, P0081 IVT CONTROL SOLENOID VALVE

DTC Logic

INFOID:0000000012406365

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0075	Intake valve timing control solenoid valve (bank 1) circuit	An improper voltage is sent to the ECM through intake valve timing control solenoid valve.	• Harness or connectors (Intake valve timing control solenoid valve circuit is open or shorted.) • Intake valve timing control solenoid valve
P0081	Intake valve timing control solenoid valve (bank 2) circuit		

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for 5 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-196, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406366

1.CHECK INTAKE VALVE TIMING CONTROL SOLENOID VALVE POWER SUPPLY

1. Turn ignition switch OFF.
2. Disconnect intake valve timing (IVT) control solenoid valve harness connector.
3. Turn ignition switch ON.
4. Check the voltage between intake valve timing control solenoid valve harness connector and ground with CONSULT or tester.

DTC	IVT control solenoid valve			Ground	Voltage
	Bank	Connector	Terminal		
P0075	1	F51	1	Ground	Battery voltage
P0081	2	F52	1		

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

2.CHECK INTAKE VALVE TIMING CONTROL SOLENOID VALVE OUTPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between intake valve timing control solenoid valve harness connector and ECM harness connector.

cardiagn.com

DTC	IVT control solenoid valve			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0075	1	F51	2	F15	117	Existed
P0081	2	F52	2		119	

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

3. CHECK INTAKE VALVE TIMING CONTROL SOLENOID VALVE

Check intake valve timing control solenoid valve. Refer to EC-197, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace malfunctioning intake valve timing control solenoid valve. Refer to EM-68, "Exploded View".

Component Inspection

INFOID:0000000012406367

1. CHECK INTAKE VALVE TIMING CONTROL SOLENOID VALVE-I

1. Disconnect intake valve timing control solenoid valve harness connector.
2. Check resistance between intake valve timing control solenoid valve terminals as per the following.

Terminals	Resistance
1 and 2	7.0 - 7.8 Ω [at 20°C (68°F)]
1 or 2 and ground	∞Ω (Continuity should not exist)


Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace malfunctioning intake valve timing control solenoid valve. Refer to EM-68, "Exploded View".

2. CHECK INTAKE VALVE TIMING CONTROL SOLENOID VALVE-II

1. Remove intake valve timing control solenoid valve. Refer to EM-68, "Exploded View".
2. Provide 12 V DC between intake valve timing control solenoid valve terminals 1 and 2, and then interrupt it. Check that the plunger moves as shown in the figure.

CAUTION:
Never apply 12 V DC continuously for 5 seconds or more. Doing so may result in damage to the coil in intake valve timing control solenoid valve.
NOTE:
Always replace O-ring when intake valve timing control solenoid valve is removed.

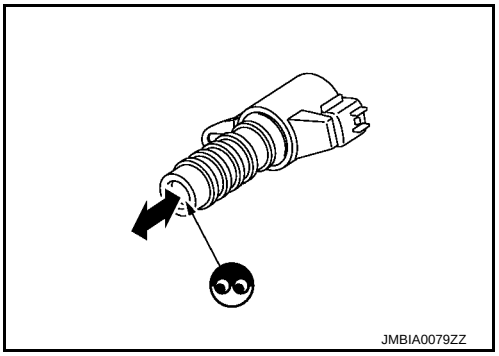

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning intake valve timing control solenoid valve. Refer to EM-68, "Exploded View".

cardiagn.com

P0078, P0084 EVT CONTROL SOLENOID VALVE

DTC Description

INFOID:0000000012406368

DTC DETECTION LOGIC

DTC No.	CONSULT screen terms (Trouble diagnosis content)	DTC detecting condition
P0078	EX V/T ACT/CIRC-B1 [Exhaust valve timing control solenoid valve (bank 1) circuit]	An improper voltage is sent to the ECM through exhaust valve timing control solenoid valve.
P0084	EX V/T ACT/CIRC-B2 [Exhaust valve timing control solenoid valve (bank 2) circuit]	

POSSIBLE CAUSE

- Harness or connectors (Exhaust valve timing control solenoid valve circuit is open or shorted.)
- Exhaust valve timing control solenoid valve

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start the engine and let it idle for 5 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-198, "Diagnosis Procedure".
NO-1 >> To check malfunction symptom before repair: Refer to GI-41, "Intermittent Incident".
NO-2 >> Confirmation after repair: INSPECTION END

Diagnosis Procedure

INFOID:0000000012406369

1.CHECK EXHAUST VALVE TIMING CONTROL SOLENOID VALVE POWER SUPPLY CIRCUIT - 1

1. Turn ignition switch OFF.
2. Disconnect exhaust valve timing control solenoid valve harness connector.
3. Turn ignition switch ON.
4. Check the voltage between exhaust valve timing control solenoid valve harness connector and ground.

DTC	+			–	Voltage
	Exhaust valve timing control solenoid valve				
	Bank	Connector	Terminal		
P0078	1	F48	1	Ground	Battery voltage
P0084	2	F49	1		

Is the inspection result normal?

YES >> GO TO 2.
NO >> GO TO 4.

2.CHECK EVT CONTROL SOLENOID VALVE OUTPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.

cardiagn.com

2. Disconnect ECM harness connector.
3. Check the continuity between exhaust valve timing control solenoid valve harness connector and ECM harness connector.

DTC	+			–		Continuity
	Exhaust valve timing control solenoid valve			ECM		
	Bank	Connector	Terminal	Connector	Terminal	
P0078	1	F48	2	F15	58	Existed
P0084	2	F49	2		60	

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

3.CHECK EXHAUST VALVE TIMING CONTROL SOLENOID VALVE

Check exhaust valve timing control solenoid valve. Refer to EC-199, "Component Inspection (Exhaust Valve Timing Control Solenoid Valve)".

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning exhaust valve timing control solenoid valve. Refer to EM-68, "Exploded View".

4.CHECK EXHAUST VALVE TIMING CONTROL SOLENOID VALVE POWER SUPPLY CIRCUIT - 2

1. Check the continuity between ECM harness connector and exhaust valve timing control solenoid valve harness connector.

DTC	+		–		Continuity
	ECM		Exhaust valve timing control solenoid valve		
	Connector	Terminal	Connector	Terminal	
P0075	F14	51	F48	1	Existed
P0081			F49		Existed

2. Also check harness for short to ground.

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

Component Inspection (Exhaust Valve Timing Control Solenoid Valve)

INFOID:0000000012406370

1.CHECK EXHAUST VALVE TIMING CONTROL SOLENOID VALVE - 1

1. Turn ignition switch OFF.
2. Disconnect exhaust valve timing control solenoid valve harness connector.
3. Check resistance between exhaust valve timing control solenoid valve terminals as follows.

Exhaust valve timing control solenoid valve		Condition		Resistance
+	–			
Terminal				
1	2	Temperature	20°C (68°F)	7.0 – 7.8 Ω
1	Ground			∞ (Continuity should not exist)
2				

Is the inspection result normal?


cardiagn.com

YES >> GO TO 2.
NO >> Replace malfunctioning exhaust valve timing control solenoid valve. Refer to EM-68, "Exploded View".

2. CHECK EXHAUST VALVE TIMING CONTROL SOLENOID VALVE - 2

1. Remove exhaust valve timing control solenoid valve. Refer to EM-68, "Exploded View".
2. Apply 12 V between exhaust valve timing control solenoid valve terminals 1 and 2, and then interrupt it. Check that the plunger moves as shown in the figure.

CAUTION:
Never apply 12 V continuously for 5 seconds or more. Doing so may result in damage to the coil in exhaust valve timing control solenoid valve.
NOTE:
Always replace O-ring when exhaust valve timing control solenoid valve is removed.

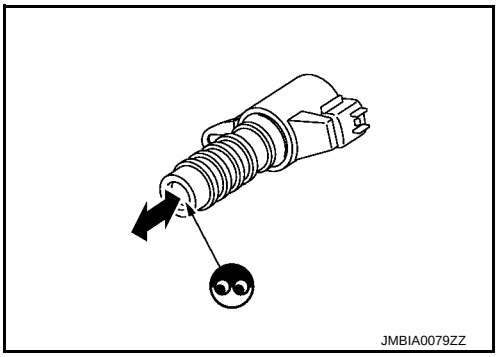

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning exhaust valve timing control solenoid valve. Refer to EM-68, "Exploded View".

cardiagn.com

P0101 MAF SENSOR

DTC Logic

INFOID:0000000012406371

DTC DETECTION LOGIC

NOTE:
If DTC P0101 is displayed with other DTC, first perform the trouble diagnosis for other DTC.

DTC No.	Trouble diagnosis (Trouble diagnosis content)	DTC detecting condition	Possible cause
P0101	MAF SEN/CIRCUIT-B1 [Mass air flow (MAF) sensor circuit range/performance]	• A high voltage from the sensor is sent to ECM under light load driving condition. • A low voltage from the sensor is sent to ECM under heavy load driving condition.	• Harness or connectors (The sensor circuit is open or shorted.) • Intake air leaks • MAF sensor • EVAP control system pressure sensor • Intake air temperature sensor

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC CONFIRMATION PROCEDURE has been previously conducted, always perform the following procedure before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and warm it up to normal operating temperature.
2. Drive the vehicle for at least 5 seconds under the following conditions:
   CAUTION:
   Always drive vehicle at safe speed.

Selector lever	Suitable position
Vehicle speed	40 km/h (25 MPH) or more

   NOTE:
   • The gear must be fixed while driving the vehicle.
   • Keep the accelerator pedal as steady as possible during cruising.
3. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-201, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406372

1.CHECK INTAKE SYSTEM

Check the following for connection.
• Air duct
• Vacuum hoses
• Intake air passage between air duct and intake manifold

Is the inspection result normal?

YES >> GO TO 2.
NO >> Reconnect the parts.

2.CHECK MASS AIR FLOW (MAF) SENSOR POWER SUPPLY

cardiagn.com

1. Disconnect MAF sensor harness connector.
2. Turn ignition switch ON.
3. Check the voltage between MAF sensor harness connector and ground.

MAF sensor		Ground	Voltage
Connector	Terminal		
F68	1	Ground	Approx. 5 V

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 3.

3. CHECK MASS AIR FLOW (MAF) SENSOR POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM sensor harness connector.
3. Check the continuity between MAF sensor harness connector and ECM harness connector.

MAF sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F68	1	F14	28	Existed

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Repair or replace error-detected parts.

4. CHECK MAF SENSOR GROUND CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between MAF sensor harness connector and ECM harness connector.

MAF sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F68	2	F14	40	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit or short to ground or short to power in harness or connectors.

5. CHECK MAF SENSOR INPUT SIGNAL CIRCUIT

1. Check the continuity between MAF sensor harness connector and ECM harness connector.

MAF sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F68	3	F14	38	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair open circuit or short to ground or short to power in harness or connectors.

6. CHECK INTAKE AIR TEMPERATURE SENSOR

Check intake air temperature sensor. Refer to EC-203, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 7.
NO >> Replace MAF sensor (with intake air temperature sensor). Refer to EM-27, "Exploded View".

cardiagn.com

7. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR

Check EVAP control system pressure sensor. Refer to EC-333, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 8.
NO >> Replace EVAP control system pressure sensor.

8. CHECK MAF SENSOR

Check MAF sensor. Refer to EC-203, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace MAF sensor. Refer to EM-27, "Exploded View".

Component Inspection

INFOID:0000000012406373

1. CHECK MASS AIR FLOW (MAF) SENSOR-I

With CONSULT

1. Turn ignition switch OFF.
2. Reconnect all harness connectors disconnected.
3. Start engine and warm it up to normal operating temperature.
4. Connect CONSULT and select “DATA MONITOR” mode.
5. Select “MASS AIR FLOW SENSOR (Hz)” and check the indication.

Monitor item	Condition	Indication (Hz)
MASS AIR FLOW SENSOR (Hz)	Ignition switch ON (Engine stopped.)	Approx. 3,720 Hz
	Idle (Engine is warmed-up to normal operating temperature.)	4,100 – 4,700 Hz
	Idle to about 4,000 rpm	4,100 – 4,700 to Approx. 8,000 Hz*

*: Check for linear frequency rise in response to engine being increased to about 4,000 rpm.

Without CONSULT

1. Turn ignition switch OFF.
2. Reconnect all harness connectors disconnected.
3. Start engine and warm it up to normal operating temperature.
4. Check the frequency between ECM harness connector terminals under the following conditions.

ECM			Condition	Frequency (Hz)
Connector	+	–		
	Terminal			
F14	38	40	Ignition switch ON (Engine stopped.)	Approx. 3,720 Hz
			Idle (Engine is warmed-up to normal operating temperature.)	4,100 – 4,700 Hz
			Idle to about 4,000 rpm	4,100 – 4,700 to Approx. 8,000 Hz*

*: Check for linear frequency rise in response to engine being increased to about 4,000 rpm.

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 2.

2. CHECK FOR THE CAUSE OF UNEVEN AIR FLOW THROUGH MAF SENSOR

1. Turn ignition switch OFF.
2. Check for the cause of uneven air flow through MAF sensor. Refer to the following.

- Crushed air ducts
- Malfunctioning seal of air cleaner element
- Uneven dirt of air cleaner element
- Improper specification of intake air system parts

Is the inspection result normal?

cardiagn.com

YES >> GO TO 4.
NO >> GO TO 3.

3. CHECK MAF SENSOR-II

With CONSULT
1. Repair or replace malfunctioning part.
2. Start engine and warm it up to normal operating temperature.
3. Connect CONSULT and select “DATA MONITOR” mode.
4. Select “MASS AIR FLOW SENSOR (Hz)” and check the indication.

Monitor item	Condition	Indication (Hz)
MASS AIR FLOW SENSOR (Hz)	Ignition switch ON (Engine stopped.)	Approx. 3,720 Hz
	Idle (Engine is warmed-up to normal operating temperature.)	4,100 – 4,700 Hz
	Idle to about 4,000 rpm	4,100 – 4,700 to Approx. 8,000 Hz*

*: Check for linear frequency rise in response to engine being increased to about 4,000 rpm.

Without CONSULT
1. Repair or replace malfunctioning part.
2. Start engine and warm it up to normal operating temperature.
3. Check the frequency between ECM harness connector terminals under the following conditions.

ECM			Condition	Frequency (Hz)
Connector	+	–		
	Terminal			
F14	38	40	Ignition switch ON (Engine stopped.)	Approx. 3,720 Hz
			Idle (Engine is warmed-up to normal operating temperature.)	4,100 – 4,700 Hz
			Idle to about 4,000 rpm	4,100 – 4,700 to Approx. 8,000 Hz*

*: Check for linear frequency rise in response to engine being increased to about 4,000 rpm.

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 4.

4. CHECK MAF SENSOR-III

With CONSULT
1. Turn ignition switch OFF.
2. Disconnect MAF sensor harness connector and reconnect it again.
3. Start engine and warm it up to normal operating temperature.
4. Connect CONSULT and select “DATA MONITOR” mode.
5. Select “MASS AIR FLOW SENSOR (Hz)” and check the indication.

Monitor item	Condition	Indication (Hz)
MASS AIR FLOW SENSOR (Hz)	Ignition switch ON (Engine stopped.)	Approx. 3,720 Hz
	Idle (Engine is warmed-up to normal operating temperature.)	4,100 – 4,700 Hz
	Idle to about 4,000 rpm	4,100 – 4,700 to Approx. 8,000 Hz*

*: Check for linear frequency rise in response to engine being increased to about 4,000 rpm.

Without CONSULT
1. Turn ignition switch OFF.
2. Disconnect MAF sensor harness connector and reconnect it again.
3. Start engine and warm it up to normal operating temperature.
4. Check the frequency between ECM harness connector terminals under the following conditions.

cardiagn.com

ECM			Condition	Frequency (Hz)
Connector	+	–		
	Terminal			
F14	38	40	Ignition switch ON (Engine stopped.)	Approx. 3,720 Hz
			Idle (Engine is warmed-up to normal operating temperature.)	4,100 – 4,700 Hz
			Idle to about 4,000 rpm	4,100 – 4,700 to Approx. 8,000 Hz*

*: Check for linear frequency rise in response to engine being increased to about 4,000 rpm.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Clean or replace MAF sensor. Refer to EM-27, "Removal and Installation".

cardiagn.com

P0102, P0103 MAF SENSOR

DTC Logic

INFOID:0000000012406374

DTC DETECTION LOGIC

NOTE:
If DTC P0102 or P0103 is displayed with DTC P0643, first perform the trouble diagnosis for DTC P0643. Refer to EC-379, "DTC Logic".

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0102	Mass air flow sensor circuit low input	An excessively low voltage from the sensor is sent to ECM.	• Harness or connectors (The sensor circuit is open or shorted.) • Intake air leakage • Mass air flow sensor
P0103	Mass air flow sensor circuit high input	An excessively high voltage from the sensor is sent to ECM.	• Harness or connectors (The sensor circuit is open or shorted.) • Mass air flow sensor

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

Which DTC is detected?

P0102 >> GO TO 2.
P0103 >> GO TO 3.

2.PERFORM DTC CONFIRMATION PROCEDURE FOR DTC P0102

1. Start engine and wait at least 5 seconds.
2. Check DTC.

Is DTC detected?

YES >> Proceed to EC-206, "Diagnosis Procedure".
NO >> INSPECTION END

3.PERFORM DTC CONFIRMATION PROCEDURE FOR DTC P0103-I

1. Turn ignition switch ON and wait at least 5 seconds.
2. Check DTC.

Is DTC detected?

YES >> Proceed to EC-206, "Diagnosis Procedure".
NO >> GO TO 4.

4.PERFORM DTC CONFIRMATION PROCEDURE FOR DTC P0103-II

1. Start engine and wait at least 5 seconds.
2. Check DTC.

Is DTC detected?

YES >> Proceed to EC-206, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406375

1.INSPECTION START

Confirm the detected DTC.

Which DTC is detected?

P0102 >> GO TO 2.

cardiagn.com

P0103 >> GO TO 3.

2.CHECK INTAKE SYSTEM

Check the following for connection.
- Air duct
- Vacuum hoses
- Intake air passage between air duct to intake manifold

Is the inspection result normal?

YES >> GO TO 3.
NO >> Reconnect the parts.

3.CHECK MAF SENSOR POWER SUPPLY

1. Disconnect mass air flow (MAF) sensor harness connector.
2. Turn ignition switch ON.
3. Check the voltage between MAF sensor harness connector and ground.

MAF sensor		Ground	Voltage (V)
Connector	Terminal		
F68	1	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 5.
NO >> GO TO 4.

4.CHECK MAF SENSOR POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between MAF sensor harness connector and ECM harness connector.

MAF sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F68	1	F14	28	Existed

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Repair or replace error-detected parts.

5.CHECK MAF SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between MAF sensor harness connector and ECM harness connector.

MAF sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F68	2	F14	40	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

6.CHECK MAF SENSOR INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between MAF sensor harness connector and ECM harness connector.

MAF sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F68	3	F14	38	Existed

2. Also check harness for short to ground and short to power.

cardiagn.com

Is the inspection result normal?

YES >> GO TO 7.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

7. CHECK MASS AIR FLOW SENSOR

Check mass air flow sensor. Refer to EC-208, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace mass air flow sensor. Refer to EM-27, "Exploded View".

Component Inspection

INFOID:0000000012406376

1. CHECK MASS AIR FLOW (MAF) SENSOR-I

With CONSULT

1. Turn ignition switch OFF.
2. Reconnect all harness connectors disconnected.
3. Start engine and warm it up to normal operating temperature.
4. Connect CONSULT and select “DATA MONITOR” mode.
5. Select “MASS AIR FLOW SENSOR (Hz)” and check the indication.

Monitor item	Condition	Indication (Hz)
MASS AIR FLOW SENSOR (Hz)	Ignition switch ON (Engine stopped.)	Approx. 3,720 Hz
	Idle (Engine is warmed-up to normal operating temperature.)	4,100 – 4,700 Hz
	Idle to about 4,000 rpm	4,100 – 4,700 to Approx. 8,000 Hz*

*: Check for linear frequency rise in response to engine being increased to about 4,000 rpm.

Without CONSULT

1. Turn ignition switch OFF.
2. Reconnect all harness connectors disconnected.
3. Start engine and warm it up to normal operating temperature.
4. Check the frequency between ECM harness connector terminals under the following conditions.

ECM			Condition	Frequency (Hz)
Connector	+	–		
	Terminal			
F14	38	40	Ignition switch ON (Engine stopped.)	Approx. 3,720 Hz
			Idle (Engine is warmed-up to normal operating temperature.)	4,100 – 4,700 Hz
			Idle to about 4,000 rpm	4,100 – 4,700 to Approx. 8,000 Hz*

*: Check for linear frequency rise in response to engine being increased to about 4,000 rpm.

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 2.

2. CHECK FOR THE CAUSE OF UNEVEN AIR FLOW THROUGH MAF SENSOR

1. Turn ignition switch OFF.
2. Check for the cause of uneven air flow through MAF sensor. Refer to the following.

- Crushed air ducts
- Malfunctioning seal of air cleaner element
- Uneven dirt of air cleaner element
- Improper specification of intake air system parts

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 3.

cardiagn.com

3. CHECK MAF SENSOR-II

With CONSULT
1. Repair or replace malfunctioning part.
2. Start engine and warm it up to normal operating temperature.
3. Connect CONSULT and select “DATA MONITOR” mode.
4. Select “MASS AIR FLOW SENSOR (Hz)” and check the indication.

Monitor item	Condition	Indication (Hz)
MASS AIR FLOW SENSOR (Hz)	Ignition switch ON (Engine stopped.)	Approx. 3,720 Hz
	Idle (Engine is warmed-up to normal operating temperature.)	4,100 – 4,700 Hz
	Idle to about 4,000 rpm	4,100 – 4,700 to Approx. 8,000 Hz*

*: Check for linear frequency rise in response to engine being increased to about 4,000 rpm.

Without CONSULT
1. Repair or replace malfunctioning part.
2. Start engine and warm it up to normal operating temperature.
3. Check the frequency between ECM harness connector terminals under the following conditions.

ECM			Condition	Frequency (Hz)
Connector	+	–		
	Terminal			
F14	38	40	Ignition switch ON (Engine stopped.)	Approx. 3,720 Hz
			Idle (Engine is warmed-up to normal operating temperature.)	4,100 – 4,700 Hz
			Idle to about 4,000 rpm	4,100 – 4,700 to Approx. 8,000 Hz*

*: Check for linear frequency rise in response to engine being increased to about 4,000 rpm.

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 4.

4. CHECK MAF SENSOR-III

With CONSULT
1. Turn ignition switch OFF.
2. Disconnect MAF sensor harness connector and reconnect it again.
3. Start engine and warm it up to normal operating temperature.
4. Connect CONSULT and select “DATA MONITOR” mode.
5. Select “MASS AIR FLOW SENSOR (Hz)” and check the indication.

Monitor item	Condition	Indication (Hz)
MASS AIR FLOW SENSOR (Hz)	Ignition switch ON (Engine stopped.)	Approx. 3,720 Hz
	Idle (Engine is warmed-up to normal operating temperature.)	4,100 – 4,700 Hz
	Idle to about 4,000 rpm	4,100 – 4,700 to Approx. 8,000 Hz*

*: Check for linear frequency rise in response to engine being increased to about 4,000 rpm.

Without CONSULT
1. Turn ignition switch OFF.
2. Disconnect MAF sensor harness connector and reconnect it again.
3. Start engine and warm it up to normal operating temperature.
4. Check the frequency between ECM harness connector terminals under the following conditions.

cardiagn.com

ECM			Condition	Frequency (Hz)
Connector	+	–		
	Terminal			
F14	38	40	Ignition switch ON (Engine stopped.)	Approx. 3,720 Hz
			Idle (Engine is warmed-up to normal operating temperature.)	4,100 – 4,700 Hz
			Idle to about 4,000 rpm	4,100 – 4,700 to Approx. 8,000 Hz*

*: Check for linear frequency rise in response to engine being increased to about 4,000 rpm.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Clean or replace MAF sensor. Refer to EM-27, "Removal and Installation".

cardiagn.com

P0111 IAT SENSOR

DTC Logic

INFOID:0000000012406377

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis (Trouble diagnosis content)	DTC detecting condition	Possible cause
P0111	IAT SENSOR 1 B1 [Intake air temperature (IAT) sensor circuit range/performance]	The comparison result of signals transmitted to ECM from each temperature sensor (IAT sensor, ECT sensor, FTT sensor, and EOT sensor) shows that the voltage signal of the IAT sensor is higher/lower than that of other temperature sensors when the engine is started with its cold state.	• Harness or connectors (High or low resistance in the IAT sensor circuit) • IAT sensor

DTC CONFIRMATION PROCEDURE

1.INSPECTION START

Is it necessary to erase permanent DTC?

YES >> GO TO 3.
NO >> GO TO 2.

2.PERFORM COMPONENT FUNCTION CHECK

Perform component function check. Refer to EC-212, "Component Function Check".

NOTE:
Use the component function check to check the overall function of the IAT sensor circuit. During this check, a 1st trip DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-212, "Diagnosis Procedure".

3.PRECONDITIONING

If DTC CONFIRMATION PROCEDURE has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

- **Before performing the following procedure, do not add fuel.**
- **Before performing the following procedure, check that fuel level is between 1/4 and 4/4.**
- **Before performing the following procedure, confirm that battery voltage is 11 V or more at idle.**

>> GO TO 4.

4.PERFORM DTC CONFIRMATION PROCEDURE

1. Move the vehicle to a cool place.
   NOTE:
   Cool the vehicle in an environment of ambient air temperature between –10°C (14°F) and 35°C (95°F).
2. Turn ignition switch OFF and leave the vehicle for 12 hours.
   CAUTION:
   Never turn ignition switch ON during this procedure.
   NOTE:
   The vehicle must be cooled with the hood open.
3. Start engine and let it idle for 5 minutes or more.
   CAUTION:
   Never turn ignition switch OFF during idling.
4. Check 1st trip DTC.

cardiagn.com

Is 1st trip DTC detected?

YES >> Proceed to EC-212, "Diagnosis Procedure".
NO >> INSPECTION END

Component Function Check

INFOID:0000000012406378

1. CHECK INTAKE AIR TEMPERATURE (IAT) SENSOR

1. Turn ignition switch OFF.
2. Disconnect mass air flow sensor harness connector.
3. Check resistance between mass air flow sensor terminals as follows.

Terminals	Condition		Resistance (kΩ)
1 and 2	Temperature [°C (°F)]	25 (77)	1,800 – 2,200

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Proceed to EC-212, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406379

1. CHECK INTAKE AIR TEMPERATURE (IAT) SENSOR

Check intake air temperature sensor. Refer to EC-212, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace mass air flow sensor (with intake air temperature sensor). Refer to EM-27, "Exploded View".

Component Inspection

INFOID:0000000012406380

1. CHECK INTAKE AIR TEMPERATURE (IAT) SENSOR

1. Turn ignition switch OFF.
2. Disconnect mass air flow sensor harness connector.
3. Check resistance between mass air flow sensor terminals as follows.

Terminals	Condition		Resistance (kΩ)
1 and 2	Temperature [°C (°F)]	25 (77)	1,800 – 2,200

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace mass air flow sensor (with intake air temperature sensor). Refer to EM-27, "Exploded View" .

cardiagn.com

P0112, P0113 IAT SENSOR

DTC Logic

INFOID:0000000012406381

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0112	Intake air temperature sensor circuit low input	An excessively low voltage from the sensor is sent to ECM.	• Harness or connectors (The sensor circuit is open or shorted.) • Intake air temperature sensor
P0113	Intake air temperature sensor circuit high input	An excessively high voltage from the sensor is sent to ECM.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON and wait at least 5 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-213, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406382

1.CHECK INTAKE AIR TEMPERATURE SENSOR POWER SUPPLY

1. Disconnect mass air flow sensor (with intake air temperature sensor) harness connector.
2. Turn ignition switch ON.
3. Check the voltage between mass air flow sensor harness connector and ground.

MAF sensor		Ground	Voltage
Connector	Terminal		
F68	4	Ground	Approx. 5 V

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

2.CHECK INTAKE AIR TEMPERATURE SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check harness continuity between mass air flow sensor harness connector and ECM harness connector.

MAF sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F68	2	F14	40	Existed

cardiagn.com

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

3. CHECK INTAKE AIR TEMPERATURE SENSOR

Check intake air temperature sensor. Refer to EC-214, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace mass air flow sensor (with intake air temperature sensor). Refer to EM-27, "Exploded View".

Component Inspection

INFOID:0000000012406383

1. CHECK INTAKE AIR TEMPERATURE SENSOR

1. Turn ignition switch OFF.
2. Disconnect mass air flow sensor harness connector.
3. Check resistance between mass air flow sensor terminals as per the following.

Terminal	Condition		Resistance (kΩ)
2 and 4	Temperature [°C (°F)]	25 (77)	1.800 - 2.200

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace mass air flow sensor (with intake air temperature sensor). Refer to EM-27, "Exploded View".

cardiagn.com

P0116 ECT SENSOR

DTC Logic

INFOID:0000000012406384

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis (Trouble diagnosis content)	DTC detecting condition	Possible cause
P0116	ECT SEN/CIRC [Engine coolant temperature (ECT) sensor circuit range/performance]	The comparison result of signals transmitted to ECM from each temperature sensor (IAT sensor, ECT sensor, FTT sensor, and EOT sensor) shows that the voltage signal of the ECT sensor is higher/lower than that of other temperature sensors when the engine is started with its cold state.	• Harness or connectors (High or low resistance in the ECT sensor circuit) • ECT sensor

DTC CONFIRMATION PROCEDURE

1.INSPECTION START

Is it necessary to erase permanent DTC?

YES >> GO TO 3.
NO >> GO TO 2.

2.PERFORM COMPONENT FUNCTION CHECK

Perform component function check. Refer to EC-216, "Component Function Check".

NOTE:
Use the component function check to check the overall function of the ECT sensor circuit. During this check, a 1st trip DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-216, "Diagnosis Procedure".

3.PRECONDITIONING

If DTC CONFIRMATION PROCEDURE has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

- **Before performing the following procedure, do not add fuel.**
- **Before performing the following procedure, check that fuel level is between 1/4 and 4/4.**
- **Before performing the following procedure, confirm that battery voltage is 11 V or more at idle.**

>> GO TO 4.

4.PERFORM DTC CONFIRMATION PROCEDURE

1. Move the vehicle to a cool place.
   NOTE:
   Cool the vehicle in an environment of ambient air temperature between −10°C (14°F) and 35°C (95°F).
2. Turn ignition switch OFF and level the vehicle for 12 hours.
   CAUTION:
   Never turn ignition switch ON during this procedrue.
   NOTE:
   The vehicle must be cooled with the hood open.
3. Start engine and let it idle for 5 minutes or more.
   CAUTION:
   Never turn ignition switch OFF during idling.
4. Check 1st trip DTC.

cardiagn.com

Is 1st trip DTC detected?


YES >> Proceed to EC-216, "Diagnosis Procedure".
NO >> INSPECTION END

Component Function Check

INFOID:0000000012406385

1. CHECK ENGINE COOLANT TEMPERATURE (ECT) SENSOR

1. Turn ignition switch OFF.
2. Disconnect ECT sensor harness connector.
3. Remove ECT sensor. Refer to CO-27, "Exploded View".
4. Check resistance between ECT sensor terminals by heating with hot water as shown in the figure.

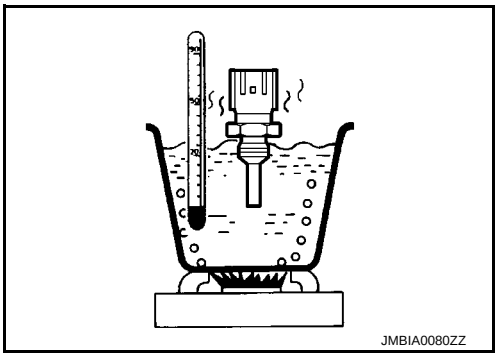

Terminals	Condition		Resistance (kΩ)
1 and 2	Temperature [°C (°F)]	20 (68)	2.1 – 2.9
		50 (122)	0.68 – 1.00
		90 (194)	0.236 – 0.260

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Proceed to EC-216, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406386

1. CHECK ENGINE COOLANT TEMPERATURE (ECT) SENSOR

Check ECT sensor. Refer to EC-216, "Component Inspection".

Is the inspection result normal?


YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace ECT sensor. Refer to CO-27, "Exploded View".

Component Inspection

INFOID:0000000012406387

1. CHECK ENGINE COOLANT TEMPERATURE SENSOR

1. Turn ignition switch OFF.
2. Disconnect engine coolant temperature sensor harness connector.
3. Remove engine coolant temperature sensor. Refer to CO-27, "Exploded View".
4. Check resistance between engine coolant temperature sensor terminals as per the following.

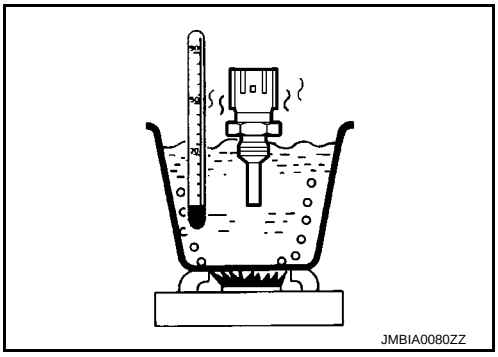

Terminals	Condition		Resistance (kΩ)
1 and 2	Temperature [°C (°F)]	20 (68)	2.1 - 2.9
		50 (122)	0.68 - 1.00
		90 (194)	0.236 - 0.260

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace engine coolant temperature sensor. Refer to CO-27, "Exploded View".

cardiagn.com

P0117, P0118 ECT SENSOR

DTC Logic

INFOID:0000000012406388

DTC DETECTION LOGIC

DTC No.	Trouble Diagnosis Name	DTC detecting condition	Possible Cause
P0117	Engine coolant temperature sensor circuit low input	An excessively low voltage from the sensor is sent to ECM.	• Harness or connectors (The sensor circuit is open or shorted.) • Engine coolant temperature sensor
P0118	Engine coolant temperature sensor circuit high input	An excessively high voltage from the sensor is sent to ECM.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON and wait at least 5 seconds.
2. Check DTC.

Is DTC detected?

YES >> Proceed to EC-217, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406389

1.CHECK ECT SENSOR POWER SUPPLY

1. Disconnect engine coolant temperature (ECT) sensor harness connector.
2. Turn ignition switch ON.
3. Check the voltage between ECT sensor harness connector and ground.

ECT sensor		Ground	Voltage
Connector	Terminal		
F80	1	Ground	Approx. 5 V

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

2.CHECK ECT SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between ECT sensor harness connector and ECM harness connector.

ECT sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F80	2	F14	35	Existed

4. Also check harness for short to ground and short to power.

cardiagn.com

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

3. CHECK ENGINE COOLANT TEMPERATURE SENSOR

Check engine coolant temperature sensor. Refer to EC-218, "Component Inspection".

Is the inspection result normal?


YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace engine coolant temperature sensor. Refer to CO-27, "Exploded View".

Component Inspection

INFOID:0000000012406390

1. CHECK ENGINE COOLANT TEMPERATURE SENSOR

1. Turn ignition switch OFF.
2. Disconnect engine coolant temperature sensor harness connector.
3. Remove engine coolant temperature sensor. Refer to CO-27, "Exploded View".
4. Check resistance between engine coolant temperature sensor terminals as per the following.

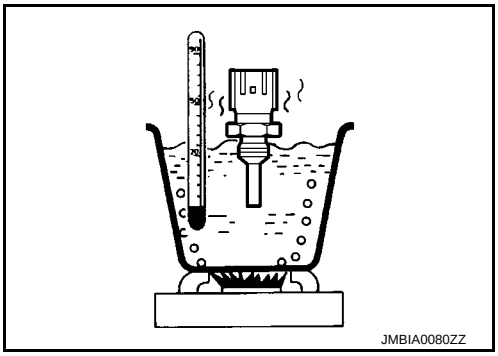
JMBIA0080ZZ

Terminals	Condition		Resistance (kΩ)
1 and 2	Temperature [°C (°F)]	20 (68)	2.1 - 2.9
		50 (122)	0.68 - 1.00
		90 (194)	0.236 - 0.260

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace engine coolant temperature sensor. Refer to CO-27, "Exploded View".

cardiagn.com

P0122, P0123 TP SENSOR

DTC Logic

INFOID:0000000012406391

DTC DETECTION LOGIC

NOTE:
If DTC P0122 or P0123 is displayed with DTC P0643, first perform the trouble diagnosis for DTC P0643. Refer to EC-379, "DTC Logic".

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0122	Throttle position sensor 2 circuit low input	An excessively low voltage from the TP sensor 2 is sent to ECM.	• Harness or connectors (TP sensor 2 circuit is open or shorted.) • Electric throttle control actuator (TP sensor 2)
P0123	Throttle position sensor 2 circuit high input	An excessively high voltage from the TP sensor 2 is sent to ECM.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is more than 8 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for 1 second.
2. Check DTC.

Is DTC detected?

YES >> Proceed to EC-219, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406392

1.CHECK THROTTLE POSITION SENSOR 2 POWER SUPPLY

1. Disconnect electric throttle control actuator harness connector.
2. Turn ignition switch ON.
3. Check the voltage between electric throttle control actuator harness connector and ground.

Electric throttle control actuator		Ground	Voltage
Connector	Terminal		
F50	5	Ground	Approx. 5 V

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2.CHECK THROTTLE POSITION SENSOR 2 POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between electric throttle control actuator harness connector and ECM harness connector.

cardiagn.com

Electric throttle control actuator		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F50	5	F15	98	Existed

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Repair or replace error-detected parts.

3.CHECK THROTTLE POSITION SENSOR 2 GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between electric throttle control actuator harness connector and ECM harness connector.

Electric throttle control actuator		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F50	4	F15	75	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK THROTTLE POSITION SENSOR 2 INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between electric throttle control actuator harness connector and ECM harness connector.

Electric throttle control actuator		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F50	3	F15	72	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

5.CHECK THROTTLE POSITION SENSOR

Check throttle position sensor. Refer to EC-220, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace electric throttle control actuator. Refer to EM-29, "Exploded View".

Component Inspection

INFOID:0000000012406393

1.CHECK THROTTLE POSITION SENSOR

1. Turn ignition switch OFF.
2. Reconnect all harness connectors disconnected.
3. Perform EC-148, "Description".
4. Turn ignition switch ON.
5. Set selector lever to D position.
6. Check the voltage between ECM harness connector terminals under the following conditions.

cardiagn.com

ECM			Condition		Voltage
Connector	+	–			
	Terminal	Terminal			
F15	71 (TP sensor 1 signal)	75 (Sensor ground)	Accelerator pedal	Fully released	More than 0.36 V
				Fully depressed	Less than 4.75 V
	72 (TP sensor 2 signal)			Fully released	Less than 4.75 V
				Fully depressed	More than 0.36 V

Is the inspection result normal?

YES >> INSPECTION END

NO >> Replace electric throttle control actuator. Refer to EM-29, "Exploded View".

cardiagn.com

P0125 ECT SENSOR

DTC Logic

INFOID:0000000012406394

DTC DETECTION LOGIC

NOTE:

- **If DTC P0125 is displayed with P0116, first perform the trouble diagnosis for DTC P0116. Refer to EC-215, "DTC Logic".**
- **If DTC P0125 is displayed with P0117 or P0118, first perform the trouble diagnosis for DTC P0117, P0118. Refer to EC-217, "DTC Logic".**

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0125	Insufficient engine coolant temperature for closed loop fuel control	• Voltage sent to ECM from the sensor is not practical, even when some time has passed after starting the engine. • Engine coolant temperature is insufficient for closed loop fuel control.	• Harness or connectors (High resistance in the circuit) • Engine coolant temperature sensor • Thermostat

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.CHECK ENGINE COOLANT TEMPERATURE SENSOR FUNCTION

With CONSULT

1. Turn ignition switch ON.
2. Select “DATA MONITOR” mode with CONSULT.
3. Check that “COOLAN TEMP/S” is above 10°C (50°F).

With GST

Follow the procedure “With CONSULT” above.

Is the temperature above 10°C (50°F)?

YES >> INSPECTION END
NO >> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE

With CONSULT

1. Start engine and run it for 65 minutes at idle speed.
   If “COOLAN TEMP/S” increases to more than 10°C (50°F) within 65 minutes, stop engine because the test result will be OK.
   CAUTION:
   Never overheat engine.
2. Check 1st trip DTC.

With GST

Follow the procedure “With CONSULT” above.

Is 1st trip DTC detected?

YES >> EC-222, "Diagnosis Procedure"
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406395

1.CHECK ENGINE COOLANT TEMPERATURE SENSOR

Check engine coolant temperature sensor. Refer to EC-223, "Component Inspection".

cardiagn.com

Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace engine coolant temperature sensor.

2.CHECK THERMOSTAT OPERATION

When the engine is cold [lower than 70°C (158°F)] condition, grasp lower radiator hose and confirm that the engine coolant does not flow.

Is the inspection result normal?


YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Repair or replace thermostat. Refer to CO-25, "Exploded View".

Component Inspection

INFOID:0000000012406396

1.CHECK ENGINE COOLANT TEMPERATURE SENSOR

1. Turn ignition switch OFF.
2. Disconnect engine coolant temperature sensor harness connector.
3. Remove engine coolant temperature sensor. Refer to CO-27, "Exploded View".
4. Check resistance between engine coolant temperature sensor terminals as per the following.

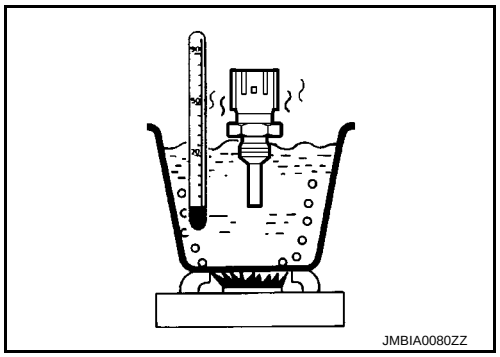

Terminals	Condition		Resistance (kΩ)
1 and 2	Temperature [°C (°F)]	20 (68)	2.1 - 2.9
		50 (122)	0.68 - 1.00
		90 (194)	0.236 - 0.260

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace engine coolant temperature sensor. Refer to CO-27, "Exploded View".

cardiagn.com

P0127 IAT SENSOR

DTC Logic

INFOID:0000000012406397

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0127	Intake air temperature too high	Rationally incorrect voltage from the sensor is sent to ECM, compared with the voltage signal from engine coolant temperature sensor.	• Harness or connectors (The sensor circuit is open or shorted) • Intake air temperature sensor

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

This test may be conducted with the drive wheels lifted in the shop or by driving the vehicle. If a road test is expected to be easier, it is unnecessary to lift the vehicle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

With CONSULT

1. Wait until engine coolant temperature is less than 96°C (205°F)

- Turn ignition switch ON.
- Select “DATA MONITOR” mode with CONSULT.
- Check the engine coolant temperature.
- If the engine coolant temperature is not less than 96°C (205°F), turn ignition switch OFF and cool down engine.

NOTE:

Perform the following steps before engine coolant temperature is above 96°C (205°F).

2. Turn ignition switch ON.
3. Select “DATA MONITOR” mode with CONSULT.
4. Start engine.
5. Hold vehicle speed at more than 70 km/h (43 MPH) for 100 consecutive seconds.

CAUTION:

Always drive vehicle at a safe speed.

6. Check 1st trip DTC.

With GST

Follow the procedure “With CONSULT” above.

Is 1st trip DTC detected?

YES >> Proceed to EC-224, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406398

1.CHECK INTAKE AIR TEMPERATURE SENSOR

Check intake air temperature sensor. Refer to EC-225, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace mass air flow sensor (with intake air temperature sensor).

cardiagn.com

Component Inspection

INFOID:0000000012406399

1. CHECK INTAKE AIR TEMPERATURE SENSOR

1. Turn ignition switch OFF.
2. Disconnect mass air flow sensor harness connector.
3. Check resistance between mass air flow sensor terminals as follows.

Terminals	Condition		Resistance (kΩ)
1 and 2	Temperature [°C (°F)]	25 (77)	1.800 - 2.200

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace mass air flow sensor (with intake air temperature sensor). Refer to EM-27, "Exploded View".

cardiagn.com

P0128 THERMOSTAT FUNCTION

DTC Logic

INFOID:0000000012406400

DTC DETECTION LOGIC

NOTE:

If DTC P0128 is displayed with DTC P0300, P0301, P0302, P0303, P0304, P0305 or P0306, first perform the trouble diagnosis for P0300, P0301, P0302, P0303, P0304, P0305, P0306. Refer to EC-290, "DTC Logic".

Engine coolant temperature has not risen enough to open the thermostat even though the engine has run long enough.

This is due to a leak in the seal or the thermostat being stuck open.

DTC No.	Trouble diagnosis (Trouble diagnosis content)	DTC detecting condition	Possible cause
P0128	THERMSTAT FNCTN [Coolant thermostat (coolant temperature below thermostat regulating temperature)]	The engine coolant temperature does not reach to specified temperature even though the engine has run long enough.	• Thermostat • Leakage from sealing portion of thermostat • Engine coolant temperature sensor

DTC CONFIRMATION PROCEDURE

NOTE:

Never refuel before and during the following procedure.

1.PRECONDITIONING-I

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PRECONDITIONING-II

With CONSULT

1. Turn ignition switch ON.
2. Check the following conditions:

Ambient temperature	–10°C (14°F) or more
A/C switch	OFF
Blower fan switch	OFF

3. Select “DATA MONITOR” mode of “ENGINE” using CONSULT.
4. Check the following conditions:

COOLAN TEMP/S	–10°C – 46°C (14 – 115°F)

Is the condition satisfied?

YES >> GO TO 3.

NO >> 1. Satisfy the condition.
2. GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE-I

With CONSULT

1. Start engine.
2. Drive the vehicle until the following condition is satisfied.

CAUTION:

Always drive vehicle at safe speed.

- **STEP 1**

cardiagn.com

Drive the vehicle under the conditions instructed below until the difference between “COOLAN TEMP/S” and “FUEL T/TMP SE” becomes at least 24°C (43°F).

COOLAN TEMP/S	65°C (149°F) or less
FUEL T/TMP SE	Less than the value calculated by subtracting 24°C (43°F) from “COOLAN TEMP/S”.*

*: Example

COOLAN TEMP/S	FUEL T/TMP SE
70°C (158°F)	45°C (113°F) or less
65°C (149°F)	40°C (104°F) or less
60°C (140°F)	35°C (95°F) or less

- **STEP 2**

Drive the vehicle at 50 km/h (32 MPH) or more with the difference between “COOLAN TEMP/S” and “FUEL T/TMP SE” maintained at 24°C (43°F) or more.

NOTE:
Keep the accelerator pedal as steady as possible during cruising.

- **STEP 3**

Drive the vehicle at 50 km/h (32 MPH) or more until “COOLAN TEMP/S” increases by 6°C (11°F).

NOTE:
Keep the accelerator pedal as steady as possible during cruising.

Is the condition satisfied?

YES >> GO TO 4.
NO >> GO TO 1.

4. PERFORM DTC CONFIRMATION PROCEDURE-II

With CONSULT

1. Drive the vehicle until the following condition is satisfied.

COOLAN TEMP/S	65°C (149°F) or more

CAUTION:
Always drive vehicle at safe speed.

2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-227, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406401

1. CHECK ENGINE COOLANT TEMPERATURE SENSOR

Check engine coolant temperature sensor. Refer to EC-227, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace engine coolant temperature sensor.

2. CHECK THERMOSTAT

Check thermostat. Refer to CO-25, "Exploded View".

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace thermostat. Refer to CO-25, "Exploded View".


Component Inspection

INFOID:0000000012406402

1. CHECK ENGINE COOLANT TEMPERATURE SENSOR

cardiagn.com

1. Turn ignition switch OFF.
2. Disconnect engine coolant temperature sensor harness connector.
3. Remove engine coolant temperature sensor. Refer to CO-27, "Exploded View".
4. Check resistance between engine coolant temperature sensor terminals as per the following.

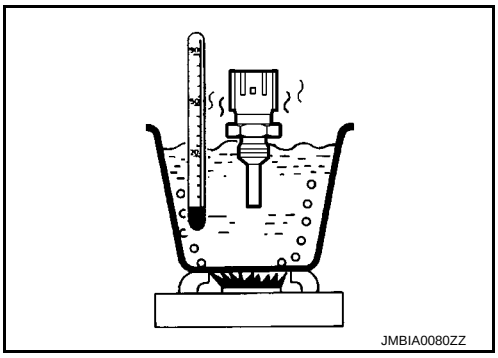

Terminals	Condition		Resistance (kΩ)
1 and 2	Temperature [°C (°F)]	20 (68)	2.1 - 2.9
		50 (122)	0.68 - 1.00
		90 (194)	0.236 - 0.260

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace engine coolant temperature sensor. Refer to CO-27, "Exploded View".

cardiagn.com

P0130, P0150 A/F SENSOR 1

DTC Logic

INFOID:0000000012406403

DTC DETECTION LOGIC

To judge malfunctions, the diagnosis checks that the A/F signal computed by ECM from the A/F sensor 1 signal fluctuates according to fuel feedback control.

DTC No.	Trouble diagnosis name	DTC detecting condition		Possible cause
P0130	Air fuel ratio (A/F) sensor 1 (bank 1) circuit	A)	The A/F signal computed by ECM from the A/F sensor 1 signal is constantly in a range other than approx. 2.2 V.	• Harness or connectors (The A/F sensor 1 circuit is open or shorted.) • A/F sensor 1
		B)	The A/F signal computed by ECM from the A/F sensor 1 signal is constantly approx. 2.2 V.	
P0150	Air fuel ratio (A/F) sensor 1 (bank 2) circuit	A)	The A/F signal computed by ECM from the A/F sensor 1 signal is constantly in a range other than approx. 2.2 V.	• Harness or connectors (The A/F sensor 1 circuit is open or shorted.) • A/F sensor 1
		B)	The A/F signal computed by ECM from the A/F sensor 1 signal is constantly approx. 2.2 V.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 11 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION A

1. Start engine and warm it up to normal operating temperature.
2. Let engine idle for 2 minutes.
3. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-231, "Diagnosis Procedure".
NO-1 >> With CONSULT: GO TO 3.
NO-2 >> With GST: GO TO 7.

3.CHECK AIR FUEL RATIO (A/F) SENSOR 1 FUNCTION

1. Start engine and warm it up to normal operating temperature.
2. Select “A/F SEN1 (B1)” or “A/F SEN1 (B2)” in “DATA MONITOR” mode with CONSULT.
3. Check “A/F SEN1 (B1)” or “A/F SEN1 (B2)” indication.

Does the indication fluctuate around 2.2 V?

YES >> GO TO 4.
NO >> Proceed to EC-231, "Diagnosis Procedure".

4.PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION B-I

1. Select “A/F SEN1 (B1) P1276” (for DTC P0130) or “A/F SEN1 (B2) P1286” (for DTC P0150) of “A/F SEN1” in “DTC WORK SUPPORT” mode with CONSULT.
2. Touch “START”.
3. When the following conditions are met, “TESTING” will be displayed on the CONSULT screen.

cardiagn.com

ENG SPEED	1,000 - 3,200 rpm
VHCL SPEED SE	More than 64 km/h (40 mph)
B/FUEL SCHDL	1.0 - 10.0 msec
Selector lever	D position

If “TESTING” is not displayed after 20 seconds, retry from step 2.
CAUTION:
Always drive vehicle at a safe speed.

Is “TESTING” displayed on CONSULT screen?

YES >> GO TO 5.
NO >> Check A/F sensor 1 function again. GO TO 3.

5. PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION B-II

Release accelerator pedal fully.
NOTE:
Never apply brake when releasing the accelerator pedal.

Which does “TESTING” change to?

COMPLETED>>GO TO 6.
OUT OF CONDITION>>Retry DTC CONFIRMATION PROCEDURE. GO TO 4.

6. PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION B-III

Touch “SELF-DIAG RESULT”.

Which is displayed on CONSULT screen?

OK >> INSPECTION END
NG >> Proceed to EC-231, "Diagnosis Procedure".

7. PERFORM COMPONENT FUNCTION CHECK FOR MALFUNCTION B

Perform component function check. Refer to EC-230, "Component Function Check".
NOTE:
Use component function check to check the overall function of the A/F sensor 1 circuit. During this check, a 1st trip DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-231, "Diagnosis Procedure".

Component Function Check

INFOID:0000000012406404

1. PERFORM COMPONENT FUNCTION CHECK

With GST

1. Start engine and warm it up to normal operating temperature.
2. Drive the vehicle at a speed of 80 km/h (50 MPH) for a few minutes in the suitable gear position.
3. Shift the selector lever to the D position, then release the accelerator pedal fully until the vehicle speed decreases to 50 km/h (31 MPH).
   CAUTION:
   Always drive vehicle at a safe speed.
   NOTE:
   Never apply brake when releasing the accelerator pedal.
4. Repeat steps 2 and 3 for 5 times.
5. Stop the vehicle and turn ignition switch OFF.
6. Wait at least 10 seconds and restart engine.
7. Repeat steps 2 and 3 for 5 times.
8. Stop the vehicle.
9. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-231, "Diagnosis Procedure".
NO >> INSPECTION END

cardiagn.com

Diagnosis Procedure

INFOID:0000000012406405

1. CHECK AIR FUEL RATIO (A/F) SENSOR 1 POWER SUPPLY

1. Disconnect A/F sensor 1 harness connector.
2. Turn ignition switch ON.
3. Check the voltage between A/F sensor 1 harness connector and ground.

DTC	A/F sensor 1			Ground	Voltage
	Bank	Connector	Terminal		
P0130	1	F28	1	Ground	Battery voltage
P0150	2	F65	1		

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2. CHECK AIR FUEL RATIO (A/F) SENSOR 1 POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Check the continuity between A/F sensor 1 harness connector and IPDM E/R harness connector.

DTC	A/F sensor 1			IPDM E/R		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0130	1	F28	1	F12	57	Existed
P0150	2	F65	1			

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

3. CHECK A/F SENSOR 1 INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between A/F sensor 1 harness connector and ECM harness connector.

DTC	A/F sensor 1			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0130	1	F28	3	F15	66	Existed
			4		67	
P0150	2	F65	3		76	
			4		77	

4. Check the continuity between A/F sensor 1 harness connector and ground, or ECM harness connector and ground.

DTC	A/F sensor 1			Ground	Continuity
	Bank	Connector	Terminal		
P0130	1	F28	3	Ground	Not existed
			4		
P0150	2	F65	3		
			4		

cardiagn.com

DTC	ECM		Ground	Continuity
	Connector	Terminal		
P0130	F15	66	Ground	Not existed
		67		
P0150		76		
		77		

5. Also check harness for short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace malfunctioning air fuel ratio (A/F) sensor 1. Refer to EM-34, "Exploded View".
NO >> Repair or replace error-detected parts.

cardiagn.com

P0131, P0151 A/F SENSOR 1

DTC Logic

INFOID:0000000012406406

DTC DETECTION LOGIC

To judge the malfunction, the diagnosis checks that the A/F signal computed by ECM from the A/F sensor 1 signal is not inordinately low.

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0131	Air fuel ratio (A/F) sensor 1 (bank 1) circuit low voltage	• The A/F signal computed by ECM from the A/F sensor 1 signal is constantly approx. 0 V.	• Harness or connectors (The A/F sensor 1 circuit is open or shorted.) • A/F sensor 1
P0151	Air fuel ratio (A/F) sensor 1 (bank 2) circuit low voltage		

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 10.5 V at idle.

>> GO TO 2.

2.CHECK A/F SENSOR 1 FUNCTION

With CONSULT

1. Start engine and warm it up to normal operating temperature.
2. Select “A/F SEN1 (B1)” or “A/F SEN1 (B2)” in “DATA MONITOR” mode with CONSULT.
3. Check “A/F SEN1 (B1)” or “A/F SEN1 (B2)” indication.

With GST

Follow the procedure “With CONSULT” above.

Is the indication constantly approx. 0 V?

YES >> Proceed to EC-234, "Diagnosis Procedure".
NO >> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE

With CONSULT

1. Turn ignition switch OFF, wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF, wait at least 10 seconds and then restart engine.
4. Drive and accelerate vehicle to more than 40 km/h (25 MPH) within 20 seconds after restarting engine.
   CAUTION:
   Always drive vehicle at a safe speed.
5. Maintain the following conditions for approximately 20 consecutive seconds.

ENG SPEED	1,000 - 3,200 rpm
VHCL SPEED SE	More than 40 km/h (25 mph)
B/FUEL SCHDL	1.5 - 9.0 msec
Selector lever	Suitable position

NOTE:

- **Keep the accelerator pedal as steady as possible during cruising.**
- **If this procedure is not completed within 1 minute after restarting engine at step 1, return to step 1.**

6. Check 1st trip DTC.

cardiagn.com

With GST

Follow the procedure “With CONSULT” above.

Is 1st trip DTC detected?

YES >> Proceed to EC-234, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406407

1. CHECK AIR FUEL RATIO (A/F) SENSOR 1 POWER SUPPLY

1. Disconnect A/F sensor 1 harness connector.
2. Turn ignition switch ON.
3. Check the voltage between A/F sensor 1 harness connector and ground.

DTC	A/F sensor 1			Ground	Voltage
	Bank	Connector	Terminal		
P0131	1	F28	1	Ground	Battery voltage
P0151	2	F65	1		

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2. CHECK AIR FUEL RATIO (A/F) SENSOR 1 POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Check the continuity between A/F sensor 1 harness connector and IPDM E/R harness connector.

DTC	A/F sensor 1			IPDM E/R		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0131	1	F28	1	F12	57	Existed
P0151	2	F65	1			

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

3. CHECK A/F SENSOR 1 INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between A/F sensor 1 harness connector and ECM harness connector.

DTC	A/F sensor 1			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0131	1	F28	3	F15	66	Existed
			4		67	
P0151	2	F65	3		76	
			4		77	

4. Check the continuity between A/F sensor 1 harness connector and ground, or ECM harness connector and ground.

cardiagn.com

DTC	A/F sensor 1			Ground	Continuity
	Bank	Connector	Terminal		
P0131	1	F28	3	Ground	Not existed
			4		
P0151	2	F65	3		
			4		

DTC	ECM		Ground	Continuity
	Connector	Terminal		
P0131	F15	66	Ground	Not existed
		67		
P0151		76		
		77		

5. Also check harness for short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4. CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace malfunctioning air fuel ratio (A/F) sensor 1. Refer to EM-34, "Exploded View".
NO >> Repair or replace error-detected parts.

cardiagn.com

P0132, P0152 A/F SENSOR 1

DTC Logic

INFOID:0000000012406408

DTC DETECTION LOGIC

To judge the malfunction, the diagnosis checks that the A/F signal computed by ECM from the A/F sensor 1 signal is not inordinately high.

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0132	Air fuel ratio (A/F) sensor 1 (bank 1) circuit high voltage	• The A/F signal computed by ECM from the A/F sensor 1 signal is constantly approx. 5 V.	• Harness or connectors (The A/F sensor 1 circuit is open or shorted.) • A/F sensor 1
P0152	Air fuel ratio (A/F) sensor 1 (bank 2) circuit high voltage		

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always preform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 10.5 V at idle.

>> GO TO 2.

2.CHECK A/F SENSOR 1 FUNCTION

With CONSULT

1. Start engine and warm it up to normal operating temperature.
2. Select “A/F SEN1 (B1)” or “A/F SEN1 (B2)” in “DATA MONITOR” mode with CONSULT.
3. Check “A/F SEN1 (B1)” or “A/F SEN1 (B2)” indication.

With GST

Follow the procedure “With CONSULT” above.

Is the indication constantly approx. 5 V?

YES >> Proceed to EC-237, "Diagnosis Procedure".
NO >> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE

With CONSULT

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF, wait at least 10 seconds and then restart engine.
4. Drive and accelerate vehicle to more than 40 km/h (25 MPH) within 20 seconds after restarting engine.
   CAUTION:
   Always drive vehicle at a safe speed.
5. Maintain the following conditions for approximately 20 consecutive seconds.

ENG SPEED	1,000 - 3,200 rpm
VHCL SPEED SE	More than 40 km/h (25 mph)
B/FUEL SCHDL	1.5 - 9.0 msec
Selector lever	Suitable position

NOTE:

- **Keep the accelerator pedal as steady as possible during cruising.**
- **If this procedure is not completed within 1 minute after restarting engine at step 1, return to step 1.**

6. Check 1st trip DTC.

cardiagn.com

With GST

Follow the procedure “With CONSULT” above.

Is 1st trip DTC detected?

YES >> Proceed to EC-237, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406409

1. CHECK AIR FUEL RATIO (A/F) SENSOR 1 POWER SUPPLY

1. Disconnect A/F sensor 1 harness connector.
2. Turn ignition switch ON.
3. Check the voltage between A/F sensor 1 harness connector and ground.

DTC	A/F sensor 1			Ground	Voltage
	Bank	Connector	Terminal		
P0132	1	F28	1	Ground	Battery voltage
P0152	2	F65	1		

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2. CHECK AIR FUEL RATIO (A/F) SENSOR 1 POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Check the continuity between A/F sensor 1 harness connector and IPDM E/R harness connector.

DTC	A/F sensor 1			IPDM E/R		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0132	1	F28	1	F12	57	Existed
P0152	2	F65	1			

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

3. CHECK A/F SENSOR 1 INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between A/F sensor 1 harness connector and ECM harness connector.

DTC	A/F sensor 1			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0132	1	F28	3	F15	66	Existed
			4		67	
P0152	2	F65	3		76	
			4		77	

4. Check the continuity between A/F sensor 1 harness connector and ground, or ECM harness connector and ground.

cardiagn.com

DTC	A/F sensor 1			Ground	Continuity
	Bank	Connector	Terminal		
P0132	1	F28	3	Ground	Not existed
			4		
P0152	2	F65	3		
			4		

DTC	ECM		Ground	Continuity
	Connector	Terminal		
P0132	F15	66	Ground	Not existed
		67		
P0152		76		
		77		

5. Also check harness for short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4. CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace malfunctioning air fuel ratio (A/F) sensor 1. Refer to EM-34, "Exploded View".
NO >> Repair or replace error-detected parts.

cardiagn.com

P0137, P0157 HO2S2


DTC Logic

INFOID:0000000012406410

DTC DETECTION LOGIC

The heated oxygen sensor 2 has a much longer switching time between rich and lean than the air fuel ratio (A/F) sensor 1. The oxygen storage capacity of the three way catalyst (manifold) causes the longer switching time. To judge the malfunctions of heated oxygen sensor 2, ECM monitors whether the maximum voltage of the sensor is sufficiently high during various driving conditions such as fuel-cut.

ⓐ : 0.72 V

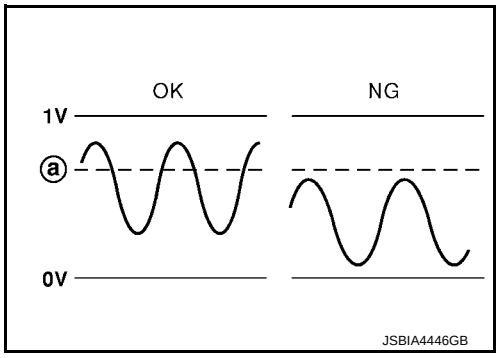

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0137	Heated oxygen sensor 2 (bank 1) circuit low voltage	The maximum voltage from the sensor does not reach the specified voltage.	• Harness or connectors (The sensor circuit is open or shorted) • Heated oxygen sensor 2 • Fuel pressure • Fuel injector • Intake air leakage
P0157	Heated oxygen sensor 2 (bank 2) circuit low voltage		

DTC CONFIRMATION PROCEDURE

1.INSPECTION START

Will CONSULT be used?

Will CONSULT be used?

YES >> GO TO 2.
NO >> GO TO 5.

2.PRECONDITIONING

If DTC confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
For better results, perform "DTC WORK SUPPORT" at a temperature of 0 to 30°C (32 to 86°F).

>> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE

With CONSULT

1. Turn ignition switch ON and select "DATA MONITOR" mode with CONSULT.
2. Start engine and warm it up to the normal operating temperature.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. Turn ignition switch OFF and wait at least 10 seconds.
6. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
7. Let engine idle for 1 minute.
8. Check that "COOLAN TEMP/S" indicates more than 70°C (158°F).
   If not, warm up engine and go to next step when "COOLAN TEMP/S" indication reaches 70°C (158°F).
9. Open engine hood.

cardiagn.com

10. Select “HO2S2 (B1) P1147” (for DTC P0137) or “HO2S2 (B2) P1167” (for DTC P0157) of “HO2S2” in “DTC WORK SUPPORT” mode with CONSULT.
11. Follow the instruction of CONSULT display.
    NOTE:
    It will take at most 10 minutes until “COMPLETED” is displayed.
12. Touch “SELF-DIAG RESULTS”.

Which is displayed on CONSULT screen?

OK >> INSPECTION END
NG >> Proceed to EC-241, "Diagnosis Procedure".
CAN NOT BE DIAGNOSED>>GO TO 4.

4. PERFORM DTC CONFIRMATION PROCEDURE AGAIN

1. Turn ignition switch OFF and leave the vehicle in a cool place (soak the vehicle).
2. Perform DTC confirmation procedure again.

>> GO TO 3.

5. PERFORM COMPONENT FUNCTION CHECK

Perform component function check. Refer to EC-240, "Component Function Check".
NOTE:
Use component function check to check the overall function of the heated oxygen sensor 2 circuit. During this check, a 1st trip DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-241, "Diagnosis Procedure".

Component Function Check

INFOID:0000000012406411

1. PERFORM COMPONENT FUNCTION CHECK-I

Without CONSULT
1. Start engine and warm it up to the normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
6. Let engine idle for 1 minute.
7. Check the voltage between ECM harness connector terminals under the following conditions.

DTC	ECM			Condition	Voltage
	Connector	+	–		
		Terminal	Terminal		
P0137	F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Revving up to 4,000 rpm under no load at least 10 times	The voltage should be above 0.72 V at least once during this procedure.
P0157		32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 2.

2. PERFORM COMPONENT FUNCTION CHECK-II

Check the voltage between ECM harness connector terminals under the following conditions.

cardiagn.com

DTC	ECM			Condition	Voltage
	Connector	+	–		
		Terminal	Terminal		
P0137	F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Keeping engine at idle for 10 minutes	The voltage should be above 0.72 V at least once during this procedure.
P0157		32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 3.

3. PERFORM COMPONENT FUNCTION CHECK-III

Check the voltage between ECM harness connector terminals under the following conditions.

DTC	ECM			Condition	Voltage
	Connector	+	–		
		Terminal	Terminal		
P0137	F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Coasting from 80 km/h (50 MPH) with selector lever in the D position	The voltage should be above 0.72 V at least once during this procedure.
P0157		32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-241, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406412

1. CLEAR MIXTURE RATIO SELF-LEARNING VALUE

1. Clear the mixture ratio self-learning value. Refer to EC-151, "Description".
2. Run engine for at least 10 minutes at idle speed.

Is the 1st trip DTC P0171 or P0174 detected? Is it difficult to start engine?

YES >> Perform trouble diagnosis for DTC P0171 or P0174. Refer to EC-267, "DTC Logic".
NO >> GO TO 2.

2. CHECK HO2S2 GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect heated oxygen sensor 2 harness connector.
3. Disconnect ECM harness connector.
4. Check the continuity between heated oxygen sensor 2 (HO2S2) harness connector and ECM harness connector.

DTC	HO2S2			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0137	1	F86	4	F14	35	Existed
P0157	2	F85	4			

5. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

cardiagn.com

3.CHECK HO2S2 INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between HO2S2 harness connector and ECM harness connector.

DTC	HO2S2			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0137	1	F86	3	F14	41	Existed
P0157	2	F85	3		32	

2. Check the continuity between HO2S2 harness connector and ground, or ECM harness connector and ground.

DTC	HO2S2			Ground	Continuity
	Bank	Connector	Terminal		
P0137	1	F86	3	Ground	Not existed
P0157	2	F85	3		

DTC	ECM		Ground	Continuity
	Connector	Terminal		
P0137	F14	41	Ground	Not existed
P0157		32		

3. Also check harness for short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK HEATED OXYGEN SENSOR 2

Check heated oxygen sensor 2. Refer to EC-242, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace malfunctioning heated oxygen sensor 2. Refer to EM-34, "Exploded View".

Component Inspection

INFOID:0000000012406413

1.INSPECTION START

Will CONSULT be used?

Will CONSULT be used?

YES >> GO TO 2.
NO >> GO TO 3.


2.CHECK HEATED OXYGEN SENSOR 2

With CONSULT

1. Turn ignition switch ON and select “DATA MONITOR” mode with CONSULT.
2. Start engine and warm it up to the normal operating temperature.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
5. Let engine idle for 1 minute.
6. Select “FUEL INJECTION” in “ACTIVE TEST” mode, and select “HO2S2 (B1)/(B2)” as the monitor item with CONSULT.

cardiagn.com

7. Check “HO2S2 (B1)/(B2)” at idle speed when adjusting “FUEL INJECTION” to ± 25%.

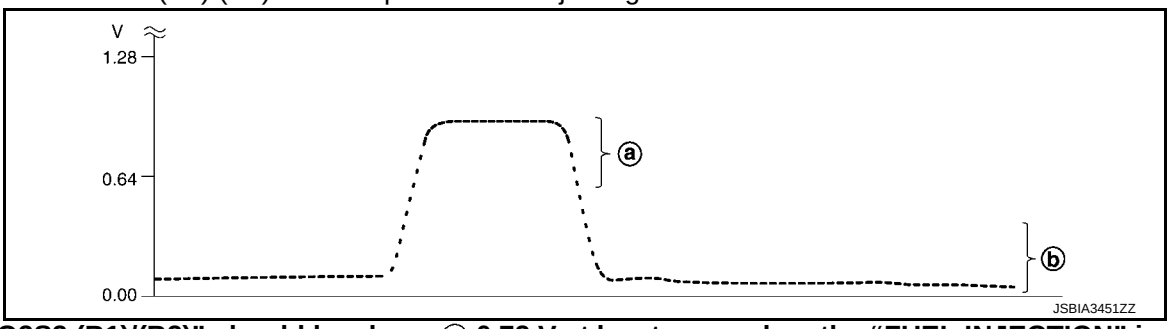

“HO2S2 (B1)/(B2)” should be above ⓐ 0.72 V at least once when the “FUEL INJECTION” is + 25%.
“HO2S2 (B1)/(B2)” should be below ⓑ 0.27 V at least once when the “FUEL INJECTION” is – 25%.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning heated oxygen sensor 2. Refer to EM-34, "Exploded View".

3. CHECK HEATED OXYGEN SENSOR 2-I

Without CONSULT

1. Start engine and warm it up to the normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
4. Let engine idle for 1 minute.
5. Check the voltage between ECM harness connector terminals under the following conditions.

ECM			Condition	Voltage
Connector	+	–		
	Terminal	Terminal		
F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Revving up to 4,000 rpm under no load at least 10 times	The voltage should be above 0.72 V at least once during this procedure. The voltage should be below 0.27 V at least once during this procedure.
	32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 4.

4. CHECK HEATED OXYGEN SENSOR 2-II

Check the voltage between ECM harness connector terminals under the following conditions.

ECM			Condition	Voltage
Connector	+	–		
	Terminal	Terminal		
F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Keeping engine at idle for 10 minutes	The voltage should be above 0.72 V at least once during this procedure. The voltage should be below 0.27 V at least once during this procedure.
	32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 5.

5. CHECK HEATED OXYGEN SENSOR 2-III

Check the voltage between ECM harness connector terminals under the following conditions.

cardiagn.com

ECM			Condition	Voltage
Connector	+	–		
	Terminal	Terminal		
F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Coasting from 80 km/h (50 MPH) with selector lever in the D position	The voltage should be above 0.72 V at least once during this procedure. The voltage should be below 0.27 V at least once during this procedure.
	32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END

NO >> Replace malfunctioning heated oxygen sensor 2. Refer to EM-34, "Exploded View".

cardiagn.com

P0138, P0158 HO2S2

DTC Logic

INFOID:0000000012406414


DTC DETECTION LOGIC

The heated oxygen sensor 2 has a much longer switching time between rich and lean than the air fuel ratio (A/F) sensor 1. The oxygen storage capacity of the three way catalyst (manifold) causes the longer switching time.

MALFUNCTION A


To judge the malfunctions of heated oxygen sensor 2, ECM monitors whether the voltage is unusually high during various driving conditions such as fuel cut.

ⓐ : 1.3 V

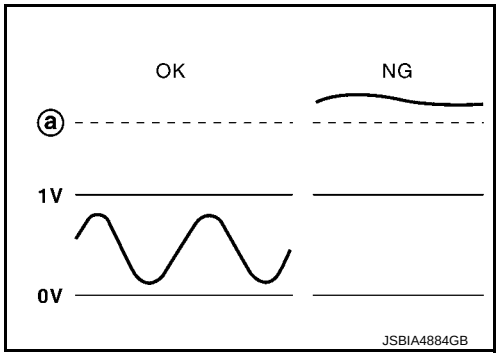

MALFUNCTION B

To judge the malfunctions of heated oxygen sensor 2, ECM monitors whether the minimum voltage of sensor is sufficiently low during various driving conditions such as fuel-cut.

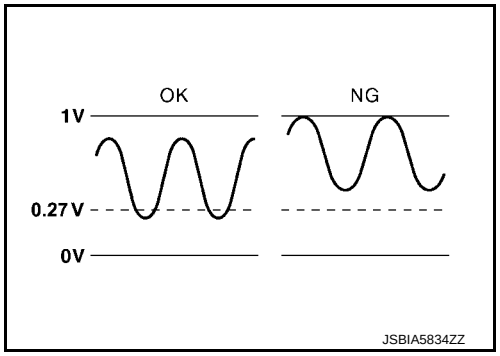

DTC No.	Trouble diagnosis name	DTC detecting condition		Possible cause
P0138	Heated oxygen sensor 2 (bank 1) circuit high voltage	A)	An excessively high voltage from the sensor is sent to ECM.	• Harness or connectors (The sensor circuit is open or shorted) • Heated oxygen sensor 2
		B)	The minimum voltage from the sensor is not reached to the specified voltage.	• Harness or connectors (The sensor circuit is open or shorted) • Heated oxygen sensor 2 • Fuel pressure • Fuel injector
P0158	Heated oxygen sensor 2 (bank 2) circuit high voltage	A)	An excessively high voltage from the sensor is sent to ECM.	• Harness or connectors (The sensor circuit is open or shorted) • Heated oxygen sensor 2
		B)	The minimum voltage from the sensor is not reached to the specified voltage.	• Harness or connectors (The sensor circuit is open or shorted) • Heated oxygen sensor 2 • Fuel pressure • Fuel injector

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

cardiagn.com

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION A

1. Start engine and warm it up to the normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
6. Let engine idle for 2 minutes.
7. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-248, "Diagnosis Procedure".
NO-1 >> With CONSULT: GO TO 3.
NO-2 >> Without CONSULT: GO TO 5.

3.PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION B

NOTE:
For better results, perform “DTC WORK SUPPORT” at a temperature of 0 to 30°C (32 to 86°F).

1. Select “DATA MONITOR” mode with CONSULT.
2. Start engine and warm it up to the normal operating temperature.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. Turn ignition switch OFF and wait at least 10 seconds.
6. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
7. Let engine idle for 1 minute.
8. Check that “COOLAN TEMP/S” indicates more than 70°C (158°F).
   If not, warm up engine and go to next step when “COOLAN TEMP/S” indication reaches 70°C (158°F).
9. Open engine hood.
10. Select “HO2S2 (B1) P1146” (for DTC P0138) or “HO2S2 (B2) P1166” (for DTC P0158) of “HO2S2” in “DTC WORK SUPPORT” mode with CONSULT.
11. Follow the instruction of CONSULT display.
    NOTE:
    It will take at most 10 minutes until “COMPLETED” is displayed.
12. Touch “SELF-DIAG RESULTS”.

Which is displayed on CONSULT screen?

OK >> INSPECTION END
NG >> Proceed to EC-248, "Diagnosis Procedure".
CON NOT BE DIAGNOSED>>GO TO 4.

4.PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION B AGAIN

1. Turn ignition switch OFF and leave the vehicle in a cool place (soak the vehicle).
2. Perform DTC confirmation procedure again.

>> GO TO 3.

5.PERFORM COMPONENT FUNCTION CHECK FOR MALFUNCTION B

Perform component function check. Refer to EC-246, "Component Function Check".
NOTE:
Use component function check to check the overall function of the heated oxygen sensor 2 circuit. During this check, a 1st trip DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-248, "Diagnosis Procedure".

Component Function Check

INFOID:0000000012406415

1.PERFORM COMPONENT FUNCTION CHECK-I

cardiagn.com

Without CONSULT

1. Start engine and warm it up to the normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
6. Let engine idle for 1 minute.
7. Check the voltage between ECM harness connector terminals under the following conditions.

DTC	ECM			Condition	Voltage
	Connector	+ Terminal	– Terminal		
P0138	F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Revving up to 4,000 rpm under no load at least 10 times	The voltage should be below 0.27 V at least once during this procedure.
P0158		32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 2.

2. PERFORM COMPONENT FUNCTION CHECK-II

Check the voltage between ECM harness connector terminals under the following conditions.

DTC	ECM			Condition	Voltage
	Connector	+ Terminal	– Terminal		
P0138	F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Keeping engine speed at idle for 10 minutes	The voltage should be below 0.27 V at least once during this procedure.
P0158		32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 3.

3. PERFORM COMPONENT FUNCTION CHECK-III

Check the voltage between ECM harness connector terminals under the following conditions.

DTC	ECM			Condition	Voltage
	Connector	+ Terminal	– Terminal		
P0138	F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Coasting from 80 km/h (50 MPH) with selector lever in the D position	The voltage should be below 0.27 V at least once during this procedure.
P0158		32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-248, "Diagnosis Procedure".

cardiagn.com

Diagnosis Procedure

INFOID:0000000012406416

1.INSPECTION START

Confirm the detected malfunction (A or B). Refer to EC-245, "DTC Logic".

Which malfunction is detected?

A >> GO TO 2.
B >> GO TO 6.

2.CHECK HO2S2 CONNECTOR FOR WATER

1. Disconnect heated oxygen sensor 2 harness connector.
2. Check that water is not inside connectors.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair or replace harness or connectors.

3.CHECK HO2S2 GROUND CIRCUIT FOR OPEN AND SHORT

1. Disconnect heated oxygen sensor 2 harness connector.
2. Disconnect ECM harness connector.
3. Check the continuity between heated oxygen sensor 2 (HO2S2) harness connector and ECM harness connector.

DTC	HO2S2			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0138	1	F86	4	F14	35	Existed
P0158	2	F85	4			

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK HO2S2 INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between HO2S2 harness connector and ECM harness connector.

DTC	HO2S2			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0138	1	F86	3	F14	41	Existed
P0158	2	F85	3		32	

2. Check the continuity between HO2S2 harness connector and ground, or ECM harness connector and ground.

DTC	HO2S2			Ground	Continuity
	Bank	Connector	Terminal		
P0138	1	F86	3	Ground	Not existed
P0158	2	F85	3		

DTC	ECM		Ground	Continuity
	Connector	Terminal		
P0138	F14	41	Ground	Not existed
P0158		32		

3. Also check harness for short to power.

Is the inspection result normal?

cardiagn.com

YES >> GO TO 5.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

5. CHECK HEATED OXYGEN SENSOR 2

Check heated oxygen sensor 2. Refer to EC-250, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace malfunctioning heated oxygen sensor 2. Refer to EM-34, "Exploded View".

6. CLEAR MIXTURE RATIO SELF-LEARNING VALUE

1. Clear the mixture ratio self-learning value. Refer to EC-151, "Description".
2. Run engine for at least 10 minutes at idle speed.

Is the 1st trip DTC P0172 or P0175 detected? Is it difficult to start engine?

YES >> Perform trouble diagnosis for DTC P0172, P0175. Refer to EC-271, "DTC Logic".
NO >> GO TO 7.

7. CHECK HO2S2 GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect heated oxygen sensor 2 harness connector.
3. Disconnect ECM harness connector.
4. Check the continuity between HO2S2 harness connector and ECM harness connector.

DTC	HO2S2			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0138	1	F86	4	F14	35	Existed
P0158	2	F85	4			

5. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 8.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

8. CHECK HO2S2 INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between HO2S2 harness connector and ECM harness connector.

DTC	HO2S2			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0138	1	F86	3	F14	41	Existed
P0158	2	F85	3		32	

2. Check the continuity between HO2S2 harness connector and ground, or ECM harness connector and ground.

DTC	HO2S2			Ground	Continuity
	Bank	Connector	Terminal		
P0138	1	F86	3	Ground	Not existed
P0158	2	F85	3		

DTC	ECM		Ground	Continuity
	Connector	Terminal		
P0138	F14	41	Ground	Not existed
P0158		32		

3. Also check harness for short to power.

Is the inspection result normal?

cardiagn.com

YES >> GO TO 9.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

9. CHECK HEATED OXYGEN SENSOR 2

Check heated oxygen sensor 2. Refer to EC-250, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace malfunctioning heated oxygen sensor 2. Refer to EM-34, "Exploded View".

Component Inspection

INFOID:0000000012406417

1. INSPECTION START

Will CONSULT be used?


Will CONSULT be used?

YES >> GO TO 2.
NO >> GO TO 3.

2. CHECK HEATED OXYGEN SENSOR 2

With CONSULT

1. Turn ignition switch ON and select “DATA MONITOR” mode with CONSULT.
2. Start engine and warm it up to the normal operating temperature.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
5. Let engine idle for 1 minute.
6. Select “FUEL INJECTION” in “ACTIVE TEST” mode, and select “HO2S2 (B1)/(B2)” as the monitor item with CONSULT.
7. Check “HO2S2 (B1)/(B2)” at idle speed when adjusting “FUEL INJECTION” to ± 25%.

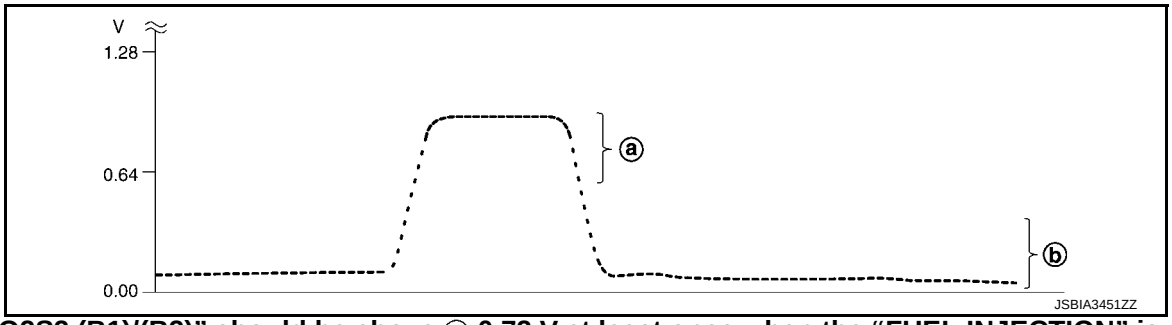

“HO2S2 (B1)/(B2)” should be above ⓐ 0.72 V at least once when the “FUEL INJECTION” is + 25%.
“HO2S2 (B1)/(B2)” should be below ⓑ 0.27 V at least once when the “FUEL INJECTION” is − 25%.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning heated oxygen sensor 2. Refer to EM-34, "Exploded View".

3. CHECK HEATED OXYGEN SENSOR 2-I

Without CONSULT

1. Start engine and warm it up to the normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
4. Let engine idle for 1 minute.
5. Check the voltage between ECM harness connector terminals under the following conditions.

cardiagn.com

ECM			Condition	Voltage
Connector	+	–		
	Terminal	Terminal		
F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Revving up to 4,000 rpm under no load at least 10 times	The voltage should be above 0.72 V at least once during this procedure. The voltage should be below 0.27 V at least once during this procedure.
	32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 4.

4. CHECK HEATED OXYGEN SENSOR 2-II

Check the voltage between ECM harness connector terminals under the following conditions.

ECM			Condition	Voltage
Connector	+	–		
	Terminal	Terminal		
F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Keeping engine at idle for 10 minutes	The voltage should be above 0.72 V at least once during this procedure. The voltage should be below 0.27 V at least once during this procedure.
	32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 5.

5. CHECK HEATED OXYGEN SENSOR 2-III

Check the voltage between ECM harness connector terminals under the following conditions.

ECM			Condition	Voltage
Connector	+	–		
	Terminal	Terminal		
F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Coasting from 80 km/h (50 MPH) with selector lever in the D position	The voltage should be above 0.72 V at least once during this procedure. The voltage should be below 0.27 V at least once during this procedure.
	32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning heated oxygen sensor 2. Refer to EM-34, "Exploded View".

cardiagn.com


P0139, P0159 HO2S2

DTC Logic

INFOID:0000000012406418

DTC DETECTION LOGIC

The heated oxygen sensor 2 has a much longer switching time between rich and lean than the air fuel ratio (A/F) sensor 1. The oxygen storage capacity of the three way catalyst 1 causes the longer switching time. To judge the malfunctions of heated oxygen sensor 2, ECM monitors whether the switching response of the sensor's voltage is faster than specified during various driving conditions such as fuel cut.

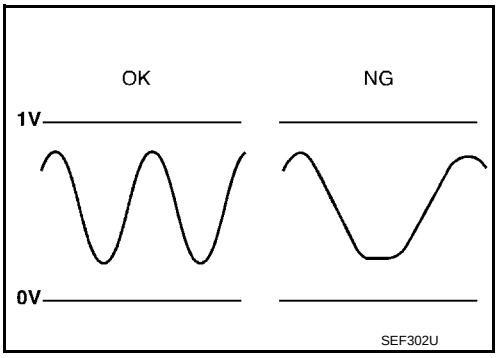

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0139	Heated oxygen sensor 2 (bank 1) circuit slow response	The switching time between rich and lean of a heated oxygen sensor 2 signal delays more than the specified time computed by ECM.	• Harness or connectors (The sensor circuit is open or shorted) • Heated oxygen sensor 2 • Fuel system • EVAP system • Intake air system
P0159	Heated oxygen sensor 2 (bank 2) circuit slow response		

DTC CONFIRMATION PROCEDURE

1.INSPECTION START

Do you have CONSULT?

Do you have CONSULT?

YES >> GO TO 2.
NO >> GO TO 7.

2.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
For better results, perform “DTC WORK SUPPORT” at a temperature of 0 to 30°C (32 to 86°F).

>> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE

With CONSULT

1. Turn ignition switch ON and select “DATA MONITOR” mode with CONSULT.
2. Start engine and warm it up to the normal operating temperature.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. Turn ignition switch OFF and wait at least 10 seconds.
6. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
7. Let engine idle for 1 minute.
8. Make sure that “COOLAN TEMP/S” indicates more than 70°C (158°F).
9. Drive the vehicle in a proper gear at 60 km/h (38MPH) and maintain the speed.

CAUTION:
Always drive vehicle at a safe speed.

cardiagn.com

10. Release the accelerator pedal fully at least 5 seconds.
    CAUTION:
    - **Enable the engine brake.**
    - **Always drive carefully.**
    - **Never apply brake when releasing the accelerator pedal.**
11. Repeat step 9 and 10 at least 8 times.
12. Check the following item of “DATA MONITOR”.

DTC	Data monitor item	Status
P0139	HO2 S2 DIAG1 (B1)	CMPLT
	HO2 S2 DIAG2 (B1)	
P0159	HO2 S2 DIAG1 (B2)	
	HO2 S2 DIAG2 (B2)	

Is “CMPLT” displayed on CONSULT screen?

YES >> GO TO 6.
NO-1: “CMPLT” is not displayed on DIAG 1>>Perform DTC confirmation procedure again.
NO-2: “CMPLT” is not displayed on DIAG 2>>GO TO 4.

4.PERFORM DTC WORK SUPPORT

1. Open engine hood.
2. Select “HO2S2 (B1) P0139” or “HO2S2 (B2) P0159” of “HO2S2” in “DTC WORK SUPPORT” mode with CONSULT.
3. Start engine and follow the instruction of CONSULT display.
   NOTE:
   It will take at most 10 minutes until “COMPLETED” is displayed.

Is “COMPLETED” displayed on CONSULT screen?

YES >> GO TO 6.
NO >> GO TO 5.

5.PERFORM DTC CONFIRMATION PROCEDURE AGAIN

1. Turn ignition switch OFF and leave the vehicle in a cool place (soak the vehicle).
2. Perform DTC confirmation procedure again.

>> GO TO 3.

6.PERFORM SELF-DIAGNOSIS

With CONSULT
Perform ECM self-diagnosis.

Is DTC “P0139” or “P0159” detected?

YES >> Proceed to EC-255, "Diagnosis Procedure".
NO >> INSPECTION END

7.PERFORM COMPONENT FUNCTION CHECK

Perform component function check. Refer to EC-253, "Component Function Check".
NOTE:
Use component function check to check the overall function of the heated oxygen sensor 2 circuit. During this check, a 1st trip DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-255, "Diagnosis Procedure".

Component Function Check

INFOID:0000000012406419

1.PERFORM COMPONENT FUNCTION CHECK-I

Without CONSULT
1. Start engine and warm it up to the normal operating temperature.

cardiagn.com

2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
6. Let engine idle for 1 minute.
7. Check the voltage between ECM harness connector terminals under the following conditions.

DTC	ECM			Condition	Voltage
	Connector	+ Terminal	– Terminal		
P0139	F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Revving up to 4,000 rpm under no load at least 10 times	A change of voltage should be more than 0.56 V for 1 second during this procedure.
P0159		32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 2.

2.PERFORM COMPONENT FUNCTION CHECK-II

Check the voltage between ECM harness connector terminals under the following conditions.
.

DTC	ECM			Condition	Voltage
	Connector	+ Terminal	– Terminal		
P0139	F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Keeping engine at idle for 10 minutes	A change of voltage should be more than 0.56 V for 1 second during this procedure.
P0159		32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 3.

3.PERFORM COMPONENT FUNCTION CHECK-III

Check the voltage between ECM harness connector terminals under the following conditions.

DTC	ECM			Condition	Voltage
	Connector	+ Terminal	– Terminal		
P0139	F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Coasting from 80 km/h (50 MPH) in D position	A change of voltage should be more than 0.56 V for 1 second during this procedure.
P0159		32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-255, "Diagnosis Procedure".

cardiagn.com

Diagnosis Procedure

INFOID:0000000012406420

1. CLEAR MIXTURE RATIO SELF-LEARNING VALUE

1. Clear the mixture ratio self-learning value. Refer to EC-151, "Description".
2. Run engine for at least 10 minutes at idle speed.

Is the 1st trip DTC P0171, P0172, P0174 or P0175 detected? Is it difficult to start engine?

YES >> Perform trouble diagnosis for DTC P0171, P0174 or P0172, P0175. Refer to EC-267, "DTC Logic" or EC-271, "DTC Logic".
NO >> GO TO 2.

2. CHECK HO2S2 GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect heated oxygen sensor 2 harness connector.
3. Disconnect ECM harness connector.
4. Check the continuity between heated oxygen sensor 2 (HO2S2) harness connector and ECM harness connector.

DTC	HO2S2			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0139	1	F86	4	F14	35	Existed
P0159	2	F85	4			

5. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

3. CHECK HO2S2 INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between HO2S2 harness connector and ECM harness connector.

DTC	HO2S2			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0139	1	F86	3	F14	41	Existed
P0159	2	F85	3		32	

2. Check the continuity between HO2S2 harness connector and ground, or ECM harness connector and ground.

DTC	HO2S2			Ground	Continuity
	Bank	Connector	Terminal		
P0139	1	F86	3	Ground	Not existed
P0159	2	F85	3		

DTC	ECM		Ground	Continuity
	Connector	Terminal		
P0139	F14	41	Ground	Not existed
P0159		32		

3. Also check harness for short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4. CHECK HEATED OXYGEN SENSOR 2

cardiagn.com

Check heated oxygen sensor 2. Refer to EC-256, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace malfunctioning heated oxygen sensor 2. Refer to EM-34, "Exploded View".

Component Inspection

INFOID:0000000012406421

1. INSPECTION START

Will CONSULT be used?


Will CONSULT be used?

YES >> GO TO 2.
NO >> GO TO 3.

2. CHECK HEATED OXYGEN SENSOR 2

With CONSULT

1. Turn ignition switch ON and select “DATA MONITOR” mode with CONSULT.
2. Start engine and warm it up to the normal operating temperature.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
5. Let engine idle for 1 minute.
6. Select “FUEL INJECTION” in “ACTIVE TEST” mode, and select “HO2S2 (B1)/(B2)” as the monitor item with CONSULT.
7. Check “HO2S2 (B1)/(B2)” at idle speed when adjusting “FUEL INJECTION” to ± 25%.

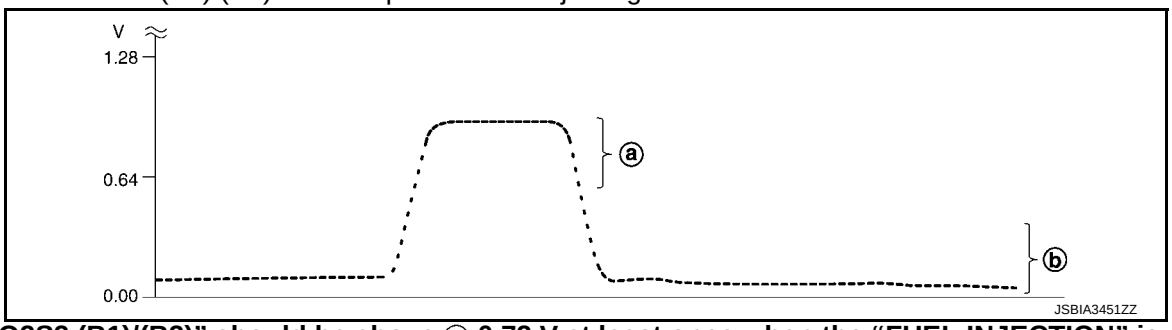

“HO2S2 (B1)/(B2)” should be above ⓐ 0.72 V at least once when the “FUEL INJECTION” is + 25%.
“HO2S2 (B1)/(B2)” should be below ⓑ 0.27 V at least once when the “FUEL INJECTION” is − 25%.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning heated oxygen sensor 2. Refer to EM-34, "Exploded View".

3. CHECK HEATED OXYGEN SENSOR 2-I

Without CONSULT

1. Start engine and warm it up to the normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
4. Let engine idle for 1 minute.
5. Check the voltage between ECM harness connector terminals under the following conditions.

ECM			Condition	Voltage
Connector	+	–		
	Terminal	Terminal		
F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Revving up to 4,000 rpm under no load at least 10 times	The voltage should be above 0.72 V at least once during this procedure. The voltage should be below 0.27 V at least once during this procedure.
	32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

cardiagn.com

YES >> INSPECTION END
NO >> GO TO 4.

4. CHECK HEATED OXYGEN SENSOR 2-II

Check the voltage between ECM harness connector terminals under the following conditions.

ECM			Condition	Voltage
Connector	+	–		
	Terminal	Terminal		
F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Keeping engine at idle for 10 minutes	The voltage should be above 0.72 V at least once during this procedure. The voltage should be below 0.27 V at least once during this procedure.
	32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 5.

5. CHECK HEATED OXYGEN SENSOR 2-III

Check the voltage between ECM harness connector terminals under the following conditions.

ECM			Condition	Voltage
Connector	+	–		
	Terminal	Terminal		
F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Coasting from 80 km/h (50 MPH) with selector lever in the D position	The voltage should be above 0.72 V at least once during this procedure. The voltage should be below 0.27 V at least once during this procedure.
	32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning heated oxygen sensor 2. Refer to EM-34, "Exploded View".

cardiagn.com

P0141, P0161 HEATED OXYGEN SENSOR 2 HEATER

DTC Logic

INFOID:0000000012406422

DTC DETECTION LOGIC

DTC No.	CONSULT screen terms (Trouble diagnosis content)	DTC detecting condition	Possible cause
P0141	HO2S2 HTR (B1) (O2 sensor heater circuit bank 1 sensor 2)	• Sensor temperature does not increase for 100 consecutive seconds or more despite the maximum operating condition of the heated oxygen sensor 2 heater. • Sensor temperature does not decrease for 100 consecutive seconds or more despite the inactive condition of the heated oxygen sensor 2 heater.	• Harness or connectors (The heated oxygen sensor 2 heater circuit is open or shorted.) • Heated oxygen sensor 2 heater
P0161	HO2S2 HTR (B2) (O2 sensor heater circuit bank 2 sensor 2)		

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is between 10.5 V and 16 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and warm it up to the normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 60 seconds under no load.
6. Let engine idle for 120 seconds.
7. Check 1st trip DTC.

Is 1st tip DTC detected?

YES >> Proceed to EC-258, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406423

1.CHECK HO2S2 POWER SUPPLY

1. Disconnect heated oxygen sensor 2 (HO2S2) harness connector.
2. Turn ignition switch ON.
3. Check the voltage between HO2S2 harness connector and ground.

DTC	HO2S2			Ground	Voltage
	Bank	Connector	Terminal		
P0141	1	F86	1	Ground	Battery voltage
P0161	2	F85	1		

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

cardiagn.com

2.CHECK HO2S2 SENSOR 1 POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Check the continuity between HO2S2 harness connector and IPDM E/R harness connector.

DTC	HO2S2			IPDM E/R		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0141	1	F86	1	F12	56	Existed
P0161	2	F85	1			

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

3.CHECK HO2S2 HEATER OUTPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between HO2S2 harness connector and ECM harness connector.

DTC	HO2S2			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0141	1	F86	2	F14	7	Existed
P0161	2	F85	2		47	

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK HEATED OXYGEN SENSOR 2 HEATER

Check heated oxygen sensor 2 heater. Refer to EC-259, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace malfunctioning heated oxygen sensor 2. Refer to EM-34, "Removal and Installation".

Component Inspection

INFOID:0000000012406424

1.CHECK HEATED OXYGEN SENSOR 2 HEATER

1. Turn ignition switch OFF.
2. Disconnect heated oxygen sensor 2 harness connector.
3. Check resistance between HO2S2 terminals as per the following.

+	–	Resistance (Approx.)
Heated oxygen sensor 2		
Terminal		
1	2	3.0 Ω [at 25°C (77°F)]
3	1	∞ Ω (Continuity should not exist)
	2	
	4	
4	1	
	2	
	3	

Is the inspection result normal?

cardiagn.com

YES >> INSPECTION END
NO >> Replace malfunctioning heated oxygen sensor 2. Refer to EM-34, "Removal and Installation".

cardiagn.com

P014C, P014D, P014E, P014F, P015A, P015B, P015C, P015D A/F SENSOR 1

DTC Logic

INFOID:0000000012406425

DTC DETECTION LOGIC

To judge malfunctions, this diagnosis measures response time of the A/F signal computed by ECM from the A/F sensor 1 signal. The time is compensated by engine operating (speed and load), fuel feedback control constant, and the A/F sensor 1 temperature index. Judgment is based on whether the compensated time (the A/F signal cycling time index) is inordinately long or not.

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible Cause
P014C	Air fuel ratio (A/F) sensor 1 (bank 1) circuit slow response	• The response time of a A/F sensor 1 signal delays more than the specified time computed by ECM.	• Harness or connectors (The A/F sensor 1 circuit is open or shorted.) • A/F sensor 1
P014D			
P015A	Air fuel ratio (A/F) sensor 1 (bank 1) circuit delayed response		
P015B			
P014E	Air fuel ratio (A/F) sensor 1 (bank 2) circuit slow response		
P014F			
P015C	Air fuel ratio (A/F) sensor 1 (bank 2) circuit delayed response		
P015D			

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 11 V at idle.

Do you have CONSULT?

YES >> GO TO 2.
NO >> GO TO 6.

2.PERFORM DTC CONFIRMATION PROCEDURE-1

With CONSULT

1. Start engine and warm it up to normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1minute under no load.
6. Let engine idle for 1 minute.
7. Increase the engine speed up to about 3,600 rpm and keep it for 10 seconds.
8. Fully release accelerator pedal and then let engine idle for about 1 minute.
9. Check the items status of “DATA MONITOR” as follows.

NOTE:

If “PRSNT” changed to “ABSNT”, refer to EC-230, "Component Function Check".

cardiagn.com

DTC	Data monitor item	Status
• P014C • P014D • P015A • P015B	A/F SEN1 DIAG3 (B1)	PRSNT
• P014E • P014F • P015C • P015D	A/F SEN1 DIAG3 (B2)	

Is “PRSNT” displayed on CONSULT screen?

YES >> GO TO 4.
NO >> GO TO 3.

3. PERFORM DTC CONFIRMATION PROCEDURE-2

With CONSULT

Perform DTC confirmation procedure-1 again.

Is “PRSNT” displayed on CONSULT screen?

YES >> GO TO 4.
NO >> Refer to EC-230, "Component Function Check".

4. PERFORM DTC CONFIRMATION PROCEDURE-2

With CONSULT

1. Wait for about 20 seconds at idle.
2. Check the items status of “DATA MONITOR” as follows.
   NOTE:
   If “CMPLT” changed to “INCMP”, refer to EC-230, "Component Function Check".

DTC	Data monitor item	Status
• P014C • P014D • P015A • P015B	A/F SEN1 DIAG1 (B1)	CMPLT
	A/F SEN1 DIAG2 (B1)	
• P014E • P014F • P015C • P015D	A/F SEN1 DIAG1 (B2)	
	A/F SEN1 DIAG2 (B2)	

Is “CMPLT” displayed on CONSULT screen?

YES >> GO TO 5.
NO >> Refer to EC-230, "Component Function Check".

5. PERFORM SELF-DIAGNOSIS

With CONSULT

Check the “SELF-DIAG RESULT”.

Is any DTC detected?

YES >> Proceed to EC-263, "Diagnosis Procedure".
NO >> INSPECTION END

6. CHECK AIR-FUEL RATIO SELF-LEARNING VALUE

With GST

1. Start engine and warm it up to normal operating temperature.
2. Select Service $01 with GST.
3. Calculate the total value of “Short term fuel trim” and “Long term fuel trim” indications.

Is the total percentage within ±15%?

YES >> GO TO 8.
NO >> GO TO 7.

cardiagn.com

7.DETECT MALFUNCTIONING PART

Check the following.
- Intake air leaks
- Exhaust gas leaks
- Incorrect fuel pressure
- Lack of fuel
- Fuel injector
- Incorrect PCV hose connection
- PCV valve
- Mass air flow sensor

>> Repair or replace malfunctioning part.

8.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
5. Let engine idle for 1 minute.
6. Increase the engine speed up to about 3,600 rpm and keep it for 10 seconds.
7. Fully release accelerator pedal and then let engine idle for about 1 minute.
8. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-263, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406426


1.RETIGHTEN A/F SENSOR 1

Loosen and retighten the A/F sensor 1. Refer to EM-34, "Exploded View".

>> GO TO 2.

2.CHECK EXHAUST GAS LEAK

1. Start engine and run it at idle.
2. Listen for an exhaust gas leak before three way catalyst 1.

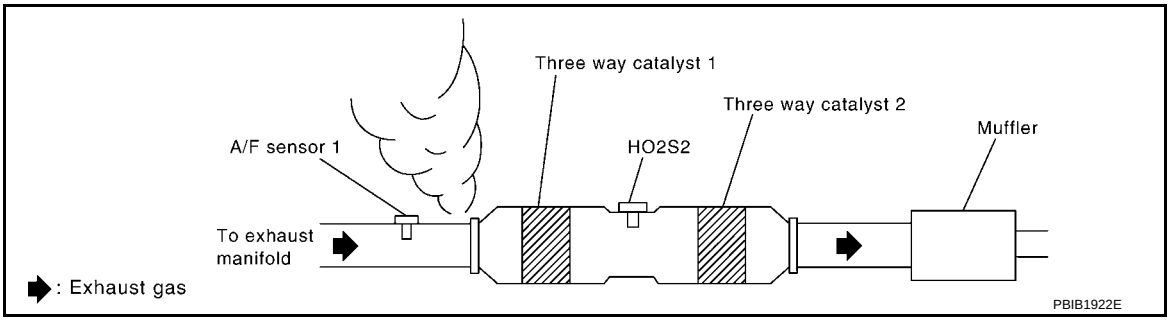

Is exhaust gas leak detected?

YES >> Repair or replace.
NO >> GO TO 3.

3.CHECK FOR INTAKE AIR LEAK

Listen for an intake air leak after the mass air flow sensor.

Is intake air leak detected?

YES >> Repair or replace.
NO >> GO TO 4.

4.CLEAR THE MIXTURE RATIO SELF-LEARNING VALUE

cardiagn.com

1. Clear the mixture ratio self-learning value. Refer to EC-151, "Description".
2. Run engine for at least 10 minutes at idle speed.

Is the 1st trip DTC P0171, P0172, P0174 or P0175 detected? Is it difficult to start engine?

YES >> Perform trouble diagnosis for DTC P0171, P0174 or P0172, P0175. Refer to EC-267, "DTC Logic" or EC-271, "DTC Logic".
NO >> GO TO 5.

5. CHECK AIR FUEL RATIO (A/F) SENSOR 1 POWER SUPPLY

1. Disconnect A/F sensor 1 harness connector.
2. Turn ignition switch ON.
3. Check the voltage between A/F sensor 1 harness connector and ground.

DTC	A/F sensor 1			Ground	Voltage
	Bank	Connector	Terminal		
• P014C • P014D • P015A • P015B	1	F28	1	Ground	Battery voltage
• P014E • P014F • P015C • P015D	2	F65	1		

Is the inspection result normal?

YES >> GO TO 7.
NO >> GO TO 6.

6. CHECK AIR FUEL RATIO (A/F) SENSOR 1 POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Check the continuity between A/F sensor 1 harness connector and IPDM E/R harness connector.

DTC	A/F sensor 1			IPDM E/R		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
• P014C • P014D • P015A • P015B	1	F28	1	F12	57	Existed
• P014E • P014F • P015C • P015D	2	F65	1			

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

7. CHECK A/F SENSOR 1 INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between A/F sensor 1 harness connector and ECM harness connector.

cardiagn.com

DTC	A/F sensor 1			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
• P014C • P014D • P015A • P015B	1	F28	3	F15	66	Existed
			4		67	
• P014E • P014F • P015C • P015D	2	F65	3		76	
			4		77	

4. Check the continuity between A/F sensor 1 harness connector and ground, or ECM harness connector and ground.

DTC	A/F sensor 1			Ground	Continuity
	Bank	Connector	Terminal		
• P014C • P014D • P015A • P015B	1	F28	3	Ground	Not existed
			4		
• P014E • P014F • P015C • P015D	2	F65	3		
			4		

DTC	ECM			Ground	Continuity
	Bank	Connector	Terminal		
• P014C • P014D • P015A • P015B	1	F15	66	Ground	Not existed
			67		
• P014E • P014F • P015C • P015D	2		76		
			77		

5. Also check harness for short to power.

Is the inspection result normal?

YES >> GO TO 8.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

8. CHECK AIR FUEL RATIO (A/F) SENSOR 1 HEATER

Check air fuel ratio (A/F) sensor 1 heater. Refer to EC-191, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 9.
NO >> Replace malfunctioning air fuel ratio (A/F) sensor 1. Refer to EM-34, "Exploded View".

9. CHECK MASS AIR FLOW SENSOR

Check both mass air flow sensor (bank 1 and bank 2).
Refer to EC-203, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 10.
NO >> Replace malfunctioning mass air flow sensor. Refer to EM-27, "Exploded View".

10. CHECK PCV VALVE

Check PCV valve. Refer to EC-512, "Work Procedure".

Is the inspection result normal?

cardiagn.com

YES >> GO TO 11.
NO >> Repair or replace PCV valve. Refer to EM-54, "Exploded View".

11. CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace malfunctioning air fuel ratio (A/F) sensor 1. Refer to EM-34, "Exploded View".
NO >> Repair or replace error-detected parts.

cardiagn.com

P0171, P0174 FUEL INJECTION SYSTEM FUNCTION

DTC Logic

INFOID:0000000012406427

DTC DETECTION LOGIC

With the Air/Fuel Mixture Ratio Self-Learning Control, the actual mixture ratio can be brought closely to the theoretical mixture ratio based on the mixture ratio feedback signal from A/F sensor 1. The ECM calculates the necessary compensation to correct the offset between the actual and the theoretical ratios.
In case the amount of the compensation value is extremely large (the actual mixture ratio is too lean), the ECM judges the condition as the fuel injection system malfunction and illuminates the MIL (2 trip detection logic).

Sensor	Input signal to ECM	ECM function	Actuator
A/F sensor 1	Density of oxygen in exhaust gas (Mixture ratio feedback signal)	Fuel injection control	Fuel injector

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0171	Fuel injection system too lean (bank 1)	• Fuel injection system does not operate properly. • The amount of mixture ratio compensation is too large. (The mixture ratio is too lean.)	• Intake air leakage • A/F sensor 1 • Fuel injector • Exhaust gas leakage • Incorrect fuel pressure • Lack of fuel • Mass air flow sensor • Incorrect PCV hose connection
P0174	Fuel injection system too lean (bank 2)		

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE-I

1. Clear the mixture ratio self-learning value. Refer to EC-151, "Description".
2. Start engine.

Is it difficult to start engine?

YES >> GO TO 3.
NO >> GO TO 4.

3.RESTART ENGINE

If it is difficult to start engine, the fuel injection system has a malfunction, too.
Crank engine while depressing accelerator pedal.
NOTE:
- **When depressing accelerator pedal three-fourths (3/4) or more, the control system does not start the engine. Do not depress accelerator pedal too much.**

Does engine start?

YES >> Proceed to EC-268, "Diagnosis Procedure".
NO >> Check exhaust and intake air leakage visually.

4.PERFORM DTC CONFIRMATION PROCEDURE-II

1. Keep engine idle for at least 5 minutes.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

cardiagn.com

YES >> Proceed to EC-268, "Diagnosis Procedure".
NO >> GO TO 5.

5. PERFORM DTC CONFIRMATION PROCEDURE-III

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Start engine.
3. Maintain the following conditions for at least 10 consecutive minutes.
   Hold the accelerator pedal as steady as possible.

VHCL SPEED SE	50 - 120 km/h (31 - 75 mph)

CAUTION:
Always drive vehicle at a safe speed.

4. Check 1st trip DTC.

Is 1st trip DTC detected?


YES >> Proceed to EC-268, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406428

1. CHECK EXHAUST GAS LEAKAGE

1. Start engine and run it at idle.
2. Listen for an exhaust gas leakage before three way catalyst (manifold).

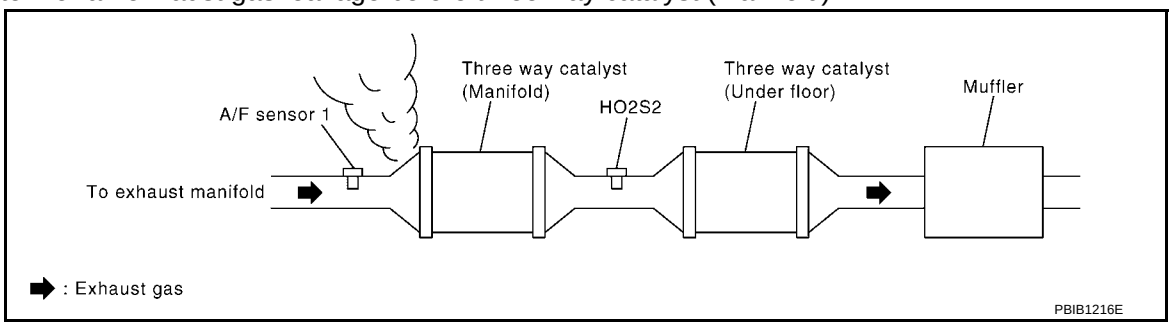

Is exhaust gas leakage detected?

YES >> Repair or replace malfunctioning part.
NO >> GO TO 2.

2. CHECK FOR INTAKE AIR LEAKAGE

1. Listen for an intake air leakage after the mass air flow sensor.
2. Check PCV hose connection.

Is intake air leakage detected?

YES >> Repair or replace malfunctioning part.
NO >> GO TO 3.

3. CHECK A/F SENSOR 1 INPUT SIGNAL CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect corresponding A/F sensor 1 harness connector.
3. Disconnect ECM harness connector.
4. Check the continuity between A/F sensor 1 harness connector and ECM harness connector.

DTC	A/F sensor 1			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0171	1	F28	3	F15	66	Existed
			4		67	
P0174	2	F65	3		76	
			4		77	

cardiagn.com

5. Check the continuity between A/F sensor 1 harness connector and ground, or ECM harness connector and ground.

DTC	A/F sensor 1			Ground	Continuity
	Bank	Connector	Terminal		
P0171	1	F28	3	Ground	Not existed
			4		
P0174	2	F65	3		
			4		

DTC	ECM		Ground	Continuity
	Connector	Terminal		
P0171	F15	66	Ground	Not existed
		67		
P0174		76		
		77		

6. Also check harness for short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4. CHECK FUEL PRESSURE

1. Release fuel pressure to zero. Refer to EC-153, "Work Procedure".
2. Install fuel pressure gauge kit [SST: — (J-44321)] and check fuel pressure. Refer to EC-153, "Work Procedure".

At idling: Approximately 350 kPa (3.57 kg/cm^2, 51 psi)

Is the inspection result normal?

YES >> GO TO 6.
NO >> GO TO 5.

5. DETECT MALFUNCTIONING PART

Check fuel hoses and fuel tubes for clogging.

Is the inspection result normal?

YES >> Replace “fuel filter and fuel pump assembly”. Refer to FL-6, "Exploded View".
NO >> Repair or replace malfunctioning part.

6. CHECK MASS AIR FLOW SENSOR

Check MAF sensor. Refer to EC-203, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 7.
NO >> Check connectors for rusted terminals or loose connections in the mass air flow sensor circuit or ground. Refer to EC-206, "Diagnosis Procedure".

7. CHECK FUNCTION OF FUEL INJECTOR

With CONSULT

1. Start engine.
2. Perform “POWER BALANCE” in “ACTIVE TEST” mode with CONSULT.
3. Check that each circuit produces a momentary engine speed drop.

With GST


1. Let engine idle.

cardiagn.com

2. Listen to each fuel injector operating sound.

Is the inspection result normal?

YES >> GO TO 8.
NO >> Perform trouble diagnosis for FUEL INJECTOR, refer to EC-479, "Diagnosis Procedure".

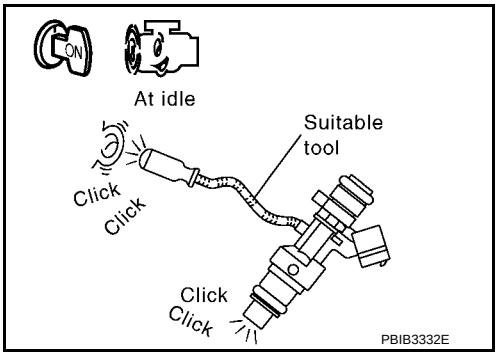

8. CHECK FUEL INJECTOR

1. Turn ignition switch OFF.
2. Confirm that the engine is cooled down and there are no fire hazards near the vehicle.
3. Disconnect all fuel injector harness connectors.
4. Remove fuel tube assembly. Refer to EM-49, "Exploded View".
   Keep fuel hose and all fuel injectors connected to fuel tube.
5. For DTC P0171, reconnect fuel injector harness connectors on bank 1.
   For DTC P0174, reconnect fuel injector harness connectors on bank 2.
6. Disconnect all ignition coil harness connectors.
7. Prepare pans or saucers under each fuel injector.
8. Crank engine for about 3 seconds.
   For DTC P0171, check that fuel sprays out from fuel injectors on bank 1.
   For DTC P0174, check that fuel sprays out from fuel injectors on bank 2.

Fuel should be sprayed evenly for each fuel injector.

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace fuel injectors from which fuel does not spray out. Always replace O-ring with new ones. Refer to EM-49, "Exploded View".

cardiagn.com

P0172, P0175 FUEL INJECTION SYSTEM FUNCTION

DTC Logic

INFOID:0000000012406429

DTC DETECTION LOGIC

With the Air/Fuel Mixture Ratio Self-Learning Control, the actual mixture ratio can be brought closely to the theoretical mixture ratio based on the mixture ratio feedback signal from A/F sensor 1. The ECM calculates the necessary compensation to correct the offset between the actual and the theoretical ratios.
In case the amount of the compensation value is extremely large (the actual mixture ratio is too rich), the ECM judges the condition as the fuel injection system malfunction and illuminates the MIL (2 trip detection logic).

Sensor	Input signal to ECM	ECM function	Actuator
A/F sensor 1	Density of oxygen in exhaust gas (Mixture ratio feedback signal)	Fuel injection control	Fuel injector

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0172	Fuel injection system too rich (bank 1)	• Fuel injection system does not operate properly. • The amount of mixture ratio compensation is too large. (The mixture ratio is too rich.)	• A/F sensor 1 • Fuel injector • Exhaust gas leakage • Incorrect fuel pressure • Mass air flow sensor
P0175	Fuel injection system too rich (bank 2)		

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE-I

1. Clear the mixture ratio self-learning value. Refer to EC-151, "Description".
2. Start engine.

Is it difficult to start engine?

YES >> GO TO 3.
NO >> GO TO 4.

3.RESTART ENGINE

If it is difficult to start engine, the fuel injection system has a malfunction, too.
Crank engine while depressing accelerator pedal.

NOTE:

- **When depressing accelerator pedal three-fourths (3/4) or more, the control system does not start the engine. Do not depress accelerator pedal too much.**

Does engine start?

YES >> Proceed to EC-272, "Diagnosis Procedure".
NO >> Check exhaust and intake air leakage visually.

4.PERFORM DTC CONFIRMATION PROCEDURE-II

1. Keep engine idle for at least 5 minutes.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-272, "Diagnosis Procedure".
NO >> GO TO 5.

5.PERFORM DTC CONFIRMATION PROCEDURE-III

cardiagn.com

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Start engine.
3. Maintain the following conditions for at least 10 consecutive minutes.
   Hold the accelerator pedal as steady as possible.

VHCL SPEED SE	50 - 120 km/h (31 - 75 mph)

CAUTION:
Always drive vehicle at a safe speed.

4. Check 1st trip DTC.

Is 1st trip DTC detected?


YES >> Proceed to EC-272, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406430

1.CHECK EXHAUST GAS LEAKAGE

1. Start engine and run it at idle.
2. Listen for an exhaust gas leakage before three way catalyst (manifold).

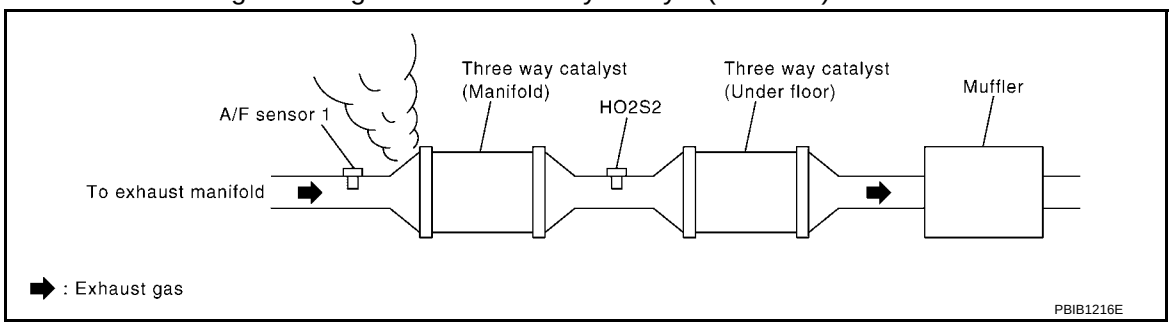

Is exhaust gas leakage detected?

YES >> Repair or replace malfunctioning part.
NO >> GO TO 2.

2.CHECK FOR INTAKE AIR LEAKAGE

Listen for an intake air leakage after the mass air flow sensor.

Is intake air leakage detected?

YES >> Repair or replace malfunctioning part.
NO >> GO TO 3.

3.CHECK A/F SENSOR 1 INPUT SIGNAL CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect corresponding A/F sensor 1 harness connector.
3. Disconnect ECM harness connector.
4. Check the continuity between A/F sensor 1 harness connector and ECM harness connector.

DTC	A/F sensor 1			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0172	1	F28	3	F15	66	Existed
			4		67	
P0175	2	F65	3		76	
			4		77	

5. Check the continuity between A/F sensor 1 harness connector and ground, or ECM harness connector and ground.

cardiagn.com

DTC	A/F sensor 1			Ground	Continuity
	Bank	Connector	Terminal		
P0172	1	F28	3	Ground	Not existed
			4		
P0175	2	F65	3		
			4		

DTC	ECM		Ground	Continuity
	Connector	Terminal		
P0172	F15	66	Ground	Not existed
		67		
P0175		76		
		77		

6. Also check harness for short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4. CHECK FUEL PRESSURE

1. Release fuel pressure to zero. Refer to EC-153, "Work Procedure".
2. Install fuel pressure gauge kit [SST: — (J-44321)] and check fuel pressure. Refer to EC-153, "Work Procedure".

At idling: Approximately 350 kPa (3.57 kg/cm^2, 51 psi)

Is the inspection result normal?

YES >> GO TO 5.
NO >> Replace “fuel filter and fuel pump assembly”. Refer to EM-49, "Exploded View".

5. CHECK MASS AIR FLOW SENSOR

Check MAF sensor. Refer to EC-203, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 6.
NO >> Check connectors for rusted terminals or loose connections in the mass air flow sensor circuit or ground. Refer to EC-206, "Diagnosis Procedure".

6. CHECK FUNCTION OF FUEL INJECTOR

With CONSULT

1. Start engine.
2. Perform “POWER BALANCE” in “ACTIVE TEST” mode with CONSULT.
3. Check that each circuit produces a momentary engine speed drop.

With GST


1. Let engine idle.

cardiagn.com

2. Listen to each fuel injector operating sound.

Is the inspection result normal?

YES >> GO TO 7.
NO >> Perform trouble diagnosis for FUEL INJECTOR, refer to EC-479, "Diagnosis Procedure".

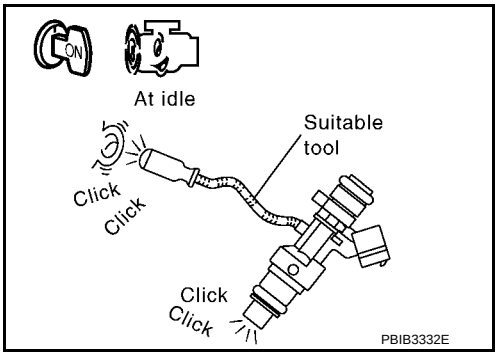

7. CHECK FUEL INJECTOR

1. Remove fuel injector assembly. Refer to EM-49, "Exploded View".
   Keep fuel hose and all fuel injectors connected to fuel tube.
2. Confirm that the engine is cooled down and there are no fire hazards near the vehicle.
3. Disconnect all fuel injector harness connectors.
4. Disconnect all ignition coil harness connectors.
5. Prepare pans or saucers under each fuel injectors.
6. Crank engine for about 3 seconds.
   Check fuel does not drip from fuel injector.

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace the fuel injectors from which fuel is dripping. Always replace O-ring with new one. Refer to EM-49, "Exploded View".

cardiagn.com

P0181 FTT SENSOR

DTC Logic

INFOID:0000000012406431

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis (Trouble diagnosis content)	DTC detecting condition		Possible cause
P0181	FTT SENSOR [Fuel tank temperature (FTT) sensor circuit range/performance]	A)	Rationally incorrect voltage from the sensor is sent to ECM, compared with the voltage signals from ECT sensor and intake air temperature sensor.	• Harness or connectors (The FTT sensor circuit is open or shorted) • FTT sensor
		B)	The comparison result of signals transmitted to ECM from each temperature sensor (IAT sensor, ECT sensor, EOT sensor, and FTT sensor) shows that the voltage signal of the FTT sensor is higher/lower than that of other temperature sensors when the engine is started with its cold state.	• Harness or connectors (High or low resistance in the FTT sensor circuit) • FTT sensor

DTC CONFIRMATION PROCEDURE

1.INSPECTION START

Is it necessary to erase permanent DTC?

YES >> GO TO 7.
NO >> GO TO 2.

2.PRECONDITIONING

If DTC CONFIRMATION PROCEDURE has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION A-I

1. Turn ignition switch ON and wait at least 10 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-277, "Diagnosis Procedure".
NO >> GO TO 4.

4.CHECK ENGINE COOLANT TEMPERATURE

With CONSULT
1. Select “COOLAN TEMP/S” in “DATA MONITOR” with CONSULT.
2. Check “COOLAN TEMP/S” value.

With GST
Follow the procedure “With CONSULT” above.

“COOLAN TEMP/S” less than 60°C (140°F)?

YES >> INSPECTION END
NO >> GO TO 5.

5.PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION A-II

With CONSULT
1. Cool engine down until “COOLAN TEMP/S” is less than 60°C (140°F).

cardiagn.com

2. Wait at least 10 seconds.
3. Check 1st trip DTC.

With GST
Follow the procedure “With CONSULT” above.

Is 1st trip DTC detected?

YES >> Proceed to EC-277, "Diagnosis Procedure".
NO >> GO TO 6.

6. PERFORM COMPONENT FUNCTION CHECK (FOR MALFUNCTION B)

Perform component function check. Refer to EC-276, "Component Function Check".

NOTE:
Use the component function check to check the overall function of the FTT sensor circuit. During this check, a 1st trip DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-277, "Diagnosis Procedure".

7. PRECONDITIONING

If DTC CONFIRMATION PROCEDURE has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

- **Before performing the following procedure, do not add fuel.**
- **Before performing the following procedure, check that fuel level is between 1/4 and 4/4.**
- **Before performing the following procedure, confirm that battery voltage is 11 V or more at idle.**

>> GO TO 8.

8. PERFORM DTC CONFIRMATION PROCEDURE B

1. Start engine and let it idle for 60 minutes.
2. Move the vehicle to a cool place.
   NOTE:
   Cool the vehicle in an environment of ambient air temperature between −10°C (14°F) and 35°C (95°F).
3. Turn ignition switch OFF and leave the vehicle for 12 hours.
   CAUTION:
   Never turn ignition switch ON during this procedure.
   NOTE:
   The vehicle must be cooled with the hood open.
4. Start engine and let it idle for 5 minutes or more.
   CAUTION:
   Never turn ignition switch OFF during idling.
5. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-277, "Diagnosis Procedure".
NO >> INSPECTION END

Component Function Check


INFOID:0000000012406432

1. CHECK FUEL TANK TEMPERATURE (FTT) SENSOR

1. Turn ignition switch OFF.
2. Disconnect fuel level sensor unit and fuel pump harness connector.
3. Remove fuel level sensor unit. Refer to FL-6, "Exploded View".

cardiagn.com

4. Check resistance between fuel level sensor unit and fuel pump terminals by heating with hot water as shown in the figure.

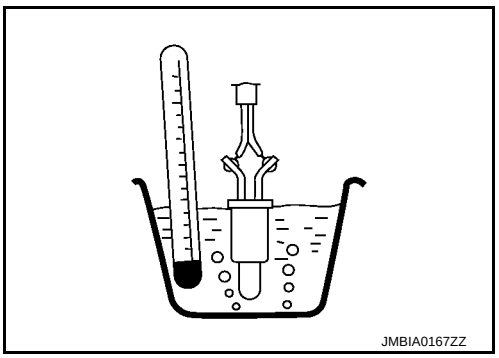

Terminals	Condition		Resistance (kΩ)
4 and 5	Temperature [°C (°F)]	20 (68)	2.3 – 2.7
		50 (122)	0.79 – 0.90

Is the inspection result normal?

YES >> GO TO 2.
NO >> Proceed to EC-277, "Diagnosis Procedure".

2.CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-277, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406433

1.INSPECTION START

Confirm the detected malfunction (A or B). Refer to EC-275, "DTC Logic".

Which malfunction is detected?

A >> GO TO 2.
B >> GO TO 5.

2.CHECK FUEL TANK TEMPERATURE SENSOR POWER SUPPLY

1. Turn ignition switch OFF.
2. Disconnect fuel level sensor unit and fuel pump harness connector.
3. Turn ignition switch ON.
4. Check the voltage between fuel level sensor unit and fuel pump harness connector and ground.

Fuel level sensor unit and fuel pump		Ground	Voltage
Connector	Terminal		
B40	4	Ground	Approx. 5 V

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 3.

3.CHECK FUEL TANK TEMPERATURE SENSOR POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between fuel tank temperature sensor harness connector and ECM harness connector.

Fuel level sensor unit and fuel pump		ECM		Continuity
Connector	Terminal	Connector	Terminal	
B40	4	E19	128	Existed

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

4.CHECK FUEL TANK TEMPERATURE SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.

cardiagn.com

3. Check the continuity between fuel level sensor unit and fuel pump harness connector and ECM harness connector.

Fuel level sensor unit and fuel pump		ECM		Continuity
Connector	Terminal	Connector	Terminal	
B40	5	E19	148	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit, short to ground or short to power in harness or connector.

5. CHECK FUEL TANK TEMPERATURE SENSOR

Check fuel tank temperature sensor. Refer to EC-278, "Component Inspection".

Is the inspection result normal?


YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace fuel level sensor unit and fuel pump. Refer to FL-6, "Exploded View".

Component Inspection

INFOID:0000000012406434

1. CHECK FUEL TANK TEMPERATURE SENSOR

1. Turn ignition switch OFF.
2. Remove fuel level sensor unit. Refer to FL-6, "Exploded View".
3. Check resistance between “fuel level sensor unit and fuel pump” terminals by heating with hot water as shown in the figure.

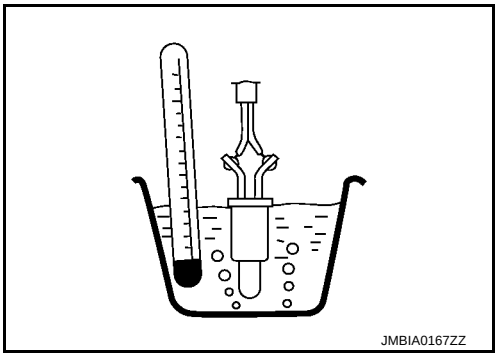

Terminals	Condition		Resistance
4 and 5	Temperature [°C (°F)]	20 (68)	2.3 - 2.7 kΩ
		50 (122)	0.79 - 0.90 kΩ

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace fuel level sensor unit and fuel pump. Refer to FL-6, "Exploded View".

cardiagn.com

P0182, P0183 FTT SENSOR

DTC Logic

INFOID:0000000012406435

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0182	Fuel tank temperature sensor circuit low input	An excessively low voltage from the sensor is sent to ECM.	• Harness or connectors (The sensor circuit is open or shorted.) • Fuel tank temperature sensor
P0183	Fuel tank temperature sensor circuit high input	An excessively high voltage from the sensor is sent to ECM.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON and wait at least 5 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-279, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406436

1.CHECK GROUND CONNECTION

1. Turn ignition switch OFF.
2. Check ground connection E38. Refer to Ground Inspection in GI-44, "Circuit Inspection".

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair or replace ground connection.

2.CHECK FUEL TANK TEMPERATURE SENSOR POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect “fuel level sensor unit and fuel pump” harness connector.
3. Turn ignition switch ON.
4. Check the voltage between “fuel level sensor unit and fuel pump” harness connector and ground.

Fuel level sensor unit and fuel pump		Ground	Voltage
Connector	Terminal		
B40	4	Ground	Approx. 5 V

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 3.

3.DETECT MALFUNCTIONING PART

Check the following.
- Harness connectors E104, B4
- Harness for open or short between ECM and “fuel level sensor unit and fuel pump”

cardiagn.com

>> Repair open circuit, short to ground or short to power in harness or connector.

4. CHECK FUEL TANK TEMPERATURE SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between “fuel level sensor unit and fuel pump” harness connector and ECM harness connector.

Fuel level sensor unit and fuel pump		ECM		Continuity
Connector	Terminal	Connector	Terminal	
B40	5	E19	148	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 6.
NO >> GO TO 5.

5. DETECT MALFUNCTIONING PART

Check the following.
- Harness connectors E105, M11
- Harness connectors M77, B11
- Harness for open or short between “fuel level sensor unit and fuel pump” and ECM

>> Repair open circuit, short to ground or short to power in harness or connector.

6. CHECK FUEL TANK TEMPERATURE SENSOR

Refer to EC-280, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 7.
NO >> Replace “fuel level sensor unit and fuel pump”.

7. CHECK INTERMITTENT INCIDENT

Refer to GI-41, "Intermittent Incident".


>> INSPECTION END

Component Inspection

INFOID:0000000012406437

1. CHECK FUEL TANK TEMPERATURE SENSOR

1. Turn ignition switch OFF.
2. Remove fuel level sensor unit. Refer to FL-6, "Exploded View".
3. Check resistance between “fuel level sensor unit and fuel pump” terminals by heating with hot water as shown in the figure.

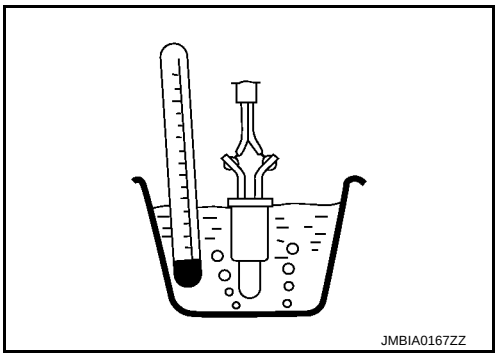

Terminals	Condition		Resistance
4 and 5	Temperature [°C (°F)]	20 (68)	2.3 - 2.7 kΩ
		50 (122)	0.79 - 0.90 kΩ

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace fuel level sensor unit and fuel pump. Refer to FL-6, "Exploded View".

cardiagn.com

P0196 EOT SENSOR

DTC Logic

INFOID:0000000012406438

DTC DETECTION LOGIC

NOTE:
If DTC P0196 is displayed with DTC P0197 or P0198, first perform the trouble diagnosis for DTC P0197 or P0198. Refer to EC-285, "DTC Logic".

DTC No.	Trouble diagnosis (Trouble diagnosis content)	DTC detecting condition		Possible cause
P0196	EOT SENSOR [Engine oil temperature (EOT) sensor circuit range/performance]	A)	Rationally incorrect voltage from the sensor is sent to ECM, compared with the voltage signals from EOT sensor and intake air temperature sensor.	• Harness or connectors (The EOT sensor circuit is open or shorted) • EOT sensor
		B)	The comparison result of signals transmitted to ECM from each temperature sensor (IAT sensor, ECT sensor, FTT sensor, and EOT sensor) shows that the signal voltage of the EOT sensor is higher/lower than that of other temperature sensors when the engine is started with its cold state.	• Harness or connectors (High or low resistance in the EOT sensor circuit) • EOT sensor

DTC CONFIRMATION PROCEDURE

1.INSPECTION START

Is it necessary to erase permanent DTC?

YES >> GO TO 6.
NO >> GO TO 2.

2.PRECONDITIONING

If DTC CONFIRMATION PROCEDURE has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is 11 V or more at idle.

>> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE FOR MULFUNCTION A-I

1. Start engine and warm it up to normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Start engine and let it idle for 5 minutes and 10 seconds.
6. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-283, "Diagnosis Procedure".
NO >> GO TO 4.

4.PERFORM DTC CONFIRMATION PROCEDURE FOR MULFUNCTION A-II

With CONSULT
1. Select “DATA MONITOR” mode with CONSULT.
2. Check that “COOLAN TEMP/S” indicates above 70°C (158°F).
   If it is above 70°C (158°F), go to the following steps.

cardiagn.com

If it is below 70°C (158°F), warm engine up until “COOLAN TEMP/S” indicates more than 70°C (158°F). Then perform the following steps.

3. Turn ignition switch OFF and soak the vehicle in a cool place.
4. Turn ignition switch ON.
   NOTE:
   Do not turn ignition switch OFF until step 8.
5. Select “DATA MONITOR” mode with CONSULT.
6. Check the following.

COOLAN TEMP/S	Below 40°C (104°F)
INT/A TEMP SE	Below 40°C (104°F)
Difference between “COOLAN TEMP/S” and “INT/A TEMP SE”	Within 6°C (11°F)

If they are within the specified range, perform the following steps.
If they are out of the specified range, soak the vehicle to meet the above conditions. Then perform the following steps.
NOTE:
- **Do not turn ignition switch OFF.**
- **If it is supposed to need a long period of time, do not deplete the battery.**

7. Start engine and let it idle for 5 minutes.
8. Check 1st trip DTC.

With GST
Follow the procedure “With CONSULT” above.

Is 1st trip DTC detected?

YES >> Proceed to EC-283, "Diagnosis Procedure".
NO >> GO TO 5.

5. PERFORM COMPONENT FUNCTION CHECK (FOR MULFUNCTION B)

Perform component function check. Refer to EC-283, "Component Function Check".
NOTE:
Use the component function check to check the overall function of the EOT sensor circuit. During this check, a 1st trip DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-283, "Diagnosis Procedure".

6. PRECONDITIONING

If DTC CONFIRMATION PROCEDURE has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
- **Before performing the following procedure, do not add fuel.**
- **Before performing the following procedure, check that fuel level is between 1/4 and 4/4.**
- **Before performing the following procedure, confirm that battery voltage is 11 V or more at idle.**

>> GO TO 7.

7. PERFORM DTC CONFIRMATION PROCEDURE B

1. Move the vehicle to a cool place.
   NOTE:
   Cool the vehicle in an environment of ambient air temperature between –10°C (14°F) and 35°C (95°F).
2. Turn ignition switch OFF and leave the vehicle for 12 hours.
   CAUTION:
   Never turn ignition switch ON during this procedure.
   NOTE:
   The vehicle must be cooled with the hood open.
3. Start engine and let it idle for 5 minutes or more.

cardiagn.com

CAUTION:
Never turn ignition switch OFF during idling.

4. Check 1st trip DTC.

Is 1st trip DTC detected?


YES >> Proceed to EC-283, "Diagnosis Procedure".
NO >> INSPECTION END

Component Function Check

INFOID:0000000012406439

1. CHECK ENGINE OIL TEMPERATURE (EOT) SENSOR

1. Turn ignition switch OFF.
2. Disconnect EOT sensor harness connector.
3. Remove EOT sensor. Refer to CO-27, "Exploded View".
4. Check resistance between EOT sensor terminals by heating with hot water as shown in the figure.

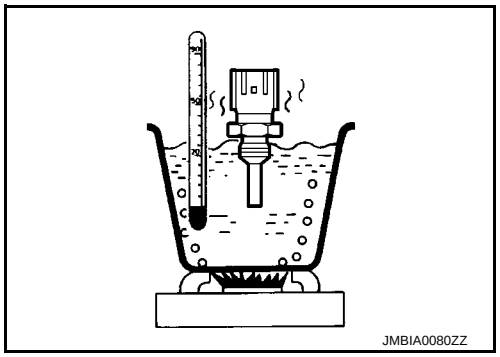

Terminals	Condition		Resistance (kΩ)
1 and 2	Temperature [°C (°F)]	20 (68)	2.1 – 2.9
		50 (122)	0.68 – 1.00
		90 (194)	0.236 – 0.260

Is the inspection result normal?

YES >> GO TO 2.
NO >> Proceed to EC-283, "Diagnosis Procedure".

2. CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-283, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406440

1. CHECK ENGINE OIL TEMPERATURE SENSOR

Check engine oil temperature sensor. Refer to EC-283, "Component Inspection".

Is the inspection result normal?


YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace engine oil temperature sensor. Refer to EM-68, "Exploded View".

Component Inspection

INFOID:0000000012406441

1. CHECK ENGINE OIL TEMPERATURE SENSOR

1. Turn ignition switch OFF.
2. Disconnect engine oil temperature sensor harness connector.
3. Remove engine oil temperature sensor. Refer to EM-68, "Exploded View".
4. Check resistance between engine oil temperature sensor terminals by heating with hot water as shown in the figure.

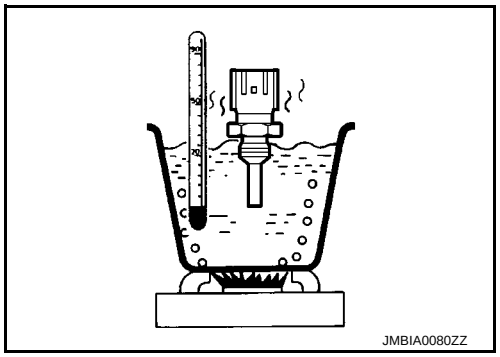

Terminals	Condition		Resistance
1 and 2	Temperature [°C (°F)]	20 (68)	2.1 - 2.9 kΩ
		50 (122)	0.68 - 1.00 kΩ
		90 (194)	0.236 - 0.260 kΩ

Is the inspection result normal?

YES >> INSPECTION END

cardiagn.com

NO >> Replace engine oil temperature sensor. Refer to EM-68, "Exploded View".

cardiagn.com

P0197, P0198 EOT SENSOR

DTC Logic

INFOID:0000000012406442

DTC DETECTION LOGIC

DTC No.	Trouble Diagnosis Name	DTC detecting condition	Possible Cause
P0197	Engine oil temperature sensor circuit low input	An excessively low voltage from the sensor is sent to ECM.	• Harness or connectors (The sensor circuit is open or shorted.) • Engine oil temperature sensor
P0198	Engine oil temperature sensor circuit high input	An excessively high voltage from the sensor is sent to ECM.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and wait at least 5 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-285, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406443

1.CHECK EOT SENSOR POWER SUPPLY

1. Disconnect engine oil temperature (EOT) sensor harness connector.
2. Turn ignition switch ON.
3. Check the voltage between EOT sensor harness connector and ground.

EOT sensor		Ground	Voltage
Connector	Terminal		
F66	1	Ground	Approx. 5 V

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

2.CHECK EOT SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between EOT sensor harness connector and ECM harness connector.

EOT sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F66	2	F14	15	Existed

4. Also check harness for short to ground and short to power.

cardiagn.com

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

3. CHECK ENGINE OIL TEMPERATURE SENSOR

Check engine oil temperature sensor. Refer to EC-286, "Component Inspection".

Is the inspection result normal?


YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace engine oil temperature sensor. Refer to EM-68, "Exploded View".

Component Inspection

INFOID:0000000012406444

1. CHECK ENGINE OIL TEMPERATURE SENSOR

1. Turn ignition switch OFF.
2. Disconnect engine oil temperature sensor harness connector.
3. Remove engine oil temperature sensor. Refer to EM-68, "Exploded View".
4. Check resistance between engine oil temperature sensor terminals by heating with hot water as shown in the figure.

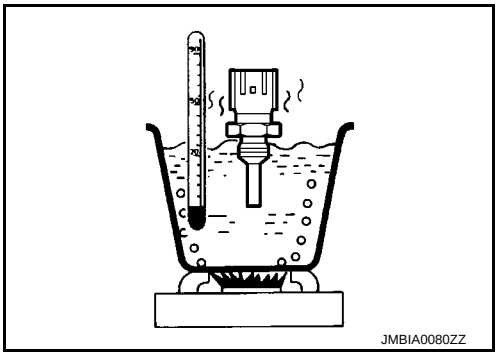

Terminals	Condition		Resistance
1 and 2	Temperature [°C (°F)]	20 (68)	2.1 - 2.9 kΩ
		50 (122)	0.68 - 1.00 kΩ
		90 (194)	0.236 - 0.260 kΩ

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace engine oil temperature sensor. Refer to EM-68, "Exploded View".

cardiagn.com

P0222, P0223 TP SENSOR

DTC Logic

INFOID:0000000012406445

DTC DETECTION LOGIC

NOTE:
If DTC P0222 or P0223 is displayed with DTC P0643, first perform the trouble diagnosis for DTC P0643. Refer to EC-379, "DTC Logic".

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0222	Throttle position sensor 1 circuit low input	An excessively low voltage from the TP sensor 1 is sent to ECM.	• Harness or connectors (TP sensor 1 circuit is open or shorted.) • Electric throttle control actuator (TP sensor 1)
P0223	Throttle position sensor 1 circuit high input	An excessively high voltage from the TP sensor 1 is sent to ECM.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is more than 10 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for 1 second.
2. Check DTC.

Is DTC detected?

YES >> Proceed to EC-287, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406446

1.CHECK THROTTLE POSITION SENSOR 1 POWER SUPPLY

1. Disconnect electric throttle control actuator harness connector.
2. Turn ignition switch ON.
3. Check the voltage between electric throttle control actuator harness connector and ground.

Electric throttle control actuator		Ground	Voltage
Connector	Terminal		
F50	5	Ground	Approx. 5 V

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2.CHECK THROTTLE POSITION SENSOR 1 POWER SUPPLY CIRCUIT FOR OPEN

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between electric throttle control actuator and ECM harness connector.

cardiagn.com

Electric throttle control actuator		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F50	5	F15	98	Existed

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Repair or replace error-detected parts.

3.CHECK THROTTLE POSITION SENSOR 1 GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between electric throttle control actuator and ECM harness connector.

Electric throttle control actuator		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F50	4	F15	75	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK THROTTLE POSITION SENSOR 1 INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between electric throttle control actuator and ECM harness connector.

Electric throttle control actuator		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F50	6	F15	71	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

5.CHECK THROTTLE POSITION SENSOR

Check throttle position sensor. Refer to EC-288, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace electric throttle control actuator. Refer to EM-29, "Exploded View".

Component Inspection

INFOID:0000000012406447

1.CHECK THROTTLE POSITION SENSOR

1. Turn ignition switch OFF.
2. Reconnect all harness connectors disconnected.
3. Perform EC-148, "Description".
4. Turn ignition switch ON.
5. Set selector lever to D position.
6. Check the voltage between ECM harness connector terminals under the following conditions.

cardiagn.com

ECM			Condition		Voltage
Connector	+	–			
	Terminal	Terminal			
F15	71 (TP sensor 1 signal)	75 (Sensor ground)	Accelerator pedal	Fully released	More than 0.36 V
				Fully depressed	Less than 4.75 V
	72 (TP sensor 2 signal)			Fully released	Less than 4.75 V
				Fully depressed	More than 0.36 V

Is the inspection result normal?

YES >> INSPECTION END

NO >> Replace electric throttle control actuator. Refer to EM-29, "Exploded View".

cardiagn.com

P0300, P0301, P0302, P0303, P0304, P0305, P0306 MISFIRE

DTC Logic

INFOID:0000000012406448

DTC DETECTION LOGIC

When a misfire occurs, engine speed will fluctuate. If the engine speed fluctuates enough to cause the crankshaft position (CKP) sensor (POS) signal to vary, ECM can determine that a misfire is occurring.

Sensor	Input signal to ECM	ECM function
Crankshaft position sensor (POS)	Engine speed	On board diagnosis of misfire

The misfire detection logic consists of the following two conditions.

1. One Trip Detection Logic (Three Way Catalyst Damage)
   On the 1st trip, when a misfire condition occurs that can damage the three way catalyst (TWC) due to overheating, the MIL will blink.
   When a misfire condition occurs, the ECM monitors the CKP sensor signal every 200 engine revolutions for a change.
   When the misfire condition decreases to a level that will not damage the TWC, the MIL will turn off.
   If another misfire condition occurs that can damage the TWC on a second trip, the MIL will blink.
   When the misfire condition decreases to a level that will not damage the TWC, the MIL will remain on.
   If another misfire condition occurs that can damage the TWC, the MIL will begin to blink again.
2. Two Trip Detection Logic (Exhaust quality deterioration)
   For misfire conditions that will not damage the TWC (but will affect vehicle emissions), the MIL will only illuminate when the misfire is detected on a second trip. During this condition, the ECM monitors the CKP sensor signal every 1,000 engine revolutions.
   A misfire malfunction can be detected in any one cylinder or in multiple cylinders.

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0300	Multiple cylinder misfires detected	Multiple cylinders misfire.	• Improper spark plug • Insufficient compression • Incorrect fuel pressure • The fuel injector circuit is open or shorted • Fuel injector • Intake air leakage • The ignition signal circuit is open or shorted • Lack of fuel • Signal plate • A/F sensor 1 • Incorrect PCV hose connection
P0301	No. 1 cylinder misfire detected	No. 1 cylinder misfires.	
P0302	No. 2 cylinder misfire detected	No. 2 cylinder misfires.	
P0303	No. 3 cylinder misfire detected	No. 3 cylinder misfires.	
P0304	No. 4 cylinder misfire detected	No. 4 cylinder misfires.	
P0305	No. 5 cylinder misfire detected	No. 5 cylinder misfires.	
P0306	No. 6 cylinder misfire detected	No. 6 cylinder misfires.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE-I

1. Start engine and warm it up to normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Restart engine and let it idle for approximately 15 minutes.
6. Check 1st trip DTC.

Is 1st trip DTC detected?

cardiagn.com

YES >> Proceed to EC-291, "Diagnosis Procedure".
NO >> GO TO 3.

3. PERFORM DTC CONFIRMATION PROCEDURE-II

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Start engine and drive the vehicle under similar conditions to (1st trip) Freeze Frame Data for a certain time. Refer to the table below.
   Hold the accelerator pedal as steady as possible.
   Similar conditions to (1st trip) Freeze Frame Data mean that the following conditions should be satisfied at the same time.
   CAUTION:
   Always drive vehicle in safe manner according to traffic conditions and obey all traffic laws when driving.

Engine speed	Engine speed in the freeze frame data ± 400 rpm
Vehicle speed	Vehicle speed in the freeze frame data ± 10 km/h (6 MPH)
Basic fuel schedule	Basic fuel schedule in freeze frame data × (1 ± 0.1)
Engine coolant temperature (T) condition	When the freeze frame data shows lower than 70°C (158°F), T should be lower than 70°C (158°F).
	When the freeze frame data shows higher than or equal to 70°C (158°F), T should be higher than or equal to 70°C (158°F).

Driving time varies according to the engine speed in the freeze frame data.

Engine speed	Time
Around 1,000 rpm	Approximately 10 minutes
Around 2,000 rpm	Approximately 5 minutes
More than 3,000 rpm	Approximately 3.5 minutes

5. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-291, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406449

1. CHECK GROUND CONNECTION

Check the following.
- Connection condition of the ground F83 and F84.
- Connection condition of the ground harness between engine assembly and vehicle body (If equipped).

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair or replace error-detected parts.

2. CHECK FOR INTAKE AIR LEAKAGE AND PCV HOSE

1. Start engine and run it at idle speed.
2. Listen for the sound of the intake air leakage.
3. Check PCV hose connection.

Is intake air leakage detected?

YES >> Discover air leakage location and repair.
NO >> GO TO 3.

3. CHECK FOR EXHAUST SYSTEM CLOGGING

Stop engine and visually check exhaust tube, three way catalyst and muffler for dents.

Is the inspection result normal?

cardiagn.com

YES-1 >> With CONSULT: GO TO 4.
YES-2 >> Without CONSULT: GO TO 5.
NO >> Repair or replace malfunctioning part.

4. PERFORM POWER BALANCE TEST

With CONSULT

1. Start engine.
2. Perform “POWER BALANCE” in “ACTIVE TEST” mode with CONSULT.
3. Check that each circuit produces a momentary engine speed drop.


Is the inspection result normal?

YES >> GO TO 10.
NO >> GO TO 5.

5. CHECK FUNCTION OF FUEL INJECTOR

1. Start engine and let it idle.
2. Listen to each fuel injector make operation sound.

Clicking sound should be heard.

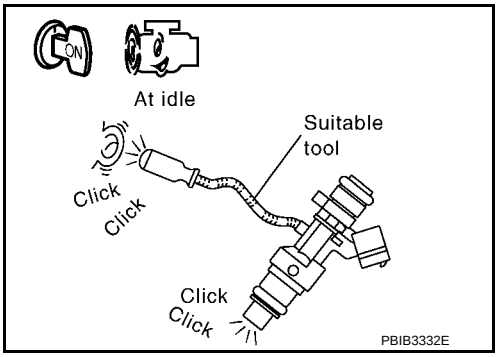

Is the inspection result normal?


YES >> GO TO 6.
NO >> Perform trouble diagnosis for FUEL INJECTOR, refer to EC-479, "Diagnosis Procedure".

6. CHECK FUNCTION OF IGNITION COIL-I

CAUTION:

Perform the following procedure in a place with no combustible objects and good ventilation.

1. Turn ignition switch OFF.
2. Remove fuel pump fuse in IPDM E/R to release fuel pressure.
   NOTE:
   Do not use CONSULT to release fuel pressure, or fuel pressure applies again during the following procedure.
3. Start engine.
4. After engine stalls, crank it 2 or 3 times to release all fuel pressure.
5. Turn ignition switch OFF.
6. Remove all ignition coil harness connectors to avoid the electrical discharge from the ignition coils.
7. Remove ignition coil and spark plug of the cylinder to be checked.
8. Crank engine for 5 seconds or more to remove combustion gas in the cylinder.
9. Connect spark plug and harness connector to ignition coil.
10. Fix ignition coil using a rope etc. with gap of 13 - 17 mm (0.52 - 0.66 in) between the edge of the spark plug and grounded metal portion as shown in the figure.
11. Crank engine for approximately 3 seconds, and check whether spark is generated between the spark plug and the grounded metal portion.

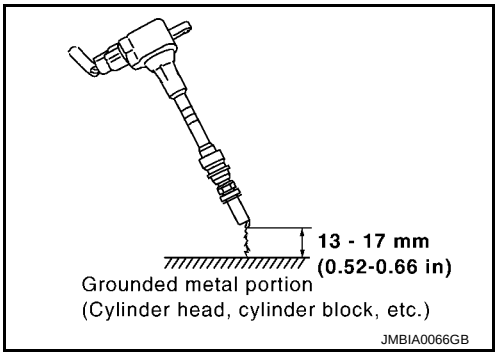

Spark should be generated.

CAUTION:

- **During the operation, always stay 0.5 m (19.7 in) or more away from the spark plug and the ignition coil. Be careful not to get an electrical shock while checking, because the electrical discharge voltage becomes 20 kV or more.**
- **It might damage the ignition coil if the gap of more than 17 mm (0.66 in) is made.**

NOTE:

When the gap is less than 13 mm (0.52 in), a spark might be generated even if the coil is malfunctioning.

cardiagn.com

Is the inspection result normal?

YES >> GO TO 10.
NO >> GO TO 7.

7. CHECK FUNCTION OF IGNITION COIL-II

1. Turn ignition switch OFF.
2. Disconnect spark plug and connect a non-malfunctioning spark plug.
3. Crank engine for approximately 3 seconds, and recheck whether spark is generated between the spark plug and the grounded metal portion.

Spark should be generated.

Is the inspection result normal?


YES >> GO TO 8.
NO >> Check ignition coil, power transistor and their circuits. Refer to EC-484, "Diagnosis Procedure".

8. CHECK SPARK PLUG

Check the initial spark plug for fouling, etc.

Is the inspection result normal?

YES >> Replace spark plug(s) with standard type one(s). For spark plug type, refer to MA-31, "SPARK PLUG : Spark Plug".
NO >> Repair or clean spark plug. Then GO TO 9.

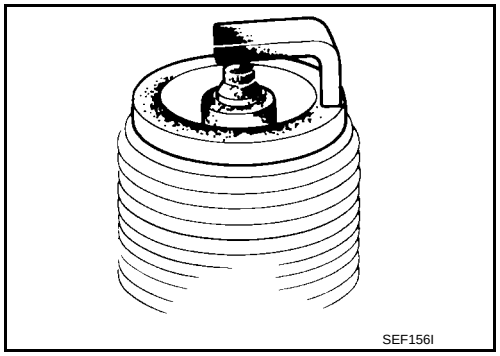

9. CHECK FUNCTION OF IGNITION COIL-III

1. Reconnect the initial spark plugs.
2. Crank engine for approximately 3 seconds, and recheck whether spark is generated between the spark plug and the grounded portion.

Spark should be generated.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace spark plug(s) with standard type one(s). For spark plug type, refer to MA-31, "SPARK PLUG : Spark Plug".

10. CHECK COMPRESSION PRESSURE

Check compression pressure. Refer to EM-24, "Inspection".

Is the inspection result normal?

YES >> GO TO 11.
NO >> Check pistons, piston rings, valves, valve seats and cylinder head gaskets.

11. CHECK FUEL PRESSURE

1. Install all removed parts.
2. Release fuel pressure to zero. Refer to EC-153, "Work Procedure".
3. Install fuel pressure gauge kit [SST: — (J-44321)] and check fuel pressure. Refer to EC-153, "Work Procedure".

At idle: Approximately 350 kPa (3.57 kg/cm^2, 51 psi)

Is the inspection result normal?

YES >> GO TO 13.
NO >> GO TO 12.

12. DETECT MALFUNCTIONING PART

cardiagn.com

Check fuel hoses and fuel tubes for clogging.

Is the inspection result normal?

YES >> Replace “fuel filter and fuel pump assembly”. Refer to FL-6, "Exploded View".
NO >> Repair or replace malfunctioning part.

13. CHECK IGNITION TIMING

Check idle speed and ignition timing.
For procedure, refer to EC-141, "Work Procedure".
For specification, refer to EC-514, "Idle Speed" and EC-514, "Ignition Timing".

Is the inspection result normal?

YES >> GO TO 14.
NO >> Follow the EC-141, "Work Procedure".

14. CHECK A/F SENSOR 1 INPUT SIGNAL CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect corresponding A/F sensor 1 harness connector.
3. Disconnect ECM harness connector.
4. Check the continuity between A/F sensor 1 harness connector and ECM harness connector.

A/F sensor 1			ECM		Continuity
Bank	Connector	Terminal	Connector	Terminal	
1	F28	3	F15	66	Existed
		4		67	
2	F65	3		76	
		4		77	

5. Check the continuity between A/F sensor 1 harness connector and ground, or ECM harness connector and ground.

A/F sensor 1			Ground	Continuity
Bank	Connector	Terminal		
1	F28	3	Ground	Not existed
		4		
2	F65	3		
		4		

ECM		Ground	Continuity
Connector	Terminal		
F15	66	Ground	Not existed
	67		
	76		
	77		

6. Also check harness for short to power.

Is the inspection result normal?

YES >> GO TO 15.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

15. CHECK A/F SENSOR 1 HEATER

Check A/F sensor 1 heater. Refer to EC-191, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 16.
NO >> Replace malfunctioning A/F sensor 1. Refer to EM-34, "Exploded View".

cardiagn.com

16. CHECK MASS AIR FLOW SENSOR

Check MAF sensor. Refer to EC-203, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 17.
NO >> Check connectors for rusted terminals or loose connections in the mass air flow sensor circuit or ground. Refer to EC-206, "Diagnosis Procedure".

17. CHECK SYMPTOM TABLE

Check items on the rough idle symptom in EC-503, "Symptom Table".

Is the inspection result normal?

YES >> GO TO 18.
NO >> Repair or replace malfunctioning part.

18. ERASE THE 1ST TRIP DTC

Some tests may cause a 1st trip DTC to be set.
Erase the 1st trip DTC from the ECM memory after performing the tests. Refer to EC-73, "CONSULT Function".

>> Check intermittent incident. Refer to GI-41, "Intermittent Incident".

cardiagn.com

P0327, P0328, P0332, P0333 KS

DTC Logic

INFOID:0000000012406450

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detected condition	Possible cause
P0327	Knock sensor (bank 1) circuit low input	An excessively low voltage from the sensor is sent to ECM.	• Harness or connectors (The sensor circuit is open or shorted.) • Knock sensor
P0328	Knock sensor (bank 1) circuit high input	An excessively high voltage from the sensor is sent to ECM.	
P0332	Knock sensor (bank 2) circuit low input	An excessively low voltage from the sensor is sent to ECM.	
P0333	Knock sensor (bank 2) circuit high input	An excessively high voltage from the sensor is sent to ECM.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 10 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and run it for at least 5 seconds at idle speed.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-296, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406451

1.CHECK KNOCK SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Disconnect knock sensor harness connector and ECM harness connector.
2. Check the continuity between knock sensor harness connector and ECM harness connector.

DTC	Knock sensor			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0327, P0328	1	F201	2	F14	4	Existed
P0332, P0333	2	F202	2			

3. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

2.CHECK KNOCK SENSOR INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between knock sensor harness connector and ECM harness connector.

cardiagn.com

DTC	Knock sensor			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0327, P0328	1	F201	1	F14	5	Existed
P0332, P0333	2	F202	1		9	

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

3. CHECK KNOCK SENSOR

Check knock sensor. Refer to EC-297, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace malfunctioning knock sensor. Refer to EM-108, "Exploded View".

Component Inspection

INFOID:0000000012406452

1. CHECK KNOCK SENSOR

1. Turn ignition switch OFF.
2. Disconnect knock sensor harness connector.
3. Check resistance between knock sensor terminal as per the following.

NOTE:
It is necessary to use an ohmmeter which can measure more than 10 MΩ.

Terminals	Resistance
1 and 2	Approx. 532 - 588 kΩ [at 20°C (68°F)]

CAUTION:
Never use any knock sensors that have been dropped or physically damaged. Use only new ones.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning knock sensor. Refer to EM-108, "Exploded View".

cardiagn.com

P0335 CKP SENSOR (POS)

DTC Logic

INFOID:0000000012406453

DTC DETECTION LOGIC

NOTE:
If DTC P0340 or P0345 is displayed with DTC P0643, first perform the trouble diagnosis for DTC P0643. Refer to EC-379, "DTC Logic".

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0335	Crankshaft position sensor (POS) circuit	• The crankshaft position sensor (POS) signal is not detected by the ECM during the first few seconds of engine cranking. • The proper pulse signal from the crankshaft position sensor (POS) is not sent to ECM while the engine is running. • The crankshaft position sensor (POS) signal is not in the normal pattern during engine running.	• Harness or connectors [CKP sensor (POS) circuit is open or shorted.] • Crankshaft position sensor (POS) • Signal plate

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is more than 10.5 V with ignition switch ON.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for at least 5 seconds.
   If engine does not start, crank engine for at least 2 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-298, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406454

1.CHECK CRANKSHAFT POSITION (CKP) SENSOR (POS) POWER SUPPLY

1. Disconnect crankshaft position (CKP) sensor (POS) harness connector.
2. Turn ignition switch ON.
3. Check the voltage between CKP sensor (POS) harness connector and ground.

CKP sensor (POS)		Ground	Voltage (V)
Connector	Terminal		
F20	1	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2.CHECK CRANKSHAFT POSITION (CKP) SENSOR (POS) POWER SUPPLY CIRCUIT FOR OPEN

cardiagn.com

1. Turn ignition switch OFF
2. Disconnect ECM harness connector.
3. Check the continuity between CKP sensor (POS) harness connector and ECM harness connector.

CKP sensor (POS)		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F20	1	F14	28	Existed

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Repair or replace error-detected parts.

3. CHECK CKP SENSOR (POS) GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between CKP sensor (POS) harness connector and ECM harness connector.

CKP sensor (POS)		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F20	2	F14	40	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4. CHECK CKP SENSOR (POS) INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between CKP sensor (POS) harness connector and ECM harness connector.

CKP sensor (POS)		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F20	3	F14	36	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

5. CHECK CRANKSHAFT POSITION SENSOR (POS)

Check crankshaft position sensor (POS). Refer to EC-299, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 6.
NO >> Replace crankshaft position sensor (POS). Refer to EM-39, "Exploded View".

6. CHECK GEAR TOOTH

Visually check for chipping signal plate gear tooth.

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace the signal plate. Refer to EM-87, "Exploded View".

Component Inspection


INFOID:0000000012406455

1. CHECK CRANKSHAFT POSITION SENSOR (POS)-I

1. Loosen the fixing bolt of the sensor.
2. Disconnect crankshaft position sensor (POS) harness connector.
3. Remove the sensor.

cardiagn.com

4. Visually check the sensor for chipping.

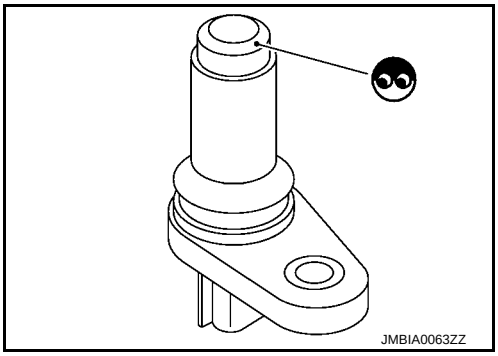

Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace crankshaft position sensor (POS). Refer to EM-39, "Exploded View".

2. CHECK CRANKSHAFT POSITION SENSOR (POS)-II

Check resistance crankshaft position sensor (POS) terminals as per the following.

Terminal No. (Polarity)	Resistance
1 (+) - 2 (-)	Except 0 or ∞ Ω [at 25°C (77°F)]
1 (+) - 3 (-)	
2 (+) - 3 (-)	

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace crankshaft position sensor (POS). Refer to EM-39, "Exploded View".

cardiagn.com

P0340, P0345 CMP SENSOR (PHASE)

DTC Logic

INFOID:0000000012406456

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0340	Camshaft position sensor (PHASE) (bank 1) circuit	• The cylinder No. signal is not sent to ECM for the first few seconds during engine cranking. • The cylinder No. signal is not sent to ECM during engine running. • The cylinder No. signal is not in the normal pattern during engine running.	• Harness or connectors [CMP sensor (PHASE) circuit is open or shorted.] (APP sensor 2 circuit is shorted.) (Battery current sensor circuit is shorted.) (EOP sensor circuit is shorted.) (Refrigerant pressure sensor circuit is shorted.) • Camshaft position sensor (PHASE) • Camshaft (INT) • Starter motor (Refer to STR-6, "System Description".) • Starting system circuit (Refer to STR-6, "System Description".) • Dead (Weak) battery • Accelerator pedal position sensor • Battery current sensor • Engine oil pressure sensor • Refrigerant pressure sensor
P0345	Camshaft position sensor (PHASE) (bank 2) circuit		

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 10.5 V with ignition switch ON.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE-I

1. Start engine and let it idle for at least 5 seconds.
   If engine does not start, crank engine for at least 2 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-301, "Diagnosis Procedure".
NO >> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE-I

1. Maintaining engine speed at more than 800 rpm for at least 5 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-301, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406457

1.CHECK STARTING SYSTEM

cardiagn.com

Turn ignition switch to START position.

Does the engine turn over? Does the starter motor operate?

YES >> GO TO 2.
NO >> Check starting system. Refer to STR-11, "Work Flow (With GR8-1200 NI)" or STR-14, "Work Flow (Without GR8-1200 NI)".

2. CHECK CAMSHAFT POSITION (CMP) SENSOR (PHASE) POWER SUPPLY

1. Disconnect camshaft position (CMP) sensor (PHASE) harness connector.
2. Turn ignition switch ON.
3. Check the voltage between CMP sensor (PHASE) harness connector and ground.

DTC	CMP sensor (PHASE)			Ground	Voltage (V)
	Bank	Connector	Terminal		
P0340	1	F45	1	Ground	Approx. 5
P0345	2	F46	1		

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 3.

3. HECK CMP SENSOR (PHASE) POWER SUPPLY CIRCUIT FOR OPEN

1. Turn ignition switch OFF.
2. Disconnect ECM harness connectors.
3. Check the continuity between CMP sensor (PHASE) harness connector and ECM harness connector.

DTC	CMP sensor (PHASE)			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0340	1	F45	1	F15	92	Existed
P0345	2	F46	1			

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> Check sensor power supply 2 circuit. Refer to EC-379, "Diagnosis Procedure".
NO >> Repair or replace error-detected parts.

4. CHECK CMP SENSOR (PHASE) GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between CMP sensor (PHASE) harness connector and ECM harness connector.

DTC	CMP sensor (PHASE)			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0340	1	F45	2	F15	90	Existed
P0345	2	F46	2			

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

5. CHECK CMP SENSOR (PHASE) INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between CMP sensor (PHASE) harness connector and ECM harness connector.

cardiagn.com

DTC	CMP sensor (PHASE)			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P0340	1	F45	3	F15	84	Existed
P0345	2	F46	3		89	

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

6. CHECK CAMSHAFT POSITION SENSOR (PHASE)

Check camshaft position sensor (PHASE). Refer to EC-303, "Component Inspection".

Is the inspection result normal?


YES >> GO TO 7.
NO >> Replace malfunctioning camshaft position sensor (PHASE). Refer to EM-54, "Exploded View".

7. CHECK CAMSHAFT (INT)

Check the following.
- Accumulation of debris to the signal plate of camshaft rear end
- Chipping signal plate of camshaft rear end

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Remove debris and clean the signal plate of camshaft rear end or replace camshaft. Refer to EM-87, "Exploded View".

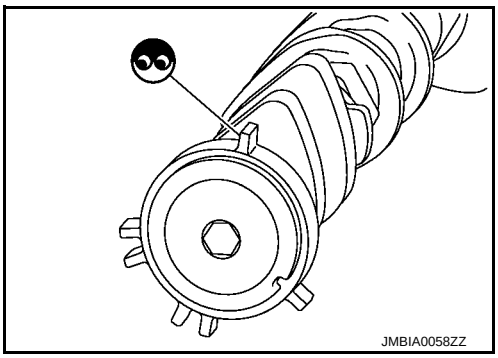

Component Inspection


INFOID:0000000012406458

1. CHECK CAMSHAFT POSITION SENSOR (PHASE)-I

1. Turn ignition switch OFF.
2. Loosen the fixing bolt of the sensor.
3. Disconnect camshaft position sensor (PHASE) harness connector.
4. Remove the sensor.
5. Visually check the sensor for chipping.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace malfunctioning camshaft position sensor (PHASE). Refer to EM-54, "Exploded View".

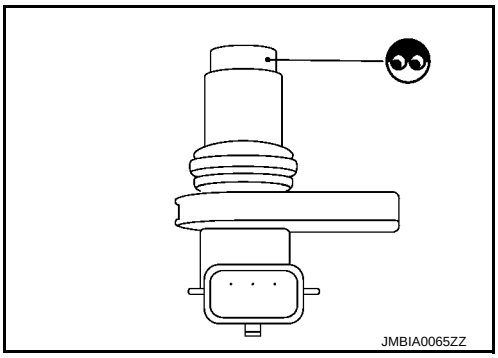

2. CHECK CAMSHAFT POSITION SENSOR (PHASE)-II

Check resistance camshaft position sensor (PHASE) terminals as per the following.

Terminal No. (Polarity)	Resistance
1 (+) - 2 (-)	Except 0 or ∞ Ω [at 25°C (77°F)]
1 (+) - 3 (-)	
2 (+) - 3 (-)	

cardiagn.com

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning camshaft position sensor (PHASE). Refer to EM-54, "Exploded View".

cardiagn.com


P0420, P0430 THREE WAY CATALYST FUNCTION

DTC Logic

INFOID:0000000012406459

DTC DETECTION LOGIC

The ECM monitors the switching frequency ratio of air fuel ratio (A/F) sensor 1 and heated oxygen sensor 2.
A three way catalyst (manifold) with high oxygen storage capacity will indicate a low switching frequency of heated oxygen sensor 2. As oxygen storage capacity decreases, the heated oxygen sensor 2 switching frequency will increase.
When the frequency ratio of A/F sensor 1 and heated oxygen sensor 2 approaches a specified limit value, the three way catalyst (manifold) malfunction is diagnosed.

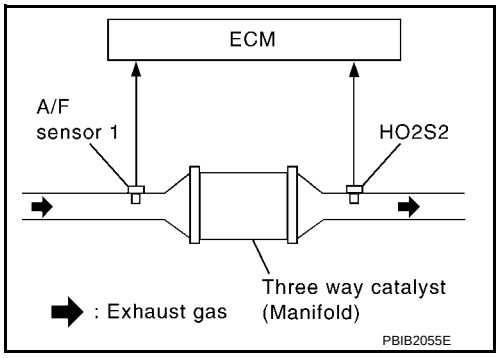

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0420	Catalyst system efficiency below threshold (bank 1)	• Three way catalyst (manifold) does not operate properly. • Three way catalyst (manifold) does not have enough oxygen storage capacity.	• Three way catalyst (manifold) • Exhaust tube • Intake air leakage • Fuel injector • Fuel injector leakage • Spark plug • Improper ignition timing
P0430	Catalyst system efficiency below threshold (bank 2)		

DTC CONFIRMATION PROCEDURE

1.INSPECTION START

Will CONSULT be used?

Will CONSULT be used?

YES >> GO TO 2.
NO >> GO TO 7.

2.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Do not maintain engine speed for more than the specified minutes below.

>> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE-I

With CONSULT

1. Turn ignition switch ON and select “DATA MONITOR” mode with CONSULT.
2. Start engine and warm it up to the normal operating temperature.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. Turn ignition switch OFF and wait at least 10 seconds.
6. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
7. Let engine idle for 1 minute.
8. Check that “COOLAN TEMP/S” indicates more than 70°C (158°F).
   If not, warm up engine and go to next step when “COOLAN TEMP/S” indication reaches 70°C (158°F).
9. Open engine hood.
10. Select “DTC & SRT CONFIRMATION” then “SRT WORK SUPPORT” mode with CONSULT.

cardiagn.com

11. Rev engine between 2,000 and 3,000 rpm and hold it for 3 consecutive minutes then release the accelerator pedal completely.
12. Check the indication of “CATALYST”.

Which is displayed on CONSULT screen?

CMPLT >> GO TO 6.
INCMP >> GO TO 4.

4. PERFORM DTC CONFIRMATION PROCEDURE-II

1. Wait 5 seconds at idle.
2. Rev engine between 2,000 and 3,000 rpm and maintain it until “INCMP” of “CATALYST” changes to “CMPLT” (It will take approximately 5 minutes).

Does the indication change to “CMPLT”?

YES >> GO TO 6.
NO >> GO TO 5.

5. PERFORM DTC CONFIRMATION PROCEDURE AGAIN

1. Stop engine and cool it down to less than 70°C (158°F).
2. Perform DTC CONFIRMATION PROCEDURE again.

>> GO TO 3.

6. PERFORM DTC CONFIRMATION PROCEDURE-III

Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-307, "Diagnosis Procedure".
NO >> INSPECTION END

7. PERFORM COMPONENT FUNCTION CHECK

Perform component function check. Refer to EC-306, "Component Function Check".

NOTE:
Use component function check to check the overall function of the three way catalyst (manifold). During this check, a 1st trip DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-307, "Diagnosis Procedure".

Component Function Check

INFOID:0000000012406460

1. PERFORM COMPONENT FUNCTION CHECK

Without CONSULT

1. Start engine and warm it up to the normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Start engine and keep the engine speed between 3,500 and 4,000 rpm for at least 1 minute under no load.
6. Let engine idle for 1 minute.
7. Open engine hood.
8. Check the voltage between ECM harness connector terminals under the following conditions.

cardiagn.com

DTC	ECM			Condition	Voltage (V)
	Connector	+	–		
		Terminal	Terminal		
P0420	F14	41 [HO2S2 (bank 1) signal]	35 (Sensor ground)	Keeping engine speed at 2,500 rpm constant under no load	The voltage fluctuation cycle takes more than 5 seconds. • 1 cycle: 0.6 - 1.0 → 0 - 0.3 → 0.6 - 1.0
P0430		32 [HO2S2 (bank 2) signal]			

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-307, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406461

1.CHECK EXHAUST SYSTEM


Visually check exhaust tubes and muffler for dents.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair or replace malfunctioning part.

2.CHECK EXHAUST GAS LEAKAGE

1. Start engine and run it at idle.
2. Listen for an exhaust gas leakage before the three way catalyst (manifold).

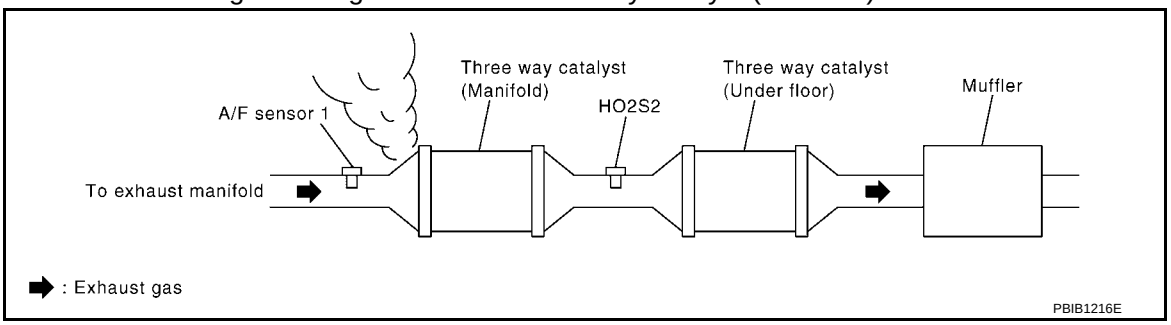

Is exhaust gas leakage detected?

YES >> Repair or replace malfunctioning part.
NO >> GO TO 3.

3.CHECK INTAKE AIR LEAKAGE

Listen for an intake air leakage after the mass air flow sensor.

Is intake air leakage detected?

YES >> Repair or replace malfunctioning part.
NO >> GO TO 4.

4.CHECK IGNITION TIMING

Check idle speed and ignition timing.
For procedure, refer to EC-141, "Work Procedure".
For specification, refer to EC-514, "Idle Speed" and EC-514, "Ignition Timing".

Is the inspection result normal?

YES >> GO TO 5.
NO >> Follow the EC-141, "Work Procedure".

5.CHECK FUEL INJECTORS

1. Stop engine and then turn ignition switch ON.
2. Check the voltage between ECM harness connector terminals.

cardiagn.com

ECM				Voltage
+		–		
Connector	Terminal	Connector	Terminal	
F14	11	E19	152	Battery voltage
	12			
	16			
	17			
	21			
	22			


Is the inspection result normal?

YES >> GO TO 6.
NO >> Perform EC-479, "Diagnosis Procedure".

6. CHECK FUNCTION OF IGNITION COIL-I

CAUTION:
Perform the following procedure in a place with no combustible objects and good ventilation.

1. Turn ignition switch OFF.
2. Remove fuel pump fuse in IPDM E/R to release fuel pressure.
   NOTE:
   Do not use CONSULT to release fuel pressure, or fuel pressure applies again during the following procedure.
3. Start engine.
4. After engine stalls, crank it 2 or 3 times to release all fuel pressure.
5. Turn ignition switch OFF.
6. Remove all ignition coil harness connectors to avoid the electrical discharge from the ignition coils.
7. Remove ignition coil and spark plug of the cylinder to be checked.
8. Crank engine for 5 seconds or more to remove combustion gas in the cylinder.
9. Connect spark plug and harness connector to ignition coil.
10. Fix ignition coil using a rope etc. with gap of 13 - 17 mm (0.52 - 0.66 in) between the edge of the spark plug and grounded metal portion as shown in the figure.
11. Crank engine for approximately 3 seconds, and check whether spark is generated between the spark plug and the grounded metal portion.

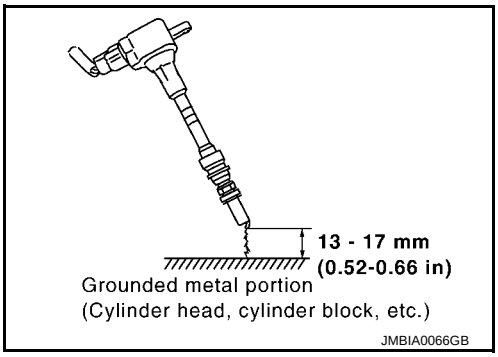

Spark should be generated.

CAUTION:
- **During the operation, always stay 0.5 m (19.7 in) or more away from the spark plug and the ignition coil. Be careful not to get an electrical shock while checking, because the electrical discharge voltage becomes 20 kV or more.**
- **It might cause to damage the ignition coil if the gap of more than 17 mm (0.66 in) is taken.**

NOTE:
When the gap is less than 13 mm (0.52 in), the spark might be generated even if the coil is malfunctioning.

Is the inspection result normal?

YES >> GO TO 10.
NO >> GO TO 7.

7. CHECK FUNCTION OF IGNITION COIL-II

1. Turn ignition switch OFF.
2. Disconnect spark plug and connect a known-good spark plug.
3. Crank engine for approximately 3 seconds, and recheck whether spark is generated between the spark plug and the grounded metal portion.

cardiagn.com


Spark should be generated.

Is the inspection result normal?

YES >> GO TO 8.
NO >> Check ignition coil, power transistor and their circuit. Refer to EC-484, "Diagnosis Procedure".

8. CHECK SPARK PLUG

Check the initial spark plug for fouling, etc.

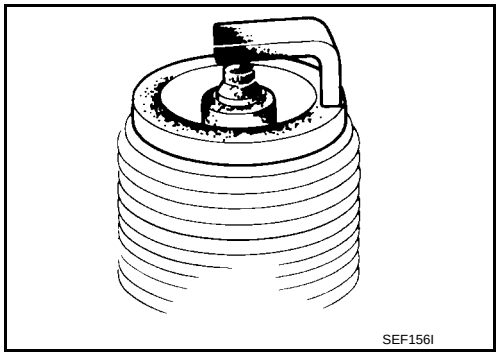

Is the inspection result normal?

YES >> Replace spark plug(s) with standard type one(s). For spark plug type, refer to MA-31, "SPARK PLUG : Spark Plug".
NO >> Repair or clean spark plug. Then GO TO 9.

9. CHECK FUNCTION OF IGNITION COIL-III

1. Reconnect the initial spark plugs.
2. Crank engine for approximately 3 seconds, and recheck whether spark is generated between the spark plug and the grounded portion.

Spark should be generated.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace spark plug(s) with standard type one(s). For spark plug type, refer to MA-31, "SPARK PLUG : Spark Plug".

10. CHECK FUEL INJECTOR

1. Turn ignition switch OFF.
2. Remove fuel injector assembly. Refer to EM-49, "Exploded View".
   Refer to EM-49, "Exploded View".
   Keep fuel hose and all fuel injectors connected to fuel tube.
3. Disconnect all ignition coil harness connectors.
4. Reconnect all fuel injector harness connectors disconnected.
5. Turn ignition switch ON.
6. Check that the fuel does not drip from fuel injector.

Does fuel drip from fuel injector?

YES >> Replace the fuel injector(s) from which fuel is dripping. Refer to EM-49, "Exploded View".
NO >> GO TO 11.

11. CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace three way catalyst assembly. Refer to EM-34, "Exploded View".
NO >> Repair or replace error-detected parts.

cardiagn.com

P0441 EVAP CONTROL SYSTEM

DTC Logic

INFOID:0000000012406462


DTC DETECTION LOGIC

NOTE:

If DTC P0441 is displayed with other DTC such as P2122, P2123, P2127, P2128 or P2138, first perform trouble diagnosis for other DTC.

In this evaporative emission (EVAP) control system, purge flow occurs during non-closed throttle conditions. Purge volume is related to air intake volume. Under normal purge conditions (non-closed throttle), the EVAP canister purge volume control solenoid valve is open to admit purge flow. Purge flow exposes the EVAP control system pressure sensor to intake manifold vacuum.

Under normal conditions (non-closed throttle), sensor output voltage indicates if pressure drop and purge flow are adequate. If not, a malfunction is determined.

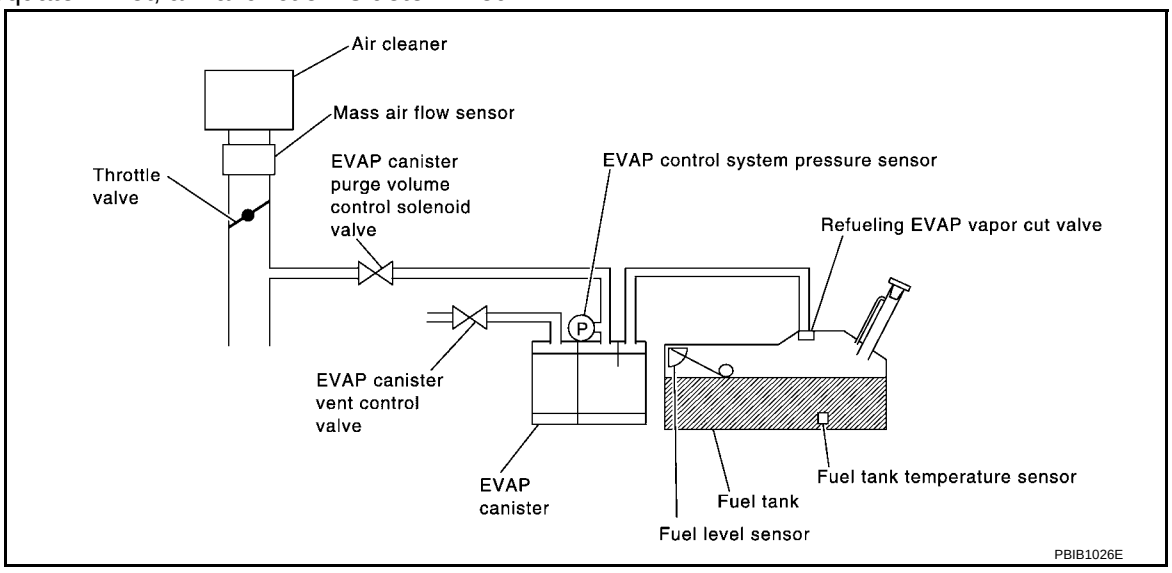

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0441	EVAP control system incorrect purge flow	EVAP control system does not operate properly, EVAP control system has a leakage between intake manifold and EVAP control system pressure sensor.	• EVAP canister purge volume control solenoid valve stuck closed • EVAP control system pressure sensor and the circuit • Loose, disconnected or improper connection of rubber tube • Blocked rubber tube • Cracked EVAP canister • EVAP canister purge volume control solenoid valve circuit • Accelerator pedal position sensor • Blocked purge port • EVAP canister vent control valve

DTC CONFIRMATION PROCEDURE

1.INSPECTION START

Will CONSULT be used?

Will CONSULT be used?

YES >> GO TO 2.
NO >> GO TO 6.

2.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.

cardiagn.com

2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Always perform test at a temperature of 5°C (41°F) or more.

>> GO TO 3.

3. PERFORM DTC CONFIRMATION PROCEDURE-I

With CONSULT

1. Start engine and warm it up to normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Start engine and let it idle for at least 70 seconds.
6. Select “PURG FLOW P0441” of “EVAPORATIVE SYSTEM” in “DTC WORK SUPPORT” mode with CONSULT.
7. Touch “START”.

Is “COMPLETED” displayed on CONSULT screen?

YES >> GO TO 5.
NO >> GO TO 4.

4. PERFORM DTC CONFIRMATION PROCEDURE-II

When the following conditions are met, “TESTING” will be displayed on the CONSULT screen. Maintain the conditions continuously until “TESTING” changes to “COMPLETED”. (It will take at least 35 seconds.)

Selector lever	Suitable position
VHCL SPEED SE	32 - 120 km/h (20 - 75 mph)
ENG SPEED	500 - 3,000 rpm
B/FUEL SCHDL	1.3 - 9.0 msec
COOLAN TEMP/S	More than 0°C (32°F)

CAUTION:
Always drive vehicle at a safe speed.
If “TESTING” does not change for a long time, retry from step 2.

Is “COMPLETED” displayed on CONSULT screen?

YES >> GO TO 5.
NO >> Perform DTC CONFIRMATION PROCEDURE again. GO TO 3.

5. PERFORM DTC CONFIRMATION PROCEDURE-III

Touch “SELF-DIAG RESULTS”.

Which is displayed on CONSULT screen?

OK >> INSPECTION END
NG >> Proceed to EC-312, "Diagnosis Procedure".

6. PERFORM COMPONENT FUNCTION CHECK

Perform component function check. Refer to EC-311, "Component Function Check".

NOTE:
Use component function check to check the overall monitoring function of the EVAP control system purge flow monitoring. During this check, a 1st trip DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-312, "Diagnosis Procedure".

Component Function Check

INFOID:0000000012406463

1. PERFORM COMPONENT FUNCTION CHECK

Without CONSULT

cardiagn.com

1. Lift up drive wheels.
2. Start engine (VDC switch OFF) and warm it up to normal operating temperature.
3. Turn ignition switch OFF, wait at least 10 seconds.
4. Turn ignition switch ON.
5. Turn ignition switch OFF, wait at least 10 seconds.
6. Start engine and wait at least 70 seconds.
7. Set voltmeter probes to ECM harness connector terminals under the following conditions.

ECM		
Connector	+	–
	Terminal	Terminal
E19	121 (EVAP control system pressure sensor signal)	148 (Sensor ground)

8. Check EVAP control system pressure sensor value at idle speed and note it.
9. Establish and maintain the following conditions for at least 1 minute.

Air conditioner switch	ON
Head lamp switch	ON
Rear window defogger switch	ON
Engine speed	Approx. 3,000 rpm
Gear position	Any position other than P, N or R

10. Verify that EVAP control system pressure sensor value stays 0.1 V less than the value at idle speed (measured at step 6) for at least 1 second.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-312, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406464

1.CHECK EVAP CANISTER

1. Turn ignition switch OFF.
2. Check EVAP canister for cracks.

Is the inspection result normal?

YES-1 >> With CONSULT: GO TO 2.
YES-2 >> Without CONSULT: GO TO 3.
NO >> Replace EVAP canister. Refer to FL-17, "Exploded View".

2.CHECK PURGE FLOW

With CONSULT

1. Disconnect vacuum hose connected to EVAP canister purge volume control solenoid valve at EVAP service port and install vacuum gauge. For the location of EVAP service port, refer to EC-51, "EVAPORATIVE EMISSION SYSTEM : System Description".
2. Start engine and let it idle.
3. Select “PURG VOL C/V” in “ACTIVE TEST” mode with CONSULT.
4. Touch “Qd” and “Qu” on CONSULT screen to adjust “PURG VOL C/V” opening and check vacuum existence.

PURG VOL C/V	Vacuum
100%	Existed
0%	Not existed

Is the inspection result normal?

YES >> GO TO 7.
NO >> GO TO 4.

cardiagn.com

3. CHECK PURGE FLOW

Without CONSULT

1. Start engine and warm it up to normal operating temperature.
2. Stop engine.
3. Disconnect vacuum hose connected to EVAP canister purge volume control solenoid valve at EVAP service port and install vacuum gauge. For the location of EVAP service port, refer to EC-51, "EVAPORATIVE EMISSION SYSTEM : System Description".
4. Start engine and let it idle.
   Do not depress accelerator pedal even slightly.
5. Check vacuum gauge indication before 60 seconds pass after starting engine.

Vacuum should not exist.

6. Rev engine up to 2,000 rpm after 100 seconds pass after starting engine.

Vacuum should exist.

Is the inspection result normal?

YES >> GO TO 7.
NO >> GO TO 4.

4. CHECK EVAP PURGE LINE


1. Turn ignition switch OFF.
2. Check EVAP purge line for improper connection or disconnection.
   Refer to EC-51, "EVAPORATIVE EMISSION SYSTEM : System Description".

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair EVAP purge line.

5. CHECK EVAP PURGE HOSE AND PURGE PORT


1. Disconnect purge hoses connected to EVAP service port **A** and EVAP canister purge volume control solenoid valve **B**.
2. Blow air into each hose and EVAP purge port **C**.

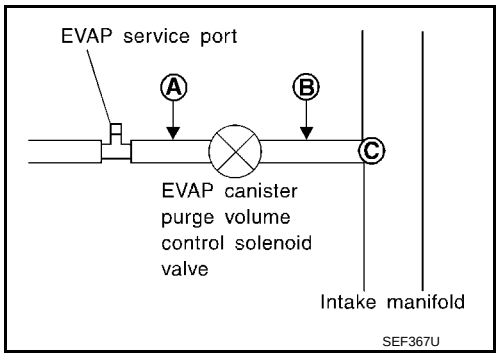

3. Check that air flows freely.

Is the inspection result normal?

YES-1 >> With CONSULT: GO TO 6.
YES-2 >> Without CONSULT: GO TO 7.
NO >> Repair or clean hoses and/or purge port.

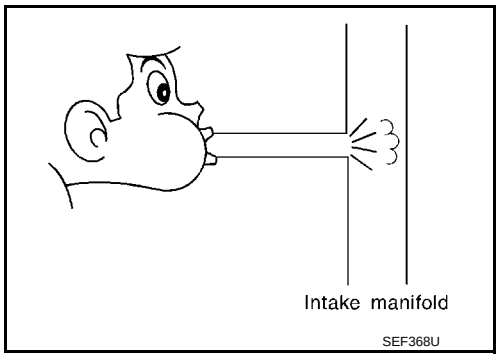

6. CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE

With CONSULT

1. Start engine.
2. Perform “PURG VOL C/V” in “ACTIVE TEST” mode with CONSULT. Check that engine speed varies according to the valve opening.

cardiagn.com

Does engine speed vary according to the valve opening?

YES >> GO TO 8.
NO >> GO TO 7.

7. CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE

Check EVAP canister purge volume control solenoid valve. Refer to EC-318, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 8.
NO >> Replace EVAP canister purge volume control solenoid valve. Refer to FL-17, "Exploded View".

8. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR CONNECTOR

1. Disconnect EVAP control system pressure sensor harness connector.
2. Check that water is not inside connectors.

Is the inspection result normal?

YES >> GO TO 9.
NO >> Replace EVAP control system pressure sensor. Refer to FL-17, "Exploded View".

9. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR FUNCTION

Check EVAP control system pressure sensor function. Refer to EC-334, "DTC Logic" for DTC P0452, EC-337, "DTC Logic" for DTC P0453.

Is the inspection result normal?

YES >> GO TO 10.
NO >> Replace EVAP control system pressure sensor. Refer to FL-17, "Exploded View".

10. CHECK RUBBER TUBE FOR CLOGGING

1. Disconnect rubber tube connected to EVAP canister vent control valve.
2. Check the rubber tube for clogging.

Is the inspection result normal?

YES >> GO TO 11.
NO >> Clean the rubber tube using an air blower.

11. CHECK EVAP CANISTER VENT CONTROL VALVE

Check EVAP canister vent control valve. Refer to EC-325, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 12.
NO >> Replace EVAP canister vent control valve. Refer to FL-17, "Exploded View".

12. CHECK EVAP PURGE LINE

Inspect EVAP purge line (pipe and rubber tube). Check for evidence of leakage.
Refer to EC-51, "EVAPORATIVE EMISSION SYSTEM : System Description".

Is the inspection result normal?

YES >> GO TO 13.
NO >> Repair EVAP purge line.

13. CLEAN EVAP PURGE LINE

Clean EVAP purge line (pipe and rubber tube) using air blower.

>> Check intermittent incident. Refer to GI-41, "Intermittent Incident".

cardiagn.com

P0443 EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE

DTC Logic

INFOID:0000000012406465

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition		Possible cause
P0443	EVAP canister purge volume control solenoid valve	A	The canister purge flow is detected during the cehicle is stopped while the engine is running, even when EVAP canister purge volume control solenoid valve is completely closed.	• EVAP control system pressure sensor • EVAP canister purge volume control solenoid valve (The valve is stuck open.) • EVAP canister vent control valve • EVAP canister • Hoses (Hoses are connected incorrectly or clogged.)
		B	The canister purge flow is detected during the specified driving conditions, even when EVAP canister purge volume control solenoid valve is completely closed.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

- **Perform “DTC CONFIRMATION PROCEDURE” when the fuel level is between 1/4 and 3/4 full, and vehicle is placed on flat level surface.**
- **Always perform test at a temperature of 5 to 60°C (41 to 140°F).**
- **Cool the vehicle so that engine coolant temperature becomes same level as ambient temperature.**

Do you have CONSULT

YES >> GO TO 2.
NO >> GO TO 4.

2.PERFORM DTC CONFIRMATION PROCEDURE A

With CONSULT

1. Turn ignition switch ON.
2. Check that the following condition are met.
   FUEL T/TMP SE: 0 - 35°C (32 - 95°F)
3. Start enfine and wait at least 60 seconds.
4. Check 1st trip DTC.

IS 1st trip DTC detected?

YES >> Proceed to EC-316, "Diagnosis Procedure".
NO >> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE B

With CONSULT

1. Start engine and warm it up to normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Turn ignition switch ON.
6. Select “PURG VOL CN/V P1444” of “EVAPORATIVE SYSTEM” in “DTC WORK SUPPORT” mode with CONSULT.
7. Touch “START”.
8. Start engine and let it idle until “TESTING” on CONSULT changes to “COMPLETED”. (It will take approximately 10 seconds.)
   If “TESTING” is not displayed after 5 minutes, retry from step 2.

cardiagn.com

9. Touch “SELF-DIAG RESULTS”.

Which is displayed on CONSULT screen?

YES >> INSPECTION END
NO >> Proceed to EC-316, "Diagnosis Procedure".

4.PERFORM DTC CONFIRMATION PROCEDURE A

With GST

1. Turn ignition switch ON.
2. Set voltmeter probes to ECM harness connector terminals.

ECM			Voltage (V)
Connector	+	–	
	Terminal	Terminal	
E19	128 (Fuel tank temperature sensor signal)	148 (Sensor ground)	3.1 - 4.0

3. Start engine and wait at least 60 seconds.
4. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-316, "Diagnosis Procedure".
NO >> GO TO 5.

5.PERFORM DTC CONFIRMATION PROCEDURE B

With GST

1. Start engine and warm it up to normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Start engine and let it idle for at least 20 seconds.
6. Check 1st trip DTC.

Is 1st trip DTC displayed?

YES >> Proceed to EC-316, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406466

1.CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE POWER SUPPLY

1. Turn ignition switch OFF.
2. Disconnect EVAP canister purge volume control solenoid valve harness connector.
3. Turn ignition switch ON.
4. Check the voltage between EVAP canister purge volume control solenoid valve harness connector and ground.

EVAP canister purge volume control solenoid valve		Ground	Voltage
Connector	Terminal		
F30	1	Ground	Battery voltage

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2.CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Check the continuity between EVAP canister purge volume control solenoid valve harness connector and IPDM E/R harness connector.

cardiagn.com

EVAP canister purge volume control solenoid valve		IPDM E/R		Continuity
Connector	Terminal	Connector	Terminal	
F30	1	E10	10	Existed

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

3. CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE OUTPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between EVAP canister purge volume control solenoid valve harness connector and ECM harness connector.

EVAP canister purge volume control solenoid valve		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F30	2	F14	54	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR CONNECTOR

1. Disconnect EVAP control system pressure sensor harness connector.
2. Check that water is not inside connectors.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Replace EVAP control system pressure sensor. Refer to FL-17, "Exploded View".

5. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR

Check EVAP control system pressure sensor. Refer to EC-333, "Component Inspection".

Is the inspection result normal?

YES-1 >> With CONSULT: GO TO 6.
YES-2 >> Without CONSULT: GO TO 7.
NO >> Replace EVAP control system pressure sensor. Refer to FL-17, "Exploded View".

6. CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE

With CONSULT

1. Turn ignition switch OFF.
2. Reconnect harness connectors disconnected.
3. Start engine.
4. Perform “PURG VOL C/V” in “ACTIVE TEST” mode with CONSULT. Check that engine speed varies according to the valve opening.

Does engine speed vary according to the valve opening?

YES >> GO TO 8.
NO >> GO TO 7.

7. CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE

Check EVAP canister purge volume control solenoid valve. Refer to EC-318, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 8.
NO >> Replace EVAP canister purge volume control solenoid valve. Refer to FL-17, "Exploded View".

cardiagn.com

8.CHECK RUBBER TUBE FOR CLOGGING

1. Disconnect rubber tube connected to EVAP canister vent control valve.
2. Check the rubber tube for clogging.

Is the inspection result normal?

YES >> GO TO 9.
NO >> Clean the rubber tube using an air blower.

9.CHECK EVAP CANISTER VENT CONTROL VALVE

Check EVAP canister vent control valve. Refer to EC-325, "Component Inspection".

Is the inspection result normal?


YES >> GO TO 10.
NO >> Replace EVAP canister vent control valve. Refer to FL-17, "Exploded View".

10.CHECK IF EVAP CANISTER IS SATURATED WITH WATER

Remove EVAP canister with EVAP canister vent control valve and EVAP control system pressure sensor attached. Refer to FL-17, "Exploded View".

Does water drain from the EVAP canister?

YES >> GO TO 11.
NO >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".

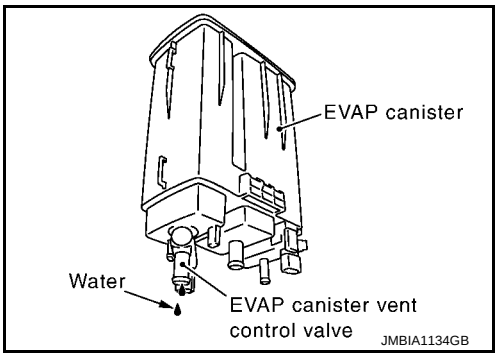

11.CHECK EVAP CANISTER

Weigh the EVAP canister with the EVAP canister vent control valve and EVAP control system pressure sensor attached.

The weight should be less than 2.1 kg (4.6 lb).

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> GO TO 12.

12.DETECT MALFUNCTIONING PART

Check the following.

- EVAP canister for damage
- EVAP hose between EVAP canister and vehicle frame for clogging or poor connection

>> Repair hose or replace EVAP canister. Refer to FL-17, "Exploded View".

Component Inspection

INFOID:0000000012406467


1.CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE

With CONSULT

1. Turn ignition switch OFF.
2. Reconnect all harness connectors disconnected.
3. Disconnect EVAP purge hoses connected to EVAP canister purge volume control solenoid valve.
4. Turn ignition switch ON.
5. Select “PURG VOL C/V” in “ACTIVE TEST” mode with CONSULT.

cardiagn.com


6. Touch “Qd” and “Qu” on CONSULT screen to adjust “PURG VOL C/V” opening and check air passage continuity of EVAP canister purge volume control solenoid valve under the following conditions.

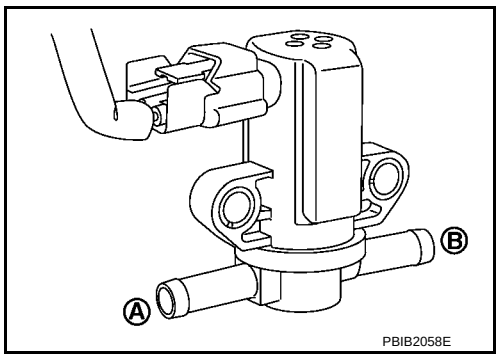

Condition (PURG VOL C/V value)	Air passage continuity between (A) and (B)
100%	Existed
0%	Not existed

Without CONSULT

1. Turn ignition switch OFF.
2. Disconnect EVAP canister purge volume control solenoid valve harness connector.
3. Disconnect EVAP purge hoses connected to EVAP canister purge volume control solenoid valve.
4. Check air passage continuity of EVAP canister purge volume control solenoid valve under the following conditions.

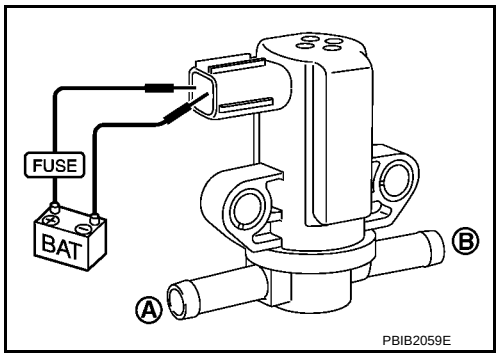

Condition	Air passage continuity between (A) and (B)
12 V direct current supply between terminals 1 and 2	Existed
No supply	Not existed

Is the inspection result normal?

YES >> INSPECTION END

NO >> Replace EVAP canister purge volume control solenoid valve. Refer to FL-17, "Exploded View".

cardiagn.com

P0444, P0445 EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE

DTC Logic

INFOID:0000000012406468

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0444	EVAP canister purge volume control solenoid valve circuit open	An excessively low voltage signal is sent to ECM through the valve	• Harness or connectors (The solenoid valve circuit is open or shorted.) • EVAP canister purge volume control solenoid valve
P0445	EVAP canister purge volume control solenoid valve circuit shorted	An excessively high voltage signal is sent to ECM through the valve	• Harness or connectors (The solenoid valve circuit is shorted.) • EVAP canister purge volume control solenoid valve

DTC CONFIRMATION PROCEDURE

1.CONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm battery voltage is more than 11 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for at least 13 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-320, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406469

1.CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE POWER SUPPLY

1. Turn ignition switch OFF.
2. Disconnect EVAP canister purge volume control solenoid valve harness connector.
3. Turn ignition switch ON.
4. Check the voltage between EVAP canister purge volume control solenoid valve harness connector and ground.

EVAP canister purge volume control solenoid valve		Ground	Voltage
Connector	Terminal		
F30	1	Ground	Battery voltage

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2.CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.

cardiagn.com

2. Disconnect IPDM E/R harness connector.
3. Check the continuity between EVAP canister purge volume control solenoid valve harness connector and IPDM E/R harness connector.

EVAP canister purge volume control solenoid valve		IPDM E/R		Continuity
Connector	Terminal	Connector	Terminal	
F30	1	E10	10	Existed

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

3.CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE OUTPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between EVAP canister purge volume control solenoid valve harness connector and ECM harness connector.

EVAP canister purge volume control solenoid valve		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F30	2	F14	54	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES-1 >> With CONSULT: GO TO 4.
YES-2 >> Without CONSULT: GO TO 5.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE OPERATION

With CONSULT

1. Reconnect all harness connectors disconnected.
2. Start engine.
3. Perform “PURG VOL C/V” in “ACTIVE TEST” mode with CONSULT. Check that engine speed varies according to the valve opening.

Does engine speed vary according to the valve opening?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> GO TO 5.

5.CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE

Check EVAP canister purge volume control solenoid valve. Refer to EC-321, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace EVAP canister purge volume control solenoid valve. Refer to FL-17, "Exploded View".

Component Inspection

INFOID:0000000012406470

1.CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE


With CONSULT

1. Turn ignition switch OFF.
2. Reconnect all harness connectors disconnected.
3. Disconnect EVAP purge hoses connected to EVAP canister purge volume control solenoid valve.
4. Start engine.
5. Select “PURG VOL C/V” in “ACTIVE TEST” mode with CONSULT.

cardiagn.com

6. Touch “Qd” and “Qu” on CONSULT screen to adjust “PURG VOL C/V” opening and check air passage continuity of EVAP canister purge volume control solenoid valve under the following conditions.


Condition (PURG VOL C/V value)	Air passage continuity between (A) and (B)
100%	Existed
0%	Not existed

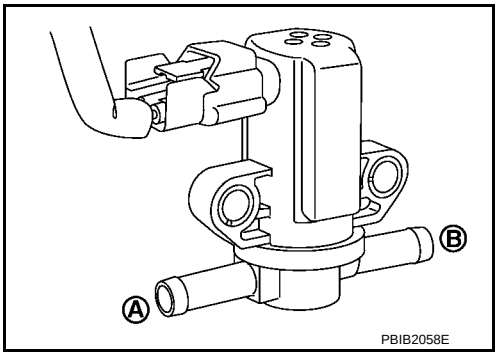

Without CONSULT

1. Turn ignition switch OFF.
2. Disconnect EVAP canister purge volume control solenoid valve harness connector.
3. Disconnect EVAP purge hoses connected to EVAP canister purge volume control solenoid valve.
4. Check air passage continuity of EVAP canister purge volume control solenoid valve under the following conditions.

Condition	Air passage continuity between (A) and (B)
12 V direct current supply between terminals 1 and 2	Existed
No supply	Not existed

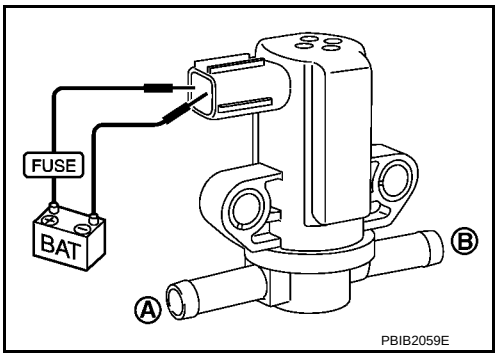

Is the inspection result normal?

YES >> INSPECTION END

NO >> Replace EVAP canister purge volume control solenoid valve. Refer to FL-17, "Exploded View".

cardiagn.com

P0447 EVAP CANISTER VENT CONTROL VALVE

DTC Logic

INFOID:0000000012406471

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0447	EVAP canister vent control valve circuit open	An improper voltage signal is sent to ECM through EVAP canister vent control valve.	• Harness or connectors (The valve circuit is open or shorted.) • EVAP canister vent control valve • Hoses (Hoses are connected incorrectly or clogged.)

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm battery voltage is more than 11 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and wait at least 8 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-323, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406472

1.INSPECTION START

Will CONSULT be used?

Will CONSULT be used?

YES >> GO TO 2.
NO >> GO TO 3.

2.CHECK EVAP CANISTER VENT CONTROL VALVE CIRCUIT

With CONSULT

1. Turn ignition switch OFF and then ON.
2. Select “VENT CONTROL/V” in “ACTIVE TEST” mode with CONSULT.
3. Touch “ON/OFF” on CONSULT screen.
4. Check for operating sound of the valve.

Clicking sound should be heard.

Is the inspection result normal?

YES >> GO TO 6.
NO >> GO TO 3.

3.CHECK EVAP CANISTER VENT CONTROL VALVE POWER SUPPLY

1. Turn ignition switch OFF.
2. Disconnect EVAP canister vent control valve harness connector.

cardiagn.com

3. Turn ignition switch ON.
4. Check the voltage between EVAP canister vent control valve harness connector and ground.

EVAP canister vent control valve		Ground	Voltage
Connector	Terminal		
B66	1	Ground	Battery voltage

Is the inspection result normal?

YES >> GO TO 5.
NO >> GO TO 4.

4. CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Check the continuity between EVAP canister purge volume control solenoid valve harness connector and IPDM E/R harness connector.

EVAP canister vent control valve		IPDM E/R		Continuity
Connector	Terminal	Connector	Terminal	
B66	1	F12	53	Existed

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

5. CHECK EVAP CANISTER VENT CONTROL VALVE OUTPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between ECM harness connector and EVAP canister vent control valve harness connector.
   Refer to Wiring Diagram.

EVAP canister vent control valve		ECM		Continuity
Connector	Terminal	Connector	Terminal	
B66	2	E19	141	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

6. CHECK RUBBER TUBE FOR CLOGGING

1. Disconnect rubber tube connected to EVAP canister vent control valve.
2. Check the rubber tube for clogging.

Is the inspection result normal?

YES >> GO TO 7.
NO >> Clean the rubber tube using an air blower.

7. CHECK EVAP CANISTER VENT CONTROL VALVE

Check EVAP canister vent control valve. Refer to EC-325, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace EVAP canister vent control valve. Refer to FL-17, "Exploded View".


cardiagn.com

Component Inspection

INFOID:0000000012406473

1. CHECK EVAP CANISTER VENT CONTROL VALVE-I

1. Remove EVAP canister vent control valve from EVAP canister. Refer to FL-17, "Exploded View".
2. Check portion (A) of EVAP canister vent control valve for rust.

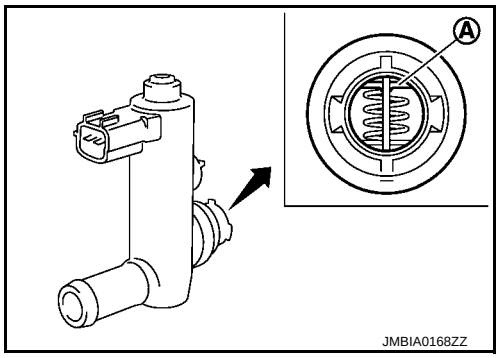


Is it rusted?

YES >> Replace EVAP canister vent control valve. Refer to FL-17, "Exploded View".
NO >> GO TO 2.

2. CHECK EVAP CANISTER VENT CONTROL VALVE-II

With CONSULT

1. Reconnect harness connectors disconnected.
2. Turn ignition switch ON.
3. Perform “VENT CONTROL/V” in “ACTIVE TEST” mode.
4. Check air passage continuity and operation delay time.
   Check that new O-ring is installed properly.

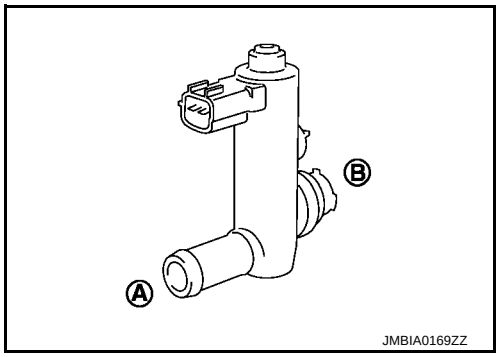

Condition VENT CONTROL/V	Air passage continuity between (A) and (B)
ON	Not existed
OFF	Existed

Operation takes less than 1 second.

Without CONSULT

1. Disconnect EVAP canister vent control valve harness connector.
2. Check air passage continuity and operation delay time under the following conditions.

Check that new O-ring is installed properly.

Condition	Air passage continuity between (A) and (B)
12 V direct current supply between terminals 1 and 2	Not existed
OFF	Existed

Operation takes less than 1 second.

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 3.


3. CHECK EVAP CANISTER VENT CONTROL VALVE-III

With CONSULT

1. Clean the air passage [portion (A) to (B)] of EVAP canister vent control valve using an air blower.
2. Perform “VENT CONTROL/V” in “ACTIVE TEST” mode.

cardiagn.com

3. Check air passage continuity and operation delay time.
Check that new O-ring is installed properly.

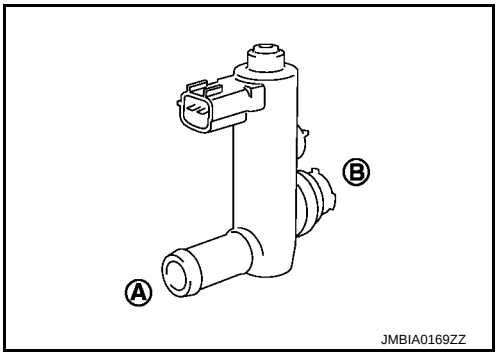

Condition VENT CONTROL/V	Air passage continuity between (A) and (B)
ON	No
OFF	Yes

Operation takes less than 1 second.

Without CONSULT

1. Clean the air passage [portion (A) to (B)] of EVAP canister vent control valve using an air blower.
2. Check air passage continuity and operation delay time under the following conditions.
Check that new O-ring is installed properly.

Condition	Air passage continuity between (A) and (B)
12 V direct current supply between terminals (1) and (2)	No
OFF	Yes

Operation takes less than 1 second.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace EVAP canister vent control valve. Refer to FL-17, "Exploded View".

cardiagn.com

P0448 EVAP CANISTER VENT CONTROL VALVE

DTC Logic

INFOID:0000000012406474

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0448	EVAP canister vent control valve close	EVAP canister vent control valve remains closed under specified driving conditions.	• EVAP canister vent control valve • EVAP control system pressure sensor and the circuit • Blocked rubber tube to EVAP canister vent control valve • EVAP canister is saturated with water

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

With CONSULT

1. Turn ignition switch ON and wait at least 5 seconds.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON and select “DATA MONITOR” mode with CONSULT.
4. Start engine and let it idle for at least 1 minute.
5. Repeat next procedures 3 times.


- Increase the engine speed up to 3,000 to 3,500 rpm and keep it for 2 minutes and 50 seconds to 3 minutes.

Never exceed 3 minutes.

- Fully released accelerator pedal and keep engine idle for about 5 seconds.

6. Repeat next procedure 20 times.

- Quickly increase the engine speed up to 4,000 to 4,500 rpm or more and keep it for 25 to 30 seconds.
- Fully released accelerator pedal and keep engine idle for at least 35 seconds.

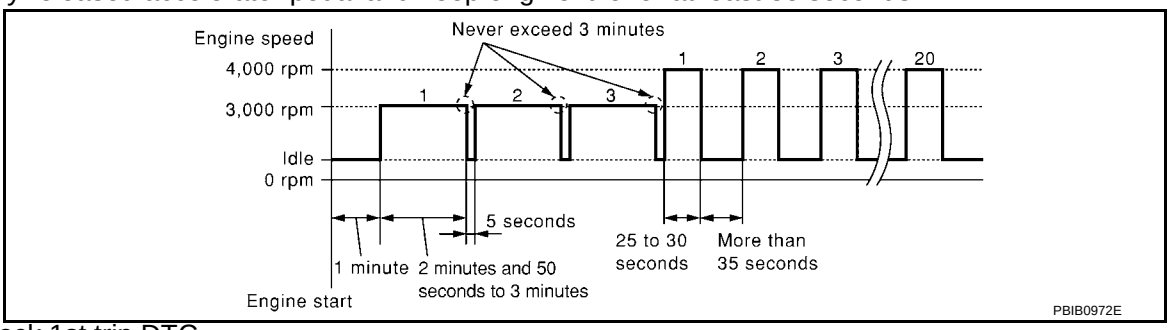

7. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-327, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406475

1.CHECK RUBBER TUBE

1. Turn ignition switch OFF.

cardiagn.com

2. Disconnect rubber tube connected to EVAP canister vent control valve.
3. Check the rubber tube for clogging.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Clean rubber tube using an air blower.

2.CHECK EVAP CANISTER VENT CONTROL VALVE

Check EVAP canister vent control valve. Refer to EC-329, "Component Inspection".

Is he inspection result normal?


YES >> GO TO 3.
NO >> Replace EVAP canister vent control valve. Refer to FL-17, "Exploded View".

3.CHECK IF EVAP CANISTER SATURATED WITH WATER

1. Remove EVAP canister with EVAP canister vent control valve and EVAP control system pressure sensor attached. Refer to FL-17, "Exploded View".
2. Check if water will drain from the EVAP canister.

Does water drain from the EVAP canister?

YES >> GO TO 4.
NO >> GO TO 6.

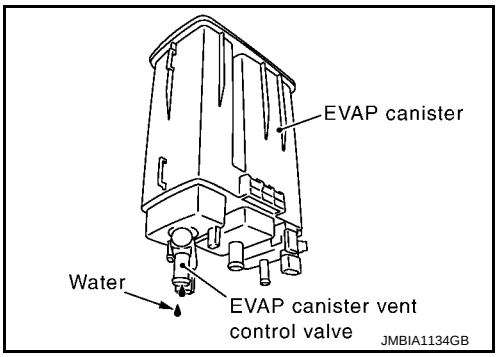

4.CHECK EVAP CANISTER

Weigh the EVAP canister with the EVAP canister vent control valve and EVAP control system pressure sensor attached.

The weight should be less than 2.1 kg (4.6 lb).

Is the inspection result normal?

YES >> GO TO 6.
NO >> GO TO 5.

5.DETECT MALFUNCTIONING PART

Check the following.

- EVAP canister for damage
- EVAP hose between EVAP canister and vehicle frame for clogging or poor connection

>> Repair hose or replace EVAP canister. Refer to FL-17, "Exploded View".

6.CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR CONNECTOR

1. Disconnect EVAP control system pressure sensor harness connector.
2. Check that water is not inside connectors.

Is the inspection result normal?

YES >> GO TO 7.
NO >> Replace EVAP control system pressure sensor. Refer to FL-17, "Exploded View".

7.CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR

Check EVAP control system pressure sensor. Refer to EC-333, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace EVAP control system pressure sensor. Refer to FL-17, "Exploded View".


cardiagn.com

Component Inspection

INFOID:0000000012406476

1. CHECK EVAP CANISTER VENT CONTROL VALVE-I

1. Remove EVAP canister vent control valve from EVAP canister. Refer to FL-17, "Exploded View".
2. Check portion (A) of EVAP canister vent control valve for rust.

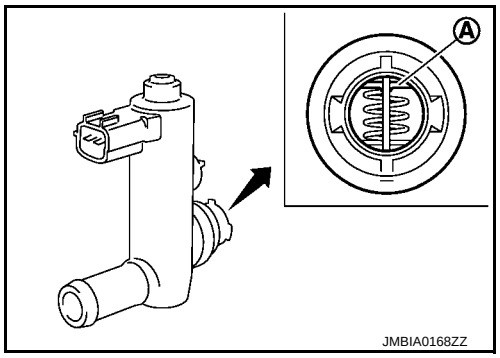


Is it rusted?

YES >> Replace EVAP canister vent control valve. Refer to FL-17, "Exploded View".
NO >> GO TO 2.

2. CHECK EVAP CANISTER VENT CONTROL VALVE-II

With CONSULT

1. Reconnect harness connectors disconnected.
2. Turn ignition switch ON.
3. Perform “VENT CONTROL/V” in “ACTIVE TEST” mode.
4. Check air passage continuity and operation delay time.
   Check that new O-ring is installed properly.

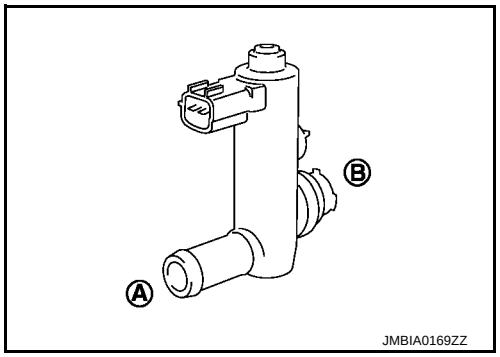

Condition VENT CONTROL/V	Air passage continuity between (A) and (B)
ON	Not existed
OFF	Existed

Operation takes less than 1 second.

Without CONSULT

1. Disconnect EVAP canister vent control valve harness connector.
2. Check air passage continuity and operation delay time under the following conditions.

Check that new O-ring is installed properly.

Condition	Air passage continuity between (A) and (B)
12 V direct current supply between terminals 1 and 2	Not existed
OFF	Existed

Operation takes less than 1 second.

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 3.


3. CHECK EVAP CANISTER VENT CONTROL VALVE-III

With CONSULT

1. Clean the air passage [portion (A) to (B)] of EVAP canister vent control valve using an air blower.
2. Perform “VENT CONTROL/V” in “ACTIVE TEST” mode.

cardiagn.com

3. Check air passage continuity and operation delay time.
Check that new O-ring is installed properly.

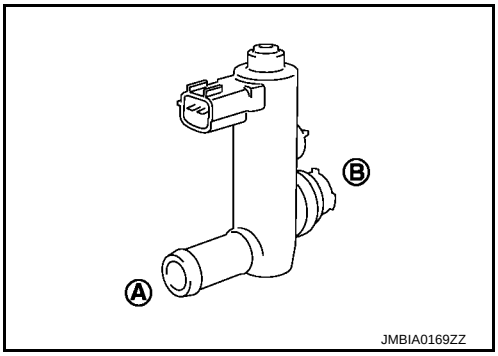

Condition VENT CONTROL/V	Air passage continuity between (A) and (B)
ON	No
OFF	Yes

Operation takes less than 1 second.

Without CONSULT

1. Clean the air passage [portion (A) to (B)] of EVAP canister vent control valve using an air blower.
2. Check air passage continuity and operation delay time under the following conditions.
Check that new O-ring is installed properly.

Condition	Air passage continuity between (A) and (B)
12 V direct current supply between terminals (1) and (2)	No
OFF	Yes

Operation takes less than 1 second.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace EVAP canister vent control valve. Refer to FL-17, "Exploded View".

cardiagn.com

P0451 EVAP CONTROL SYSTEM PRESSURE SENSOR

DTC Logic

INFOID:0000000012406477

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0451	EVAP control system pressure sensor performance	ECM detects a sloshing signal from the EVAP control system pressure sensor	• Harness or connectors (EVAP control system pressure sensor circuit is shorted.) [CKP sensor (POS) circuit is shorted.] (APP sensor 2 circuit is shorted.) (Refrigerant pressure sensor circuit is shorted.) • EVAP control system pressure sensor • Crankshaft position sensor (POS) • Accelerator pedal position sensor • Refrigerant pressure sensor

DTC CONFIRMATION PROCEDURE

NOTE:
Never remove fuel filler cap during DTC confirmation procedure.

1. PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

With CONSULT>>GO TO 2.
Without CONSULT>>GO TO 5.

2. PERFORM DTC CONFIRMATION PROCEDURE-1

With CONSULT

1. Start engine and let it idle for least 40 seconds.
   NOTE:
   Do not depress accelerator pedal even slightly.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-332, "Diagnosis Procedure".
NO >> GO TO 3.

3. PERFORM DTC CONFIRMATION PROCEDURE-2

With CONSULT

1. Select “EVAP DIAG READY” in “DATA MONITOR” mode of “ENGINE”.
2. Let it idle until “OFF” of “EVAP DIAG READY” changes to “ON”.
   NOTE:
   It will take at most 2 hours until “OFF” of “EVAP DIAG READY” changes to “ON”.
3. Turn ignition switch OFF and wait at least 90 minutes.
   NOTE:
   Never turn ignition switch ON during 90 minutes.
4. Turn ignition switch ON.
5. Select “EVAP LEAK DIAG” in “DATA MONITOR” mode of “ENGINE”.
6. Check that “EVAP LEAK DIAG” indication.

Which is displayed on CONSULT?

CMPLT >> GO TO 4.
YET >> 1. Perform DTC CONFIRMATION PROCEDURE again.
2. GO TO 1.

cardiagn.com

4. PERFORM DTC CONFIRMATION PROCEDURE-3

With CONSULT
Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-332, "Diagnosis Procedure".
NO >> INSPECTION END

5. PERFORM DTC CONFIRMATION PROCEDURE-4

With GST
1. Start engine and let it idle for least 40 seconds.
   NOTE:
   Do not depress accelerator pedal even slightly.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-332, "Diagnosis Procedure".
NO >> GO TO 6.

6. PERFORM DTC CONFIRMATION PROCEDURE-5

With GST
1. Let it idle for at least 2 hours.
2. Turn ignition switch OFF and wait at least 90 minutes.
   NOTE:
   Never turn ignition switch ON during 90 minutes.
3. Turn ignition switch ON.
4. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-332, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406478

1. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR CONNECTOR FOR WATER

1. Disconnect EVAP control system pressure sensor harness connector.
2. Check that water is not inside connectors.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair or replace harness connector.

2. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR POWER SUPPLY

1. Turn ignition switch ON.
2. Check the voltage between EVAP control system pressure sensor harness connector and ground.

EVAP control system pressure sensor		Ground	Voltage (V)
Connector	Terminal		
B22	3	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 3.

3. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the confinuity between EVAP control system pressure sensor harness connector and ECM harness connector.

cardiagn.com

EVAP control system pressure sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
B22	3	E19	125	Existed

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Repair short to ground or short to power in harness or connectors.

4. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR

Check EVAP control system pressure sensor. Refer to EC-333, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace EVAP control system pressure sensor. Refer to FL-17, "Exploded View".

Component Inspection

INFOID:0000000012406479

1. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR

1. Turn ignition switch OFF.
2. Remove EVAP control system pressure sensor with its harness connector. Refer to FL-17, "Exploded View".
   Always replace O-ring with a new one.
3. Install a vacuum pump to EVAP control system pressure sensor.
4. Turn ignition switch ON and check output voltage between ECM terminals under the following conditions.

ECM			Applied vacuum kPa (kg/cm^2, psi)	Voltage
Connector	+	–		
	Terminal	Terminal		
E19	121 (EVAP control system pressure sensor signal)	148 (Sensor ground)	Not applied	1.8 - 4.8 V
			-26.7 (-0.272, -3.87)	2.1 to 2.5 V lower than above value

CAUTION:

- **Always calibrate the vacuum pump gauge when using it.**
- **Never apply below -93.3 kPa (-0.952 kg/cm^2, -13.53 psi) or pressure over 101.3 kPa (1.033 kg/cm^2, 14.69 psi).**

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace EVAP control system pressure sensor. Refer to FL-17, "Exploded View".

cardiagn.com

P0452 EVAP CONTROL SYSTEM PRESSURE SENSOR

DTC Logic

INFOID:0000000012406480

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0452	EVAP control system pressure sensor low input	An excessively low voltage from the sensor is sent to ECM.	• Harness or connectors (The sensor circuit is open or shorted.) [CKP sensor (POS) circuit is shorted.] (APP sensor 2 circuit is shorted.) (Refrigerant pressure sensor circuit is shorted.) • EVAP control system pressure sensor • Crankshaft position sensor (POS) • Accelerator pedal position sensor • Refrigerant pressure sensor

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Always perform test at a temperature of 5°C (41°F) or more.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

With CONSULT

1. Start engine and warm it up to normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Turn ignition switch ON.
6. Select “DATA MONITOR” mode with CONSULT.
7. Check that “FUEL T/TMP SE” is more than 0°C (32°F).
8. Start engine and wait at least 20 seconds.
9. Check 1st trip DTC.

With GST

1. Start engine and warm it up to normal operating temperature.
2. Set voltmeter probes to ECM harness connector terminals under the following conditions.

ECM		
Connector	+	–
	Terminal	Terminal
E19	128 (Fuel tank temperature sensor signal)	148 (Sensor ground)

3. Check that the voltage is less than 4.2 V.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Turn ignition switch ON.
6. Turn ignition switch OFF and wait at least 10 seconds.
7. Start engine and wait at least 20 seconds.
8. Check 1st trip DTC.

Is 1st trip DTC detected?

cardiagn.com

YES >> Proceed to EC-335, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406481

1.CHECK CONNECTOR

1. Disconnect EVAP control system pressure sensor harness connector.
2. Check that water is not inside connector.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair or replace harness connector.

2.CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR POWER SUPPLY

1. Turn ignition switch ON.
2. Check the voltage between EVAP control system pressure sensor harness connector and ground.

EVAP control system pressure sensor		Ground	Voltage (V)
Connector	Terminal		
B22	3	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 3.

3.CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between EVAP control system pressure sensor harness connector and ECM harness connector.

EVAP control system pressure sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
B22	3	E19	125	Existed

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Repair open circuit.

4.CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between EVAP control system pressure sensor harness connector and ECM harness connector.

EVAP control system pressure sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
B22	1	E19	148	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

5.CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between EVAP control system pressure sensor harness connector and ECM harness connector.

cardiagn.com

EVAP control system pressure sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
B22	2	E19	121	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

6. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR

Check EVAP control system pressure sensor. Refer to EC-336, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace EVAP control system pressure sensor. Refer to FL-17, "Exploded View".

Component Inspection

INFOID:0000000012406482

1. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR

1. Turn ignition switch OFF.
2. Remove EVAP control system pressure sensor with its harness connector. Refer to FL-17, "Exploded View".
   Always replace O-ring with a new one.
3. Install a vacuum pump to EVAP control system pressure sensor.
4. Turn ignition switch ON and check output voltage between ECM terminals under the following conditions.

ECM			Applied vacuum kPa (kg/cm^2, psi)	Voltage
Connector	+	–		
	Terminal	Terminal		
E19	121 (EVAP control system pressure sensor signal)	148 (Sensor ground)	Not applied	1.8 - 4.8 V
			-26.7 (-0.272, -3.87)	2.1 to 2.5 V lower than above value

CAUTION:

- **Always calibrate the vacuum pump gauge when using it.**
- **Never apply below -93.3 kPa (-0.952 kg/cm^2, -13.53 psi) or pressure over 101.3 kPa (1.033 kg/cm^2, 14.69 psi).**

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace EVAP control system pressure sensor. Refer to FL-17, "Exploded View".

cardiagn.com

P0453 EVAP CONTROL SYSTEM PRESSURE SENSOR

DTC Logic

INFOID:0000000012406483

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0453	EVAP control system pressure sensor high input	An excessively high voltage from the sensor is sent to ECM.	• Harness or connectors (The sensor circuit is open or shorted.) [CKP sensor (POS) circuit is shorted.] (APP sensor 2 circuit is shorted.) (Refrigerant pressure sensor circuit is shorted.) • EVAP control system pressure sensor • Crankshaft position sensor (POS) • Accelerator pedal position sensor • Refrigerant pressure sensor • EVAP canister vent control valve • EVAP canister • Rubber hose from EVAP canister vent control valve to vehicle frame

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Always perform test at a temperature of 5°C (41°F) or more.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

With CONSULT

1. Start engine and warm it up to normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Turn ignition switch ON.
6. Select “DATA MONITOR” mode with CONSULT.
7. Check that “FUEL T/TMP SE” is more than 0°C (32°F).
8. Start engine and wait at least 20 seconds.
9. Check 1st trip DTC.

With GST

1. Start engine and warm it up to normal operating temperature.
2. Set voltmeter probes to ECM harness connector terminals.

ECM		
Connector	+	–
	Terminal	Terminal
E19	128 (Fuel tank temperature sensor signal)	148 (Sensor ground)

3. Check that the voltage is less than 4.2 V.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Turn ignition switch ON.

cardiagn.com

6. Turn ignition switch OFF and wait at least 10 seconds.
7. Start engine and wait at least 20 seconds.
8. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-338, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406484

1.CHECK CONNECTOR

1. Disconnect EVAP control system pressure sensor harness connector.
2. Check that water is not inside connectors.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair or replace harness connector.

2.CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR POWER SUPPLY

1. Turn ignition switch ON.
2. Check the voltage between EVAP control system pressure sensor harness connector and ground.

EVAP control system pressure sensor		Ground	Voltage (V)
Connector	Terminal		
B22	3	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 3.

3.CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between EVAP control system pressure sensor harness connector and ECM harness connector.

EVAP control system pressure sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
B22	3	E19	125	Existed

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Repair open circuit.

4.CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between EVAP control system pressure sensor harness connector and ECM harness connector.

EVAP control system pressure sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
B22	1	E19	148	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

cardiagn.com

5. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between EVAP control system pressure sensor harness connector and ECM harness connector.

EVAP control system pressure sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
B22	2	E19	121	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

6. CHECK RUBBER TUBE

1. Disconnect rubber tube connected to EVAP canister vent control valve.
2. Check the rubber tube for clogging.

Is the inspection result normal?

YES >> GO TO 7.
NO >> Clean the rubber tube using an air blower, repair or replace rubber tube.

7. CHECK EVAP CANISTER VENT CONTROL VALVE

Check EVAP canister vent control valve. Refer to EC-325, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 8.
NO >> Replace EVAP canister vent control valve. Refer to FL-17, "Exploded View".

8. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR

Check EVAP control system pressure sensor. Refer to EC-340, "Component Inspection".

Is the inspection result normal?


YES >> GO TO 9.
NO >> Replace EVAP control system pressure sensor. Refer to FL-17, "Exploded View".

9. CHECK IF EVAP CANISTER IS SATURATED WITH WATER

1. Remove EVAP canister with EVAP canister vent control valve and EVAP control system pressure sensor attached. Refer to FL-17, "Exploded View".
2. Check if water will drain from the EVAP canister.

Does water drain from the EVAP canister?

YES >> GO TO 10.
NO >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".

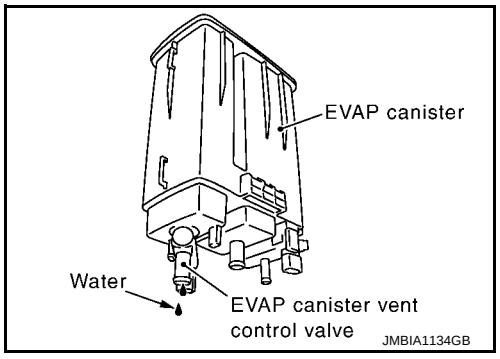

10. CHECK EVAP CANISTER

Weigh the EVAP canister with the EVAP canister vent control valve and EVAP control system pressure sensor attached.

The weight should be less than 2.1 kg (4.6 lb).

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> GO TO 11.

11. DETECT MALFUNCTIONING PART

cardiagn.com

Check the following.
- EVAP canister for damage
- EVAP hose between EVAP canister and vehicle frame for clogging or poor connection

>> Repair hose or replace EVAP canister. Refer to FL-17, "Exploded View".

Component Inspection

INFOID:0000000012406485

1. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR

1. Turn ignition switch OFF.
2. Remove EVAP control system pressure sensor with its harness connector. Refer to FL-17, "Exploded View".
   Always replace O-ring with a new one.
3. Install a vacuum pump to EVAP control system pressure sensor.
4. Turn ignition switch ON and check output voltage between ECM terminals under the following conditions.

ECM			Applied vacuum kPa (kg/cm^2, psi)	Voltage
Connector	+	–		
	Terminal	Terminal		
E19	121 (EVAP control system pressure sensor signal)	148 (Sensor ground)	Not applied	1.8 - 4.8 V
			-26.7 (-0.272, -3.87)	2.1 to 2.5 V lower than above value

CAUTION:
- **Always calibrate the vacuum pump gauge when using it.**
- **Never apply below -93.3 kPa (-0.952 kg/cm^2, -13.53 psi) or pressure over 101.3 kPa (1.033 kg/cm^2, 14.69 psi).**

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace EVAP control system pressure sensor. Refer to FL-17, "Exploded View".

cardiagn.com


P0456 EVAP CONTROL SYSTEM

DTC Logic

INFOID:0000000012406486

DTC DETECTION LOGIC

This diagnosis detects leaks in the EVAP line between fuel tank and EVAP canister purge volume control solenoid valve, using the negative pressure caused by decrease of fuel temperature in the fuel tank after turning ignition switch OFF.
If ECM judges there are no leaks, the diagnosis will be OK.

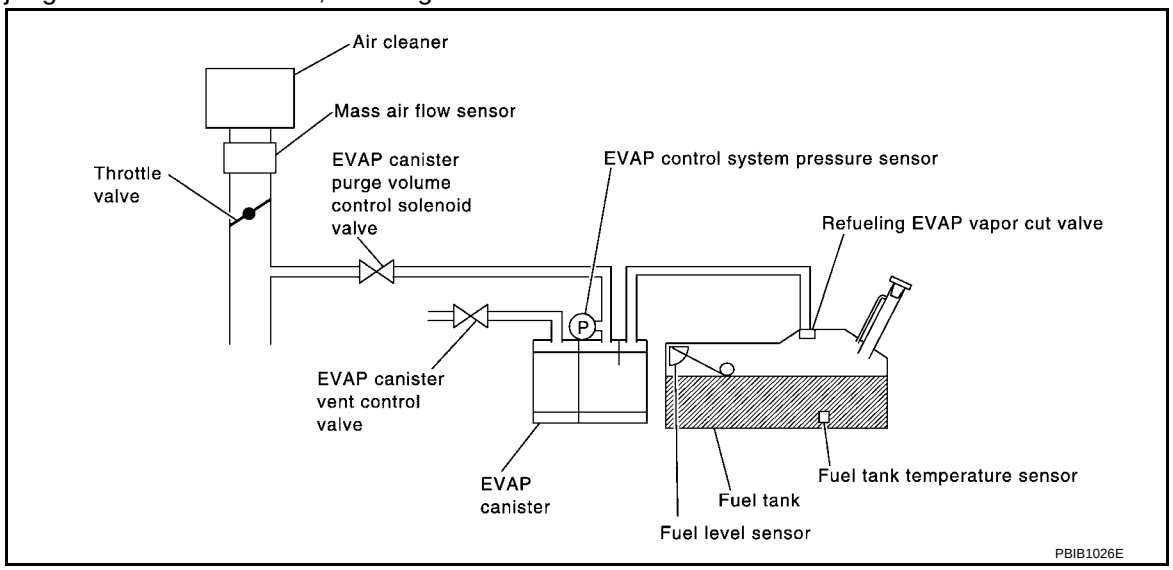

DTC No.	Trouble diagnosis name (Trouble diagnosis content)	DTC detecting condition	Possible cause
P0456	Evaporative emission control system leak	• EVAP system has a leak. • EVAP system does not operate properly.	• Incorrect fuel tank vacuum relief valve • Incorrect fuel filler cap used • Fuel filler cap remains open or does not close. • Foreign matter caught in fuel filler cap. • Leakage is in line between intake manifold and EVAP canister purge volume control solenoid valve. • Foreign matter caught in EVAP canister vent control valve. • EVAP canister or fuel tank leakage • EVAP purge line (pipe and rubber tube) leakage • EVAP purge line rubber tube bent • Loose or disconnected rubber tube • EVAP canister vent control valve and the circuit • EVAP canister purge volume control solenoid valve and the circuit • Fuel tank temperature sensor • O-ring of EVAP canister vent control valve is missing or damaged • EVAP canister is saturated with water • EVAP control system pressure sensor • Refueling EVAP vapor cut valve • ORVR system leakage • Fuel level sensor and the circuit • Foreign matter caught in EVAP canister purge volume control solenoid valve

CAUTION:

- **Use only a genuine NISSAN fuel filler cap as a replacement. If an incorrect fuel filler cap is used, the MIL may illuminate.**
- **If the fuel filler cap is not tightened properly, the MIL may illuminate.**
- **Use only a genuine NISSAN rubber tube as a replacement.**

cardiagn.com

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

Do you have CONSULT?

YES >> GO TO 2.
NO >> GO TO 4.

2.PERFORM DTC CONFIRMATION PROCEDURE-I

WITH CONSULT

1. Turn ignition switch ON and select “EVAP DIAG READY” in “DATA MONITOR” mode with CONSULT.
2. Start engine and wait at idle until “OFF” of “EVAP DIAG READY” changes to “ON”.
   NOTE:
   It will take at most 2 hours until “OFF” of “EVAP DIAG READY” changes to “ON”.
3. Turn ignition switch OFF and wait at least 90 minutes.
   NOTE:
   Never turn ignition switch ON during 90 minutes.
4. Turn ignition switch ON and select “EVAP LEAK DIAG” in “DATA MONITOR” mode with CONSULT.
5. Check that “EVAP LEAK DIAG” indication.

Which is displayed on CONSULT?

CMPLT >> GO TO 3.
YET >> Perform DTC CONFIRMATION PROCEDURE again. GO TO 1.

3.PERFORM DTC CONFIRMATION PROCEDURE-II

Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-342, "Diagnosis Procedure".
NO >> INSPECTION END.

4.PERFORM DTC CONFIRMATION PROCEDURE

WITH GST

1. Start engine and wait engine idle for at least 2 hours.
2. Turn ignition switch OFF and wait at least 90 minutes.
   NOTE:
   Never turn ignition switch ON during 90 minutes.
3. Turn ignition switch ON.
4. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-342, "Diagnosis Procedure".
NO >> INSPECTION END.

Diagnosis Procedure

INFOID:0000000012406487

1.CHECK FUEL FILLER CAP DESIGN


1. Turn ignition switch OFF.

cardiagn.com

2. Check for genuine NISSAN fuel filler cap design.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace with genuine NISSAN fuel filler cap. Refer to FL-13, "Exploded View".

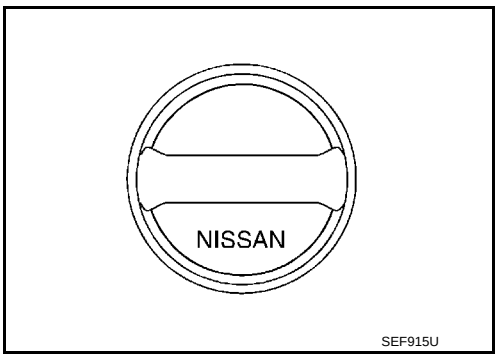

2.CHECK FUEL FILLER CAP INSTALLATION

Check that the cap is tightened properly by rotating the cap clockwise.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Open fuel filler cap, then clean cap and fuel filler neck threads using air blower. Then retighten until reteaching sound is heard.

3.CHECK FUEL FILLER CAP FUNCTION

Check for air releasing sound while opening the fuel filler cap.

Is the inspection result normal?

YES >> GO TO 5.
NO >> GO TO 4.

4.CHECK FUEL TANK VACUUM RELIEF VALVE

Refer to EC-346, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 5.
NO >> Replace fuel filler cap with a genuine one. Refer to FL-13, "Exploded View".

5.CHECK FOR EVAP LEAK

Refer to FL-18, "Inspection".

Is there any leak in EVAP line?

YES >> Repair or replace.
NO >> GO TO 6.

6.CHECK EVAP CANISTER VENT CONTROL VALVE

Check the following.
- EVAP canister vent control valve is installed properly.
  Refer to FL-17, "Exploded View".
- EVAP canister vent control valve.
  Refer to EC-329, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 7.
NO >> Repair or replace EVAP canister vent control valve and O-ring. Refer to FL-17, "Exploded View".


7.CHECK IF EVAP CANISTER SATURATED WITH WATER

cardiagn.com

1. Remove EVAP canister with EVAP canister vent control valve and EVAP control system pressure sensor attached.
2. Check if water will drain from the EVAP canister.

Does water drain from EVAP canister?

YES >> GO TO 8.
NO-1 >> With CONSULT: GO TO 10.
NO-2 >> Without CONSULT: GO TO 11.

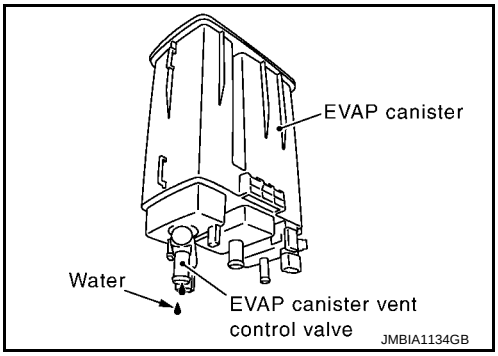

8. CHECK EVAP CANISTER

Weigh the EVAP canister assembly with the EVAP canister vent control valve and EVAP control system pressure sensor attached. Refer to FL-17, "Exploded View".
The weight should be less than 2.1 kg (4.6 lb).

Is the inspection result normal?

YES-1 >> With CONSULT: GO TO 10.
YES-2 >> Without CONSULT: GO TO 11.
NO >> GO TO 9.

9. DETECT MALFUNCTIONING PART

Check the following.
- EVAP canister for damage
- EVAP hose between EVAP canister and vehicle frame for clogging or poor connection

>> Repair hose or replace EVAP canister. Refer to FL-16, "Hydraulic Layout".

10. CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE OPERATION

WITH CONSULT
1. Disconnect vacuum hose to EVAP canister purge volume control solenoid valve at EVAP service port.
2. Start engine and let it idle.
3. Select “PURG VOL CONT/V” in “ACTIVE TEST” mode.
4. Touch “Qu” on CONSULT screen to increase “PURG VOL CONT/V” opening to 100%.
5. Check vacuum hose for vacuum.

Vacuum should exist.

Is the inspection result normal?

YES >> GO TO 13.
NO >> GO TO 12.

11. CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE OPERATION

WITHOUT CONSULT
1. Start engine and warm it up to normal operating temperature.
2. Stop engine.
3. Disconnect vacuum hose to EVAP canister purge volume control solenoid valve at EVAP service port.
4. Start engine and let it idle for at least 80 seconds.
5. Check vacuum hose for vacuum when revving engine up to 2,000 rpm.

Vacuum should exist.

Is the inspection result normal?

YES >> GO TO 13.
NO >> GO TO 12.

12. CHECK VACUUM HOSE

Check vacuum hoses for clogging or disconnection. Refer to FL-16, "Hydraulic Layout".

Is the inspection result normal?

cardiagn.com

YES >> GO TO 13.
NO >> Repair or reconnect the hose.

13. CHECK EVAP CANISTER PURGE VOLUME CONTROL SOLENOID VALVE

Refer to EC-321, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 14.
NO >> Replace EVAP canister purge volume control solenoid valve. Refer to EM-29, "Exploded View".

14. CHECK FUEL TANK TEMPERATURE SENSOR

Refer to EC-278, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 15.
NO >> Replace fuel level sensor unit. Refer to FL-6, "Removal and Installation".

15. CHECK EVAP CONTROL SYSTEM PRESSURE SENSOR

Refer to EC-333, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 16.
NO >> Replace EVAP control system pressure sensor. Refer to FL-17, "Exploded View".

16. CHECK EVAP PURGE LINE

Check EVAP purge line (pipe, rubber tube, fuel tank and EVAP canister) for cracks or improper connection. Refer to FL-16, "Hydraulic Layout".

Is the inspection result normal?

YES >> GO TO 17.
NO >> Repair or reconnect the hose.

17. CLEAN EVAP PURGE LINE

Clean EVAP purge line (pipe and rubber tube) using air blower.

>> GO TO 18.

18. CHECK EVAP/ORVR LINE

Check EVAP/ORVR line between EVAP canister and fuel tank for clogging, kink, looseness and improper connection. For location, refer to FL-16, "Hydraulic Layout".

Is the inspection result normal?

YES >> GO TO 19.
NO >> Repair or replace hoses and tubes.

19. CHECK RECIRCULATION LINE

Check recirculation line between fuel filler tube and fuel tank for clogging, kink, cracks, looseness and improper connection.

Is the inspection result normal?

YES >> GO TO 20.
NO >> Repair or replace hose, tube or fuel filler tube. Refer to FL-13, "Exploded View".

20. CHECK REFUELING EVAP VAPOR CUT VALVE

Refer to EC-493, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 21.
NO >> Replace refueling EVAP vapor cut valve with fuel tank. Refer to FL-13, "Exploded View".

21. CHECK FUEL LEVEL SENSOR

Refer to MWI-83, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 22.

cardiagn.com

NO >> Replace fuel level sensor unit. Refer to FL-6, "Removal and Installation".

22. CHECK INTERMITTENT INCIDENT

Refer to GI-41, "Intermittent Incident".


>> INSPECTION END

Component Inspection

INFOID:0000000012406488

1. CHECK FUEL FILLER CAP


1. Turn ignition switch OFF.
2. Remove fuel filler cap. Refer to FL-13, "Exploded View".
3. Wipe clean valve housing.

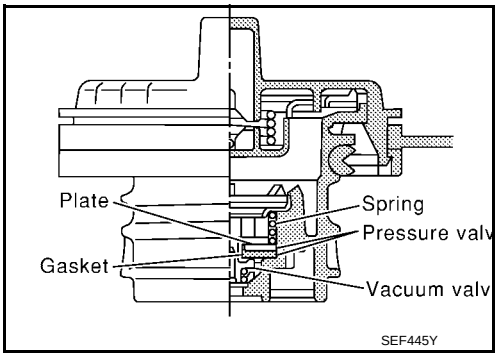

4. Install fuel filler cap adapter (commercial service tool) to fuel filler cap.
5. Check valve opening pressure and vacuum.

Pressure: **15.3 - 20.0 kPa (0.156 - 0.204 kg/cm^2, 2.22 - 2.90 psi)**

Vacuum: **−6.0 to −3.3 kPa (−0.061 to −0.034 kg/cm^2, −0.87 to −0.48 psi)**

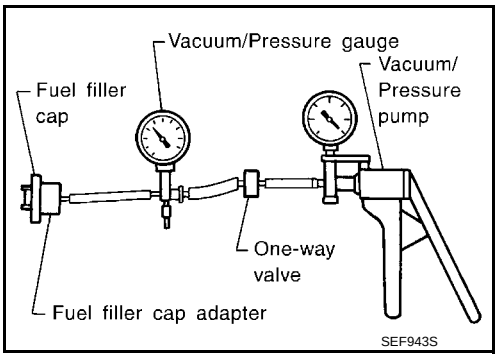

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 2.

2. REPLACE FUEL FILLER CAP

Replace fuel filler cap. Refer to FL-13, "Exploded View".

CAUTION:

Use only a genuine fuel filler cap as a replacement. If an incorrect fuel filler cap is used, the MIL may illuminate.

>> INSPECTION END

cardiagn.com

P0460 FUEL LEVEL SENSOR

DTC Logic

INFOID:0000000012406489

DTC DETECTION LOGIC

NOTE:

- **If DTC P0460 is displayed with DTC UXXXX, first perform the trouble diagnosis for DTC UXXXX.**
- **If DTC P0460 is displayed with DTC P0607, first perform the trouble diagnosis for DTC P0607. Refer to EC-376, "DTC Logic".**

When the vehicle is parked, the fuel level in the fuel tank is naturally stable. It means that output signal of the fuel level sensor does not change. If ECM senses sloshing signal from the sensor, fuel level sensor malfunction is detected.

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0460	Fuel level sensor circuit noise	Even though the vehicle is parked, a signal being varied is sent from the fuel level sensor to ECM.	• Harness or connectors (The CAN communication line is open or shorted) • Harness or connectors (The sensor circuit is open or shorted) • Combination meter • Fuel level sensor

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and wait maximum of 2 consecutive minutes.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-347, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406490

1.CHECK COMBINATION METER FUNCTION

Check combination meter function. Refer to MWI-36, "CONSULT Function".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Proceed to MWI-82, "Diagnosis Procedure".

cardiagn.com

P0461 FUEL LEVEL SENSOR

DTC Logic

INFOID:0000000012406491

DTC DETECTION LOGIC

NOTE:

- **If DTC P0461 is displayed with DTC UXXXX, first perform the trouble diagnosis for DTC UXXXX.**
- **If DTC P0461 is displayed with DTC P0607, first perform the trouble diagnosis for DTC P0607. Refer to EC-376, "DTC Logic".**

Driving long distances naturally affect fuel gauge level.
This diagnosis detects the fuel gauge malfunction of the gauge not moving even after a long distance has been driven.

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0461	Fuel level sensor circuit range/performance	The output signal of the fuel level sensor does not change within the specified range even though the vehicle has been driven a long distance.	• Harness or connectors (The CAN communication line is open or shorted) • Harness or connectors (The sensor circuit is open or shorted) • Combination meter • Fuel level sensor

DTC CONFIRMATION PROCEDURE

1.PERFORM COMPONENT FUNCTION CHECK

Perform component function check. Refer to EC-348, "Component Function Check".
Use component function check to check the overall function of the fuel level sensor. During this check, a 1st trip DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-349, "Diagnosis Procedure".

Component Function Check

INFOID:0000000012406492

1.PRECONDITIONING

WARNING:
When performing the following procedure, always observe the handling of the fuel. Refer to FL-6, "Exploded View".
TESTING CONDITION:
Before starting component function check, preparation of draining fuel and refilling fuel is required.

Will CONSULT be used?

YES >> GO TO 2.
NO >> GO TO 3.

2.PERFORM COMPONENT FUNCTION CHECK

With CONSULT
NOTE:
Start from step 10, if it is possible to confirm that the fuel cannot be drained by 30 ℓ (7-7/8 US gal, 6-5/8 Imp gal) in advance.

1. Prepare a fuel container and a spare hose.
2. Release fuel pressure from fuel line, refer to EC-510, "Work Procedure".
3. Remove the fuel feed hose on the fuel level sensor unit.
4. Connect a spare fuel hose where the fuel feed hose was removed.
5. Turn ignition switch OFF and wait at least 10 seconds then turn ON.
6. Select “FUEL LEVEL SE” in “DATA MONITOR” mode with CONSULT.
7. Check “FUEL LEVEL SE” output voltage and note it.
8. Select “FUEL PUMP RELAY” in “ACTIVE TEST” mode with CONSULT.

cardiagn.com

9. Touch “ON” and drain fuel approximately 30 ℓ (7-7/8 US gal, 6-5/8 Imp gal) and stop it.
10. Check “FUEL LEVEL SE” output voltage and note it.
11. Fill fuel into the fuel tank for 30 ℓ (7-7/8 US gal, 6-5/8 Imp gal).
12. Check “FUEL LEVEL SE” output voltage and note it.
13. Confirm whether the voltage changes more than 0.03 V during step 7 to 10 and 10 to 12.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-349, "Diagnosis Procedure".

3. PERFORM COMPONENT FUNCTION CHECK

Without CONSULT

NOTE:

Start from step 8, if it is possible to confirm that the fuel cannot be drained by 30 ℓ (7-7/8 US gal, 6-5/8 Imp gal) in advance.

1. Prepare a fuel container and a spare hose.
2. Release fuel pressure from fuel line. Refer to EC-510, "Work Procedure".
3. Remove the fuel feed hose on the fuel level sensor unit. Refer to FL-6, "Exploded View".
4. Connect a spare fuel hose where the fuel feed hose was removed.
5. Turn ignition switch ON.
6. Drain fuel by 30 ℓ (7-7/8 US gal, 6-5/8 Imp gal) from the fuel tank using proper equipment.
7. Confirm that the fuel gauge indication varies.
8. Fill fuel into the fuel tank for 30 ℓ (7-7/8 US gal, 6-5/8 Imp gal).
9. Confirm that the fuel gauge indication varies.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-349, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406493

1. CHECK COMBINATION METER FUNCTION

Check combination meter function. Refer to MWI-36, "CONSULT Function".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Proceed to MWI-82, "Diagnosis Procedure".

cardiagn.com

P0462, P0463 FUEL LEVEL SENSOR

DTC Logic

INFOID:0000000012406494

DTC DETECTION LOGIC

NOTE:

- **If DTC P0462 or P0463 is displayed with DTC UXXXX, first perform the trouble diagnosis for DTC UXXXX.**
- **If DTC P0462 or P0463 is displayed with DTC P0607, first perform the trouble diagnosis for DTC P0607.Refer to EC-376, "DTC Logic".**

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0462	Fuel level sensor circuit low input	An excessively low voltage from the sensor is sent to ECM.	• Harness or connectors (The CAN communication line is open or shorted) • Harness or connectors (The sensor circuit is open or shorted) • Combination meter • Fuel level sensor
P0463	Fuel level sensor circuit high input	An excessively high voltage from the sensor is sent to ECM.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 11 V at ignition switch ON.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON and wait at least 5 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-350, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406495

1.CHECK COMBINATION METER FUNCTION

Check combination meter function. Refer to MWI-36, "CONSULT Function".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Proceed to MWI-82, "Diagnosis Procedure".

cardiagn.com

P0500 VSS

Description

INFOID:0000000012406496

ECM receives vehicle speed signals from two different paths via CAN communication line: One is from the ABS actuator and electric unit (control unit) via the combination unit and the other is from TCM.

DTC Logic

INFOID:0000000012406497

DTC DETECTION LOGIC

NOTE:

- If DTC P0500 is displayed with DTC UXXXX, first perform the trouble diagnosis for DTC UXXXX.
- If DTC P0500 is displayed with DTC P0607, first perform the trouble diagnosis for DTC P0607. Refer to EC-376, "DTC Logic".

DTC No.	Trouble diagnosis (Trouble diagnosis content)	DTC detecting condition	Possible cause
P0500	VEH SPEED SEN/CIRC (Vehicle speed sensor)	At 20 km/h (13 MPH), ECM detects the following status continuously for 5 seconds or more: The difference between a vehicle speed calculated by a secondary speed sensor transmitted from TCM to ECM via CAN communication and the vehicle speed indicated on the combination meter exceeds 15km/h (10 MPH).	• Harness or connector (The CAN communication line is open or shorted.) • Combination meter • ABS actuator and electric unit (control unit) • Wheel sensor • TCM • Secondary speed sensor

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC CONFIRMATION PROCEDURE has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is 10 V or more at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine.
2. Shift the selector lever to D range and wait at least for 2 seconds.
3. Drive the vehicle at least 5 seconds at 20 km/h (13 MPH) or more.

   CAUTION:

   Always drive vehicle at a safe speed.

   NOTE:

   This procedure may be conducted with the drive wheels lifted in the shop or by driving the vehicle. If a road test is expected to be easier, it is unnecessary to lift the vehicle.
4. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-351, "Diagnosis Procedure"

NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406498

1.CHECK DTC WITH TCM

Check DTC with TCM. Refer to TM-42, "CONSULT Function".

Is the inspection result normal?

YES >> GO TO 2.

cardiagn.com

NO >> Perform trouble shooting relevant to DTC indicated.

2.CHECK DTC WITH ABS ACTUATOR AND ELECTRIC UNIT (CONTROL UNIT)

Check DTC with ABS actuator and electric unit (control unit). Refer to BRC-30, "CONSULT Function".

Is the inspection result normal?

YES >> GO TO 3.
NO >> Perform trouble shooting relevant to DTC indicated.

3.CHECK DTC WITH COMBINATION METER

Check DTC with combination meter. Refer to MWI-36, "CONSULT Function".

Is the inspection result normal?

YES >> GO TO 4.
NO >> Perform trouble shooting relevant to DTC indicated.

4.CHECK SECONDARY SPEED SENSOR

Check secondary speed sensor. Refer to TM-159, "Diagnosis Procedure".

Is the inspection result normal?

YES >> GO TO 5.
NO >> Replace or replace error-detected parts.

5.CHECK WHEEL SENSOR

Check wheel sensor. Refer to BRC-71, "Diagnosis Procedure".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace or replace error-detected parts.

cardiagn.com

P0506 ISC SYSTEM

Description

INFOID:0000000012406499

The ECM controls the engine idle speed to a specified level through the fine adjustment of the air, which is let into the intake manifold, by operating the electric throttle control actuator. The operating of the throttle valve is varied to allow for optimum control of the engine idling speed. The crankshaft position sensor (POS) detects the actual engine speed and sends a signal to the ECM.
The ECM controls the electric throttle control actuator so that the engine speed coincides with the target value memorized in the ECM. The target engine speed is the lowest speed at which the engine can operate steadily. The optimum value stored in the ECM is determined by taking into consideration various engine conditions, such as during warming up, deceleration and engine load (air conditioner, power steering and cooling fan operation, etc.).

DTC Logic

INFOID:0000000012406500

DTC DETECTION LOGIC

NOTE:
If DTC P0506 is displayed with other DTC, first perform the trouble diagnosis for the other DTC.

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0506	Idle speed control system RPM lower than expected	The idle speed is less than the target idle speed by 100 rpm or more.	• Electric throttle control actuator • Intake air leakage

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

If the target idle speed is out of the specified value, perform EC-149, "Description", before conducting DTC CONFIRMATION PROCEDURE.
TESTING CONDITION:
- **Before performing the following procedure, confirm that battery voltage is more than 11 V at idle.**
- **Always perform the test at a temperature above −10°C(14°F).**

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and warm it up to normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Restart engine and run it for at least 1 minute at idle speed.
6. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-353, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406501

1.CHECK INTAKE AIR LEAKAGE

1. Start engine and let it idle.
2. Listen for an intake air leakage after the mass air flow sensor.

Is intake air leakage detected?

cardiagn.com

YES >> Discover air leakage location and repair.
NO >> Replace ECM. Refer to EC-513, "Removal and Installation".

cardiagn.com

P0507 ISC SYSTEM

Description

INFOID:0000000012406502

The ECM controls the engine idle speed to a specified level through the fine adjustment of the air, which is let into the intake manifold, by operating the electric throttle control actuator. The operating of the throttle valve is varied to allow for optimum control of the engine idling speed. The crankshaft position sensor (POS) detects the actual engine speed and sends a signal to the ECM.
The ECM controls the electric throttle control actuator so that the engine speed coincides with the target value memorized in the ECM. The target engine speed is the lowest speed at which the engine can operate steadily. The optimum value stored in the ECM is determined by taking into consideration various engine conditions, such as during warming up, deceleration and engine load (air conditioner, power steering and cooling fan operation, etc.).

DTC Logic

INFOID:0000000012406503

DTC DETECTION LOGIC

NOTE:
If DTC P0507 is displayed with other DTC, first perform the trouble diagnosis for the other DTC.

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0507	Idle speed control system RPM higher than expected	The idle speed is more than the target idle speed by 200 rpm or more.	• Electric throttle control actuator • Intake air leakage • PCV system

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

If the target idle speed is out of the specified value, perform EC-149, "Description", before conducting DTC Confirmation Procedure.
TESTING CONDITION:
- **Before performing the following procedure, confirm that battery voltage is more than 11 V at idle.**
- **Always perform the test at a temperature above −10°C(14°F).**

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and warm it up to normal operating temperature.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Restart engine and run it for at least 1 minute at idle speed.
6. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-355, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406504

1.CHECK PCV HOSE CONNECTION

Confirm that PCV hose is connected correctly.

Is the inspection result normal?

YES >> GO TO 2.

cardiagn.com

NO >> Repair or replace malfunctioning part.

2.CHECK INTAKE AIR LEAKAGE

1. Start engine and let it idle.
2. Listen for an intake air leakage after the mass air flow sensor.

Is intake air leakage detected?

YES >> Discover air leakage location and repair.
NO >> Replace ECM. Refer to EC-513, "Removal and Installation".

cardiagn.com

P050A, P050E COLD START CONTROL

Description

INFOID:0000000012406505

ECM controls ignition timing and engine idle speed when engine is started with pre-warming up condition. This control promotes the activation of three way catalyst by heating the catalyst and reduces emissions.

DTC Logic

INFOID:0000000012406506

DTC DETECTION LOGIC

NOTE:
If DTC P050A, P050E is displayed with other DTC, first perform the trouble diagnosis for other DTC.

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P050A	Cold start idle air control system performance	ECM does not control engine idle speed properly when engine is started with pre-warming up condition.	• Lack of intake air volume • Fuel injection system • ECM
P050E	Cold start engine exhaust temperature too low	The temperature of the catalyst inlet does not rise to the proper temperature when the engine is started with pre-warming up condition.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is more than 11 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE-I

With CONSULT

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Select “DATA MONITOR” mode with CONSULT.
4. Check the indication of “COOLAN TEMP/S”.

With GST

Follow the procedure “With CONSULT” above.

Is the value of “COOLAN TEMP/S” between 4°C (39°F) and 36°C (97°F)?

YES >> GO TO 3.
NO-1 [If it is below 4°C (39°F)]>>Warm up the engine until the value of “COOLAN TEMP/S” reaches 4°C (39°F) or more. Retry from step 1.
NO-2 [If it is above 36°C (97°F)]>>Cool engine down to less than 36°C (97°F). Retry from step 1.

3.PERFORM DTC CONFIRMATION PROCEDURE-II

With CONSULT

1. Set the select lever in N range.
2. Start the engine and warm up in idle with the value of “COOLAN TEMP/S” between 4°C (39°F) and 40°C (104°F) for more than 15 seconds.
3. Check 1st trip DTC.

With GST

Follow the procedure “With CONSULT” above.

Is 1st trip DTC detected?

YES >> Proceed to EC-358, "Diagnosis Procedure".

cardiagn.com

NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406507

1.PERFORM IDLE AIR VOLUME LEARNING

Perform EC-149, "Description".

Is Idle Air Volume Learning carried out successfully?

YES >> GO TO 2.
NO >> Follow the instruction of Idle Air Volume Learning.

2.CHECK INTAKE SYSTEM

Check for the cause of intake air volume lacking. Refer to the following.
- Crushed intake air passage
- Intake air passage clogging
- Clogging of throttle body

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair or replace malfunctioning part

3.CHECK FUEL INJECTION SYSTEM FUNCTION

Perform DTC Confirmation Procedure for DTC P0171, P0174. Refer to EC-267, "DTC Logic".

Is the inspection result normal?

YES >> GO TO 4.
NO >> Proceed to EC-268, "Diagnosis Procedure" for DTC P0171, P0174.

4.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON.
2. Erase DTC.
3. Perform DTC Confirmation Procedure.
   See EC-357, "DTC Logic".

Is the 1st trip DTC P050A, P050E displayed again?

YES >> Replace ECM. Refer to EC-513, "Removal and Installation".
NO >> INSPECTION END

cardiagn.com

P0520 EOP SENSOR

DTC Logic

INFOID:0000000012406508

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis (Trouble diagnosis content)	DTC detecting condition	Possible cause
P0520	EOP SENSOR/SWITCH (EOP sensor circuit)	ECM detects the following status continuously for 5 seconds or more: • A voltage signal transmitted from the engine oil pressure sensor is lower than 0.26 V. • A voltage signal transmitted from the engine oil pressure sensor is higher than 4.9 V.	• Harness or connectors (EOP sensor circuit is open or shorted) • EOP sensor • Sensor power supply 2 circuit

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.CHECK ENGINE OIL LEVEL

1. Turn ignition switch OFF.
2. Check engine oil level. Refer to LU-8, "Inspection".

Is inspection result normal?

YES >> GO TO 3.
NO >> Check engine oil leak. Refer to LU-8, "Inspection".

3.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for at least 5 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-359, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406509

1.CHECK EOP SENSOR POWER SUPPLY-I

1. Turn ignition switch OFF.
2. Disconnect EOP sensor harness connector.
3. Turn ignition switch ON.
4. Check the voltage between EOP sensor harness connector terminals.

EOP sensor			Voltage (Approx.)
Connector	+	–	
	terminal		
F67	3	1	5 V

Is the inspection result normal?

YES >> GO TO 2.
NO >> GO TO 4.

cardiagn.com

2.CHECK EOP SENSOR SIGNAL CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connectors.
3. Check the continuity between EOP sensor harness connector and ECM harness connector.

+		–		Continuity
EOP sensor		ECM		
Connector	Terminal	Connector	Terminal	
F67	2	F78	14	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair or replace error-detected parts.

3.CHECK EOP SENSOR

Check EOP sensor. Refer to EC-361, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Repair or replace error-detected parts.

4.CHECK EOP SENSOR POWER SUPPLY-II

Check the voltage between EOP sensor harness connector terminal and ground.

+		–	Voltage (Approx.)
EOP sensor			
Connector	Terminal		
F67	3	Ground	5 V

Is the inspection result normal?

YES >> GO TO 6.
NO >> GO TO 5.

5.CHECK EOP SENSOR POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connectors.
3. Check the continuity between EOP sensor harness connector and ECM harness connector.

+		–		Continuity
EOP sensor		ECM		
Connector	Terminal	Connector	Terminal	
F67	3	F14	18	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> Check sensor power supply 2 circuit. Refer to EC-497, "Diagnosis Procedure".
NO >> Repair or replace error-detected parts.

6.CHECK EOP SENSOR GROUND CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between EOP sensor harness connector and ECM harness connector.

cardiagn.com

+		–		Continuity
EOP sensor		ECM		
Connector	Terminal	Connector	Terminal	
F67	1	F14	15	Existed

Is the inspection result normal?

YES >> GO TO 7.
NO >> Repair or replace error-detected parts.

7. CHECK ECM GROUND CIRCUIT

Check the continuity between ECM harness connector and ground.

+		–	Continuity
ECM			
Connector	Terminal		
F14	10	Ground	Existed
	55		
F15	105		
	110		
E19	147		
	149		
	152		

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Repair or replace error-detected parts.

Component Inspection

INFOID:0000000012406510

1. CHECK EOP SENSOR

1. Turn ignition switch OFF.
2. Disconnect EOP sensor harness connector.
3. Check resistance between EOP sensor connector terminals.

EOP sensor		Condition	Resistance (kΩ)
+	–		
Terminal			
1	2	None	4 – 10
	3		2 – 8
2	1		4 – 10
	3		1 – 3
3	1		2 – 8
	2		1 – 3

Is the inspection result normal?

YES >> INSPECTION END.
NO >> Replace EOP sensor. Refer to EM-39, "Exploded View".

cardiagn.com

P0524 ENGINE OIL PRESSURE

DTC Logic

INFOID:0000000012406511

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis (Trouble diagnosis content)	DTC detecting condition	Possible cause
P0524	ENGINE OIL PRESSURE (Engine oil pressure too low)	An EOP sensor signal voltage applied to ECM remains lower than the specified value continuously for 10 seconds or more when the engine speed is 1,000 rpm or more.	• Decrease in engine oil pressure • Decrease in engine oil level • Engine oil condition • EOP sensor • Engine body

DTC CONFIRMATION PROCEDURE

CAUTION:

If "EC-363, "Diagnosis Procedure"" is unfinished, be sure to perform Step 3 and 4.

1. PRECONDITIONING-1

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TEST CONDITION:

Before performing the following procedure, confirm that battery voltage is 11 V or more at idle.

>> GO TO 2.

2. PRECONDITIONING-2

Is "Diagnosis Procedure" of DTC P0524 finished?

YES >> GO TO 3.
NO >> GO TO 4.

3. PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and warm it up to normal operating temperature.
2. Maintain the following conditions for about 10 consecutive seconds.

Selector lever	P or N position
Engine coolant temperature	70°C (158°F) or more
Engine speed	1,000 rpm or more

NOTE:

With engine speed set around 4,000 rpm, the phenomenon can be reproduced more easily.

3. Check DTC.

Is DTC detected?

YES >> Proceed to EC-363, "Diagnosis Procedure".
NO >> INSPECTION END

4. CHECK ENGINE OIL LEVEL

Check engine oil level. Refer to LU-8, "Inspection".

Is the inspection result normal?

YES >> GO TO 5.
NO >> Proceed to EC-363, "Diagnosis Procedure".

5. CHECK ENGINE OIL PRESSURE

With CONSULT

cardiagn.com

1. Turn ignition switch ON.
2. Select “DATA MONITOR” mode of “ENGINE” using CONSULT.
3. Start the engine and check that “EOP SENSOR” changes, according to engine speeds.

Monitor item	Condition		Value (Approx.)
EOP SENSOR	• Engine oil temperature: 80°C (176°F) • Selector lever: P or N position • Air conditioner switch: OFF • No load	Engine speed: Idle	1.45 V or more
		Engine speed: 2,000 rpm	2.85 V or more

Without CONSULT
Check engine oil pressure. Refer to LU-8, "Inspection".

Is the inspection result normal?

YES >> GO TO 3.
NO >> Proceed to EC-363, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406512

1.CHECK ENGINE OIL LEVEL

1. Turn ignition switch OFF.
2. Check engine oil level. Refer to LU-8, "Inspection".

Is the inspection result normal?

YES >> GO TO 2.
NO >> GO TO 4.

2.CHECK ENGINE OIL PRESSURE

With CONSULT
1. Turn ignition switch ON.
2. Select “DATA MONITOR” mode of “ENGINE” using CONSULT.
3. Start the engine and check that “EOP SENSOR” changes, according to engine speeds.

Monitor item	Condition		Value (Approx.)
EOP SENSOR	• Engine oil temperature: 80°C (176°F) • Selector lever: P or N position • Air conditioner switch: OFF • No load	Engine speed: Idle	1.45 V or more
		Engine speed: 2,000 rpm	2.85 V or more

Without CONSULT
Check engine oil level. Refer to LU-8, "Inspection".

Is the inspection result normal?

YES >> GO TO 3.
NO >> Check oil pump. Refer to LU-14, "Removal and Installation".

3.CHECK EOP SENSOR

Check EOP sensor. Refer to EC-364, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Repair or replace error-detected parts.

4.CHECK ENGINE OIL LEAKAGE

Check engine oil leakage. Refer to LU-8, "Inspection".

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair or replace error-detected parts.

cardiagn.com

5.CHECK CAUSE OF ENGINE OIL CONSUMPTION

Check the following item.

Step	Inspection item	Equipment	Standard	Reference
1	PCV valve	EC-512, "Work Procedure"		
2	Exhaust front tube	Visual	• No blocking • No abnormal sounds	—
3	Oil pump	LU-14, "Removal and Installation"		
4	• Piston • Piston pin • Piston ring	• Piston to piston pin oil clearance • Piston ring side clearance • Piston ring end gap		EM-109, "Disassembly and Assembly"
5	Cylinder block	• Cylinder block top surface distortion • Piston to cylinder bore clearance		EM-117, "Inspection"

>> Repair or replace error-detected parts.

Component Inspection

INFOID:0000000012406513

1.CHECK EOP SENSOR

1. Turn ignition switch OFF.
2. Disconnect EOP sensor harness connector.
3. Check resistance between EOP sensor connector terminals.

EOP sensor		Condition	Resistance (kΩ)
+	–		
Terminal			
1	2	None	4 – 10
	3		2 – 8
2	1		4 – 10
	3		1 – 3
3	1		2 – 8
	2		1 – 3

Is the inspection result normal?

YES >> INSPECTION END.
NO >> Replace EOP sensor. Refer to EM-39, "Exploded View".

cardiagn.com

P052A, P052B, P052C, P052D INTAKE VALVE TIMING CONTROL

DTC Logic

INFOID:0000000012406514

DTC DETECTION LOGIC

NOTE:
If DTC P052A, P052B, P052C and P052D is displayed with DTC P0075, P0081 perform the trouble diagnosis for DTC P0075, P0081. Refer to EC-196, "DTC Logic".

DTC No.	Trouble diagnosis (Trouble diagnosis content)	Detecting condition	Possible cause
P052A	CAMSHAFT POSITION TIMING B1 (Cold start “A” camshaft position timing over-advanced bank 1)	There is a gap between the target phase angle and the detected phase angle when the engine is operating in cold conditions.	• Crankshaft position sensor • Camshaft position sensor • Intake valve timing control solenoid valve • Intake valve timing intermediate lock control solenoid valve • Accumulation of debris to the signal pick-up portion of the camshaft • Timing chain installation • Foreign matter caught in the intake valve timing control (or intermediate lock control) solenoid valve
P052B	CAMSHAFT POSITION TIMING B1 (Cold start “A” camshaft position timing over-retarded bank 1)		
P052C	CAMSHAFT POSITION TIMING B2 (Cold start “A” camshaft position timing over-advanced bank 2)		
P052D	CAMSHAFT POSITION TIMING B2 (Cold start “A” camshaft position timing over-retarded bank 2)		

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is 10 V or more at idle.

With CONSULT

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Turn ignition switch ON.
5. On the CONSULT screen, select “ENGINE” >> “DATA MONITOR” >> “COOLAN TEMP/S”.
6. Check “COOLAN TEMP/S” indication value.

With GST

Follow the procedure “With CONSULT” above.

Is the value of “COOLAN TEMP/S”–5°C (23°F) and 45°C (113°F)?

YES >> GO TO 2.
NO-1 [if it is below – 5°C (23°F)]>>Warm up the engine until the value of “COOLAN TEMP/S” indicates –5°C (23°F) and 45°C (113°F). And then GO TO 2.
NO-2 [if it is above 45°C (113°F)]>>Cool the engine down to the value of “COOLAN TEMP/S” indicates –5°C (23°F) and 45°C (113°F). And then GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE-I

1. Turn ignition switch OFF and wait at 10 seconds.
2. Turn ignition switch ON.
3. Set the selector lever in N range.
4. Start the engine and let it idle for 20 seconds or more.
5. Check 1st trip DTC.

cardiagn.com

Is 1st trip DTC detected?

YES >> Proceed to EC-366, "Diagnosis Procedure"
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406515

1. INSPECTION START

With CONSULT>>GO TO 2.
Without CONSULT>>GO TO 3.

2. CHECK VTC POSITION

With CONSULT

1. Turn ignition switch ON.
2. On the CONSULT screen, select “ENGINE” >> “DATA MONITOR” >> “COOLAN TEMP/S”.
3. Check that the “COOLAN TEMP/S” indication value is between –5°C (23°F) and 45°C (113°F).
4. Start engine and wait at least 5 seconds.
5. On the CONSULT screen, select “ENGINE” >> “DATA MONITOR” >> “INT/V TIM (B1)”.
6. Check that the data monitor item indicates as follows:

Item	Value (°CA)
INT/V TIM (B1)	10 ± 2
INT/V TIM (B2)	10 ± 2

Is the inspection result normal?


YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> GO TO 3.

3. CHECK OIL PRESSURE WARNING LAMP

1. Start engine.
2. Check that oil pressure warning lamp is not illuminated.

Is oil pressure warning lamp illuminated?

YES >> Refer to LU-8, "Inspection".
NO >> GO TO 4.

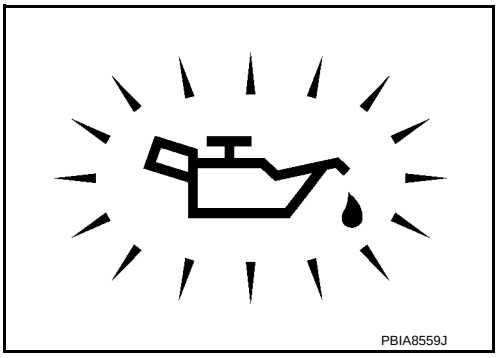
PBIA8559J

4. CHECK INTAKE VALVE TIMING INTERMEDIATE LOCK CONTROL SOLENOID VALVE

Perform Component Inspection of the intake valve timing intermediate lock control solenoid valve. Refer to EC-368, "Component Inspection (Intake Valve Timing Intermediate Lock Control Solenoid Valve)".

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair or replace error-detected parts.

5. CHECK INTAKE VALVE TIMING CONTROL SOLENOID VALVE

Perform Component Inspection of the intake valve timing control solenoid valve. Refer to EC-367, "Component Inspection (Intake Valve Timing Control Solenoid Valve)".

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair or replace error-detected parts.

6. CHECK CRANKSHAFT POSITION SENSOR

cardiagn.com

Perform Component Inspection of the crankshaft position sensor. Refer to EC-368, "Component Inspection (Crankshaft Position sensor)".

Is the inspection result normal?

YES >> GO TO 7.
NO >> Repair or replace error-detected parts.

7. CHECK CAMSHAFT POSITION SENSOR

Perform Component Inspection of the camshaft position sensor. Refer to EC-369, "Component Inspection (Camshaft position sensor)".

Is the inspection result normal?


YES >> GO TO 8.
NO >> Repair or replace error-detected parts.

8. CHECK CAMSHAFT (INTAKE)

Check the following.
1. Accumulation of debris on the signal plate of camshaft front end
2. Chipping signal plate of camshaft front end

Is the inspection result normal?

YES >> GO TO 9.
NO >> Remove debris and clean the signal plate of camshaft front end or replace camshaft. Refer to EM-88, "Removal and Installation".

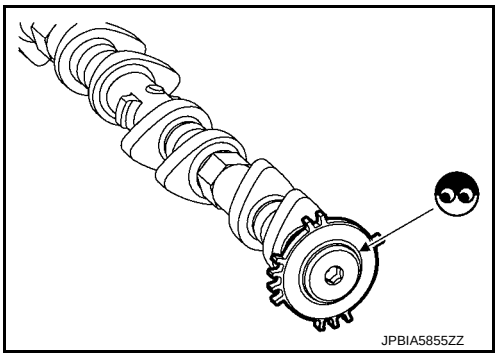

9. CHECK TIMING CHAIN INSTALLATION

Check service records for any recent repairs that may cause timing chain misalignment.

Are there any service records that may cause timing chain misalignment?

YES >> Check timing chain installation. Refer to EM-69, "Removal and Installation".
NO >> GO TO 10.

10. CHECK LUBRICATION CIRCUIT

Perform “Inspection of Camshaft Sprocket (INT) Oil Groove”. Refer to EM-91, "Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Clean lubrication line.

Component Inspection (Intake Valve Timing Control Solenoid Valve)

INFOID:0000000012406516

1. CHECK INTAKE VALVE TIMING CONTROL SOLENOID VALVE-I

1. Turn ignition switch OFF.
2. Disconnect intake valve timing control solenoid valve harness connector.
3. Check resistance between intake valve timing control solenoid valve terminals as per the following.

Terminals	Resistance
1 and 2	7.0 - 7.8 Ω [at 20°C (68°F)]
1 or 2 and ground	∞ Ω (Continuity should not exist)

Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace malfunctioning intake valve timing control solenoid valve. Refer to EM-68, "Exploded View".


2. CHECK INTAKE VALVE TIMING CONTROL SOLENOID VALVE-II

1. Remove intake valve timing control solenoid valve. Refer to EM-68, "Exploded View".

cardiagn.com

2. Provide 12 V DC between intake valve timing control solenoid valve terminals 1 and 2, and then interrupt it. Check that the plunger moves as shown in the figure.

CAUTION:
Never apply 12 V DC continuously for 5 seconds or more. Doing so may result in damage to the coil in intake valve timing control solenoid valve.
NOTE:
Always replace O-ring when intake valve timing control solenoid valve is removed.

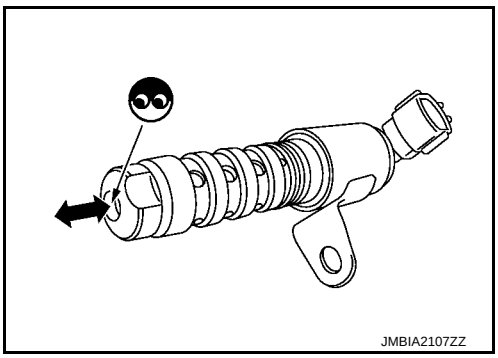

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning intake valve timing control solenoid valve. Refer to EM-68, "Exploded View".

Component Inspection (Intake Valve Timing Intermediate Lock Control Solenoid Valve)

INFOID:0000000012406517

1. CHECK INTAKE VALVE TIMING INTERMEDIATE LOCK CONTROL SOLENOID VALVE-I

1. Turn ignition switch OFF.
2. Disconnect intake valve timing intermediate lock control solenoid valve harness connector.
3. Check resistance between intake valve timing intermediate lock control solenoid valve terminals as per the following.

Terminals	Resistance
1 and 2	7.0 - 7.8 Ω [at 20°C (68°F)]
1 or 2 and ground	∞ Ω (Continuity should not exist)


Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace malfunctioning intake valve timing intermediate lock control solenoid valve. Refer to EM-68, "Exploded View".

2. CHECK INTAKE VALVE TIMING INTERMEDIATE LOCK CONTROL SOLENOID VALVE-II

1. Remove intake valve timing intermediate lock control solenoid valve. Refer to EM-68, "Exploded View".
2. Provide 12 V DC between intake valve timing intermediate lock control solenoid valve terminals 1 and 2, and then interrupt it. Check that the plunger moves as shown in the figure.

CAUTION:
Never apply 12 V DC continuously for 5 seconds or more. Doing so may result in damage to the coil in intake valve timing intermediate lock control solenoid valve.
NOTE:
Always replace O-ring when intake valve timing intermediate lock control solenoid valve is removed.

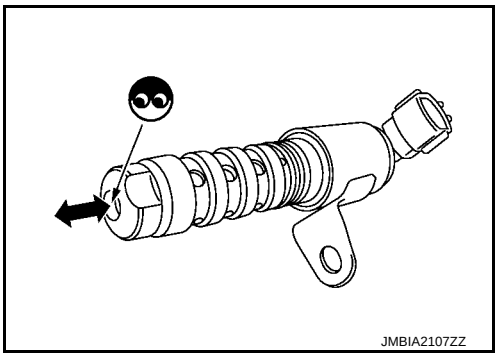

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning intake valve timing intermediate lock control solenoid valve. Refer to EM-68, "Exploded View".

Component Inspection (Crankshaft Position sensor)

INFOID:0000000012406518

1. CHECK CRANKSHAFT POSITION SENSOR (POS)-1


1. Turn ignition switch OFF.
2. Loosen the fixing bolt of the sensor.
3. Disconnect crankshaft position sensor (POS) harness connector.
4. Remove the sensor.

cardiagn.com

5. Visually check the sensor for chipping.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace crankshaft position sensor (POS). Refer to EM-39, "Exploded View".

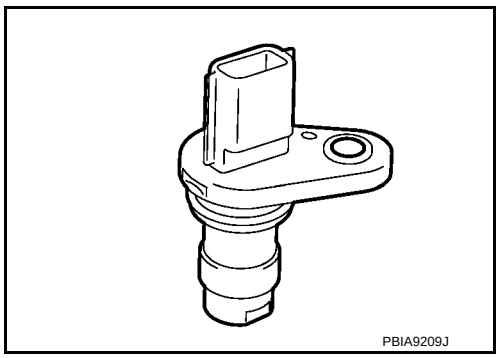
PBIA9209J

2.CHECK CRANKSHAFT POSITION SENSOR (POS)-2

Check the resistance between crankshaft position sensor (POS) terminals as per the following.

Crankshaft position sensor (POS)		Resistance [at 25°C (77°F)]
+	–	
Terminal (Polarity)		
1	2	Except 0 or ∞ Ω
	3	
2	3	

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace crankshaft position sensor (POS). Refer to EM-39, "Exploded View".

Component Inspection (Camshaft position sensor)


INFOID:0000000012406519

1.CHECK CAMSHAFT POSITION SENSOR (PHASE)-1

1. Turn ignition switch OFF.
2. Loosen the fixing bolt of the sensor.
3. Disconnect camshaft position sensor (PHASE) harness connector.
4. Remove the sensor.
5. Visually check the sensor for chipping.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace camshaft position sensor (PHASE). Refer to EM-54, "Removal and Installation".

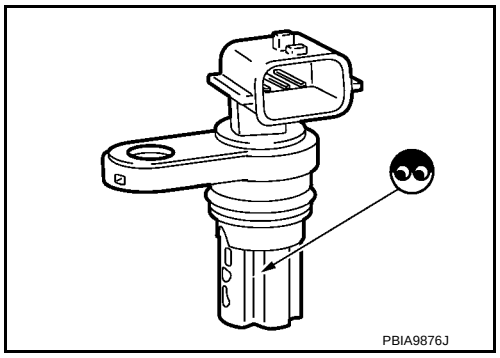
PBIA9876J

2.CHECK CAMSHAFT POSITION SENSOR (PHASE)-2

Check the resistance camshaft position sensor (PHASE) terminals as per the following.

Camshaft position sensor (PHASE)		Resistance [Ω at 25°C (77°F)]
+	–	
Terminals (Polarity)		
1	2	Except 0 or ∞
	3	
2	3	

Is the inspection result normal?

cardiagn.com

YES >> INSPECTION END
NO >> Replace camshaft position sensor (PHASE). Refer to EM-54, "Removal and Installation".

cardiagn.com

P0603, P062F ECM

DTC Description

INFOID:0000000012406520

DTC DETECTION LOGIC

DTC No.	CONSULT screen terms (Trouble diagnosis content)	DTC detecting condition
P0603	ECM BACK UP/CIRCUIT [Internal Control Module Keep Alive Memory (KAM) Error]	ECM buck up system does not function properly.
P062F	CONTROL MODULE (Internal control module EEPROM error)	EEPROM (built-in microcomputer) system internal ECM does not function properly.

POSSIBLE CAUSE

DTC P0603
- Harness or connectors (ECM power supply circuit is open or shorted.)
- ECM

DTC P062F
ECM

FAIL-SAFE

Not applicable

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

Perform the following procedure before performing DTC Confirmation Procedure.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE FOR DTC P062F

1. Start engine and wait at least 10 seconds.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Repeat steps 1 and 2 for 4 times.
4. Turn ignition switch ON.
5. Erase DTC.
6. Turn ignition switch OFF and wait at least 10 seconds.
7. Start engine and wait at least 10 seconds.
8. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-372, "Diagnosis Procedure".
NO >> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE FOR DTC P0603

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON and wait at least 10 seconds.
3. Turn ignition switch OFF and wait at least 5 minutes.
4. Turn ignition switch ON and wait at least 10 seconds.
5. Repeat steps 3 and 4 for 5 times.
6. Turn ignition switch ON.
7. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-372, "Diagnosis Procedure".
NO >> INSPECTION END

cardiagn.com

Diagnosis Procedure

INFOID:0000000012406521

1. INSPECTION START

Check that the battery negative terminal is not disconnected during ignition switch ON.

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2. ERASE DTC

1. Start the engine and let it idle at least 10 seconds.
2. Turn ignition switch OFF.
3. Repeat steps 1 and 2 for 4 times.
4. Erase DTC.
5. Turn ignition switch OFF and wait at least 10 seconds.
6. Start the engine and let it idle for 10 seconds.
7. Check 1st trip DTC.

Is DTC P062F detected again?

YES >> Replace ECM. Refer to EC-513, "Removal and Installation".
NO >> INSPECTION END

3. CHECK ECM POWER SUPPLY AND GROUND CIRCUIT

Check ECM power supply and ground circuit. Refer to EC-175, "Diagnosis Procedure".

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair or replace error-detected parts.

4. CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair or replace error-detected parts.

5. PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON.
2. Erase DTC.
3. Perform DTC confirmation procedure. Refer to EC-371, "DTC Description".

Is the DTC P0603 or P062F detected again?

YES >> Replace ECM. Refer to EC-513, "Removal and Installation".
NO >> INSPECTION END

cardiagn.com

P0604 ECM

DTC Logic

INFOID:0000000012406522

DTC DETECTION LOGIC

DTC No.	CONSULT screen terms (Trouble diagnosis content)	DTC detecting condition	Possible cause
P0604	ECM [Internal control module random access memory (RAM) error]	Malfunction in the internal RAM of ECM.	ECM

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is 11 V or more with ignition switch ON.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON (engine stopped) and wait least 20 minutes.
   CAUTION:
   Never start engine during this procedure.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-373, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406523

1.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON.
2. Erase DTC.
3. Perform DTC confirmation procedure. Refer to EC-373, "DTC Logic".

Is the 1st trip DTC P0604 displayed again?

YES >> Replace ECM. Refer to EC-513, "Removal and Installation".
NO >> INSPECTION END

cardiagn.com

P0605 ECM

DTC Logic

INFOID:0000000012406524

DTC DETECTION LOGIC

DTC No.	CONSULT screen terms (Trouble diagnosis content)	DTC detecting condition	Possible cause
P0605	ECM [Internal control module read only memory (ROM) error]	Malfunction in the internal ROM of ECM.	ECM

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is 11 V or more with ignition switch ON.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON (engine stopped) and wait least 20 minutes.
   CAUTION:
   Never start engine during this procedure.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-374, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406525

1.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON.
2. Erase DTC.
3. Perform DTC confirmation procedure. Refer to EC-374, "DTC Logic".

Is the 1st trip DTC P0605 displayed again?

YES >> Replace ECM. Refer to EC-513, "Removal and Installation".
NO >> INSPECTION END

cardiagn.com

P0606 ECM

DTC Logic

INFOID:0000000012406526

DTC DETECTION LOGIC

DTC No.	CONSULT screen terms (Trouble diagnosis content)	DTC detecting condition	Possible cause
P0606	CONTROL MODULE (Control module processor)	Malfunction in ECM processor.	ECM

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is 11 V or more with ignition switch ON.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE-I

1. Turn ignition switch ON (engine stopped) and wait at least 10 seconds.
   CAUTION:
   Never start engine during this procedure.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-375, "Diagnosis Procedure".
NO >> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE-II

1. Start engine.
2. Rev up the engine quickly to approximately 3,000 rpm under unloaded condition and completely release the accelerator pedal.
3. Let the engine idle and wait at least 10 seconds.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Turn ignition switch ON.
6. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-375, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406527

1.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON.
2. Erase DTC.
3. Perform DTC confirmation procedure for 3 times. Refer to EC-375, "DTC Logic".

Is the 1st trip DTC P0606 displayed again?

YES >> Replace ECM. Refer to EC-513, "Removal and Installation".
NO >> INSPECTION END

cardiagn.com

P0607 ECM

DTC Logic

INFOID:0000000012406528

DTC DETECTION LOGIC

DTC No.	CONSULT screen terms (Trouble diagnosis content)	DTC detecting condition	Possible cause
P0607	ECM (Control module performance)	ECM internal communication system is malfunctioning.	ECM

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is 11 V or more with ignition switch ON.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON (engine stopped) and wait least 10 seconds.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-376, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406529

1.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON.
2. Erase DTC.
3. Perform DTC confirmation procedure. Refer to EC-376, "DTC Logic".

Is the 1st trip DTC P0607 displayed again?

Yes >> Replace ECM. Refer to EC-513, "Removal and Installation".
No >> INSPECTION END

cardiagn.com

P060A ECM

DTC Logic

INFOID:0000000012406530

DTC DETECTION LOGIC

DTC No.	CONSULT screen terms (Trouble diagnosis content)	DTC detecting condition	Possible cause
P060A	CONTROL MODULE (Internal control module monitoring processor performance)	ECM internal monitoring processor is malfunctioning.	ECM

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is 11 V or more with ignition switch ON.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and wait at least 10 seconds.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Repeat step 1 and 2 for 5 times.
4. Turn ignition switch ON.
5. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-377, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406531

1.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON.
2. Erase DTC.
3. Perform DTC confirmation procedure. Refer to EC-377, "DTC Logic".

Is the 1st trip DTC P060A displayed again?

YES >> Replace ECM. Refer to EC-513, "Removal and Installation".
NO >> INSPECTION END

cardiagn.com

P060B ECM

DTC Logic

INFOID:0000000012406532

DTC DETECTION LOGIC

DTC No.	CONSULT screen terms (Trouble diagnosis content)	DTC detecting condition	Possible cause
P060B	CONTROL MODULE (Internal control module A/D processing performance)	ECM internal analog/digital conversion processing system is malfunctioning.	ECM

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is 11 V or more with ignition switch ON.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON (engine stopped) and wait least 10 seconds.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-378, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406533

1.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON.
2. Erase DTC.
3. Perform DTC confirmation procedure. Refer to EC-378, "DTC Logic".

Is the 1st trip DTC P060B displayed again?

YES >> Replace ECM. Refer to EC-513, "Removal and Installation".
NO >> INSPECTION END

cardiagn.com

P0643 SENSOR POWER SUPPLY

DTC Logic

INFOID:0000000012406534

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0643	Sensor power supply circuit short	ECM detects that the voltage of power source for sensor is excessively low or high.	• Harness or connectors (APP sensor 1 circuit is shorted.) (TP sensor circuit is shorted.) [CKP sensor (POS) circuit is shorted.] (EVT control position sensor circuit is shorted.) (MAF sensor circuit is shorted.) • Accelerator pedal position sensor • Throttle position sensor • Crankshaft position sensor (POS) • Exhaust valve timing control position sensor • Mass air flow sensor

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 10 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for 1 second.
2. Check DTC

Is DTC detected?

YES >> Proceed to EC-379, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406535

1.CHECK SENSOR POWER SUPPLY 1

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Turn ignition switch ON.
4. Check the voltage between ECM harness connector and ground.

+		–	Voltage (Approx.)
ECM			
Connector	Terminal		
E19	146	Ground	5 V
F14	28		
F15	98		

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".

cardiagn.com

NO >> GO TO 2.

2.CHECK SENSOR POWER SUPPLY 1 CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect following sensor harness connector.
3. Check harness for short to power and to ground, between the following terminals.

ECM		Sensor		
Connector	Terminal	Name	Connector	Terminal
E19	146	APP sensor 1	E110	4
F14	28	CKP sensor (POS)	F20	1
		MAF sensor	F68	1
		EVT control position sensor (bank 1)	F43	1
		EVT control position sensor (bank 2)	F44	1
F15	98	TP sensor	F50	5

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair or replace error-detected parts.

3.CHECK COMPONENTS

Check the following.
- Accelerator pedal position (APP) sensor 1 (Refer to EC-451, "Component Inspection".)
- Crankshaft position (CKP) sensor (POS) (Refer to EC-299, "Component Inspection".)
- Exhaust valve timing (EVT) control position sensor [Refer to EC-188, "Component Inspection (Exhaust Valve Timing Control Position Sensor)".]
- Mass air flow (MAF) sensor (Refer to EC-203, "Component Inspection".)
- Throttle position (TP) sensor (Refer to EC-220, "Component Inspection".)

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace malfunctioning component.

cardiagn.com

P0850 PNP SWITCH

Description

INFOID:0000000012406536

When the selector lever position is P or N, park/neutral position (PNP) signal from the TCM is sent to ECM.

DTC Logic

INFOID:0000000012406537

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0850	Park/neutral position switch	The signal of the park/neutral position (PNP) signal does not change during driving after the engine is started.	• Harness or connectors [The park/neutral position (PNP) signal circuit is open or shorted.] • TCM

DTC CONFIRMATION PROCEDURE

1.INSPECTION START

Will CONSULT be used?

Will CONSULT be used?

YES >> GO TO 2.
NO >> GO TO 5.

2.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 3.

3.CHECK PNP SIGNAL

With CONSULT

1. Turn ignition switch ON.
2. Select “P/N POSI SW” in “DATA MONITOR” mode with CONSULT. Then check the “P/N POSI SW” signal under the following conditions.

Position (Selector lever)	Known-good signal
N or P position	ON
Except above position	OFF

Is the inspection result normal?

YES >> GO TO 4.
NO >> Proceed to EC-382, "Diagnosis Procedure".

4.PERFORM DTC CONFIRMATION PROCEDURE

1. Select “DATA MONITOR” mode with CONSULT.
2. Start engine and warm it up to normal operating temperature.
3. Maintain the following conditions for at least 50 consecutive seconds.

CAUTION:
Always drive vehicle at a safe speed.

ENG SPEED	1,100 - 6,375 rpm
COOLAN TEMP/S	More than 70°C (158°F)
B/FUEL SCHDL	3.0 - 31.8 msec

cardiagn.com

VHCL SPEED SE	More than 64 km/h (40 mph)
Selector lever	Suitable position

4. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-382, "Diagnosis Procedure".
NO >> INSPECTION END

5.PERFORM COMPONENT FUNCTION CHECK

Perform component function check. Refer to EC-382, "Component Function Check".

NOTE:

Use component function check to check the overall function of the park/neutral position (PNP) signal circuit. During this check, a 1st trip DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-382, "Diagnosis Procedure".

Component Function Check

INFOID:0000000012406538

1.PERFORM COMPONENT FUNCTION CHECK

1. Turn ignition switch ON.
2. Check the voltage between ECM harness connector terminals.

ECM				Condition		Voltage
Connector	+ Terminal	Connector	– Terminal			
F15	83	E19	152	Selector lever position	P or N	Battery voltage
					Except above	Approx. 0 V

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-382, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406539

1.CHECK TRANSMISSION RANGE SWITCH POWER SUPPLY

1. Turn ignition switch OFF.
2. Disconnect transmission range switch harness connector.
3. Turn ignition switch ON.
4. Check the voltage between transmission range switch harness connector and ground.

+		–	Voltage
Transmission range switch			
Connector	Terminal		
F17	1	Ground	Battery voltage

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2.CHECK TRANSMISSION RANGE SWITCH POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Check the continuity between transmission range switch harness connector and IPDM E/R harness connector.

cardiagn.com

Transmission range switch		IPDM E/R		Continuity
Connector	Terminal	Connector	Terminal	
F17	1	F12	74	Existed

4. Also check harness for short to ground.

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

3. CHECK TRANSMISSION RANGE SWITCH SIGNAL CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between transmission range switch harness connector and ECM harness connector.

Transmission range switch		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F17	2	F15	83	Existed

4. Also check harness for short to ground and to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair or replace error-detected parts.

4. CHECK TRANSMISSION RANGE SWITCH

Check the transmission range switch. Refer to TM-98, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> There is malfunction of transmission range switch. Replace transaxle assembly. Refer to TM-215, "Removal and Installation".

cardiagn.com

P1078, P1084 EVT CONTROL POSITION SENSOR

DTC Description

INFOID:0000000012406540

DTC DETECTION LOGIC

NOTE:
If DTC P1078 or P1084 is displayed with DTC P0643, first perform the trouble diagnosis for DTC P0643. Refer to EC-379, "DTC Logic".

DTC No.	CONSULT screen terms (Trouble diagnosis content)	DTC detecting condition
P1078	EXH TIM SEN/CIRC-B1 [Exhaust valve timing (EVT) control position sensor (bank 1) circuit]	An excessively high or low voltage from the sensor is sent to ECM.
P1084	EXH TIM SEN/CIRC-B2 [Exhaust valve timing (EVT) control position sensor (bank 2) circuit]	

POSSIBLE CAUSE

DTC P1078
- Harness or connectors [EVT control position sensor (bank 1) circuit is open or shorted.]
- EVT control position sensor
- Crankshaft position (CKP) sensor
- Camshaft position (CMP) sensor (bank 1)
- Accumulation of debris to the signal pick-up portion of the camshaft

DTC P1084
- Harness or connectors
- EVT control position sensor (bank 2) circuit is open or shorted.
- Sensor power supply 2 circuit is open or shorted.
- EVT control position sensor (bank 2)
- Each sensor, connected with sensor power supply 2 circuit
- Accumulation of debris to the signal pick-up portion of the camshaft

DTC CONFIRMATION PROCEDURE

1.CHECK DTC PRIORITY

If DTC P1078 or P0184 is displayed with DTC P0643, first perform the confirmation procedure (trouble diagnosis) for DTC P0643.

Is applicable DTC detected?

YES >> Perform diagnosis of applicable. Refer to EC-379, "DTC Logic".
NO >> GO TO 2.

2.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for 10 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-385, "Diagnosis Procedure".
NO-1 >> To check malfunction symptom before repair: Refer to GI-41, "Intermittent Incident".
NO-2 >> Confirmation after repair: INSPECTION END

cardiagn.com

Diagnosis Procedure

INFOID:0000000012406541

1.CHECK DTC PRIORITY

If DTC P1078 is displayed with DTC P0643, first perform the confirmation procedure (trouble diagnosis) for DTC P0643.

Is applicable DTC detected?

YES >> Perform diagnosis of applicable. Refer to EC-379, "DTC Logic".
NO >> GO TO 2.

2.CHECK EXHAUST VALVE TIMING (EVT) CONTROL POSITION SENSOR POWER SUPPLY

1. Disconnect EVT control position sensor harness connector.
2. Turn ignition switch ON.
3. Check the voltage between EVT control position sensor harness connector and ground.

DTC	+			–	Voltage (V)
	EVT control position sensor				
	Bank	Connector	Terminal		
P1078	1	F43	1	Ground	Approx. 5
P1084	2	F44	1		

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 3.

3.CHECK EVT CONTROL POSITION SENSOR POWER SUPPLY CIRCUIT FOR OPEN

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between EVT control position sensor harness connector and ECM harness connector.

DTC	EVT control position sensor			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P1078	1	F43	1	F14	28	Existed
P1084	2	F44	1			

Is the inspection result normal?

YES >> INSPECTION END
NO >> Repair or replace error-detected parts.

4.CHECK EVT CONTROL POSITION SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between EVT control position sensor harness connector and ECM harness connector.

DTC	+			–		Continuity
	EVT control position sensor			ECM		
	Bank	Connector	Terminal	Connector	Terminal	
P1078	1	F43	2	F14	40	Existed
P1084	2	F44	2			

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

cardiagn.com

5.CHECK EVT CONTROL POSITION SENSOR INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between exhaust valve timing control position sensor harness connector and ECM harness connector.

DTC	+			–		Continuity
	EVT control position sensor			ECM		
	Bank	Connector	Terminal	Connector	Terminal	
P1078	1	F43	3	F14	37	Existed
P1084	2	F44	3		39	

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair or replace error-detected parts.

6.CHECK EVT CONTROL POSITION SENSOR

Check exhaust valve timing control position sensor. Refer to EC-386, "Component Inspection (Exhaust Valve Timing Control Position Sensor)".

Is the inspection result normal?

YES >> GO TO 7.
NO >> Replace malfunctioning EVT control position sensor. Refer to EM-54, "Exploded View".

7.CHECK CKP SENSOR

Check Crankshaft position sensor. Refer to EC-299, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 8.
NO >> Replace crankshaft position sensor. Refer to EM-39, "Exploded View".

8.CHECK CMP SENSOR

Check camshaft position sensor. Refer to EC-303, "Component Inspection".

Is the inspection result normal?


YES >> GO TO 9.
NO >> Replace malfunctioning camshaft position sensor. Refer to EM-54, "Exploded View".

9.CHECK CAMSHAFT (EXH)

Check the following.
- Accumulation of debris to the signal plate of camshaft rear end
- Chipping signal plate of camshaft rear end

Is the inspection result normal?

YES >> INSPECTION END
NO >> Remove debris and clean the signal plate of camshaft rear end or replace camshaft. Refer to EM-88, "Removal and Installation".

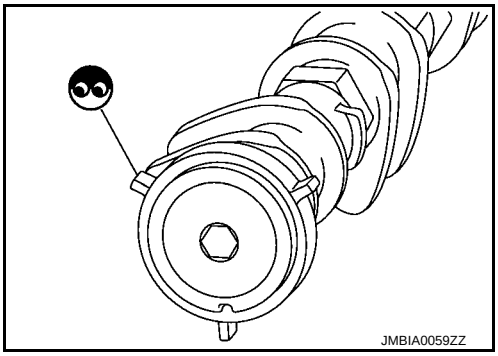

Component Inspection (Exhaust Valve Timing Control Position Sensor)

INFOID:0000000012406542

1.EXHAUST VALVE TIMING CONTROL POSITION SENSOR - 1


1. Turn ignition switch OFF.
2. Disconnect exhaust valve timing control position sensor harness connector.
3. Loosen the fixing bolt of the sensor.
4. Remove the exhaust valve timing control position sensor. Refer to EM-54, "Exploded View".

cardiagn.com

5. Visually check the sensor for chipping.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace malfunctioning exhaust valve timing control position sensor. Refer to EM-54, "Exploded View".

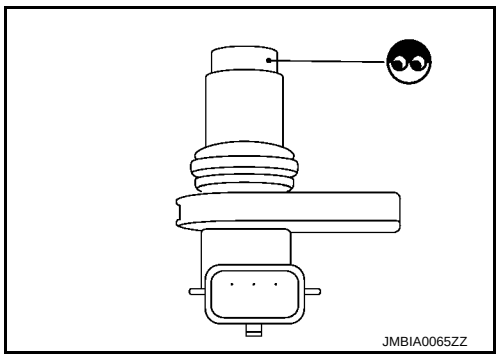

2. EXHAUST VALVE TIMING CONTROL POSITION SENSOR - 2

Check resistance exhaust valve timing control position sensor terminals as follows.

Exhaust valve timing control position sensor		Condition		Resistance
+	–			
Terminal				
1	2	Temperature	25°C (77°F)	Except 0 Ω or ∞ Ω
1	3			
2	3			

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning exhaust valve timing control position sensor. Refer to EM-54, "Exploded View".

cardiagn.com

P1148, P1168 CLOSED LOOP CONTROL

DTC Logic

INFOID:0000000012406543

DTC DETECTION LOGIC

NOTE:
DTC P1148 or P1168 is displayed with another DTC for A/F sensor 1.
Perform the trouble diagnosis for the corresponding DTC.

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1148	Closed loop control function (bank 1)	The closed loop control function for bank 1 does not operate even when vehicle is being driven in the specified condition.	• Harness or connectors (The A/F sensor 1 circuit is open or shorted.) • A/F sensor 1 • A/F sensor 1 heater
P1168	Closed loop control function (bank 2)	The closed loop control function for bank 2 does not operate even when vehicle is being driven in the specified condition.	

cardiagn.com

P1212 TCS COMMUNICATION LINE

Description

INFOID:0000000012406544

This CAN communication line is used to control the smooth engine operation during the TCS operation. Pulse signals are exchanged between ECM and “ABS actuator and electric unit (control unit)”.
Be sure to erase the malfunction information such as DTC not only for “ABS actuator and electric unit (control unit)” but also for ECM after TCS related repair.

DTC Logic

INFOID:0000000012406545

DTC DETECTION LOGIC

NOTE:
- **If DTC P1212 is displayed with DTC UXXXX, first perform the trouble diagnosis for DTC UXXXX.**
- **If DTC P1212 is displayed with DTC P0607, first perform the trouble diagnosis for DTC P0607. Refer to EC-376, "DTC Logic".**

Freeze frame data is not stored in the ECM for this self-diagnosis.

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1212	TCS communication line	ECM cannot receive the information from “ABS actuator and electric unit (control unit)” continuously.	• Harness or connectors (The CAN communication line is open or shorted.) • ABS actuator and electric unit (control unit) • Dead (Weak) battery

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is more than 10.5 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for at least 10 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-389, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406546

Perform the trouble diagnosis for TCS. Refer to BRC-46, "Work Flow".
NOTE:
If DTC P1212 is displayed with DTC UXXXX and/or P0607, perform the following trouble diagnosis.
- Trouble diagnosis for DTC UXXXX Refer to EC-103, "DTC Index".
- Trouble diagnosis for DTC P0607 Refer to EC-376, "DTC Logic".

cardiagn.com

P1217 ENGINE OVER TEMPERATURE

DTC Logic

INFOID:0000000012406547

DTC DETECTION LOGIC

NOTE:

- **If DTC P1217 is displayed with DTC UXXXX, first perform the trouble diagnosis for DTC UXXXX.**
- **If DTC P1217 is displayed with DTC P0607, first perform the trouble diagnosis for DTC P0607. Refer to EC-376, "DTC Logic".**

If the cooling fan or another component in the cooling system malfunctions, engine coolant temperature will rise.
When the engine coolant temperature reaches an abnormally high temperature condition, a malfunction is indicated.

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1217	Engine over temperature (Overheat)	• Cooling fan does not operate properly (Overheat). • Cooling fan system does not operate properly (Overheat). • Engine coolant was not added to the system using the proper filling method. • Engine coolant is not within the specified range.	• Harness or connectors (The cooling fan circuit is open or shorted.) • IPDM E/R (Cooling fan relays) • Cooling fan motor • Radiator hose • Radiator • Radiator cap • Water pump • Thermostat

CAUTION:

When a malfunction is indicated, always replace the coolant. Refer to CO-9, "Draining". Also, replace the engine oil. Refer to MA-17, "ENGINE OIL : Draining".

1. **Fill radiator with coolant up to specified level with a filling speed of 2 liters per minute. Always use coolant with the proper mixture ratio. Refer to MA-11, "Anti-Freeze Coolant Mixture Ratio".**
2. **After refilling coolant, run engine to ensure that no water-flow noise is emitted.**

DTC CONFIRMATION PROCEDURE

1.PERFORM COMPONENT FUNCTION CHECK

Perform component function check. Refer to EC-390, "Component Function Check".

NOTE:

Use component function check to check the overall function of the cooling fan. During this check, a DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-391, "Diagnosis Procedure".

Component Function Check

INFOID:0000000012406548

1.PERFORM COMPONENT FUNCTION CHECK-I

WARNING:


Never remove the radiator cap when the engine is hot. Serious burns could be caused by high pressure fluid escaping from the radiator.
Wrap a thick cloth around cap. Carefully remove the cap by turning it a quarter turn to allow built-up pressure to escape. Then turn the cap all the way off.

cardiagn.com

Check the coolant level in the reservoir tank and radiator.
Allow engine to cool before checking coolant level.

Is the coolant level in the reservoir tank and/or radiator below the proper range?

YES >> Proceed to EC-391, "Diagnosis Procedure".
NO >> GO TO 2.

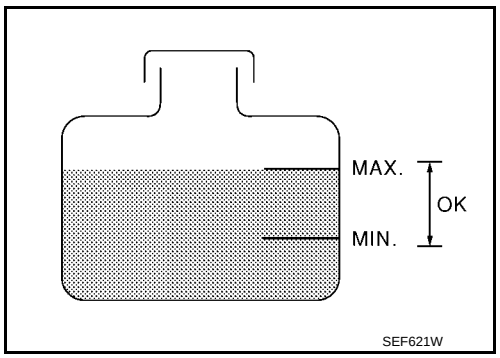

2. PERFORM COMPONENT FUNCTION CHECK-II

Confirm whether customer filled the coolant or not.

Did customer fill the coolant?

YES >> Proceed to EC-391, "Diagnosis Procedure".
NO >> GO TO 3.

3. PERFORM COMPONENT FUNCTION CHECK-III

With CONSULT
1. Turn ignition switch ON.
2. Perform “COOLING FAN” in “ACTIVE TEST” mode with CONSULT.
3. Check that cooling fan motors-1 and -2 operate at each speed (LOW/MID/HI).

Without CONSULT
Perform IPDM E/R auto active test and check cooling fan motors operation, refer to PCS-10, "Diagnosis Description".

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-391, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406549

1. CHECK COOLING FAN OPERATION

With CONSULT
1. Turn ignition switch ON.
2. Perform “COOLING FAN” in “ACTIVE TEST” mode with CONSULT.
3. Check that cooling fans-1 and -2 operate at each speed (LOW/MID/HI).

Without CONSULT
1. Perform IPDM E/R auto active test and check cooling fan motors operation, refer to PCS-10, "Diagnosis Description".
2. Check that cooling fans-1 and -2 operate at each speed (Low/Middle/High).

Is the inspection result normal?

YES >> GO TO 2.
NO >> Proceed to EC-470, "Diagnosis Procedure".

2. CHECK COOLING SYSTEM FOR LEAKAGE-I

Check cooling system for leakage. Refer to CO-9, "Inspection".

Is leakage detected?

YES >> GO TO 3.
NO >> GO TO 4.

3. CHECK COOLING SYSTEM FOR LEAKAGE-II

Check the following for leakage.
- Hose
- Radiator
- Water pump

cardiagn.com

>> Repair or replace malfunctioning part.

4. CHECK RADIATOR CAP

Check radiator cap. Refer to CO-13, "RADIATOR CAP : Inspection".

Is the inspection result normal?

YES >> GO TO 5.
NO >> Replace radiator cap. Refer to CO-14, "Exploded View".

5. CHECK THERMOSTAT

Check thermostat. Refer to CO-26, "Inspection".

Is the inspection result normal?

YES >> GO TO 6.
NO >> Replace thermostat. Refer to CO-25, "Exploded View".

6. CHECK ENGINE COOLANT TEMPERATURE SENSOR

Check engine coolant temperature sensor. Refer to EC-216, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 7.
NO >> Replace engine coolant temperature sensor. Refer to CO-27, "Exploded View".

7. CHECK MAIN 12 CAUSES

If the cause cannot be isolated, check the following.

Engine	Step	Inspection item	Equipment	Standard	Reference page
OFF	1	• Blocked radiator • Blocked condenser • Blocked radiator grille • Blocked bumper	• Visual	No blocking	—
	2	• Coolant mixture	• Coolant tester	CO-9, "Inspection"	
	3	• Coolant level	• Visual	Coolant up to MAX level in reservoir tank and radiator filler neck	CO-9, "Inspection"
	4	• Radiator cap	• Pressure tester	CO-13, "RADIATOR CAP : Inspection"	
ON*2	5	• Coolant leakage	• Visual	No leakage	CO-9, "Inspection"
ON*2	6	• Thermostat	• Touch the upper and lower radiator hoses	Both hoses should be hot	CO-26, "Inspection"
ON*1	7	• Cooling fan	• CONSULT	Operating	EC-470, "Component Function Check"
OFF	8	• Combustion gas leakage	• Color checker chemical tester 4 Gas analyzer	Negative	—
ON*3	9	• Coolant temperature gauge	• Visual	Gauge less than 3/4 when driving	—
		• Coolant overflow to reservoir tank	• Visual	No overflow during driving and idling	CO-9, "Inspection"
OFF*4	10	• Coolant return from reservoir tank to radiator	• Visual	Should be initial level in reservoir tank	CO-9, "Inspection"
OFF	11	• Cylinder head	• Straight gauge feeler gauge	0.1 mm (0.004 in) Maximum distortion (warping)	EM-104, "Inspection"
	12	• Cylinder block and pistons	• Visual	No scuffing on cylinder walls or piston	EM-117, "Inspection"

*1: Turn the ignition switch ON.

*2: Engine running at 3,000 rpm for 10 minutes.

*3: Drive at 90 km/h (56 MPH) for 30 minutes and then let idle for 10 minutes.

*4: After 60 minutes of cool down time.

For more information, refer to CO-3, "Troubleshooting Chart".

cardiagn.com

>> INSPECTION END

cardiagn.com

P1225 TP SENSOR

DTC Logic

INFOID:0000000012406550

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1225	Closed throttle position learning performance	Closed throttle position learning value is excessively low.	• Electric throttle control actuator (TP sensor 1 and 2)

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 10 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-394, "Diagnosis Procedure".
NO >> INSPECTION END


Diagnosis Procedure

INFOID:0000000012406551

1.CHECK ELECTRIC THROTTLE CONTROL ACTUATOR VISUALLY

1. Turn ignition switch OFF.
2. Remove the intake air duct. Refer to EM-27, "Exploded View".
3. Check if foreign matter is caught between the throttle valve (1) and the housing.

- Electric throttle control actuator (2)
- ⇦: Vehicle front

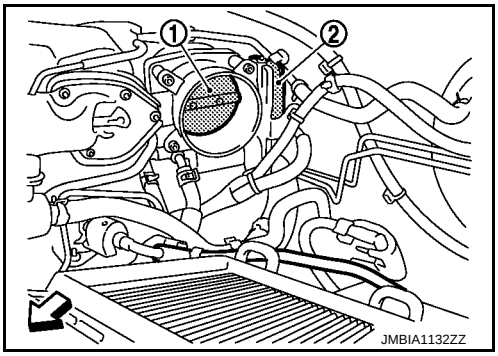

Is the inspection result normal?

YES >> GO TO 2.
NO >> Remove the foreign matter and clean the electric throttle control actuator inside, and then perform throttle valve closed position learning. Refer to EC-148, "Description".

2.REPLACE ELECTRIC THROTTLE CONTROL ACTUATOR

1. Replace electric throttle control actuator. Refer to EM-29, "Exploded View".
2. Go to EC-149, "Description".

>> INSPECTION END

cardiagn.com

P1226 TP SENSOR

DTC Logic

INFOID:0000000012406552

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1226	Closed throttle position learning performance	Closed throttle position learning is not performed successfully, repeatedly.	• Electric throttle control actuator (TP sensor 1 and 2)

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 10 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Repeat steps 2 and 3 for 32 times.
5. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-395, "Diagnosis Procedure".
NO >> INSPECTION END


Diagnosis Procedure

INFOID:0000000012406553

1.CHECK ELECTRIC THROTTLE CONTROL ACTUATOR VISUALLY

1. Turn ignition switch OFF.
2. Remove the intake air duct. Refer to EM-27, "Exploded View".
3. Check if foreign matter is caught between the throttle valve (1) and the housing.

- Electric throttle control actuator (2)
- ⇦: Vehicle front

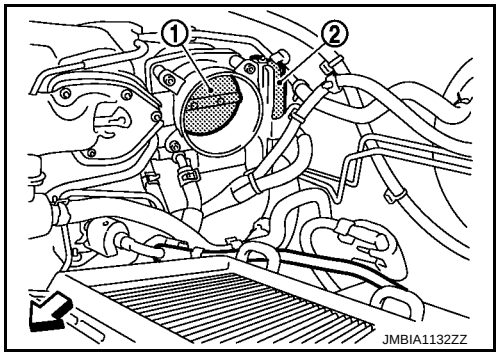

Is the inspection result normal?

YES >> GO TO 2.
NO >> Remove the foreign matter and clean the electric throttle control actuator inside, and then perform throttle valve closed position learning. Refer to EC-148, "Description".

2.REPLACE ELECTRIC THROTTLE CONTROL ACTUATOR

1. Replace electric throttle control actuator. Refer to EM-29, "Exploded View".
2. Go to EC-149, "Description".

>> INSPECTION END

cardiagn.com

P1550 BATTERY CURRENT SENSOR

DTC Logic

INFOID:0000000012406554

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1550	Battery current sensor circuit range/performance	The output voltage of the battery current sensor remains within the specified range while engine is running.	• Harness or connectors (Battery current sensor circuit is open or shorted.) (APP sensor 2 circuit is shorted.) [CMP sensor (PHASE) circuit is or shorted.] (EOP sensor circuit is shorted.) (Refrigerant pressure sensor is shorted.) • Battery current sensor • Accelerator pedal position sensor • Camshaft position sensor (PHASE) • Engine oil pressure sensor • Refrigerant pressure sensor

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 8 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and wait at least 10 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-396, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406555

1.CHECK BATTERY CURRENT SENSOR POWER SUPPLY

1. Disconnect battery current sensor harness connector.
2. Turn ignition switch ON.
3. Check the voltage between battery current sensor harness connector and ground.

Battery current sensor		Ground	Voltage (V)
Connector	Terminal		
F76	1	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2.CHECK BATTERY CURRENT SENSOR POWER SUPPLY CIRCUIT FOR OPEN

1. Turn ignition switch OFF.

cardiagn.com

2. Disconnect ECM harness connector.
3. Check the continuity between battery current sensor harness connector and ECM harness connector.

Battery current sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F76	1	F15	87	Existed

Is the inspection result normal?

YES >> Check sensor power supply 2 circuit. Refer to EC-497, "Diagnosis Procedure".
NO >> Repair or replace error-detected parts.

3. CHECK BATTERY CURRENT SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between battery current sensor harness connector and ECM harness connector.

Battery current sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F76	3	F15	64	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4. CHECK BATTERY CURRENT SENSOR INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between battery current sensor harness connector and ECM harness connector.

Battery current sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F76	4	F15	69	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

5. CHECK BATTERY CURRENT SENSOR

Check battery current sensor. Refer to EC-397, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace battery negative cable assembly.

Component Inspection


INFOID:0000000012406556

1. CHECK BATTERY CURRENT SENSOR

1. Turn ignition switch OFF.
2. Reconnect harness connectors disconnected.

cardiagn.com

3. Disconnect battery negative cable.
4. Install jumper cable between battery negative terminal and body ground.
5. Turn ignition switch ON.
6. Check the voltage between ECM harness connector terminals under the following conditions.

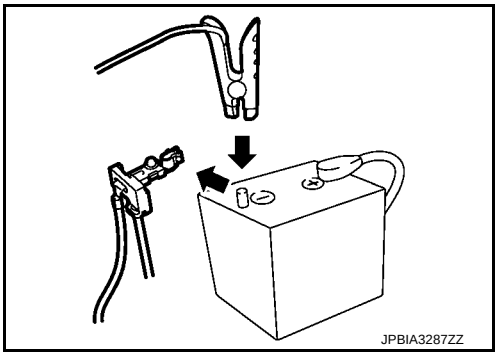

ECM			Voltage (V)
Connector	+	–	
	Terminal	Terminal	
F15	69 (Battery current sensor signal)	64 (Sensor ground)	Approx. 2.5

Before measuring the terminal voltage, confirm that the battery is fully charged. Refer to PG-128, "How to Handle Battery".

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace battery negative cable assembly.

cardiagn.com

P1551, P1552 BATTERY CURRENT SENSOR

DTC Logic

INFOID:0000000012406557

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1551	Battery current sensor circuit low input	An excessively low voltage from the sensor is sent to ECM.	• Harness or connectors (Battery current sensor circuit is open or shorted.) (APP sensor 2 circuit is shorted.) [CMP sensor (PHASE) circuit is or shorted.] (EOP sensor circuit is shorted.) (Refrigerant pressure sensor is shorted.) • Battery current sensor • Accelerator pedal position sensor • Camshaft position sensor (PHASE) • Engine oil pressure sensor • Refrigerant pressure sensor
P1552	Battery current sensor circuit high input	An excessively high voltage from the sensor is sent to ECM.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 8 V with ignition switch ON

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON and wait at least 10 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-399, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406558

1.CHECK BATTERY CURRENT SENSOR POWER SUPPLY

1. Disconnect battery current sensor harness connector.
2. Turn ignition switch ON.
3. Check the voltage between battery current sensor harness connector and ground.

Battery current sensor		Ground	Voltage (V)
Connector	Terminal		
F76	1	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2.CHECK BATTERY CURRENT SENSOR POWER SUPPLY CIRCUIT FOR OPEN

cardiagn.com

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between battery current sensor harness connector and ECM harness connector.

Battery current sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F76	1	F15	87	Existed

Is the inspection result normal?

YES >> Check sensor power supply 2 circuit. Refer to EC-497, "Diagnosis Procedure".
NO >> Repair or replace error-detected parts.

3. CHECK BATTERY CURRENT SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between battery current sensor harness connector and ECM harness connector.

Battery current sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F76	3	F15	64	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4. CHECK BATTERY CURRENT SENSOR INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between battery current sensor harness connector and ECM harness connector.

Battery current sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F76	4	F15	69	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

5. CHECK BATTERY CURRENT SENSOR

Check battery current sensor. Refer to EC-397, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace battery negative cable assembly.

Component Inspection


INFOID:0000000012406559

1. CHECK BATTERY CURRENT SENSOR

1. Turn ignition switch OFF.
2. Reconnect harness connectors disconnected.

cardiagn.com

3. Disconnect battery negative cable.
4. Install jumper cable between battery negative terminal and body ground.
5. Turn ignition switch ON.
6. Check the voltage between ECM harness connector terminals under the following conditions.

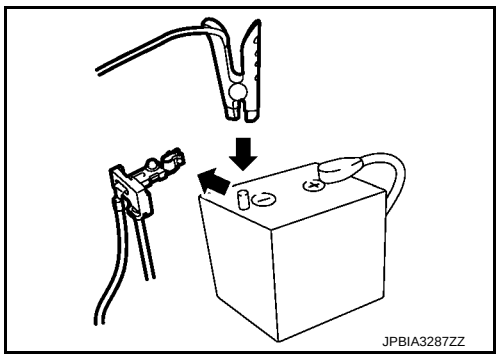

ECM			Voltage (V)
Connector	+	–	
	Terminal	Terminal	
F15	69 (Battery current sensor signal)	64 (Sensor ground)	Approx. 2.5

Before measuring the terminal voltage, confirm that the battery is fully charged. Refer to PG-128, "How to Handle Battery".

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace battery negative cable assembly.

cardiagn.com

P1553 BATTERY CURRENT SENSOR

DTC Logic

INFOID:0000000012406560

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1553	Battery current sensor performance	The signal voltage transmitted from the sensor to ECM is higher than the amount of the maximum power generation.	• Harness or connectors (Battery current sensor circuit is open or shorted.) (APP sensor 2 circuit is shorted.) [CMP sensor (PHASE) circuit is or shorted.] (EOP sensor circuit is shorted.) (Refrigerant pressure sensor is shorted.) • Battery current sensor • Accelerator pedal position sensor • Camshaft position sensor (PHASE) • Engine oil pressure sensor • Refrigerant pressure sensor

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 8 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and wait at least 10 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-402, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406561

1.CHECK BATTERY CURRENT SENSOR POWER SUPPLY

1. Disconnect battery current sensor harness connector.
2. Turn ignition switch ON.
3. Check the voltage between battery current sensor harness connector and ground.

Battery current sensor		Ground	Voltage (V)
Connector	Terminal		
F76	1	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2.CHECK BATTERY CURRENT SENSOR POWER SUPPLY CIRCUIT FOR OPEN

1. Turn ignition switch OFF.

cardiagn.com

2. Disconnect ECM harness connector.
3. Check the continuity between battery current sensor harness connector and ECM harness connector.

Battery current sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F76	1	F15	87	Existed

Is the inspection result normal?

YES >> Check sensor power supply 2 circuit. Refer to EC-497, "Diagnosis Procedure".
NO >> Repair or replace error-detected parts.

3. CHECK BATTERY CURRENT SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between battery current sensor harness connector and ECM harness connector.

Battery current sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F76	3	F15	64	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4. CHECK BATTERY CURRENT SENSOR INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between battery current sensor harness connector and ECM harness connector.

Battery current sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F76	4	F15	69	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

5. CHECK BATTERY CURRENT SENSOR

Check battery current sensor. Refer to EC-397, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace battery negative cable assembly.

Component Inspection


INFOID:0000000012406562

1. CHECK BATTERY CURRENT SENSOR

1. Turn ignition switch OFF.
2. Reconnect harness connectors disconnected.

cardiagn.com

3. Disconnect battery negative cable.
4. Install jumper cable between battery negative terminal and body ground.
5. Turn ignition switch ON.
6. Check the voltage between ECM harness connector terminals under the following conditions.

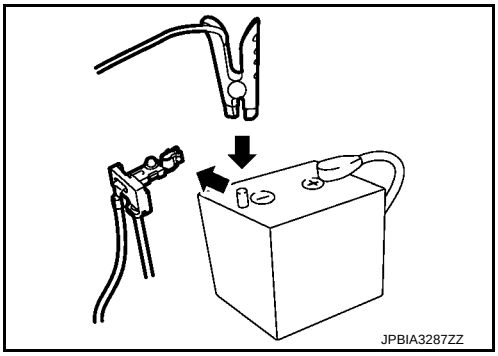

ECM			Voltage (V)
Connector	+	–	
	Terminal	Terminal	
F15	69 (Battery current sensor signal)	64 (Sensor ground)	Approx. 2.5

Before measuring the terminal voltage, confirm that the battery is fully charged. Refer to PG-128, "How to Handle Battery".

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace battery negative cable assembly.

cardiagn.com

P1554 BATTERY CURRENT SENSOR

DTC Logic

INFOID:0000000012406563

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1554	Battery current sensor performance	The output voltage of the battery current sensor is lower than the specified value while the battery voltage is high enough.	• Harness or connectors (Battery current sensor circuit is open or shorted.) (APP sensor 2 circuit is shorted.) [CMP sensor (PHASE) circuit is or shorted.] (EOP sensor circuit is shorted.) (Refrigerant pressure sensor is shorted.) • Battery current sensor • Accelerator pedal position sensor • Camshaft position sensor (PHASE) • Engine oil pressure sensor • Refrigerant pressure sensor

DTC CONFIRMATION PROCEDURE

1.PERFORM COMPONENT FUNCTION CHECK

Perform component function check. Refer to EC-405, "Component Function Check".

NOTE:

Use component function check to check the overall function of the battery current sensor circuit. During this check, a 1st trip DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END

NO >> Proceed to EC-406, "Diagnosis Procedure".

Component Function Check

INFOID:0000000012406564

1.PRECONDITIONING

TESTING CONDITION:

- **Before performing the following procedure, confirm that battery voltage is more than 12.8 V at idle.**
- **Before performing the following procedure, confirm that all load switches and A/C switch are turned OFF.**

>> GO TO 2.

2.PERFORM COMPONENT FUNCTION CHECK

With CONSULT

1. Start engine and let it idle.
2. Select “BAT CUR SEN” in “DATA MONITOR” mode with CONSULT.
3. Check “BAT CUR SEN” indication for 10 seconds.
   “BAT CUR SEN” should be above 2,300mV at least once.

Without CONSULT

1. Start engine and let it idle.
2. Check voltage between ECM harness connector terminals under the following conditions.

cardiagn.com

ECM			Voltage (V)
Connector	+	–	
	Terminal	Terminal	
F8	69 (Battery current sensor signal)	64 (Sensor ground)	Above 2.3 at least once

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-406, "Diagnosis Procedure"

Diagnosis Procedure

INFOID:0000000012406565

1.CHECK BATTERY CURRENT SENSOR POWER SUPPLY

1. Disconnect battery current sensor harness connector.
2. Turn ignition switch ON.
3. Check the voltage between battery current sensor harness connector and ground.

Battery current sensor		Ground	Voltage (V)
Connector	Terminal		
F76	1	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2.CHECK BATTERY CURRENT SENSOR POWER SUPPLY CIRCUIT FOR OPEN

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between battery current sensor harness connector and ECM harness connector.

Battery current sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F76	1	F15	87	Existed

Is the inspection result normal?

YES >> Check sensor power supply 2 circuit. Refer to EC-497, "Diagnosis Procedure".
NO >> Repair or replace error-detected parts.

3.CHECK BATTERY CURRENT SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between battery current sensor harness connector and ECM harness connector.

Battery current sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F76	3	F15	64	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK BATTERY CURRENT SENSOR INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between battery current sensor harness connector and ECM harness connector.

cardiagn.com

Battery current sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F76	4	F15	69	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

5. CHECK BATTERY CURRENT SENSOR

Check battery current sensor. Refer to EC-407, "Component Inspection".

Is the inspection result normal?


YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace battery negative cable assembly.

Component Inspection

INFOID:0000000012406566

1. CHECK BATTERY CURRENT SENSOR

1. Turn ignition switch OFF.
2. Reconnect harness connectors disconnected.
3. Disconnect battery negative cable.
4. Install jumper cable between battery negative terminal and body ground.
5. Turn ignition switch ON.
6. Check the voltage between ECM harness connector terminals under the following conditions.

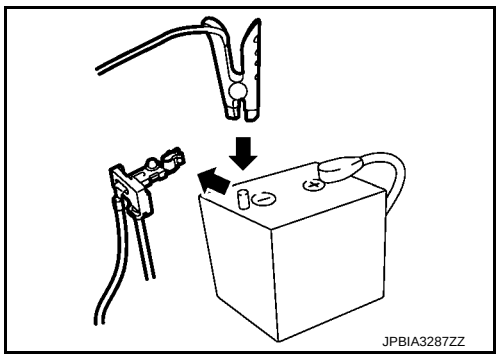

ECM			Voltage (V)
Connector	+	–	
	Terminal	Terminal	
F15	69 (Battery current sensor signal)	64 (Sensor ground)	Approx. 2.5

Before measuring the terminal voltage, confirm that the battery is fully charged. Refer to PG-128, "How to Handle Battery".

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace battery negative cable assembly.

cardiagn.com

P1556, P1557 BATTERY TEMPERATURE SENSOR

DTC Logic

INFOID:0000000012406567

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name (Trouble diagnosis content)	DTC detecting condition	Possible cause
P1556	BAT TMP SEN/CIRC (Battery temperature sensor circuit low input)	Signal voltage from Battery temperature sensor remains 0.16V or less for 5 seconds or more.	• Harness or connectors [Battery current sensor (Battery temperature sensor) circuit is open or shorted.] (APP sensor 2 circuit is shorted.) [CMP sensor (PAHSE) circuit is open or shorted.] (EOP sensor is shorted.) (Refrigerant pressure sensor is shorted.) • Battery current sensor (Battery temperature sensor) • Accelerator pedal position sensor (APP sensor 2) • Camshaft position (CMP) sensor (PHESE) • Engine oil temperature (EOP) sensor • Refrigerant pressure sensor
P1557	BAT TMP SEN/CIRC (Battery temperature sensor circuit high input)	Signal voltage from Battery temperature sensor remains 4.84V or more for 5 seconds or more.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is 10 V or more at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start the engine and let it idle at least 10 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-408, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406568

1.CHECK BATTERY TEMPERATURE SENSOR INPUT SIGNAL

1. Disconnect battery current sensor harness connector.
2. Turn ignition switch ON.
3. Check the voltage between battery current sensor harness connector and ground.

Battery current sensor		Ground	Voltage (V)
Connector	Terminal		
F76	2	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

cardiagn.com

2.CHECK BATTERY TEMPERATURE SENSOR INPUT SIGNAL CIRCUIT FOR OPEN

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between battery current sensor harness connector and ECM harness connector.

Battery current sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F76	2	F15	68	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> Check sensor power supply 2 circuit. Refer to EC-497, "Diagnosis Procedure".
NO >> Repair or replace error-detected parts.

3.CHECK BATTERY TEMPERATURE SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between battery current sensor harness connector and ECM harness connector.

Battery current sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F76	3	F15	64	Existed

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK BATTERY TEMPERATURE SENSOR

Check battery temperature sensor. Refer to EC-409, "Component Inspection (Battery Temperature Sensor)".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace battery negative cable assembly.

Component Inspection (Battery Temperature Sensor)

INFOID:0000000012406569

1.CHECK BATTERY TEMPERATURE SENSOR

1. Turn ignition switch OFF.
2. Disconnect battery current sensor.
3. Check the resistance between battery current sensor connector terminals.

Battery current sensor		Resistance
+	–	
Terminal		
2	3	continuity with the resistance value 100 Ω or more

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace battery negative cable assembly.

cardiagn.com

P1564 ASCD STEERING SWITCH

DTC Logic

INFOID:0000000012406570

DTC DETECTION LOGIC

NOTE:
If DTC P1564 is displayed with DTC P0605, first perform the trouble diagnosis for DTC P0605. Refer to EC-374, "DTC Logic".

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1564	ASCD steering switch	• An excessively high voltage signal from the ASCD steering switch is sent to ECM. • ECM detects that input signal from the ASCD steering switch is out of the specified range. • ECM detects that the ASCD steering switch is stuck ON.	• Harness or connectors (The switch circuit is open or shorted.) • ASCD steering switch • ECM

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON and wait at least 10 seconds.
2. Press MAIN switch for at least 10 seconds, then release it and wait at least 10 seconds.
3. Press CANCEL switch for at least 10 seconds, then release it and wait at least 10 seconds.
4. Press RESUME/ACCELERATE switch for at least 10 seconds, then release it and wait at least 10 seconds.
5. Press SET/COAST switch for at least 10 seconds, then release it and wait at least 10 seconds.
6. Check DTC.

Is DTC detected?

YES >> Proceed to EC-410, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406571

1.CHECK ASCD STEERING SWITCH CIRCUIT

With CONSULT

1. Turn ignition switch ON.
2. Select “MAIN SW”, “CANCEL SW”, “RESUME/ACC SW” and “SET SW” in “DATA MONITOR” mode with CONSULT.
3. Check each item indication under the following conditions.

Monitor item	Condition		Indication
MAIN SW	MAIN switch	Pressed	ON
		Released	OFF
CANCEL SW	CANCEL switch	Pressed	ON
		Released	OFF

cardiagn.com

Monitor item	Condition		Indication
RESUME/ACC SW	RESUME/ACCEL-ERATE switch	Pressed	ON
		Released	OFF
SET SW	SET/COAST switch	Pressed	ON
		Released	OFF

Without CONSULT

1. Turn ignition switch ON.
2. Check the voltage between ECM harness connector terminals under the following conditions.

ECM			Condition	Voltage (V)
Con-nector	+	–		
	Terminal	Terminal		
E19	134 (ASCD steering switch signal)	135 (ASCD steering switch ground)	MAIN switch: Pressed	Approx. 0
			CANCEL switch: Pressed	Approx. 1
			SET/COAST switch: Pressed	Approx. 2
			RESUME/ACCELERATE switch: Pressed	Approx. 3
			All ASCD steering switches: Released	Approx. 4

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> GO TO 2.

2. CHECK ASCD STEERING SWITCH GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector M303.
3. Disconnect combination switch harness connector.
4. Check the continuity between combination switch and ECM harness connector.

Combination switch	ECM		Continuity
Terminal	Connector	Terminal	
16	E19	135	Existed

5. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair or replace error-detected parts.

3. CHECK ASCD STEERING SWITCH INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between combination switch and ECM harness connector.

Combination switch	ECM		Continuity
Terminal	Connector	Terminal	
13	E19	134	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair or replace error-detected parts.

4. CHECK ASCD STEERING SWITCH

Check ASCD steering switch. Refer to EC-412, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".

cardiagn.com

NO >> Replace ASCD steering switch. Refer to EC-17, "ENGINE CONTROL SYSTEM : Component Parts Location".

Component Inspection

INFOID:0000000012406572

1. CHECK ASCD STEERING SWITCH

1. Turn ignition switch OFF.
2. Disconnect combination switch (spiral cable) harness connector.
3. Check resistance between combination switch harness connector terminals as per the following.

Combination switch		Condition	Resistance (Ω)
Connector	Terminals		
M33	13 and 16	MAIN switch: Pressed	Approx. 0
		CANCEL switch: Pressed	Approx. 250
		SET/COAST switch: Pressed	Approx. 660
		RESUME/ACCELERATE switch: Pressed	Approx. 1,480
		All ASCD steering switches: Released	Approx. 4,000

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace ASCD steering switch

cardiagn.com

P1572 BRAKE PEDAL POSITION SWITCH

Description

INFOID:0000000012406573

When the brake pedal is depressed, brake pedal position switch is turned OFF and stop lamp switch is turned ON. ECM detects the state of the brake pedal by this input of two kinds (ON/OFF signal).
Refer to EC-46, "AUTOMATIC SPEED CONTROL DEVICE (ASCD) : System Description" for the ASCD function.

DTC Logic

INFOID:0000000012406574

DTC DETECTION LOGIC

NOTE:

- **If DTC P1572 is displayed with DTC P0605, first perform the trouble diagnosis for DTC P0605. Refer to EC-374, "DTC Logic".**
- **This self-diagnosis has the one trip detection logic. When malfunction A is detected, DTC is not stored in ECM memory. And in that case, 1st trip DTC and 1st trip freeze frame data are displayed. 1st trip DTC is erased when ignition switch OFF. And even when malfunction A is detected in two consecutive trips, DTC is not stored in ECM memory.**

DTC No.	Trouble diagnosis name	DTC detecting condition		Possible cause
P1572	Brake pedal position switch	A)	When the vehicle speed is above 30 km/h (19 MPH), ON signals from the stop lamp switch and the brake pedal position switch are sent to the ECM at the same time.	• Harness or connectors (The stop lamp switch circuit is shorted.) • Harness or connectors (The brake pedal position switch circuit is shorted.) • Stop lamp switch • Brake pedal position switch • Incorrect stop lamp switch installation • Incorrect brake pedal position switch installation • ECM
		B)	Brake pedal position switch signal is not sent to ECM for extremely long time while the vehicle is driving.	

DTC CONFIRMATION PROCEDURE

1.INSPECTION START

Do you have CONSULT?

Do you have CONSULT?

YES >> GO TO 2.
NO >> GO TO 5.

2.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always turn ignition switch OFF and wait at least 10 seconds before conducting the next test.

NOTE:

Procedure for malfunction B is not described here. It takes extremely long time to complete procedure for malfunction B. By performing procedure for malfunction A, the incident that causes malfunction B can be detected.

>> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION A-I

1. Start engine (VDC switch OFF).
2. Select “DATA MONITOR” mode with CONSULT.
3. Press MAIN switch and make sure that CRUISE lamp lights up.
4. Drive the vehicle for at least 5 consecutive seconds under the following conditions.

CAUTION:

Always drive vehicle at a safe speed.

NOTE:

cardiagn.com

This procedure may be conducted with the drive wheels lifted in the shop or by driving the vehicle. If a road test is expected to be easier, it is unnecessary to lift the vehicle.

VHCL SPEED SE	More than 30 km/h (19 mph)
Selector lever	Suitable position

5. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Go to EC-415, "Diagnosis Procedure".
NO >> GO TO 4.

4. PERFORM DTC CONFIRMATION PROCEDURE A-II

1. Drive the vehicle for at least 5 consecutive seconds under the following conditions.
CAUTION:
Always drive vehicle at a safe speed.
NOTE:
This procedure may be conducted with the drive wheels lifted in the shop or by driving the vehicle. If a road test is expected to be easier, it is unnecessary to lift the vehicle.

VHCL SPEED SE	More than 30 km/h (19 mph)
Selector lever	Suitable position
Driving location	Depress the brake pedal for more than five seconds so as not to come off from the above-mentioned vehicle speed.

2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Go to EC-415, "Diagnosis Procedure".
NO >> INSPECTION END

5. PERFORM COMPONENT FUNCTION CHECK

Perform component function check. Refer to EC-414, "Component Function Check".
NOTE:
Use component function check to check the overall function of brake pedal position switch. During this check, a DTC might not be confirmed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Go to EC-415, "Diagnosis Procedure".

Component Function Check

INFOID:0000000012406575

1. PERFORM COMPONENT FUNCTION CHECK

1. Turn ignition switch ON.
2. Check the voltage between ECM harness connectors.

ECM			Condition		Voltage
Connector	+	–			
	Terminal	Terminal			
E19	140 (Brake pedal position switch signal)	152	Brake pedal	Slightly depressed	Approx. 0 V
				Fully released	Battery voltage

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 2.

cardiagn.com

2.PERFORM COMPONENT FUNCTION CHECK-II

Check the voltage between ECM harness connectors.

ECM			Condition		Voltage
Connector	+ Terminal	– Terminal			
E19	139 (Stop lamp switch signal)	152	Brake pedal	Slightly depressed	Battery voltage
				Fully released	Approx. 0 V

Is the inspection result normal?

YES >> INSPECTION END
NO >> Go to EC-415, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406576

1.CHECK OVERALL FUNCTION-I

With CONSULT

1. Turn ignition switch ON.
2. Select “BRAKE SW1” in “DATA MONITOR” mode with CONSULT.
3. Check “BRAKE SW1” indication under the following conditions.

Monitor item	Condition		Indication
BRAKE SW1	Brake pedal	Slightly depressed	OFF
		Fully released	ON

Without CONSULT

1. Turn ignition switch ON.
2. Check the voltage between ECM harness connectors.

ECM			Condition		Voltage
Connector	+ Terminal	– Terminal			
E19	140 (Brake pedal position switch signal)	152	Brake pedal	Slightly depressed	Approx. 0 V
				Fully released	Battery voltage

Is the inspection result normal?

YES >> GO TO 2.
NO >> GO TO 3.

2.CHECK OVERALL FUNCTION-II

With CONSULT

Check “BRAKE SW2” indication in “DATA MONITOR” mode.

Monitor item	Condition		Indication
BRAKE SW2	Brake pedal	Slightly depressed	ON
		Fully released	OFF

Without CONSULT

cardiagn.com

Check the voltage between ECM harness connectors.

ECM			Condition		Voltage
Connector	+	–			
	Terminal	Terminal			
E19	139 (Stop lamp switch signal)	152	Brake pedal	Slightly depressed	Battery voltage
				Fully released	Approx. 0 V

Is the inspection result normal?

YES >> GO TO 11.
NO >> GO TO 7.

3. CHECK BRAKE PEDAL POSITION SWITCH POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect brake pedal position switch harness connector.
3. Turn ignition switch ON.
4. Check the voltage between brake pedal position switch harness connector and ground.

Brake pedal position switch		Ground	Voltage
Connector	Terminal		
E109	1	Ground	Battery voltage

Is the inspection result normal?

YES >> GO TO 5.
NO >> GO TO 4.

4. DETECT MALFUNCTIONING PART

Check the following.
- Fuse block (J/B) connector E100
- 10 A fuse (No. 3)
- Harness for open or short between brake pedal position switch and fuse

>> Repair open circuit, short to ground or short to power in harness or connectors.

5. CHECK BRAKE PEDAL POSITION SWITCH INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between brake pedal position switch harness connector and ECM harness connector.

Brake pedal position switch		ECM		Continuity
Connector	Terminal	Connector	Terminal	
E109	2	E19	140	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

6. CHECK BRAKE PEDAL POSITION SWITCH

Refer to EC-417, "Component Inspection (Brake Pedal Position Switch)".

Is the inspection result normal?

YES >> GO TO 9.
NO >> Replace brake pedal position switch. Refer to BR-20, "Exploded View".

cardiagn.com

7. CHECK STOP LAMP SWITCH POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect stop lamp switch harness connector.
3. Check the voltage between stop lamp switch harness connector and ground.

Stop lamp switch		Ground	Voltage
Connector	Terminal		
E126	1	Ground	Battery voltage

Is the inspection result normal?

YES >> GO TO 9.
NO >> GO TO 8.

8. DETECT MALFUNCTIONING PART

Check the following.
- Fuse block (J/B) connector E100
- 10 A fuse (No. 7)
- Harness for open or short between stop lamp switch and battery

>> Repair open circuit, short to ground or short to power in harness or connectors.

9. CHECK STOP LAMP SWITCH INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect stop lamp switch harness connector.
3. Check the continuity between stop lamp switch harness connector and ECM harness connector.

ECM		Stop lamp switch		Continuity
Connector	Terminal	Connector	Terminal	
E19	139	E126	2	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 10.
NO >> Repair open circuit or short to ground or short to power in harness or connectors.

10. CHECK STOP LAMP SWITCH

Refer to EC-418, "Component Inspection (Stop Lamp Switch)".

Is the inspection result normal?

YES >> GO TO 11.
NO >> Replace stop lamp switch.

11. CHECK INTERMITTENT INCIDENT

Refer to GI-41, "Intermittent Incident".

>> INSPECTION END

Component Inspection (Brake Pedal Position Switch)

INFOID:0000000012406577

1. CHECK BRAKE PEDAL POSITION SWITCH-I

1. Turn ignition switch OFF.
2. Disconnect brake pedal position switch harness connector.
3. Check the continuity between brake pedal position switch terminals under the following conditions.

cardiagn.com

Terminals	Condition		Continuity
1 and 2	Brake pedal	Fully released	Existed
		Slightly depressed	Not existed

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 2.

2.CHECK BRAKE PEDAL POSITION SWITCH-II

1. Adjust brake pedal position switch installation. Refer to BR-9, "Inspection and Adjustment".
2. Check the continuity between brake pedal position switch terminals under the following conditions.

Terminals	Condition		Continuity
1 and 2	Brake pedal	Fully released	Existed
		Slightly depressed	Not existed

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace brake pedal position switch. Refer to BR-20, "Exploded View".

Component Inspection (Stop Lamp Switch)

INFOID:0000000012406578

1.CHECK STOP LAMP SWITCH-I

1. Turn ignition switch OFF.
2. Disconnect stop lamp switch harness connector.
3. Check harness continuity between stop lamp switch terminals under the following conditions.

Terminals	Condition		Continuity
1 and 2	Brake pedal	Fully released	Not existed
		Slightly depressed	Existed

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 2.

2.CHECK STOP LAMP SWITCH-II

1. Adjust stop lamp switch installation. Refer to BR-9, "Inspection and Adjustment".
2. Check harness continuity between stop lamp switch terminals under the following conditions.

Terminals	Condition		Continuity
1 and 2	Brake pedal	Fully released	Not existed
		Slightly depressed	Existed

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace stop lamp switch. Refer to BR-20, "Exploded View".

cardiagn.com

P1574 ASCD VEHICLE SPEED SENSOR

Description

INFOID:0000000012406580

The ECM receives two vehicle speed signals via CAN communication line. One is sent from combination meter, and the other is from TCM (Transmission control module). The ECM uses these signals for ASCD control. Refer to EC-46, "AUTOMATIC SPEED CONTROL DEVICE (ASCD) : System Description" for ASCD functions.

DTC Logic

INFOID:0000000012406581

DTC DETECTION LOGIC

NOTE:

- **If DTC P1574 is displayed with DTC UXXXX, first perform the trouble diagnosis for DTC UXXXX.**
- **If DTC P1574 is displayed with DTC P0500, first perform the trouble diagnosis for DTC P0500. Refer to EC-351, "DTC Logic".**
- **If DTC P1574 is displayed with DTC P0605, first perform the trouble diagnosis for DTC P0605. Refer to EC-374, "DTC Logic".**
- **If DTC P1574 is displayed with DTC P0607, first perform the trouble diagnosis for DTC P0607. Refer to EC-376, "DTC Logic".**

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1574	ASCD vehicle speed sensor	The difference the between two vehicle speed signals is out of the specified range.	• Harness or connectors (The CAN communication line is open or shorted.) • Combination meter • ABS actuator and electric unit (control unit) • Wheel sensor • TCM • ECM

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine (VDC switch OFF).
2. Drive the vehicle at more than 40 km/h (25 MPH).
   CAUTION:
   Always drive vehicle at a safe speed.
   NOTE:
   This procedure may be conducted with the drive wheels lifted in the shop or by driving the vehicle. If a road test is expected to be easier, it is unnecessary to lift the vehicle.
3. Check DTC.

Is DTC detected?

YES >> Proceed to EC-419, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406582

1.CHECK DTC WITH TCM

Check DTC with TCM. Refer to TM-42, "CONSULT Function".

cardiagn.com

Is the inspection result normal?

YES >> GO TO 2.
NO >> Perform trouble shooting relevant to DTC indicated.

2.CHECK DTC WITH ABS ACTUATOR AND ELECTRIC UNIT (CONTROL UNIT)

Check DTC with ABS actuator and electric unit (control unit). Refer to BRC-30, "CONSULT Function".

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair or replace malfunctioning part.

3.CHECK COMBINATION METER FUNCTION

Check combination meter function. Refer to MWI-36, "CONSULT Function".

>> INSPECTION END

cardiagn.com

P1650 STARTER MOTOR RELAY 2

Description

INFOID:0000000012406583

ECM controls ON/OFF state of the starter relay, according to the engine and vehicle condition. Models with no Intelligent Key System transmit a control signal directly to IPDM E/R. On the other hand, models with the Intelligent Key System transmit a control signal to IPDM E/R by way of BCM via CAN communication.
Under normal conditions, ECM controls and maintains the starter relay in OFF state during engine running or “D” position.
When detecting a decrease in engine speed due to rapid deceleration or heavy load condition, ECM controls and reactivates the starter relay.
IPDM E/R detects a control state of starter relay and starter control relay and transmits a feedback signal to ECM via CAN communication.

DTC Logic

INFOID:0000000012406584

DTC DETECTION LOGIC

NOTE:
- If DTC P1650 is displayed with DTC U1001, perform the trouble diagnosis for DTC U1001. Refer to EC-180, "DTC Logic".
- If DTC P1650 is displayed with DTC P0607, perform the trouble diagnosis for DTC P0607. Refer to EC-374, "DTC Logic".
- If DTC P1650 is displayed with B209F or B20A0 of IPDM E/R, perform the trouble diagnosis for B209F or B20A0. Refer to SEC-109, "DTC Logic" or SEC-111, "DTC Logic".
- If DTC P1650 is displayed with B26F9 or B26FA of BCM, perform the trouble diagnosis for B209F or B20A0. Refer to SEC-109, "DTC Logic" or SEC-111, "DTC Logic".

DTC No.	Trouble diagnosis name (Trouble diagnosis content)	DTC detecting condition		Possible cause
P1650	STR MTR RELAY 2 (Starter relay circuit)	A	Starter relay is stuck ON.	• Harness and connectors (Between IPDM E/R harness connector and ECM harness connector is shorted to ground.) (Between IPDM E/R harness connector and BCM harness connector is shorted to ground.) • IPDM E/R
		B	Starter relay power supply circuit is excessively high voltage.	• Harness and connectors (Between IPDM E/R harness connector and ECM harness is open or shorted to power.) (Between IPDM E/R harness connector and BCM harness is open or shorted to power.) (Between IPDM E/R harness connector and battery is open.) • IPDM E/R
		C	Starter relay circuit is excessively low voltage	• Harness and connectors (Starter relay circuit is open or shorted.) • IPDM E/R

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

NOTE:
Before performing the following procedure, confirm that battery voltage is 12 V or more with ignition switch ON.

>> GO TO 2.

cardiagn.com

2.PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION A AND C

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.
4. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-422, "Diagnosis Procedure".
NO >> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION B

With CONSULT

CAUTION:

Always drive at a safe speed.

1. Start the engine.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Start the engine and warm it up to normal operating temperature.
5. Turn ignition switch OFF.
6. Lift up drive wheels.
7. Turn ignition switch ON.
8. Select “POWER BALANCE” in “ACTIVE TEST” mode of “ENGINE” using CONSULT.
9. Restart the engine and let it idle at least 10 seconds.
10. Shift the selector lever to D position while depressing fully the brake pedal.
11. Select 1 - 4 cylinders in “POWER BALANCE” and cut the fuel of all cylinders.
12. Check 1st trip DTC.

Without CONSULT

CAUTION:

Always drive at a safe speed.

1. Start the engine.
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Start the engine and warm it up to normal operating temperature.
5. Turn ignition switch OFF.
6. Lift up drive wheels.
7. Restart the engine and let it idle at least 10 seconds.
8. Shift the selector lever to D position while depressing fully the brake pedal.
9. Remove vacuum hoses from intake manifold. Refer to EM-29, "Exploded View".
10. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-422, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406585

1.CHECK STARTER RELAY POWER SUPPLY CIRCUIT

Check the starter motor relay power supply circuit. Refer to PCS-33, "Diagnosis Procedure".

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair or replace error-detected parts.

2.CHECK STARTER RELAY CONTROL SIGNAL CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Disconnect BCM harness connector.
4. Check the continuity between IPDM E/R harness connector and BCM harness connector.

cardiagn.com

+		–		Continuity
IPDM E/R		BCM		
Connector	Terminal	Connector	Terminal	
E13	30	M69	64	Existed

Refer to SEC-39, "Wiring Diagram".

5. Also check harness for short to ground to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair or replace error-detected parts.

3.CHECK INTERMITTENT INCIDENT

Perform GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace IPDM E/R. Refer to PCS-34, "Removal and Installation".
NO >> Repair or replace error-detected parts.

cardiagn.com

P1651 STARTER MOTOR RELAY

Description

INFOID:0000000012406586

ECM controls ON/OFF state of the starter relay, according to the engine and vehicle condition. Models with no Intelligent Key System transmit a control signal directly to IPDM E/R. On the other hand, models with the Intelligent Key System transmit a control signal to IPDM E/R by way of BCM via CAN communication.
Under normal conditions, ECM controls and maintains the starter relay in OFF state during engine running or “D” position.
When detecting a decrease in engine speed due to rapid deceleration or heavy load condition, ECM controls and reactivates the starter relay.
IPDM E/R detects a control state of starter relay and starter control relay and transmits a feedback signal to ECM via CAN communication.

DTC Logic

INFOID:0000000012406587

DTC DETECTION LOGIC

NOTE:
- If DTC P1651 is displayed with DTC U1001, perform the trouble diagnosis for DTC U1001. Refer to EC-180, "DTC Logic".
- If DTC P1651 is displayed with DTC P0607, perform the trouble diagnosis for DTC P0607. Refer to EC-376, "DTC Logic".
- If DTC P1651 is displayed with B209F or B20A0 of IPDM E/R, perform the trouble diagnosis for B209F or B20A0. Refer to SEC-109, "DTC Logic" or SEC-111, "DTC Logic".
- If DTC P1651 is displayed with B26F9 or B26FA of BCM, perform the trouble diagnosis for B209F or B20A0. Refer to SEC-109, "DTC Logic" or SEC-111, "DTC Logic".

DTC No.	Trouble diagnosis name (Trouble diagnosis content)	DTC detecting condition	
P1651	STR MTR RELAY (Starter control relay circuit)	A correlated error is detected for 2 seconds or more between a control signal transmitted from ECM and a feedback signal transmitted from IPDM E/R via CAN communication line.	• Harness or connectors (Between ECM harness connector and IPDM E/R harness connector is shorted to power.) (Between ECM harness connector and BCM harness connector is shorted to power.) • IPDM E/R • BCM

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

NOTE:
Before performing the following procedure, confirm that battery voltage is 12 V or more with ignition switch ON.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Start the engine and let it idle at least 30 seconds.
3. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-425, "Diagnosis Procedure".
NO >> INSPECTION END

cardiagn.com

Diagnosis Procedure

INFOID:0000000012406588

1. INSPECTION START

Check the starter motor operation.

Is the starter motor operated?

YES >> GO TO 3.
NO >> GO TO 2.

2. CHECK DTC WITH IPDM E/R

Check DTC with IPDM E/R. Refer to PCS-12, "CONSULT Function (IPDM E/R)".

Is the inspection result normal?

YES >> GO TO 3.
NO >> Perform trouble diagnosis for DTC indicated.

3. CHECK DTC WITH BCM

Check DTC with BCM. Refer to BCS-34, "BCM : CONSULT Function (BCM - BCM)".

Is the inspection result normal?

YES >> GO TO 4.
NO >> Perform trouble diagnosis for DTC indicated.

4. CHECK CRANKING REQUEST SIGNAL CIRCUIT-I

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Disconnect IPDM E/R harness connector.
4. Check the continuity between ECM harness connector and IPDM E/R harness connector.

+		–		Continuity
ECM		IPDM E/R		
Connector	Terminal	Connector	Terminal	
F15	101	F12	71	Existed

5. Also check harness for short to ground to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair or replace error-detected parts.

5. CHECK CRANKING REQUEST SIGNAL CIRCUIT-II

1. Disconnect BCM harness connector.
2. Check the continuity between ECM harness connector and BCM harness connector.

+		–		Continuity
ECM		BCM		
Connector	Terminal	Connector	Terminal	
F15	101	M123	64	Existed

Refer to SEC-39, "Wiring Diagram".

3. Also check harness for short to ground to power.

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair or replace error-detected parts.

6. CHECK INTERMITTENT INCIDENT

Perform GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace IPDM E/R. Refer to PCS-34, "Removal and Installation".

cardiagn.com

NO >> Repair or replace error-detected parts.

cardiagn.com

P1652 STARTER MOTOR SYSTEM COMM

Description

INFOID:0000000012406589

ECM controls ON/OFF state of the starter relay, according to the engine and vehicle condition. Models with no Intelligent Key System transmit a control signal directly to IPDM E/R. On the other hand, models with the Intelligent Key System transmit a control signal to IPDM E/R by way of BCM via CAN communication.
Under normal conditions, ECM controls and maintains the starter relay in OFF state during engine running or “D” position.
When detecting a decrease in engine speed due to rapid deceleration or heavy load condition, ECM controls and reactivates the starter relay.
IPDM E/R detects a control state of starter relay and starter control relay and transmits a feedback signal to ECM via CAN communication.

DTC Logic

INFOID:0000000012406590

DTC DETECTION LOGIC

NOTE:

- If DTC P1652 is displayed with DTC U1001, perform the trouble diagnosis for DTC U1001. Refer to EC-180, "DTC Logic".
- If DTC P1652 is displayed with DTC P0607, perform the trouble diagnosis for DTC P0607. Refer to EC-376, "DTC Logic".
- If DTC P1652 is displayed with B209F or B20A0 of IPDM E/R, perform the trouble diagnosis for B209F or B20A0. Refer to SEC-109, "DTC Logic" or SEC-111, "DTC Logic".
- If DTC P1652 is displayed with B26F9 or B26FA of BCM, perform the trouble diagnosis for B209F or B20A0. Refer to SEC-109, "DTC Logic" or SEC-111, "DTC Logic".

DTC No.	Trouble diagnosis name (Trouble diagnosis content)	DTC detecting condition	
P1652	STR MTR SYS COMM (Starter motor communication line)	ECM detects malfunction in starter motor drive circuit of the IPDM E/R.	IPDM E/R

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following procedure before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON and wait at least 5 minutes.
3. Check DTC.

Is DTC detected?

YES >> Proceed to EC-427, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406591

1.INSPECTION START

1. Erase DTC.
2. Perform DTC confirmation procedure. Refer to EC-427, "DTC Logic".
3. Check DTC.

Is the P1652 displayed again?

YES >> GO TO 2.

cardiagn.com

NO >> INSPECTION END

2.CHECK INTERMITTENT INCIDENT

Perform GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace IPDM E/R. Refer to PCS-34, "Removal and Installation".
NG >> Repair or replace error-detected parts.

cardiagn.com

P1700 CVT CONTROL SYSTEM

Description

INFOID:0000000012406592

This DTC is displayed with other DTC regarding TCM. Perform the trouble diagnosis for corresponding DTC. Refer to EC-103, "DTC Index". When this DTC is detected, the ASCD control is canceled.

cardiagn.com

P1715 INPUT SPEED SENSOR (PRIMARY SPEED SENSOR)

Description

INFOID:0000000012406593

ECM receives input speed sensor signal from TCM via the CAN communication line. ECM uses this signal for engine control.

DTC Logic

INFOID:0000000012406594

DTC DETECTION LOGIC

NOTE:

- **If DTC P1715 is displayed with DTC UXXXX first perform the trouble diagnosis for DTC UXXXX.**
- **If DTC P1715 is displayed with DTC P0335, first perform the trouble diagnosis for DTC P0335. Refer to EC-298, "DTC Logic".**
- **If DTC P1715 is displayed with DTC P0340, P0345, first perform the trouble diagnosis for DTC P0340, P0345. Refer to EC-301, "DTC Logic".**
- **If DTC P1715 is displayed with DTC P0605, first perform the trouble diagnosis for DTC P0605. Refer to EC-374, "DTC Logic".**
- **If DTC P1715 is displayed with DTC P0607, first perform the trouble diagnosis for DTC P0607. Refer to EC-376, "DTC Logic".**

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1715	Input speed sensor (TCM output)	Input speed sensor signal is different from the theoretical value calculated by ECM from output speed sensor signal and engine rpm signal.	• Harness or connectors (The CAN communication line is open or shorted) • Harness or connectors (Input speed sensor circuit is open or shorted) • TCM

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine.
2. Drive vehicle at a speed of more than 50 km/h (31 MPH) for at least 5 seconds.
3. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-430, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406595

1.CHECK DTC WITH TCM

Check DTC with TCM. Refer to TM-59, "DTC Index".

Is the inspection result normal?

YES >> Replace TCM. Refer to TM-192, "Exploded View".
NO >> Perform trouble shooting relevant to DTC indicated.

cardiagn.com

P1800 VIAS CONTROL SOLENOID VALVE 1

DTC Logic

INFOID:0000000012406596

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1800	VIAS control solenoid valve 1 circuit	An excessively low or high voltage signal is sent to ECM through the VIAS control solenoid valve 1.	• Harness or connectors (The solenoid valve 1 circuit is open or shorted.) • VIAS control solenoid valve 1

DTC CONFIRMATION PROCEDURE

1.CONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm battery voltage is more than 11 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for at least 5 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-431, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406597

1.CHECK VIAS CONTROL SOLENOID VALVE 1 POWER SUPPLY

1. Turn ignition switch OFF.
2. Disconnect VIAS control solenoid valve 1 harness connector.
3. Turn ignition switch ON.
4. Check the voltage between VIAS control solenoid valve 1 harness connector and ground.

VIAS control solenoid valve 1		Ground	Voltage
Connector	Terminal		
F74	1	Ground	Battery voltage

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

2.CHECK VIAS CONTROL SOLENOID VALVE 1 OUTPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between VIAS control solenoid valve 1 harness connector and ECM harness connector.

VIAS control solenoid valve 1		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F74	2	F15	108	Existed

cardiagn.com

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

3. CHECK VIAS CONTROL SOLENOID VALVE 1

Check VIAS control solenoid valve 1. Refer to EC-432, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace VIAS control solenoid valve 1. Refer to EM-29, "Exploded View".

Component Inspection


INFOID:0000000012406598

1. CHECK VIAS CONTROL SOLENOID VALVE 1

With CONSULT

1. Turn ignition switch OFF.
2. Reconnect all harness connectors disconnected.
3. Disconnect vacuum hoses connected to VIAS control solenoid valve 1.
4. Turn ignition switch ON.
5. Select “VIAS S/V-1” in “ACTIVE TEST” mode with CONSULT.
6. Check air passage continuity and operation delay time under the following conditions.

Condition (VIAS S/V-1)	Air passage continuity between (A) and (B)	Air passage continuity between (A) and (C)
ON	Existed	Not existed
OFF	Not existed	Existed

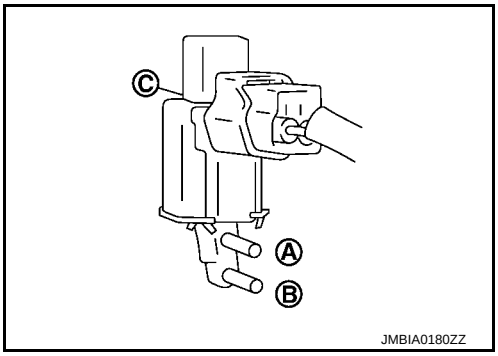


JMBIA0180ZZ

Without CONSULT

1. Turn ignition switch OFF.
2. Disconnect VIAS control solenoid valve 1 harness connector.
3. Disconnect vacuum hoses connected to VIAS volume control solenoid valve 1.
4. Check air passage continuity and operation delay time under the following conditions.

Condition	Air passage continuity between (A) and (B)	Air passage continuity between (A) and (C)
12 V direct current supply between terminals 1 and 2	Existed	Not existed
No supply	Not existed	Existed

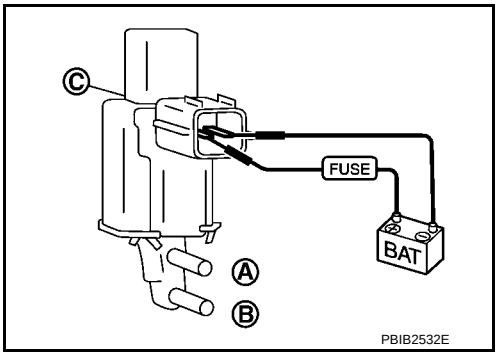

PBIB2532E

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace VIAS control solenoid valve 1. Refer to EM-29, "Exploded View".

cardiagn.com

P1801 VIAS CONTROL SOLENOID VALVE 2

DTC Logic

INFOID:0000000012406599

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1801	VIAS control solenoid valve 2 circuit	An excessively low or high voltage signal is sent to ECM through the VIAS control solenoid valve 2.	• Harness or connectors (The solenoid valve 2 circuit is open or shorted.) • VIAS control solenoid valve 2

DTC CONFIRMATION PROCEDURE

1.CONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm battery voltage is more than 11 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for at least 5 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-433, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406600

1.CHECK VIAS CONTROL SOLENOID VALVE 2 POWER SUPPLY

1. Turn ignition switch OFF.
2. Disconnect VIAS control solenoid valve 2 harness connector.
3. Turn ignition switch ON.
4. Check the voltage between VIAS control solenoid valve 2 harness connector and ground.

VIAS control solenoid valve 2		Ground	Voltage
Connector	Terminal		
F75	1	Ground	Battery voltage

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

2.CHECK VIAS CONTROL SOLENOID VALVE 2 OUTPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between VIAS control solenoid valve 2 harness connector and ECM harness connector.

VIAS control solenoid valve 2		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F75	2	F15	102	Existed

cardiagn.com

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

3. CHECK VIAS CONTROL SOLENOID VALVE 2

Check VIAS control solenoid valve 2. Refer to EC-434, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace VIAS control solenoid valve 2. Refer to EM-29, "Exploded View".

Component Inspection


INFOID:0000000012406601

1. CHECK VIAS CONTROL SOLENOID VALVE 2

With CONSULT

1. Turn ignition switch OFF.
2. Reconnect all harness connectors disconnected.
3. Disconnect vacuum hoses connected to VIAS control solenoid valve 2.
4. Turn ignition switch ON.
5. Select “VIAS S/V-2” in “ACTIVE TEST” mode with CONSULT.
6. Check air passage continuity and operation delay time under the following conditions.

Condition (VIAS S/V-2)	Air passage continuity between (A) and (B)	Air passage continuity between (A) and (C)
ON	Existed	Not existed
OFF	Not existed	Existed

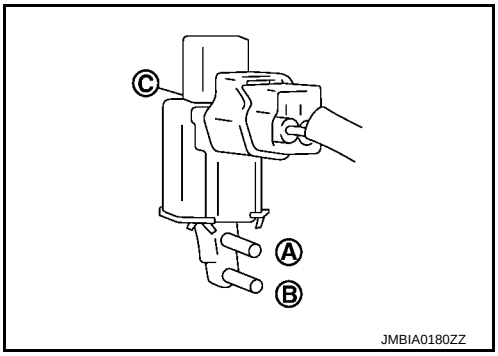


JMBIA0180ZZ

Without CONSULT

1. Turn ignition switch OFF.
2. Disconnect VIAS control solenoid valve 2 harness connector.
3. Disconnect vacuum hoses connected to VIAS volume control solenoid valve 2.
4. Check air passage continuity and operation delay time under the following conditions.

Condition	Air passage continuity between (A) and (B)	Air passage continuity between (A) and (C)
12 V direct current supply between terminals 1 and 2	Existed	Not existed
No supply	Not existed	Existed

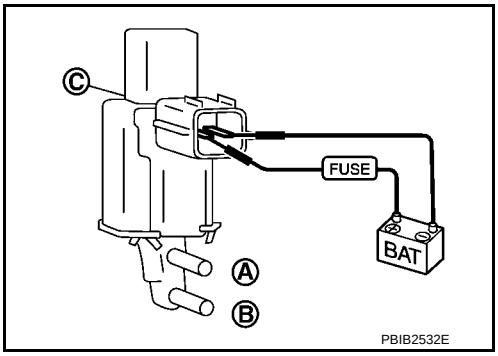

PBIB2532E

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace VIAS control solenoid valve 2. Refer to EM-29, "Exploded View".

cardiagn.com

P1805 BRAKE SWITCH

Description

INFOID:0000000012406602

Brake switch signal is applied to the ECM via the stop lamp switch when the brake pedal is depressed. This signal is used mainly to decrease the engine speed when the vehicle is driven.

DTC Logic

INFOID:0000000012406603

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P1805	Brake switch	A brake switch signal is not sent to ECM for extremely long time while the vehicle is driving.	• Harness or connectors (Stop lamp switch circuit is open or shorted.) • Stop lamp switch

DTC CONFIRMATION PROCEDURE

1.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON.
2. Fully depress the brake pedal for at least 5 seconds.
3. Erase the DTC with CONSULT.
4. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Go to EC-435, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406604

1.CHECK STOP LAMP SWITCH CIRCUIT

1. Turn ignition switch OFF.
2. Check the stop lamp when depressing and releasing the brake pedal.

Brake pedal	Stop lamp
Fully released	Not illuminated
Slightly depressed	Illuminated

Is the inspection result normal?

YES >> GO TO 6.
NO >> GO TO 2.

2.CHECK STOP LAMP SWITCH POWER SUPPLY CIRCUIT

1. Disconnect stop lamp switch harness connector.
2. Check the voltage between stop lamp switch harness connector and ground.

Stop lamp switch		Ground	Voltage
Connector	Terminal		
E126	1	Ground	Battery voltage

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 3.

3.DETECT MALFUNCTIONING PART

Check the following.
- Fuse block (J/B) connector E100
- 10 A fuse (No. 7)

cardiagn.com

• Harness for open or short between battery and stop lamp switch

>> Repair open circuit, short to ground or short to power in harness or connectors.

4. CHECK STOP LAMP SWITCH INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect stop lamp switch harness connector.
3. Check the continuity between stop lamp switch harness connector and ECM harness connector.

ECM		Stop lamp switch		Continuity
Connector	Terminal	Connector	Terminal	
E19	139	E126	2	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit or short to ground or short to power in harness or connectors.

5. CHECK STOP LAMP SWITCH

Refer to EC-436, "Component Inspection (Stop Lamp Switch)".

Is the inspection result normal?

YES >> GO TO 6.
NO >> Replace stop lamp switch.

6. CHECK INTERMITTENT INCIDENT

Refer to GI-41, "Intermittent Incident".

>> INSPECTION END

Component Inspection (Stop Lamp Switch)

INFOID:0000000012406605

1. CHECK STOP LAMP SWITCH-I

1. Turn ignition switch OFF.
2. Disconnect stop lamp switch harness connector.
3. Check harness continuity between stop lamp switch terminals under the following conditions.

Terminals	Condition		Continuity
1 and 2	Brake pedal	Fully released	Not existed
		Slightly depressed	Existed

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 2.

2. CHECK STOP LAMP SWITCH-II

1. Adjust stop lamp switch installation. Refer to BR-9, "Inspection and Adjustment".
2. Check harness continuity between stop lamp switch terminals under the following conditions.

Terminals	Condition		Continuity
1 and 2	Brake pedal	Fully released	Not existed
		Slightly depressed	Existed

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace stop lamp switch. Refer to BR-20, "Exploded View".

cardiagn.com

P2096, P2097, P2098, P2099 A/F SENSOR 1

DTC Logic

INFOID:0000000012406607

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name (Trouble diagnosis content)	DTC detecting condition	Possible Cause
P2096	POST CAT FUEL TRIM SYS B1 (Post catalyst fuel trim system too lean bank 1)	The output voltage computed by ECM from the A/F sensor 1 signal is shifts to the lean side for a specified period.	• A/F sensor 1 (bank 1) • A/F sensor 1 heater • Heated oxygen sensor 2 (bank 1) • Fuel pressure • Fuel injector • Intake air leaks • Exhaust gas leaks
P2097	POST CAT FUEL TRIM SYS B1 (Post catalyst fuel trim system too rich bank 1)	The A/F signal computed by ECM from the A/F sensor 1 signal is shifts to the rich side for a specified period.	
P2098	POST CAT FUEL TRIM SYS B2 (Post catalyst fuel trim system too lean bank 2)	The output voltage computed by ECM from the A/F sensor 1 signal is shifts to the lean side for a specified period.	• A/F sensor 1 (bank 2) • A/F sensor 1 heater • Heated oxygen sensor 2 (bank 2) • Fuel pressure • Fuel injector • Intake air leaks • Exhaust gas leaks
P2099	POST CAT FUEL TRIM SYS B2 (Post catalyst fuel trim system too rich bank 2)	The A/F signal computed by ECM from the A/F sensor 1 signal is shifts to the rich side for a specified period.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 11 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Clear the mixture ratio self-learning value. Refer to EC-151, "Description".
2. Turn ignition switch OFF and wait at least 10 seconds.
3. Turn ignition switch ON.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Start engine and keep the engine speed between 3,500 and 4,000 rpm for 1 minute under no load.
6. Let engine idle for 1 minute.
7. Keep engine speed between 2,500 and 3,000 rpm for 20 minutes.
8. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-437, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406608

1.RETIGHTEN A/F SENSOR 1 AND HEATED OXYGEN SENSOR 2

Loosen and retighten the A/F sensor 1 and heated oxygen senosr 2. Refer to EM-34, "Exploded View".

>> GO TO 2.

2.CHECK FOR EXHAUST GAS LEAK

cardiagn.com

1. Start engine and run it at idle.
2. Listen for an exhaust gas leak before the three way catalyst 2.

Is exhaust gas leak detected?

YES >> Repair or replace.
NO >> GO TO 3.

3. CHECK FOR INTAKE AIR LEAKAGE

1. Start engine and run it at idle.
2. Listen for an intake air leakage after the mass air flow sensor.

Is intake air leakage detected?

YES >> GO TO 4.
NO >> Repair or replace malfunctioning part.

4. CLEAR THE MIXTURE RATIO SELF-LEARNING VALUE

1. Clear the mixture ratio self-learning value. Refer to EC-151, "Description".
2. Run engine for at least 10 minutes at idle speed.

Is the 1st trip DTC P0171, P0172, P0174 or P0175 detected? Is it difficult to start engine?

YES >> Perform trouble diagnosis for DTC P0171, P0174 or P0172, P0175. Refer to EC-267, "DTC Logic" or EC-271, "DTC Logic".
NO >> GO TO 5.

5. CHECK HARNESS CONNECTOR

1. Turn ignition switch OFF.
2. Disconnect A/F sensor 1 harness connector.
3. Check harness connector for water.

Water should not exit.

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair or replace harness connector.

6. CHECK AIR FUEL RATIO (A/F) SENSOR 1 POWER SUPPLY

1. Disconnect A/F sensor 1 harness connector.
2. Turn ignition switch ON.
3. Check the voltage between A/F sensor 1 harness connector and ground.

DTC	A/F sensor			Ground	Voltage (V)
	Bank	Connector	Terminal		
P2096 P2097	1	F28	1	Ground	Battery voltage
P2098 P2099	2	F65	1		

Is the inspection result normal?

YES >> GO TO 8.
NO >> GO TO 7.

7. CHECK AIR FUEL RATIO (A/F) SENSOR 1 POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Check the continuity between A/F sensor 1 harness connector and IPDM E/R harness connector.

cardiagn.com

DTC	A/F sensor 1			IPDM E/R		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P2096 P2097	1	F28	1	F12	57	Existed
P2098 P2099	2	F65	1			

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

8. CHECK A/F SENSOR 1 INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between A/F sensor 1 harness connector and ECM harness connector.

DTC	A/F sensor 1			ECM		Continuity
	Bank	Connector	Terminal	Connector	Terminal	
P2096 P2097	1	F28	3	F15	66	Existed
			4		67	
P2098 P2099	2	F65	3		76	
			4		77	

4. Check the continuity between A/F sensor 1 harness connector and ground, or ECM harness connector and ground.

DTC	A/F sensor 1			Ground	Continuity
	Bank	Connector	Terminal		
P2096 P2097	1	F28	3	Ground	Not existed
			4		
P2098 P2099	2	F65	3		
			4		

DTC	ECM		Ground	Continuity
	Connector	Terminal		
P2096 P2097	F15	66	Ground	Not existed
		67		
P2098 P2099		76		
		77		

5. Also check harness for short to power.

Is the inspection result normal?

YES >> GO TO 9.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

9. CHECK A/F SENSOR 1 HEATER

Check A/F sensor 1 heater. Refer to EC-191, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 10.
NO >> GO TO 12.

10. CHECK HEATED OXYGEN SENSOR 2

Check heated oxygen sensor 2. Refer to EC-194, "Component Inspection".

cardiagn.com

Is the inspection result normal?

YES >> GO TO 11.
NO >> Replace malfunctioning heated oxygen sensor 2.

11. CHECK INTERMITTENT INCIDENT

Perform GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> GO TO 12.
NO >> Repair or replace malfunctioning part.

12. REPLACE AIR FUEL RATIO (A/F) SENSOR 1

Replace malfunctioning air fuel ratio (A/F) sensor 1. Refer to EM-34, "Exploded View".

CAUTION:

- **Discard any A/F sensor which has been dropped from a height of more than 0.5 m (19.7 in) onto a hard surface such as a concrete floor; use a new one.**
- **Before installing new A/F sensor, clean exhaust system threads using Oxygen Sensor Thread Cleaner [commercial service tool (J-43897-18 or J-43897-12)] and approved anti-seize lubricant (commercial service tool).**

Do you have CONSULT?

YES >> GO TO 13.
NO >> GO TO 14.

13. CONFIRM A/F ADJUSTMENT DATA

With CONSULT

1. Turn ignition switch ON.
2. Select “A/F ADJ-B1” and “A/F ADJ-B2” in “DATA MONITOR” mode with CONSULT.
3. Make sure that “0.000” is displayed on CONSULT screen.

Is "0.000" displayed?

YES >> INSPECTION END
NO >> GO TO 14.

14. CLEAR THE MIXTURE RATIO SELF-LEARNING VALUE

Clear the mixture ratio self-learning value. Refer to EC-151, "Description".

Do you have CONSULT?

YES >> GO TO 15.
NO >> INSPECTION END

15. CONFIRM A/F ADJUSTMENT DATA

With CONSULT

1. Turn ignition switch ON.
2. Select “A/F ADJ-B1” and “A/F ADJ-B2” in “DATA MONITOR” mode with CONSULT.
3. Make sure that “0.000” is displayed on CONSULT screen.

>> INSPECTION END

cardiagn.com

P2100, P2103 THROTTLE CONTROL MOTOR RELAY

DTC Logic

INFOID:0000000012406609

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P2100	Throttle control motor relay circuit open	ECM detects that the voltage of power source for throttle control motor is excessively low.	• Harness or connectors (Throttle control motor relay circuit is open) • Throttle control motor relay
P2103	Throttle control motor relay circuit short	ECM detects that the throttle control motor relay is stuck ON.	• Harness or connectors (Throttle control motor relay circuit is shorted) • Throttle control motor relay

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:

Before performing the following procedure, confirm that battery voltage is more than 8 V.

Witch DTC is detected?

P2100 >> GO TO 2.
P2103 >> GO TO 3.

2.PERFORM DTC CONFIRMATION PROCEDURE FOR DTC P2100

1. Turn ignition switch ON and wait at least 2 seconds.
2. Start engine and let it idle for 5 seconds.
3. Check DTC.

Is DTC detected?

YES >> Proceed to EC-441, "Diagnosis Procedure".
NO >> INSPECTION END

3.PERFORM DTC CONFIRMATION PROCEDURE FOR DTC P2103

1. Turn ignition switch ON and wait at least 1 second.
2. Check DTC.

Is DTC detected?

YES >> Proceed to EC-441, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406610

1.CHECK THROTTLE CONTROL MOTOR RELAY POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Disconnect IPDM E/R harness connector.
4. Check the continuity between IPDM E/R harness connector and ECM harness connector.

IPDM E/R		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F12	70	F14	8	Existed

cardiagn.com

5. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

2. CHECK THROTTLE CONTROL MOTOR RELAY INPUT SIGNAL CIRCUIT

1. Check the continuity between IPDM E/R harness connector and ECM harness connector.

IPDM E/R		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F12	54	F14	2	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

cardiagn.com

P2101 ELECTRIC THROTTLE CONTROL FUNCTION

DTC Logic

INFOID:0000000012406611

DTC DETECTION LOGIC

NOTE:
If DTC P2101 is displayed with DTC P2100, first perform the trouble diagnosis for DTC P2100. Refer to EC-441, "DTC Logic".
If DTC P2101 is displayed with DTC 2119, first perform the trouble diagnosis for DTC P2119. Refer to EC-448, "DTC Logic".

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P2101	Electric throttle control performance	Electric throttle control function does not operate properly.	• Harness or connectors (Throttle control motor circuit is open or shorted) • Electric throttle control actuator

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is more than 11 V when engine is running.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON and wait at least 2 seconds.
2. Start engine and let it idle for 5 seconds.
3. Check DTC.

Is DTC detected?

YES >> Proceed to EC-443, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406612

1.CHECK THROTTLE CONTROL MOTOR RELAY INPUT SIGNAL

1. Check the voltage between ECM harness connector terminals.

ECM				Condition	Voltage
+		–			
Connector	Terminal	Condition	Terminal		
F14	2	E19	152	Ignition switch OFF	Approx. 0 V
				Ignition switch ON	Battery voltage

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 2.

2.CHECK THROTTLE CONTROL MOTOR RELAY POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.

cardiagn.com

3. Disconnect IPDM E/R harness connector.
4. Check the continuity between IPDM E/R harness connector and ECM harness connector.

IPDM E/R		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F12	70	F14	8	Existed

5. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

3.CHECK THROTTLE CONTROL MOTOR RELAY INPUT SIGNAL CIRCUIT

1. Check the continuity between IPDM E/R harness connector and ECM harness connector.

IPDM E/R		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F12	54	F14	2	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK THROTTLE CONTROL MOTOR OUTPUT SIGNAL CIRCUIT FOR OPEN OR SHORT

1. Turn ignition switch OFF.
2. Disconnect electric throttle control actuator harness connector.
3. Disconnect ECM harness connector.
4. Check the continuity between electric throttle control actuator harness connector and ECM harness connector.

Electric throttle control actuator		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F50	2	F14	1	Existed
			3	Not existed
	1		1	Not existed
			3	Existed

5. Also check harness for short to ground and short to power.


Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair or replace malfunctioning part.

5.CHECK ELECTRIC THROTTLE CONTROL ACTUATOR VISUALLY

1. Remove the intake air duct. Refer to EM-27, "Exploded View".
2. Check if foreign matter is caught between the throttle valve (1) and the housing.

- Electric throttle control actuator (2)
- ⇦: Vehicle front

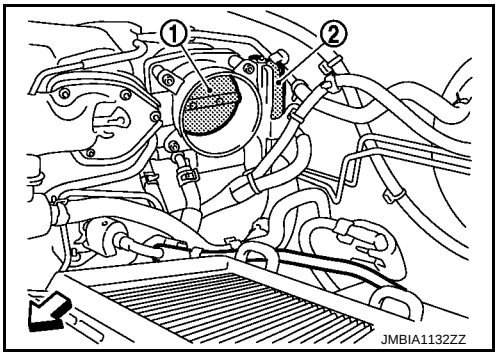

Is the inspection result normal?

YES >> GO TO 6.
NO >> Remove the foreign matter and clean the electric throttle control actuator inside, refer to EM-29, "Exploded View", and then perform throttle valve closed position learning. Refer to EC-148, "Description".

cardiagn.com

6.CHECK THROTTLE CONTROL MOTOR

Check throttle control motor. Refer to EC-445, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 7.
NO >> Replace electric throttle control actuator. Refer to EM-29, "Exploded View".

7.CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace electric throttle control actuator. Refer to EM-29, "Exploded View".
NO >> Repair or replace error-detected parts.

Component Inspection

INFOID:0000000012406613

1.CHECK THROTTLE CONTROL MOTOR

1. Turn ignition switch OFF.
2. Disconnect electric throttle control actuator harness connector.
3. Check resistance between electric throttle control actuator terminals as per the following.

Terminals	Resistance
1 and 2	Approx. 1 - 15 Ω [at 25°C (77°F)]

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace electric throttle control actuator. Refer to EM-29, "Exploded View".

cardiagn.com

P2118 THROTTLE CONTROL MOTOR

DTC Logic

INFOID:0000000012406614

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P2118	Throttle control motor circuit short	ECM detects short in both circuits between ECM and throttle control motor.	• Harness or connectors (Throttle control motor circuit is shorted.) • Electric throttle control actuator (Throttle control motor)

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Turn ignition switch ON and wait at least 2 seconds.
2. Start engine and let it idle for 5 seconds.
3. Check DTC.

Is DTC detected?

YES >> Proceed to EC-446, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406615

1.CHECK THROTTLE CONTROL MOTOR OUTPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Disconnect electric throttle control actuator harness connector.
2. Disconnect ECM harness connector.
3. Check the continuity between electric throttle control actuator harness connector and ECM harness connector.

Electric throttle control actuator		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F50	2	F14	1	Existed
			3	Not existed
	1		1	Not existed
			3	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair or replace malfunctioning part.

2.CHECK THROTTLE CONTROL MOTOR

Check throttle control motor. Refer to EC-447, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace electric throttle control actuator. Refer to EM-29, "Exploded View".

cardiagn.com

Component Inspection

INFOID:0000000012406616

1. CHECK THROTTLE CONTROL MOTOR

1. Turn ignition switch OFF.
2. Disconnect electric throttle control actuator harness connector.
3. Check resistance between electric throttle control actuator terminals as per the following.

Terminals	Resistance
1 and 2	Approx. 1 - 15 Ω [at 25°C (77°F)]

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace electric throttle control actuator. Refer to EM-29, "Exploded View".

cardiagn.com

P2119 ELECTRIC THROTTLE CONTROL ACTUATOR

DTC Logic

INFOID:0000000012406617

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition		Possible cause
P2119	Electric throttle control actuator	A)	Electric throttle control actuator does not function properly due to the return spring malfunction.	• Electric throttle control actuator
		B)	Throttle valve opening angle in fail-safe mode is not in specified range.	
		C)	ECM detects that the throttle valve is stuck open.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION A AND B

1. Turn ignition switch ON and wait at least 1 second.
2. Shift selector lever to the D position and wait at least 3 seconds.
3. Shift selector lever to the P position.
4. Turn ignition switch OFF and wait at least 10 seconds.
5. Turn ignition switch ON and wait at least 1 second.
6. Shift selector lever to the D position and wait at least 3 seconds.
7. Shift selector lever to the P position.
8. Turn ignition switch OFF, wait at least 10 seconds, and then turn ON.
9. Check DTC.

Is DTC detected?

YES >> Proceed to EC-448, "Diagnosis Procedure".
NO >> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE FOR MALFUNCTION C

1. Turn ignition switch ON and wait at least 1 second.
2. Shift selector lever to the D position and wait at least 3 seconds.
3. Shift selector lever to the N or P position.
4. Start engine and let it idle for 3 seconds.
5. Check DTC.

Is DTC detected?

YES >> Proceed to EC-448, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure


INFOID:0000000012406618

1.CHECK ELECTRIC THROTTLE CONTROL ACTUATOR VISUALLY

1. Turn ignition switch OFF.
2. Remove the intake air duct. Refer to EM-27, "Exploded View".

cardiagn.com

3. Check if foreign matter is caught between the throttle valve (1) and the housing.
- Electric throttle control actuator (2)
- ⇦: Vehicle front

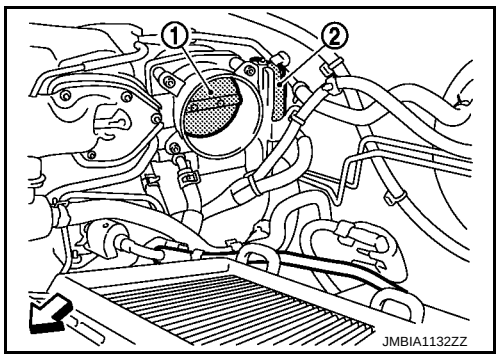

Is the inspection result normal?

YES >> GO TO 2.
NO >> Remove the foreign matter and clean the electric throttle control actuator inside, and then perform throttle valve closed position learning. Refer to EC-148, "Description".

2. REPLACE ELECTRIC THROTTLE CONTROL ACTUATOR

1. Replace electric throttle control actuator. Refer to EM-29, "Exploded View".
2. Go to EC-149, "Description".

>> INSPECTION END

cardiagn.com

P2122, P2123 APP SENSOR

DTC Logic

INFOID:0000000012406619

DTC DETECTION LOGIC

NOTE:
If DTC P2122 or P2123 is displayed with DTC P0643, first perform the trouble diagnosis for DTC P0643. Refer to EC-379, "DTC Logic".

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P2122	Accelerator pedal position sensor 1 circuit low input	An excessively low voltage from the APP sensor 1 is sent to ECM.	• Harness or connectors (APP sensor 1 circuit is open or shorted.) • Accelerator pedal position sensor (APP sensor 1)
P2123	Accelerator pedal position sensor 1 circuit high input	An excessively high voltage from the APP sensor 1 is sent to ECM.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is more than 10 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for 1 second.
2. Check DTC.

Is DTC detected?

YES >> Proceed to EC-450, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406620

1.CHECK APP SENSOR 1 POWER SUPPLY

1. Disconnect accelerator pedal position (APP) sensor harness connector.
2. Turn ignition switch ON.
3. Check the voltage between APP sensor harness connector and ground.

APP sensor		Ground	Voltage (V)
Connector	Terminal		
E110	4	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

2.CHECK APP SENSOR 1 GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between APP sensor harness connector and ECM harness connector.

cardiagn.com

APP sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
E110	2	E19	151	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

3.CHECK APP SENSOR 1 INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between APP sensor harness connector and ECM harness connector.

APP sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
E110	3	E19	150	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK APP SENSOR

Check APP sensor. Refer to EC-451, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace accelerator pedal assembly. Refer to ACC-4, "Exploded View".

Component Inspection

INFOID:0000000012406621

1.CHECK ACCELERATOR PEDAL POSITION SENSOR

1. Reconnect all harness connectors disconnected.
2. Turn ignition switch ON.
3. Check the voltage between ECM harness connector terminals under the following conditions.

ECM				Condition		Voltage (V)
+		–				
Connector	Terminal	Connector	Terminal			
E19	150 (APP sensor 1 signal)	E19	151 (Sensor ground)	Accelerator pedal	Fully released	0.5 - 1.0
					Fully depressed	4.2 - 4.8
	143 (APP sensor 2 signal)		144 (Sensor ground)		Fully released	0.25 - 0.50
					Fully depressed	2.0 - 2.5

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace accelerator pedal assembly. Refer to ACC-4, "Exploded View".

cardiagn.com

P2127, P2128 APP SENSOR

DTC Logic

INFOID:0000000012406622

DTC DETECTION LOGIC

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P2127	Accelerator pedal position sensor 2 circuit low input	An excessively low voltage from the APP sensor 2 is sent to ECM.	• Harness or connectors (APP sensor 2 circuit is open or shorted.) [CMP sensor (PHASE) circuit is shorted.] (Refrigerant pressure sensor circuit is shorted.) (Battery current sensor circuit is shorted.) (EOP sensor circuit is shorted.) • Accelerator pedal position sensor (APP sensor 2) • Camshaft position (CMP) sensor (PHASE) • Battery current sensor • Engine oil pressure (EOP) sensor • Refrigerant pressure sensor
P2128	Accelerator pedal position sensor 2 circuit high input	An excessively high voltage from the APP sensor 2 is sent to ECM.	

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is more than 8 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for 1 second.
2. Check DTC.

Is DTC detected?

YES >> Proceed to EC-452, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406623

1.CHECK APP SENSOR 2 POWER SUPPLY

1. Disconnect accelerator pedal position (APP) sensor harness connector.
2. Turn ignition switch ON.
3. Check the voltage between APP sensor harness connector and ground.

APP sensor		Ground	Voltage (V)
Connector	Terminal		
E110	5	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 5.
NO >> GO TO 2.

2.CHECK APP SENSOR 2 POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.

cardiagn.com

2. Disconnect ECM harness connector.
3. Check the continuity between APP sensor harness connector and ECM harness connector.

APP sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
E110	5	E19	142	Existed

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit.

3. CHECK SENSOR POWER SUPPLY CIRCUIT

Check harness for short to power and short to ground, between the following terminals.

ECM		Sensor		
Connector	Terminal	Name	Connector	Terminal
E19	142	APP sensor 2	E110	5
F14	18	Refrigerant pressure sensor	E300	1
		EOP sensor	F67	3
F15	87	Battery current sensor	F76	1
	92	CMP sensor (PHASE) (bank 1)	F45	1
		CMP sensor (PHASE) (bank 2)	F46	1

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair short to ground or short to power in harness or connectors.

4. CHECK COMPONENTS

Check the following.
- Battery current sensor (Refer to EC-333, "Component Inspection".)
- Camshaft position sensor (PHASE) (bank 1) (Refer to EC-303, "Component Inspection".)
- Camshaft position sensor (PHASE) (bank 2) (Refer to EC-303, "Component Inspection".)
- Engine oil pressure sensor (Refer to EC-361, "Component Inspection".)
- Refrigerant pressure sensor (Refer to EC-495, "Diagnosis Procedure".)

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace malfunctioning components.

5. CHECK APP SENSOR 2 GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between APP sensor harness connector and ECM harness connector.

APP sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
E110	1	E19	144	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

6. CHECK APP SENSOR 2 INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between APP sensor harness connector and ECM harness connector.

cardiagn.com

APP sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
E110	6	E19	143	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 7.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

7.CHECK APP SENSOR

Check APP sensor. Refer to EC-454, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace accelerator pedal assembly. Refer to ACC-4, "Exploded View".

Component Inspection

INFOID:0000000012406624

1.CHECK ACCELERATOR PEDAL POSITION SENSOR

1. Reconnect all harness connectors disconnected.
2. Turn ignition switch ON.
3. Check the voltage between ECM harness connector terminals under the following conditions.

ECM				Condition		Voltage (V)
+		–				
Connector	Terminal	Connector	Terminal			
E19	150 (APP sensor 1 signal)	E19	151 (Sensor ground)	Accelerator pedal	Fully released	0.5 - 1.0
					Fully depressed	4.2 - 4.8
	143 (APP sensor 2 signal)		144 (Sensor ground)		Fully released	0.25 - 0.50
					Fully depressed	2.0 - 2.5

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace accelerator pedal assembly. Refer to ACC-4, "Exploded View".

cardiagn.com

P2135 TP SENSOR

DTC Logic

INFOID:0000000012406625

DTC DETECTION LOGIC

NOTE:
If DTC P2135 is displayed with DTC P0643, first perform the trouble diagnosis for DTC P0643. Refer to EC-379, "DTC Logic".

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P2135	Throttle position sensor circuit range/performance	Rationally incorrect voltage is sent to ECM compared with the signals from TP sensor 1 and TP sensor 2.	• Harness or connector (TP sensor 1 or 2 circuit is open or shorted.) • Electric throttle control actuator (TP sensor 1 or 2)

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is more than 8 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for 1 second.
2. Check DTC.

Is DTC detected?

YES >> Proceed to EC-455, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406626

1.CHECK THROTTLE POSITION SENSOR POWER SUPPLY

1. Disconnect electric throttle control actuator harness connector.
2. Turn ignition switch ON.
3. Check the voltage between electric throttle control actuator harness connector and ground.

Electric throttle control actuator		Ground	Voltage (V)
Connector	Terminal		
F50	5	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

2.CHECK THROTTLE POSITION SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between electric throttle control actuator harness connector and ECM harness connector.

cardiagn.com

Electric throttle control actuator		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F50	4	F15	75	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

3.CHECK THROTTLE POSITION SENSOR INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between electric throttle control actuator harness connector and ECM harness connector.

Electric throttle control actuator		ECM		Continuity
Connector	Terminal	Connector	Terminal	
F50	3	F15	72	Existed
	6		71	

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK THROTTLE POSITION SENSOR

Check throttle position sensor. Refer to EC-456, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace electric throttle control actuator. Refer to EM-29, "Exploded View".

Component Inspection

INFOID:0000000012406627

1.CHECK THROTTLE POSITION SENSOR

1. Turn ignition switch OFF.
2. Reconnect all harness connectors disconnected.
3. Perform EC-148, "Description".
4. Turn ignition switch ON.
5. Shift selector lever position to D.
6. Check the voltage between ECM harness connector terminals under the following conditions.

ECM				Condition		Voltage
+		–				
Connector	Terminal	Connector	Terminal			
F15	71 (TP sensor 1 signal)	F15	75 (Sensor ground)	Accelerator pedal	Fully released	More than 0.36 V
					Fully depressed	Less than 4.75 V
	72 (TP sensor 2 signal)				Fully released	Less than 4.75 V
					Fully depressed	More than 0.36 V

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace electric throttle control actuator. Refer to EM-29, "Exploded View".

cardiagn.com

P2138 APP SENSOR

DTC Logic

INFOID:0000000012406628

DTC DETECTION LOGIC

NOTE:
If DTC P2138 is displayed with DTC P0643, first perform the trouble diagnosis for DTC P0643. Refer to EC-379, "DTC Logic".

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P2138	Accelerator pedal position sensor circuit range/ performance	Rationally incorrect voltage is sent to ECM compared with the signals from APP sensor 1 and APP sensor 2.	• Harness or connector (APP sensor 1 or 2 circuit is open or shorted.) [CMP sensor (PHASE) circuit is shorted.] (Refrigerant pressure sensor circuit is shorted.) (Battery current sensor circuit is shorted.) (EOP sensor circuit is shorted.) • Accelerator pedal position sensor (APP sensor 1 or 2) • Camshaft position (CMP) sensor (PHASE) • Battery current sensor • Engine oil pressure (EOP) sensor • Refrigerant pressure sensor

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is more than 8 V at idle.

>> GO TO 2.

2.PERFORM DTC CONFIRMATION PROCEDURE

1. Start engine and let it idle for 1 second.
2. Check DTC.

Is DTC detected?

YES >> Proceed to EC-457, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406629

1.CHECK APP SENSOR 1 POWER SUPPLY

1. Disconnect accelerator pedal position (APP) sensor harness connector.
2. Turn ignition switch ON.
3. Check the voltage between APP sensor harness connector and ground.

APP sensor		Ground	Voltage (V)
Connector	Terminal		
E110	4	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 2.

cardiagn.com

NO >> Repair open circuit, short to ground or short to power in harness or connectors.

2.CHECK APP SENSOR 2 POWER SUPPLY

1. Turn ignition switch ON.
2. Check the voltage between APP sensor harness connector and ground.

APP sensor		Ground	Voltage (V)
Connector	Terminal		
E110	5	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 6.
NO >> GO TO 3.

3.CHECK APP SENSOR 2 POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between APP sensor harness connector and ECM harness connector.

APP sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
E110	5	E19	142	Existed

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit.

4.CHECK SENSOR POWER SUPPLY CIRCUIT

Check harness for short to power and short to ground, between the following terminals.

ECM		Sensor		
Connector	Terminal	Name	Connector	Terminal
E19	142	APP sensor 2	E110	5
F14	18	Refrigerant pressure sensor	E300	1
		EOP sensor	F67	3
F15	87	Battery current sensor	F76	1
	92	CMP sensor (PHASE) (bank 1)	F45	1
		CMP sensor (PHASE) (bank 2)	F46	1

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair short to ground or short to power in harness or connectors.

5.CHECK COMPONENTS

Check the following.
- Battery current sensor (Refer to EC-333, "Component Inspection".)
- Camshaft position sensor (PHASE) (bank 1) (Refer to EC-303, "Component Inspection".)
- Camshaft position sensor (PHASE) (bank 2) (Refer to EC-303, "Component Inspection".)
- Engine oil pressure sensor (Refer to EC-361, "Component Inspection".)
- Refrigerant pressure sensor (Refer to EC-495, "Diagnosis Procedure".)

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace malfunctioning components.

6.CHECK APP SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.

cardiagn.com

2. Disconnect ECM harness connector.
3. Check the continuity between APP sensor harness connector and ECM harness connector.

APP sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
E110	1	E19	144	Existed
	2		151	

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 7.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

7. CHECK APP SENSOR INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between APP sensor harness connector and ECM harness connector.

APP sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
E110	3	E19	150	Existed
	6		143	

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 8.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

8. CHECK APP SENSOR

Check APP sensor. Refer to EC-459, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace accelerator pedal assembly. Refer to ACC-4, "Exploded View".

Component Inspection

INFOID:0000000012406630

1. CHECK ACCELERATOR PEDAL POSITION SENSOR

1. Reconnect all harness connectors disconnected.
2. Turn ignition switch ON.
3. Check the voltage between ECM harness connector terminals under the following conditions.

ECM				Condition		Voltage (V)
+		–				
Connector	Terminal	Connector	Terminal			
E19	150 (APP sensor 1 signal)	E19	151 (Sensor ground)	Accelerator pedal	Fully released	0.5 - 1.0
					Fully depressed	4.2 - 4.8
	143 (APP sensor 2 signal)		144 (Sensor ground)		Fully released	0.25 - 0.50
					Fully depressed	2.0 - 2.5

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace accelerator pedal assembly. Refer to ACC-4, "Exploded View".

cardiagn.com

P219A, P219B AIR FUEL RATIO

DTC Logic

INFOID:0000000012406631

DTC DETECTION LOGIC

NOTE:
If DTC P219A or P219B is displayed with other DTC, first perform the trouble diagnosis for the other DTC. Refer to EC-103, "DTC Index".

DTC No.	CONSULT screen terms (Trouble diagnosis content)	DTC detecting condition	Possible cause
P219A	AIR FUEL RATIO IMBALANCE B1 (Air-fuel ratio imbalance bank 1)	ECM detects a lean/rich air fuel ratio state in any cylinder for a specified length of time.	• Fuel injector • Exhaust gas leaks • Incorrect fuel pressure • Mass air flow sensor • Intake air leaks • Lack of fuel • Incorrect PCV hose connection • Improper spark plug • Insufficient compression • The fuel injector circuit is open or shorted • ignition coil • The ignition signal circuit is open or shorted
P219B	AIR FUEL RATIO IMBALANCE B2 (Air-fuel ratio imbalance bank 2)		

DTC CONFIRMATION PROCEDURE

1.PRECONDITIONING-1

If DTC Confirmation Procedure has been previously conducted, always perform the following before conducting the next test.
1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

NOTE:
Before performing the following procedure, confirm that battery voltage is 11 V or more at idle.

>> GO TO 2.

2.PRECONDITIONING-2

1. Turn ignition switch ON.
2. Clear the mixture ratio self-learning value. Refer to EC-151, "Description".

Will CONSULT be used?

YES >> GO TO 3.
NO >> GO TO 6.

3.PERFORM DTC CONFIRMATION PROCEDURE-1

1. Turn ignition switch ON.
2. Select “COOLAN TEMP/S” in “DATA MONITOR” mode of “ENGINE” using CONSULT.
3. Start engine.
4. Make sure that “COOLAN TEMP/S” indicates more than 80°C (176°F).

>> GO TO 4.

4.PERFORM DTC CONFIRMATION PROCEDURE-2

With CONSULT
1. Select “SYSTEM 1 DIAGNOSIS B B1” and “SYSTEM 1 DIAGNOSIS A B1” in “DATA MONITOR” mode of “ENGINE” using CONSULT.
2. Drive vehicle under the following conditions for at least 5 consecutive seconds.
   CAUTION:

cardiagn.com

- **Always drive vehicle at a safe speed.**

ENG SPEED	1,000 – 1,600rpm
COOLAN TEMP/S	More than 80°C (176°F)
B/FUEL SCHDL	5 – 12 msec
Selector lever	D position
SYSTEM 1 DIAGNOSIS B B1	PRSENT

NOTE:
- Drive the vehicle at approximately 88 km/h (55MPH) allows easy diagnosis.
- Keep the accelerator pedal as possible during crusing.

3. Check “SYSTEM 1 DIAGNOSIS A B1” indication.

Is “CMPLT” displayed?

YES >> GO TO 5.
NO >> GO TO 2.

5. PERFORM DTC CONFIRMATION PROCEDURE-3

Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-461, "Diagnosis Procedure".
NO >> INSPECTION END

6. PERFORM DTC CONFIRMATION PROCEDURE-4

Without CONSULT

1. Start the engine and warm it up to normal operating temperature.
2. Drive vehicle under the following conditions for at least 5 consecutive seconds.

CAUTION:
- **Always drive vehicle at a safe speed.**

Engine speed	1,000 – 1,600 rpm
Calculated load value	27 – 63 %
Selector lever	D position

NOTE:
- Drive the vehicle at approximately 88 km/h (55MPH) allows easy diagnosis.
- Keep the accelerator pedal as possible during crusing.

3. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-461, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406632

1. CHECK FOR INTAKE AIR LEAK

1. Stop engine and check the following for connection.
- Air duct
- Vacuum hoses
- PCV hose
- Intake air passage between air duct to intake manifold
2. Start engine and let it idle.
3. Listen for an intake air leak after the mass air flow sensor.


Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair or replace error-detected parts.

2. CHECK EXHAUST GAS LEAK

cardiagn.com

1. Stop engine and visually check exhaust tube, three way catalyst and muffler for dents connection.
2. Start engine and let it idle.
3. Listen for an exhaust gas leak before three way catalyst (manifold).

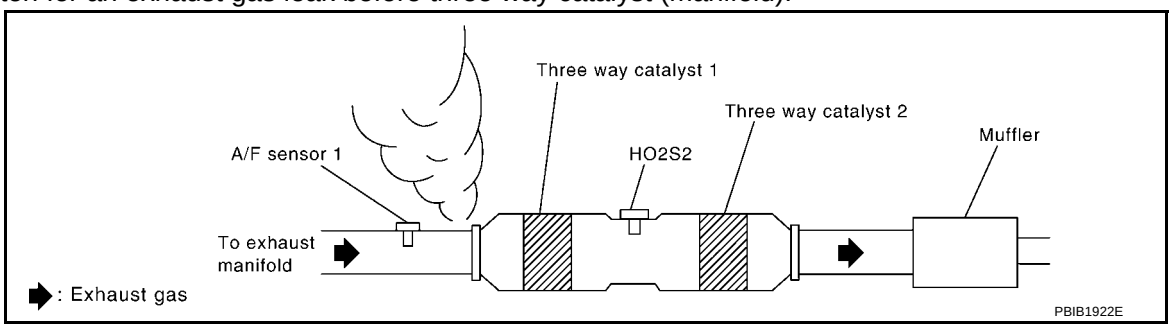

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair or replace error-detected parts.

3.CHECK FUEL PRESSURE

1. Release fuel pressure to zero. Refer to EC-153, "Work Procedure".
2. Check fuel pressure. Refer to EC-153, "Work Procedure".

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 9.

4.CHECK MASS AIR FLOW SENSOR

With CONSULT
Check “MASS AIR FLOW” in “DATA MONITOR” mode of “ENGINE” using CONSULT.
For specification, refer to EC-514, "Mass Air Flow Sensor".

With GST
Check mass air flow sensor signal in Service $01 using GST.
For specification, refer to EC-514, "Mass Air Flow Sensor".

Is the inspection result normal?


YES >> GO TO 5.
NO >> Check connectors for rusted terminals or loose connections in the mass air flow sensor circuit or grounds. Refer to EC-201, "Diagnosis Procedure".

5.CHECK FUNCTION OF FUEL INJECTOR-1

With CONSULT
1. Start engine.
2. Perform “POWER BALANCE” in “ACTIVE TEST” mode of “ENGINE” using CONSULT.
3. Check that each circuit produces a momentary engine speed drop.

Without CONSULT
1. Let engine idle.
2. Listen to each fuel injector operating sound.

Clicking noise should be heard.

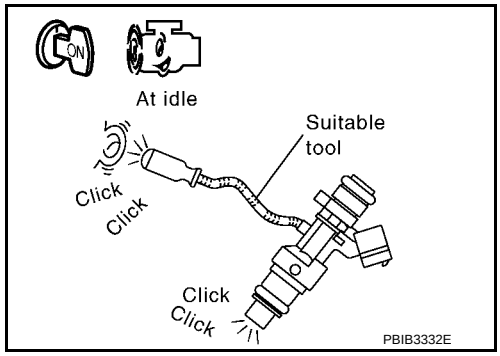

Is the inspection result normal?

YES >> GO TO 6.
NO >> Perform trouble diagnosis for fuel injector, refer to EC-480, "Component Inspection".


6.CHECK FUNCTION OF FUEL INJECTOR-2

CAUTION:

cardiagn.com

Perform the following procedure in a place with no combustible objects and good ventilation.

1. Turn ignition switch OFF.
2. Confirm that the engine is cooled down and there are no fire hazards near the vehicle.
3. Disconnect all fuel injector harness connectors.
4. Remove fuel tube assembly. Refer to EM-49, "Removal and Installation".
   Keep fuel hose and all fuel injectors connected to fuel tube.
5. Disconnect all ignition coil harness connectors.
6. Prepare pans or saucers under each fuel injector.
7. Crank engine for approximately 3 seconds.

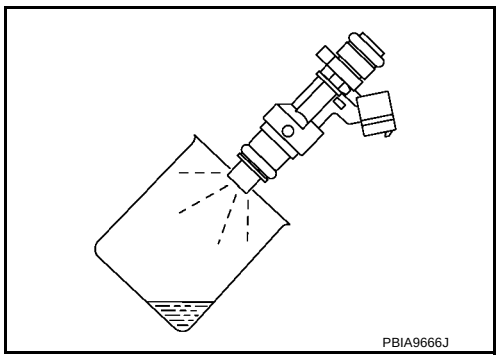

- **Fuel should be sprayed evenly for each fuel injector.**
- **Fuel must not drip from the tip of fuel injector.**


Is the inspection result normal?

YES >> GO TO 7.
NO >> Replace fuel injector. Refer to EM-49, "Removal and Installation".

7. CHECK FUNCTION OF IGNITION COIL-1

CAUTION:
Perform the following steps in a well-ventilated area with no combustibles.

1. Turn ignition switch OFF.
2. Remove fuel pump fuse from IPDM E/R to release fuel pressure.
   NOTE:
   CONSULT must not be used to release fuel pressure. It develops again during the following steps, if released by using CONSULT.
3. Start the engine.
4. After an engine stall, crank the engine two or three times to release all the fuel pressure.
5. Turn ignition switch OFF.
6. Disconnect all the harness connectors of ignition coil to prevent electric discharge from occurring in ignition coil.
7. Remove ignition coil assembly and spark plug of cylinder. Refer to EM-54, "Removal and Installation".
8. Crank engine for 5 seconds or more to remove combustion gas in the cylinder.
9. Connect spark plug and harness connector to ignition coil.
10. Allow a 13-17mm (0.52-0.66 in) spacing between spark plug and grounded metal portion as shown in the figure to fix the ignition coil with a rope or an equivalent.
11. Crank the engine for approximately 3 seconds to see if sparking occurs between spark plug and the grounded metal portion.

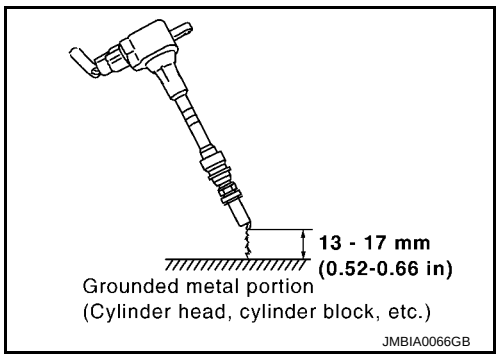

Spark should be generated.

CAUTION:

- **The discharge voltage becomes 20 kV or higher. Therefore, always stay away from the spark plug and ignition coil at least 50 cm (19.7 in) during the inspection.**
- **Leaving a space of more than 17mm (0.66 in) may damage the ignition coil.**

NOTE:
When the gap is less than 13 mm (0.52 in), a the spark might be generated even if the coil is malfunctioning.

Is the inspection result normal?

YES >> GO TO 8.
NO >> GO TO 10.

8. CHECK COMPRESSION PRESSURE

Check compression pressure. Refer to EM-24, "Inspection".

Is the inspection result normal?

cardiagn.com

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Check pistons, piston rings, valves, valve seats and cylinder head gaskets.

9. DETECT MALFUNCTIONING PART

Check fuel hoses and fuel tubes for clogging.

Is the inspection result normal?

YES >> Replace fuel filter and fuel pump assembly. Refer to FL-6, "Removal and Installation".
NO >> Repair or replace error-detected parts.

10. CHECK FUNCTION OF IGNITION COIL-2

1. Turn ignition switch OFF.
2. Disconnect spark plug and connect a non-malfunctioning spark plug.
3. Crank engine for approximately 3 seconds, and recheck whether spark is generated between the spark plug and the grounded metal portion.

Spark should be generated.

Is the inspection result normal?


YES >> GO TO 11.
NO >> Check ignition coil, power transistor and their circuits. Refer to EC-484, "Component Function Check".

11. CHECK SPARK PLUG

Check the initial spark plug for fouling, etc.

Is the inspection result normal?

YES >> 1. Repair or clean spark plug. Refer to EM-17, "Removal and Installation".
2. GO TO 12.
NO >> Replace spark plug(s) with standard type one(s). For spark plug type, refer to EM-133, "Spark Plug".

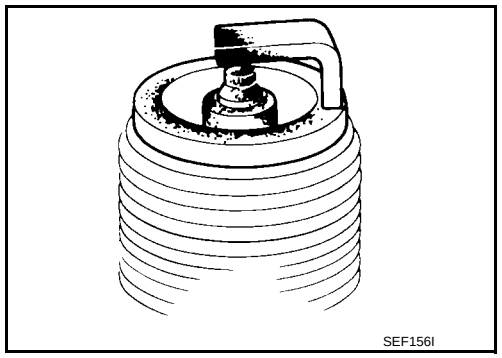

12. CHECK FUNCTION OF IGNITION COIL-3

1. Reconnect the initial spark plugs.
2. Crank engine for approximately 3 seconds, and recheck whether spark is generated between the spark plug and the grounded portion.

Spark should be generated.

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace spark plug(s) with standard type one(s). For spark plug type, refer to EM-133, "Spark Plug".

cardiagn.com

P2610 ECM INTERNAL TIMER

Description

INFOID:0000000012406633

This ECM contains a timer and measures time between an ignition switch OFF and the next ignition switch ON. This enables the judging of the state of engine cooling at an engine start.

DTC Logic

INFOID:0000000012406634

DTC DETECTION LOGIC

DTC No.	CONSULT screen terms (Trouble diagnosis content)	DTC detecting condition	Possible cause
P2610	ECM/PCM INTERNAL ENG OFF TIMER (ECM/PCM internal engine off timer performance)	• ECM internal engine off timer is malfunctioning. • The time calculated by ECM based on a descent allowance of engine coolant temperatures during ignition switch OFF is extremely shorter than the time counted by the Engine internal OFF timer.	• ECM • ECM power supply

DTC CONFIRMATION PROCEDURE

1.INSPECTION START

It is necessary to erase permanent DTC?

YES >> GO TO 4.
NO >> GO TO 2.

2.PRECONDITIONING

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
Before performing the following procedure, confirm that battery voltage is 12 V or more under ignition switch OFF condition.

>> GO TO 3.

3.PERFORM DTC CONFIRMATION PROCEDURE-I

1. Turn ignition switch ON and wait at least 190 seconds.
2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-466, "Diagnosis Procedure".
NO >> INSPECTION END

4.PRECONDITIONING

1. Turn ignition switch OFF and wait at least 10 seconds.
2. Turn ignition switch ON.
3. Turn ignition switch OFF and wait at least 10 seconds.

TESTING CONDITION:
- **Before performing the following procedure, confirm that battery voltage is 12 V or more under ignition switch OFF condition.**
- **Before performing the following procedure, check that fuel level is between 2/8 and 7/8.**

>> GO TO 5.

5.PERFORM DTC CONFIRMATION PROCEDURE-I

1. Turn ignition switch ON and wait at least 190 seconds.

cardiagn.com

2. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-466, "Diagnosis Procedure".
NO >> GO TO 6.

6. PERFORM DTC CONFIRMATION PROCEDURE-II

CAUTION:
To start this self-diagnosis, the conditions listed bellow are required to be satisfied. Perform the following steps to satisfy the conditions.
- **Engine coolant temperature decrease by 55°C (131°F) or more during the time between an ignition switch OFF (after engine warm-up) and the second ignition switch ON.**
- **A fuel temperature at the second ignition switch ON is −5°C (23°F) or more and less than 35°C (95°F).**
- **The temperature difference between engine coolant and fuel is 5°C (41°F) or more.**

NOTE:
This self-diagnosis is not performed if the distance traveled is extremely short.

1. Turn ignition switch ON.
2. Start engine and warm it up to normal operating temperature.
3. Turn ignition switch OFF and soak the vehicle for at least 12 hours.
   CAUTION:
   - **Never turn ON the ignition switch during soaking.**
   - **Never open the fuel filler cap and perform refueling during soaking.**
4. Turn ignition switch ON and wait at least 190 seconds.
5. Check 1st trip DTC.

Is 1st trip DTC detected?

YES >> Proceed to EC-466, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406635

1. CHECK ECM POWER SUPPLY AND GROUND CIRCUIT

Check ECM power supply and ground circuit. Refer to EC-175, "Diagnosis Procedure".

Is the inspection result normal?

YES >> GO TO 2.
NO >> Repair or replace error-detected parts.

2. CHECK SELF-DIAGNOSTIC RESULT

Check that DTCs related to the fuel system and the cooling system are not detected.

Is the inspection result normal?

YES >> Check the DTC. Refer to EC-73, "CONSULT Function".
NO >> GO TO 3.

3. PERFORM DTC CONFIRMATION PROCEDURE

1. Erase DTC.
2. Perform DTC Confirmation Procedure again. Refer to EC-465, "DTC Logic".

Is the 1st trip DTC P2610 displayed again?

YES >> Replace ECM. Refer to EC-513, "Removal and Installation".
NO >> INSPECTION END

cardiagn.com

BRAKE PEDAL POSITION SWITCH

Component Function Check

INFOID:0000000012406636

1. CHECK BRAKE PEDAL POSITION SWITCH FUNCTION

With CONSULT

1. Turn ignition switch ON.
2. Select “BRAKE SW1” in “DATA MONITOR” mode with CONSULT.
3. Check “BRAKE SW1” indication under the following conditions.

Monitor item	Condition		Indication
BRAKE SW1	Brake pedal	Slightly depressed	OFF
		Fully released	ON

Without CONSULT

1. Turn ignition switch ON.
2. Check the voltage between ECM harness connector terminals.

ECM			Condition		Voltage
Connector	+	–			
	Terminal	Terminal			
E19	140 (brake pedal position switch signal)	147	Brake pedal	Slightly depressed	Approx. 0 V
				Fully released	Battery voltage

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-467, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406637

1. CHECK BRAKE PEDAL POSITION SWITCH POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect brake pedal position switch harness connector.
3. Turn ignition switch ON.
4. Check the voltage between brake pedal position switch harness connector and ground.

Brake pedal position switch		Ground	Voltage
Connector	Terminal		
E109	1	Ground	Battery voltage

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2. CHECK BRAKE PEDAL POSITION SWITCH POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect fuse block (J/B) harness connector.
3. Check the continuity between brake pedal position switch harness connector and fuse block (J/B) harness connector.

Brake pedal position switch		Fuse block (J/B)		Continuity
Connector	Terminal	Connector	Terminal	
E109	1	E100	4F	Existed

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.

cardiagn.com

NO >> Repair or replace error-detected parts.

3. CHECK BRAKE PEDAL POSITION SWITCH INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between brake pedal position switch harness connector and ECM harness connector.

Brake pedal position switch		ECM		Continuity
Connector	Terminal	Connector	Terminal	
E109	2	E19	140	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4. CHECK BRAKE PEDAL POSITION SWITCH

Check brake pedal position switch. Refer to EC-468, "Component Inspection (Brake Pedal Position Switch)".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace brake pedal position switch. Refer to BR-20, "Exploded View".

Component Inspection (Brake Pedal Position Switch)

INFOID:0000000012406638

1. CHECK BRAKE PEDAL POSITION SWITCH-I

1. Turn ignition switch OFF.
2. Disconnect brake pedal position switch harness connector.
3. Check the continuity between brake pedal position switch terminals under the following conditions.

Terminals	Condition		Continuity
1 and 2	Brake pedal	Fully released	Existed
		Slightly depressed	Not existed

Is the inspection result normal?

YES >> INSPECTION END
NO >> GO TO 2.

2. CHECK BRAKE PEDAL POSITION SWITCH-II

1. Adjust brake pedal position switch installation. Refer to BR-9, "Inspection and Adjustment".
2. Check the continuity between brake pedal position switch terminals under the following conditions.

Terminals	Condition		Continuity
1 and 2	Brake pedal	Fully released	Existed
		Slightly depressed	Not existed

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace brake pedal position switch. Refer to BR-20, "Exploded View".

cardiagn.com

ASCD INDICATOR

Component Function Check

INFOID:0000000012406639

1.CHECK ASCD INDICATOR FUNCTION

Check ASCD indicator under the following conditions.

ASCD INDICATOR	CONDITION		SPECIFICATION
CRUISE	• Ignition switch: ON	• MAIN switch: Pressed at the 1st time →at the 2nd time	ON → OFF

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-469, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406640

1.CHECK DTC

Check that DTC UXXXX is not displayed.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Perform trouble diagnosis for DTC UXXXX.

2.CHECK COMBINATION METER FUNCTION

Check combination meter function. Refer to MWI-36, "CONSULT Function".

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair or replace malfunctioning part.

3.CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace combination meter. Refer to MWI-96, "Exploded View".
NO >> Repair or replace error-detected parts.

cardiagn.com

COOLING FAN

Component Function Check

INFOID:0000000012406641

1.CHECK COOLING FAN FUNCTION

With CONSULT

1. Turn ignition switch ON.
2. Perform “COOLING FAN” in “ACTIVE TEST” mode with CONSULT.
3. Check that cooling fan operates at each speed.

Without CONSULT

1. Perform IPDM E/R auto active test and check cooling fan motors operation, refer to PCS-10, "Diagnosis Description".
2. Check that cooling fan operates at each speed.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-470, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406642

1.CHECK COOLING FAN RELAY POWER SUPPLY

1. Turn ignition switch OFF.
2. Disconnect cooling fan relays-2, -3.
3. Turn ignition switch ON.
4. Check the voltage between cooling fan relays-2, -3 harness connectors and ground.

Cooling fan relay		Ground	Voltage
Connector	Terminal		
E57 (cooling fan relay-2)	2	Ground	Battery voltage
	5		
E59 (cooling fan relay-3)	2		
	5		

Is the inspection result normal?

YES >> GO TO 2.
NO >> Perform the trouble diagnosis for power supply circuit.

2.CHECK COOLING FAN RELAY OUTPUT SIGNAL CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connectors.
3. Check the continuity between cooling fan relay-2, -3 harness connectors and IPDM E/R harness connector.

Cooling fan relay		IPDM E/R		Continuity
Connector	Terminal	Connector	Terminal	
E57 (cooling fan relay-2)	1	E11	42	Existed
E59 (cooling fan relay-3)	1	E10	34	

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

3.CHECK COOLING FAN MOTOR POWER SUPPLY

cardiagn.com

1. Disconnect cooling fan motor-1 harness connector.
2. Check the voltage between cooling fan motor-1 harness connector and ground.

Cooling fan motor-1		Ground	Voltage
Connector	Terminal		
E301	1	Ground	Battery voltage
	2		

Is the inspection result normal?

YES >> GO TO 4.
NO >> Perform the trouble diagnosis for power supply circuit.

4. CHECK COOLING FAN MOTOR CIRCUIT-I

1. Disconnect cooling fan motor-2 harness connector.
2. Check the continuity between cooling fan relay-2, -3 harness connectors and cooling fan motor-1, -2 harness connectors.

Cooling fan relay		Cooling fan motor		Continuity
Connector	Terminal	Connector	Terminal	
E57 (cooling fan relay-2)	3	E302 (Cooling fan motor-2)	2	Existed
	7	E301 (Cooling fan motor-1)	3	
E59 (cooling fan relay-3)	3	E302 (Cooling fan motor-2)	1	
	7	E301 (Cooling fan motor-1)	4	

3. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Perform the trouble diagnosis for power supply circuit.

5. CHECK COOLING FAN MOTOR CIRCUIT-II

1. Check the continuity between IPDM E/R harness connector and cooling fan motor-1, -2 harness connector.

IPDM E/R		Cooling fan motor		Continuity
Connector	Terminal	Connector	Terminal	
E10	35	E301 (Cooling fan motor-1)	4	Existed
	38	E302 (Cooling fan motor-2)	1	

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 6.
NO >> Perform the trouble diagnosis for power supply circuit.

6. CHECK COOLING FAN MOTOR CIRCUIT-III

1. Check the continuity between cooling fan relay-2, -3 harness connectors and ground.

cardiagn.com

Cooling fan relay		Ground	Continuity
Connector	Terminal		
E57 (cooling fan relay-2)	6	Ground	Existed
E59 (cooling fan relay-3)	6		

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 7.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

7. CHECK COOLING FAN MOTOR CIRCUIT-IV

1. Check the continuity between cooling fan motor-2 harness connector and ground.

Cooling fan motor-2		Ground	Continuity
Connector	Terminal		
E302	3	Ground	Existed
	4		

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 8.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

8. CHECK COOLING FAN RELAYS-2 AND -3

Check cooling fan relays-2 and -3. Refer to EC-473, "Component Inspection (Cooling Fan Relay)".

Is the inspection result normal?

YES >> GO TO 9.
NO >> Replace malfunctioning cooling fan relay.

9. CHECK COOLING FAN MOTORS-1 AND -2

Check cooling fan motors-1 and -2. Refer to EC-472, "Component Inspection (Cooling Fan Motor)".

Is the inspection result normal?

YES >> GO TO 10.
NO >> Replace malfunctioning cooling fan motor. Refer to CO-18, "Exploded View".

10. CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace IPDM E/R. Refer to PCS-34, "Exploded View".
NO >> Repair or replace error-detected parts.

Component Inspection (Cooling Fan Motor)

INFOID:0000000012406643

1. CHECK COOLING FAN MOTOR

1. Turn ignition switch OFF.
2. Disconnect cooling fan motor harness connector.
3. Supply cooling fan motor terminals with battery voltage and check operation.

cardiagn.com

	Condition	Terminals	
		(+)	(–)
Cooling fan motor	A	1	3 and 4
		2	3 and 4
		1 and 2	3
		1 and 2	4
	B	1, 2	3, 4

Check that cooling fan speed of condition B is higher than that of A.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace cooling fan motor. Refer to CO-18, "Exploded View".


Component Inspection (Cooling Fan Relay)

INFOID:0000000012406644

1. CHECK COOLING FAN RELAY

1. Disconnect cooling fan relays -2, -3 harness connectors.
2. Check continuity between cooling fan relay -2, -3 terminals under the following conditions.

Terminals	Conditions	Continuity
3 and 5 6 and 7	12 V direct current supply between terminals 1 and 2	Existed
	No current supply	Not existed

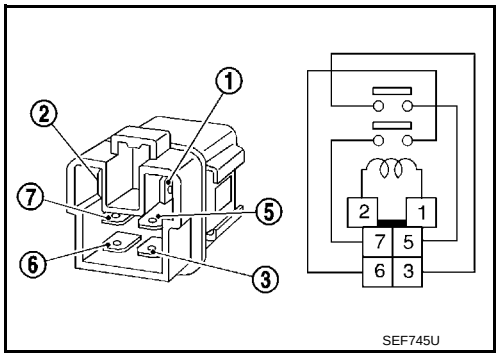

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace cooling fan relay.

cardiagn.com

ELECTRICAL LOAD SIGNAL

Description

INFOID:0000000012406645

The electrical load signal (Headlamp switch signal, rear window defogger switch signal, etc.) is transferred via the CAN communication.

Component Function Check

INFOID:0000000012406646

1.CHECK REAR WINDOW DEFOGGER SWITCH FUNCTION

1. Turn ignition switch ON.
2. Connect CONSULT and select “DATA MONITOR” mode.
3. Select “LOAD SIGNAL” and check indication under the following conditions.

Monitor item	Condition		Indication
LOAD SIGNAL	Rear window defogger switch	ON	ON
		OFF	OFF

Is the inspection result normal?

YES >> GO TO 2.
NO >> Proceed to EC-474, "Diagnosis Procedure".

2.CHECK LIGHTING SWITCH FUNCTION

Check “LOAD SIGNAL” indication under the following conditions.

Monitor item	Condition		Indication
LOAD SIGNAL	Lighting switch	ON at 2nd position	ON
		OFF	OFF

Is the inspection result normal?

YES >> GO TO 3.
NO >> Proceed to EC-474, "Diagnosis Procedure".

3.CHECK HEATER FAN CONTROL SWITCH FUNCTION

Select “HEATER FAN SW” and check indication under the following conditions.

Monitor item	Condition		Indication
HEATER FAN SW	Heater fan control switch	ON	ON
		OFF	OFF

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-474, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406647

1.INSPECTION START

Confirm the malfunctioning circuit (rear window defogger, headlamp or heater fan). Refer to EC-474, "Component Function Check".

Which circuit is related to the incident?

Rear window defogger>>GO TO 2.
Headlamp>>GO TO 3.
Heater fan>>GO TO 4.

2.CHECK REAR WINDOW DEFOGGER SYSTEM

Check rear window defogger system. Refer to DEF-21, "Work Flow".

cardiagn.com

>> INSPECTION END

3. CHECK HEADLAMP SYSTEM

Check headlamp system. Refer to EXL-55, "Work Flow" (XENON TYPE) or EXL-156, "Work Flow" (HALOGEN TYPE).

>> INSPECTION END

4. CHECK HEATER FAN CONTROL SYSTEM

Check heater fan control system. Refer to VTL-6, "VENTILATION SYSTEM (FRONT AIR CONDITIONING) : System Description".

>> INSPECTION END

cardiagn.com

ELECTRONIC CONTROLLED ENGINE MOUNT

Component Function Check

INFOID:0000000012406648

1.CHECK OVERALL FUNCTION

1. Start engine and warm it up to normal operating temperature.
2. Shift selector position is D while depressing the brake pedal and parking brake pedal.
3. Disconnect electronic controlled engine mount control solenoid valve harness connector.
4. Check that body vibration increases compared to the condition of step 2 above (with vehicle stopped).

Is the inspection result normal?

YES >> INSPECTION END
NO >> EC-476, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406649

1.CHECK VACUUM SOURCE

1. Turn ignition switch OFF.
2. Reconnect electronic controlled engine mount control solenoid valve harness connector.
3. Disconnect vacuum hose connected to electronic controlled engine mount.
4. Start engine and let it idle.
5. Check vacuum hose for vacuum existence.

Vacuum should exist.

Is the inspection result normal?

YES >> GO TO 7.
NO >> GO TO 2.

2.CHECK VACUUM HOSES AND VACUUM GALLERY

1. Turn ignition switch OFF.
2. Check vacuum hoses and vacuum gallery for clogging, cracks or improper connection. Refer to EC-48, "ELECTRONIC CONTROLLED ENGINE MOUNT : System Description".

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair or replace vacuum hoses and vacuum gallery.

3.CHECK ELECTRONIC CONTROLLED ENGINE MOUNT CONTROL SOLENOID VALVE POWER SUPPLY

1. Disconnect electronic controlled engine mount control solenoid valve harness connector.
2. Turn ignition switch ON.
3. Check the voltage between front electronic controlled engine mount harness connector and ground.

Electronic controlled engine mount control solenoid valve		Ground	Voltage
Connector	Terminal		
F11	1	Ground	Battery voltage

Is the inspection result normal?

YES >> GO TO 5.
NO >> GO TO 4.

4.CHECK ELECTRONIC CONTROLLED ENGINE MOUNT CONTROL SOLENOID VALVE POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect fuse block (J/B) harness connector.
3. Check the continuity between electronic controlled engine mount harness connector and fuse block (J/B) harness connector.

cardiagn.com

Electronic controlled engine mount control solenoid valve		Fuse block (J/B)		Continuity
Connector	Terminal	Connector	Terminal	
F11	1	E100	4F	Existed

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

5.CHECK ELECTRONIC CONTROLLED ENGINE MOUNT CONTROL SOLENOID VALVE OUTPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Disconnect ECM harness connector.
2. Check the continuity between ECM harness connector and electronic controlled engine mount control solenoid valve harness connector.

ECM		Electronic controlled engine mount control solenoid valve		Continuity
Connector	Terminal	Connector	Terminal	
F14	49	F11	2	Existed

3. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair open circuit, short to ground or short to power in harness connectors.

6.CHECK ELECTRONIC CONTROLLED ENGINE MOUNT CONTROL SOLENOID VALVE


Check electronic controlled engine mount control solenoid valve. Refer to EC-477, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 7.
NO >> Replace electronic controlled engine mount control solenoid valve. Refer to EM-29, "Exploded View".

7.CHECK ELECTRONIC CONTROLLED ENGINE MOUNT

1. Turn ignition switch OFF.
2. Install vacuum pump (A) to electronic controlled engine mount (1).
3. Check that a vacuum is maintained when applying the vacuum of -40 kPa (-0.41 kg/cm^2, -5.8 psi) to electronic controlled engine mount.
4. Also visually check electronic controlled engine mount.

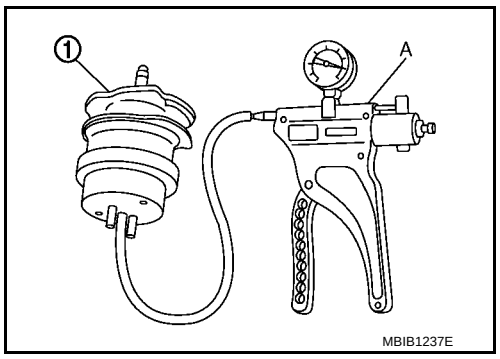

Is the inspection result normal?

YES >> GO TO 8.
NO >> Replace electronic controlled engine mount.

8.CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace intake manifold collector. Refer to EM-29, "Exploded View".
NO >> Repair or replace error-detected parts.

Component Inspection

INFOID:0000000012406650


1.CHECK ELECTRONIC CONTROLLED ENGINE MOUNT CONTROL SOLENOID VALVE

With CONSULT

1. Turn ignition switch OFF.

cardiagn.com

2. Reconnect electronic controlled engine mount control solenoid valve harness connector.
3. Disconnect vacuum hoses connected to electronic controlled engine mount control solenoid valve.
4. Turn ignition switch ON.
5. Select “ENGINE MOUNTING” in “ACTIVE TEST” mode with CONSULT.
6. Check air passage continuity and operation delay time under the following conditions.

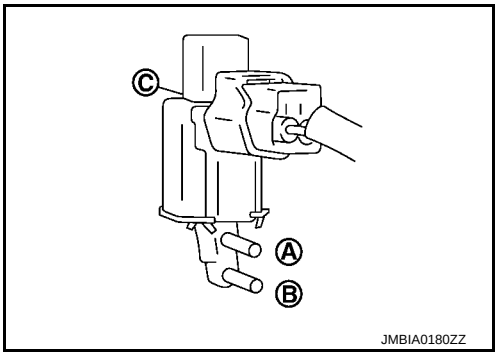


JMBIA0180ZZ

Condition (ENGINE MOUNTING)	Air passage continuity between (A) and (B)	Air passage continuity between (A) and (C)
TRVL	Existed	Not existed
IDLE	Not existed	Existed

Without CONSULT

1. Turn ignition switch OFF.
2. Disconnect electronic controlled engine mount control solenoid valve harness connector.
3. Disconnect vacuum hoses connected to electronic controlled engine mount control solenoid valve.
4. Check air passage continuity and operation delay time under the following conditions.

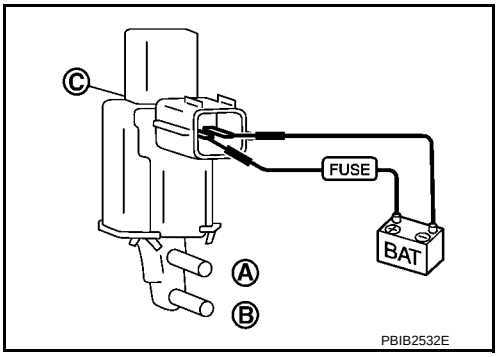

PBIB2532E

Condition	Air passage continuity between (A) and (B)	Air passage continuity between (A) and (C)
12 V direct current supply between terminals 1 and 2	Existed	Not existed
No supply	Not existed	Existed

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace electronic controlled engine mount control solenoid valve. Refer to EM-29, "Exploded View".

cardiagn.com

FUEL INJECTOR

Component Function Check

INFOID:0000000012406651

1.INSPECTION START

Turn ignition switch to START.

Are any cylinders ignited?

YES >> GO TO 2.
NO >> Proceed to EC-479, "Diagnosis Procedure".

2.CHECK FUEL INJECTOR FUNCTION


With CONSULT

1. Start engine.
2. Perform “POWER BALANCE” in “ACTIVE TEST” mode with CONSULT.
3. Check that each circuit produces a momentary engine speed drop.

Without CONSULT

1. Start engine.
2. Listen to each fuel injector operating sound.

Clicking sound should be heard.

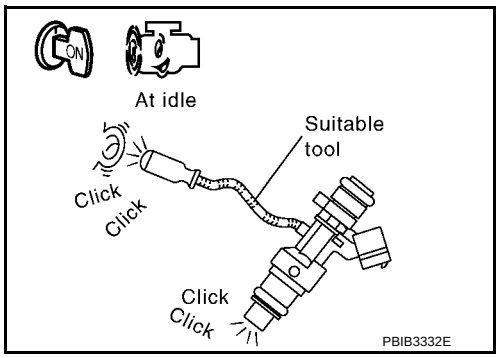

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-479, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406652

1.CHECK FUEL INJECTOR POWER SUPPLY

1. Turn ignition switch OFF.
2. Disconnect fuel injector harness connector.
3. Turn ignition switch ON.
4. Check the voltage between fuel injector harness connector and ground.

Fuel injector			Ground	Voltage
Cylinder	Connector	Terminal		
1	F37	1	Ground	Battery voltage
2	F38	1		
3	F39	1		
4	F40	1		
5	F41	1		
6	F42	1		

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2.CHECK FUEL INJECTOR POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Check the continuity between fuel injector harness connector and IPDM E/R harness connector.

cardiagn.com

Fuel injector			IPDM E/R		Continuity
Cylinder	Connector	Terminal	Connector	Terminal	
1	F37	1	F12	51	Existed
2	F38	1		52	
3	F39	1		51	
4	F40	1		52	
5	F41	1		51	
6	F42	1		52	

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

3.CHECK FUEL INJECTOR OUTPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between fuel injector harness connector and ECM harness connector.

Fuel injector			ECM		Continuity
Cylinder	Connector	Terminal	Connector	Terminal	
1	F37	2	F14	17	Existed
2	F38	2		16	
3	F39	2		22	
4	F40	2		12	
5	F41	2		11	
6	F42	2		21	

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK FUEL INJECTOR

Check fuel injector. Refer to EC-480, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 5.
NO >> Replace malfunctioning fuel injector. Refer to EM-49, "Exploded View".

5.CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace IPDM E/R. Refer to PCS-34, "Exploded View".
NO >> Repair or replace error-detected parts.

Component Inspection


INFOID:0000000012406653

1.CHECK FUEL INJECTOR

1. Turn ignition switch OFF.
2. Disconnect fuel injector harness connector.

cardiagn.com

3. Check resistance between fuel injector terminals as per the following.

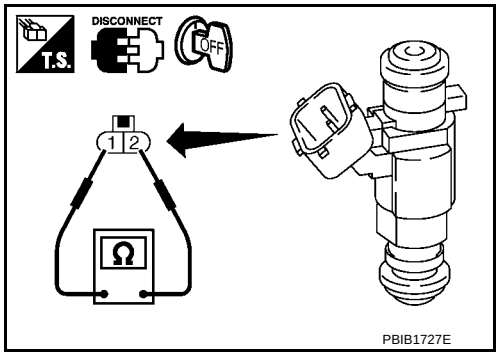

Terminals	Resistance
1 and 2	11.1 - 14.5 Ω [at 10 - 60°C (50 - 140°F)]

Is the inspection result normal?

YES >> INSPECTION END

NO >> Replace malfunctioning fuel injector. Refer to EM-49, "Exploded View".

cardiagn.com

FUEL PUMP


Component Function Check

INFOID:0000000012406654

1.CHECK FUEL PUMP FUNCTION

1. Turn ignition switch ON.
2. Pinch fuel feed hose (⇦) with two fingers.

⇦ : Vehicle front

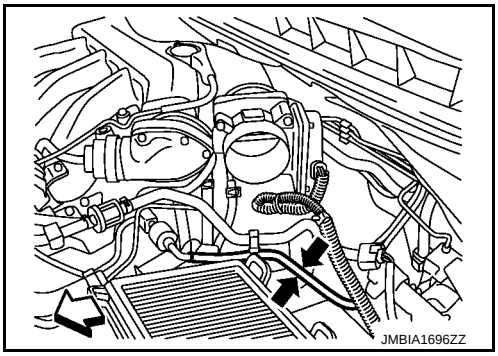

Fuel pressure pulsation should be felt on the fuel feed hose for 1 second after ignition switch is turned ON.

Is the inspection result normal?

YES >> INSPECTION END
NO >> EC-482, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406655

1.CHECK FUEL PUMP RELAY POWER SUPPLY-I

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Turn ignition switch ON.
4. Check the voltage between ECM harness connector terminals.

ECM				Voltage
+		–		
Connector	Terminal	Connector	Terminal	
F14	19	E19	152	Battery voltage

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 2.

2.CHECK FUEL PUMP RELAY POWER SUPPLY-II

Check the voltage between IPDM E/R harness connector and ground.

IPDM E/R		Ground	Voltage
Connector	Terminal		
F12	77	Ground	Battery voltage

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 7.

3.CHECK FUEL PUMP RELAY POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Check the continuity between ECM harness connector and IPDM E/R harness connector.

ECM		IPDM E/R		Continuity
Connector	Terminal	Connector	Terminal	
F14	19	F12	77	Existed

cardiagn.com

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

4. CHECK FUEL PUMP POWER SUPPLY CIRCUIT

1. Disconnect “fuel level sensor unit and fuel pump” harness connector.
2. Check harness continuity between IPDM E/R harness connector and “fuel level sensor unit and fuel pump” harness connector.

IPDM E/R		Fuel level sensor unit and fuel pump		Continuity
Connector	Terminal	Connector	Terminal	
E10	13	B40	1	Existed

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit or short to power in harness or connectors.

5. CHECK FUEL PUMP GROUND CIRCUIT

1. Disconnect “fuel level sensor unit and fuel pump” harness connector.
2. Check the continuity between “fuel level sensor unit and fuel pump” harness connector and ground.

Fuel level sensor unit and fuel pump		Ground	Continuity
Connector	Terminal		
B40	3	Ground	Existed

Is the inspection result normal?

YES >> GO TO 6.
NO >> Repair open circuit or short to power in harness or connectors.

6. CHECK FUEL PUMP

Check fuel pump. Refer to EC-483, "Component Inspection (Fuel Pump)".

Is the inspection result normal?

YES >> GO TO 7.
NO >> Replace fuel filter and fuel pump assembly. Refer to FL-6, "Removal and Installation".

7. CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace IPDM E/R. Refer to PCS-34, "Removal and Installation".
NO >> Repair or replace error-detected parts.

Component Inspection (Fuel Pump)

INFOID:0000000012406656

1. CHECK FUEL PUMP

1. Turn ignition switch OFF.
2. Disconnect “fuel level sensor unit (fuel pump)” harness connector.
3. Check resistance between “fuel level sensor unit (fuel pump)” terminals as follows.

Terminals	Resistance [at 25°C (77°F)]
1 and 3	0.2 - 5.0 Ω

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace fuel level sensor unit, fuel filter and fuel pump assembly. Refer to FL-6, "Exploded View".

cardiagn.com

IGNITION SIGNAL

Component Function Check

INFOID:0000000012406657

1.INSPECTION START

Turn ignition switch OFF, and restart engine.

Does the engine start?

YES-1 >> With CONSULT: GO TO 2.
YES-2 >> Without CONSULT: GO TO 3.
NO >> Proceed to EC-484, "Diagnosis Procedure".

2.CHECK IGNITION SIGNAL FUNCTION

With CONSULT

1. Perform “POWER BALANCE” in “ACTIVE TEST” mode with CONSULT.
2. Check that each circuit produces a momentary engine speed drop.


Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-484, "Diagnosis Procedure".

3.CHECK IGNITION SIGNAL FUNCTION

Without CONSULT

1. Let engine idle.
2. Read the voltage signal between ECM harness connector terminals with an oscilloscope.

ECM				Voltage signal
+		–		
Connector	Terminal	Connector	Terminal	
F15	103	E19	152	
	104			
	106			
	107			
	113			
	114			

NOTE:

The pulse cycle changes depending on rpm at idle.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-484, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406658

1.CHECK ECM POWER SUPPLY

1. Turn ignition switch OFF, wait at least 10 seconds and then turn it ON.
2. Check the voltage between ECM harness connector terminals.

ECM			Voltage
Connector	+	–	
	Terminal	Terminal	
E19	145	152	Battery voltage

Is the inspection result normal?

YES >> GO TO 2.
NO >> Refer to EC-175, "Diagnosis Procedure".

cardiagn.com

2.CHECK CONDENSER POWER SUPPLY

1. Turn ignition switch OFF.
2. Disconnect condenser harness connector.
3. Turn ignition switch ON.
4. Check the voltage between condenser harness connector and ground.

Condenser		Ground	Voltage
Connector	Terminal		
F13	1	Ground	Battery voltage

Is the inspection result normal?

YES >> GO TO 4.
NO >> GO TO 3.

3.CHECK CONDENSER POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect IPDM E/R harness connector.
3. Check the continuity between IPDM E/R harness connector and condenser harness connector.

IPDM E/R		Condenser		Continuity
Connector	Terminal	Connector	Terminal	
F12	49	F13	1	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> Refer to EC-175, "Diagnosis Procedure".
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

4.CHECK CONDENSER GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Check the continuity between condenser harness connector and ground.

Condenser		Ground	Continuity
Connector	Terminal		
F13	2	Ground	Existed

3. Also check harness for short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair open circuit or short to power in harness or connectors.

5.CHECK CONDENSER

Check condenser. Refer to EC-488, "Component Inspection (Condenser)"

Is the inspection result normal?

YES >> GO TO 6.
NO >> Replace condenser.

6.CHECK IGNITION COIL POWER SUPPLY

1. Reconnect all harness connectors disconnected.
2. Disconnect ignition coil harness connector.
3. Turn ignition switch ON.
4. Check the voltage between ignition coil harness connector and ground.

cardiagn.com

Ignition coil			Ground	Voltage
Cylinder	Connector	Terminal		
1	F31	3	Ground	Battery voltage
2	F32	3		
3	F33	3		
4	F34	3		
5	F35	3		
6	F36	3		

Is the inspection result normal?

YES >> GO TO 7.
NO >> Repair or replace harness or connectors.

7. CHECK IGNITION COIL GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Check the continuity between ignition coil harness connector and ground.

Ignition coil			Ground	Continuity
Cylinder	Connector	Terminal		
1	F31	2	Ground	Existed
2	F32	2		
3	F33	2		
4	F34	2		
5	F35	2		
6	F36	2		

3. Also check harness for short to power.

Is the inspection result normal?

YES >> GO TO 8.
NO >> Repair open circuit or short to power in harness or connectors.

8. CHECK IGNITION COIL OUTPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Disconnect ECM harness connector.
2. Check the continuity between ignition coil harness connector and ECM harness connector.

Ignition coil			ECM		Continuity
Cylinder	Connector	Terminal	Connector	Terminal	
1	F31	1	F15	113	Existed
2	F32	1		106	
3	F33	1		103	
4	F34	1		114	
5	F35	1		107	
6	F36	1		104	

3. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 9.
NO >> Repair open circuit, short to ground or short to power in harness or connectors.

9. CHECK IGNITION COIL WITH POWER TRANSISTOR

Check ignition coil with power transistor. Refer to EC-487, "Component Inspection (Ignition Coil with Power Transistor)".

cardiagn.com

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> Replace malfunctioning ignition coil with power transistor. Refer to EM-54, "Exploded View".

Component Inspection (Ignition Coil with Power Transistor)

INFOID:0000000012406659

1. CHECK IGNITION COIL WITH POWER TRANSISTOR-I

1. Turn ignition switch OFF.
2. Disconnect ignition coil harness connector.
3. Check resistance between ignition coil terminals as per the following.

Terminal No. (Polarity)	Resistance Ω [at 25°C (77°F)]
1 and 2	Except 0 or ∞
1 and 3	Except 0
2 and 3	


Is the inspection result normal?

YES >> GO TO 2.
NO >> Replace malfunctioning ignition coil with power transistor. Refer to EM-54, "Exploded View".

2. CHECK IGNITION COIL WITH POWER TRANSISTOR-II

CAUTION:
Perform the following procedure in a place with no combustible objects and good ventilation.

1. Turn ignition switch OFF.
2. Reconnect all harness connectors disconnected.
3. Remove fuel pump fuse in IPDM E/R to release fuel pressure.
   NOTE:
   Do not use CONSULT to release fuel pressure, or fuel pressure applies again during the following procedure.
4. Start engine.
5. After engine stalls, crank it 2 or 3 times to release all fuel pressure.
6. Turn ignition switch OFF.
7. Remove all ignition coil harness connectors to avoid the electrical discharge from the ignition coils.
8. Remove ignition coil and spark plug of the cylinder to be checked.
9. Crank engine for 5 seconds or more to remove combustion gas in the cylinder.
10. Connect spark plug and harness connector to ignition coil.
11. Fix ignition coil using a rope etc. with gap of 13 - 17 mm (0.52 - 0.66 in) between the edge of the spark plug and grounded metal portion as shown in the figure.
12. Crank engine for approximately 3 seconds, and check whether spark is generated between the spark plug and the grounded metal portion.

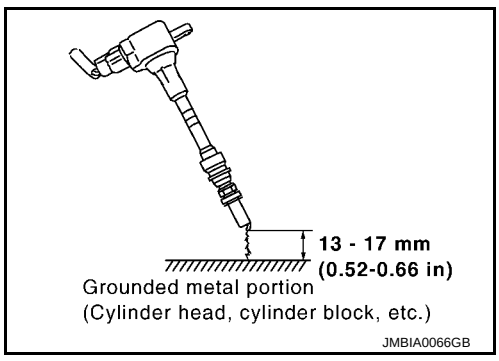

Spark should be generated.

CAUTION:
- **During the operation, always stay 0.5 m (19.7 in) or more away from the spark plug and the ignition coil. Be careful not to get an electrical shock while checking, because the electrical discharge voltage becomes 20 kV or more.**
- **It might cause to damage the ignition coil if the gap of more than 17 mm (0.66 in) is taken.**

NOTE:
When the gap is less than 13 mm (0.52 in), the spark might be generated even if the coil is malfunctioning.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace malfunctioning ignition coil with power transistor. Refer to EM-54, "Exploded View".

cardiagn.com

Component Inspection (Condenser)

INFOID:0000000012406660

1. CHECK CONDENSER

1. Turn ignition switch OFF.
2. Disconnect condenser harness connector.
3. Check resistance between condenser terminals as per the following.

Terminals	Resistance
1 and 2	Above 1 MΩ [at 25C° (77C°)]

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace condenser.

cardiagn.com

INFORMATION DISPLAY (ASCD)

Component Function Check

INFOID:0000000012406661

1.CHECK INFORMATION DISPLAY

1. Start engine.
2. Press MAIN switch on ASCD steering switch.
3. Drive the vehicle at more than 40 km/h (25 MPH).
   CAUTION:
   Always drive vehicle at a safe speed.
4. Press SET/COAST switch.
5. Check that the reading of the speedometer shows the same value as the set speed indicated in the information display while driving the vehicle on a flat road.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-489, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406662

1.CHECK DTC

Check that DTC UXXXX, P0500 or P1574 is not displayed.

Is the inspection result normal?

YES >> GO TO 2.
NO-1 >> Perform trouble diagnosis for DTC UXXXX.
NO-2 >> Perform trouble diagnosis for DTC P0500. Refer to EC-351, "DTC Logic".
NO-3 >> Perform trouble diagnosis for DTC P1574. Refer to EC-419, "DTC Logic".

2.CHECK DTC WITH COMBINATION METER

Check combination meter function. Refer to MWI-36, "CONSULT Function".

Is the inspection result normal?

YES >> GO TO 3.
NO >> Perform trouble diagnosis for DTC indicated.

3.CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace combination meter. Refer to MWI-96, "Removal and Installation".
NO >> Repair or replace.

cardiagn.com

MALFUNCTION INDICATOR LAMP

Component Function Check

INFOID:0000000012406663

1.CHECK MIL FUNCTION

1. Turn ignition switch ON.
2. Check that MIL illuminates.

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-490, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406664

1.CHECK DTC

Check that DTC UXXXX is not displayed.

Is the inspection result normal?

YES >> GO TO 2.
NO >> Perform trouble diagnosis for DTC UXXXX.

2.CHECK COMBINATION METER FUNCTION

Check combination meter function. Refer to MWI-36, "CONSULT Function".

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair or replace.

3.CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace combination meter. Refer to MWI-96, "Exploded View".
NO >> Repair or replace error-detected parts.

cardiagn.com

ON BOARD REFUELING VAPOR RECOVERY (ORVR)

Component Function Check

INFOID:0000000012406665

1.CHECK ORVR FUNCTION

Check whether the following symptoms are present.
- Fuel odor from EVAP canister is strong.
- Cannot refuel/Fuel odor from the fuel filler opening is strong while refueling.

Are any symptoms present?

YES >> Proceed to EC-491, "Diagnosis Procedure".
NO >> INSPECTION END

Diagnosis Procedure

INFOID:0000000012406666

1.INSPECTION START

Check whether the following symptoms are present.
A: Fuel odor from EVAP canister is strong.
B: Cannot refuel/Fuel odor from the fuel filler opening is strong while refueling.

A or B

A >> GO TO 2.
B >> GO TO 7.

2.CHECK EVAP CANISTER

1. Remove EVAP canister with EVAP canister vent control valve and EVAP control system pressure sensor attached. Refer to FL-17, "Exploded View".
2. Weigh the EVAP canister with EVAP canister vent control valve and EVAP control system pressure sensor attached.
   The weight should be less than 2.1 kg (4.6 lb).

Is the inspection result normal?


YES >> GO TO 3.
NO >> GO TO 4.

3.CHECK IF EVAP CANISTER IS SATURATED WITH WATER

Check if water will drain from EVAP canister

Does water drain from the EVAP canister?

YES >> GO TO 4.
NO >> GO TO 6.

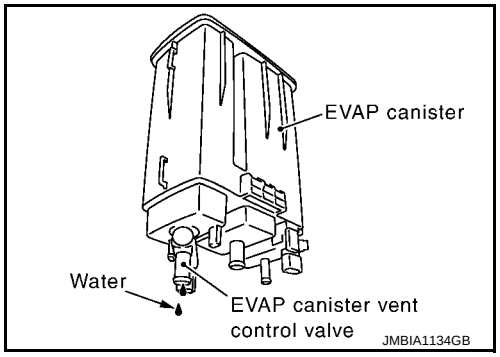

4.REPLACE EVAP CANISTER

Replace EVAP canister with a new one. Refer to FL-17, "Exploded View".

>> GO TO 5.

5.DETECT MALFUNCTIONING PART

Check the EVAP hose between EVAP canister and vehicle frame for clogging or poor connection.

>> Repair or replace EVAP hose. Refer to EM-29, "Exploded View".

6.CHECK REFUELING EVAP VAPOR CUT VALVE

Check refueling EVAP vapor cut valve. Refer to EC-493, "Component Inspection".

cardiagn.com

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace refueling EVAP vapor cut valve with fuel tank. Refer to FL-13, "Exploded View".

7. CHECK EVAP CANISTER

1. Remove EVAP canister with EVAP canister vent control valve and EVAP control system pressure sensor attached. Refer to FL-17, "Exploded View".
2. Weigh the EVAP canister with EVAP canister vent control valve and EVAP control system pressure sensor attached.
   The weight should be less than 2.1 kg (4.6 lb).

Is the inspection result normal?


YES >> GO TO 8.
NO >> GO TO 9.

8. CHECK IF EVAP CANISTER IS SATURATED WITH WATER

Check if water will drain from EVAP canister.

Does water drain from the EVAP canister?

YES >> GO TO 6.
NO >> GO TO 11.

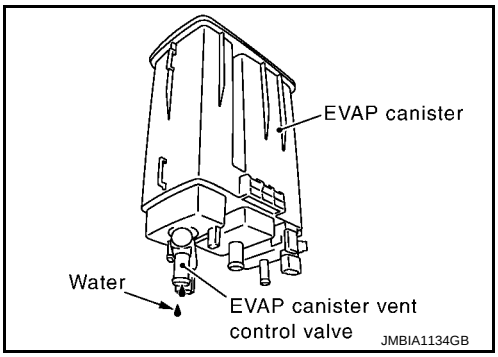

9. REPLACE EVAP CANISTER

Replace EVAP canister with a new one. Refer to FL-17, "Exploded View".

>> GO TO 10.

10. DETECT MALFUNCTIONING PART

Check the EVAP hose between EVAP canister and vehicle frame for clogging or poor connection.

>> Repair or replace EVAP hose. Refer to EM-29, "Exploded View".

11. CHECK VENT HOSES AND VENT TUBES

Check hoses and tubes between EVAP canister and refueling control valve for clogging, kinks, looseness and improper connection.

Is the inspection result normal?

YES >> GO TO 12.
NO >> Repair or replace hoses and tubes.

12. CHECK FILLER NECK TUBE

Check recirculation line for clogging, dents and cracks.

Is the inspection result normal?

YES >> GO TO 13.
NO >> Replace filler neck tube.

13. CHECK REFUELING EVAP VAPOR CUT VALVE

Check refueling EVAP vapor cut valve. Refer to EC-493, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 14.
NO >> Replace refueling EVAP vapor cut valve with fuel tank. Refer to FL-13, "Exploded View".

14. CHECK FUEL FILLER TUBE

Check filler neck tube and hose connected to the fuel tank for clogging, dents and cracks.

cardiagn.com

Is the inspection result normal?

YES >> GO TO 15.
NO >> Replace fuel filler tube. Refer to FL-13, "Exploded View".

15. CHECK ONE-WAY FUEL VALVE-I


Check one-way valve for clogging.

Is the inspection result normal?

YES >> GO TO 16.
NO >> Repair or replace one-way fuel valve with fuel tank. Refer to FL-13, "Exploded View".

16. CHECK ONE-WAY FUEL VALVE-II

1. Check that fuel is drained from the tank.
2. Remove fuel filler tube and hose. Refer to FL-13, "Exploded View".
3. Check one-way fuel valve for operation as per the following.
   When a stick is inserted, the valve should open, when removing stick it should close.
   Do not drop any material into the tank.

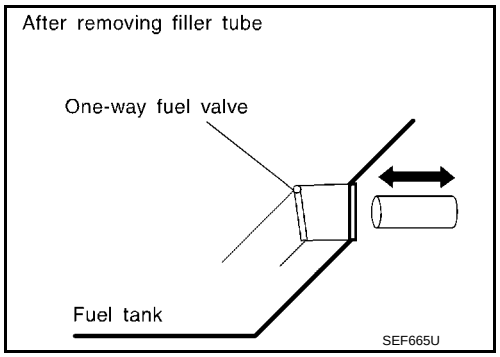

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace fuel filler tube or replace one-way fuel valve with fuel tank. Refer to FL-13, "Exploded View".

Component Inspection

INFOID:0000000012406667

1. INSPECTION START

Will CONSULT be used?

Will CONSULT be used?

YES >> GO TO 2.
NO >> GO TO 3.

2. CHECK REFUELING EVAP VAPOR CUT VALVE

With CONSULT

1. Turn ignition switch OFF.
2. Remove fuel tank. Refer to FL-13, "Exploded View".
3. Drain fuel from the tank as per the following:

- Remove fuel feed hose located on the fuel gauge retainer. Refer to EM-49, "Exploded View".
- Connect a spare fuel hose, one side to fuel gauge retainer where the hose was removed and the other side to a fuel container.
- Drain fuel using “FUEL PUMP RELAY” in “ACTIVE TEST” mode with CONSULT.

4. Check refueling EVAP vapor cut valve for being stuck to close as per the following.
   Blow air into the refueling EVAP vapor cut valve (from the end of EVAP/ORVR line hose), and check that the air flows freely into the tank.
5. Check refueling EVAP vapor cut valve for being stuck to open as per the following.


- Connect vacuum pump to hose end.
- Remove fuel gauge retainer with fuel gauge unit.

Always replace O-ring with new one.

- Turn fuel tank upside down.

cardiagn.com

- Apply vacuum pressure to hose end [−13.3 kPa (−0.136 kg/cm^2, −1.93 psi)] with fuel gauge retainer remaining open and check that the pressure is applicable.

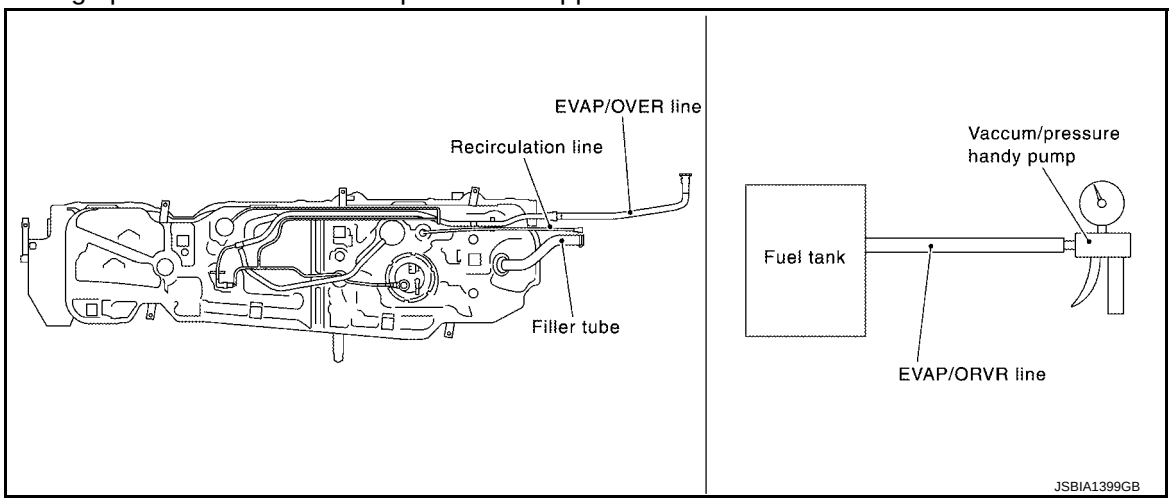

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace refueling EVAP vapor cut valve with fuel tank. Refer to FL-13, "Exploded View".


3. CHECK REFUELING EVAP VAPOR CUT VALVE

Without CONSULT

1. Turn ignition switch OFF.
2. Remove fuel tank. Refer to FL-13, "Exploded View".
3. Drain fuel from the tank as per the following:
- Remove fuel gauge retainer.
- Drain fuel from the tank using a handy pump into a fuel container.
4. Check refueling EVAP vapor cut valve for being stuck to close as per the following.
   Blow air into the refueling EVAP vapor cut valve (from the end of EVAP/ORVR line hose), and check that the air flows freely into the tank.
5. Check refueling EVAP vapor cut valve for being stuck to open as per the following.
- Connect vacuum pump to hose end.
- Remove fuel gauge retainer with fuel gauge unit.

Always replace O-ring with new one.

- Turn fuel tank upside down.
- Apply vacuum pressure to hose end [−13.3 kPa (−0.136 kg/cm^2, −1.93 psi)] with fuel gauge retainer remaining open and check that the pressure is applicable.

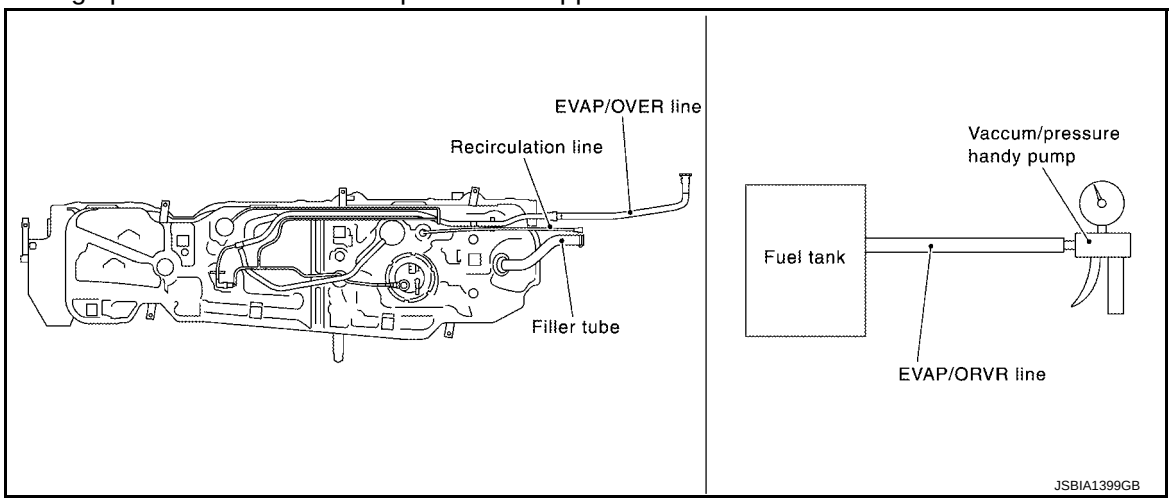

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace refueling EVAP vapor cut valve with fuel tank. Refer to FL-13, "Exploded View".

cardiagn.com

REFRIGERANT PRESSURE SENSOR

Component Function Check

INFOID:0000000012406668

1.CHECK REFRIGERANT PRESSURE SENSOR FUNCTION

1. Start engine and warm it up to normal operating temperature.
2. Turn A/C switch and blower fan switch ON.
3. Check the voltage between ECM harness connector terminals under the following conditions.

ECM			Voltage (V)
Connector	+	–	
	Terminal	Terminal	
F14	20 (Refrigerant pressure sensor signal)	25 (Sensor ground)	1.0 - 4.0

Is the inspection result normal?

YES >> INSPECTION END
NO >> Proceed to EC-495, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406669

1.CHECK REFRIGERANT PRESSURE SENSOR POWER SUPPLY

1. Disconnect refrigerant pressure sensor harness connector.
2. Turn ignition switch ON.
3. Check the voltage between refrigerant pressure sensor harness connector and ground.

Refrigerant pressure sensor		Ground	Voltage (V)
Connector	Terminal		
E300	1	Ground	Approx. 5

Is the inspection result normal?

YES >> GO TO 3.
NO >> GO TO 2.

2.CHECK REFRIGERANT PRESSURE SENSOR POWER SUPPLY CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between refrigerant pressure sensor harness connector and ECM harness connector.

Refrigerant pressure sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
E300	1	F14	18	Existed

Is the inspection result normal?

YES >> Perform the trouble diagnosis for power supply circuit.
NO >> Repair or replace error-detected parts.

3.CHECK REFRIGERANT PRESSURE SENSOR GROUND CIRCUIT FOR OPEN AND SHORT

1. Turn ignition switch OFF.
2. Disconnect ECM harness connector.
3. Check the continuity between refrigerant pressure sensor harness connector and ECM harness connector.

cardiagn.com

Refrigerant pressure sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
E300	3	F14	25	Existed

4. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 4.
NO >> Repair or replace error-detected parts.

4. CHECK REFRIGERANT PRESSURE SENSOR INPUT SIGNAL CIRCUIT FOR OPEN AND SHORT

1. Check the continuity between refrigerant pressure sensor harness connector and ECM harness connector.

Refrigerant pressure sensor		ECM		Continuity
Connector	Terminal	Connector	Terminal	
E300	2	F14	20	Existed

2. Also check harness for short to ground and short to power.

Is the inspection result normal?

YES >> GO TO 5.
NO >> Repair or replace error-detected parts.

5. CHECK INTERMITTENT INCIDENT

Check intermittent incident. Refer to GI-41, "Intermittent Incident".

Is the inspection result normal?

YES >> Replace refrigerant pressure sensor. Refer to HA-43, "Exploded View".
NO >> Repair or replace error-detected parts.

cardiagn.com

SENSOR POWER SUPPLY2 CIRCUIT

Description

INFOID:0000000012406670

ECM supplies a voltage of 5 V to some of the sensors systematically divided into 2 groups, respectively. Accordingly, when a short circuit develops in a sensor power source, a malfunction may occur simultaneously in the sensors belonging to the same group as the short-circuited sensor.

Sensor power supply 1

- Accelerator pedal position (APP) sensor 1
- Crankshaft position (CKP) sensor (POS)
- Exhaust valve timing (EVT) control position sensor
- Mass air flow (MAF) sensor
- Throttle position (TP) sensor

NOTE:
If sensor power supply 1 circuit is malfunctioning, DTC P0643 is displayed.

Sensor power supply 2

- Accelerator pedal position (APP) sensor 2
- Battery current sensor
- Camshaft position (CMP) sensor (PHASE)
- Engine oil pressure (EOP) sensor
- Refrigerant pressure sensor

Diagnosis Procedure

INFOID:0000000012406671

1. CHECK SENSOR POWER SUPPLY 1

1. Turn ignition switch OFF.
2. Disconnect ECM harness connectors
3. Turn ignition switch ON.
4. Check the voltage between ECM harness connector and ground.

+		–	Voltage (Approx.)
ECM			
Connector	Terminal		
E19	142	Ground	5 V
F14	18		
F15	87		
	92		

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".
NO >> GO TO 2.

2. CHECK SENSOR POWER SUPPLY 2 CIRCUIT

1. Turn ignition switch OFF.
2. Disconnect following sensors harness connector.
3. Check harness for short to power and short to ground, between the following terminals.

ECM		Sensor		
Connector	Terminal	Name	Connector	Terminal
E19	142	APP sensor 2	E110	5
F14	18	Refrigerant pressure sensor	E300	1
		EOP sensor	F67	3

cardiagn.com

ECM		Sensor		
Connector	Terminal	Name	Connector	Terminal
F15	87	Battery current sensor	F76	1
	92	CMP sensor (PHASE) (bank 1)	F45	1
		CMP sensor (PHASE) (bank 2)	F46	1

Is the inspection result normal?

YES >> GO TO 3.
NO >> Repair or replace error-detected parts.

3.CHECK COMPONENTS

Check the following.
- Accelerator pedal position (APP) sensor 2 (Refer to EC-454, "Component Inspection".)
- Battery current sensor (Refer to EC-397, "Component Inspection".)
- Camshaft position sensor (PHASE) (bank 1) (Refer to EC-303, "Component Inspection".)
- Camshaft position sensor (PHASE) (bank 2) (Refer to EC-303, "Component Inspection".)
- Engine oil pressure (EOP) sensor (Refer to EC-361, "Component Inspection".)
- Refrigerant pressure sensor (Refer to EC-495, "Diagnosis Procedure".)

Is the inspection result normal?

YES >> Perform GI-41, "Intermittent Incident".
NO >> Replace malfunctioning component.

cardiagn.com

VARIABLE INDUCTION AIR SYSTEM


Component Function Check

INFOID:0000000012406672

1. CHECK OVERALL FUNCTION-I

With CONSULT

1. Start engine and warm it up to the normal operating temperature.
2. Perform “VIAS S/V-1” in “ACTIVE TEST” mode with CONSULT.
3. Turn VIAS control solenoid valve 1 “ON” and “OFF”, and check that power valve actuator 1 rod moves.

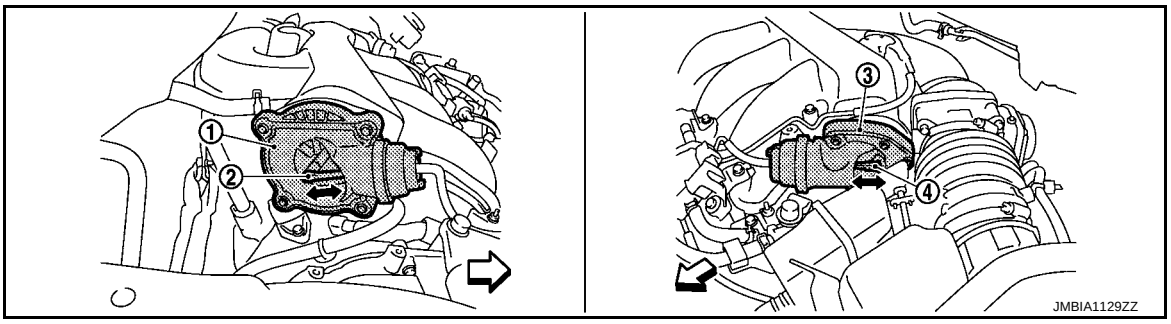


1. Power valve actuator 1
2. Power valve actuator 1 rod
3. Power valve actuator 2
4. Power valve actuator 2 rod

⇦ : Vehicle front

Without CONSULT

1. Start engine and warm it up to the normal operating temperature.
2. Rev engine quickly up to approximately 5,000 rpm.
3. Check that power valve actuator 1 rod moves.

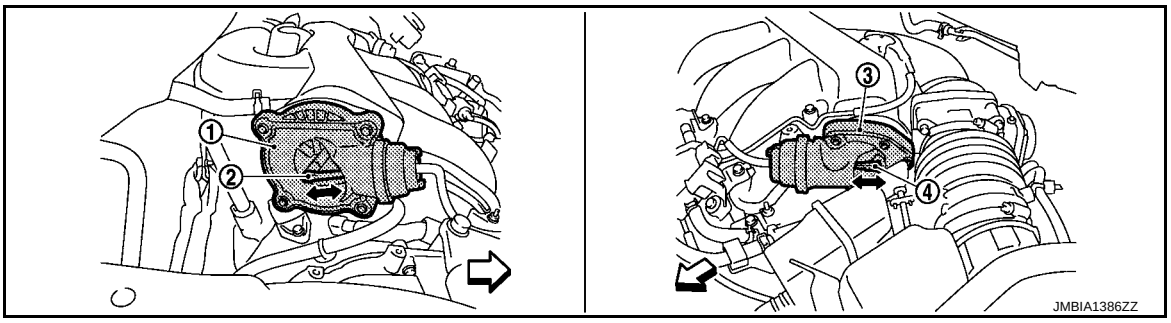

1. Power valve actuator 1
2. Power valve actuator 1 rod
3. Power valve actuator 2
4. Power valve actuator 2 rod

⇦ : Vehicle front

Is the inspection result normal?


YES >> GO TO 2.
NO >> EC-500, "Diagnosis Procedure".

2. CHECK OVERALL FUNCTION-II

With CONSULT

1. Perform “VIAS S/V-2” in “ACTIVE TEST” mode with CONSULT.
2. Turn VIAS control solenoid valve 2 “ON” and “OFF”, and check that power valve actuator 2 rod moves.


cardiagn.com

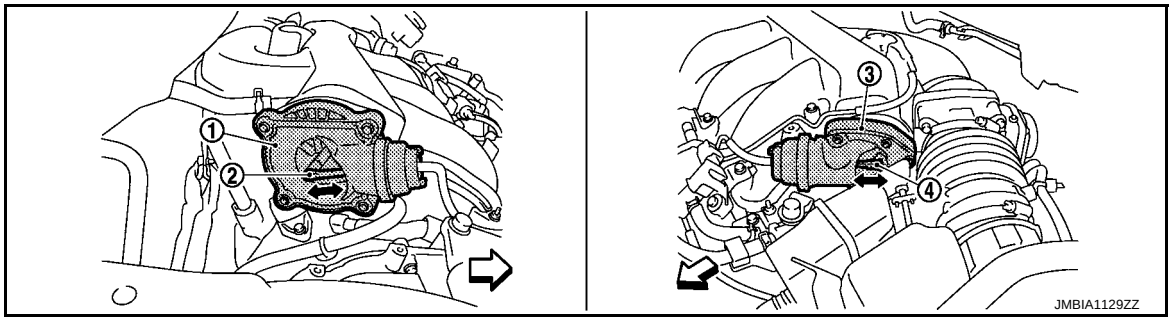

1. Power valve actuator 1
2. Power valve actuator 1 rod
3. Power valve actuator 2
4. Power valve actuator 2 rod
⇦ : Vehicle front

Without CONSULT

1. When revving engine up to 5,000 rpm quickly.
2. Rev engine quickly up to approximately 5,000 rpm.
3. Check that power valve actuator 2 rod moves.

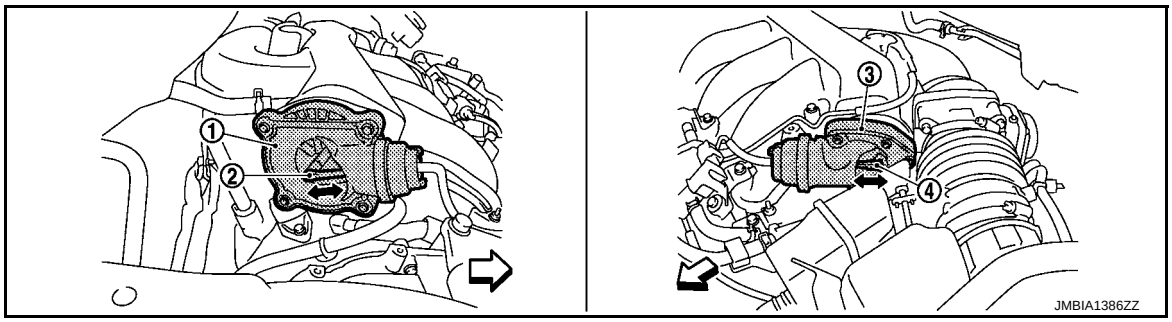

1. Power valve actuator 1
2. Power valve actuator 1 rod
3. Power valve actuator 2
4. Power valve actuator 2 rod
⇦ : Vehicle front

Is the inspection result normal?

YES >> INSPECTION END
NO >> EC-500, "Diagnosis Procedure".

Diagnosis Procedure

INFOID:0000000012406673

1. INSPECTION START

Confirm the malfunctioning system (power valve 1 or power valve 2). Refer to EC-499, "Component Function Check".

Which system is related to the incident?

Power valve 1>>GO TO 2.
Power valve 2>>GO TO 6.

2. CHECK VACUUM EXISTENCE-I

With CONSULT

1. Stop engine and disconnect vacuum hose connected to power valve actuator 1.
2. Start engine and let it idle.
3. Perform “VIAS S/V-1” in “ACTIVE TEST” mode with CONSULT.
4. Turn VIAS control solenoid valve 1 ON and OFF, and check vacuum existence under the following conditions.

cardiagn.com

VIAS S/V-1	Vacuum
ON	Existed
OFF	Not existed

Without CONSULT

1. Stop engine and disconnect vacuum hose connected to power valve actuator 1.
2. Disconnect VIAS control solenoid valve 1 harness connector.
3. Start engine.
4. Rev engine quickly up to approximately 5,000 rpm.
5. Check vacuum existence under the following conditions.

Condition	Vacuum
Idle	Existed
Rev engine quickly up to approximately 5,000 rpm	Not existed

Is the inspection result normal?

YES >> Repair or replace power valve actuator 1. Refer to EC-17, "ENGINE CONTROL SYSTEM : Component Parts Location".

NO >> GO TO 3.

3. CHECK VACUUM TANK

1. Stop engine and disconnect vacuum hose connected to intake manifold collector.
2. Start engine and let it idle.
3. Check vacuum existence from intake manifold collector.


Does vacuum existence from the intake manifold collector?

YES >> GO TO 4.

NO >> Replace intake manifold collector. Refer to EM-29, "Exploded View".

4. CHECK VACUUM HOSE

1. Stop engine.
2. Check vacuum hose for crack, clogging, improper connection or disconnection. Refer to EC-56, "VARIABLE INDUCTION AIR SYSTEM : System Description".

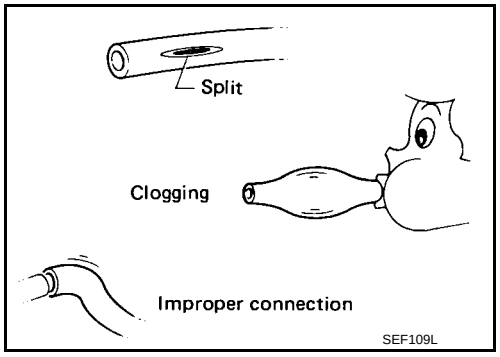

Is the inspection result normal?

YES >> GO TO 5.

NO >> Repair hoses or tubes.

5. CHECK VIAS CONTROL SOLENOID VALVE 1

Check VIAS control solenoid valve 1. Refer to EC-432, "Component Inspection".

Is the inspection result normal?

YES >> GO TO 8.

NO >> Replace VIAS control solenoid valve 1. Refer to EM-29, "Exploded View".

6. CHECK VACUUM EXISTENCE-II

With CONSULT

1. Stop engine and disconnect vacuum hose connected to power valve actuator 2.
2. Start engine and let it idle.
3. Perform “VIAS S/V-2” in “ACTIVE TEST” mode with CONSULT.
4. Turn VIAS control solenoid valve 2 ON and OFF, and check vacuum existence under the following conditions.

cardiagn.com

VIAS S/V 2	Vacuum
ON	Existed
OFF	Not existed

Without CONSULT

1. Stop engine and disconnect vacuum hose connected to power valve actuator 2.
2. Disconnect VIAS control solenoid valve 1 harness connector.
3. Start engine.
4. Rev engine quickly up to approximately 5,000 rpm.
5. Check vacuum existence under the following conditions.

Condition	Operation
Idle	Existed
Rev engine quickly up to approximately 5,000 rpm	Not existed


Is the inspection result normal?

YES >> Repair or replace power valve actuator 2. Refer to EC-17, "ENGINE CONTROL SYSTEM : Component Parts Location".

NO >> GO TO 7.

7. CHECK VACUUM HOSE

1. Stop engine.
2. Check vacuum hose for crack, clogging, improper connection or disconnection. Refer to EC-56, "VARIABLE INDUCTION AIR SYSTEM : System Description".

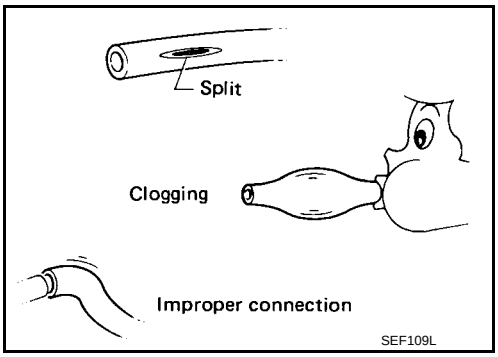

Is the inspection result normal?

YES >> GO TO 8.

NO >> Repair hoses or tubes.

8. CHECK VIAS CONTROL SOLENOID VALVE 2

Check VIAS control solenoid valve 2. Refer to EC-434, "Component Inspection".

Is the inspection result normal?

YES >> Check intermittent incident. Refer to GI-41, "Intermittent Incident".

NO >> Replace VIAS control solenoid valve 2. Refer to EM-29, "Exploded View".

cardiagn.com

SYMPTOM DIAGNOSIS

ENGINE CONTROL SYSTEM SYMPTOMS

Symptom Table

INFOID:0000000012406674

SYSTEM — BASIC ENGINE CONTROL SYSTEM

		SYMPTOM													Reference page
		HARD/NO START/RESTART (EXCP. HA)	ENGINE STALL	HESITATION/SURGING/FLAT SPOT	SPARK KNOCK/DETONATION	LACK OF POWER/POOR ACCELERATION	HIGH IDLE/LOW IDLE	ROUGH IDLE/HUNTING	IDLING VIBRATION	SLOW/NO RETURN TO IDLE	OVERHEATS/WATER TEMPERATURE HIGH	EXCESSIVE FUEL CONSUMPTION	EXCESSIVE OIL CONSUMPTION	BATTERY DEAD (UNDER CHARGE)	
Warranty symptom code		AA	AB	AC	AD	AE	AF	AG	AH	AJ	AK	AL	AM	HA	
Fuel	Fuel pump circuit	1	1	2	3	2		2	2			3		2	EC-482
	Fuel pressure regulator system	3	3	4	4	4	4	4	4	4		4			EC-153
	Fuel injector circuit	1	1	2	3	2		2	2			2			EC-479
	Evaporative emission system	3	3	4	4	4	4	4	4	4		4			EC-51
Air	Positive crankcase ventilation system	3	3	4	4	4	4	4	4	4		4	1		EC-32
	Incorrect idle speed adjustment						1	1	1	1		1			EC-141
	Electric throttle control actuator	1	1	2	3	3	2	2	2	2		2		2	EC-443, EC-448
Ignition	Incorrect ignition timing adjustment	3	3	1	1	1		1	1			1			EC-141
	Ignition circuit	1	1	2	2	2		2	2			2			EC-484
Power supply and ground circuit		2	2	3	3	3		3	3		2	3			EC-175
Mass air flow sensor circuit		1			2										EC-201, EC-206
Engine coolant temperature sensor circuit					3		3			3					EC-217, EC-222
Air fuel ratio (A/F) sensor 1 circuit			1	2		2		2	2			2			EC-229, EC-233, EC-236, EC-261, EC-437
Throttle position sensor circuit							2			2					EC-219, EC-287, EC-394, EC-395, EC-455
Accelerator pedal position sensor circuit				3	2	1									EC-379, EC-450, EC-452, EC-457

cardiagn.com

	SYMPTOM													Reference page
	HARD/NO START/RESTART (EXCP. HA)	ENGINE STALL	HESITATION/SURGING/FLAT SPOT	SPARK KNOCK/DETONATION	LACK OF POWER/POOR ACCELERATION	HIGH IDLE/LOW IDLE	ROUGH IDLE/HUNTING	IDLING VIBRATION	SLOW/NO RETURN TO IDLE	OVERHEATS/WATER TEMPERATURE HIGH	EXCESSIVE FUEL CONSUMPTION	EXCESSIVE OIL CONSUMPTION	BATTERY DEAD (UNDER CHARGE)	
Warranty symptom code	AA	AB	AC	AD	AE	AF	AG	AH	AJ	AK	AL	AM	HA	
Knock sensor circuit			2								3			EC-296
Engine oil temperature sensor			4		2						3			EC-281, EC-285
Crankshaft position sensor (POS) circuit	2	2												EC-298
Camshaft position sensor (PHASE) circuit	3	2												EC-301
Vehicle speed signal circuit		2	3		3						3			EC-351
ECM	2	2	3	3	3	3	3	3	3	3	3			—
Intake valve timing control solenoid valve circuit		3	2		1	3	2	2	3		3			EC-196
Intake valve timing intermediate lock control solenoid valve circuit														EC-366
Exhaust valve timing control solenoid valve		3	2		1	3	2	2	3		3			EC-198
PNP signal circuit			3		3		3	3			3			EC-381
VIAS control solenoid valve 1 circuit					1									EC-431
VIAS control solenoid valve 2 circuit					1									EC-433
Refrigerant pressure sensor circuit		2				3			3		4			EC-495
Electrical load signal circuit							3							EC-474
Air conditioner circuit	2	2	3	3	3	3	3	3	3		3		2	HAC-56
ABS actuator and electric unit (control unit)			4											BRC-30

1 - 6: The numbers refer to the order of inspection.

(continued on next page)

SYSTEM — ENGINE MECHANICAL & OTHER

cardiagn.com

		SYMPTOM													Reference page
		HARD/NO START/RESTART (EXCP. HA)	ENGINE STALL	HESITATION/SURGING/FLAT SPOT	SPARK KNOCK/DETONATION	LACK OF POWER/POOR ACCELERATION	HIGH IDLE/LOW IDLE	ROUGH IDLE/HUNTING	IDLING VIBRATION	SLOW/NO RETURN TO IDLE	OVERHEATS/WATER TEMPERATURE HIGH	EXCESSIVE FUEL CONSUMPTION	EXCESSIVE OIL CONSUMPTION	BATTERY DEAD (UNDER CHARGE)	
Warranty symptom code		AA	AB	AC	AD	AE	AF	AG	AH	AJ	AK	AL	AM	HA	
Fuel	Fuel tank	5	5												FL-14
	Fuel piping			5	5	5		5	5			5			MA-16
	Vapor lock														—
	Valve deposit	5		5	5	5		5	5			5			—
	Poor fuel (Heavy weight gasoline, Low octane)														—
Air	Air duct		5	5		5		5	5			5			EM-27
	Air cleaner														EM-27
	Air leakage from air duct (Mass air flow sensor — electric throttle control actuator)	5			5		5			5					EM-27
	Electric throttle control actuator														EM-30
	Air leakage from intake manifold/ Collector/Gasket														EM-30, EM-32
Cranking	Battery	1	1	1		1		1	1			1		1	PG-136
	Generator circuit														CHG-18
	Starter circuit	3													STR-11, STR-14
	Signal plate	6													EM-104
	PNP signal	4													TM-94
Engine	Cylinder head	5	5	5	5	5		5	5			5			EM-97
	Cylinder head gasket										4		3		
	Cylinder block	6	6	6	6	6		6	6			6	4		EM-109
	Piston														
	Piston ring														
	Connecting rod														
	Bearing														
	Crankshaft														

cardiagn.com

		SYMPTOM													Reference page
		HARD/NO START/RESTART (EXCP. HA)	ENGINE STALL	HESITATION/SURGING/FLAT SPOT	SPARK KNOCK/DETONATION	LACK OF POWER/POOR ACCELERATION	HIGH IDLE/LOW IDLE	ROUGH IDLE/HUNTING	IDLING VIBRATION	SLOW/NO RETURN TO IDLE	OVERHEATS/WATER TEMPERATURE HIGH	EXCESSIVE FUEL CONSUMPTION	EXCESSIVE OIL CONSUMPTION	BATTERY DEAD (UNDER CHARGE)	
Warranty symptom code		AA	AB	AC	AD	AE	AF	AG	AH	AJ	AK	AL	AM	HA	
Valve mechanism	Timing chain	5	5	5	5	5		5	5			5			EM-85
	Camshaft														EM-88
	Intake valve timing control														EM-69
	Exhaust valve timing control														
	Intake valve												3		EM-97
	Exhaust valve														
Exhaust	Exhaust manifold/Tube/Muffler/Gasket	5	5	5	5	5		5	5			5			EM-34, EX-4
	Three way catalyst														
Lubrication	Oil pan/Oil strainer/Oil pump/Oil filter/Oil gallery/Oil cooler	5	5	5	5	5		5	5			5			LU-8, LU-11, LU-12, LU-14
	Oil level (Low)/Filthy oil														LU-8
Cooling	Radiator/Hose/Radiator filler cap	5	5	5	5	5		5	5		4	5			CO-13
	Thermostat									5					CO-25
	Water pump														CO-20
	Water gallery														CO-2
	Cooling fan									5					CO-18
	Coolant level (Low)/Contaminated coolant														CO-9
NVIS (NISSAN Vehicle Immobilizer System — NATS)		1	1												SEC-15

1 - 6: The numbers refer to the order of inspection.

cardiagn.com

NORMAL OPERATING CONDITION

Description

INFOID:0000000012406675

FUEL CUT CONTROL (AT NO LOAD AND HIGH ENGINE SPEED)

If the engine speed is above 2,000 rpm under no load (for example, the selector lever position is P or N and engine speed is over 2,000 rpm) fuel will be cut off after some time. The exact time when the fuel is cut off varies based on engine speed.

Fuel cut will be operated until the engine speed reaches 1,100 rpm, then fuel cut will be cancelled.

NOTE:

This function is different from deceleration control listed under Multiport Fuel Injection (MFI) System, EC-42, "MULTIPORT FUEL INJECTION SYSTEM : System Description".

cardiagn.com

PERIODIC MAINTENANCE

IDLE SPEED

Work Procedure

INFOID:0000000012406676

1.CHECK IDLE SPEED

With CONSULT
Check idle speed in “DATA MONITOR” mode with CONSULT.
With GST
Check idle speed with Service $01 of GST.

>> INSPECTION END

cardiagn.com


IGNITION TIMING

Work Procedure

INFOID:0000000012406677


1.CHECK IGNITION TIMING

1. Attach timing light to loop wires as shown.
- Timing light (A)
- ⇦: Vehicle front

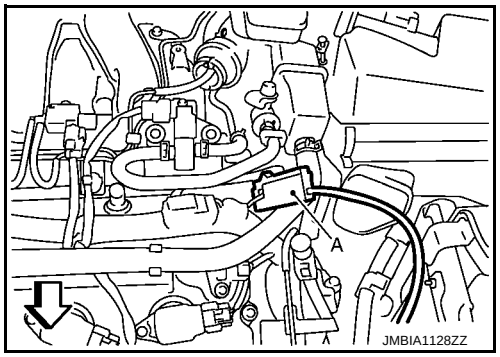

2. Check ignition timing.

>> INSPECTION END

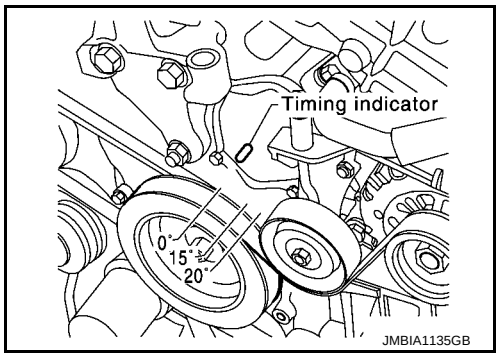

cardiagn.com

EVAP LEAK CHECK

Work Procedure


INFOID:0000000012406678


CAUTION:
- **Never use compressed air or a high pressure pump.**
- **Never exceed 4.12 kPa (0.042 kg/cm^2, 0.6 psi) of pressure in EVAP system.**

NOTE:
- Do not start engine.
- Improper installation of EVAP service port adapter (commercial service tool) to the EVAP service port may cause a leakage.

WITH CONSULT


1. To locate the EVAP leakage, install EVAP service port adapter (commercial service tool) and pressure pump to EVAP service port.
2. Turn ignition switch ON.
3. Select the “EVAP SYSTEM CLOSE” of “WORK SUPPORT MODE” with CONSULT.
4. Touch “START”. A bar graph (Pressure indicating display) will appear on the screen.
5. Apply positive pressure to the EVAP system until the pressure indicator reaches the middle of the bar graph.
6. Remove EVAP service port adapter (commercial service tool) and hose with pressure pump.
7. Locate the leakage using a leakage detector (commercial service tool). Refer to EC-51, "EVAPORATIVE EMISSION SYSTEM : System Description".

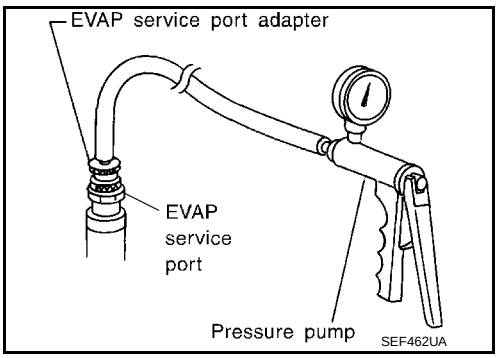

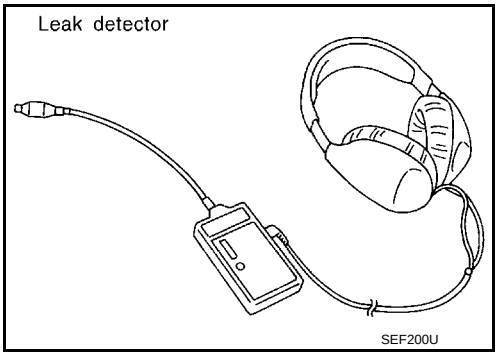


WITHOUT CONSULT

1. To locate the EVAP leakage, install EVAP service port adapter (commercial service tool) and pressure pump to EVAP service port.
2. Apply battery voltage between the terminals of EVAP canister vent control valve to make a closed EVAP system.
3. To locate the leakage, deliver positive pressure to the EVAP system until pressure gauge points reach 1.38 to 2.76 kPa (0.014 to 0.028 kg/cm^2, 0.2 to 0.4 psi).
4. Remove EVAP service port adapter (commercial service tool) and hose with pressure pump.

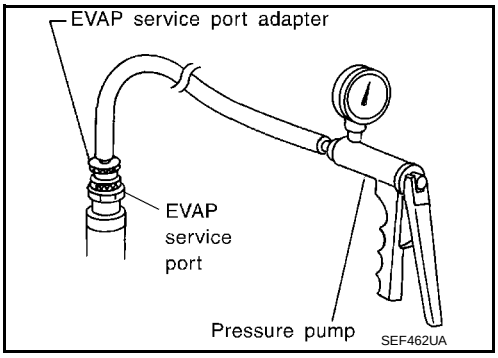

cardiagn.com

5. Locate the leakage using a leak detector (commercial service tool). Refer to EC-51, "EVAPORATIVE EMISSION SYSTEM : System Description".

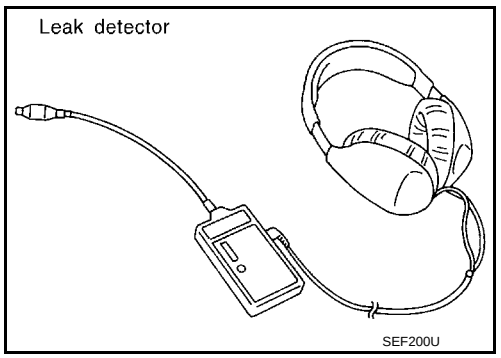

cardiagn.com


POSITIVE CRANKCASE VENTILATION

Work Procedure

INFOID:0000000012406679

1.CHECK PCV VALVE

With engine running at idle, remove PCV valve from rocker cover. A properly working valve makes a hissing noise as air passes through it. A strong vacuum should be felt immediately when a finger is placed over valve inlet.

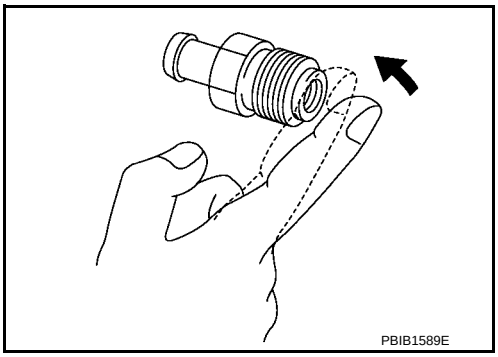

Is the inspection result normal?

YES >> INSPECTION END
NO >> Replace PCV valve. Refer to .EM-54, "Exploded View"

cardiagn.com

REMOVAL AND INSTALLATION

ECM


Removal and Installation

INFOID:0000000012406680

CAUTION:
Perform ADDITIONAL SERVICE WHEN REPLACING ECM. Refer to EC-145, "Description".

REMOVAL

1. Remove battery. Refer to PG-136, "Exploded View".
2. Disconnect ECM harness connectors. Refer to PG-6, "Harness Connector".
3. Remove ECM mounting nuts (1), and then remove ECM (A).

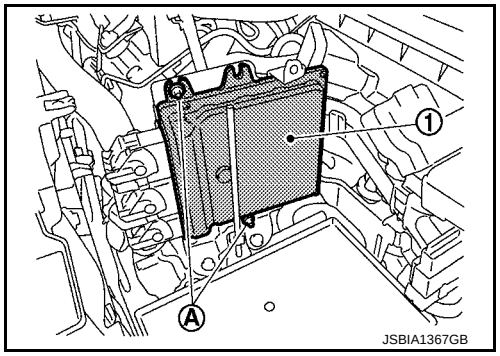

INSTALLATION
Install in the reverse order of removal.

cardiagn.com

SERVICE DATA AND SPECIFICATIONS (SDS)

SERVICE DATA AND SPECIFICATIONS (SDS)

Idle Speed

INFOID:0000000012406681

Condition	Specification
No load* (in P or N position)	650 ± 50 rpm

*: Under the following conditions

- A/C switch: OFF
- Electric load: OFF (Lights, heater fan & rear window defogger)
- Steering wheel: Kept in straight-ahead position

Ignition Timing

INFOID:0000000012406682

Condition	Specification
No load* (in P or N position)	12 ± 2° BTDC

*: Under the following conditions

- A/C switch: OFF
- Electric load: OFF (Lights, heater fan & rear window defogger)
- Steering wheel: Kept in straight-ahead position

Calculated Load Value

INFOID:0000000012406683

Condition	Specification (Using CONSULT or GST)
At idle	10 – 35 %
At 2,500 rpm	10 – 35 %

Mass Air Flow Sensor

INFOID:0000000012406684

Supply voltage	Battery voltage (11 – 14 V)
Output frequency at idle (in N position)	4,100 – 4,700 Hz*
Mass air flow (Using CONSULT or GST)	2.0 – 6.0 g/s at idle* 7.0 – 20.0 g/s at 2,500 rpm*

*: Engine is warmed up to normal operating temperature and running under no load.

cardiagn.com