

Index

5-speed 012

Adjustment overview

- adjustments, table of 39.77
- differential, removing 39.78
- pinion, determining position 39.78

Backlash

- adjusting 39.89
- average, calculating 39.89
- checking 39.91

Differential

- gears, installing 39.74

Differential bearing

- preload, adjusting 39.87
- turning torque, measuring 39.88

Differential bearing inner race

- large, removing 39.73
- small, removing 39.72

Differential bearing outer race

- large, removing 39.73
- small, removing/installing 39.72

Differential housing

- assembly 39.70

Drive flange

- oil seals, removing/installing 39.68
- shaft circlip, replacing 39.69

Gear carrier housing

- replacing 39.85

Pinion

- adjusting 39.80
- bearing preload, checking 39.81
- preload, adjusting 39.80

Ring gear/pinion, adjusting

- general notes 39.75
- overview 39.78

Ring gear

- adjusting 39.87
- removing 39.73

Shims


- positions 39.79
- S total (S1 + S2), determining 39.88
- S total (S3 + S4), determining 39.80
- S1 thickness, determining 39.91
- S2 thickness, determining 39.90
- S3 thickness, determining 39.83
- S4 thickness, determining 39.84

Differential – Manual Transmission

Drive flange oil seals, removing/ installing (transmission installed)


Removing

- remove axle shaft from drive flange
- place oil pan under vehicle
- remove flange shaft by placing chisel **A** under flange shaft and turning bolt **B** to pull shaft out
- remove oil seals with extractor lever **VW 681**
- replace flange shaft circlip. See page 39.69

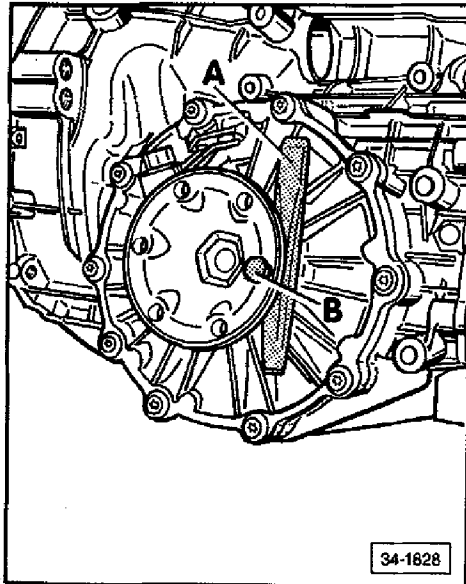


Installing

- drive in right side seal 5 mm (0.196 in.) below edge of housing

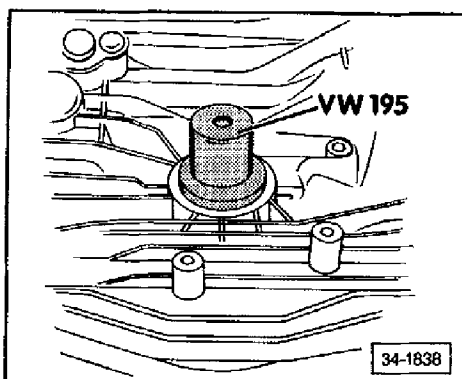


- drive in left side seal 5 mm below upper edge of final drive cover
- fill space between lips of seal with multi-purpose grease
- drive in flange shaft with **VW 295**
- bolt axle shaft to flange
 - M8 bolts 45 Nm (33 ft lb)
 - M10 bolts 80 Nm (59 ft lb)
- refill transmission oil

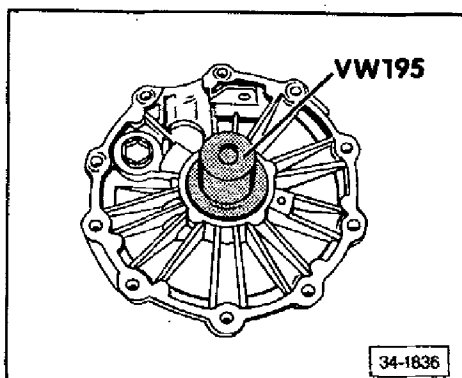


Flange shaft circlip, replacing

Always replace the flange shaft circlip before installing the flange shaft.

- clamp flange shaft in vice
- place opening of new circlip **A** over opening of old circlip in groove
- press circlip into groove with pliers while also pressing old circlip out

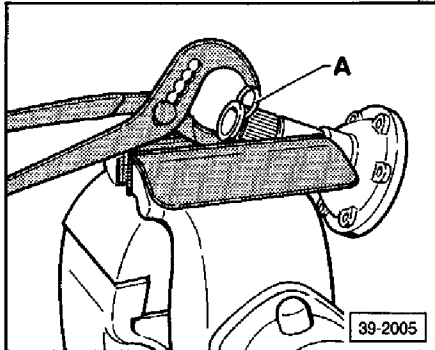

Differential – Manual Transmission

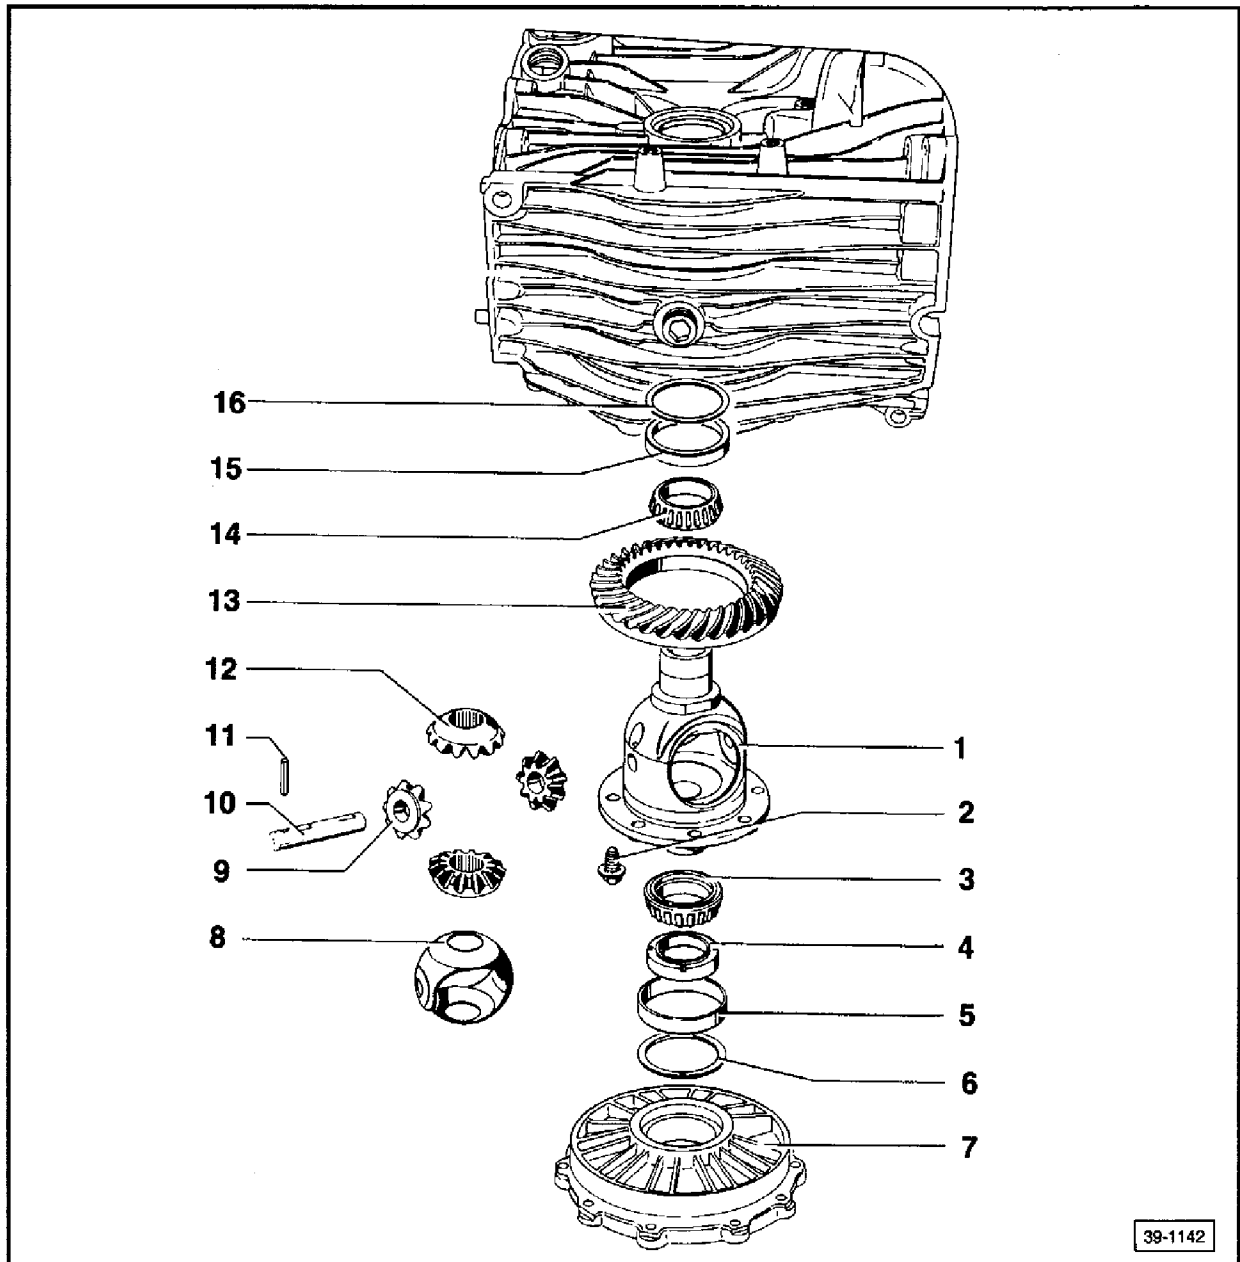


39-1142

- | | |
|--|--|
| <p>1 — Differential housing
adjust ring gear if replacing</p> <p>2 — Ring gear bolt
• use only part number specified
• tighten evenly in diagonal sequence, to 90 Nm (66 ft lb)</p> <p>3 — Differential bearing, large — inner race
• removing, Fig. 5
• press in with sleeve 40-21</p> <p>4 — Speedometer gear
can be removed with transmission installed</p> | <p>5 — Differential bearing, large — outer race
• removing, Fig. 6
• drive in with VW 295 and VW 551</p> <p>6 — Shim S1
• note thickness
• Adjustment Overview, page 39.77</p> <p>7 — Cover</p> <p>8 — Thrust washer
coat with transmission oil before installing</p> <p>9 — Differential pinion gears
installing, Fig. 7</p> |
|--|--|


- 10 — Differential pinion shaft**
 - drive out with drift after removing roll pin
- 11 — Roll pin**
 - drive out with drift
- 12 — Differential side gears**
 - installing, Fig. 7
- 13 — Ring gear**
 - drive pinion and ring gear are matched set
 - when replacing set, adjust (see Adjustment Overview, page 39.77)
 - removing, Fig. 4
 - installing: heat to 100°C (212°F) and use centering pins to guide part
- 14 — Differential bearing, small — inner race**
 - removing, Fig. 3
 - press in with sleeve 40-21
- 15 — Differential bearing, small — outer race**
 - removing, Fig. 1
 - installing, Fig. 2
- 16 — Shim S2**
 - note thickness
 - Adjustment Overview, page 39.77

Differential – Manual Transmission

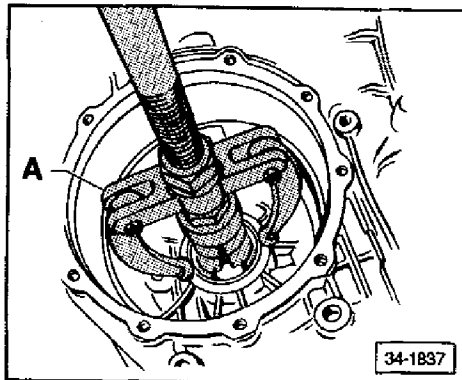


► Fig. 1 Differential bearing, small — outer race, removing

- use 46-56 mm puller, A — e.g. US 1037 (Kukko 21/7) or US 1039 (Kukko 22/2)

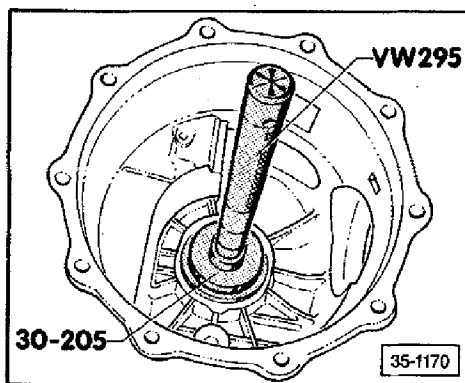


► Fig. 2 Differential bearing, small — outer race, installing

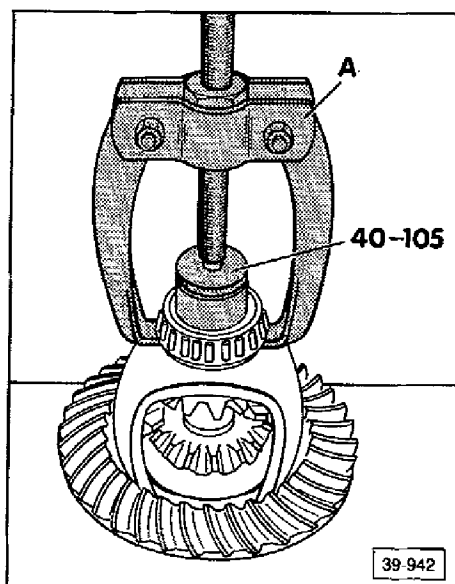


► Fig. 3 Differential bearing, small — inner race, removing

- A — two-arm puller, e.g. Kukko 44/2

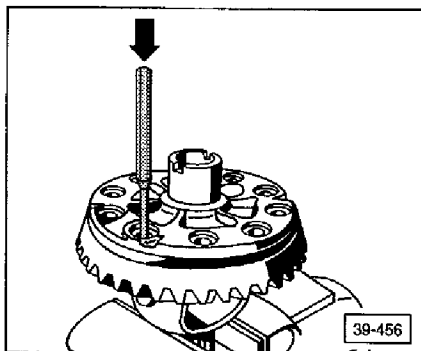


► Fig. 4 Ring gear, removing

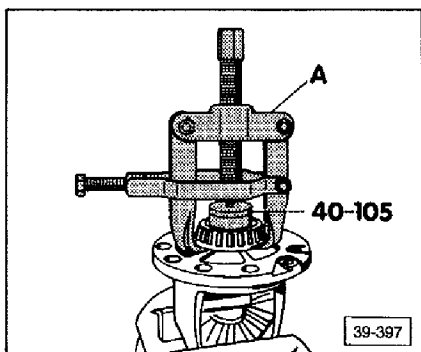

► Fig. 5 Differential bearing, large — inner race, removing


A — two-arm puller, e.g. Kukko 204/2

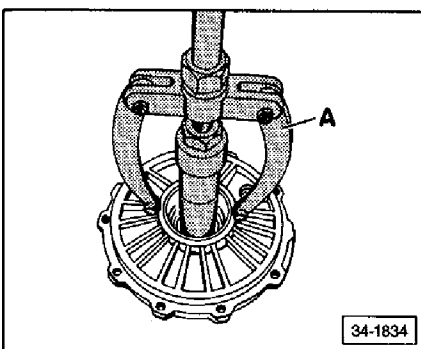

► Fig. 6 Differential bearing, large — outer race, removing

■ use 46-56 mm puller, A — e.g. US 1037 (Kukko 21/7) or US 1039 (Kukko 22/2)

Differential – Manual Transmission

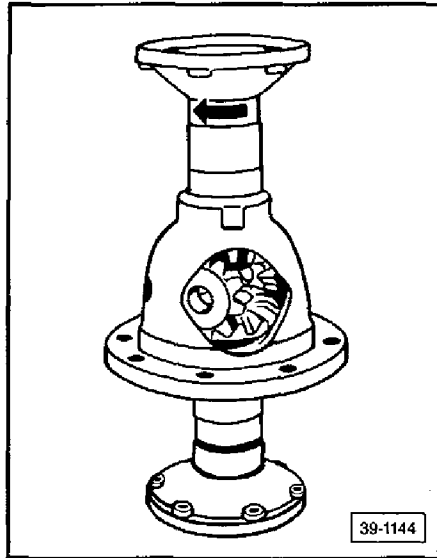

► Fig. 7 Differential gears, installing


- install one-piece thrust washer coated with transmission oil
- install differential side gears
- install flange shafts without lock ring
- install differential pinion gears approximately 180° apart and pivot into place by turning flange shaft
- align thrust washers and pinion gears
- drive in differential pinion shaft and secure with roll pin

Ring gear/pinion, adjusting

General notes

Careful adjustment of the ring gear and pinion is important to ensure that the final drive runs quietly and has a long service life. During manufacture, the ring gear and pinion are matched to each other, then inspected on special testing machines to ensure a correct mesh pattern and silent running in both directions. The quietest running position is determined by moving the pinion axially and lifting the ring gear away from the no-play meshing position, maintaining the backlash within specified tolerance.

The deviation r from the master gage R_o is measured for the ring gear pinion sets supplied as replacement parts and marked on the outer face of the ring gear. Ring gear and pinion must always be replaced as a matched set.

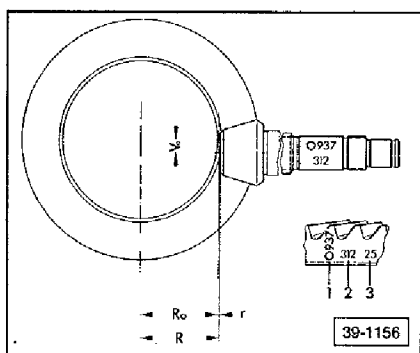

Replacement parts, identifying

- 1 — Number **O937** identifies Oerlikon gear sets with 9.37 ratio
- 2 — Matching number (**312**) on ring gear/pinion set
- 3 — Deviation r (pinion deviation) measured against the master gage of the testing machine used in production. The deviation r is always given in 1/100 mm

Example

"25" means $r = 0.25$ mm

R_o — Length of master gage used in production


R_o = Ring gear diameter 170 mm = 54.95 mm

Ring gear diameter 180 mm = 59.65 mm

R — Actual dimension between ring gear center and end face of pinion in position for the quietest running of the particular gear set

V_o — Hypoid offset = 35 mm

Differential – Manual Transmission

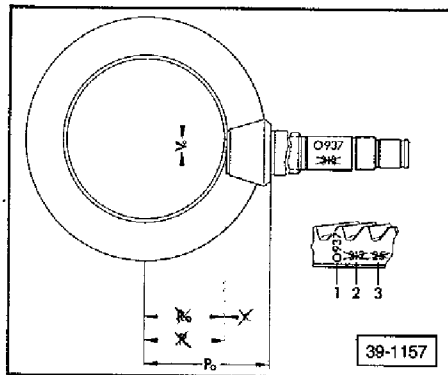

Standard-production gear sets

X — Markings X'ed out are not shown on production gears

P_o — The measurement used for setting ring gear/pinion in production

CAUTION

In production, the position of the pinion is determined by dimension P_o (ring gear centerline to back of pinion head). The marking of deviation r on the ring gear and the matching number have been eliminated. It is therefore necessary to measure the position of the pinion before removing it when parts that affect the position of the pinion are to be replaced.

Adjustment Overview

When assembling the final drive, it is only necessary to adjust the ring gear or pinion or both, if parts have been replaced which **directly** affect the final drive setting. The following table should be used to avoid carrying out unnecessary adjustments.

Replaced part	To be adjusted	Ring gear (S1 + S2) page 39.87	Pinion (S3) using deviation r page 39.80	Pinion (S3) using actual measurement page 39.78	Pinion (shlm S4 only) page 39.84
Final drive housing ¹		X		X	
Gear carrier housing					X
Differential housing		X			
Pinion bearings				X	
Differential bearings		X			
Ring gear and pinion		X	X		
Cover on final drive housing		X			

¹When the final drive housing is replaced, adjust the main shaft. See Repair Group 35.

Pinion, determining position

(actual dimension)

This operation is only necessary if deviation r is not marked on the ring gear, and both pinion bearings for the pinion and/or the final drive housing have to be replaced. These parts directly affect the position of the pinion.

Differential, removing

- assemble measuring bar, (see page 39.81)
- install measuring bar into transmission housing
- measure the deviation from R_0 (maximum deflection in the red range)
 - this reading corresponds with deviation r
 - note reading
- after replacing pinion bearings and/or final drive housing, adjust pinion, page 39.80
 - the reading obtained for r is used to determine the thickness of shim S_3 .

Ring gear/pinion, adjusting

- determine S total, total shim thickness (i.e., $S_1 + S_2$) to give specified preload of differential bearings
- determine total shim thickness S total ($S_3 + S_4$) to give specified preload of differential bearings
- distribute S total between S_3 and S_4 so dimension between ring gear centerline and pinion end face corresponds to installation dimension R determined in production
- distribute S total between S_1 and S_2 to obtain specified backlash between ring gear and pinion


Note

Always try to adjust the ring gear and pinion to obtain the same quiet running position which was determined on the special test machine used in production.

All assembly operations and measurements require great care and absolute cleanliness to produce accurate results.

100 models

Differential – Manual Transmission

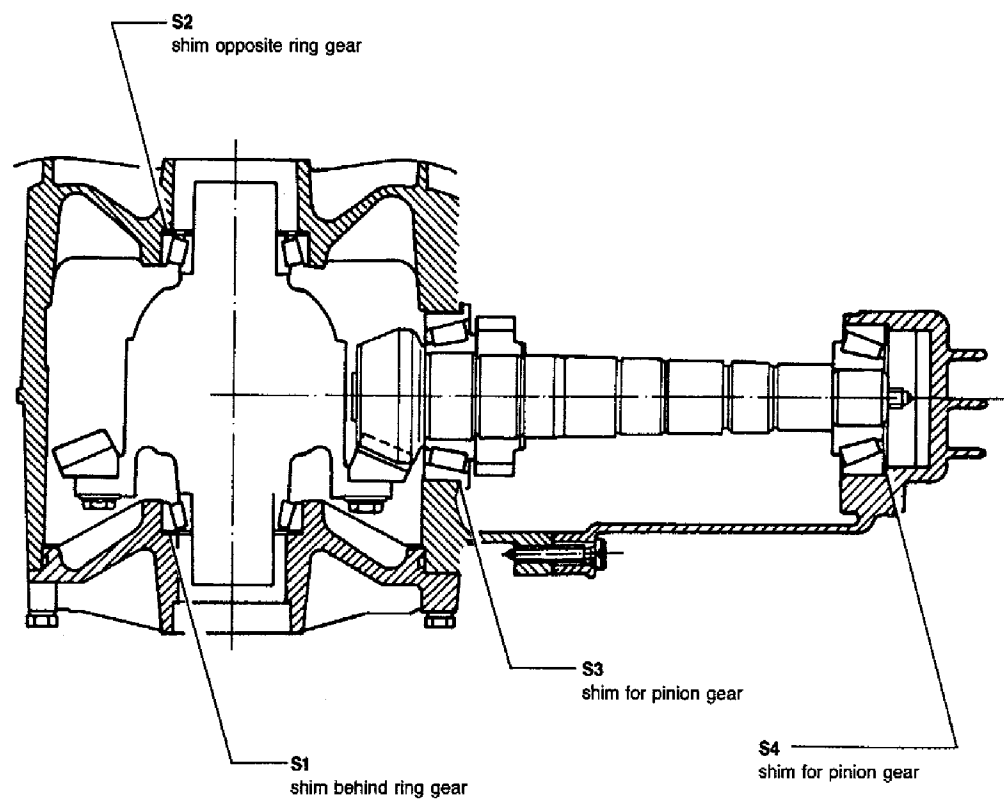

39-1154

Differential – Manual Transmission

Pinion, adjusting

Ring gear pinion needs adjusting if it has been replaced. If other parts which affect position of pinion are to be replaced, setting must be measured before disassembling and pinion set to this dimension when assembling.

Finding total shim thickness i.e., S3 + S4 (adjusting preload of pinion bearings)




- install bearing outer races in housing and gear carrier **without** shims

Note

Always install rubber shim and pressure plate to determine **S4** shim.

Pressure plates of 14.8 mm or 15.3 mm can be installed — see Repair Group 35.


- install pinion bearing inner races
- secure lower bearing (**arrow**)
- install assembled pinion into final drive housing
- install gear carrier housing and tighten bolts to 25 Nm (18 ft lb)
- turn final drive so gear housing faces down
- press on pinion head with **VW 296** until pinion bearing outer race contacts housing
- turn pinion manually until pinion bearing is seated

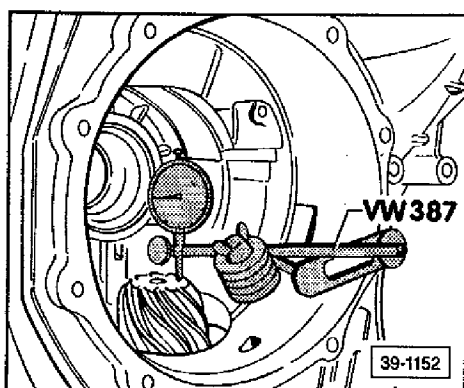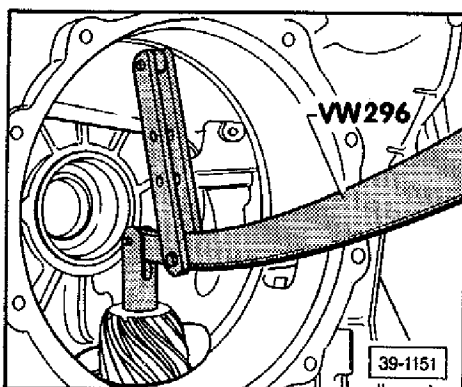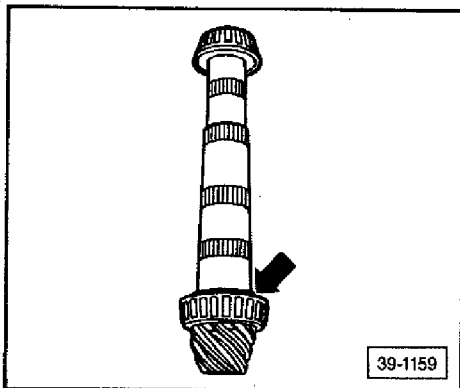

- install dial indicator (3 mm range) and zero with 1 mm preload
- turn final drive so cover faces up

CAUTION

Turn pinion before measuring so pinion bearing seats, or measurement will be inaccurate.

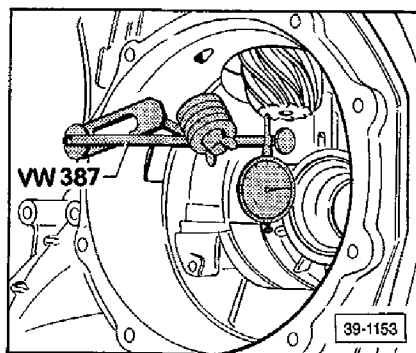

- read measurement
- determine **S total**, total shim thickness (i.e., **S3** + **S4**), using the following equation:

S total (i.e., **S3** + **S4**), determining

$$\text{S total} = \text{Dial indicator reading} + \text{preload}$$

Example



Dial indicator reading (example)	1.45 mm
Preload (constant value)	+ 0.15 mm
S total	= 1.60 mm

Pinion bearing preload, checking


- select shims with combined thickness of **S total** value (e.g. 1.60 mm). Install behind pinion bearing outer race
 - for available shims, see page 39.83
- install gear carrier housing
- turn pinion in both directions several times to seat bearings
- install dial indicator (3 mm range) and zero it with 1 mm preload
 - dial indicator will display a value of 0.08 mm to 0.15 mm, with proper selection of adjustment shims

Dimension "e," determining


- install determined **S total** (e.g. 1.60 mm) behind pinion bearing outer race in gear carrier housing
- install gear carrier housing
- turn pinion in both directions several times to seat bearings
- set universal measuring bar **VW 385/1** centering ring to dimension **a** = 35 mm
- set sliding ring to dimension **b** = 75 mm

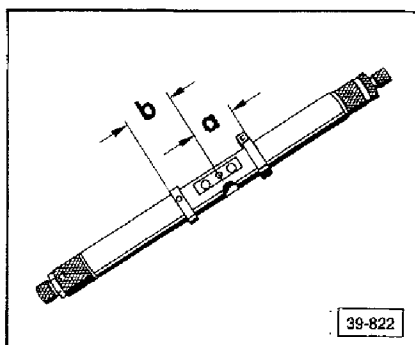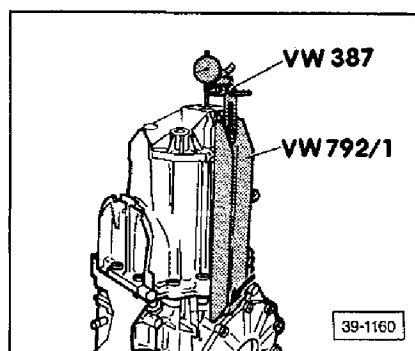


Differential – Manual Transmission

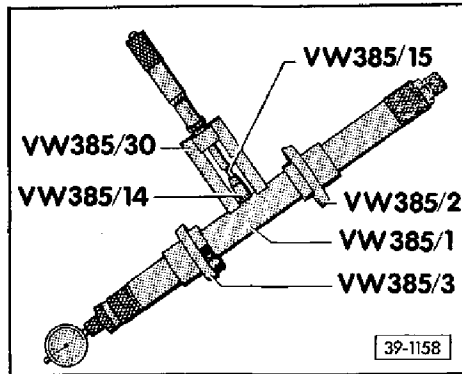

- assemble bar as shown
 - indicator extension **VW 385/15** = 9.3 mm with **Ro** = 59.65 mm
 - indicator extension **VW 385/15** = 6.5 mm with **Ro** = 54.95 mm

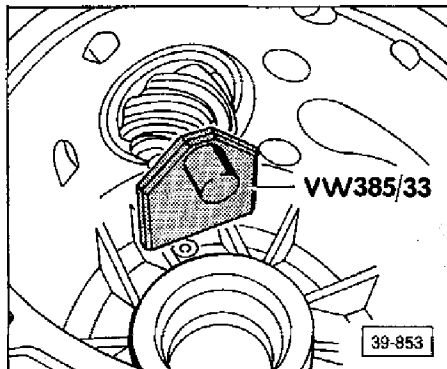

- set universal master gage **VW 385/30** for **Ro**:
 - 180 mm diameter ring gear = 59.65 mm
 - 170 mm diameter ring gear = 54.95 mm

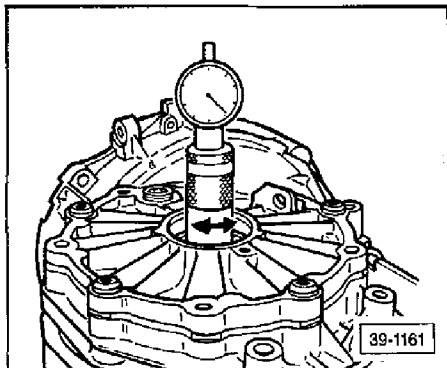

- place master gage on measuring bar and set dial indicator (3 mm range) to 0 with 1 mm preload
- place end plate **VW 385/33** on pinion end face
- remove master gage and install measuring bar in housing
 - centering disc **VW 385/3** faces final drive cover
- install cover for final drive housing and tighten four bolts
- pull 2nd centering ring outward until measuring bar can just be turned by hand


Dimension "e," measuring

- turn measuring bar slightly until dial indicator contacts end face of pinion and indicates maximum deflection (return point)
 - measured reading = dimension "e"

Example

e = 0.46 mm

Differential – Manual Transmission

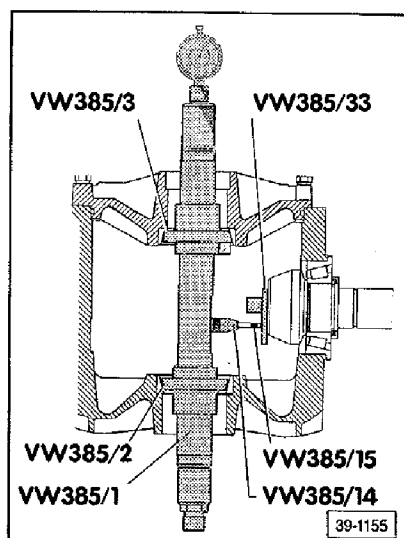

Shim S3, determining thickness

$$S3 = e + r$$

e — dial indicator reading (maximum deflection)

r — deviation (marked on ring gear in 1/100 mm or determined by actual measurement)

Example

Dial indicator reading **e** 0.46 mm

Deviation **r** + 0.18 mm

Shim thickness **S3** = 0.64 mm

The following shims are available:

Thickness (mm)	Part number
0.55	012 311 391 C
0.60	012 311 391 D
0.65	012 311 391 E
0.70	012 311 391 F
0.75	012 311 391 G
0.80	012 311 391 H
0.85	012 311 391 J
0.90	012 311 391 K
0.95	012 311 391 L
1.00	012 311 391 M
1.05	012 311 391 N

Note

Pressure plates of 14.8 mm or 15.3 mm can be installed — see Repair Group 35.

Due to varying tolerances, check all shims with a micrometer for correct thickness. Exact shim thickness can be attained by using shims that are thicker or thinner than specifications.

Differential – Manual Transmission

Shim S4, determining thickness


$$S4 = S \text{ total} - S3$$

Example

Total shim thickness	1.60
S3 shim thickness	- 0.64
S4 shim thickness	= 0.96

The following shims are available:

Thickness (mm)	Part number
0.45	012 311 393
0.49	012 311 393 A
0.53	012 311 393 B
0.57	012 311 393 C
0.61	012 311 393 D
0.65	012 311 393 E
0.69	012 311 393 F
0.73	012 311 393 G
0.77	012 311 393 H
0.81	012 311 393 J
0.85	012 311 393 K
0.89	012 311 393 L
0.93	012 311 393 M
0.97	012 311 393 N
1.01	012 311 393 P
1.05	012 311 393 Q
1.09	012 311 393 R
1.13	012 311 393 S
1.17	012 311 393 T
1.21	012 311 393 AA
1.25	012 311 393 AB
1.29	012 311 393 AC
1.33	012 311 393 AD
1.37	012 311 393 AE
1.41	012 311 393 AF
1.45	012 311 393 AG
1.49	012 311 393 AH

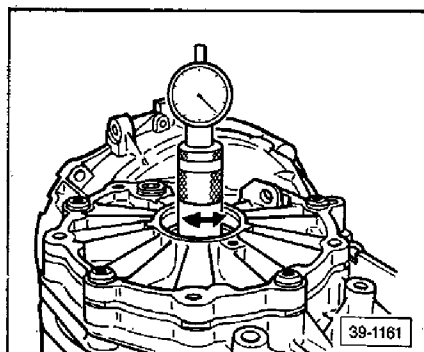
**Dimension r, checking**

- install pinion with measured shims **S3** and **S4** and turn several times in both directions
- place measuring bar in position and check measurements
 - adjustment shims are correct if dial indicator, reading counterclockwise, shows deviation *r* within tolerance of 0.04 mm

Gear carrier housing, replacing**Shim S4, redetermining**

If only the gear carrier housing is to be replaced, only the **S4** shim has to be remeasured.

- clean mating surfaces of housing and final drive housing
- install pinion in old gear carrier housing
- turn pinion to seat bearing
- place measuring device on housing
- zero dial indicator (3 mm range) with 1 mm preload
- remove **VW 387** complete with dial indicator
- remove pinion and bearing outer race with pressure plate, adjustment shim and washer and install in new housing. See Repair Group 35
- install dial indicator on new housing with **VW 387**
- read value on dial indicator

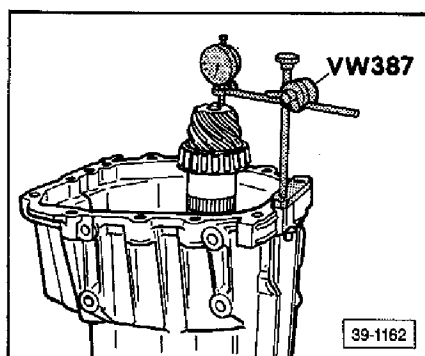**Example**

preload	1.00 mm
dial indicator reading	-0.88 mm
x	= 0.12 mm

shim thickness S4	0.77 mm
value x	+ 0.12 mm
	= 0.89 mm

- select shims from table on page 39.84

Differential – Manual Transmission

Note

If the dial indicator reading is greater than 1.00 mm, the **S4** shim must be reduced by the value **x**.

- install gear carrier housing and check preload of pinion bearing

Ring gear, adjusting

Differential, adjusting

- the ring gear must be adjusted if any of the following parts are replaced:



Final drive housing
 Gear carrier housing
 Differential bearings
 Differential gear housing
 Ring and pinion set

See Adjustment Overview, page 39.77.

Differential bearings preload, adjusting (pinion removed)

- remove oil seals and outer races of differential bearings
- install bearing outer races **without** shims and drive in to stop
- install differential gear into housing without speedometer gear
 - ring gear on left side (opposite cover side)
- install cover and tighten bolts to 25 Nm (18 ft lb)
- attach measuring equipment
- zero dial indicator (3 mm range) with a 1 mm preload

A — dial indicator extension, 30 mm long

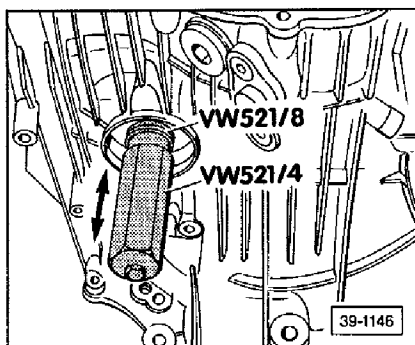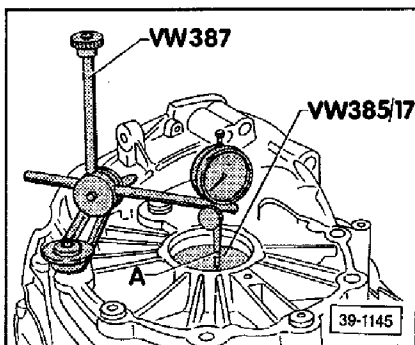

- install **521/4** and **521/8** on final drive housing. Use **521/7** for smaller differential gear housing
- move differential up and down
- read end play from dial indicator and note reading

Differential – Manual Transmission

Example

Dial indicator reading = 1.42 mm

CAUTION

While taking measurements, do not turn differential or bearings will settle, resulting in an incorrect reading.

S total (i.e., S1 + S2), determining

S total = dial indicator reading + preload

Example

Dial indicator reading (example)	1.42 mm
Preload (constant value)	+ 0.50 mm
S total	1.92 mm

- install shim of appropriate thickness (1.92 mm in example) behind bearing outer race in final drive housing (S2 side)

Note


See table of shims on page 39.90.

Turning torque, measuring

- A — commercial torque wrench
0-600 Ncm (0-536 in. lb)
- B — locking sleeve, VW 521/4
- C — bushing, VW 521/8. For smaller differential gear housings, use VW 521/7
- lubricate bearing with transmission oil
- check that turning torque equals:
 - new bearings = 250-350 Ncm (221-310 in. lb)
 - used bearings = 30-60 Ncm (27-53 in. lb)

Note

After these procedures, perform a pinion adjustment/inspection, page 39.80.

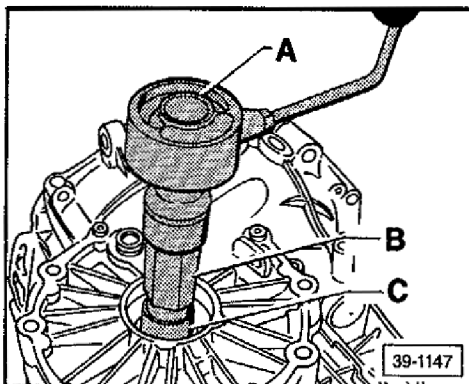



Backlash, adjusting

- install pinion with shims **S3** and **S4** installed
- select shims with combined thickness of **S total** (i.e., **S1** + **S2**). Install on housing side of differential
- turn differential several times to seat bearings
- attach measuring equipment

Note

Use **521/7** for smaller ring gear.

- use dial indicator extension **VW 382/10** (6 mm flat)
- adjust measuring lever **VW 388** to
 - $a = 170 \text{ mm ring gear} = 67 \text{ mm}$
 - $a = 180 \text{ mm ring gear} = 72 \text{ mm}$
- while holding pinion from moving, turn ring gear to stop and zero indicator
- turn ring gear back and note backlash

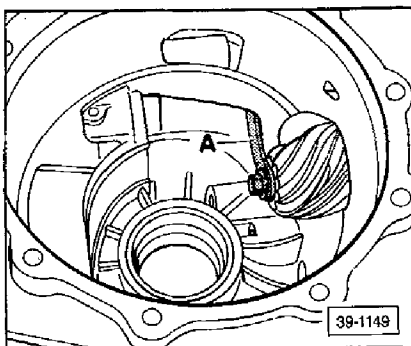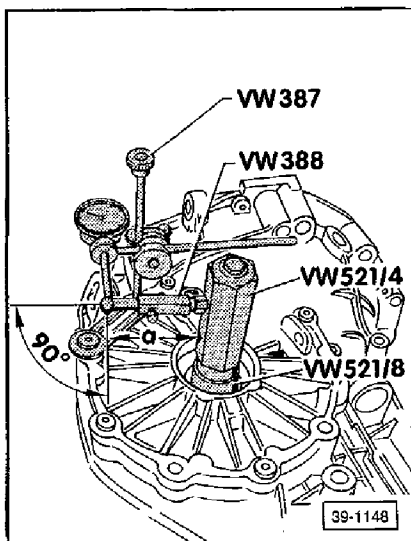**Note**

If pinion turning torque is too low, install bracket **A**, tool **3177**, to measure backlash precisely. The differential must be installed so the opening for installation of gears faces the pinion.

- loosen lock bolt on locking sleeve
- rotate ring gear 90°; tighten lock bolt and measure backlash again
- repeat above procedures at least two more times
- add all four readings together and divide by four to determine average backlash

Average backlash, calculating**Example**

1st measurement	0.84 mm
2nd measurement	0.85 mm
3rd measurement	0.84 mm
4th measurement	0.83 mm
Total	= 3.36 mm

$$\text{Average backlash} = 3.36 \text{ mm} \div 4 = 0.84 \text{ mm}$$

Differential – Manual Transmission

Note

If measurements differ by more than 0.06 mm from each other, ring gear/pinion installation is incorrect. Check ring gear and pinion, if necessary, replace.

Shim S2, determining thickness

(side opposite from ring gear)

$\begin{aligned} \text{S2} &= \text{S total} \\ &\quad - \text{average backlash} \\ &\quad + \text{lift (constant value)} = 0.15 \text{ mm} \end{aligned}$
--

Example

S total	1.92 mm
minus backlash	- 0.84 mm
	= 1.08 mm
plus lift	+ 0.15 mm
S2	= 1.23 mm

Shims available

Thickness (mm)	Part number
0.45	012 409 386
0.50	012 409 386 A
0.55	012 409 386 B
0.60	012 409 386 C
0.65	012 409 386 D
0.70	012 409 386 E
0.75	012 409 386 F
0.80	012 409 386 G
0.85	012 409 386 H
0.90	012 409 386 J
0.95	012 409 386 K
1.00	012 409 386 L

Shim thicknesses make it possible to select any required thickness.

Differential – Manual Transmission

Shim S1, determining thickness
(ring gear side)

$$S1 = S \text{ total} - S2$$

Example

S total	1.92 mm
minus S2	- 1.23 mm
S1	= 0.69 mm

Shims available

Thickness (mm)	Part number
0.45	012 409 385
0.50	012 409 385 A
0.55	012 409 385 B
0.60	012 409 385 C
0.65	012 409 385 D
0.70	012 409 385 E
0.75	012 409 385 F
0.80	012 409 385 G
0.85	012 409 385 H
0.90	012 409 385 J
0.95	012 409 385 K
1.00	012 409 385 L

Shim thicknesses make it possible to select any required thickness.

Backlash, checking

- measure backlash four times around circumference
 - acceptable values can range from 0.12-0.22 mm
 - no two values can deviate from each other by more than 0.05 mm