


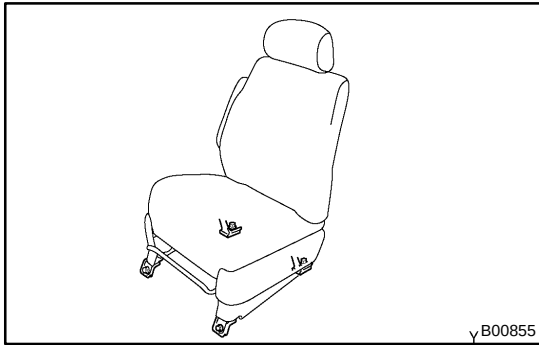

BODY INSPECTION


MA012-01

1. TIGHTEN BOLTS AND NUTS ON CHASSIS AND BODY

Tighten these parts:


- Front seat mount bolts

Torque: 37 N·m (375 kgf·cm, 27 ft·lbf)

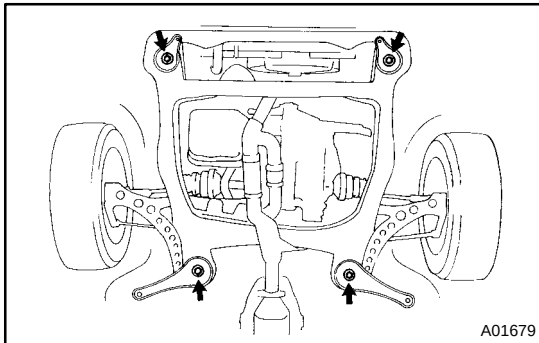

- Front suspension member-to-body mounting bolts

Torque: 181 N·m (1,850 kgf·cm, 134 ft·lbf)

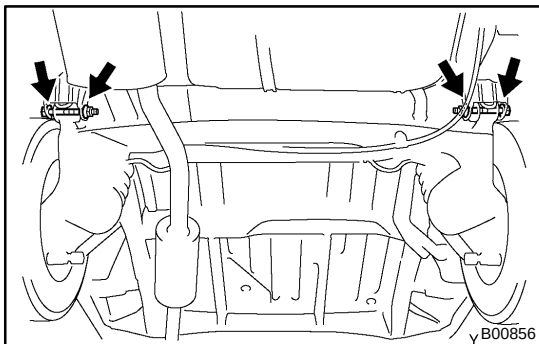

- Rear axle beam assembly-to-body mounting nuts

Torque: 88 N·m (900 kgf·cm, 65 ft·lbf)

2. FINAL INSPECTION

(a) Check the operation of the body parts:

- Hood:
 - Auxiliary catch operates properly
 - Hood locks securely when closed
- Front and rear doors:
 - Door lock operates properly
 - Doors close properly
- Back door:
 - Door lock operates properly
- Seats:
 - Seat adjusts easily and locks securely in any position
 - Front seat back locks securely in any position
 - Folding-down rear seat backs lock securely

- (b) Road test:
 - Check the engine and chassis for abnormal noises.
 - Check that the vehicle does not wander or pull to one side.
 - Check that the brakes work properly and do not drag.
 - Do setting of the parking brake shoes and drum.
- (c) Be sure to deliver a clean vehicle and especially check:
 - Steering wheel
 - Shift lever knob
 - All switch knobs
 - Door handles
 - Seats