



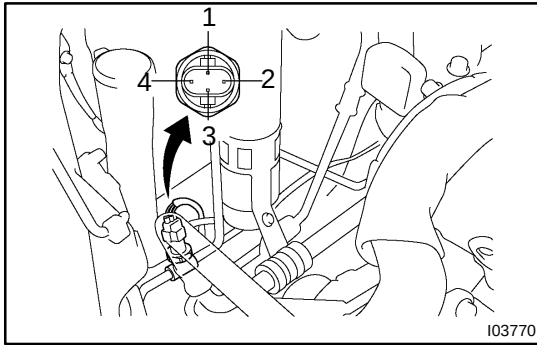

PRESSURE SWITCH ON-VEHICLE INSPECTION


ACOTR-03

1. SET ON MANIFOLD GAUGE SET (See page AC-20)
2. DISCONNECT CONNECTOR FROM PRESSURE SWITCH
3. RUN ENGINE AT APPROX. 1,500 RPM

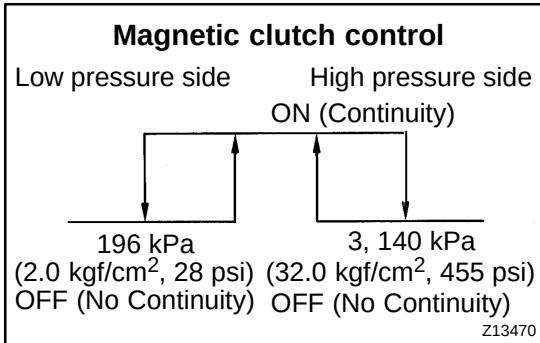

4. **Magnetic clutch control:**
INSPECT PRESSURE SWITCH OPERATION
 - (a) Connect the positive (+) lead from the ohmmeter to terminal 4 and the negative (-) lead to terminal 1.
 - (b) Check continuity between terminals when refrigerant pressure is changed, as shown in the illustration.

If operation is not as specified, replace the pressure switch.

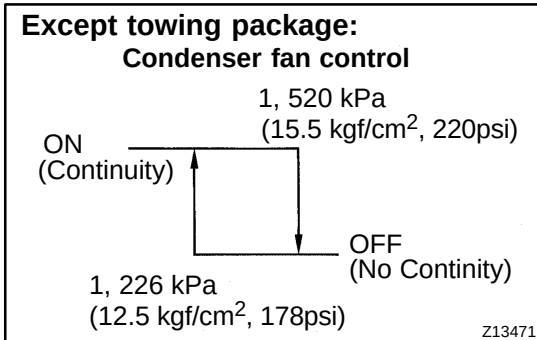

5. **Cooling fan control:**
INSPECT PRESSURE SWITCH OPERATION
 - (a) Connect the positive (+) lead from the ohmmeter to terminal 2 and the negative (-) lead to terminal 3.
 - (b) Check continuity between terminals when refrigerant pressure is changed, as shown in the illustration.

If operation is not as specified, replace the pressure switch.
6. **STOP ENGINE AND SET OFF MANIFOLD GAUGE SET**
7. **CONNECT CONNECTER TO PRESSURE SWITCH**

