SFI SYSTEM

PRECAUTION

NOTICE:

- **Perform RESET MEMORY (AT initialization) when replacing the automatic transmission assembly, engine assembly or ECM (See page AX-16).**
- **Perform REGISTRATION (VIN registration) when replacing the ECM (See page ES-16).**

HINT:

Initialization cannot be completed by removing the battery.


ES

DEFINITION OF TERMS

Terms	Definition
Monitor Description	Description of what ECM monitors and how detects malfunctions (monitoring purpose and details).
Related DTCs	Group of diagnostic trouble codes that are output by ECM based on the same malfunction detection logic.
Typical Enabling Condition	Preconditions that allow ECM to detect malfunctions. With all preconditions satisfied, ECM sets DTC when monitored value(s) exceeds malfunction threshold(s).
Sequence of Operation	Order of monitor priority, applied if multiple sensors and components involved in single malfunction detection process. Each sensor and component monitored in turn, when previous detection operation is completed.
Required Sensor/Components	Sensors and components used by ECM to detect each malfunction.
Frequency of Operation	Number of times ECM checks for each malfunction during each driving cycle. "Once per driving cycle" means ECM only performs checks for that malfunction once in single driving cycle. "Continuous" means ECM performs checks for that malfunction whenever enabling conditions are met.
Duration	Minimum time for which ECM must detect continuous deviation in monitored value(s) in order to set DTC. Timing begins when Typical Enabling Conditions are met.
Malfunction Thresholds	Value, beyond which, ECM determines malfunctions exist and sets DTCs.
MIL Operation	Timing of MIL illumination after malfunction is detected. "Immediate" means ECM illuminates MIL as soon as malfunction is detected. "2 driving cycle" means ECM illuminates MIL if the same malfunction is detected second time in the next sequential driving cycle.


PARTS LOCATION

PZEV:

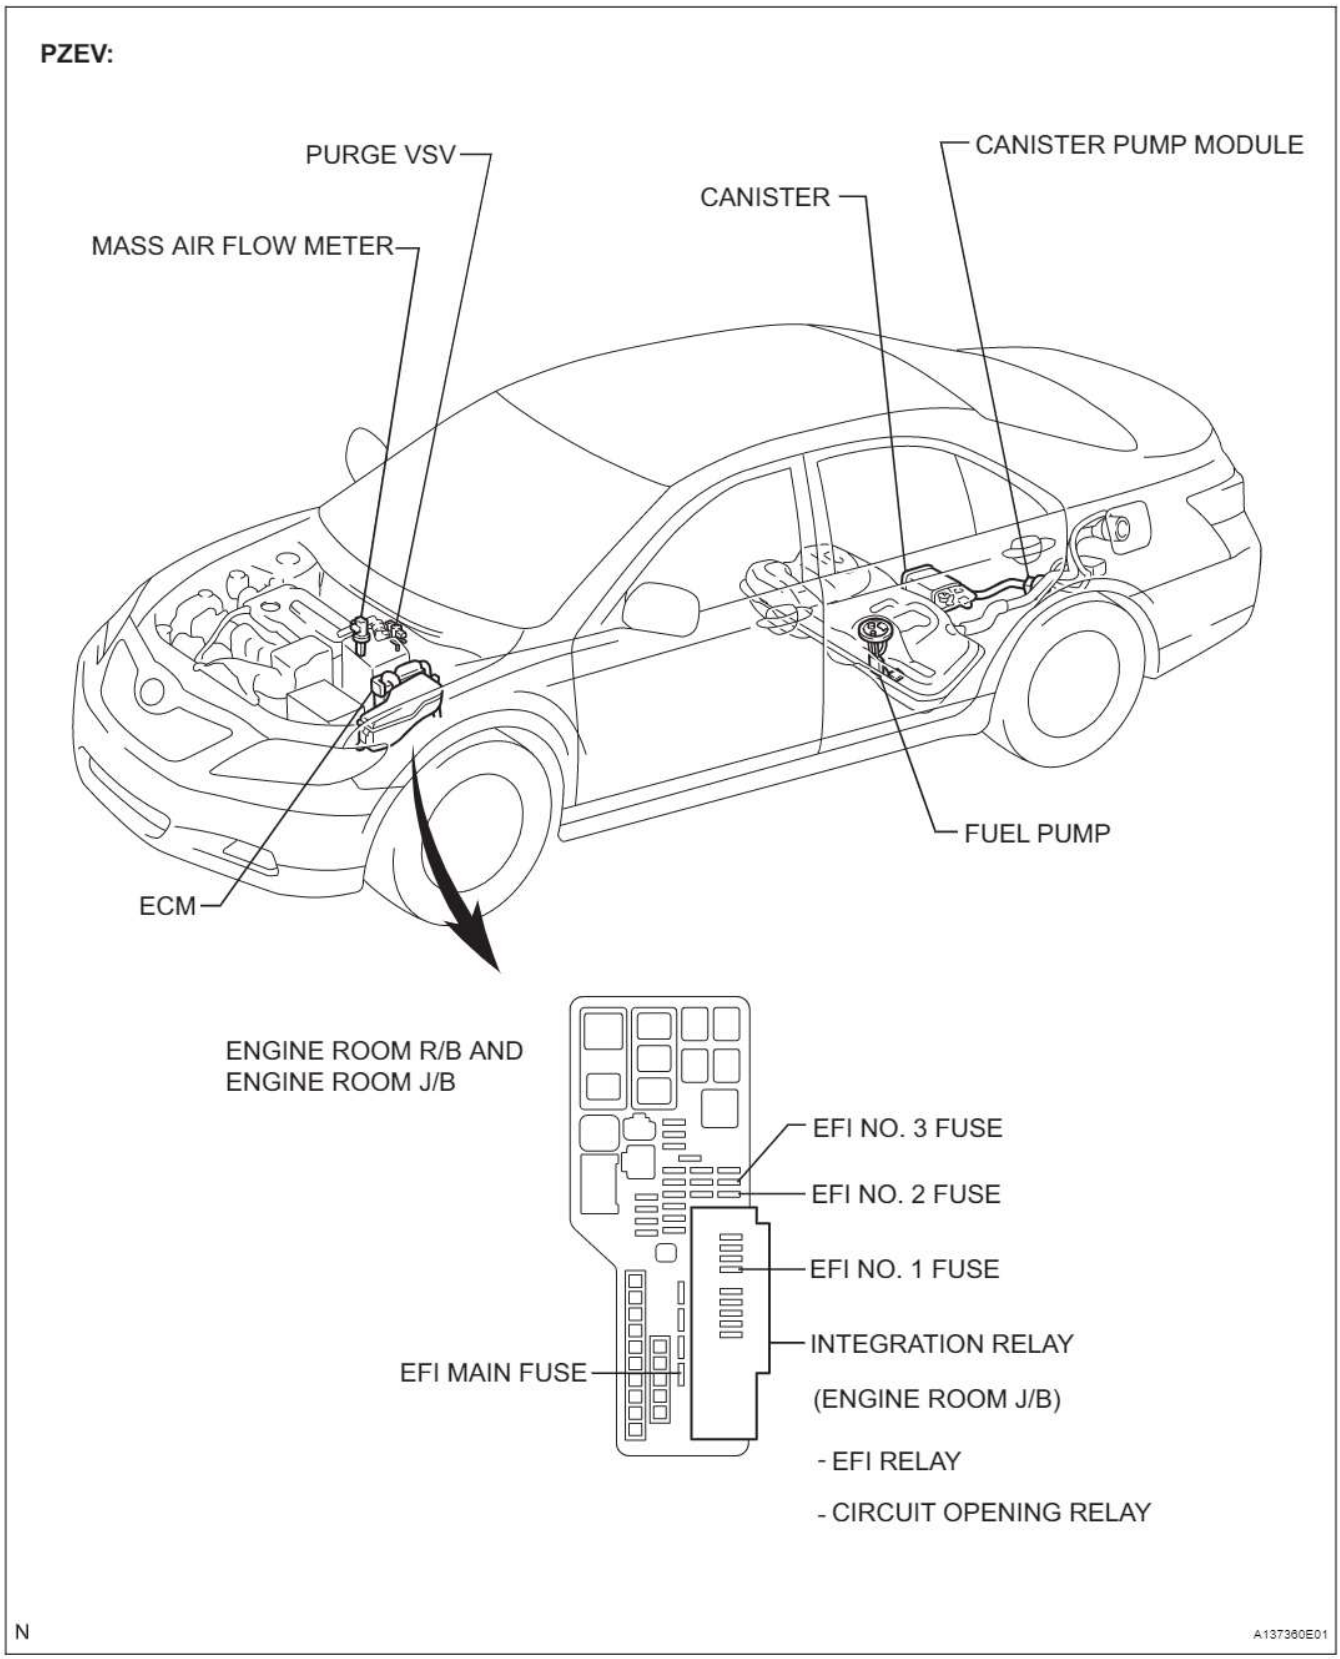


ES

EXCEPT PZEV:

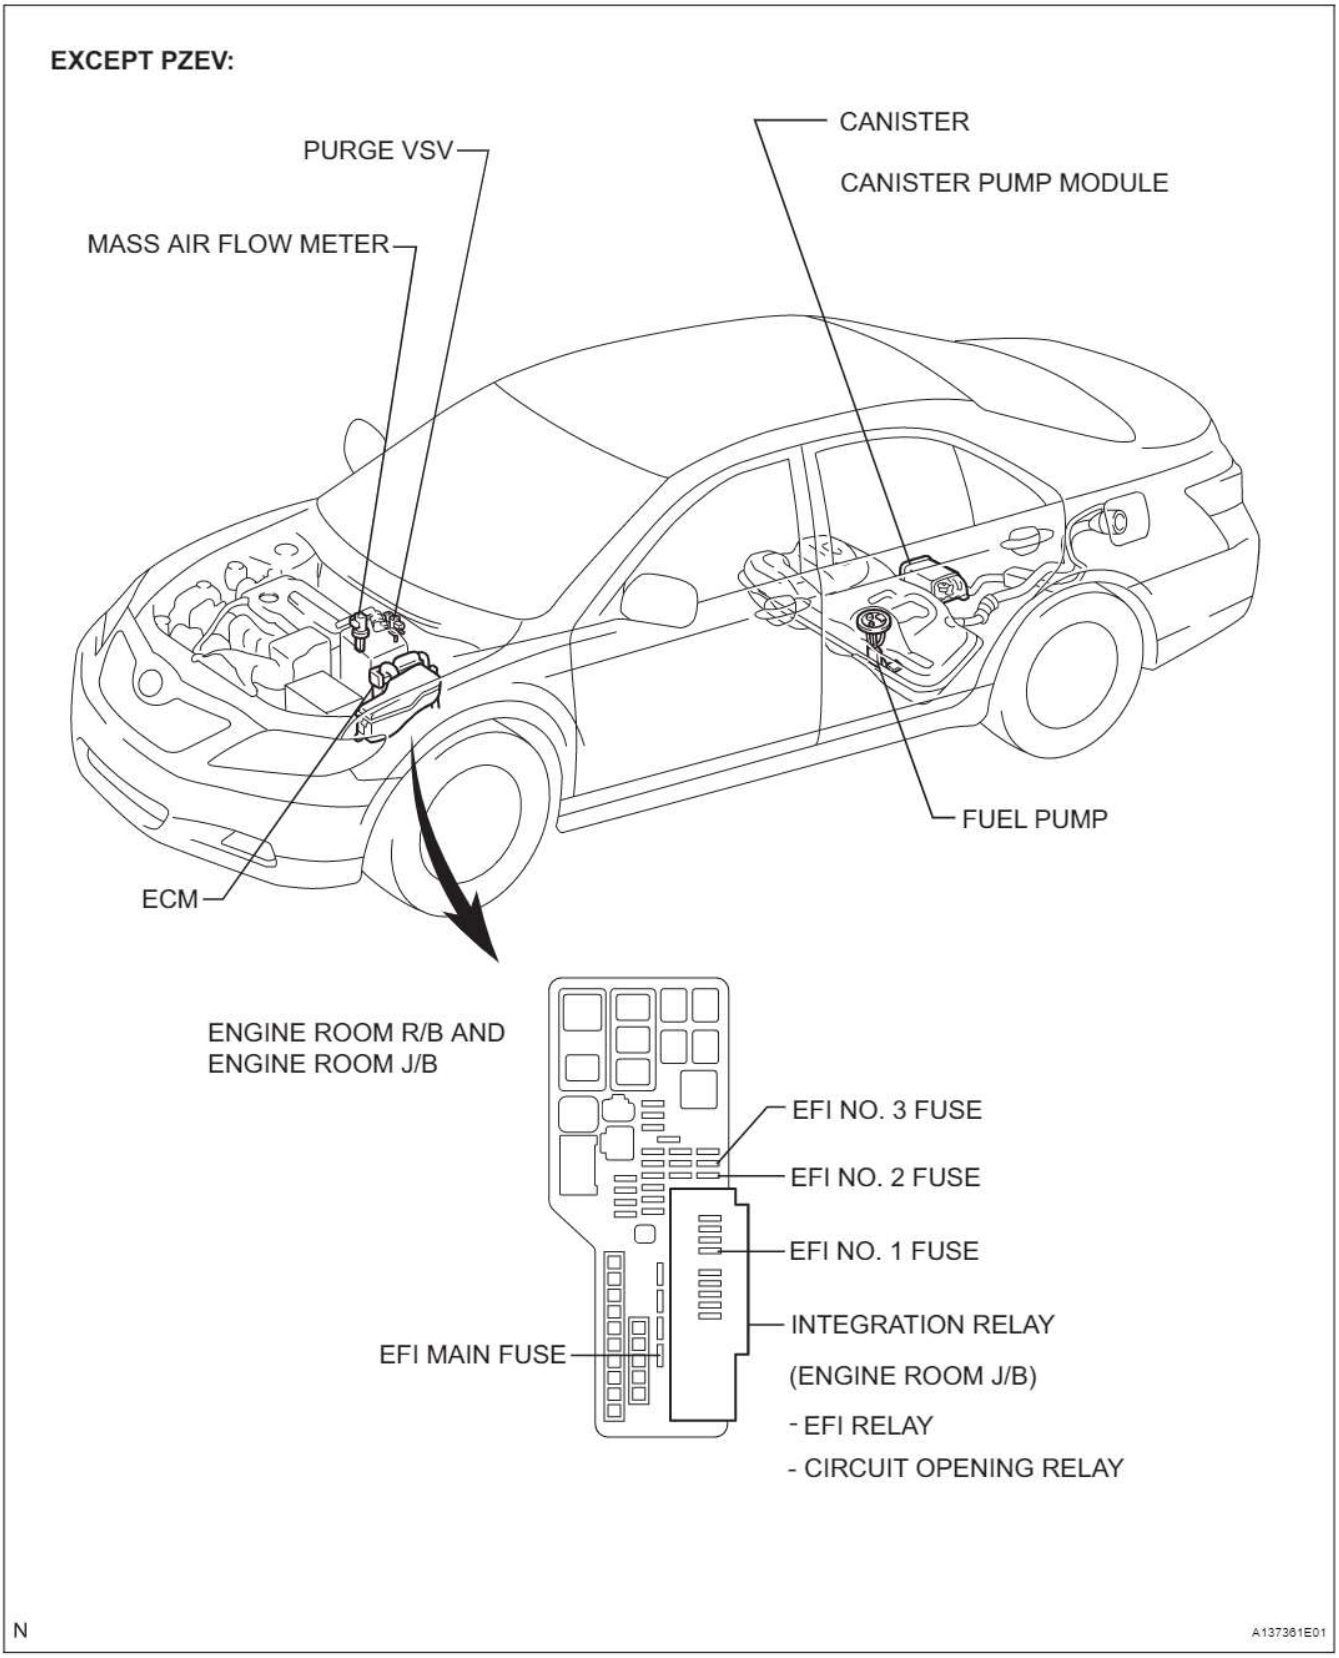



PZEV:

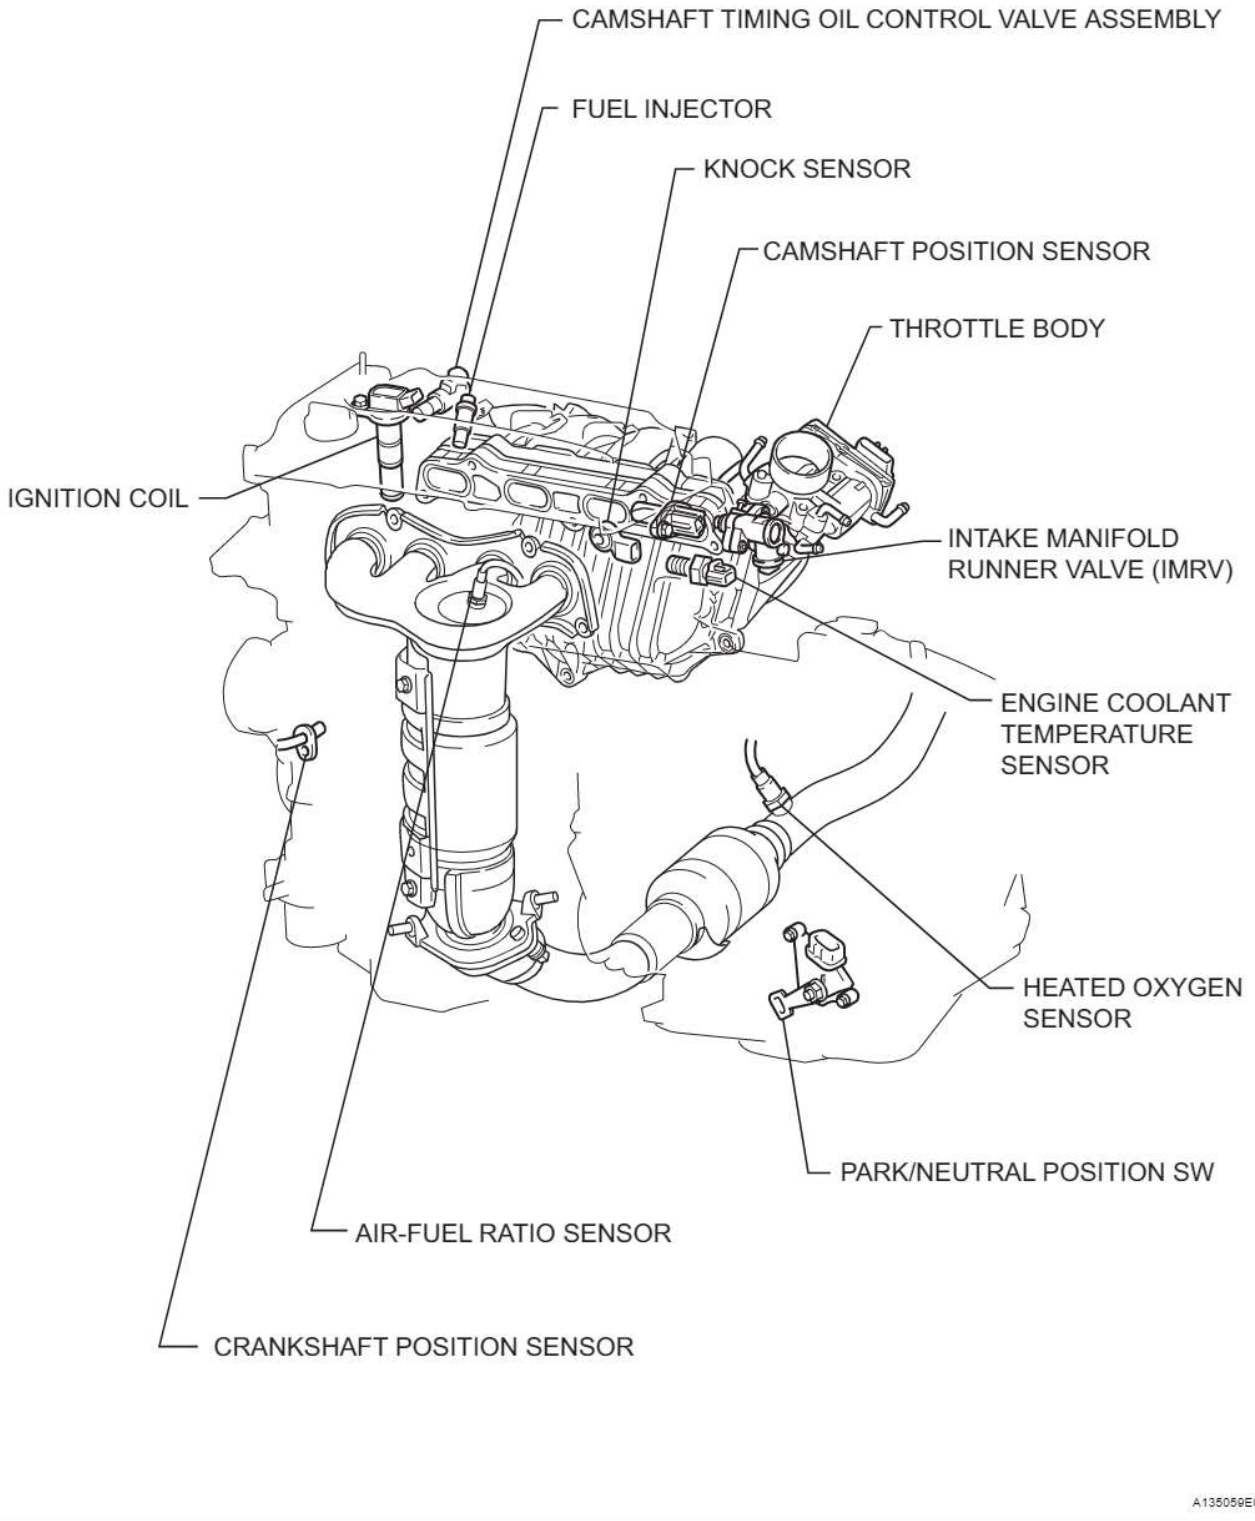
CAMSHAFT TIMING OIL CONTROL VALVE ASSEMBLY
FUEL INJECTOR
KNOCK SENSOR
CAMSHAFT POSITION SENSOR
THROTTLE BODY
IGNITION COIL
INTAKE MANIFOLD RUNNER VALVE (IMRV)
ENGINE COOLANT TEMPERATURE SENSOR
HEATED OXYGEN SENSOR
PARK/NEUTRAL POSITION SW
AIR-FUEL RATIO SENSOR
CRANKSHAFT POSITION SENSOR
N
A135059E01

ES


EXCEPT PZEV:

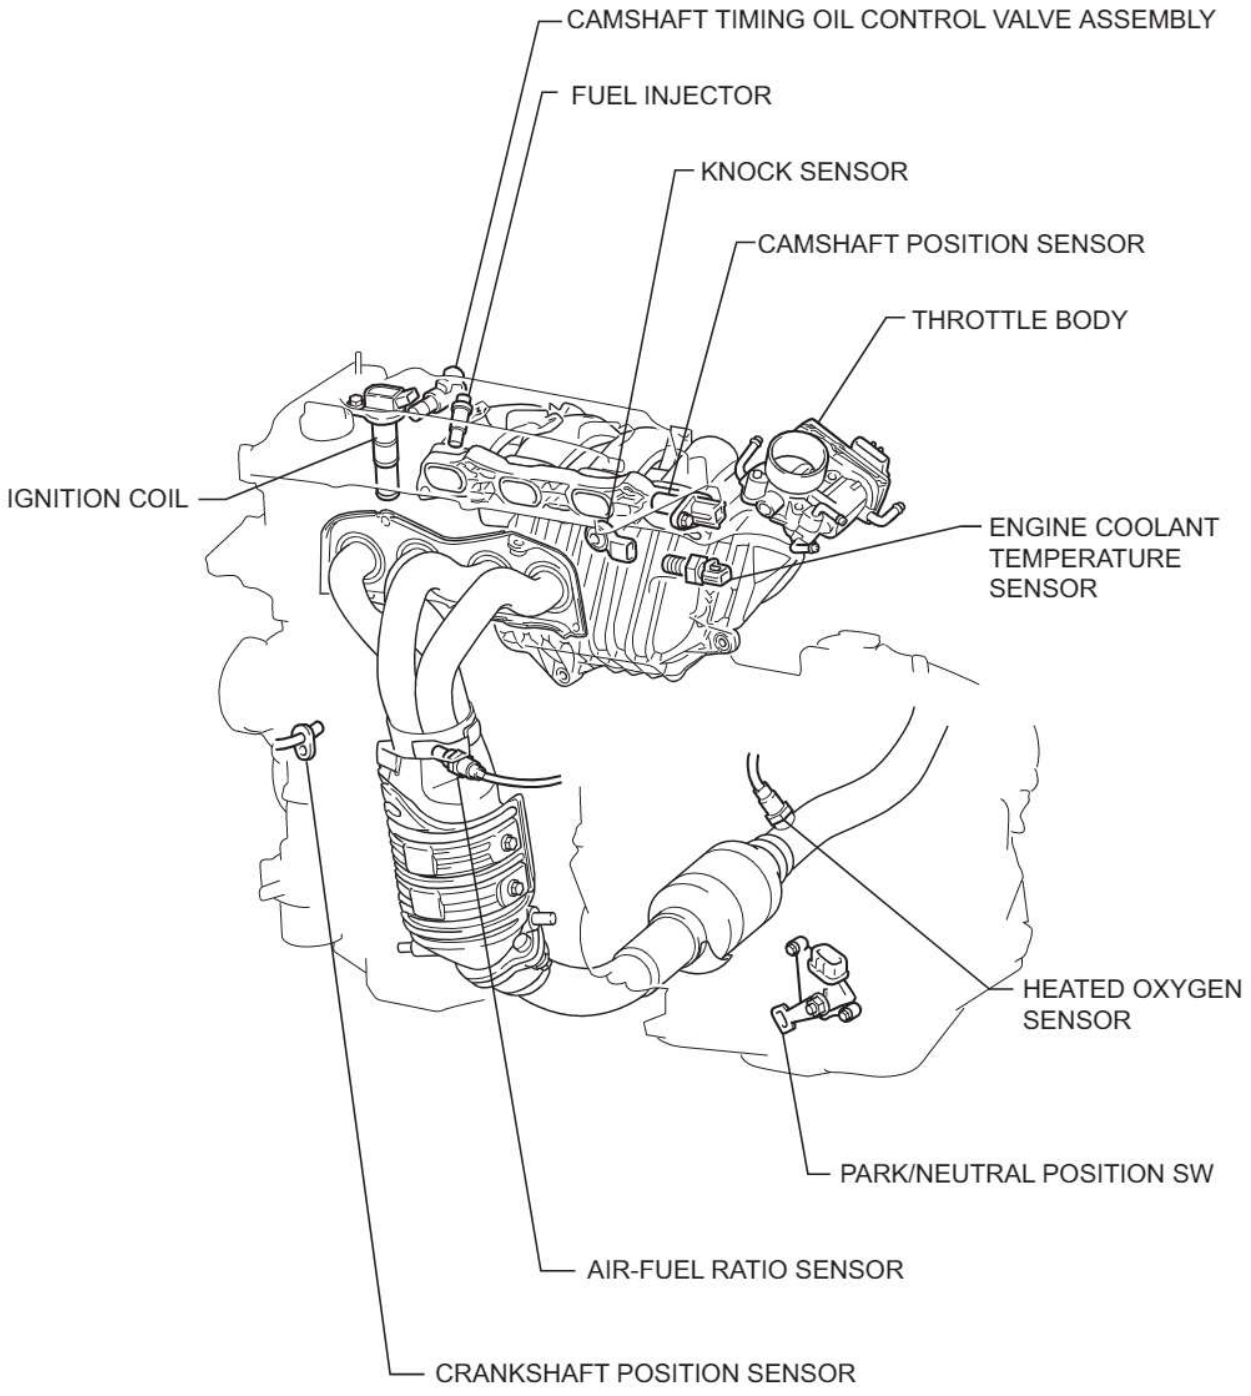


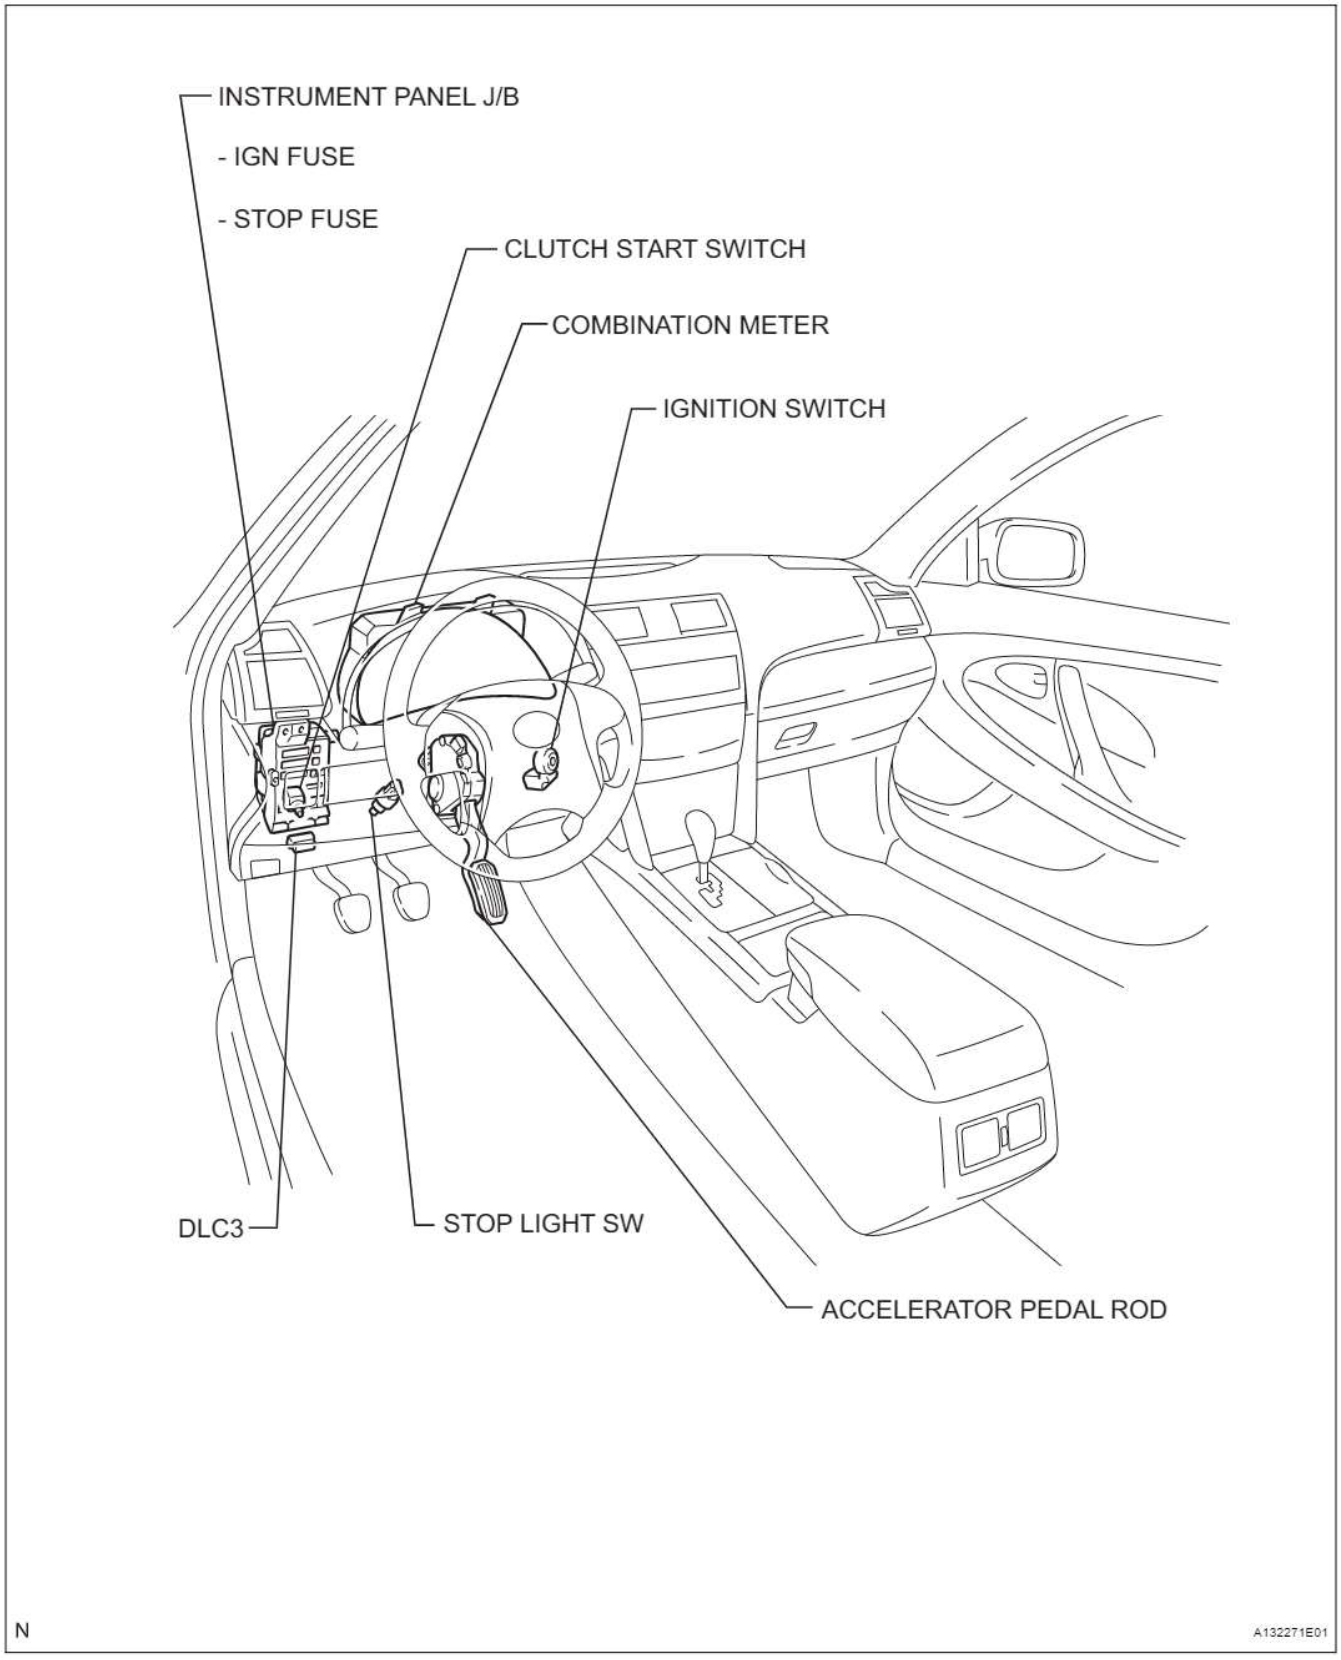

INSTRUMENT PANEL J/B
- IGN FUSE
- STOP FUSE
CLUTCH START SWITCH
COMBINATION METER
IGNITION SWITCH
DLC3
STOP LIGHT SW
ACCELERATOR PEDAL ROD
N
A132271E01


ES

SYSTEM DIAGRAM

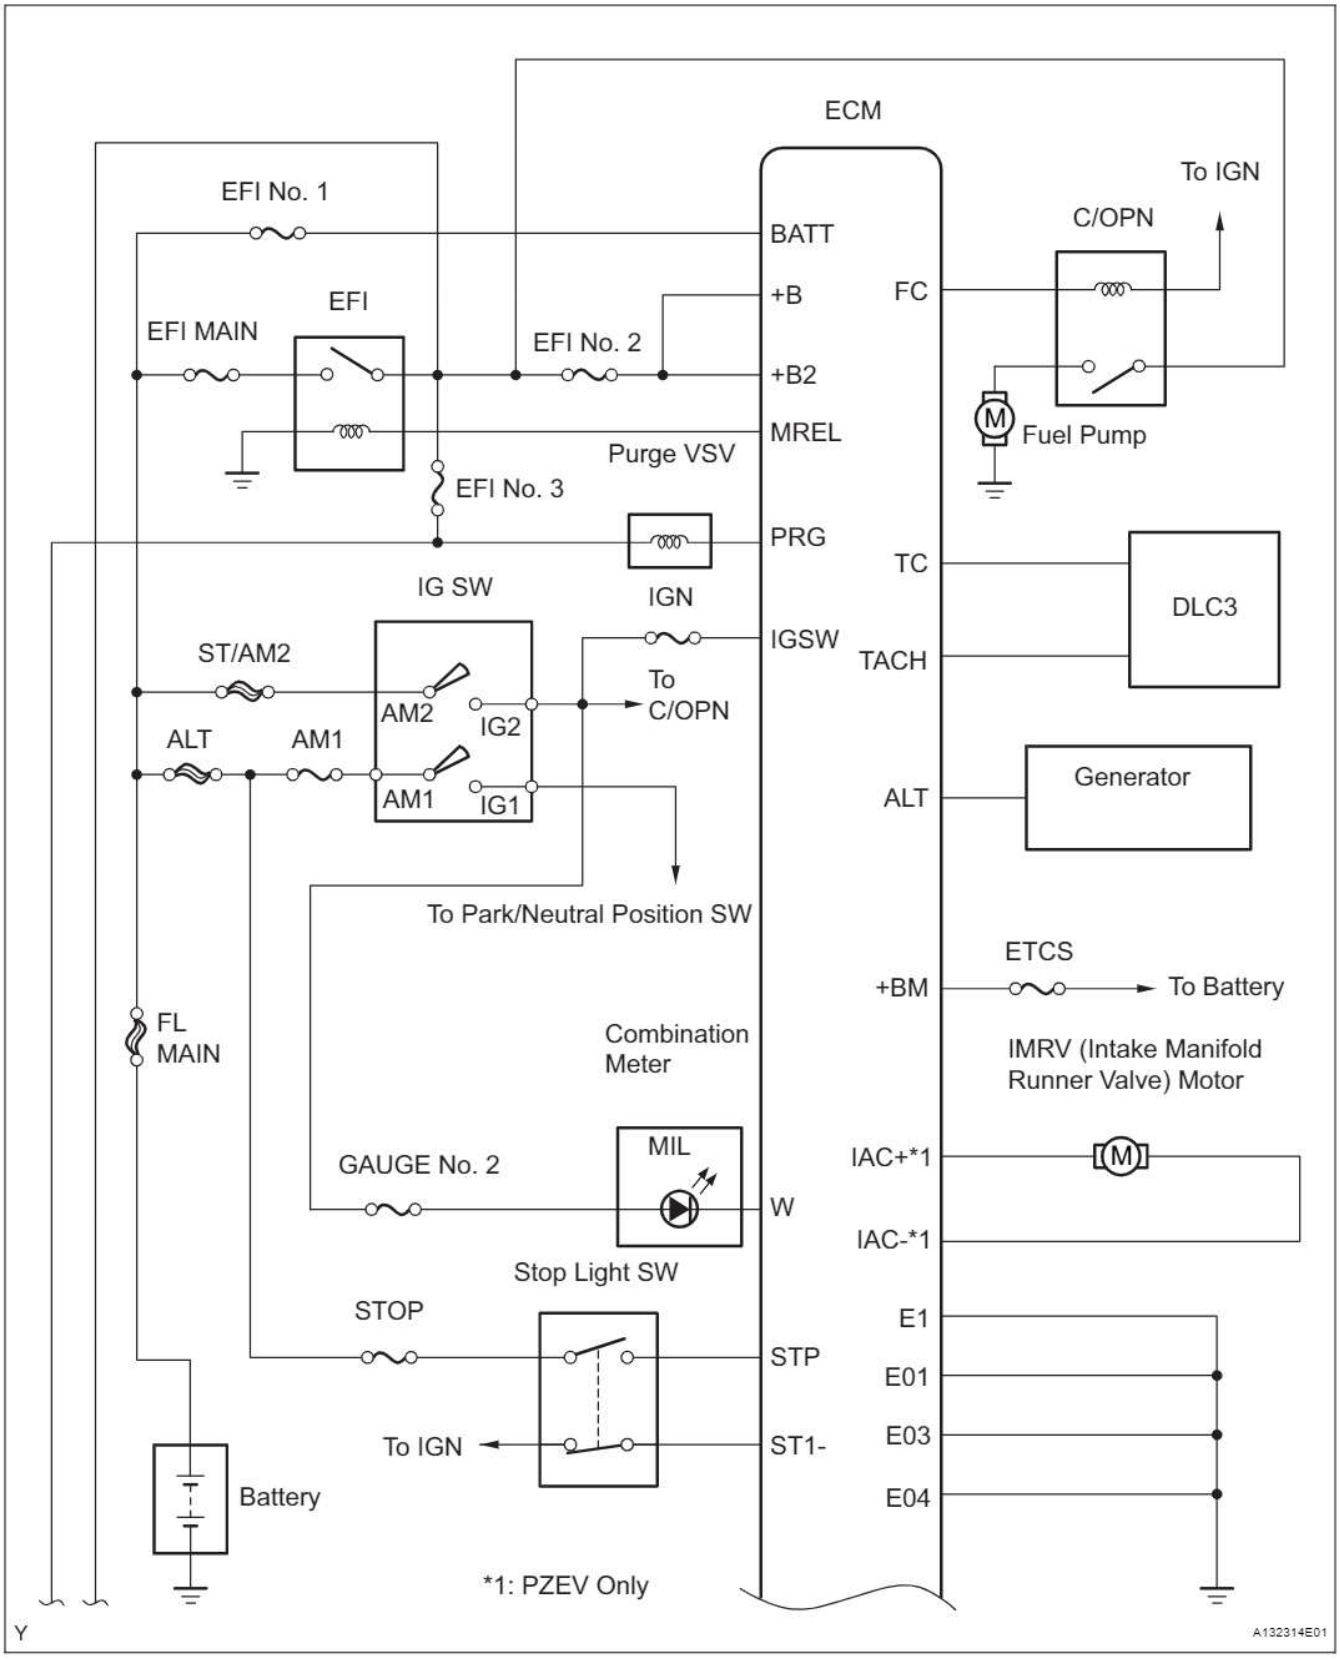

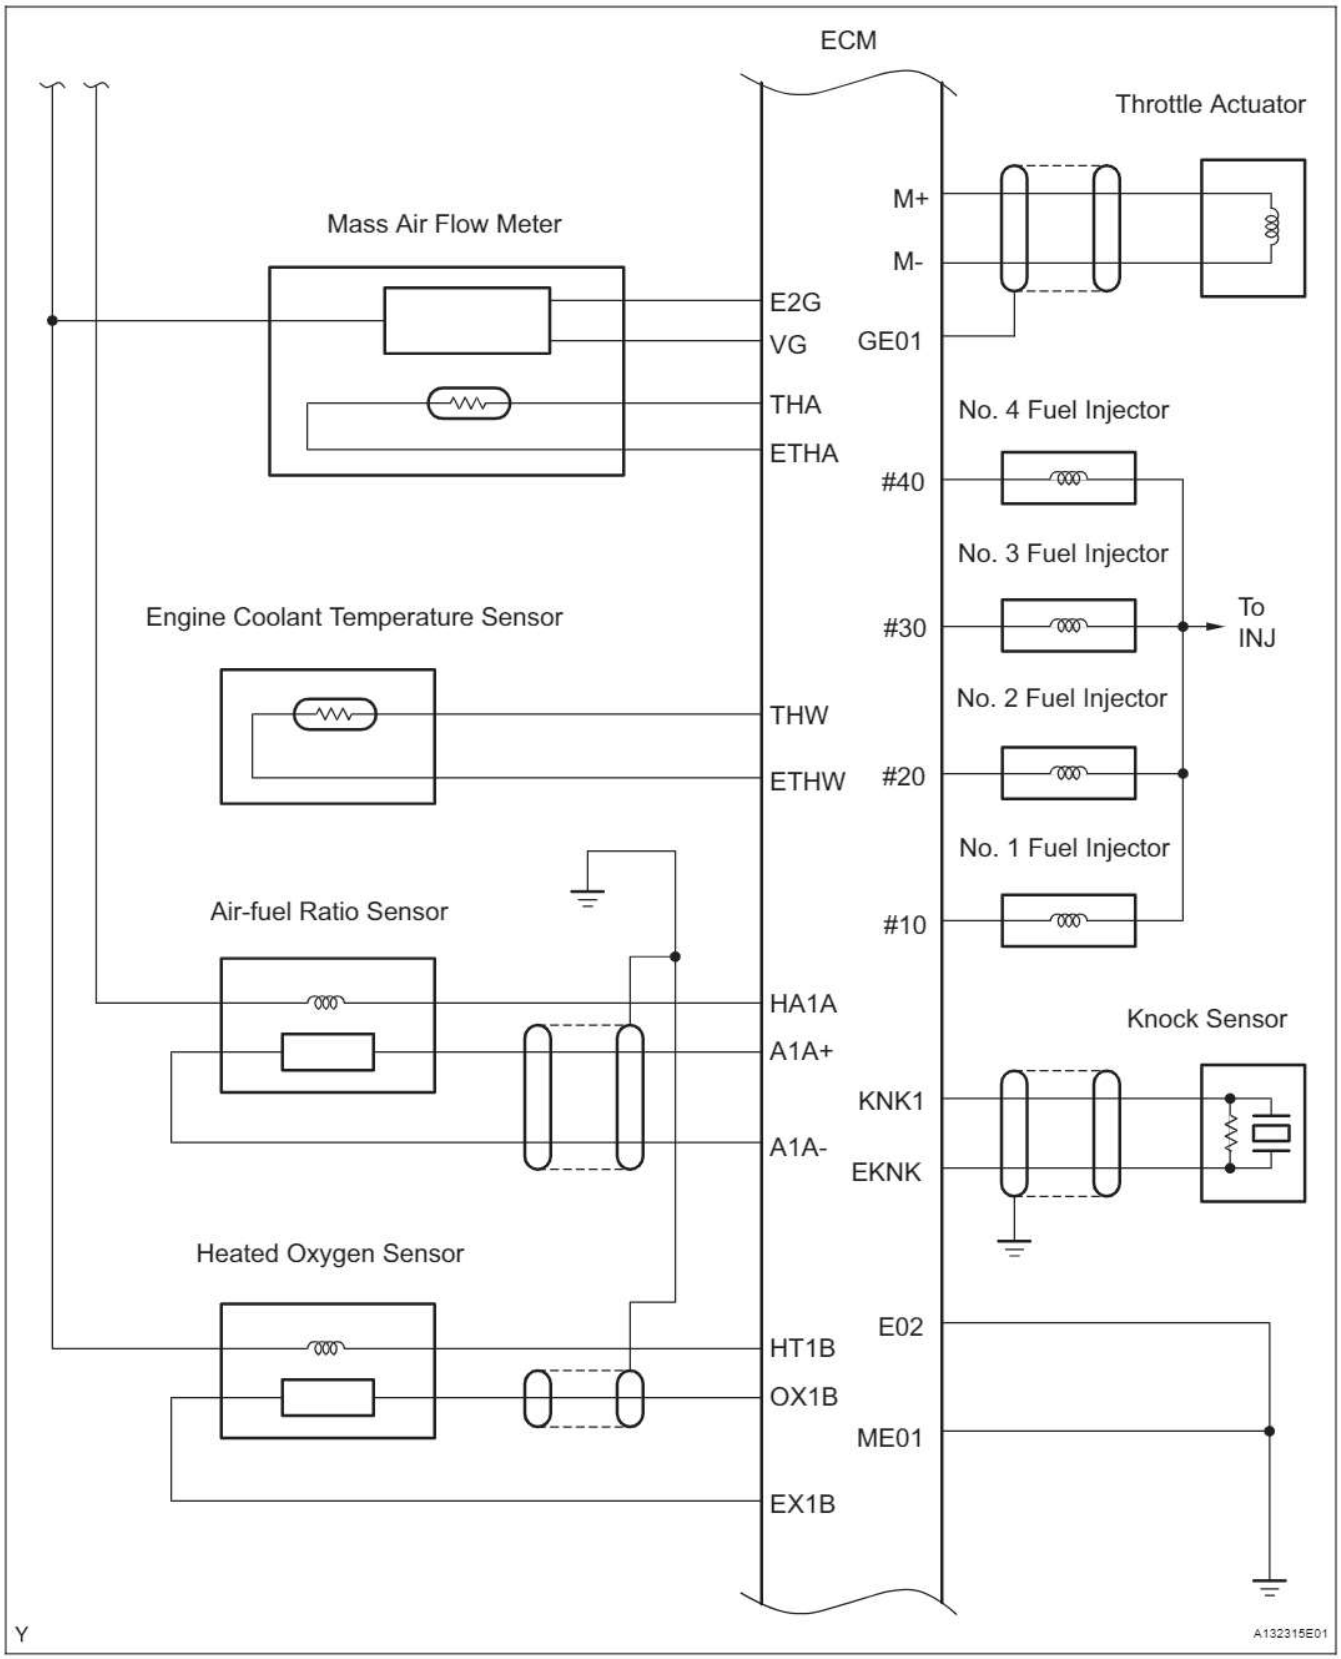
ECM
Throttle Actuator
M+
M-
GE01
Mass Air Flow Meter
E2G
VG
THA
ETHA
No. 4 Fuel Injector
#40
No. 3 Fuel Injector
#30
To INJ
Engine Coolant Temperature Sensor
THW
ETHW
No. 2 Fuel Injector
#20
No. 1 Fuel Injector
#10
Air-fuel Ratio Sensor
HA1A
A1A+
A1A-
Knock Sensor
KNK1
EKNK
Heated Oxygen Sensor
HT1B
OX1B
EX1B
E02
ME01
Y
A132315E01

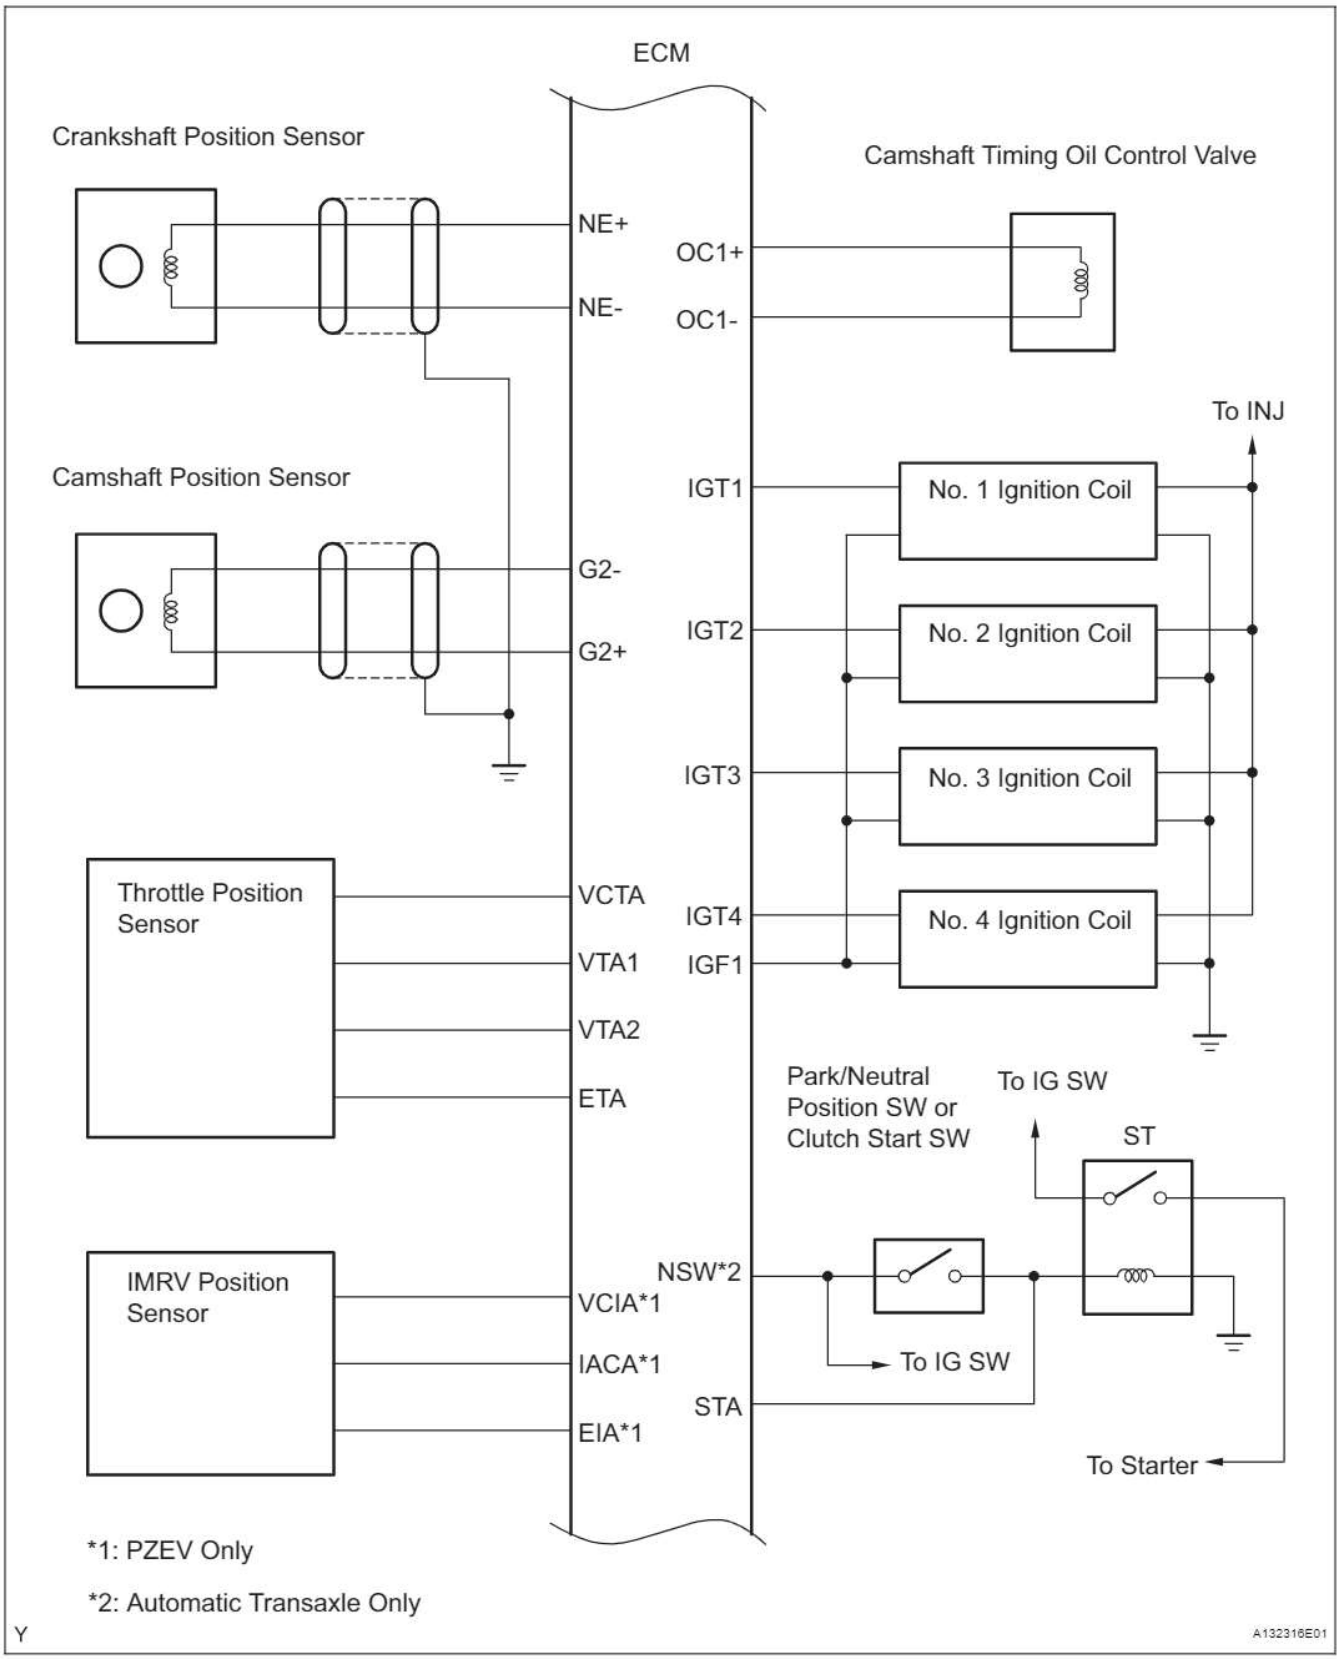
ECM
Crankshaft Position Sensor
NE+
NE-
Camshaft Timing Oil Control Valve
OC1+
OC1-
To INJ
Camshaft Position Sensor
G2-
G2+
IGT1
No. 1 Ignition Coil
IGT2
No. 2 Ignition Coil
IGT3
No. 3 Ignition Coil
IGT4
No. 4 Ignition Coil
IGF1
Throttle Position Sensor
VCTA
VTA1
VTA2
ETA
Park/Neutral Position SW or Clutch Start SW
To IG SW
ST
IMRV Position Sensor
NSW*2
VCIA*1
IACA*1
EIA*1
To IG SW
STA
To Starter
*1: PZEV Only
*2: Automatic Transaxle Only
Y
A132316E01

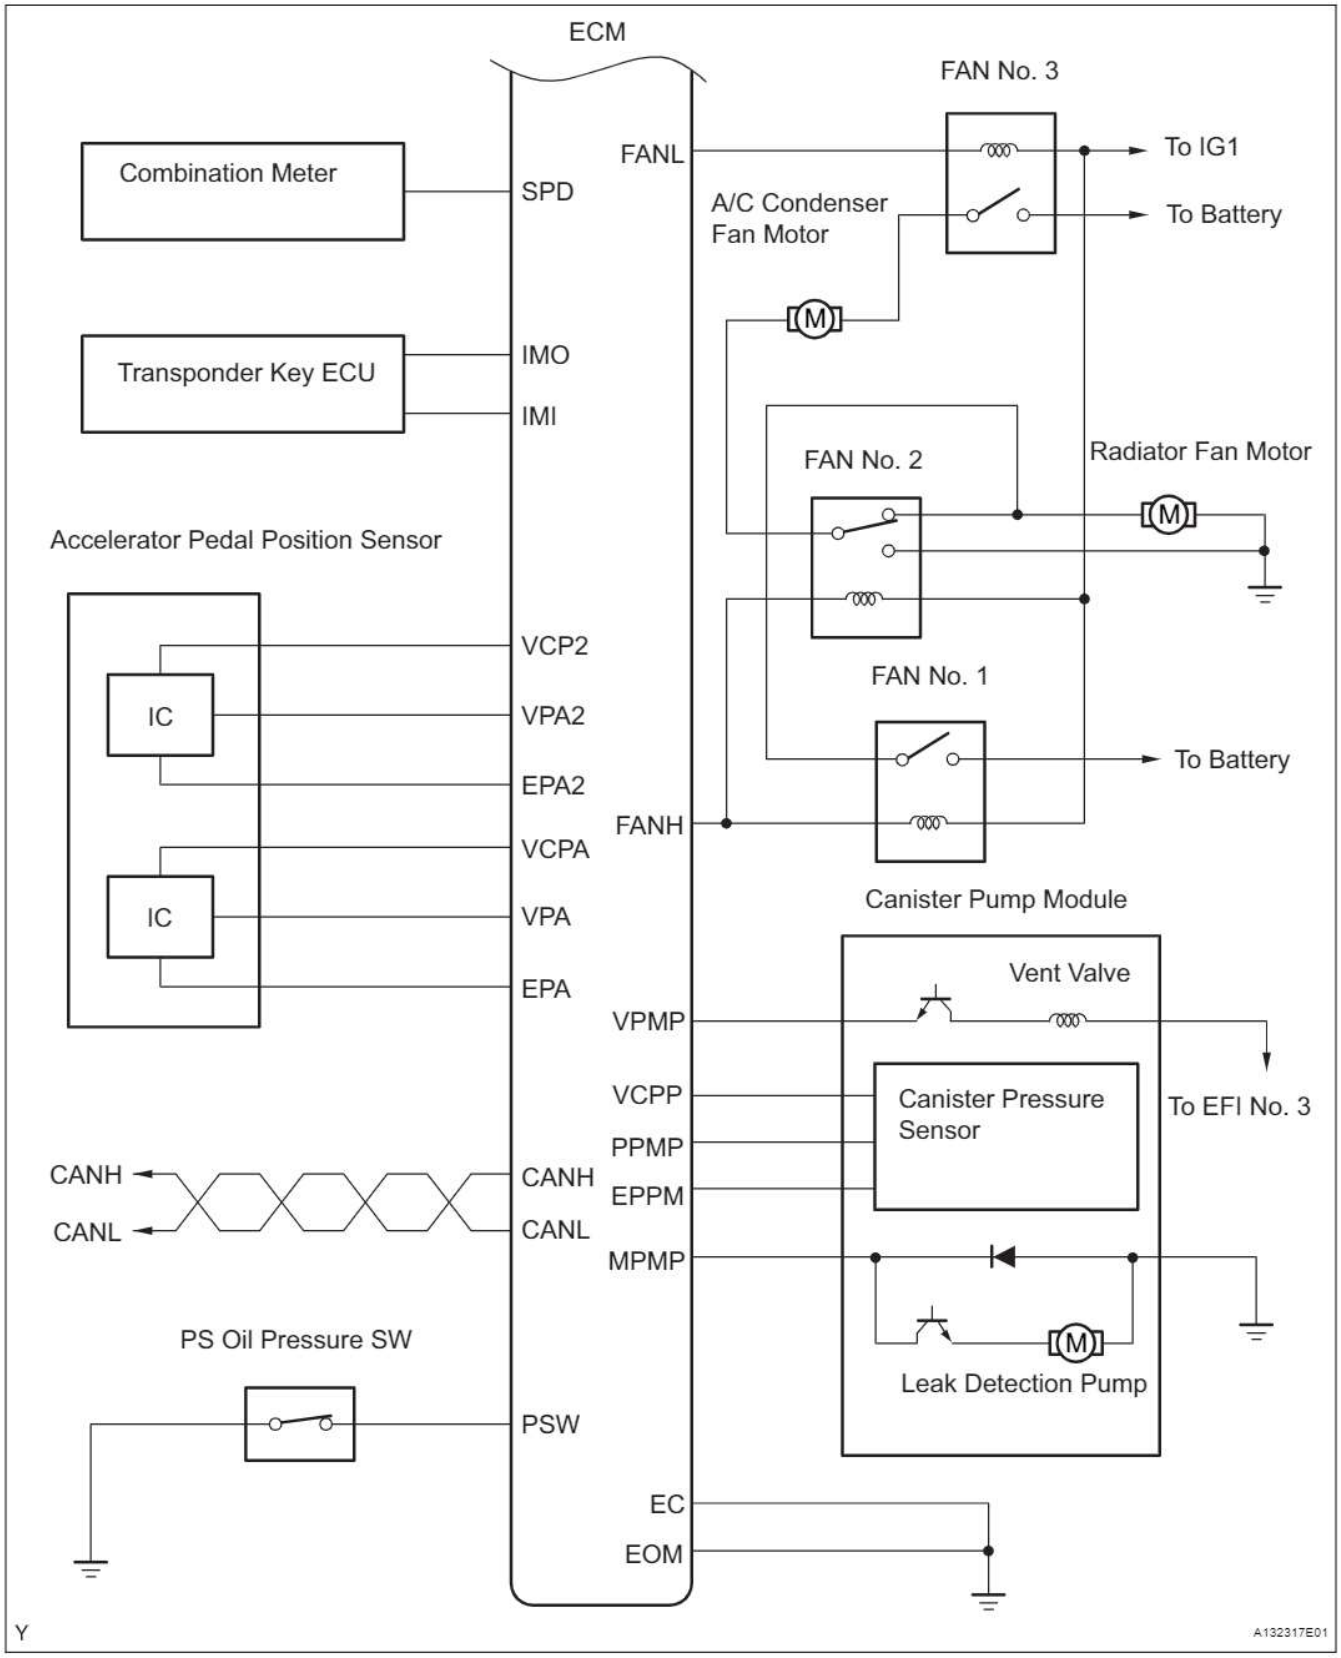
ECM
FAN No. 3
FANL
To IG1
Combination Meter
SPD
A/C Condenser Fan Motor
To Battery
M
Transponder Key ECU
IMO
IMI
FAN No. 2
Radiator Fan Motor
M
Accelerator Pedal Position Sensor
VCP2
IC
VPA2
EPA2
FAN No. 1
To Battery
FANH
VCPA
IC
VPA
EPA
Canister Pump Module
Vent Valve
VPMP
VCPP
Canister Pressure Sensor
To EFI No. 3
PPMP
EPPM
CANH
CANL
CANH
CANL
MPMP
M
PS Oil Pressure SW
Leak Detection Pump
PSW
EC
EOM
Y
A132317E01

HOW TO PROCEED WITH TROUBLESHOOTING

HINT:
*: Use the intelligent tester.

1	VEHICLE BROUGHT TO WORKSHOP

NEXT

ES

2	CUSTOMER PROBLEM ANALYSIS

NEXT

3	CONNECT INTELLIGENT TESTER TO DLC3*

HINT:
If the display indicates a communication fault in the tester, inspect the DLC3.

NEXT

4	CHECK FOR DTC AND FREEZE FRAME DATA*

HINT:
Record or print DTCs and freeze frame data, if necessary.

NEXT

5	CLEAR DTC AND FREEZE FRAME DATA*

NEXT

6	CONDUCT VISUAL INSPECTION

NEXT

7	SET CHECK MODE DIAGNOSIS*

NEXT

8	CONFIRM PROBLEM SYMPTOMS

HINT:
If the engine does not start, first perform the "CHECK DTC" procedures and "CONDUCT BASIC INSPECTION" procedures below.

Result

Result	Proceed to
Malfunction does not occur	A
Malfunction occurs	B

B → GO TO STEP 10

ES

A

9	SIMULATE SYMPTOMS

NEXT

10	CHECK FOR DTC*

Result

Result	Proceed to
Trouble code	A
No code	B

B → GO TO STEP 12

A

11	REFER TO DTC CHART

NEXT

GO TO STEP 14

12	CONDUCT BASIC INSPECTION

Result

Result	Proceed to
Malfunctioning parts not confirmed	A
Malfunctioning parts confirmed	B

B → GO TO STEP 17

A

13	REFER TO PROBLEM SYMPTOMS TABLE

Result

Result	Proceed to
Malfunctioning circuit confirmed	A
Malfunctioning parts confirmed	B

B → GO TO STEP 17

ES

A

14	CHECK ECM POWER SOURCE CIRCUIT

NEXT

15	CONDUCT CIRCUIT INSPECTION

Result

Result	Proceed to
Malfunction not confirmed	A
Malfunction confirmed	B

B → GO TO STEP 18

A

16	CHECK FOR INTERMITTENT PROBLEMS

NEXT

GO TO STEP 18

17	CONDUCT PARTS INSPECTION

NEXT

18	IDENTIFY PROBLEM

NEXT

19	ADJUST AND/OR REPAIR

NEXT

20	CONDUCT CONFIRMATION TEST

NEXT

END

CHECK FOR INTERMITTENT PROBLEMS

HINT:
Inspect the vehicle's ECM using check mode. Intermittent problems are easier to detect with the intelligent tester when the ECM is in check mode. In check mode, the ECM uses 1 trip detection logic, which is more sensitive to malfunctions than normal mode (default), which uses 2 trip detection logic.

1. Clear the DTCs (See page ES-38).
2. Switch the ECM from normal mode to check mode using the intelligent tester (See page ES-41).
3. Perform a simulation test.
4. Check and wiggle the harness(es), connector(s) and terminal(s).

BASIC INSPECTION

When a malfunction is not confirmed by the DTC check, troubleshooting should be carried out in all circuits considered to be possible causes of the problem. In many cases, by carrying out the basic engine check shown in the following flowchart, the location of the problem can be found quickly and efficiently. Therefore, using this check is essential when engine troubleshooting.

1 CHECK BATTERY VOLTAGE

NOTICE:
Conduct this check with the engine stopped and ignition switch off.
Result

Result	Proceed to
11 V or more	OK
Below 11 V	NG

NG → **CHARGE OR REPLACE BATTERY**

OK ↓

2 CHECK WHETHER ENGINE WILL CRANK

NG → **PROCEED TO PROBLEM SYMPTOMS TABLE**

OK ↓

3 CHECK WHETHER ENGINE STARTS

NG → **GO TO STEP 6**

OK ↓

4 CHECK AIR FILTER

(a) Visually check that the air filter is not excessively contaminated with dirt or oil.

NG → **REPLACE AIR FILTER**

OK ↓

5 CHECK IDLING SPEED

NG → **TROUBLESHOOT IDLING SPEED AND PROCEED TO NEXT STEP**

OK

6	CHECK FUEL PRESSURE

NG → TROUBLESHOOT FUEL PRESSURE AND PROCEED TO NEXT STEP

OK

7	CHECK FOR SPARKS

NG → TROUBLESHOOT SPARK AND PROCEED TO NEXT STEP

OK

PROCEED TO PROBLEM SYMPTOMS TABLE

REGISTRATION

NOTICE:
The Vehicle Identification Number (VIN) must be input into the replacement ECM.
HINT:
The VIN is a 17-digit alphanumeric number. The intelligent tester is required to register the VIN.

1. DESCRIPTION

This registration section consists of 3 parts: Input Instructions, Read VIN and Write VIN.

(a) Input Instructions: Explains the general VIN input instructions when using the intelligent tester.

(b) Read VIN: Explains the VIN reading process in a flowchart. This process allows the VIN stored in the ECM to be read in order to confirm that the two VINs, provided with the vehicle and stored in the vehicle's ECM, are the same.

(c) Write VIN: Explains the VIN writing process in a flowchart. This process allows the VIN to be input into the ECM. If the ECM is changed, or the vehicle VIN and ECM VIN do not match, the VIN can be registered or overwritten in the ECM by following this procedure.

2. INPUT INSTRUCTIONS

(a) Intelligent tester
The arrow buttons (UP, DOWN, RIGHT and LEFT) and numerical buttons (0 to 9) are used to input the VIN.

(b) Cursor Operation
To move the cursor around the tester screen, press the RIGHT and LEFT buttons.

(c) Alphabetical Character Input
(1) Press the UP and DOWN buttons to select the desired alphabetical character.
(2) After selection, the cursor should move.


(d) Numeric Character Input
(1) Press the numerical button corresponding to the number that you want to input.
(2) After input, the cursor should move.
HINT:
Numerical characters can also be selected by using the UP and DOWN buttons.

(e) Correction
(1) When correcting the input character(s), put the cursor onto the character using the RIGHT and LEFT buttons.
(2) Select or input the correct character using the UP/DOWN buttons, or the numerical buttons.

(f) Finishing Input Operation
(1) Make sure that the input VIN matches the vehicle VIN after input.
(2) Press the ENTER button on the tester.

3. READ VIN


(a) Confirm the vehicle VIN.
(b) Connect the intelligent tester to the DLC3.
(c) Turn the ignition switch to the ON position.
(d) Turn the tester on.
(e) Select the following menu items: DIAGNOSIS / ENHANCED OBD II/ VIN.

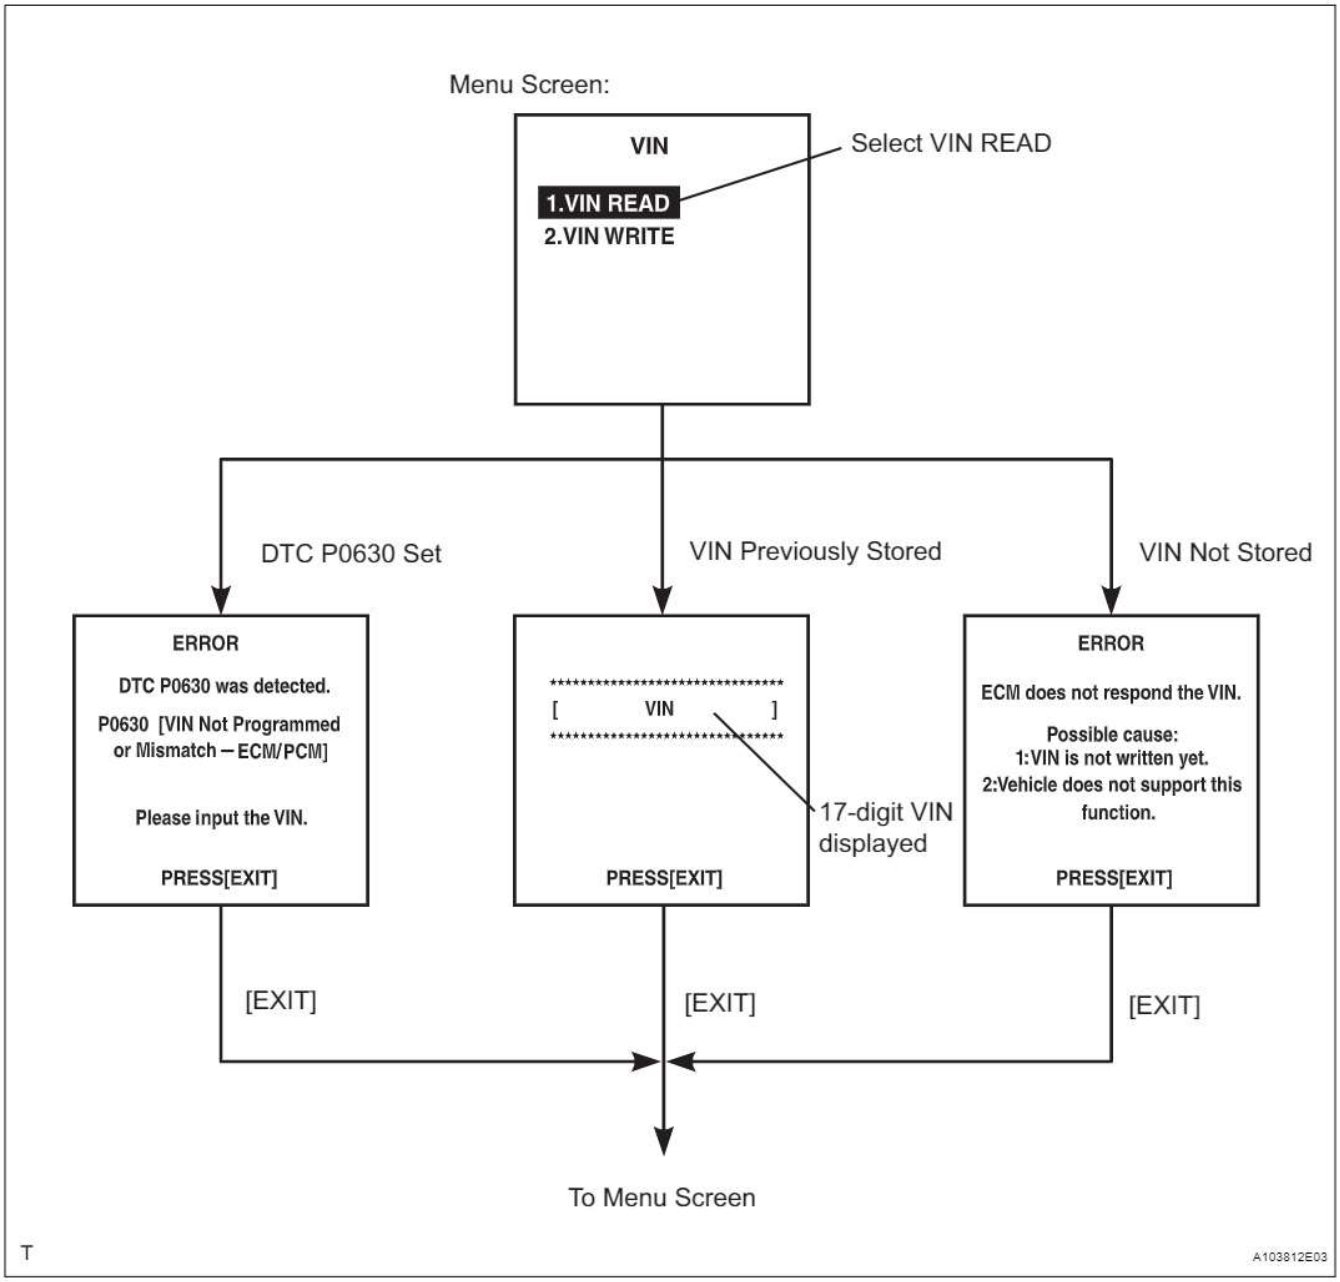



4. WRITE VIN

(a) Confirm the vehicle VIN.
(b) Connect the intelligent tester to the DLC3.
(c) Turn the ignition switch to the ON position.
(d) Turn the tester on.

(e) Select the following menu items: DIAGNOSIS / ENHANCED OBD II/ VIN.

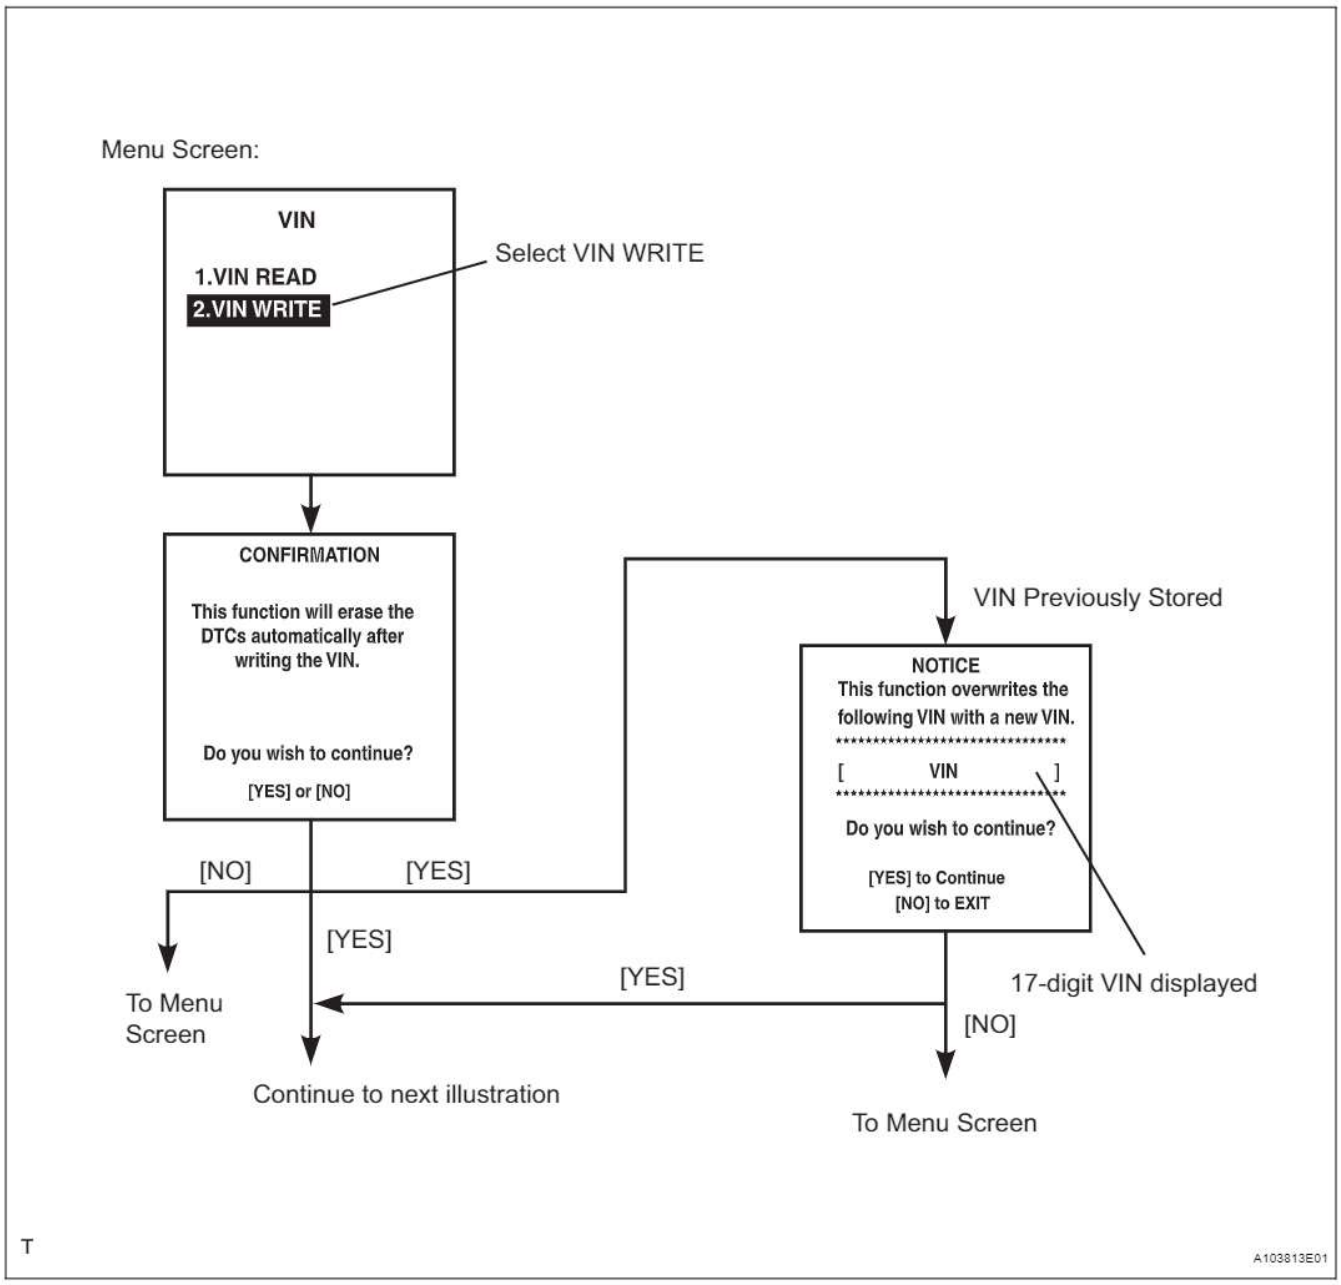

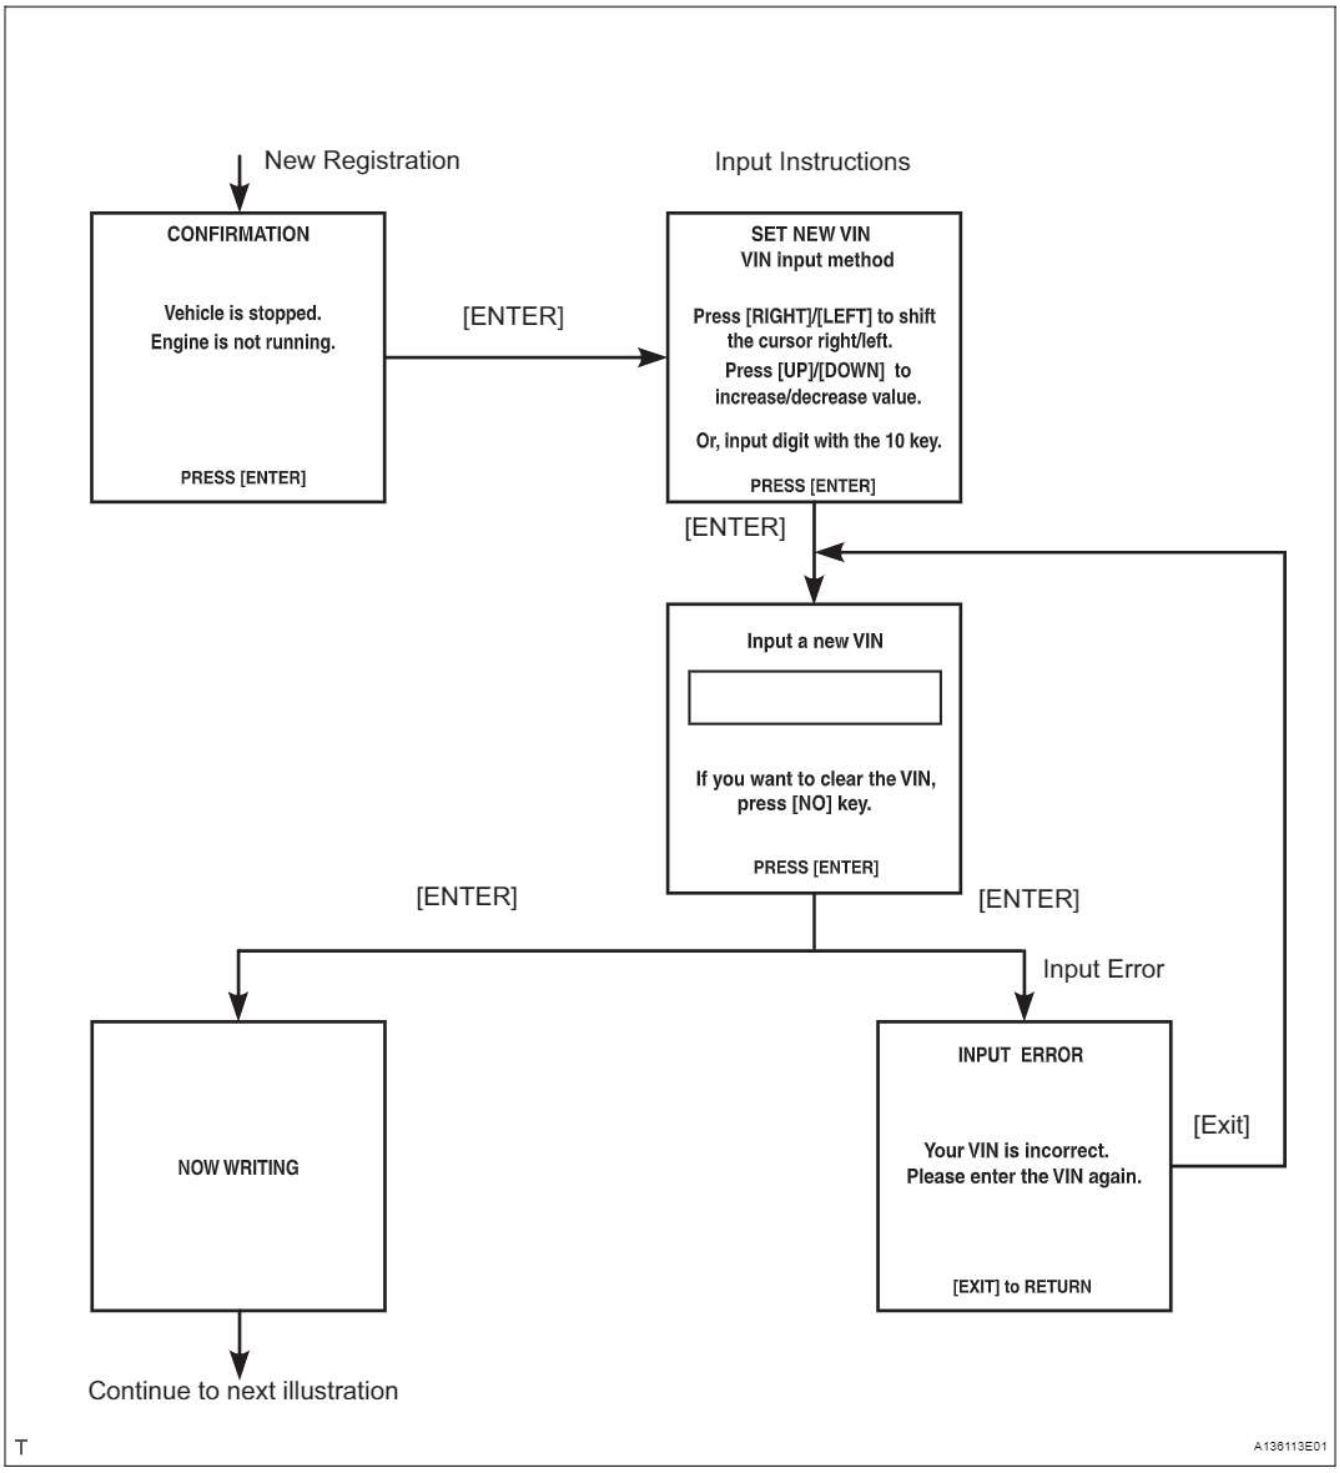
New Registration
Input Instructions
CONFIRMATION
Vehicle is stopped.
Engine is not running.
PRESS [ENTER]
[ENTER]
SET NEW VIN
VIN input method
Press [RIGHT]/[LEFT] to shift the cursor right/left.
Press [UP]/[DOWN] to increase/decrease value.
Or, input digit with the 10 key.
PRESS [ENTER]
[ENTER]
Input a new VIN
If you want to clear the VIN, press [NO] key.
PRESS [ENTER]
[ENTER]
[ENTER]
Input Error
NOW WRITING
INPUT ERROR
Your VIN is incorrect.
Please enter the VIN again.
[EXIT] to RETURN
[Exit]
Continue to next illustration
T
A136113E01

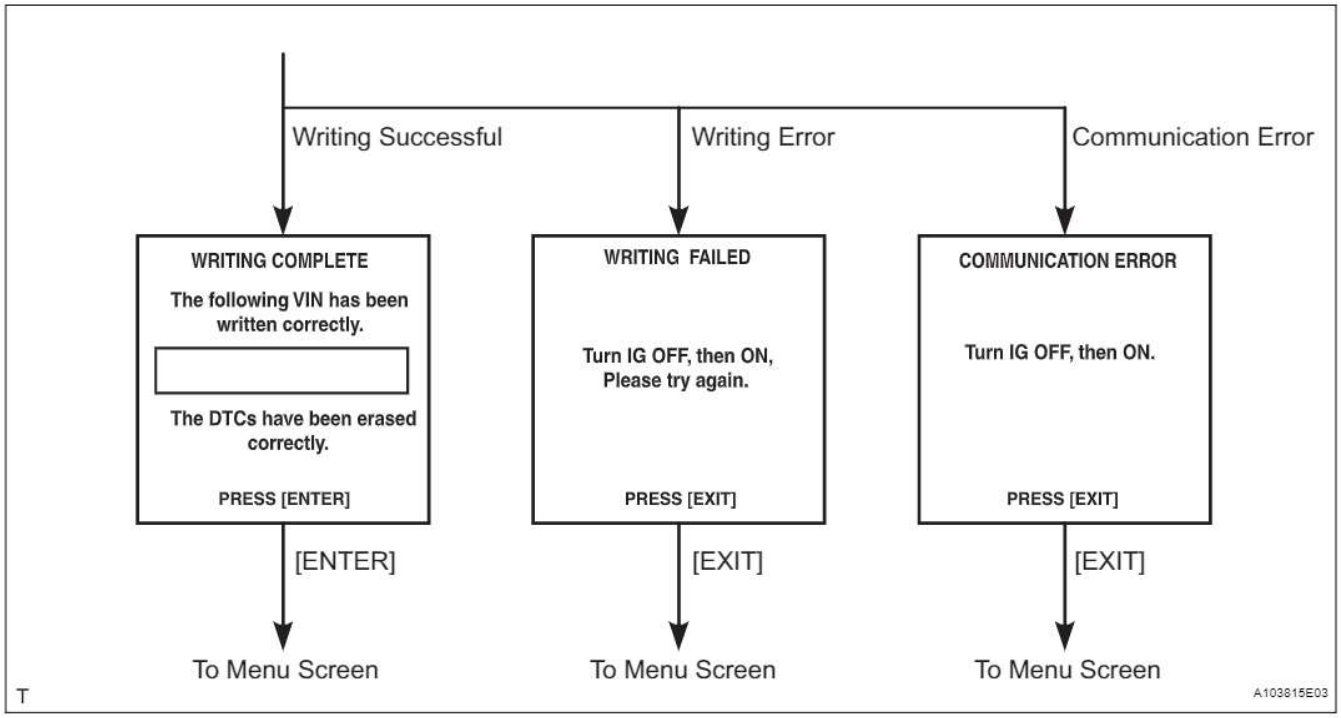
Writing Successful
Writing Error
Communication Error
WRITING COMPLETE
The following VIN has been written correctly.
The DTCs have been erased correctly.
PRESS [ENTER]
WRITING FAILED
Turn IG OFF, then ON, Please try again.
PRESS [EXIT]
COMMUNICATION ERROR
Turn IG OFF, then ON.
PRESS [EXIT]
[ENTER]
[EXIT]
[EXIT]
To Menu Screen
To Menu Screen
To Menu Screen
T
A103815E03

ES

ES

CHECKING MONITOR STATUS

The purpose of the monitor result (mode 06) is to allow access to the results of on-board diagnostic monitoring tests of specific components/systems that are not continuously monitored. Examples are catalysts and evaporative emissions (EVAP).

The monitor result allows the OBD II scan tool to display the monitor status, test value, minimum test limit and maximum test limit. These data are displayed after the vehicle has been driven to run the monitor.

When the test value is not between the minimum test limit and maximum test limit, the ECM (PCM) interprets this as a malfunction. If the test value is on the borderline of the test limits, the component is likely to malfunction in the near future.

Perform the following instructions to view the monitor status. Although this instruction refers to the Lexus/Toyota diagnostic tester, it can be checked using a generic OBD II scan tool. Refer to your scan tool operator's manual for specific procedural information.

1. PERFORM MONITOR DRIVE PATTERN

(a) Connect the intelligent tester to the DLC3.

(b) Turn the ignition switch to the ON position and turn the tester on.

(c) Clear the DTCs (See page ES-38).

(d) Run the vehicle in accordance with the applicable drive pattern described in READINESS MONITOR DRIVE PATTERN (See page ES-23). Do not turn the ignition switch off.

NOTE:

The test results will be lost if the ignition switch is turned off.

2. ACCESS MONITOR RESULT

(a) Select the following items from the intelligent tester menus: DIAGNOSIS / ENHANCED OBD II / MONITOR INFO and MONITOR RESULT. The monitor status appears after the component name.

- INCMP: The component has not been monitored yet.
- PASS: The component is functioning normally.
- FAIL: The component is malfunctioning.

(b) Confirm that the component is either PASS or FAIL.

(c) Select the component and press ENTER. The accuracy test value appears if the monitor status is either PASS or FAIL.

3. CHECK COMPONENT STATUS

(a) Compare the test value with the minimum test limit (MIN LIMIT) and maximum test limit (MAX LIMIT).

(b) If the test value is between the minimum test limits and maximum test limits, the component is functioning normally. If not, the component is malfunctioning. The test value is usually not near the test limit. If the test value is on the borderline of the test limits, the component is likely to malfunction in the near future.
HINT:
The monitor result might be PASS on rare occasions even if the malfunction indicator lamp (MIL) is illuminated. This indicates the system malfunctioned on a previous driving cycle. This might be caused by an intermittent problem.

4. MONITOR RESULT INFORMATION

If you use a generic scan tool, multiply the test value by the scaling value listed below.

A/F Sensor (Sensor 1):

Monitor ID	Test ID	Scaling	Unit	Description
$01	$8E	Multiply by 0.001	V	A/F sensor deterioration level
$01	$91	Multiply by 0.004	mA	A/F sensor current

HO2 Sensor (Sensor 2):

Monitor ID	Test ID	Scaling	Unit	Description
$02	$07	Multiply by 0.001	V	Minimum sensor voltage
$02	$08	Multiply by 0.001	V	Maximum sensor voltage
$02	$8F	Multiply by 0.0003	g	Maximum oxygen storage capacity

Catalyst:

Monitor ID	Test ID	Scaling	Unit	Description
$21	$A9	Multiply by 0.0003	No dimension	Oxygen storage capacity of catalyst

EVAP:

Monitor ID	Test ID	Scaling	Unit	Description
$3D	$C9	Multiply by 0.001	kPa	Test value for small leak (P0456)
$3D	$CA	Multiply by 0.001	kPa	Test value for gross leak (P0455)
$3D	$CB	Multiply by 0.001	kPa	Test value for leak detection pump stuck OFF (P2401)
$3D	$CD	Multiply by 0.001	kPa	Test value for leak detection pump stuck ON (P2402)
$3D	$CE	Multiply by 0.001	kPa	Test value for vent valve stuck OFF (P2420)
$3D	$CF	Multiply by 0.001	kPa	Test value for vent valve stuck ON (P2419)
$3D	$D0	Multiply by 0.001	kPa	Test value for reference orifice low flow (P043E)
$3D	$D1	Multiply by 0.001	kPa	Test value for reference orifice high flow (P043F)
$3D	$D4	Multiply by 0.001	kPa	Test value for purge VSV stuck closed (P0441)
$3D	$D5	Multiply by 0.001	kPa	Test value for purge VSV stuck open (P0441)
$3D	$D7	Multiply by 0.001	kPa	Test value for purge flow insufficient (P0441)

Rear Oxygen Sensor Heater:

Monitor ID	Test ID	Scaling	Unit	Description
$42	$91	Multiply by 0.001	Ohm	Oxygen sensor resistance bank 1 sensor 2

Misfire:

Monitor ID	Test ID	Scaling	Unit	Description
$A1	$0B	Multiply by 1	Time	Exponential Weighted Moving Average (EWMA) misfire for all cylinders: EWMA = Total misfire counts for last driving cycle * 0.1 + Last EWMA * 0.9 Misfire counts for last 10 driving cycles - Total
$A1	$0C	Multiply by 1	Time	Ignition switch to the ON position: Total misfire counts for last driving cycle Engine running: Total misfire counts for current driving cycle Misfire counts for last or current driving cycle - all cylinders
$A2	$0B	Multiply by 1	Time	Exponential Weighted Moving Average (EWMA) misfire for cylinder 1: EWMA = Total misfire counts for last driving cycle * 0.1 + Last EWMA * 0.9 Misfire counts for last 10 driving cycles - Total
$A2	$0C	Multiply by 1	Time	Ignition switch to the ON position: Total misfire counts for last driving cycle Engine running: Total misfire counts for current driving cycle Misfire counts for last or current driving cycle - cylinder 1
$A3	$0B	Multiply by 1	Time	Exponential Weighted Moving Average (EWMA) misfire for cylinder 2: EWMA = Total misfire counts for last driving cycle * 0.1 + Last EWMA * 0.9 Misfire counts for last 10 driving cycles - Total
$A3	$0C	Multiply by 1	Time	Ignition switch to the ON position: Total misfire counts for last driving cycle Engine running: Total misfire counts for current driving cycle Misfire counts for last or current driving cycle - cylinder 2
$A4	$0B	Multiply by 1	Time	Exponential Weighted Moving Average (EWMA) misfire for cylinder 3: EWMA = Total misfire counts for last driving cycle * 0.1 + Last EWMA * 0.9 Misfire counts for last 10 driving cycles - Total
$A4	$0C	Multiply by 1	Time	Ignition switch to the ON position: Total misfire counts for last driving cycle Engine running: Total misfire counts for current driving cycle Misfire counts for last or current driving cycle - cylinder 3
$A5	$0B	Multiply by 1	Time	Exponential Weighted Moving Average (EWMA) misfire for cylinder 4: EWMA = Total misfire counts for last driving cycle * 0.1 + Last EWMA * 0.9 Misfire counts for last 10 driving cycles - Total
$A5	$0C	Multiply by 1	Time	Ignition switch to the ON position: Total misfire counts for last driving cycle Engine running: Total misfire counts for current driving cycle Misfire counts for last or current driving cycle - cylinder 4

READINESS MONITOR DRIVE PATTERN

1. PURPOSE OF READINESS TESTS

- The On-Board Diagnostic (OBD II) system is designed to monitor the performance of emission related components, and indicate any detected abnormalities with DTCs (Diagnostic Trouble Codes). Since various components need to be monitored during different driving conditions, the OBD II system is designed to run separate monitoring programs called Readiness Monitors.
- The intelligent tester's software must be version 9.0 or newer to view the Readiness Monitor Status. To view the status, select the following menu items: DIAGNOSIS / ENHANCED OBD II / MONITOR INFO / MONITOR STATUS.
- When the Readiness Monitor status reads COMPL (complete), the necessary conditions have been met for running the performance tests for that Readiness Monitor.
- A generic OBD II scan tool can also be used to view the Readiness Monitor status.

HINT:

Many state Inspection and Maintenance (I/M) programs require a vehicle's Readiness Monitor status to show COMPL before beginning emission tests.

The Readiness Monitor will be reset to INCMPL (incomplete) if:

- The ECM has lost battery power or blown a fuse.
- DTCs have been cleared.
- The conditions for running the Readiness Monitor have not been met.

If the Readiness Monitor status shows INCMPL, follow the appropriate Readiness Monitor Drive Pattern to change the status to COMPL.

CAUTION:

Strictly observe posted speed limits, traffic laws, and road conditions when performing these drive patterns.


NOTICE:

These drive patterns represent the fastest method of satisfying all conditions necessary to achieve complete status for each specific Readiness Monitor.

In the event of a drive pattern being interrupted (possibly due to factors such as traffic conditions), the drive pattern can be resumed. In most cases, the Readiness Monitor will still achieve complete status upon completion of the drive pattern.

To ensure completion of the Readiness Monitors, avoid sudden changes in vehicle load and speed (driving up and down hills and/or sudden acceleration).

2. CATALYST MONITOR (ACTIVE AIR-FUEL RATIO CONTROL TYPE)

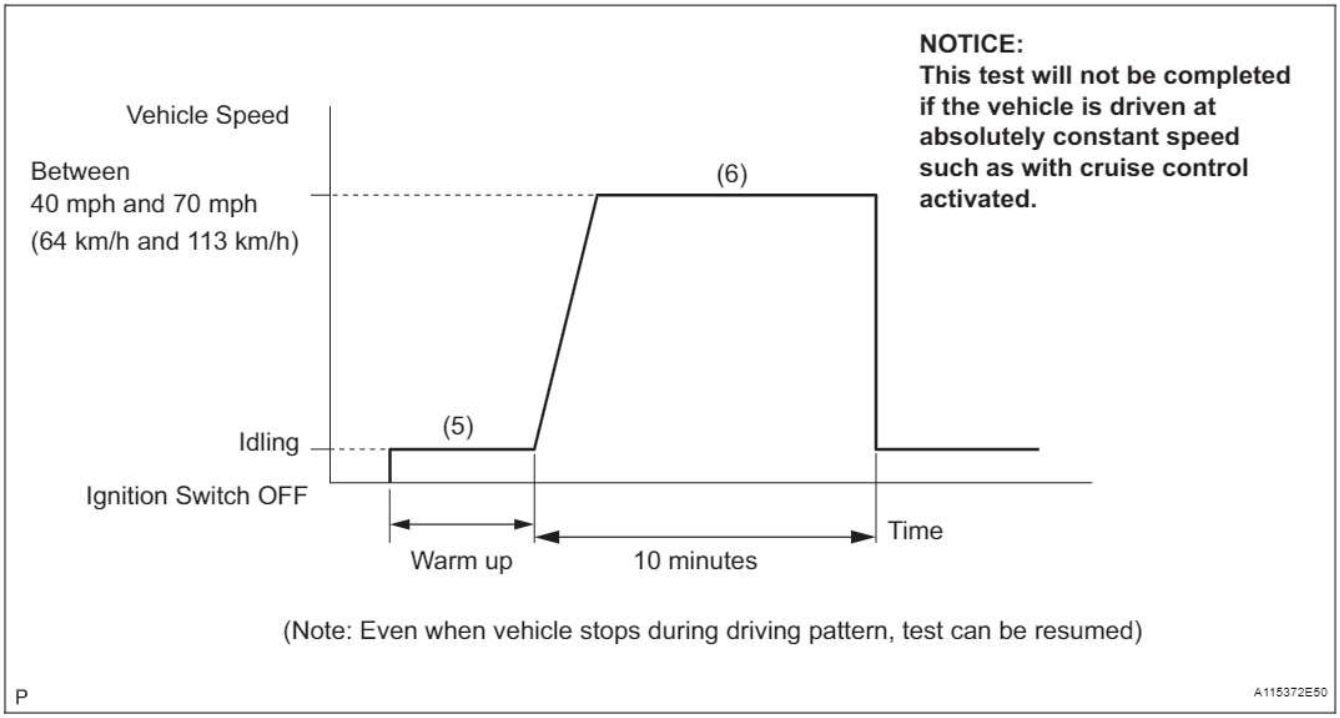

(a) Preconditions
The monitor will not run unless:
- The MIL is OFF.

(b) Drive Pattern
(1) Connect the intelligent tester to the DLC3.
(2) Turn the ignition switch to the ON position.
(3) Turn the tester on.
(4) Clear the DTCs (if set) (See page ES-38).
(5) Start the engine and warm it up.
(6) Drive the vehicle at between 40 mph and 70 mph (64 km/h and 113 km/h) for at least 10 minutes.

(c) Monitor Status
Check the Readiness Monitor status displayed on the tester.
If the status does not switch to COMPL (complete), extend the driving time.

3. EVAP SYSTEM MONITOR (KEY OFF TYPE)

(a) Preconditions
The monitor will not run unless:
– The fuel tank is less than 90% full.
– The altitude is less than 8,000 ft. (2,450 m).
– The vehicle is stationary.
– The engine coolant temperature is between 4.4°C and 35°C (40°F and 95°F).
– The intake air temperature is between 4.4°C and 35°C (40°F and 95°F).
– Vehicle was driven in a city area (or on free-way) for 10 minutes or more.

(b) Monitor Conditions
(1) Turn the ignition switch off and wait for 6 hours.
HINT:
Do not start the engine until checking Readiness Monitor status. If the engine is started, the step described above must be repeated.


(c) Monitor Status
(1) Connect the intelligent tester to the DLC3.
(2) Turn the ignition switch to the ON position.
(3) Turn the tester on.
(4) Check the Readiness Monitor status displayed on the tester.

If the status does not switch to COMPL (complete), restart the engine, make sure that the preconditions have been met, and then perform the Monitor Conditions again.

4. AIR-FUEL RATIO (A/F) AND HEATED OXYGEN (HO2) SENSOR MONITORS (ACTIVE AIR-FUEL RATIO CONTROL TYPE)

Monitor Drive Pattern

ECT: 75°C (167°F) or more

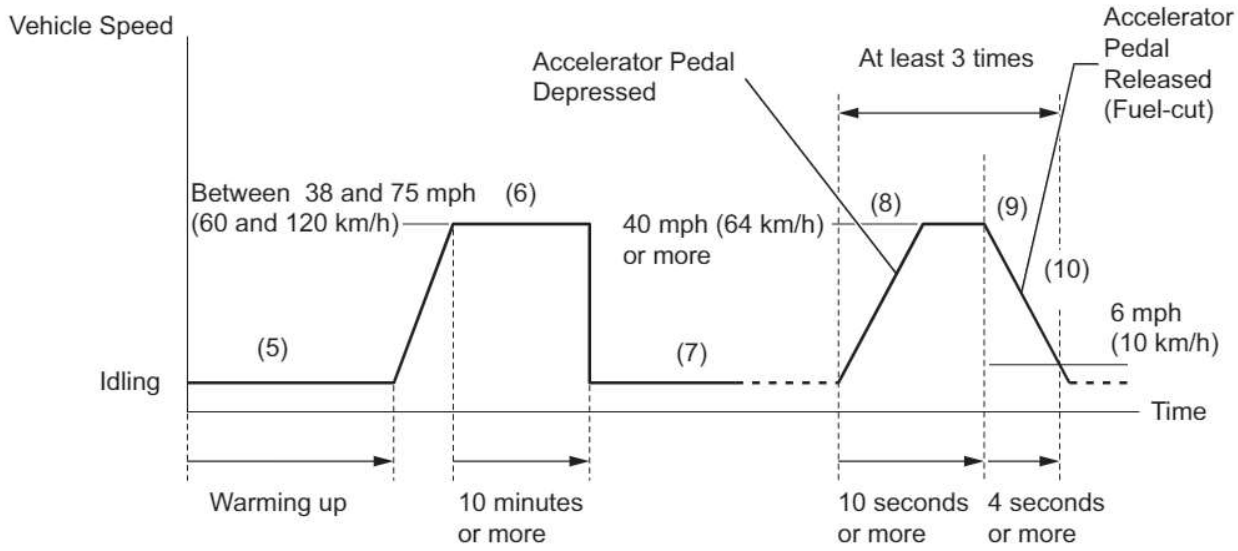


(a) Preconditions
The monitor will not run unless:
– 2 minutes or more have elapsed since the engine was started.
– The Engine Coolant Temperature (ECT) is 75°C (167°F) or more.
– Cumulative driving time at a vehicle speed of 30 mph (48 km/h) or more exceeds 6 minutes.
– Air-fuel ratio feedback control is performed.

(b) Drive Pattern for front A/F sensor and HO2 sensor
(1) Connect the intelligent tester to the DLC3.
(2) Turn the ignition switch to the ON position.
(3) Turn the tester on.
(4) Clear the DTCs (See page ES-38).
(5) Start the engine, and warm it up until the ECT reaches 75°C (167°F) or higher
(6) Drive the vehicle at between 38 mph (60 km/h) and 75 mph (120 km/h) for at least 10 minutes.
(7) Change the transmission to the 2nd gear.
(8) Accelerate the vehicle to 40 mph (64 km/h) or more by depressing the accelerator pedal for at least 10 seconds.
(9) Soon after performing step (8) above, release the accelerator pedal for at least 4 seconds without depressing the brake pedal, in order to execute fuel-cut control.
(10) Allow the vehicle to decelerate until the vehicle speed declines to less than 6 mph (10 km/h).
(11) Repeat steps from (8) through (10) above at least 3 times in one driving cycle.

(c) Monitor Status
(1) Check the Readiness Monitor status displayed on the tester.
(2) If the status does not switch to COMPL (complete), make sure that the preconditions have been met, and then perform steps from (5) through (11) in the Drive Pattern above.

5. AIR-FUEL RATIO (A/F) AND HEATED OXYGEN (HO2) SENSOR HEATER MONITORS (FRONT A/F AND REAR HO2 SENSOR TYPE)

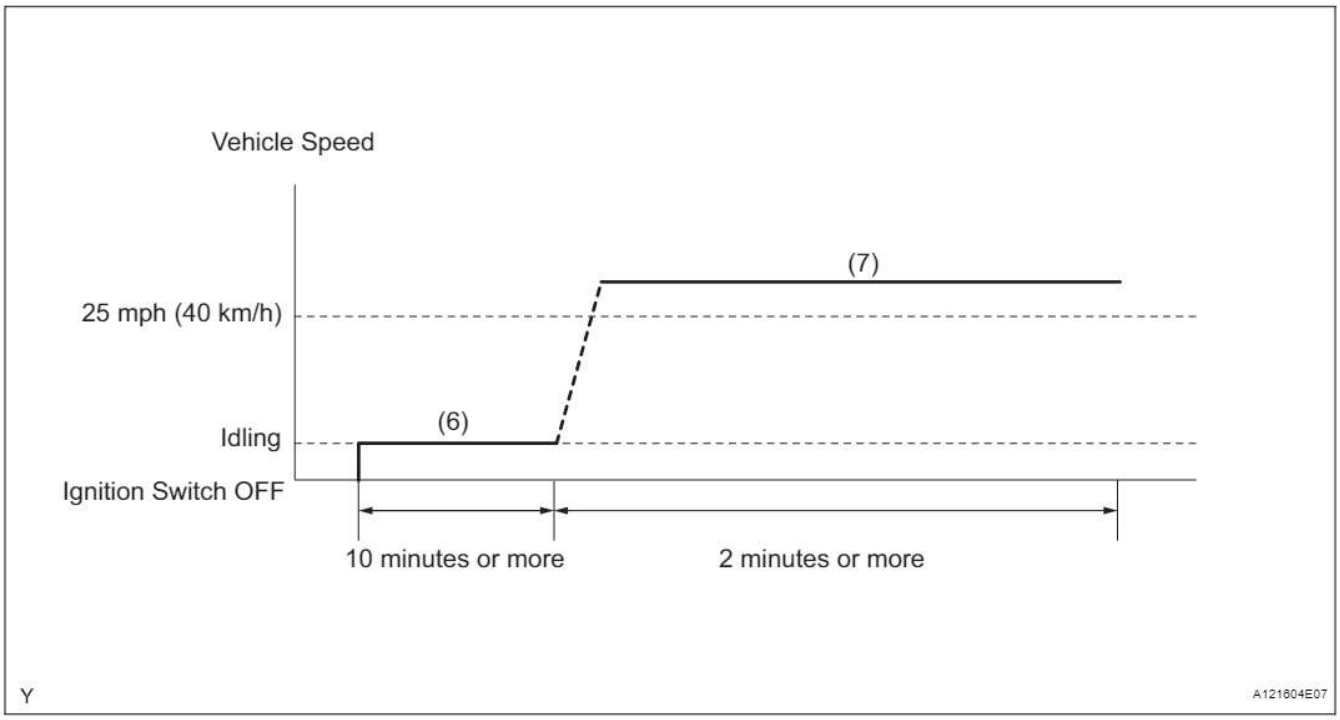

(a) Preconditions
The monitor will not run unless:
– The MIL is OFF.

(b) Drive Pattern
(1) Connect the intelligent tester to the DLC3.
(2) Turn the ignition switch to the ON position.
(3) Turn the tester on.
(4) Clear the DTCs (if set) (See page ES-38).
(5) Start the engine.
(6) Allow the engine to idle for 10 minutes or more.
(7) Drive the vehicle at 25 mph (40 km/h) or more for at least 2 minutes.

(c) Monitor Status
(1) Check the Readiness Monitor status displayed on the tester.
If the status does not switch to COMPL (complete), make sure that the preconditions have been met, and repeat steps from (5) to (7) described in the Drive Pattern above.

PROBLEM SYMPTOMS TABLE


HINT:
Use the table below to help determine the cause of the problem symptom. The potential causes of the symptoms are listed in order of probability in the "Suspected area" column of the table. Check each symptom by checking the suspected areas in the order they are listed. Replace parts as necessary.

SFI system:

Symptom	Suspected area	See page
Engine does not crank (Does not start)	1. Battery	CH-4
	2. Starter	ST-7
	3. Starter relay	ST-14
	4. Park / neutral position switch (Automatic transaxle)	AX-130
	5. Clutch start switch (Manual transaxle)	CL-37
	6. Immobiliser system	EI-55
No initial combustion (Does not start)	1. ECM power source circuit	ES-380
	2. Crankshaft position sensor	ES-411
	3. Camshaft position sensor	ES-409
	4. Ignition system	IG-3
	5. Fuel pump control circuit	ES-392
	6. ECM	ES-29
	7. VC output circuit	ES-387
Engine cranks normally but difficult to start	1. Fuel pump control circuit	ES-392
	2. Compression	EM-3
Difficult to start with cold engine	1. Ignition system	IG-3
	2. Spark plug	IG-5
	3. Fuel pump control circuit	ES-392
	4. Injector	FU-14
Difficult to start with warm engine	1. Injector	FU-14
	2. Ignition system	IG-3
	3. Spark plug	IG-5
	4. Fuel pump control circuit	ES-392
High engine idle speed	1. Electronic throttle control system	ES-280
	2. A/C signal circuit	-
	3. ECM power source circuit	ES-380
Low engine idle speed (Poor idling)	1. Electronic throttle control system	ES-280
	2. A/C signal circuit	-
	3. Fuel pump control circuit	ES-392
	4. Air induction system	EC-5
	5. PCV hose	EC-5
Rough idling	1. Compression	EM-3
	2. Spark plug	IG-5
	3. Injector	FU-14
	4. Ignition system	IG-3
	5. Fuel pump control circuit	ES-392
	6. Electronic throttle control system	ES-280
	7. Air induction system	EC-5
	8. PCV hose	EC-5
	9. Mass air flow meter	ES-402

Symptom	Suspected area	See page
Idle hunting	1. Electronic throttle control system	ES-280
	2. Air induction system	EC-5
	3. ECM power source circuit	ES-380
Hesitation/Poor acceleration	1. Fuel pump control circuit	ES-392
	2. Spark plug	IG-5
	3. Ignition system	IG-3
	4. Injector	FU-14
	5. Mass air flow meter	ES-402
	6. Electronic throttle control system	ES-280
	7. Air induction system	EC-5
	8. Compression	EM-3
Surging (Poor driveability)	1. Spark plug	IG-5
	2. Fuel pump control circuit	ES-392
	3. Ignition system	IG-3
	4. Injector	FU-14
	5. Mass air flow meter	ES-402
	6. Variable valve timing system	ES-69
	7. Compression	EM-3
Engine stalls soon after starting	1. Fuel pump control circuit	ES-392
	2. Spark plug	IG-5
	3. Ignition system	IG-3
	4. Injector	FU-14
	5. Variable valve timing system	ES-69
	6. Electronic throttle control system	ES-280
	7. Air induction system	EC-5
	8. PCV hose	EC-5
	9. Compression	EM-3
Engine stalls only during A/C operation	1. A/C signal circuit	-
	2. ECM	ES-29
Unable/difficult to refuel	1. Refueling valve (canister)	-

TERMINALS OF ECM

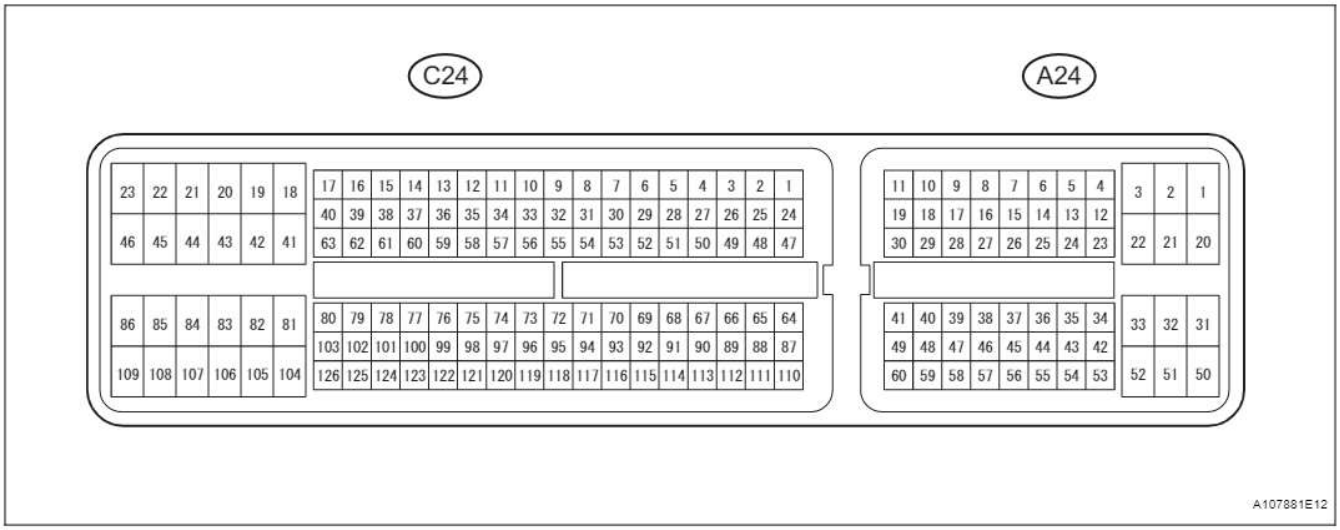

HINT:
The standard normal voltage between each pair of the ECM terminals is shown in the table below. The appropriate conditions for checking each pair of the terminals are also indicated. The result of checks should be compared with the standard normal voltage for that pair of the terminals, displayed in the Specified Condition column. The illustration above can be used as a reference to identify the ECM terminal locations.


Symbols (Terminal No.)	Wiring Colors	Terminal Descriptions	Conditions	Specified Conditions
BATT (A24-20) - E1 (C24-104)	Y - W-B	Battery (for measuring battery voltage and for ECM memory)	Always	9 to 14 V
+BM (A24-3) - E1 (C24-104)	LG - W-B	Power source of throttle actuator	Always	9 to 14 V
IGSW (A24-28) - E1 (C24-104)	Y - W-B	Ignition switch	Ignition switch to the ON position	9 to 14 V
+B (A24-2) - E1 (C24-104)	R - W-B	Power source of ECM	Ignition switch to the ON position	9 to 14 V
+B2 (A24-1) - E1 (C24-104)	R - W-B	Power source of ECM	Ignition switch to the ON position	9 to 14 V
OC1+ (C24-100) - OC1- (C24-123)	W - B	Camshaft timing oil control valve (OCV)	Idling	Pulse generation (see waveform 1)
MREL (A24-44) - E1 (C24-104)	O - W-B	EFI relay	Ignition switch to the ON position	9 to 14 V
VG (C24-118) - E2G (C24-116)	SB - W	Mass air flow meter	Idling, Shift lever position P or N, A/C switch OFF	0.5 to 3.0 V
THA (C24-65) - ETHA (C24-88)	P - Y	Intake air temperature sensor	Idling, Intake air temperature 20°C (68°F)	0.5 to 3.4 V
THW (C24-97) - ETHW (C24-96)	B - P	Engine coolant temperature sensor	Idling, Engine coolant temperature 80°C (176°F)	0.2 to 1.0 V
VCTA (C24-67) - ETA (C24-91)	B - P	Power source of throttle position sensor (specific voltage)	Ignition switch to the ON position	4.5 to 5.5 V
VTA1 (C24-115) - ETA (C24-91)	Y - P	Throttle position sensor (for engine control)	Ignition switch to the ON position, Throttle valve fully closed	0.5 to 1.1 V
			Ignition switch to the ON position, Throttle valve fully open	3.3 to 4.9 V

Symbols (Terminal No.)	Wiring Colors	Terminal Descriptions	Conditions	Specified Conditions
VTA2 (C24-114) - ETA (C24-91)	W-L - P	Throttle position sensor (for sensor malfunction detection)	Ignition switch to the ON position, Throttle valve fully closed	2.1 to 3.1 V
			Ignition switch to the ON position, Throttle valve fully open	4.6 to 5.0 V
VPA (A24-55) - EPA (A24-59)	G - Y	Accelerator pedal position sensor (for engine control)	Ignition switch to the ON position, Accelerator pedal released	0.5 to 1.1 V
			Ignition switch to the ON position, Accelerator pedal fully depressed	2.6 to 4.5 V
VPA2 (A24-56) - EPA2 (A24-60)	R - O	Accelerator pedal position sensor (for sensor malfunctioning detection)	Ignition switch to the ON position, Accelerator pedal released	1.2 to 2.0 V
			Ignition switch to the ON position, Accelerator pedal fully depressed	3.4 to 5.0 V
VCPA (A24-57) - EPA (A24-59)	B - Y	Power source of accelerator pedal position sensor (for VPA)	Ignition switch to the ON position	4.5 to 5.5 V
VCP2 (A24-58) - EPA2 (A24-60)	L - O	Power source of accelerator pedal position sensor (for VPA2)	Ignition switch to the ON position	4.5 to 5.5 V
HA1A (C24-109) - E04 (C24-46)	G - W	A/F sensor heater	Idling	Below 3.0 V
			Ignition switch to the ON position	9 to 14 V
A1A+ (C24-112) - E1 (C24-104)	L -W-B	A/F sensor	Ignition switch to the ON position	3.3 V*1
A1A- (C24-113) - E1 (C24-104)	P - W-B	A/F sensor	Ignition switch to the ON position	3.0 V*1
HT1B (C24-47) - E03 (C24-86)	LG - B	Heated oxygen sensor heater	Idling	Below 3.0 V
			Ignition switch to the ON position	9 to 14 V
OX1B (C24-64) - EX1B (C24-87)	W - BR	Heated oxygen sensor	Engine speed maintained at 2,500 rpm for 2 minutes after warming up sensor	Pulse generation (see waveform 2)
#10 (C24-108) - E01 (C24-45) #20 (C24-107) - E01 (C24-45) #30 (C24-106) - E01 (C24-45) #40 (C24-105) - E01 (C24-45)	B - W-B R - W-B Y - W-B L - W-B	Injector	Ignition switch to the ON position	9 to 14 V
			Idling	Pulse generation (see waveform 3)
KNK1 (C24-110) - EKNK (C24-111)	G - R	Knock sensor	Engine speed maintained at 4,000 after warming up engine	Pulse generation (see waveform 4)
G2+ (C24-99) - G2- (C24-98)	Y - BR	Camshaft position sensor	Idling	Pulse generation (see waveform 5)
NE+ (C24-122) - NE- (C24-121)	G - R	Crankshaft position sensor	Idling	Pulse generation (see waveform 5)
IGT1 (C24-85) - E1 (C24-104) IGT2 (C24-84) - E1 (C24-104) IGT3 (C24-83) - E1 (C24-104) IGT4 (C24-82) - E1 (C24-104)	W - W-B G-R - W-B G - W-B LG - W-B	Ignition coil (ignition signal)	Idling	Pulse generation (see waveform 6)
IGF1 (C24-81) - E1 (C24-104)	BR - W-B	Ignition coil (ignition confirmation signal)	Ignition switch to the ON position	4.5 to 5.5 V
			Idling	Pulse generation (see waveform 6)
PRG (C24-49) - E1 (C24-104)	O - W-B	Purge VSV	Ignition switch to the ON position	9 to 14 V
			Idling	Pulse generation (see waveform 7)
SPD (A24-8) - E1 (C24-104)	L - W-B	Speed signal from combination meter	Driving at 12 mph (20 km/h)	Pulse generation (see waveform 8)
STA (A24-48) - E1 (C24-104)	V - W-B	Starter signal	Cranking	5.5 V or more
NSW (C24-52)*2 - E1 (C24-104)	SB - W-B	Starter relay control	Ignition switch to the ON position	Below 1.5 V
			Cranking	5.5 V or more
STP (A24-36) - E1 (C24-104)	W - W-B	Stop light switch	Brake pedal depressed	7.5 to 14 V
			Brake pedal released	Below 1.5 V

ES


Symbols (Terminal No.)	Wiring Colors	Terminal Descriptions	Conditions	Specified Conditions
ST1- (A24-35) - E1 (C24-104)	GR - W-B	Stop light switch (opposite to STP terminal)	Ignition switch to the ON position, Brake pedal depressed	Below 1.5 V
			Ignition switch to the ON position, Brake pedal released	7.5 to 14 V
M+ (C24-42) - ME01 (C24-43)	G - B	Throttle actuator	Idling with warm engine	Pulse generation (see waveform 9)
M- (C24-41) - ME01 (C24-43)	R - B	Throttle actuator	Idling with warm engine	Pulse generation (see waveform 10)
FC (A24-7) - E1 (C24-104)	Y - W-B	Fuel pump control	Ignition switch to the ON position	9 to 14 V
			Idling	Below 1.5 V
W (A24-24) - E1 (C24-104)	BR - W-B	MIL	Ignition switch to the ON position	Below 1.5 V
			Idling	9 to 14 V
TC (A24-27) - E1 (C24-104)	P - W-B	Terminal TC of DLC3	Ignition switch to the ON position	9 to 14 V
TACH (A24-15) - E1 (C24-104)	B - W-B	Engine speed	Idling	Pulse generation (see waveform 11)
VPMP (A24-42) - E1 (C24-104)	W - W-B	Vent valve (built into canister pump module)	Ignition switch to the ON position	9 to 14 V
MPMP (A24-34) - E1 (C24-104)	G - W-B	Leak detection pump (built into canister pump module)	Leak detection pump OFF	Below 3 V
			Leak detection pump ON	9 to 14 V
VCPP (C24-70) - EPPM (C24-94)	R - G	Power source for canister pressure sensor (specific voltage)	Ignition switch to the ON position	4.5 to 5.5 V
PPMP (C24-71) - EPPM (C24-94)	L - G	Canister pressure sensor (built into canister pump module)	Ignition switch to the ON position	3 to 3.6 V
FANL (A24-21) - E1 (C24-104)	R - W-B	Fan No. 1 relay	Ignition switch to the ON position	9 to 14 V
			Idling with A/C ON, or high engine coolant temperature	Below 1.5 V
FANH (A24-22) - E1 (C24-104)	W - W-B	Fan No. 2, 3 relay	Idling with high engine coolant temperature	Below 1.5 V
ALT (C24-50) - E1 (C24-104)	L - W-B	Generator	Ignition switch to the ON position	9 to 14 V
CANH (A24-41) - E1 (C24-104)	B - W-B	CAN communication line	Ignition switch to the ON position	Pulse generation (see waveform 12)
CANL (A24-49) - E1 (C24-104)	W - W-B	CAN communication line	Ignition switch to the ON position	Pulse generation (see waveform 13)
IAC+ (A24-33)*3 - E1 (C24-104)	L - W-B	Intake manifold runner valve motor	Ignition switch to the ON position	Pulse generation
IAC- (A24-52)*3 - E1 (C24-104)	W - W-B	Intake manifold runner valve motor	Ignition switch to the ON position	Pulse generation
VCIA (C24-103)*3 - EIA (C24-126)*3	B - L	Power source of intake manifold runner valve position sensor (Specific voltage)	Ignition switch to the ON position	4.5 to 5.5 V
IACA (C24-93)*3 - EIA (C24-126)*3	B-W - L	Intake manifold runner valve position sensor	Ignition switch to the ON position, intake manifold runner valve fully closed.	0.2 to 1.0 V
			Ignition switch to the ON position, intake manifold runner valve fully opened.	3.2 to 4.8 V

HINT:
*1: The ECM terminal voltage is constant regardless of the output voltage from the sensor.
*2: Automatic transaxle only
*3: PZEV only

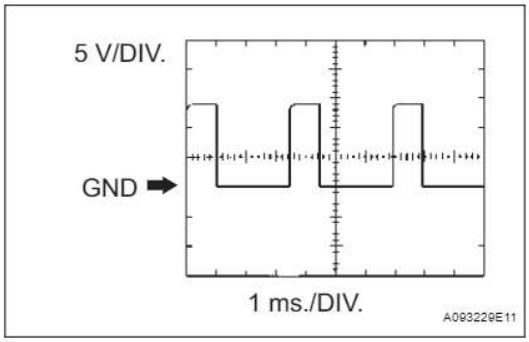

1. WAVEFORM 1
Camshaft timing oil control valve (OCV):


ECM Terminal Names	Between OC1+ and OC1-
Tester Ranges	5 V/DIV., 1 ms./DIV.
Conditions	Idling

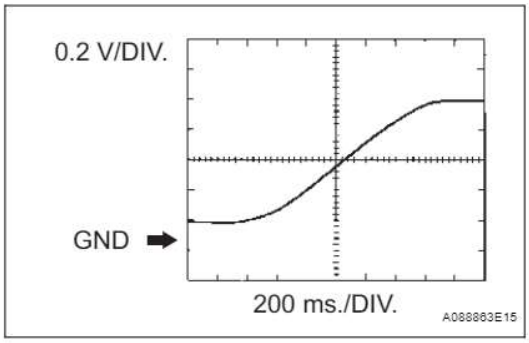

2. WAVEFORM 2
Heated oxygen sensor:

ECM Terminal Names	Between OX1B and EX1B
Tester Ranges	0.2 V/DIV., 200 ms./DIV.
Conditions	Engine speed maintained at 2,500 rpm for 2 minutes after warming up sensor


HINT:
In DATA LIST, item O2S B1 S2 shows the ECM input values from the heated oxygen sensor.

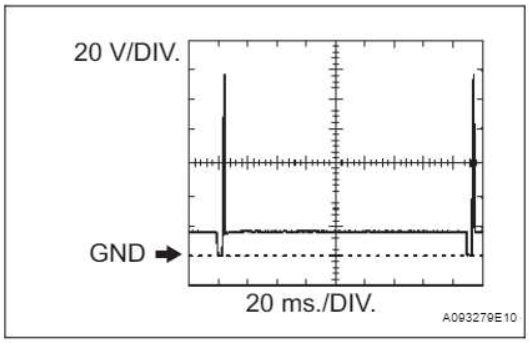

3. WAVEFORM 3
Injector No. 1 (to No. 4) injection signal:

ECM Terminal Names	Between #10 (to #40) and E01
Tester Ranges	20 V/DIV., 20 ms./DIV.
Conditions	Idling


HINT:
The wavelength becomes shorter as the engine rpm increases.

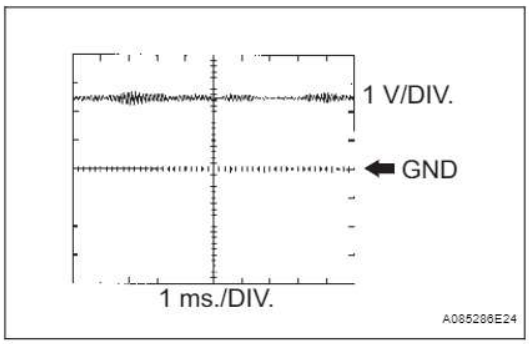

4. WAVEFORM 4
Knock sensor:

ECM Terminal Names	Between KNK1 and EKNK
Tester Ranges	1 V/DIV., 1 ms./DIV.
Conditions	Engine speed maintained at 4,000 rpm after warming up engine


HINT:
- The wavelength becomes shorter as the engine rpm increases.
- The waveforms and amplitudes displayed differ slightly depending on the vehicle.

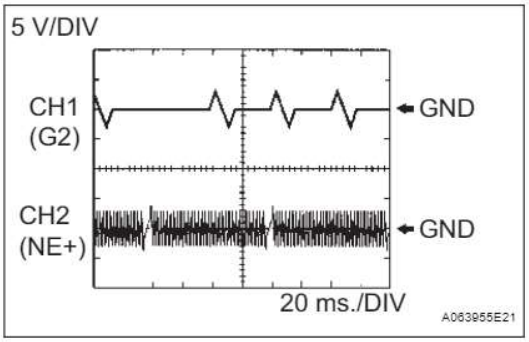

5. WAVEFORM 5
Crankshaft position sensor and Camshaft position sensor:

ECM Terminal Names	CH1: Between G2+ and G2- CH2: Between NE+ and NE-
Tester Ranges	5 V/DIV., 20 ms./DIV.
Conditions	Idling


HINT:
The wavelength becomes shorter as the engine rpm increases.

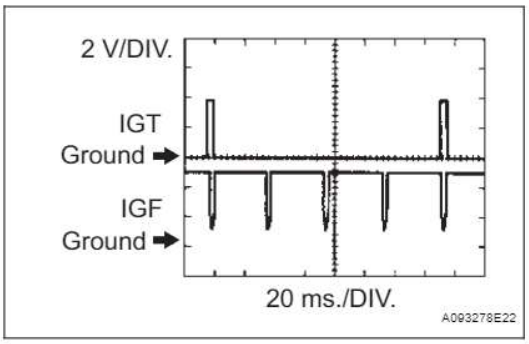

6. WAVEFORM 6
Igniter IGT signal (from ECM to igniter) and Igniter IGF signal (from igniter to ECM):

ECM Terminal Names	Between IGT (1 to 4) and E1 Between IGF1 and E1
Tester Ranges	2 V/DIV., 20 ms./DIV.
Conditions	Idling


HINT:
The wavelength becomes shorter as the engine rpm increases.

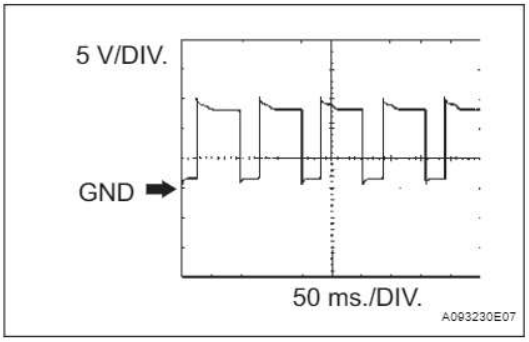

7. WAVEFORM 7
Purge VSV:

ECM Terminal Names	Between PRG and E1
Tester Ranges	5 V/DIV., 50 ms./DIV.
Conditions	Idling


HINT:
If the waveform is not similar to the illustration, check the waveform again after idling for 10 minutes or more.

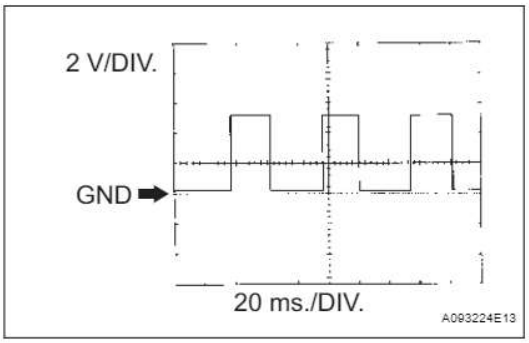

8. WAVEFORM 8
Vehicle speed signal:

ECM Terminal Names	Between SPD and E1
Tester Ranges	2 V/DIV., 20 ms./DIV.
Conditions	Driving at 12 mph (20 km/h)


HINT:
The wavelength becomes shorter as the vehicle speed increases.

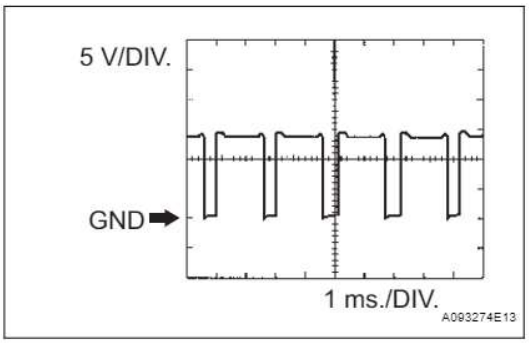

9. WAVEFORM 9
Throttle actuator positive terminal:

ECM Terminal Names	Between M+ and ME01
Tester Ranges	5 V/DIV., 1 ms./DIV.
Conditions	Idling with warm engine


HINT:
The duty ratio varies depending on the throttle actuator operation.

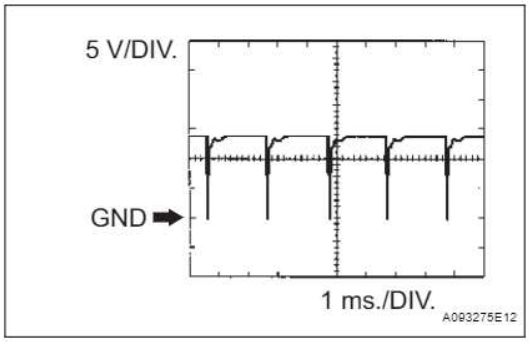

10. WAVEFORM 10
Throttle actuator negative terminal:

ECM Terminal Names	Between M- and ME01
Tester Ranges	5 V/DIV., 1 ms./DIV.
Conditions	Idling with warm engine


HINT:
The duty ratio varies depending on the throttle actuator operation.

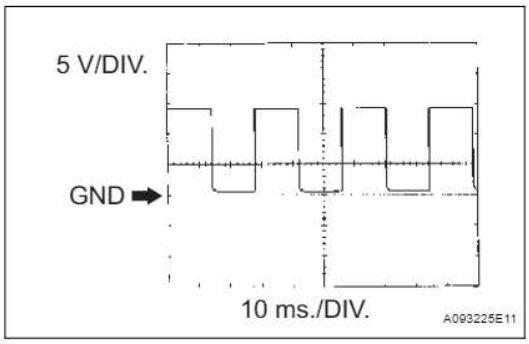

11. WAVEFORM 11
Engine speed signal:

ECM Terminal Names	Between TACH and E1
Tester Ranges	5 V/DIV., 10 ms./DIV.
Conditions	Idling


HINT:
The wavelength becomes shorter as the engine rpm increases.

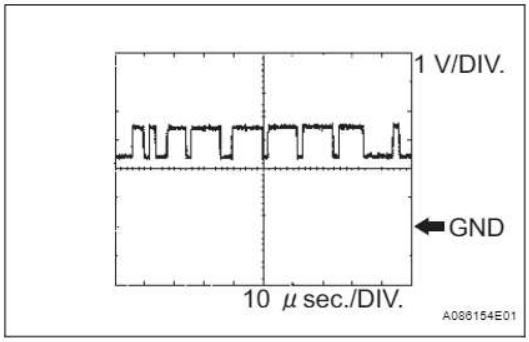

12. WAVEFORM 12
CAN communication signal:

ECM Terminal Names	Between CANH and E1
Tester Ranges	1 V/DIV., 10 μsec./DIV.
Conditions	Engine stops and ignition switch to the ON position

HINT:
The waveform varies depending on the CAN communication signal.

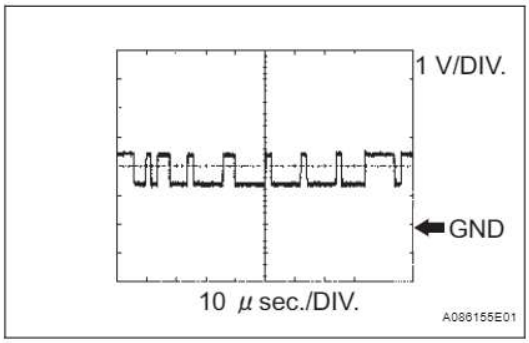

13. WAVEFORM 13
CAN communication signal:

ECM Terminal Names	Between CANL and E1
Tester Ranges	1 V/DIV., 10 μsec./DIV.
Conditions	Engine stops and ignition switch to the ON position

HINT:
The waveform varies depending on the CAN communication signal.

ES

DIAGNOSIS SYSTEM

1. DESCRIPTION

When troubleshooting OBD II (On-Board Diagnostics) vehicles, the intelligent tester (complying with SAE J1987) must be connected to the DLC3 (Data Link Connector 3) of the vehicle. Various data in the vehicle's ECM (Engine Control Module) can be then read.

OBD II regulations require that the vehicle's on-board computer illuminates the MIL (Malfunction Indicator Lamp) on the instrument panel when the computer detects a malfunction in:

(a) The emission control system components.

(b) The powertrain control components (which affect vehicle emissions).

(c) The computer itself.


In addition, if the applicable DTCs (Diagnostic Trouble Codes) prescribed by SAE J2012 are not recorded on 3 consecutive trips, the MIL turns off automatically but the DTCs remain recorded in the ECM memory.

To check DTCs, connect the intelligent tester to the DLC3. The tester displays DTCs, freeze frame data, and a variety of the engine data. The DTCs and freeze frame data can be erased with the tester (See page ES-38).

In order to enhance OBD function on vehicles and develop the Off-Board diagnosis system, CAN (Controller Area Network) communication is introduced in this system. It minimizes the gap between technician skills and vehicle technology. CAN is a network, which uses a pair of data transmission lines, spanning multiple computers and sensors. It allows high speed communication between the systems and simplifies the wire harness connection.

Since this system is equipped with the CAN communication, connecting the CAN VIM (Vehicle Interface Module) to the intelligent tester is necessary to display any information from the ECM. (Also the communication between the intelligent tester and the ECM uses CAN communication signals.) When confirming the DTCs and any data of the ECM, connect the CAN VIM between the DLC3 and the intelligent tester.



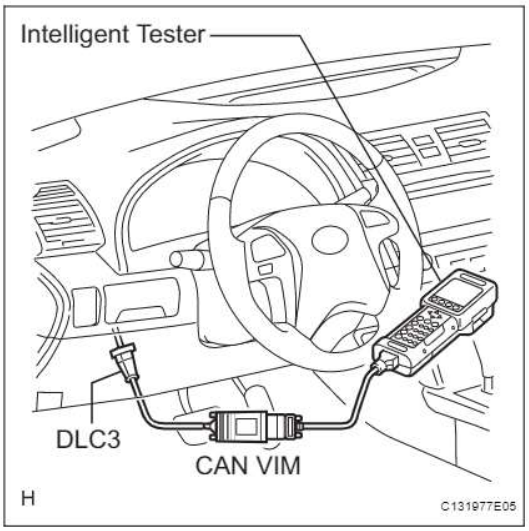

2. NORMAL MODE AND CHECK MODE

The diagnosis system operates in normal mode during normal vehicle use. In normal mode, "2 trip detection logic" is used to ensure accurate detection of malfunctions. "Check mode" is also available as an option for technicians. In check mode, "1 trip detection logic" is used for simulating malfunction symptoms and increasing the system's ability to detect malfunctions, including intermittent problems (intelligent tester only) (See page ES-41).

3. 2 TRIP DETECTION LOGIC


When a malfunction is first detected, the malfunction is temporarily stored in the ECM memory (1st trip). If the same malfunction is detected during the next subsequent drive cycle, the MIL is illuminated (2nd trip).

4. FREEZE FRAME DATA

The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can be helpful in determining whether the vehicle was running or stopped, whether the air-fuel ratio was lean or rich, as well as other data recorded at the time of a malfunction.

5. DLC3 (Data Link Connector 3)

The vehicle's ECM uses the ISO 15765-4 for communication protocol. The terminal arrangement of the DLC3 complies with SAE J1962 and matches the ISO 15765-4 format.

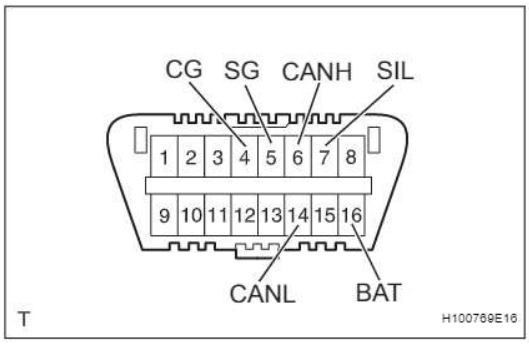

Symbols	Terminal No.	Names	Reference terminal	Results	Condition
SIL	7	Bus "+" line	5 - Signal ground	Pulse generation	During transmission
CG	4	Chassis ground	Body ground	1 Ω or less	Always
SG	5	Signal ground	Body ground	1 Ω or less	Always
BAT	16	Battery positive	Body ground	9 to 14 V	Always
CANH	6	CAN "High" line	14 - CANL	54 to 69 Ω	Ignition switch OFF*
			Battery positive	6 kΩ or higher	Ignition switch OFF*
			4 - CG	200 Ω or higher	Ignition switch OFF*
CANL	14	CAN "Low" line	Battery positive	6 kΩ or higher	Ignition switch OFF*
			4 - CG	200 Ω or higher	Ignition switch OFF*

CAUTION:

***: Before measuring the resistance, leave the vehicle as it is for at least 1 minute and do not operate the ignition switch, any other switches or the doors.**

If the result is not as specified, the DLC3 may have a malfunction. Repair or replace the harness and connector.

HINT:

The DLC3 is the interface prepared for reading various data from the vehicle's ECM. After connecting the cable of the intelligent tester to the CAN VIM, turn the ignition switch to the ON position and turn the tester on. If a communication failure message is displayed on the tester screen (on the tester: UNABLE TO CONNECT TO VEHICLE), a problem exists in either the vehicle or tester. In order to identify the location of the problem, connect the tester to another vehicle.

If communication is normal: Inspect the DLC3 on the original vehicle.

If communication is still not possible: The problem is probably in the tester itself. Consult the Service Department listed in the instruction manual.

6. **BATTERY VOLTAGE**
Standard voltage:
11 to 14 V
If the voltage is below 11 V, replace or recharge the battery before proceeding to the next step.


7. **MIL (Malfunction Indicator Lamp)**
(a) The MIL is illuminated when the ignition switch is first turned ON position (the engine is not running).
(b) The MIL should turn OFF when the engine is started. If the MIL remains illuminated, the diagnosis system has detected a malfunction or abnormality in the system.
HINT:
If the MIL is not illuminated when the ignition switch is first turned ON position, check the MIL circuit (See page ES-397).

8. **ALL READINESS**
For the vehicle, using the intelligent tester allows readiness codes corresponding to all DTCs to be read. When diagnosis (normal or malfunctioning) has been complete, readiness codes are set. Select the following menu items on the intelligent tester: ENHANCED OBD II / MONITOR STATUS.

DTC CHECK / CLEAR

NOTICE:
When the diagnosis system is changed from normal mode to check mode or vice versa, all DTCs and freeze frame data recorded in normal mode are erased. Before changing modes, always check and make a note of any DTCs and freeze frame data.
HINT:

- DTCs which are stored in the ECM can be displayed on the intelligent tester. The intelligent tester can display current and pending DTCs.
- Some DTCs are not set if the ECM does not detect the same malfunction again during a second consecutive driving cycle. However, such malfunctions, detected on only one occasion, are stored as pending DTCs.

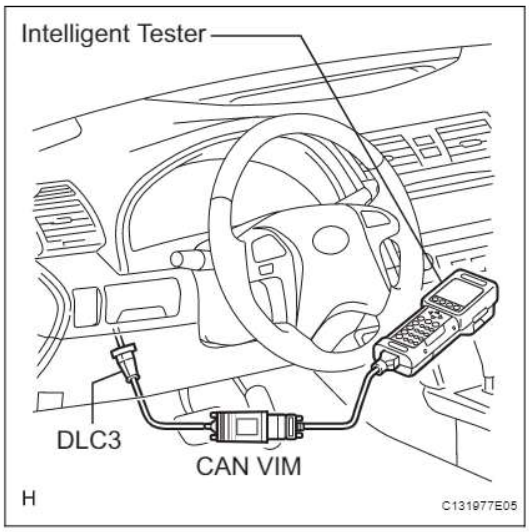

1. **CHECK FOR DTC (Using intelligent tester)**
   (a) Connect the intelligent tester to the DLC3.
   (b) Turn the ignition switch to the ON position.
   (c) Turn the tester on.
   (d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES or PENDING CODES.
   (e) Check the DTC(s) and freeze frame data, and then write them down.
   (f) Check the details of the DTC(s) (See page ES-53).
2. **CLEAR DTC (Using intelligent tester)**
   (a) Connect the intelligent tester to the DLC3.
   (b) Turn the ignition switch to the ON position.
   (c) Turn the tester on.
   (d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CLEAR CODES.
   (e) Press the YES button.
3. **CLEAR DTC (Without using intelligent tester)**
   (a) Perform either of the following operations:
      (1) Disconnect the cable from the negative (-) battery terminal for more than 1 minute.
      (2) Remove the EFI No. 1 and ETCS fuses from the engine room R/B (located inside the engine compartment) for more than 1 minute.

FREEZE FRAME DATA

1. DESCRIPTION


The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can be helpful in determining whether the vehicle was running or stopped, whether the air-fuel ratio was lean or rich, as well as other data recorded at the time of a malfunction.

HINT:

If it is impossible to duplicate the problem even though a DTC is detected, confirm the freeze frame data.

The ECM records engine conditions in the form of freeze frame data every 0.5 seconds. Using the intelligent tester, 5 separate sets of freeze frame data can be checked.

– 3 data set before the DTC was set.
– 1 data set when the DTC was set.
– 1 data set after the DTC was set.
These data sets can be used to simulate the condition of the vehicle around the time of the occurrence of the malfunction. The data may assist in identifying the cause of the malfunction, and in judging whether it was temporary or not.

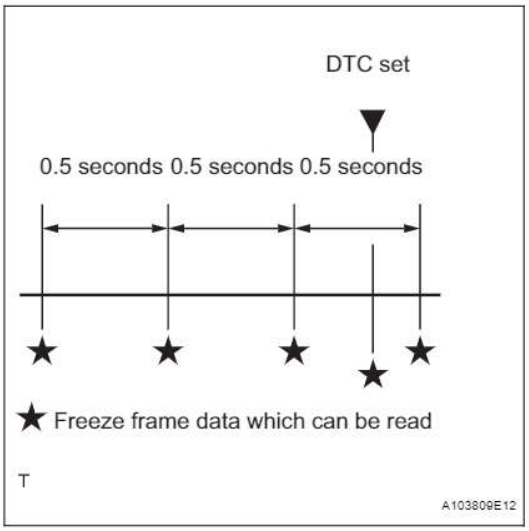

2. LIST OF FREEZE FRAME DATA


LABEL (Intelligent Tester Display)	Measurement Item	Diagnostic Note
INJECTOR	Injection period of No. 1 cylinder	-
IGN ADVANCE	Ignition advance	-
CALC LOAD	Calculated load	Calculated load by ECM
VEHICLE LOAD	Vehicle load	-
MAF	Mass air flow volume	If approximately 0.0 g/sec.: • Mass air flow meter power source circuit open or short • VG circuit open or short If 160.0 g/sec. or more: • E2G circuit open
ENGINE SPD	Engine speed	-
VEHICLE SPD	Vehicle speed	Speed indicated on speedometer
COOLANT TEMP	Engine coolant temperature	If -40°C (-40°F), sensor circuit open If 140°C (284°F) or more, sensor circuit shorted
INTAKE AIR	Intake air temperature	If -40°C (-40°F), sensor circuit open If 140°C (284°F) or more, sensor circuit shorted
AIR-FUEL RATIO	Ratio compared to stoichiometric level	-
PURGE DENSITY	Learning value of purge density	-
EVAP PURGE FLOW	Ratio of evaporative purge flow to intake air volume	-
EVAP PURGE VSV	EVAP purge VSV duty ratio	-
KNOCK CRRT VAL	Correction learning value of knocking	-
KNOCK FB VAL	Feedback value of knocking	-

LABEL (Intelligent Tester Display)	Measurement Item	Diagnostic Note
ACCEL POS #1	Absolute Accelerator Pedal Position (APP) No. 1	-
ACCEL POS #2	Absolute APP No. 2	-
THROTTLE POS	Throttle position	-
THROTTLE POS	Throttle sensor positioning	-
THROTTLE POS #2	Throttle sensor positioning #2	-
THROTTLE MOT	Throttle motor	-
O2S B1 S2	Heated oxygen sensor output	Performing INJ VOL or A/F CONTROL function of ACTIVE TEST enables technician to check output voltage of sensor
AFS B1 S1	A/F sensor output	Performing INJ VOL or A/F CONTROL function of ACTIVE TEST enables technician to check output voltage of sensor
TOTAL FT #1	Total fuel trim	-
SHORT FT #1	Short-term fuel trim	Short-term fuel compensation used to maintain air-fuel ratio at stoichiometric air-fuel ratio
LONG FT #1	Long-term fuel trim	Overall fuel compensation carried out in long-term to compensate for a continual deviation of short-term fuel trim from central valve
FUEL SYS #1	Fuel system status	• OL (Open Loop): Has not yet satisfied conditions to go closed loop • CL (Closed Loop): Using A/F sensor as feedback for fuel control • OL DRIVE: Open loop due to driving conditions (fuel enrichment) • OL FAULT: Open loop due to detected system fault • CL FAULT: Closed loop but A/F sensor, which used for fuel control malfunctioning
O2FT B1 S2	Fuel trim at heated oxygen sensor	-
AF FT B1 S1	Fuel trim at A/F sensor	-
AFS B1 S1	A/F sensor current	-
CAT TEMP B1S1	Estimated catalyst temperature (sensor 1)	-
CAT TEMP B1S2	Estimated catalyst temperature (sensor 2)	-
S O2S B1S2	Sub heated oxygen sensor impedance (sensor 2)	-
INI COOL TEMP	Engine coolant temperature at engine start	-
INI INTAKE TEMP	Intake air temperature at engine start	-
INJ VOL	Injection volume	-
STARTER SIG	Starter switch (STSW) signal	-
PS SW	Power steering signal	-
PS SIGNAL	Power steering signal (history)	Signal status usually ON until ignition switch turned OFF
CTP SW	Closed throttle position switch	-
A/C SIGNAL	A/C signal	-
PNP SW (NSW)	Park/Neutral Position (PNP) switch signal	-
ELECT LOAD SIG	Electrical load signal	-
STOP LIGHT SW	Stop light switch	-
BATTERY VOLTAGE	Battery voltage	-
ATM PRESSURE	Atmosphere pressure	-
EVAP (Purge) VSV	EVAP Purge VSV	-
FUEL PUMP/SPD	Fuel pump/speed status	-
VVT CTRL B1	VVT control status	-

LABEL (Intelligent Tester Display)	Measurement Item	Diagnostic Note
VACUUM PUMP	Key-off EVAP system leak detection pump status	(see page ES-344)
EVAP VENT VAL	Key-off EVAP system vent valve status	-
FAN MOTOR	Electric fan motor	-
TC/TE1	TC and CG (TE1) terminals of DLC3	-
ENG SPEED #1	Engine rpm during No. 1 cylinder fuel cut	Output only when FUEL CUT #1 is performed using ACTIVE TEST
ENG SPEED #2	Engine rpm during No. 2 cylinder fuel cut	Output only when FUEL CUT #2 is performed using ACTIVE TEST
ENG SPEED #3	Engine rpm during No. 3 cylinder fuel cut	Output only when FUEL CUT #3 is performed using ACTIVE TEST
ENG SPEED #4	Engine rpm during No. 4 cylinder fuel cut	Output only when FUEL CUT #4 is performed using ACTIVE TEST
ENG SPEED ALL	Average of engine rpm values during fuel cut of No. 1 to No. 4 cylinders	Output only when ACTIVE TEST is performed
VVTL AIM ANGL#1	VVT aim angle	-
VVT CHNG ANGL#1	VVT angle	-
VVT OCV DUTY B1	VVT OCV operation duty	-
FC IDL	Fuel cut idle	ON: when throttle valve fully closed and engine speed over 3,500 rpm
FC TAU	Fuel cut with a very light load	Fuel cut being performed with a very light load to prevent incomplete engine combustion
IGNITION	Ignition counter	-
CYL #1	Cylinder #1 misfire	Displayed only during idling
CYL #2	Cylinder #2 misfire	Displayed only during idling
CYL #3	Cylinder #3 misfire	Displayed only during idling
CYL #4	Cylinder #4 misfire	Displayed only during idling
CYL ALL	All cylinders misfire	Displayed only during idling
MISFIRE RPM	Engine speed when misfire occurred	-
MISFIRE LOAD	Engine load when misfire occurred	-
MISFIRE MARGIN	Margin to detect engine misfire	-
MIL ON RUN DIST	Distance after DTC is detected	-
ENG RUN TIME	Accumulated engine running time	-
TIME DTC CLEAR	Cumulative time after DTC cleared	-
DIST DTC CLEAR	Accumulated distance from DTC cleared	-
WU CYC DTC CLEAR	Warm-up cycle after DTC cleared	-


CHECK MODE PROCEDURE

HINT:
Intelligent tester only:
Compared to normal mode, check mode is more sensitive to malfunctions. Therefore, check mode can detect the malfunctions that cannot be detected by normal mode.
NOTICE:
All the stored DTCs and freeze frame data are erased if: 1) the ECM is changed from normal mode to check mode or vice versa; or 2) the ignition switch is turned from ON position to ACC position or off while in check mode. Before changing modes, always check and make a note of any DTCs and freeze frame data.

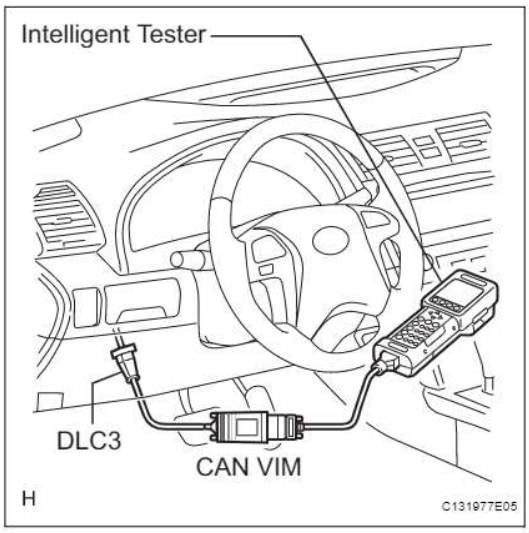

1. CHECK MODE PROCEDURE (Using intelligent tester)

(a) Check and ensure the following conditions:
(1) Battery positive voltage 11 V or more.
(2) Throttle valve fully closed.
(3) Transmission in the P or N position.
(4) A/C switch OFF.
(b) Turn the ignition switch off.
(c) Connect the intelligent tester to the DLC3.
(d) Turn the ignition switch to the ON position.
(e) Turn the tester on.
(f) Select the following menu items: DIAGNOSIS / ENHANCED OBD II/ CHECK MODE.
(g) Switch the ECM from normal mode to check mode.

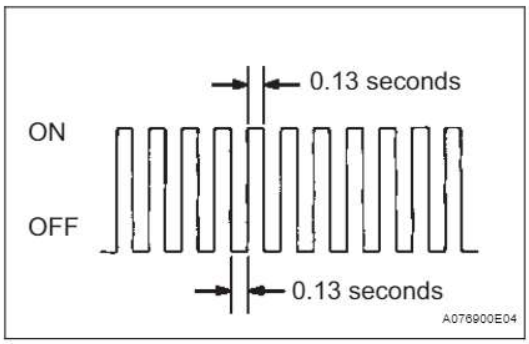

(h) Make sure that the MIL flashes as shown in the illustration.
(i) Start the engine.
(j) Make sure that the MIL turns off.
(k) Simulate the conditions of the malfunction described by the customer.
(l) Check for DTCs and freeze frame data using the tester.

FAIL-SAFE CHART

If any of the following DTCs are set, the ECM enters fail-safe mode to allow the vehicle to be driven temporarily.

DTCs	Components	Fail-Safe Operations	Fail-Safe Deactivation Conditions
P0031 and P0032	Air-Fuel Ratio (A/F) Sensor Heater	ECM turns off A/F sensor heater.	Ignition switch OFF
P0037 and P0038	Heated Oxygen (HO2) Sensor Heater	ECM turns off HO2 sensor heater.	Ignition switch OFF
P0100, P0102 and P0103	Mass Air Flow (MAF) Meter	ECM calculates ignition timing according to engine speed and throttle valve position.	Pass condition detected
P0110, P0112 and P0113	Intake Air Temperature (IAT) Sensor	ECM estimates IAT to be 20°C (68°F).	Pass condition detected
P0115, P0117 and P0118	Engine Coolant Temperature (ECT) Sensor	ECM estimates ECT to be 80°C (176°F).	Pass condition detected
P0120, P0121, P0122, P0123, P0220, P0222, P0223, P0604, P0606, P0607, P0657, P2102, P2103, P2111, P2112, P2118, P2119 and P2135	Electronic Throttle Control System (ETCS)	ECM cuts off throttle actuator current and throttle valve is returned to 6° throttle position by return spring. ECM then adjusts engine output by controlling fuel injection (intermittent fuel-cut) and ignition timing in accordance with accelerator pedal opening angle to allow vehicle to continue at minimal speed*.	Pass condition detected and then ignition switch turned off
P0327 and P0328	Knock Sensor	ECM sets ignition timing to maximum retard.	Ignition switch off
P0351 to P0354	Igniter	ECM cuts fuel.	Pass condition detected
P2120, P2121, P2122, P2123, P2125, P2127, P2128 and P2138	Accelerator Pedal Position (APP) Sensor	APP sensor has 2 sensor circuits: Main and Sub. If either circuit malfunctions, ECM controls engine using the other circuit. If both circuits malfunction, ECM regards accelerator pedal as being released. As a result, throttle valve is closed and engine idles.	Pass condition detected and then ignition switch turned off

HINT:
*: The vehicle can be driven slowly when the accelerator pedal is depressed firmly and slowly. If the accelerator pedal is depressed quickly, the vehicle may speed up and slow down erratically.

DATA LIST / ACTIVE TEST

1. DATA LIST

HINT:

By reading the DATA LIST displayed on an intelligent tester, values can be checked, including those of the switches, sensors, and actuators, without removing any parts. Reading the DATA LIST as the first step in troubleshooting is one method to shorten diagnostic time.

NOTICE:

In the table below, the values listed under Normal Condition are for reference only. Do not depend solely on these values when determining whether or not a part is faulty.

(a) Warm up the engine.
(b) Turn the ignition switch off.
(c) Connect the intelligent tester to the DLC3.
(d) Turn the ignition switch to the ON position.
(e) Turn the tester on.
(f) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST.
(g) Check the values by referring to the table below.

ECM:

Intelligent Tester Display	Measurement Item: Range (Display)	Normal Condition*1	Diagnostic Note
INJECTOR	Injection period of No. 1 cylinder: Min.: 0 ms, Max.: 32.64 ms	1.0 to 3.0 ms: Idling	-
IGN ADVANCE	Ignition timing advance for No. 1 cylinder: Min.: -64 deg, Max.: 63.5 deg	BTDC 8 to 12 deg: Idling	-
CALC LOAD	Calculated load by ECM: Min.: 0 %, Max.: 100 %	• 10 to 30 %: Idling • 10 to 30 %: Running without load at 2,500 rpm	Load value
VEHICLE LOAD	Vehicle load: Min.: 0 %, Max.: 25,700 %	Actual vehicle load	Load percentage in terms of maximum intake air flow amount
MAF	Air flow rate from Mass Air Flow (MAF) meter: Min.: 0 g/sec., Max.: 655.35 g/sec.	1 to 3 g/sec.: Idling 2 to 6 g/sec.: Running without load at 2,500 rpm	If value is approximately 0.0 g/sec.: • MAF meter power source circuit open • VG circuit open or shorted If value is 160.0 g/sec. or more: • E2G circuit open
ENGINE SPD	Engine speed: Min.: 0 rpm, Max.: 16,383.75 rpm	650 to 750 rpm: Idling (Manual transaxle) 610 to 710 rpm: Idling (Automatic transaxle)	-
VEHICLE SPD	Vehicle speed: Min.: 0 km/h, Max.: 255 km/h	Actual vehicle speed	Speed indicated on speedometer
COOLANT TEMP	Engine coolant temperature: Min.: -40°C, Max.: 140°C	80 to 100°C (176 to 212°F): After warming up	• If -40°C (-40°F): sensor circuit open • If 140°C (284°F) or more: sensor circuit shorted
INTAKE AIR	Intake air temperature: Min.: -40°C, Max.: 140°C	Equivalent to ambient air temperature	• If -40°C (-40°F): sensor circuit open • If 140°C (284°F) or more: sensor circuit shorted

Intelligent Tester Display	Measurement Item: Range (Display)	Normal Condition*1	Diagnostic Note
AIR-FUEL RATIO	Ratio compared to stoichiometric level: Min.: 0, Max.: 1.999	0.8 to 1.2: Idling	• Less than 1 (0 to 0.999) = Lean • Stoichiometric air-fuel ratio = 1 • Greater than 1 (1.001 to 1.999) = Rich
PURGE DENSITY	Learning value of purge density: Min.: -50, Max.: 350	-40 to 10: Idling	-
EVAP PURGE FLOW	Ratio of evaporative purge flow to intake air volume: Min.: 0 %, Max.: 102.4 %	0 to 10 %: Idling	-
EVAP PURGE VSV	EVAP (PURGE) VSV control duty: Min.: 0 %, Max.: 100 %	10 to 50 %: Idling	Order signal from ECM
VAPOR PRES PUMP	Vapor pressure: Min.: 33.853 kPa, Max.: 125.596 kPa	Approximately 100 kPa: Ignition switch to the ON position	EVAP system pressure monitored by canister pressure sensor
VAPOR PRES CALC	Vapor pressure (calculated): Min.: -5.632 kPa, Max.: 715.264 kPa	Approximately 100 kPa: Ignition switch to the ON position	EVAP system pressure monitored by canister pressure sensor
KNOCK CRRT VAL	Knock correction learning value: Min: -64°CA, Max.: 1,984°CA	0 to 20°CA: Driving at 44 mph (70 km/h)	Service data
KNOCK FB VAL	Knock feedback value: Min: -64°CA, Max.: 1,984°CA	-20 to 0°CA: Driving at 44 mph (70 km/h)	Service data
ACCEL POS #1	Absolute Accelerator Pedal Position (APP) No. 1: Min.: 0 %, Max.: 100 %	10 to 22 %: Accelerator pedal released 52 to 90 %: Accelerator pedal fully depressed	Read value with ignition switch to the ON position (Do not start engine)
ACCEL POS #2	Absolute APP No. 2: Min.: 0 %, Max.: 100 %	24 to 40 %: Accelerator pedal released 68 to 100 %: Accelerator pedal fully depressed	Read value with ignition switch to the ON position (Do not start engine)
ACCEL POS #1	APP sensor No. 1 voltage: Min.: 0 V, Max.: 5 V	0.5 to 1.1 V: Accelerator pedal released 2.6 to 4.5 V: Accelerator pedal fully depressed	Read value with ignition switch to the ON position (Do not start engine)
ACCEL POS #2	APP sensor No. 2 voltage: Min.: 0 V, Max.: 5 V	1.2 to 2.0 V: Accelerator pedal released 3.4 to 5.0 V: Accelerator pedal fully depressed	Read value with ignition switch to the ON position (Do not start engine)
ACCEL IDL POS	Whether or not accelerator pedal position sensor detecting idle: ON or OFF	ON: Idling	-
THRTL LEARN VAL	Throttle valve fully closed (learned value): Min.: 0 V, Max.: 5 V	0.4 to 0.8 V	-
ACCEL SSR #1 AD	APP sensor No. 1 voltage (AD): Min.: 0 V, Max.: 4.9804 V	-	ETCS service data
ACCEL LRN VAL#1	Accelerator fully closed learning value No. 1: Min.: 0 deg, Max.: 124.512 deg	-	ETCS service data
ACCEL LRN VAL#2	Accelerator fully closed learning value No. 2: Min.: 0 deg, Max.: 124.512 deg	-	ETCS service data
FAIL #1	Whether or not fail safe function executed: ON or OFF	ON: ETCS has failed	-
FAIL #2	Whether or not fail safe function executed: ON or OFF	ON: ETCS has failed	-
ST1	Brake pedal signal: ON or OFF	ON: Brake pedal depressed	-

Intelligent Tester Display	Measurement Item: Range (Display)	Normal Condition*1	Diagnostic Note
SYS GUARD JUDGE	System guard: ON or OFF	-	ETCS service data
OPN MALFUNCTION	Open side malfunction: ON or OFF	-	ETCS service data
THROTTLE POS	Throttle position sensor: Min.: 0%, Max.: 100 %	• 10 to 22 %: Throttle fully closed • 66 to 98 %: Throttle fully open	• Calculated value based on VTA1 • Read value with ignition switch to the ON position (Do not start engine)
THROTTL IDL POS	Whether or not throttle position sensor detecting idle: ON or OFF	ON: Idling	-
THRTL REQ POS	Throttle requirement position: Min.: 0 V, Max.: 5 V	0.5 to 1.0 V: Idling	-
THROTTLE POS	Throttle position: Min.: 0 %, Max.: 100 %	• 0 %: Throttle fully closed • 50 to 80 %: Throttle fully open	• Recognition value for throttle opening angle on ECM • Read value with ignition switch to the ON position (Do not start engine)
THROTTLE POS #2	Throttle position No. 2 sensor: Min.: 0 %, Max.: 100 %	• 42 to 62 %: Throttle fully closed • 92 to 100 %: Throttle fully open	• Calculated value based on VTA2 • Read value with ignition switch to the ON position (Do not start engine)
THROTTLE POS #1	Throttle position sensor No. 1 output voltage: Min.: 0 V, Max.: 5 V	• 0.5 to 1.1 V: Throttle fully closed • 3.3 to 4.9 V: Throttle fully open	Read value with ignition switch to the ON position (Do not start engine)
THROTTLE POS #2	Throttle position sensor No. 2 output voltage: Min.: 0 V, Max.: 5 V	• 2.1 to 3.1 V: Throttle fully closed • 4.6 to 5.0 V: Throttle fully open	Read value with ignition switch to the ON position (Do not start engine)
THRTL COMND VAL	Throttle position command value: Min.: 0 V, Max.: 4.9804 V	0.5 to 4.9 V	Read value with ignition switch to the ON position (Do not start engine)
THROTTLE SSR #1	Throttle sensor opener position No. 1: Min.: 0 V, Max.: 4.9804 V	-	ETCS service data
THROTTLE SSR #2	Throttle sensor opener position No. 2: Min.: 0 V, Max.: 4.9804 V	-	ETCS service data
THRTL SSR #1 AD	Throttle position sensor No. 1 output voltage (AD): Min.: 0 V, Max.: 4.9804 V	0.5 to 4.9 V	Read value with ignition switch to the ON position (Do not start engine)
THROTTLE MOT	Whether or not throttle actuator control permitted: ON or OFF	ON: Idling	Read value with ignition switch to the ON position (Do not start engine)
THROTTLE MOT	Throttle actuator current: Min.: 0 A, Max.: 80 A	0 to 3.0 A: Idling	-
THROTTLE MOT	Throttle actuator: Min.: 0 %, Max.: 100 %	0.5 to 40 %: Idling	-
THRTL MOT (OPN)	Throttle actuator duty ratio (open): Min.: 0 %, Max.: 100 %	0 to 40 %: Idling	ETCS service data
THRTL MOT (CLS)	Throttle actuator duty ratio (closed): Min.: 0 %, Max.: 100 %	0 to 40 %: Idling	ETCS service data
O2S B1 S2	Heated oxygen sensor output voltage for sensor 2: Min.: 0 V Max.: 1.275 V	0.1 to 0.9 V: Driving at 44 mph (70 km/h)	Performing INJ VOL or A/F CONTROL function of ACTIVE TEST enables technician to check output voltage of sensor

Intelligent Tester Display	Measurement Item: Range (Display)	Normal Condition*1	Diagnostic Note
AFS B1 S1	A/F sensor output voltage for sensor 1: Min.: 0 V Max.: 7.999 V	2.8 to 3.8 V: Idling	Performing INJ VOL or A/F CONTROL function of ACTIVE TEST enables technician to check output voltage of sensor
TOTAL FT #1	Total fuel trim value for fuel system: Min.: -0.5, Max.: 0.496	-0.2 to 0.2	-
SHORT FT #1	Short-term fuel trim: Min.: -100 %, Max.: 99.2 %	-20 to 20 %	Short-term fuel compensation used to maintain air-fuel ratio at stoichiometric air-fuel ratio
LONG FT #1	Long-term fuel trim: Min.: -100 %, Max.: 99.2 %	-20 to 20 %	Overall fuel compensation carried out in long-term to compensate for a continual deviation of short-term fuel trim from central value
FUEL SYS #1	Fuel system status: OL or CL or OL DRIVE or OL FAULT or CL FAULT	CL: Idling after warming up	• OL (Open Loop): Has not yet satisfied conditions to go closed loop • CL (Closed Loop): Using A/F sensor as feedback for fuel control • OL DRIVE: Open loop due to driving conditions (fuel enrichment) • OL FAULT: Open loop due to detected system fault • CL FAULT: Closed loop but A/F sensor, which used for fuel control malfunctioning
O2FT B1 S2	Short-term fuel trim associated with sensor 2: Min.: -100 %, Max.: 99.2 %	-	-
AF FT B1 S1	Short-term fuel trim associated with sensor 1: Min.: 0, Max.: 1.999	• Value less than 1 (0.000 to 0.999) =Lean • Stoichiometric air-fuel ratio=1 • Value greater than 1 (1.001 to 1.999) = Rich	-
AFS B1 S1	A/F sensor current: Min.: -128 mA, Max.: 127.99 mA	-	-
CAT TEMP B1S1	Estimated catalyst temperature (sensor 1): Min.: -40°C, Max.: 6,513.5°C	-	-
CAT TEMP B1S2	Estimated catalyst temperature (sensor 2): Min.: -40°C, Max.: 6,513.5°C	-	-
S O2S B1S2	Sub heated oxygen sensor impedance (sensor 2): Min.: 0 Ω, Max.: 21247.68 Ω	-	-
INI COOL TEMP	Engine coolant temperature at engine start: Min.: -40°C, Max.: 120°C	Close to ambient air temperature	-
INI INTAKE TEMP	Intake air temperature at engine start: Min.: -40°C, Max.: 120°C	Close to ambient air temperature	-
INJ VOL	Injection volume (Cylinder 1): Min.: 0 ml, Max.: 2.048 ml	0 to 0.15 ml: Idling	Quantity of fuel injection volume for 10 times
STARTER SIG	Starter switch (STSW) signal: ON or OFF	ON: Cranking	-
PS SW	Power steering signal: ON or OFF	ON: Power steering operation	-

Intelligent Tester Display	Measurement Item: Range (Display)	Normal Condition*1	Diagnostic Note
PS SIGNAL	Power steering signal (history): ON or OFF	ON: When steering wheel first turned after battery terminals connected	Signal status usually ON until battery terminals disconnected
CTP SW	Closed throttle position switch: ON or OFF	• ON: Throttle fully closed • OFF: Throttle open	-
A/C SIGNAL	A/C signal: ON or OFF	ON: A/C ON	-
PNP SW [NSW]	PNP switch status: ON or OFF	ON: P or N position	-
ELECT LOAD SIG	Electrical load signal: ON or OFF	ON: Headlights or defogger turned ON	-
STOP LIGHT SW	Stop light switch: ON or OFF	ON: Brake pedal depressed	-
+BM	Whether or not electric throttle control system power inputted: ON or OFF	ON: Ignition switch to the ON position and system normal	-
+BM VOLTAGE	+BM voltage: Min.: 0, Max.: 19.2182	9 to 14 (V): Ignition switch to the ON position and system normal	ETCS service data
BATTERY VOLTAGE	Battery voltage: Min.: 0 V, Max.: 65.535 V	9 to 14 V: Ignition switch to the ON position	-
ACTUATOR POWER	Actuator power supply: ON or OFF	ON: Idling	ETCS service data
ATM PRESSURE	Atmospheric pressure: Min.: 0 kPa, Max.: 255 kPa	Approximately 100 kPa: Ignition switch to the ON position	-
EVAP (Purge) VSV	Purge VSV status: ON or OFF	-	-
FUEL PUMP / SPD	Fuel pump status: ON or OFF	ON: Engine running	Active Test support data
VVT CTRL B1	VVT control (bank 1) status: ON or OFF	-	-
VACUUM PUMP	Key-off EVAP system leak detection pump status: ON or OFF	-	Active Test support data
EVAP VENT VAL	Key-off EVAP system vent valve status: ON or OFF	-	Active Test support data
FAN MOTOR	Electric fan motor: ON or OFF	ON: Electric fan motor operating	-
TC/TE1	TC and CG (TE1) terminals of DLC3: ON or OFF	-	Active Test support data
ENG SPEED #1	Engine rpm during No. 1 cylinder fuel cut: Min.: 0 rpm, Max.: 25,600 rpm	-	Output only when FUEL CUT #1 is performed using ACTIVE TEST
ENG SPEED #2	Engine rpm during No. 2 cylinder fuel cut: Min.: 0 rpm, Max.: 25,600 rpm	-	Output only when FUEL CUT #2 is performed using ACTIVE TEST
ENG SPEED #3	Engine rpm during No. 3 cylinder fuel cut: Min.: 0 rpm, Max.: 25,600 rpm	-	Output only when FUEL CUT #3 is performed using ACTIVE TEST
ENG SPEED #4	Engine rpm during No. 4 cylinder fuel cut: Min.: 0 rpm, Max.: 25,600 rpm	-	Output only when FUEL CUT #4 is performed using ACTIVE TEST
ENG SPEED ALL	Average of engine rpm values during fuel cut of No. 1 to No. 4 cylinders: Min.: 0 rpm, Max.: 25,600 rpm	-	Output only when ACTIVE TEST is performed
VVTL AIM ANGL#1*2	VVT aim angle: Min.: 0 %, Max.: 100 %	0 to 100 %	VVT duty signal value during intrusive operation

Intelligent Tester Display	Measurement Item: Range (Display)	Normal Condition*1	Diagnostic Note
VVT CHNG ANGL#1*2	VVT angle: Min.: 0°FR, Max.: 60°FR	0 to 56°FR	Displacement angle during intrusive operation
VVT OCV DUTY B1*2	VVT OCV operation duty: Min.: 0 %, Max.: 100 %	0 to 100 %	Requested duty value for intrusive operation
FC IDL	Fuel cut idle: ON or OFF	ON: Fuel cut operation	FC IDL = "ON" when throttle valve fully closed and engine speed over 3,500 rpm
FC TAU	Fuel cut TAU (Fuel cut with a very light load): ON or OFF	ON: Fuel cut operating	Fuel cut being performed with a very light load to prevent incomplete engine combustion
IGNITION	Ignition counter: Min.: 0, Max.: 800	0 to 800	-
CYL #1, #2, #3, #4	Misfire of cylinder 1 to 4: Min.: 0, Max.: 255	0	-
CYL ALL	All cylinders misfire: Min.: 0, Max.: 255	0	-
MISFIRE RPM	Engine speed when misfire occurs: Min.: 0 rpm, Max.: 6,375 rpm	-	-
MISFIRE LOAD	Engine load when misfire occurs: Min.: 0 g/rev, Max.: 3.98 g/rev	-	-
MISFIRE MARGIN	Margin to detect engine misfire: Min.: -100 %, Max.: 99.22 %	-100 to 99.22 %	Misfire detecting margin
#CODES	Number of codes: Min.: 0, Max.: 255	-	Number of detected DTCs
CHECK MODE	Check mode: ON or OFF	ON: Check mode ON	(See page ES-41)
SPD TEST	Check mode result for vehicle speed sensor: COMPL or INCMPL	-	-
MISFIRE TEST	Check mode result for misfire monitor: COMPL or INCMPL	-	-
OXS1 TEST	Check mode result for HO2 sensor: COMPL or INCMPL	-	-
A/F SSR TEST B1	Check mode result for air-fuel ratio sensor: COMPL or INCMPL	-	-
MIL	MIL status: ON or OFF	ON: MIL ON	-
MIL ON RUN DIST	MIL ON run distance: Min.: 0 km, Max.: 65,535 km	Distance after DTC detected	-
MIL ON RUN TIME	Running time from MIL ON: Min.: 0 minutes, Max.: 65,535 minutes	Equivalent to running time after MIL ON	-
ENG RUN TIME	Engine run time: Min.: 0 seconds, Max.: 65,535 seconds	Time after engine start	-
TIME DTC CLEAR	Time after DTC cleared: Min.: 0 minutes, Max.: 65,535 minutes	Equivalent to time after DTCs erased	-
DIST DTC CLEAR	Distance after DTC cleared: Min.: 0 km, Max.: 65,535 km	Equivalent to drive distance after DTCs erased	-
WU CYC DTC CLEAR	Warm-up cycle after DTC cleared: Min.: 0, Max.: 255	-	Number of warm-up cycles after DTC cleared
OBD CERT	OBD requirement	OBD2	-

Intelligent Tester Display	Measurement Item: Range (Display)	Normal Condition*1	Diagnostic Note
COMP MON	Comprehensive component monitor: NOT AVL or AVAIL	-	-
FUEL MON	Fuel system monitor: NOT AVL or AVAIL	-	-
MISFIRE MON	Misfire monitor: NOT AVL or AVAIL	-	-
O2S (A/FS) HTR	O2S (A/FS) heater monitor: NOT AVL or AVAIL	-	-
O2S (A/FS) MON	O2S (A/FS) monitor: NOT AVL or AVAIL	-	-
EVAP MON	EVAP monitor: NOT AVL or AVAIL	-	-
CAT MON	Catalyst monitor: NOT AVL or AVAIL	-	-
EGR ENA	EGR monitor: UNABLE or ENABLE	UNABLE	-
EGR CMPL	EGR monitor: COMPL or INCMPL	INCMPL	-
HTR ENA	O2S (A/FS) heater monitor: UNABLE or ENABLE	ENABLE	-
HTR CMPL	O2S (A/FS) heater monitor: COMPL or INCMPL	INCMPL	-
O2S (A/FS) ENA	O2S (A/FS) monitor: UNABLE or ENABLE	ENABLE	-
O2S (A/FS) CMPL	O2S (A/FS) monitor: COMPL or INCMPL	INCMPL	-
ACRF ENA	A/C monitor: UNABLE or ENABLE	UNABLE	-
ACRF CMPL	A/C monitor: COMPL or INCMPL	INCMPL	-
AIR ENA	Secondary air injection system monitor: UNABLE or ENABLE	UNABLE	-
AIR CMPL	Secondary air injection system monitor: COMPL or INCMPL	INCMPL	-
EVAP ENA	EVAP monitor: UNABLE or ENABLE	ENABLE	-
EVAP CMPL	EVAP monitor: COMPL or INCMPL	INCMPL	-
HCAT ENA	Heated catalyst monitor: UNABLE or ENABLE	UNABLE	-
HCAT CMPL	Heated catalyst monitor: COMPL or INCMPL	INCMPL	-
CAT ENA	Catalyst monitor: UNABLE or ENABLE	ENABLE	-
CAT CMPL	Catalyst monitor: COMPL or INCMPL	COMPL	-
MODEL CODE	Identifying model code	ACA3#	-
ENGINE TYPE	Identifying engine type	2AZFE	-
CYLINDER NUMBER	Identifying cylinder number: Min.: 0, Max.: 255	4	-
TRANSMISSION	Identifying transmission type	5AT or M/T	-
DESTINATION	Identifying destination	A (America)	-
MODEL YEAR	Identifying model year: Min.: 1,900, Max.: 2,155	2007	-

Intelligent Tester Display	Measurement Item: Range (Display)	Normal Condition*1	Diagnostic Note
SYSTEM	Identifying engine system	GASLIN (gasoline engine)	-

HINT:

- *1: If no idling conditions are specified, the transmission gear selector lever should be in the N or P position, and the A/C switch and all accessory switches should be OFF.
- *2: DATA LIST values are only displayed when performing the following ACTIVE TEST: VVT B1. For other ACTIVE TESTs, the DATA LIST value will be 0.

2. ACTIVE TEST

HINT:

Performing an ACTIVE TEST enables components including the relays, VSV (Vacuum Switching Valve) and actuators, to be operated without removing any parts. The ACTIVE TEST can be performed with the intelligent tester. Performing the ACTIVE TEST as the first step in troubleshooting is one method to shorten diagnostic time.

DATA LIST can be displayed during ACTIVE TEST.

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST.
(e) Perform the ACTIVE TEST by referring to the table below.


ECM:


Intelligent Tester Displays	Test Details	Control Ranges	Diagnostic Notes
INJ VOL	Change injection volume	Between -12.5 and 24.8 %	• All injectors tested at same time • Perform test at less than 3,000 rpm • Injection volume can be changed in 0.1 % graduations within control range
A/F CONTROL	Change injection volume	Decrease by 12.5 % or increase by 24.8 %	• Perform test at less than 3,000 rpm • A/F CONTROL enables checking and graphing of A/F (Air-Fuel Ratio) sensor and Heated Oxygen (HO2) sensor voltage outputs • To conduct test, select following menu items: ACTIVE TEST / A/F CONTROL / USER DATA / AFS B1S1 and O2S B1S2; then press YES and ENTER followed by F4.
EVAP VSV (ALONE)	Activate purge VSV control	ON/OFF	-
FUEL PUMP / SPD	Activate fuel pump (C/OPN Relay)	ON/OFF	Test is possible when engine stopped
TC/TE1	Turn on and off TC and TE1 connection	ON/OFF	• ON: TC and TE1 connected • OFF: TC and TE1 disconnected
FC IDL PROHBT	Prohibit idling fuel cut control	ON/OFF	-
COOLING FAN	Control electric cooling fan	ON/OFF	-

Intelligent Tester Displays	Test Details	Control Ranges	Diagnostic Notes
ETCS OPEN SLOW	Throttle actuator	ON: Throttle valve opens slowly	Test is possible when following conditions met: • Engine stopped • Shift position in P • Fully depressing accelerator pedal (APP: 59° or more)
ETCS CLOSE SLOW	Throttle actuator	ON: Throttle valve closes slowly	
ETCS OPEN FAST	Throttle actuator	ON: Throttle valve opens fast	
ETCS CLOSE FAST	Throttle actuator	ON: Throttle valve closes fast	
VVT LINEAR B1	Control VVT (bank 1)	-128 to 127 % This value added to present OCV control duty 100 %: Maximum advance -100 %: Maximum retard	• Engine stall or rough idle when VVT actuator operated by 100 %. • Test is possible while vehicle stopped and engine idling
VVT CTRL B1	Control VVT (bank 1)	-128 to 127 %	Test is possible while vehicle stopped and engine idling
VACUUM PUMP	Leak detection pump	ON/OFF	-
VENT VALVE	Vent valve	ON/OFF	-
IAC DUTY RATIO	Active IMRV (Intake Manifold Runner Valve) motor	-100% to 100%	• When the duty ratio is -100% IMRV closes • When the duty ratio is 100% IMRV opens
FUEL CUT #1	Cylinder #1 injector fuel cut	ON/OFF	• Test is possible while vehicle stopped and engine idling • ON: All cylinder injector fuel cut and ignition stop
FUEL CUT #2	Cylinder #2 injector fuel cut	ON/OFF	
FUEL CUT #3	Cylinder #3 injector fuel cut	ON/OFF	
FUEL CUT #4	Cylinder #4 injector fuel cut	ON/OFF	
COMPRESS CHECK	All cylinder injector fuel cut and ignition stop	ON/OFF	*

HINT:
*: When cranking the engine, each cylinder measures the engine rpm.
In this ACTIVE TEST, the fuel and ignition of all cylinders is cut, and cranking occurs for approximately 10 seconds. Then, each cylinder measures the engine rpm. If a cylinder's engine rpm is higher than the others, that cylinder's compression pressure is compared to the others, and whether or not the compression pressure is low can be determined.

1. Warm up the engine.
2. Turn the ignition switch off.
3. Connect the intelligent tester to the DLC3.
4. Turn the ignition switch to the ON position and turn the intelligent tester on.
5. Select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / COMPRESS CHECK.
   HINT:
   If the results are not displayed normally, select the display items from the DATA LIST before performing the ACTIVE TEST. Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / USER DATA / ENG SPEED #1 and ENG SPEED #2, ENG SPEED #3, ENG SPEED #4 (Press the YES button to change the ENG SPEED #1 to #4) and then press the ENTER button.

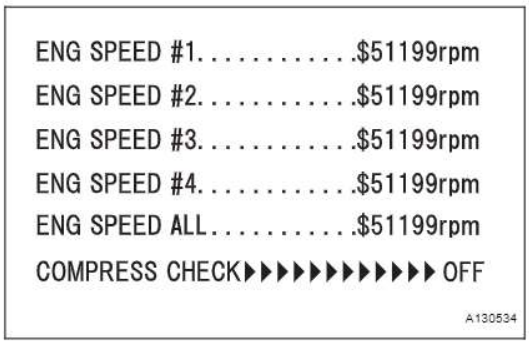

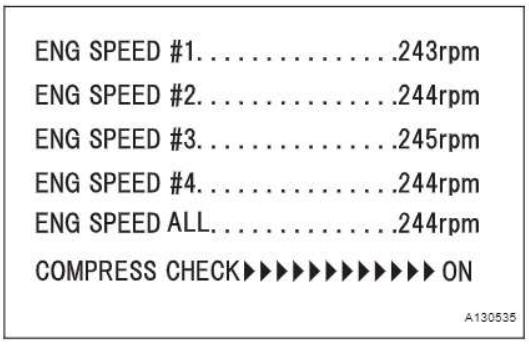

6. While the engine is not running, press the RIGHT or LEFT button to change the COMPRESS CHECK to ON.
   HINT:
   After performing the above procedure, the ACTIVE TEST's COMPRESS CHECK will start. Fuel injection for all cylinders is prohibited, and each cylinder's engine rpm measurement will enter standby mode.
7. Fully open the throttle.
8. Crank the engine for about 10 seconds.
9. Monitor the engine speed (ENG SPEED #1 to #4) displayed on the tester.
   HINT:
   At first, the tester's display will show each cylinder's engine rpm measurement to be extremely high. After approximately 10 seconds of engine cranking, each cylinder's engine rpm measurement will change to the actual engine rpm.
   NOTICE:
   - **After the ACTIVE TEST's COMPRESS CHECK is turned ON, it will automatically turn off after 255 seconds.**
   - **When the COMPRESS CHECK test is OFF and the engine is cranked, the engine will start.**
   - **If the COMPRESS CHECK test needs to be performed after it is turned ON and performed once, press EXIT to return to the ACTIVE TEST menu screen. Then perform the COMPRESS CHECK test again.**
   - **Use a fully-charged battery.**

3. SYSTEM CHECK

HINT:
Performing a SYSTEM CHECK enables the system, which consists of multiple actuators, to be operated without removing any parts. In addition, it can show whether or not any DTCs are set, and can detect potential malfunctions in the system. The SYSTEM CHECK can be performed with the intelligent tester.

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / SYSTEM CHECK.
(e) Perform the SYSTEM CHECK by referring to the table below.

ECM:

Intelligent Tester Display	Test Detail	Recommended Fuel Temperature	Diagnostic Note
EVAP SYS CHECK (AUTO OPERATION)	Perform 5 steps in order to operate EVAP key-off monitor automatically	35°C (95°F) or less	• If no DTCs in PENDING CODE after performing this test, system functioning normally • Refer to EVAP system
EVAP SYS CHECK (MANUAL OPERATION)	Perform 5 steps in order to operate EVAP key-off monitor manually	35°C (95°F) or less	• Used to detect malfunctioning parts • Refer to EVAP system

DIAGNOSTIC TROUBLE CODE CHART

HINT:
Parameters listed in the chart may be different than your readings depending on the type of instrument and other factors.
If any DTCs are displayed during a check mode DTC check, check the circuit for the DTCs listed in the table below. For details of each DTC, refer to the page indicated.

SFI SYSTEM:

DTC No.	Detection Item	Trouble Area	MIL	Memory	See page
P0010	Camshaft Position "A" Actuator Circuit (Bank 1)	1. Open or short in Oil Control Valve (OCV) circuit 2. OCV 3. ECM	Comes on	DTC stored	ES-65
P0011	Camshaft Position "A" - Timing Over-Advanced or System Performance (Bank 1)	1. Valve timing 2. OCV 3. OCV filter 4. Camshaft timing gear assembly 5. ECM	Comes on	DTC stored	ES-69
P0012	Camshaft Position "A" - Timing Over-Retarded (Bank 1)	Same as DTC P0011	Comes on	DTC stored	ES-69
P0016	Crankshaft Position - Camshaft Position Correlation (Bank 1 Sensor A)	1. Mechanical system (Timing chain has jumped tooth or chain stretched) 2. ECM	Comes on	DTC stored	ES-75
P0031	Oxygen (A/F) Sensor Heater Control Circuit Low (Bank 1 Sensor 1)	1. Open in Air-Fuel Ratio (A/F) sensor heater circuit 2. A/F sensor heater (sensor 1) 3. Engine room J/B (EFI relay) 4. ECM	Comes on	DTC stored	ES-77
P0032	Oxygen (A/F) Sensor Heater Control Circuit High (Bank 1 Sensor 1)	1. Short in A/F sensor heater circuit 2. A/F sensor heater (sensor 1) 3. Engine room J/B (EFI relay) 4. ECM	Comes on	DTC stored	ES-77
P0037	Oxygen Sensor Heater Control Circuit Low (Bank 1 Sensor 2)	1. Open in Heated Oxygen (HO2) sensor heater circuit 2. HO2 sensor heater (sensor 2) 3. Engine room J/B (EFI relay) 4. ECM	Comes on	DTC stored	ES-83
P0038	Oxygen Sensor Heater Control Circuit High (Bank 1 Sensor 2)	1. Short in HO2 sensor heater circuit 2. HO2 sensor heater (sensor 2) 3. Engine room J/B (EFI relay) 4. ECM	Comes on	DTC stored	ES-83

DTC No.	Detection Item	Trouble Area	MIL	Memory	See page
P0100	Mass or Volume Air Flow Circuit	1. Open or short in Mass Air Flow (MAF) meter circuit 2. MAF meter 3. ECM	Comes on	DTC stored	ES-89
P0101	Mass Air Flow Circuit Range / Performance Problem	1. MAF meter 2. Air induction system 3. PCV hose connections	Comes on	DTC stored	ES-96
P0102	Mass or Volume Air Flow Circuit Low Input	1. Open or short in MAF meter circuit 2. MAF meter 3. ECM	Comes on	DTC stored	ES-89
P0103	Mass or Volume Air Flow Circuit High Input	1. Open or short in MAF meter circuit 2. MAF meter 3. ECM	Comes on	DTC stored	ES-89
P0110	Intake Air Temperature Circuit Malfunction	1. Open or short in Intake Air Temperature (IAT) sensor circuit 2. IAT sensor (built into MAF meter) 3. ECM	Comes on	DTC stored	ES-99
P0111	Intake Air Temperature Sensor Gradient Too High	Mass air flow meter assembly	Comes on	DTC stored	ES-105
P0112	Intake Air Temperature Circuit Low Input	1. Short in IAT sensor circuit 2. IAT sensor (built into MAF meter) 3. ECM	Comes on	DTC stored	ES-99
P0113	Intake Air Temperature Circuit High Input	1. Open in IAT sensor circuit 2. IAT sensor (built into MAF meter) 3. ECM	Comes on	DTC stored	ES-99
P0115	Engine Coolant Temperature Circuit Malfunction	1. Open or short in Engine Coolant Temperature (ECT) sensor circuit 2. ECT sensor 3. ECM	Comes on	DTC stored	ES-108
P0116	Engine Coolant Temperature Circuit Range / Performance Problem	1. Thermostat 2. ECT sensor	Comes on	DTC stored	ES-114
P0117	Engine Coolant Temperature Circuit Low Input	1. Short in ECT sensor circuit 2. ECT sensor 3. ECM	Comes on	DTC stored	ES-108
P0118	Engine Coolant Temperature Circuit High Input	1. Open in ECT sensor circuit 2. ECT sensor 3. ECM	Comes on	DTC stored	ES-108
P0120	Throttle / Pedal Position Sensor / Switch "A" Circuit Malfunction	1. Throttle Position (TP) sensor (built into throttle body) 2. ECM	Comes on	DTC stored	ES-117

DTC No.	Detection Item	Trouble Area	MIL	Memory	See page
P0121	Throttle / Pedal Position Sensor / Switch "A" Circuit Range / Performance Problem	TP sensor (built into throttle body)	Comes on	DTC stored	ES-124
P0122	Throttle / Pedal Position Sensor / Switch "A" Circuit Low Input	1. TP sensor (built into throttle body) 2. Short in VTA1 circuit 3. Open in VC circuit 4. ECM	Comes on	DTC stored	ES-117
P0123	Throttle / Pedal Position Sensor / Switch "A" Circuit High Input	1. TP sensor (built into throttle body) 2. Open in VTA1 circuit 3. Open in E2 circuit 4. Short between VC and VTA1 circuits 5. ECM	Comes on	DTC stored	ES-117
P0125	Insufficient Coolant Temperature for Closed Loop Fuel Control	1. Cooling system 2. ECT sensor 3. Thermostat	Comes on	DTC stored	ES-126
P0128	Coolant Thermostat (Coolant Temperature Below Thermostat Regulating Temperature)	1. Thermostat 2. Cooling system 3. ECT sensor 4. ECM	Comes on	DTC stored	ES-129
P0136	Oxygen Sensor Circuit Malfunction (Bank 1 Sensor 2)	1. Open or short in HO2 sensor (sensor 2) circuit 2. HO2 sensor (sensor 2) 3. HO2 sensor heater (sensor 2) 4. Air Fuel Ratio (A/F) sensor (sensor 1) 5. Engine room J/B (EFI relay) 6. Gas leakage from exhaust system	Comes on	DTC stored	ES-132
P0137	Oxygen Sensor Circuit Low Voltage (Bank 1 Sensor 2)	1. Open in HO2 sensor (sensor 2) circuit 2. HO2 sensor (sensor 2) 3. HO2 sensor heater (sensor 2) 4. Engine room J/B (EFI relay) 5. Gas leakage from exhaust system	Comes on	DTC stored	ES-132
P0138	Oxygen Sensor Circuit High Voltage (Bank 1 Sensor 2)	1. Short in HO2 sensor (sensor 2) circuit 2. HO2 sensor (sensor 2) 3. ECM internal circuit malfunction	Comes on	DTC stored	ES-132

DTC No.	Detection Item	Trouble Area	MIL	Memory	See page
P0141	Oxygen Sensor Heater Circuit Malfunction (Bank 1 Sensor 2)	1. Open or short in HO2 sensor heater circuit 2. HO2 sensor heater (sensor 2) 3. Engine room J/B (EFI relay) 4. ECM	Comes on	DTC stored	ES-83
P0171	System Too Lean (Bank 1)	1. Air induction system 2. Injector blockage 3. MAF meter 4. ECT sensor 5. Fuel pressure 6. Gas leakage from exhaust system 7. Open or short in A/F sensor (sensor 1) circuit 8. A/F sensor (sensor 1) 9. A/F sensor heater (sensor 1) 10. Engine room J/B (EFI relay) 11. A/F sensor heater and EFI relay circuits 12. PCV valve and hose 13. PCV hose connections 14. ECM	Comes on	DTC stored	ES-150
P0172	System Too Rich (Bank 1)	1. Injector leakage or blockage 2. MAF meter 3. ECT sensor 4. Ignition system 5. Fuel pressure 6. Gas leakage from exhaust system 7. Open or short in A/F sensor (sensor 1) circuit 8. A/F sensor (sensor 1) 9. A/F sensor heater (sensor 1) 10. Engine room J/B (EFI relay) 11. A/F sensor heater and EFI relay circuits 12. ECM	Comes on	DTC stored	ES-150
P0220	Throttle / Pedal Position Sensor / Switch "B" Circuit	1. TP sensor (built into throttle body) 2. ECM	Comes on	DTC stored	ES-117
P0222	Throttle / Pedal Position Sensor / Switch "B" Circuit Low Input	1. TP sensor (built into throttle body) 2. Short in VTA2 circuit 3. Open in VC circuit 4. ECM	Comes on	DTC stored	ES-117

DTC No.	Detection Item	Trouble Area	MIL	Memory	See page
P0223	Throttle / Pedal Position Sensor / Switch "B" Circuit High Input	1. TP sensor (built into throttle body) 2. Open in VTA2 circuit 3. Open in E2 circuit 4. Short between VC and VTA2 circuits 5. ECM	Comes on	DTC stored	ES-117
P0300	Random / Multiple Cylinder Misfire Detected	1. Open or short in engine wire harness 2. Connector connection 3. Vacuum hose connection 4. Ignition system 5. Injector 6. Fuel pressure 7. MAF meter 8. ECT sensor 9. Compression pressure 10. Valve clearance 11. Valve timing 12. PCV valve and hose 13. PCV hose connections 14. Air induction system 15. ECM	Comes on/Blinks *1	DTC stored	ES-159
P0301	Cylinder 1 Misfire Detected	Same as DTC P0300	Comes on/Blinks *1	DTC stored	ES-159
P0302	Cylinder 2 Misfire Detected	Same as DTC P0300	Comes on/Blinks *1	DTC stored	ES-159
P0303	Cylinder 3 Misfire Detected	Same as DTC P0300	Comes on/Blinks *1	DTC stored	ES-159
P0304	Cylinder 4 Misfire Detected	Same as DTC P0300	Comes on/Blinks *1	DTC stored	ES-159
P0327	Knock Sensor 1 Circuit Low Input (Bank 1 or Single Sensor)	1. Short in knock sensor circuit 2. Knock sensor 3. ECM	Comes on	DTC stored	ES-172
P0328	Knock Sensor 1 Circuit High Input (Bank 1 or Single Sensor)	1. Open in knock sensor circuit 2. Knock sensor 3. ECM	Comes on	DTC stored	ES-172
P0335	Crankshaft Position Sensor "A" Circuit	1. Open or short in Crankshaft Position (CKP) sensor circuit 2. CKP sensor 3. CKP sensor plate 4. ECM	Comes on	DTC stored	ES-177
P0339	Crankshaft Position Sensor "A" Circuit Intermittent	Same as DTC P0335	-	DTC stored	ES-177
P0340	Camshaft Position Sensor "A" Circuit (Bank 1 or Single Sensor)	1. Open or short in Camshaft Position (CMP) sensor circuit 2. CMP sensor 3. Camshaft 4. Jumped tooth of timing chain 5. ECM	Comes on	DTC stored	ES-183

DTC No.	Detection Item	Trouble Area	MIL	Memory	See page
P0351	Ignition Coil "A" Primary / Secondary Circuit	1. Ignition system 2. Open or short in IGF1 or IGT circuit (1 to 4) between ignition coil with igniter and ECM 3. No. 1 to No. 4 ignition coils with igniters 4. ECM	Comes on	DTC stored	ES-188
P0352	Ignition Coil "B" Primary / Secondary Circuit	Same as DTC P0351	Comes on	DTC stored	ES-188
P0353	Ignition Coil "C" Primary / Secondary Circuit	Same as DTC P0351	Comes on	DTC stored	ES-188
P0354	Ignition Coil "D" Primary / Secondary Circuit	Same as DTC P0351	Comes on	DTC stored	ES-188
P0420	Catalyst System Efficiency Below Threshold (Bank 1)	1. Front exhaust pipe (with Three-Way Catalytic Converter) 2. Gas leakage from exhaust system 3. A/F sensor (sensor 1) 4. HO2 sensor (sensor 2)	Comes on	DTC stored	ES-196
P043E	Evaporative Emission System Reference Orifice Clog Up	1. Canister pump module (Reference orifice, leak detection pump, vent valve) 2. Connector/wire harness (Canister pump module ECM) 3. EVAP system hose (pipe from air inlet port to canister pump module, canister filter, fuel tank vent hose) 4. ECM	Comes on	DTC stored	ES-203
P043F	Evaporative Emission System Reference Orifice High Flow	Same as DTC P043E	Comes on	DTC stored	ES-203
P0441	Evaporative Emission Control System Incorrect Purge Flow	1. Purge VSV 2. Connector/wire harness (Purge VSV ECM) 3. Canister pump module 4. Leakage from EVAP system 5. Leakage from EVAP line (Purge VSV Intake manifold) 6. ECM	Comes on	DTC stored	ES-208
P0450	Evaporative Emission Control System Pressure Sensor / Switch	1. Canister pump module 2. EVAP system hose (pipe from air inlet port to canister pump module, canister filter, fuel tank vent hose) 3. ECM	Comes on	DTC stored	ES-215

DTC No.	Detection Item	Trouble Area	MIL	Memory	See page
P0451	Evaporative Emission Control System Pressure Sensor Range / Performance	1. Canister pump module 2. Connector/wire harness (Canister pump module ECM) 3. EVAP system hose (pipe from air inlet port to canister pump module, canister filter, fuel tank vent hose) 4. ECM	Comes on	DTC stored	ES-215
P0452	Evaporative Emission Control System Pressure Sensor / Switch Low Input	Same as DTC P0451	Comes on	DTC stored	ES-215
P0453	Evaporative Emission Control System Pressure Sensor / Switch High Input	Same as DTC P0451	Comes on	DTC stored	ES-215
P0455	Evaporative Emission Control System Leak Detected (Gross Leak)	1. Fuel cap (loose) 2. Leakage from EVAP line (Canister Fuel tank) 3. Leakage from EVAP line (Purge VSV Canister) 4. Canister pump module 5. Leakage from fuel tank 6. Leakage from canister	Comes on	DTC stored	ES-224
P0456	Evaporative Emission Control System Leak Detected (Very Small Leak)	Same as DTC P0455	Comes on	DTC stored	ES-224
P0500	Vehicle Speed Sensor "A"	1. Open or short in speed signal circuit 2. Vehicle speed sensor 3. Combination meter 4. ECM 5. Skid control ECU	Comes on	DTC stored	ES-229
P0504	Brake Switch "A" / "B" Correlation	1. Short in stop light switch signal circuit 2. STOP fuse 3. IGN fuse 4. Stop light switch 5. ECM	-	DTC stored	ES-234
P0505	Idle Control System Malfunction	1. ETCS (Electronic Throttle Control System) 2. Air induction system 3. PCV hose connections 4. ECM	Comes on	DTC stored	ES-237

DTC No.	Detection Item	Trouble Area	MIL	Memory	See page
P050A	Cold Start Idle Air Control System Performance	1. Throttle body assembly 2. MAF meter 3. Air induction system 4. PCV hose connections 5. VVT system 6. Air cleaner filter element 7. ECM	Comes on	DTC stored	ES-241
P050B	Cold Start Ignition Timing Performance	Same as DTC P050A	Comes on	DTC stored	ES-241
P0560	System Voltage	1. Open in back up power source circuit 2. Battery 3. Battery terminals 4. EFI No. 1 fuse 5. ECM	Comes on	DTC stored	ES-247
P0604	Internal Control Module Random Access Memory (RAM) Error	ECM	Comes on	DTC stored	ES-251
P0606	ECM / PCM Processor	ECM	Comes on	DTC stored	ES-251
P0607	Control Module Performance	ECM	Comes on	DTC stored	ES-251
P0617	Starter Relay Circuit High	1. Park/Neutral Position (PNP) switch 2. ST relay circuit 3. Ignition switch 4. ECM	Comes on	DTC stored	ES-253
P0630	VIN not Programmed or Mismatch - ECM / PCM	ECM	Comes on	DTC stored	ES-259
P0657	Actuator Supply Voltage Circuit / Open	ECM	Comes on	DTC stored	ES-251
P0724	Brake Switch "B" Circuit High	1. Short in stop light switch circuit 2. Stop light switch 3. ECM	Comes on	DTC stored	ES-261
P2004	Intake Manifold Runner Control Stuck Open (Bank 1)	1. Intake manifold runner valve (IMRV) motor circuit 2. IMRV motor 3. IMRV position sensor 4. IMRV 5. ECM	Comes on	DTC stored	ES-264
P2006	Intake Manifold Runner Control Stuck Closed (Bank 1)	Same as DTC P2004	Comes on	DTC stored	ES-264
P2009	Intake Manifold Runner Control Circuit Low (Bank 1)	1. Open in IMRV motor circuit 2. IMRV motor 3. ECM	Comes on	DTC stored	ES-270
P2010	Intake Manifold Runner Control Circuit High (Bank 1)	1. Short in IMRV motor circuit 2. IMRV motor 3. ECM	Comes on	DTC stored	ES-270

DTC No.	Detection Item	Trouble Area	MIL	Memory	See page
P2014	Intake Manifold Runner Position Sensor / Switch Circuit (Bank 1)	1. Open or short in IMRV position sensor circuit 2. IMRV position sensor 3. ECM	Comes on	DTC stored	ES-275
P2016	Intake Manifold Runner Position Sensor / Switch Circuit Low (Bank 1)	Same as DTC P2014	Comes on	DTC stored	ES-275
P2017	Intake Manifold Runner Position Sensor / Switch Circuit High (Bank 1)	Same as DTC P2014	Comes on	DTC stored	ES-275
P2102	Throttle Actuator Control Motor Circuit Low	1. Open in throttle actuator circuit 2. Throttle actuator 3. ECM	Comes on	DTC stored	ES-280
P2103	Throttle Actuator Control Motor Circuit High	1. Short in throttle actuator circuit 2. Throttle actuator 3. Throttle valve 4. Throttle body assembly 5. ECM	Comes on	DTC stored	ES-280
P2111	Throttle Actuator Control System - Stuck Open	1. Throttle actuator 2. Throttle body assembly 3. Throttle valve	Comes on	DTC stored	ES-285
P2112	Throttle Actuator Control System - Stuck Closed	Same as DTC P2111	Comes on	DTC stored	ES-285
P2118	Throttle Actuator Control Motor Current Range / Performance	1. Open in ETCS power source circuit 2. Battery 3. Battery terminals 4. ETCS fuse 5. ECM	Comes on	DTC stored	ES-288
P2119	Throttle Actuator Control Throttle Body Range / Performance	1. ETCS 2. ECM	Comes on	DTC stored	ES-295
P2120	Throttle / Pedal Position Sensor / Switch "D" Circuit	1. Accelerator Pedal Position (APP) sensor 2. ECM	Comes on	DTC stored	ES-298
P2121	Throttle / Pedal Position Sensor / Switch "D" Circuit Range / Performance	1. APP sensor 2. ECM	Comes on	DTC stored	ES-305
P2122	Throttle / Pedal Position Sensor / Switch "D" Circuit Low Input	1. APP sensor 2. Open in VCP1 circuit 3. Open or ground short in VPA circuit 4. ECM	Comes on	DTC stored	ES-298
P2123	Throttle / Pedal Position Sensor / Switch "D" Circuit High Input	1. APP sensor 2. Open in EPA circuit 3. ECM	Comes on	DTC stored	ES-298
P2125	Throttle / Pedal Position Sensor / Switch "E" Circuit	1. APP sensor 2. ECM	Comes on	DTC stored	ES-298

DTC No.	Detection Item	Trouble Area	MIL	Memory	See page
P2127	Throttle / Pedal Position Sensor / Switch "E" Circuit Low Input	1. APP sensor 2. Open in VCP2 circuit 3. Open or ground short in VPA2 circuit 4. ECM	Comes on	DTC stored	ES-298
P2128	Throttle / Pedal Position Sensor / Switch "E" Circuit High Input	1. APP sensor 2. Open in EPA2 circuit 3. ECM	Comes on	DTC stored	ES-298
P2135	Throttle / Pedal Position Sensor / Switch "A" / "B" Voltage Correlation	1. Short between VTA1 and VTA2 circuits 2. TP sensor (built into throttle body) 3. ECM	Comes on	DTC stored	ES-117
P2138	Throttle / Pedal Position Sensor / Switch "D" / "E" Voltage Correlation	1. Short between VPA and VPA2 circuits 2. APP sensor 3. ECM	Comes on	DTC stored	ES-298
P2195	Oxygen (A/F) Sensor Signal Stuck Lean (Bank 1 Sensor 1)	1. Open or short in A/F sensor (sensor 1) circuit 2. A/F sensor (sensor 1) 3. A/F sensor heater (sensor 1) 4. Engine room J/B (EFI relay) 5. A/F sensor heater and EFI relay circuits 6. ECM	Comes on	DTC stored	ES-308
P2196	Oxygen (A/F) Sensor Signal Stuck Rich (Bank 1 Sensor 1)	Same as DTC P2195	Comes on	DTC stored	ES-308
P2237	Oxygen (A/F) Sensor Pumping Current Circuit / Open (Bank 1 Sensor 1)	1. Open or short in A/F sensor (sensor 1) circuit 2. A/F sensor (sensor 1) 3. ECM	Comes on	DTC stored	ES-322
P2238	Oxygen (A/F) Sensor Pumping Current Circuit Low (Bank 1 Sensor 1)	1. Open or short in A/F sensor (sensor 1) circuit 2. A/F sensor (sensor 1) 3. ECM	Comes on	DTC stored	ES-322
P2239	Oxygen (A/F) Sensor Pumping Current Circuit High (Bank 1 Sensor 1)	1. Open or short in A/F sensor (sensor 1) circuit 2. A/F sensor (sensor 1) 3. ECM	Comes on	DTC stored	ES-322
P2252	Oxygen (A/F) Sensor Reference Ground Circuit Low (Bank 1 Sensor 1)	1. Open or short in A/F sensor (sensor 1) circuit 2. A/F sensor (sensor 1) 3. ECM	Comes on	DTC stored	ES-322

DTC No.	Detection Item	Trouble Area	MIL	Memory	See page
P2253	Oxygen (A/F) Sensor Reference Ground Circuit High (Bank 1 Sensor 1)	1. Open or short in A/F sensor (sensor 1) circuit 2. A/F sensor (sensor 1) 3. ECM	Comes on	DTC stored	ES-322
P2401	Evaporative Emission Leak Detection Pump Stuck OFF	1. Canister pump module (Reference orifice, leak detection pump, vent valve) 2. Connector/wire harness (Canister pump module ECM) 3. EVAP system hose (pipe from air inlet port to canister pump module, canister filter, fuel tank vent hose) 4. ECM	Comes on	DTC stored	ES-203
P2402	Evaporative Emission Leak Detection Pump Stuck ON	Same as DTC P2401	Comes on	DTC stored	ES-203
P2419	Evaporative Emission System Switching Valve Control Circuit Low	1. Canister pump module (Reference orifice, leak detection pump, vent valve) 2. Connector/wire harness (Canister pump module ECM) 3. EVAP system hose (pipe from air inlet port to canister pump module, canister filter, fuel tank vent hose) 4. ECM	Comes on	DTC stored	ES-203
P2420	Evaporative Emission System Switching Valve Control Circuit High	1. Canister pump module (Reference orifice, leak detection pump, vent valve) 2. Connector/wire harness (Canister pump module ECM) 3. ECM	Comes on	DTC stored	ES-330
P2610	ECM / PCM Internal Engine Off Timer Performance	ECM	Comes on	DTC stored	ES-334
P2A00	A/F Sensor Circuit Slow Response (Bank 1 Sensor 1)	1. Open or short in A/F sensor circuit 2. A/F sensor 3. ECM	Comes on	DTC stored	ES-337


*1: Blinks when terrible misfire is detected.

DTC	P0010	Camshaft Position "A" Actuator Circuit (Bank 1)

DESCRIPTION

The Variable Valve Timing (VVT) system includes the ECM, OCV and VVT controller. The ECM sends a target duty-cycle control signal to the OCV. This control signal regulates the oil pressure applied to the VVT controller. Camshaft timing control is performed according to engine operating conditions such as the intake air volume, throttle valve position and engine coolant temperature. The ECM controls the OCV, based on the signals transmitted by several sensors. The VVT controller regulates the intake camshaft angle using oil pressure through the OCV. As a result, the relative positions of the camshaft and crankshaft are optimized, the engine torque and fuel economy improve, and the exhaust emissions decrease under overall driving conditions. The ECM detects the actual intake valve timing using signals from the camshaft and crankshaft position sensors, and performs feedback control. This is how the target intake valve timing is verified by the ECM.

ES

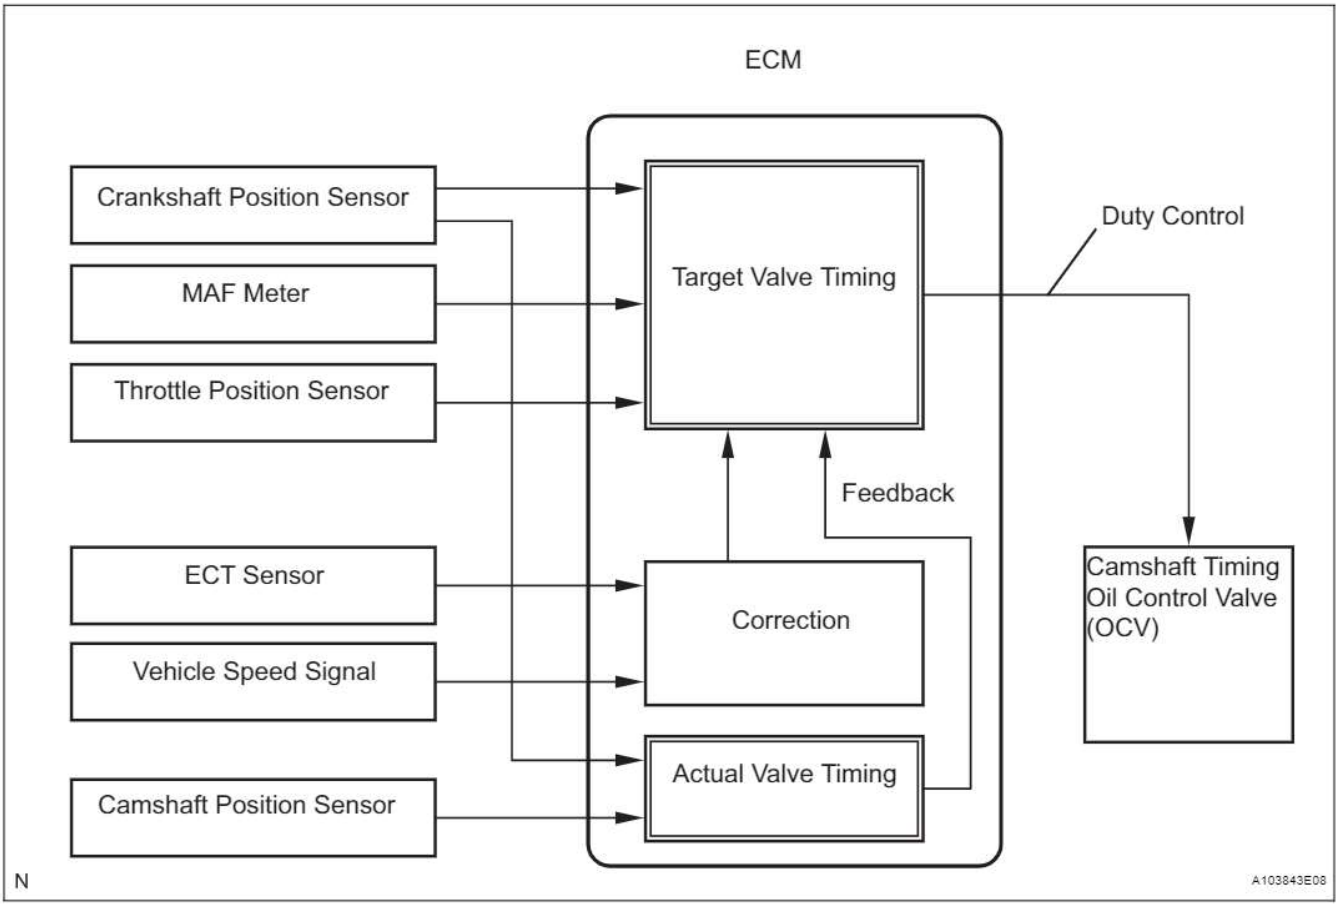

DTC No.	DTC Detection Condition	Trouble Area
P0010	Open or short in OCV circuit (1 trip detection logic)	• Open or short in OCV circuit • OCV • ECM

HINT:
This DTC relates to the Oil Control Valve (OCV).

MONITOR DESCRIPTION

The ECM optimizes the valve timing using the VVT system to control the intake camshaft. The VVT system includes the ECM, the OCV and the VVT controller. The ECM sends a target duty-cycle control signal to the OCV. This control signal regulates the oil pressure supplied to the VVT controller. The VVT controller can advance or retard the intake camshaft.
After the ECM sends the target duty-cycle control signal to the OCV, the ECM monitors the OCV current to establish an actual duty-cycle. The ECM determines the existence of a malfunction and sets the DTC when the actual duty-cycle ratio varies from the target duty-cycle ratio.

MONITOR STRATEGY

Related DTCs	P0010: VVT OCV range check
Required Sensors/Components (Main)	VVT OCV
Required Sensors/Components (Related)	-
Frequency of Operation	Continuous
Duration	1 second
MIL Operation	Immediate
Sequence of Operation	None

ES

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None
All of the following conditions are met	-
Starter	OFF
Ignition switch	ON
Time after ignition switch OFF to ON position	0.5 seconds or more


TYPICAL MALFUNCTION THRESHOLDS

One of the following conditions is met	-
A. All of the following conditions are met	-
Battery voltage	11 to 13 V
Target duty ratio	Less than 70 %
Output signal duty ratio	100 %
B. All of the following conditions are met	-
Battery voltage	13 V or more
Target duty ratio	Less than 80 %
Output signal duty ratio	100 %
C. Both of the following conditions is met	-
Current cut status	Not cut
Output signal duty ratio	3 % or less

COMPONENT OPERATING RANGE

VVT OCV duty ratio	3 to 100 %

WIRING DIAGRAM

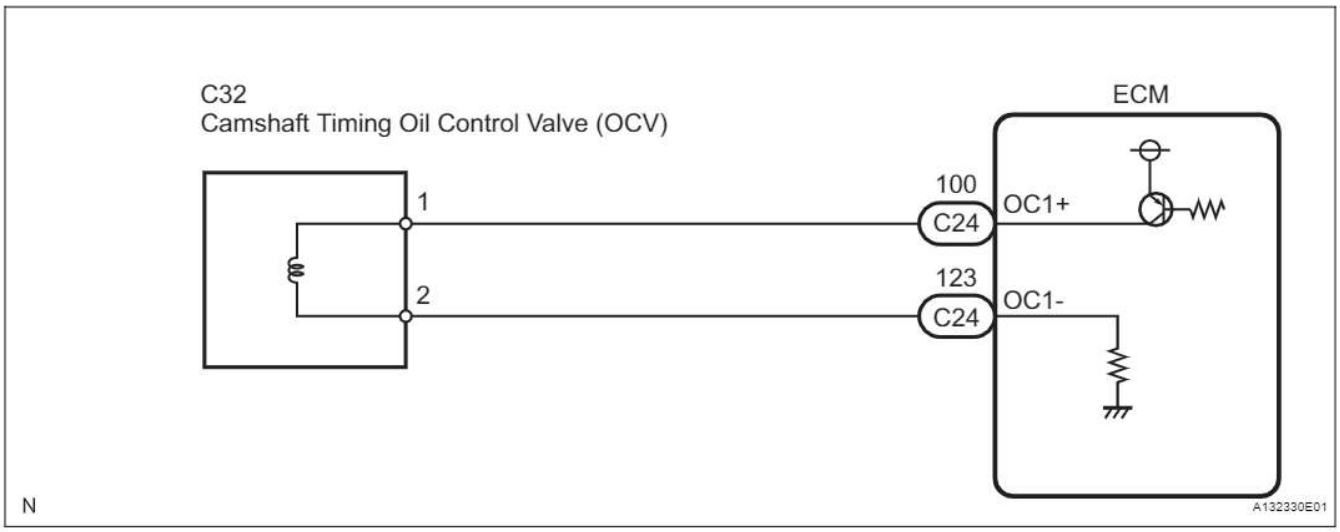

ES

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	PERFORM ACTIVE TEST USING INTELLIGENT TESTER (OPERATE OCV)

(a) Connect the intelligent tester to the DLC3.
(b) Start the engine and turn the tester ON.
(c) Warm up the engine.
(d) On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / VVT CTRL B1.
(e) Check the engine speed while operating the Oil Control Valve (OCV) using the tester.

OK


Tester Operation	Specified Condition
OCV OFF	Normal engine speed
OCV ON	Engine idles roughly or stalls (soon after OCV switched from OFF to ON)

NG → Go to step 2

OK →

CHECK FOR INTERMITTENT PROBLEMS

2 INSPECT CAMSHAFT TIMING OIL CONTROL VALVE ASSEMBLY

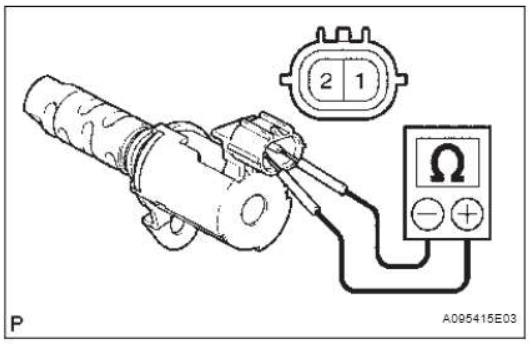


(a) Disconnect the C32 OCV connector.
(b) Measure the resistance between the terminals of the OCV.
Standard resistance:
6.9 to 7.9 Ω at 20°C (68°F)
(c) Reconnect the OCV connector.

NG → **REPLACE CAMSHAFT TIMING OIL CONTROL VALVE ASSEMBLY**

OK

3 CHECK HARNESS AND CONNECTOR (OCV - ECM)

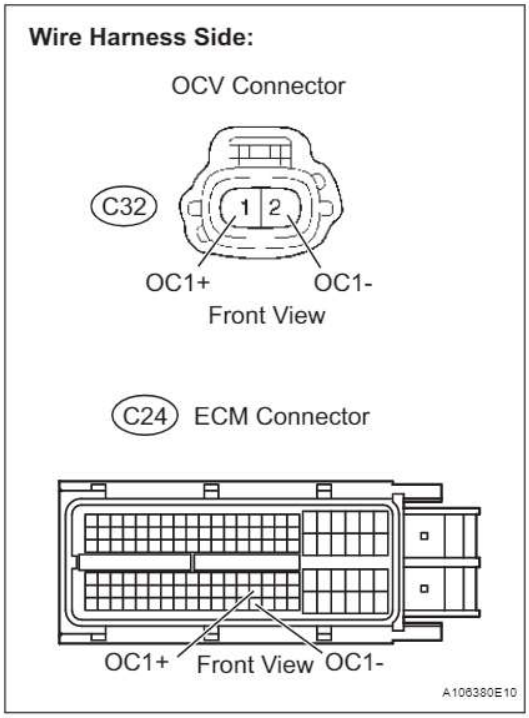

(a) Disconnect the C32 OCV connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.
Standard resistance (Check for open)

Tester Connection	Specified Condition
C32-1 (OC1+) - C24-100 (OC1+)	Below 1 Ω
C32-2 (OC1-) - C24-123 (OC1-)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
C32-1 (OC1+) or C24-100 (OC1+) - Body ground	10 kΩ or higher
C32-2 (OC1-) or C24-123 (OC1-) - Body ground	10 kΩ or higher

(d) Reconnect the OCV connector.
(e) Reconnect the ECM connector.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK


REPLACE ECM

DTC	P0011	Camshaft Position "A" - Timing Over-Advanced or System Performance (Bank 1)

DTC	P0012	Camshaft Position "A" - Timing Over-Retarded (Bank 1)

DESCRIPTION

The VVT system includes the ECM, Oil Control Valve (OCV) and VVT controller. The ECM sends a target duty-cycle control signal to the OCV. This control signal regulates the oil pressure applied to the VVT controller. Camshaft timing control is performed according to engine operating conditions such as the intake air volume, throttle valve position and engine coolant temperature. The ECM controls the OCV, based on the signals transmitted by several sensors. The VVT controller regulates the intake camshaft angle using oil pressure through the OCV. As a result, the relative positions of the camshaft and crankshaft are optimized, the engine torque and fuel economy improve, and the exhaust emissions decrease under overall driving conditions. The ECM detects the actual intake valve timing using signals from the camshaft and crankshaft position sensors, and performs feedback control. This is how the target intake valve timing is verified by the ECM.

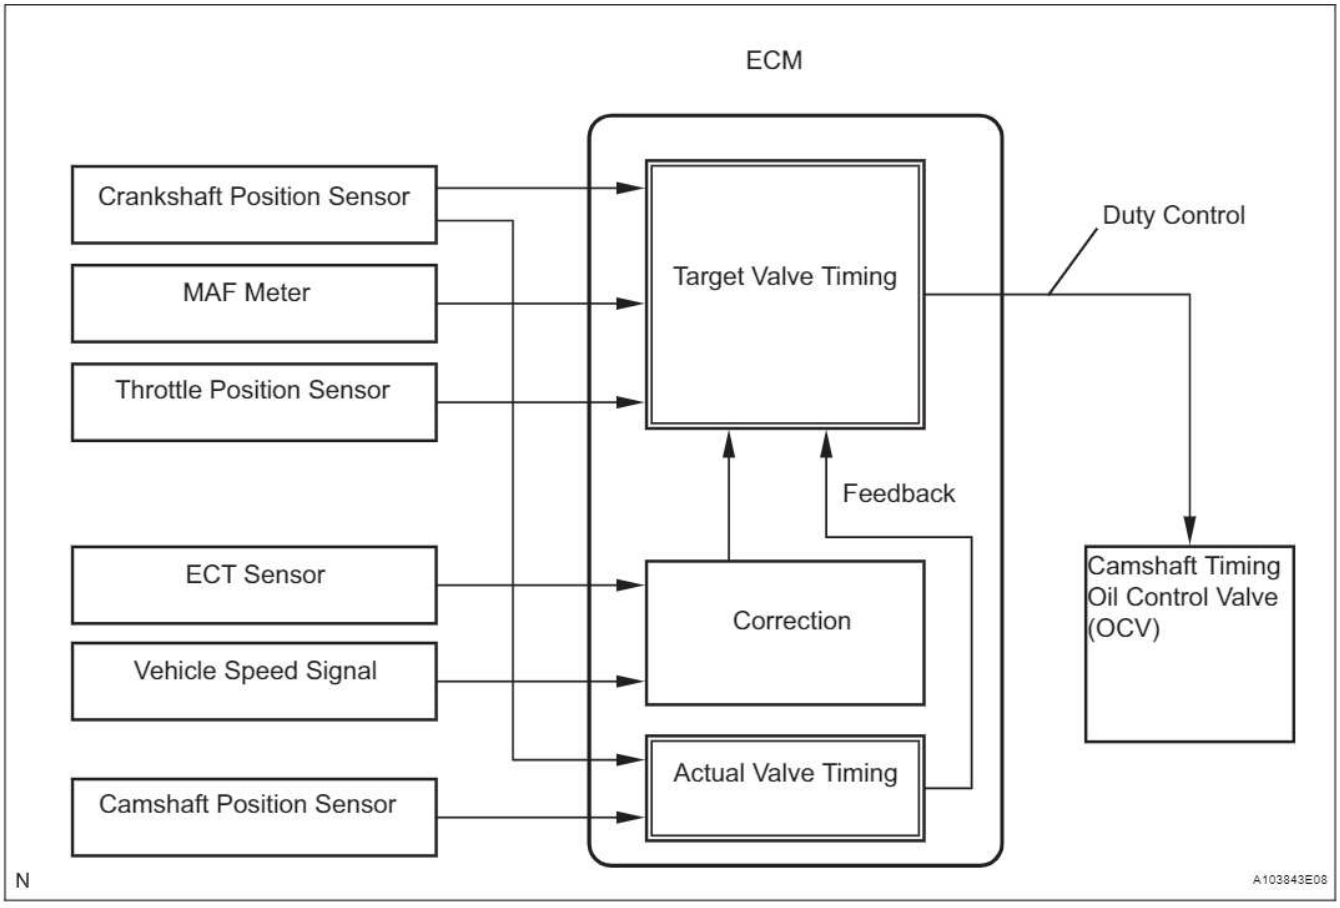

DTC No.	DTC Detection Conditions	Trouble Areas
P0011	Advanced camshaft timing: With warm engine and engine speed of between 550 rpm and 4,000 rpm, all conditions (1), (2) and (3) are met (1 trip detection logic): 1. Difference between target and actual intake valve timings more than 5°CA (Crankshaft Angle) for 4.5 seconds 2. Current intake valve timing fixed (timing changes less than 5°CA in 5 seconds) 3. Variations in VVT controller timing more than 19°CA of maximum delayed timing (malfunction in advance timing)	• Valve timing • OCV • OCV filter • Camshaft timing gear assembly • ECM
P0012	Retarded camshaft timing: With warm engine and engine speed of between 550 rpm and 4,000 rpm, all conditions (1), (2) and (3) are met (2 trip detection logic): 1. Difference between target and actual intake valve timings more than 5°CA (Crankshaft Angle) for 4.5 seconds 2. Current intake valve timing fixed (timing changes less than 5°CA in 5 seconds) 3. Variations in VVT controller timing 19°CA or less of maximum delayed timing (malfunction in retarded timing)	• Valve timing • OCV • OCV filter • Camshaft timing gear assembly • ECM

ES

MONITOR DESCRIPTION

The ECM optimizes the intake valve timing using the VVT (Variable Valve Timing) system to control the intake camshaft. The VVT system includes the ECM, the Oil Control Valve (OCV) and the VVT controller. The ECM sends a target duty-cycle control signal to the OCV. This control signal regulates the oil pressure supplied to the VVT controller. The VVT controller can advance or retard the intake camshaft. If the difference between the target and actual intake valve timings is large, and changes in the actual intake valve timing are small, the ECM interprets this as the VVT controller stuck malfunction and sets a DTC.

Example:

A DTC is set when the following conditions 1, 2 and 3 are met:

(a) The difference between the target and actual intake valve timings is more than 5°CA (Crankshaft Angle) and the condition continues for more than 4.5 seconds.

(b) It takes 5 seconds or more to change the valve timing by 5°CA.

(c) After above conditions 1 and 2 are met, the OCV is forcibly activated during 10 seconds.

DTC P0011 (Advanced Cam Timing) is subject to 1 trip detection logic.

DTC P0012 (Retarded Cam Timing) is subject to 2 trip detection logic.

These DTCs indicate that the VVT controller cannot operate properly due to OCV malfunctions or the presence of foreign objects in the OCV.

The monitor will run if all of the following conditions are met:

– The engine is warm (the engine coolant temperature is 75°C (167°F) or more).
– The vehicle has been driven at more than 40 mph (64 km/h) for 3 minutes.
– The engine has idled for 3 minutes.

MONITOR STRATEGY

Related DTCs	P0011: Advanced camshaft timing P0012: Retarded camshaft timing
Required Sensors/Components (Main)	VVT OCV and VVT Actuator
Required Sensors/Components (Related)	Crankshaft position sensor, camshaft position sensor and engine coolant temperature sensor
Frequency of Operation	Once per driving cycle
Duration	Within 10 seconds

MIL Operation	Advanced camshaft timing: Immediate Retarded camshaft timing: 2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	P0100 - P0103 (MAF meter) P0115 - P0118 (ECT sensor) P0125 (Insufficient ECT for closed loop) P0335 (CKP sensor) P0340 (CMP sensor) P0351 - P0354 (Igniter)
Battery voltage	11 V or more
Engine RPM	550 to 4,000 rpm
ECT	75°C (167°F) to 100°C (212°F)

TYPICAL MALFUNCTION THRESHOLDS

Advanced camshaft timing:

All of the following conditions are met	-
Crank angle between reference position and actual intake camshaft angle	67°CA or more
Valve timing	No change at advanced valve timing

Retard camshaft timing:

All of the following conditions are met	-
Crank angle between reference point and actual intake camshaft angle	Less than 67°CA
Valve timing	No change at retarded valve timing

If the difference between the target and actual camshaft timings is greater than the specified value, the ECM operates the VVT actuator.
Then, the ECM monitors the camshaft timing change for 5 seconds.

WIRING DIAGRAM

Refer to DTC P0010 (See page ES-67).

INSPECTION PROCEDURE

NOTICE:

DTC P0011 or P0012 may be set when foreign objects in the engine oil are caught in some parts of the system. The DTC will remain set even if the system returns to normal after a short time. Foreign objects are filtered out by the oil filter.

HINT:

- If DTC P0011 or P0012 is present, check the VVT (Variable Valve Timing) system.
- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P0011 OR P0012)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.

(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(d) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P0011 or P0012	A
P0011 or P0012 and other DTCs	B

HINT:
If any DTCs other than P0011 or P0012 are output, troubleshoot those DTCs first.

B → GO TO DTC CHART

A

2 PERFORM ACTIVE TEST USING INTELLIGENT TESTER (OPERATE OCV)

(a) Connect the intelligent tester to the DLC3.
(b) Start the engine and turn the tester on.
(c) Warm up the engine.
(d) On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / VVT CTRL B1.
(e) Check the engine speed while operating the Oil Control Valve (OCV) using the tester.

OK

Tester Operation	Specified Condition
OCV OFF	Normal engine speed
OCV ON	Engine idles roughly or stalls (soon after OCV switched from OFF to ON)

NG → Go to step 4

OK

3 CHECK WHETHER DTC OUTPUT RECURS (DTC P0011 OR P0012)


(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Clear the DTCs (See page ES-38).
(d) Start the engine and warm it up.
(e) Switch the ECM from normal mode to check mode using the tester.
(f) Drive the vehicle for more than 10 minutes.
(g) Read the DTCs using the tester.
OK:
No DTC output.

NG → Go to step 4

OK

END

4	CHECK VALVE TIMING (CHECK FOR LOOSE AND JUMPED TEETH ON TIMING CHAIN)

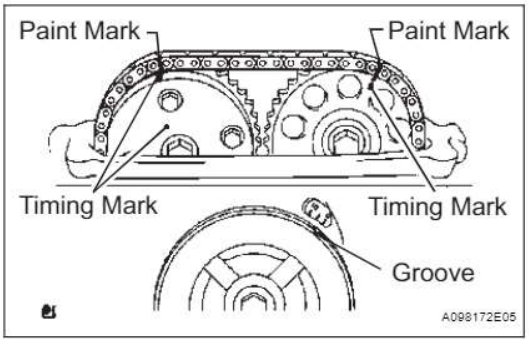


(a) Remove the cylinder head cover.
(b) Turn the crankshaft pulley, and align its groove with the timing mark "0" on the timing chain cover.
(c) Check that the timing marks on the camshaft timing sprocket and camshaft timing gear are facing upward as shown in the illustration.
If not, turn the crankshaft 1 revolution (360°), then align the marks as above.
OK:
Timing marks on camshaft timing gears are aligned as shown in the illustration.
(d) Reinstall the cylinder head cover.


NG → **ADJUST VALVE TIMING**

OK

5	INSPECT CAMSHAFT TIMING OIL CONTROL VALVE ASSEMBLY (OCV)

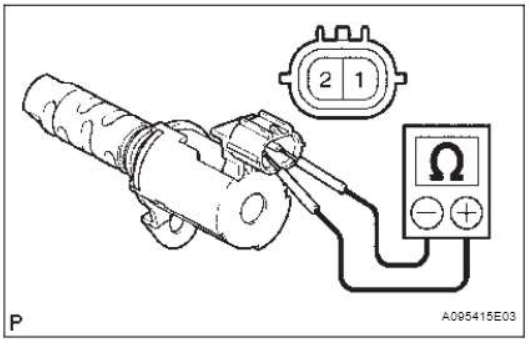

(a) Remove the OCV.
(b) Measure the resistance between the terminals of the OCV.
Standard resistance:
6.9 to 7.9 Ω at 20°C (68°F)

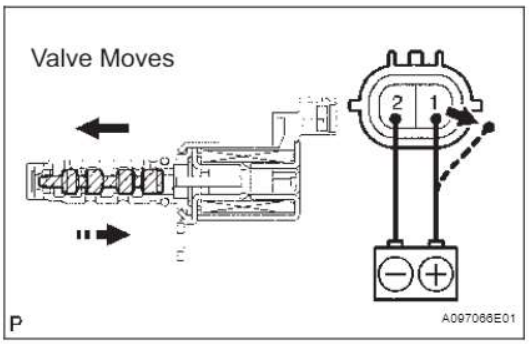


(c) Apply positive battery voltage to terminal 1 and negative battery voltage to terminal 2. Check the valve operation.
OK:
Valve moves quickly.
(d) Reinstall the OCV.

NG → **REPLACE CAMSHAFT TIMING OIL CONTROL VALVE ASSEMBLY**

OK

6	INSPECT OIL CONTROL VALVE FILTER

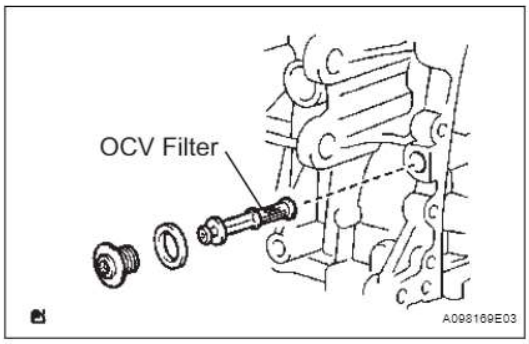

(a) Remove the generator.
(b) Remove the OCV filter.
(c) Check that the filter is not clogged.
OK:
Filter is not clogged.
(d) Reinstall the OCV filter.
(e) Reinstall the generator.

NG → CLEAN OIL CONTROL VALVE FILTER

OK

7	REPLACE CAMSHAFT TIMING GEAR ASSEMBLY

NEXT

8	CHECK WHETHER DTC OUTPUT RECURS

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Clear the DTCs (See page ES-38).
(d) Start the engine and warm it up.
(e) Switch the ECM from normal mode to check mode using the tester.
(f) Drive the vehicle for more than 10 minutes.
(g) Read the output DTCs using the tester.
Standard:
No DTC output.
HINT:
DTC P0011 or P0012 is output when foreign objects in engine oil are caught in some parts of the system. These codes will stay output for a short time even after the system returns to normal. These foreign objects are then captured by the oil filter, thus eliminating the source of the problem.

NG → REPLACE ECM

OK

SYSTEM OK

DTC	P0016	Crankshaft Position - Camshaft Position Correlation (Bank 1 Sensor A)

DESCRIPTION

In the VVT (Variable Valve Timing) system, the appropriate intake valve open and close timing is controlled by the ECM. The ECM performs intake valve control by performing the following: 1) controlling the camshaft and camshaft timing oil control valve, and operating the camshaft timing gear; and 2) changing the relative positions of the gaps between the camshaft and crankshaft.

DTC No.	DTC Detection Condition	Trouble Area
P0016	Deviation between crankshaft and camshaft position sensor signals (2 trip detection logic)	• Mechanical system (Timing chain has jumped tooth or chain stretched) • ECM

ES

MONITOR DESCRIPTION

The ECM optimizes the valve timing by using the VVT (Variable Valve Timing) system to control the intake camshaft. The VVT system includes the ECM, the Oil Control Valve (OCV) and the VVT controller.
The ECM sends a target duty-cycle control signal to the OCV. This control signal regulates the oil pressure supplied to the VVT controller. The VVT controller can advance or retard the intake camshaft.
The ECM calibrates the intake valve timing by setting the intake camshaft to the most retarded angle while the engine is idling. The ECM closes the OCV to retard the cam. The ECM stores this value as the VVT learning value. When the difference between the target and actual intake valve timings is 5°CA (Crankshaft Angle) or less, the ECM stores it.
If the VVT learning value matches the following conditions, the ECM determines the existence of a malfunction in the VVT system, and sets the DTC.

- VVT learning value: Less than 27.8°CA, or more than 48°CA.
- Above condition continues for 18 seconds or more.

This DTC indicates that the angle between the intake camshaft and the crankshaft is incorrect due to factors such as the timing chain having a jumped tooth.
This monitor begins to run after the engine has idled for 5 minutes.

MONITOR STRATEGY

Related DTCs	P0016: Camshaft timing misalignment at idling
Required Sensors/Components	VVT actuator
Required Sensors/Components	Camshaft position sensor, Crankshaft position sensor
Frequency of Operation	Once per driving cycle
Duration	Within 1 minute
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	P0011 (VVT system 1 - advance) P0012 (VVT system 1 - retarded) P0115 - P0118 (ECT sensor)
Engine RPM	550 to 1,000 rpm

TYPICAL MALFUNCTION THRESHOLDS

One of the following conditions is met	-
VVT learning value at maximum retarded valve timing	Less than 27.8°CA
VVT learning value at maximum retarded valve timing	More than 48°CA

WIRING DIAGRAM

Refer to DTC P0335 (See page ES-177).

INSPECTION PROCEDURE

HINT:

Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	CHECK VALVE TIMING (CHECK FOR LOOSE AND JUMPED TOOTH OF TIMING CHAIN) (See page ES-78)

NG → Go to step 3

OK

2	REPLACE ECM

NEXT → Go to step 4

3	ADJUST VALVE TIMING

NEXT

4	CHECK WHETHER DTC OUTPUT RECURS

NOTICE:

After replacing the ECM or adjusting intake valve timing, confirm that the DTC output does not recur.

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Clear the DTCs (See page ES-38).
(e) Switch the ECM from normal mode to check mode using the tester (See page ES-41).
(f) Start the engine and warm it up.
(g) Allow the engine to idle for 1 minute or more, and then drive the vehicle for 1 minute or more.
(h) Confirm that no DTC is set using the tester.

OK:

No DTC output

NEXT

END

DTC	P0031	Oxygen (A/F) Sensor Heater Control Circuit Low (Bank 1 Sensor 1)

DTC	P0032	Oxygen (A/F) Sensor Heater Control Circuit High (Bank 1 Sensor 1)

HINT:
- Although the DTC titles say oxygen sensor, these DTCs relate to the Air-Fuel Ratio (A/F) sensor.
- Sensor 1 refers to the sensor mounted in front of the Three-Way Catalytic Converter (TWC) and located near the engine assembly.


ES

DESCRIPTION

Refer to DTC P2195 (See page ES-308).

HINT:
- When either of these DTCs is set, the ECM enters fail-safe mode. The ECM turns off the A/F sensor heater in fail-safe mode. Fail-safe mode continues until the ignition switch is turned off.
- The ECM provides a pulse width modulated control circuit to adjust the current through the heater. The A/F sensor heater circuit uses a relay on the B+ side of the circuit.

Reference (System Diagram of Sensor 1):

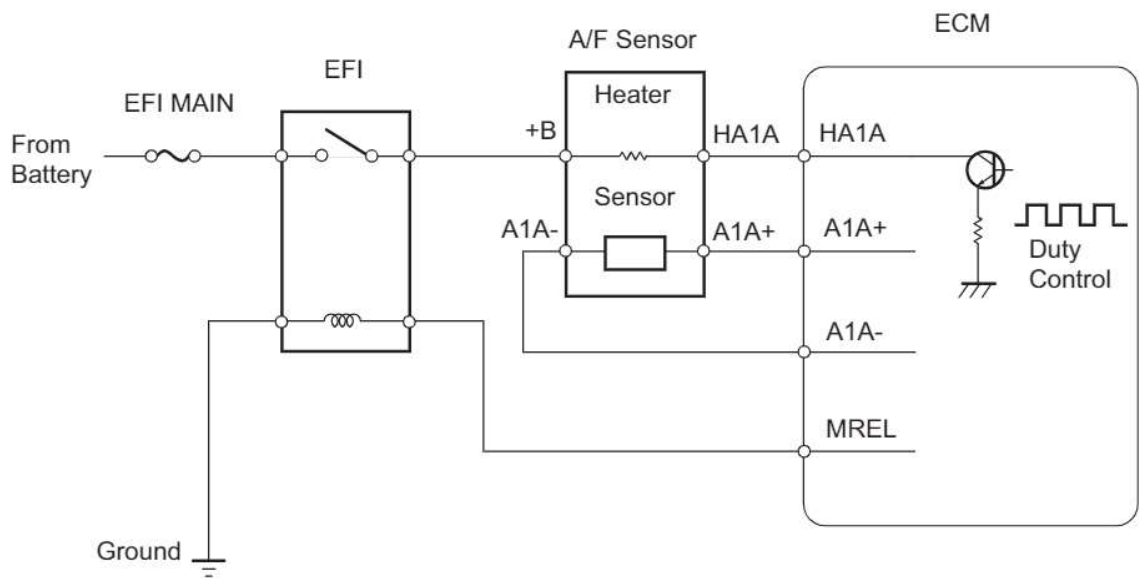

DTC No.	DTC Detection Condition	Trouble Area
P0031	Air-Fuel Ratio (A/F) sensor heater current less than 0.8 A (1 trip detection logic)	• Open in A/F sensor heater circuit • A/F sensor heater (sensor 1) • Engine room J/B (EFI relay) • ECM
P0032	Air-Fuel Ratio (A/F) sensor heater current more than 10 A (1 trip detection logic)	• Short in A/F sensor heater circuit • A/F sensor heater (sensor 1) • Engine room J/B (EFI relay) • ECM

MONITOR DESCRIPTION

The ECM uses information from the Air-Fuel Ratio (A/F) sensor to regulate the air-fuel ratio and keep it close to the stoichiometric level. This maximizes the ability of the Three-Way Catalytic Converter (TWC) to purify the exhaust gases.

The A/F sensor detects oxygen levels in the exhaust gas and transmits the information to the ECM. The inner surface of the sensor element is exposed to the outside air. The outer surface of the sensor element is exposed to the exhaust gas. The sensor element is made of platinum coated zirconia and includes an integrated heating element.

The zirconia element generates a small voltage when there is a large difference in the oxygen concentrations between the exhaust gas and outside air. The platinum coating amplifies this voltage generation.

The A/F sensor is more efficient when heated. When the exhaust gas temperature is low, the sensor cannot generate useful voltage signals without supplementary heating. The ECM regulates the supplementary heating using a duty-cycle approach to adjust the average current in the sensor heater element. If the heater current is outside the normal range, the signal transmitted by the A/F sensor becomes inaccurate, as a result, the ECM is unable to regulate air-fuel ratio properly.

When the current in the A/F sensor heater is outside the normal operating range, the ECM interprets this as a malfunction in the sensor heater and sets a DTC.

Example:

The ECM sets DTC P0032 when the current in the A/F sensor heater is more than 10 A. Conversely, when the heater current is less than 0.8 A, DTC P0031 is set.

MONITOR STRATEGY

Related DTCs	P0031: A/F sensor heater open/short (Low electrical current) P0032: A/F sensor heater open/short (High electrical current)
Required Sensors/Components (Main)	A/F sensor heater
Required Sensors/Components (Related)	-
Frequency of Operation	Continuous
Duration	10 seconds
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

All:

Monitor runs whenever following DTCs are not present	None

P0031:

Battery voltage	10.5 V or more
A/F sensor heater duty-cycle ratio	50 % or more
Time after engine start	10 seconds or more

P0032:

Time after engine start	10 seconds or more

TYPICAL MALFUNCTION THRESHOLDS

P0031:

A/F sensor heater current	Less than 0.8 A

P0032:

A/F sensor heater current	More than 10 A

COMPONENT OPERATING RANGE

A/F sensor heater current	0.9 to 9.9 A

WIRING DIAGRAM

Refer to DTC P2195 (See page ES-312).


INSPECTION PROCEDURE

HINT:

Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

ES

1 INSPECT AIR-FUEL RATIO SENSOR (HEATER RESISTANCE)

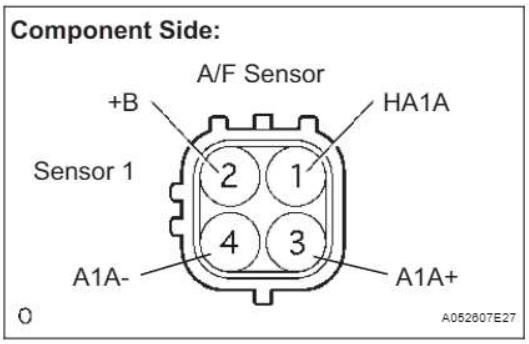

(a) Disconnect the C15 A/F sensor connector.

(b) Measure the resistance between the terminals of the A/F sensor connector.

Standard resistance


Tester Connection	Specified Condition
1 (HA1A) - 2 (+B)	1.8 Ω to 3.4 Ω at 20°C (68°F)
1 (HA1A) - 4 (A1A-)	10 kΩ or higher

(c) Reconnect the A/F sensor connector.

NG → REPLACE AIR-FUEL RATIO SENSOR

OK

2 CHECK TERMINAL VOLTAGE (+B OF A/F SENSOR)

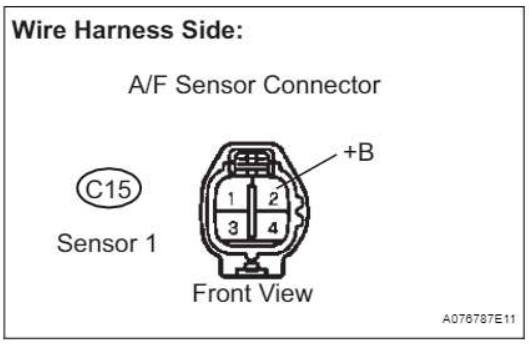

(a) Disconnect the C15 A/F sensor connector.

(b) Turn the ignition switch to the ON position.

(c) Measure the voltage between the terminal of the A/F sensor connector and body ground.

Standard voltage


Tester Connection	Specified Condition
C15-2 (+B) - Body ground	9 to 14 V

(d) Reconnect the A/F sensor connector.

OK → Go to step 5

NG

3	INSPECT ENGINE ROOM J/B (EFI RELAY)

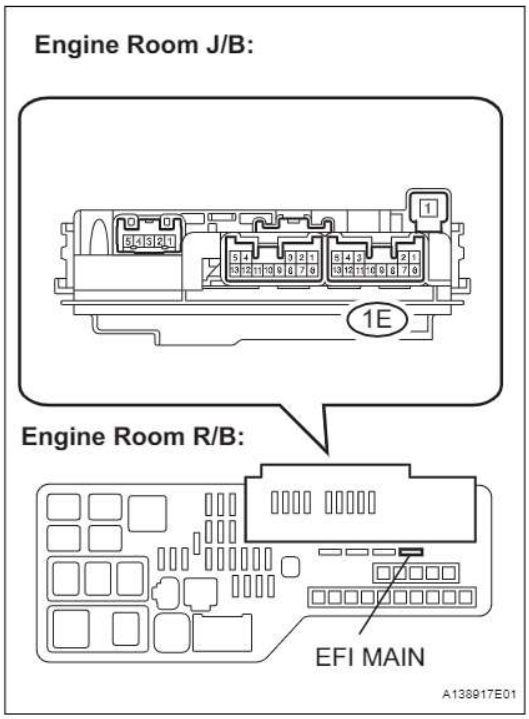

(a) Inspect the EFI MAIN fuse.
  (1) Remove the EFI MAIN fuse from the engine room R/B.
  (2) Measure the EFI MAIN fuse resistance.
    Standard resistance:
      Below 1 Ω
  (3) Reinstall the EFI MAIN fuse.

(b) Inspect the EFI relay.
  (1) Remove the engine room J/B from the engine room R/B.
  (2) Measure the EFI relay resistance.
    Standard resistance

Tester Connection	Specified Condition
1E-7 - 1E-12	10 kΩ or higher
	Below 1 Ω (Apply battery voltage between terminals 1E-9 and 1E-11)


  (3) Reinstall the engine room J/B.

NG → **REPLACE ENGINE ROOM J/B**

OK

ES

4	CHECK HARNESS AND CONNECTOR (A/F SENSOR - EFI RELAY)

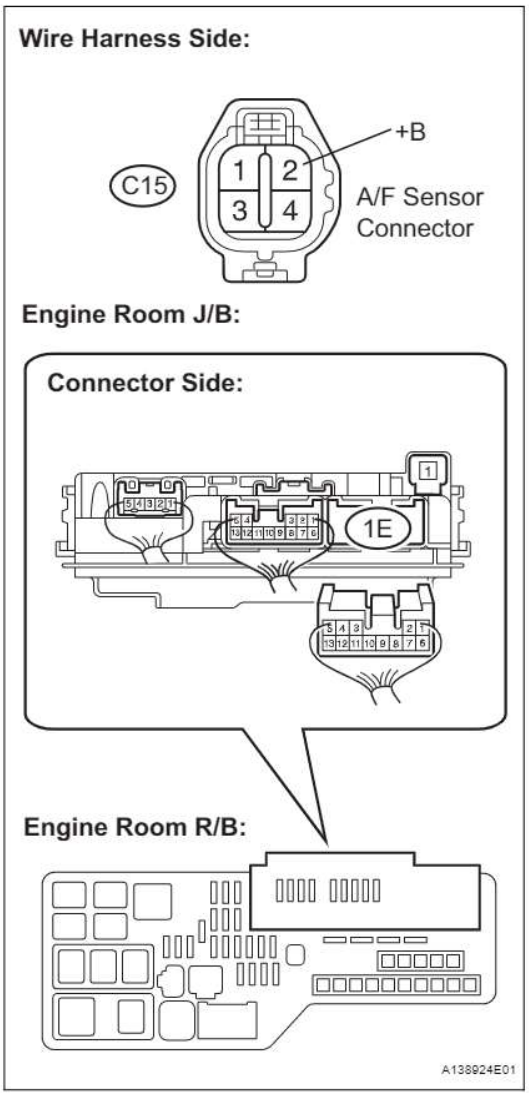

(a) Disconnect the C15 A/F sensor connector.
(b) Remove the engine room J/B from the engine room R/B.
(c) Disconnect the 1E engine room J/B connector.
(d) Measure the resistance between the terminals.

Standard resistance (Check for open)

Tester Connection	Specified Condition
C15-2 (+B) - 1E-7 (Engine room J/B)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
C15-2 (+B) or 1E-7 (Engine room J/B) - Body ground	10 kΩ or higher


(e) Reconnect the A/F sensor connector.
(f) Reconnect the engine room J/B connector.
(g) Reinstall the engine room J/B.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

CHECK ECM POWER SOURCE CIRCUIT

5 CHECK HARNESS AND CONNECTOR (A/F SENSOR - ECM)

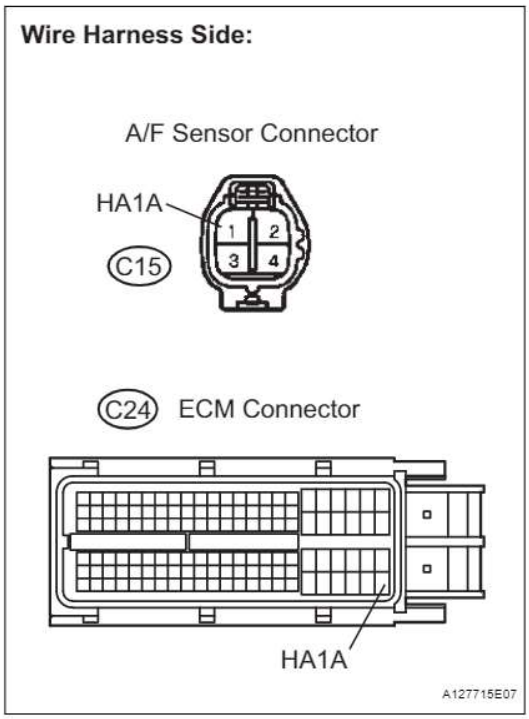

(a) Disconnect the C15 A/F sensor connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)

Tester Connection	Specified Condition
C15-1 (HA1A) - C24-109 (HA1A)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
C15-1 (HA1A) or C24-109 (HA1A) - Body ground	10 kΩ or higher

(d) Reconnect the A/F sensor connector.
(e) Reconnect the ECM connector.

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

6 CHECK WHETHER DTC OUTPUT RECURS

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Clear the DTCs (See page ES-38).
(e) Start the engine.
(f) Allow the engine to idle for 1 minute or more.
(g) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(h) Read the DTCs.

Result

Display (DTC Output)	Proceed to
No output	A
P0031 or P0032	B

B → REPLACE ECM

A

CHECK FOR INTERMITTENT PROBLEMS

DTC	P0037	Oxygen Sensor Heater Control Circuit Low (Bank 1 Sensor 2)

DTC	P0038	Oxygen Sensor Heater Control Circuit High (Bank 1 Sensor 2)

DTC	P0141	Oxygen Sensor Heater Circuit Malfunction (Bank 1 Sensor 2)

DESCRIPTION


ES

Refer to DTC P0136 (See page ES-132).

HINT:

- When any of these DTCs are set, the ECM enters fail-safe mode. The ECM turns off the Heated Oxygen (HO2) Sensor heater in fail-safe mode. Fail-safe mode continues until the ignition switch is turned off.
- The ECM provides a pulse width modulated control circuit to adjust the current through the heater. The HO2 sensor heater circuit uses a relay on the B+ side of the circuit.

Reference (System Diagram of Sensor 2):

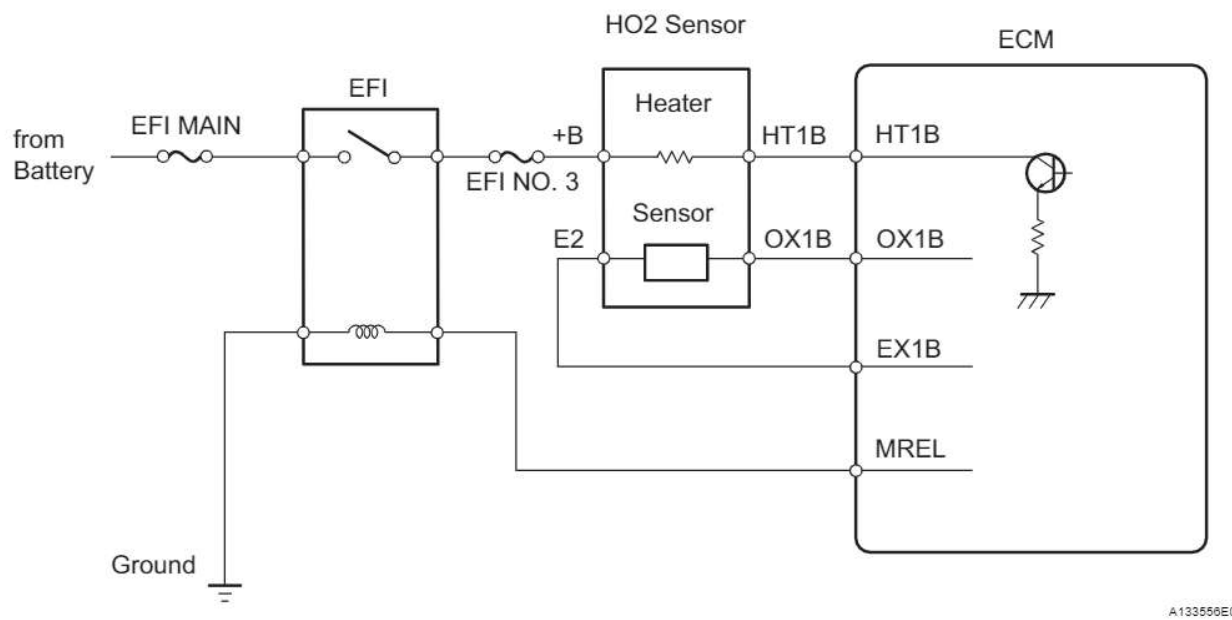

DTC No.	DTC Detection Condition	Trouble Area
P0037	Heated Oxygen (HO2) sensor heater current less than 0.3 A (1 trip detection logic)	• Open in HO2 sensor heater circuit • HO2 sensor heater (sensor 2) • Engine room J/B (EFI relay) • ECM
P0038	Heated Oxygen (HO2) sensor heater current more than 2 A (1 trip detection logic)	• Short in HO2 sensor heater circuit • HO2 sensor heater (sensor 2) • Engine room J/B (EFI relay) • ECM
P0141	Cumulative heater resistance correction value exceeds threshold (2 trip detection logic)	• Open or short in HO2 sensor heater circuit • HO2 sensor heater (sensor 2) • Engine room J/B (EFI relay) • ECM

MONITOR DESCRIPTION

The sensing position of the Heated Oxygen (HO2) sensor has a zirconia element which is used to detect the oxygen concentration in the exhaust gas. If the zirconia element is at the appropriate temperature, and the difference between the oxygen concentrations surrounding the inside and outside surfaces of the sensor is large, the zirconia element generates voltage signals. In order to increase the oxygen concentration detecting capacity of the zirconia element, the ECM supplements the heat from the exhaust with heat from a heating element inside the sensor.

Heated oxygen sensor heater range check (P0037 and P0038):

The ECM monitors the current applied to the O2 sensor heater to check the heater for malfunctions. If the current is below the threshold value, the ECM determines that there is an open circuit in the heater. If the current is above the threshold value, the ECM determines that there is a short circuit in the heater.

The ECM constantly monitors the current applied to the heater. If the ECM detects an open or short circuit, the ECM turns the MIL on and sets a DTC.

If a malfunction is detected, the ECM cuts off the current applied to the heater.

Example:

The ECM sets DTC P0038 when the current in the HO2 sensor heater is more than 2 A. Conversely, when the heater current is less than 0.3 A, DTC P0037 is set.

Heated oxygen sensor heater performance (P0141):

After the accumulated heater ON time exceeds 100 seconds, the ECM calculates the heater resistance using the battery voltage and the current applied to the heater.

If the resistance is above the threshold value, the ECM determines that there is a malfunction in the HO2 sensor heater and sets DTC P0141.

ES

MONITOR STRATEGY

Related DTCs	P0037: Heated oxygen sensor heater range check (Low electrical current) P0038: Heated oxygen sensor heater range check (High electrical current) P0141: Heated oxygen sensor heater performance
Required Sensors/Components (Main)	Heated oxygen sensor heater
Required Sensors/Components (Related)	-
Frequency of Operation	Continuous: P0037 and P0038 Once per driving cycle: P0141
Duration	1 second: P0037 and P0038 10 seconds: P0141
MIL Operation	Immediate: P0037 and P0038 2 driving cycles: P0141
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

All:

Monitor runs whenever following DTCs are not present	None

P0037:

Battery voltage	10.5 to 20 V

P0038 (Condition A):

Battery voltage	10.5 V or more
Engine	Running
Starter	OFF

P0038 (Condition B):

Battery voltage	10.5 to 20 V

P0141:

All of the following conditions are met:	-
Battery voltage	10.5 V or more
Fuel cut	OFF
Time after fuel cut ON to OFF	30 seconds or more
Accumulated heater ON time	100 seconds or more

TYPICAL MALFUNCTION THRESHOLDS

P0037:

Heater current	Less than 0.3 A

P0038:

One of the following conditions A or B is met	-
A. Learned heater OFF current	More than 2 A
B. Heater current	More than 2 A

P0141:

Accumulated heater resistance	Varies with sensor element temperature (Example: More than 23 Ω)

COMPONENT OPERATING RANGE

Heated Oxygen (HO2) sensor heater current	0.4 to 1 A (when engine idles, HO2 sensor warmed up and battery voltage 11 to 14 V)

WIRING DIAGRAM

Refer to DTC P0136 (See page ES-139).

CONFIRMATION DRIVING PATTERN

These DTCs are detected when the engine idles for 110 seconds or more.


INSPECTION PROCEDURE

HINT:

- Sensor 2 refers to the sensor mounted behind the Three-Way Catalytic Converter (TWC) and located far from the engine assembly.
- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1 INSPECT HEATED OXYGEN SENSOR (HEATER RESISTANCE)

Component Side :

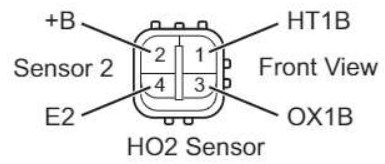

A115661E02

(a) Disconnect the C22 Heated Oxygen (HO2) sensor connector.

(b) Measure the resistance between the terminals of the HO2 sensor connector.

Standard resistance

Tester Connection	Specified Condition
1 (HT1B) - 2 (+B)	11 to 16 Ω at 20°C (68°F)
1 (HT1B) - 4 (E2)	10 kΩ or higher

(c) Reconnect the HO2 sensor connector.

NG → REPLACE HEATED OXYGEN SENSOR

OK

2 CHECK TERMINAL VOLTAGE (+B OF HO2 SENSOR)

Wire Harness Side:

Heated Oxygen Sensor Connector



Front View

A072895E10

(a) Disconnect the C22 HO2 sensor connector.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage between the terminal of the C22 HO2 sensor connector and body ground.

Standard voltage

Tester Connection	Specified Condition
C22-2 (+B) - Body ground	9 to 14 V

(d) Reconnect the HO2 sensor connector.

OK → Go to step 5


NG

3 INSPECT ENGINE ROOM J/B (EFI RELAY) (See page ES-85)

NG → REPLACE ENGINE ROOM J/B

OK

4	CHECK HARNESS AND CONNECTOR (HO2 SENSOR - EFI RELAY)

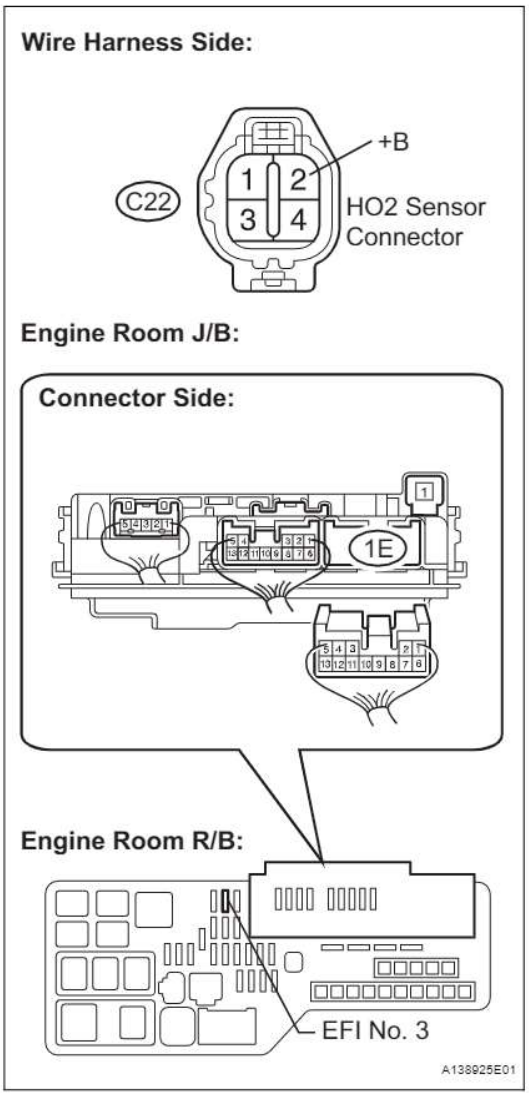

(a) Inspect the EFI No. 3 fuse.
  (1) Remove the EFI No. 3 fuse from the engine room R/B.
  (2) Measure the EFI No. 3 fuse resistance.
    Standard resistance:
    Below 1 Ω
  (3) Reinstall the EFI No. 3 fuse.
(b) Disconnect the C22 HO2 sensor connector.
(c) Remove the engine room J/B from the engine room R/B.
(d) Disconnect the 1E engine room J/B connector.
(e) Measure the resistance between the terminals.

Standard resistance (Check for open)

Tester Connection	Specified Condition
C22-2 (+B) - 1E-6 (Engine room J/B)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
C22-2 (+B) or 1E-6 (Engine room J/B) - Body ground	10 kΩ or higher


(f) Reconnect the HO2 sensor connector.
(g) Reconnect the engine room J/B connector.
(h) Reinstall the engine room J/B.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

CHECK ECM POWER SOURCE CIRCUIT

5 CHECK HARNESS AND CONNECTOR (HO2 SENSOR - ECM)

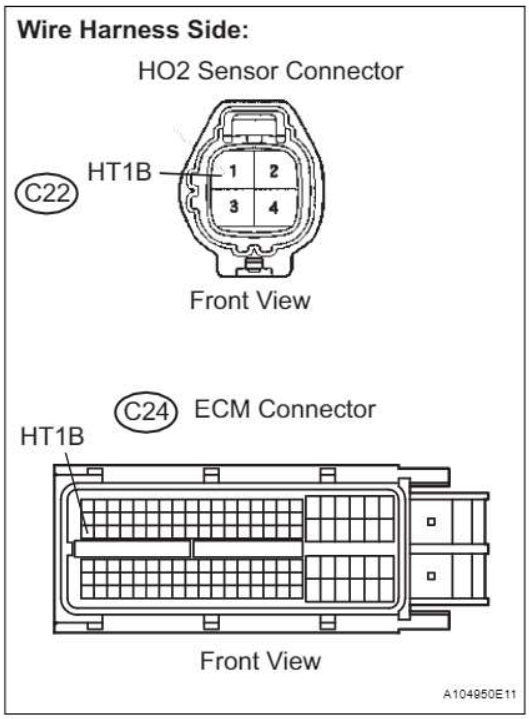

(a) Disconnect the C22 HO2 sensor connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)

Tester Connection	Specified Condition
C22-1 (HT1B) - C24-47 (HT1B)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
C22-1 (HT1B) or C24-47 (HT1B) - Body ground	10 kΩ or higher

(d) Reconnect the HO2 sensor connector.
(e) Reconnect the ECM connector.

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

6 CHECK WHETHER DTC OUTPUT RECURS

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Clear the DTCs (See page ES-38).
(e) Start the engine.
(f) Allow the engine to idle for 2 minutes or more.
(g) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(h) Read the DTCs.

Result

Display (DTC Output)	Proceed to
No output	A
P0037, P0038 and/or P0141	B

B → REPLACE ECM

A

CHECK FOR INTERMITTENT PROBLEMS

DTC	P0100	Mass or Volume Air Flow Circuit
DTC	P0102	Mass or Volume Air Flow Circuit Low Input
DTC	P0103	Mass or Volume Air Flow Circuit High Input

DESCRIPTION

The Mass Air Flow (MAF) meter is a sensor that measures the amount of air flowing through the throttle valve.

The ECM uses this information to determine the fuel injection time and to provide the appropriate air-fuel ratio.

ES


Inside the MAF meter, there is a heated platinum wire which is exposed to the flow of intake air.

By applying a specific electrical current to the wire, the ECM heats it to a given temperature. The flow of incoming air cools both the wire and an internal thermistor, affecting their resistance. To maintain a constant current value, the ECM varies the voltage applied to these components in the MAF meter. The voltage level is proportional to the airflow through the sensor, and the ECM uses it to calculate the intake air volume.

The circuit is constructed so that the platinum hot wire and the temperature sensor create a bridge circuit, and the power transistor is controlled so that the potentials of A and B remain equal to maintain the predetermined temperature.

HINT:

When any of these DTCs are set, the ECM enters fail-safe mode. During fail-safe mode, the ignition timing is calculated by the ECM, according to the engine RPM and throttle valve position. Fail-safe mode continues until a pass condition is detected.

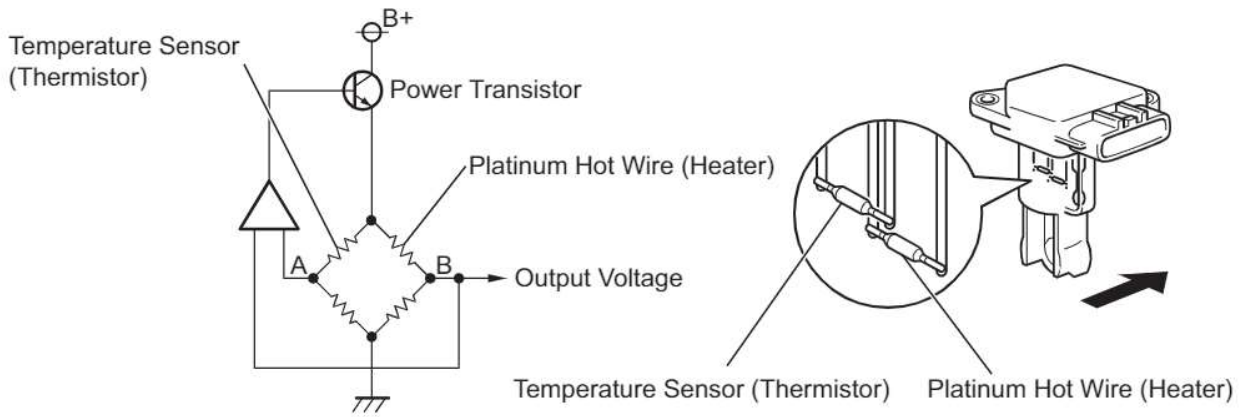

DTC No.	DTC Detection Condition	Trouble Area
P0100	MAF meter voltage less than 0.2 V, or more than 4.9 V for 3 seconds (1 trip detection logic)	• Open or short in MAF meter circuit • MAF meter • ECM
P0102	MAF meter voltage less than 0.2 V for 3 seconds (1 trip detection logic)	• Open or short in MAF meter circuit • MAF meter • ECM
P0103	MAF meter voltage more than 4.9 V for 3 seconds (1 trip detection logic)	• Open or short in MAF meter circuit • MAF meter • ECM

HINT:
When any of these DTCs are set, check the air-flow rate by selecting the following menu items on the intelligent tester: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / MAF.

Mass Air Flow Rate (g/sec.)	Malfunctions
Approximately 0.0	• Open in Mass Air Flow (MAF) meter power source circuit • Open or short in VG circuit
271.0 or more	• Open in E2G circuit

MONITOR DESCRIPTION

If there is a defect in the MAF meter or an open or short circuit, the voltage level deviates from the normal operating range. The ECM interprets this deviation as a malfunction in the MAF meter and sets a DTC.
Example:
When the sensor output voltage remains less than 0.2 V, or more than 4.9 V, for more than 3 seconds, the ECM sets a DTC.
If the malfunction is not repaired successfully, a DTC is set 3 seconds after the engine is next started.

ES

MONITOR STRATEGY

Related DTCs	P0100: MAF meter range check (Fluctuating) P0102: MAF meter range check (Low voltage) P0103: MAF meter range check (High voltage)
Required Sensors/Components (Main)	MAF meter
Required Sensors/Components (Related)	Crankshaft position sensor
Frequency of Operation	Continuous
Duration	3 seconds
MIL Operation	Immediate: Engine RPM less than 4,000 rpm 2 driving cycles: Engine RPM 4,000 rpm or more
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None

TYPICAL MALFUNCTION THRESHOLDS

P0100:

MAF meter voltage	Less than 0.2 V, or more than 4.9 V

P0102:

MAF meter voltage	Less than 0.2 V


P0103:

MAF meter voltage	More than 4.9 V

COMPONENT OPERATING RANGE

MAF meter voltage	Between 0.4 V and 2.2 V

WIRING DIAGRAM

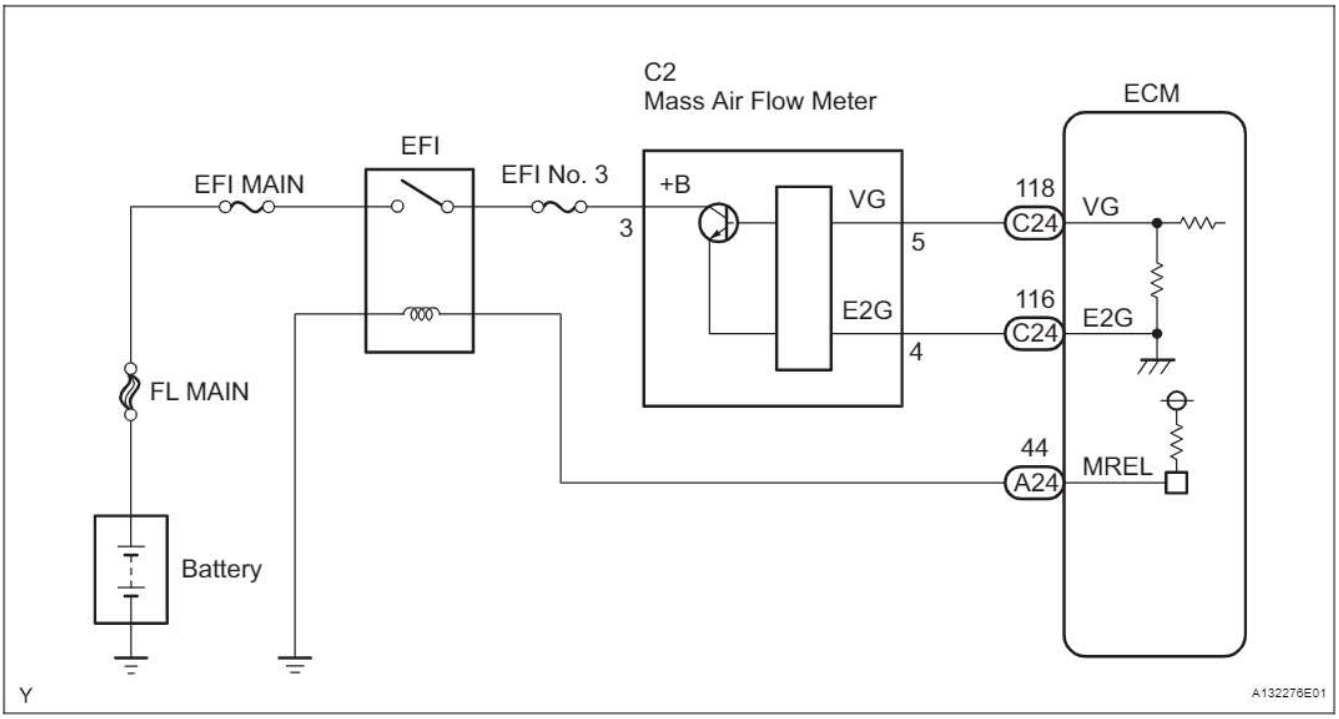

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	READ VALUE USING INTELLIGENT TESTER (MASS AIR FLOW RATE)

(a) Connect the intelligent tester to the DLC3.
(b) Start the engine.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / MAF.
(e) Read the values displayed on the tester.

Result


Mass Air Flow Rate (g/sec.)	Proceed to
0.0	A
271.0 or more	B
Between 1.0 and 270.0 (*1)	C

HINT:
*1: The value must change when the throttle valve is open or closed with the engine running.

B	Go to step 6
C	CHECK FOR INTERMITTENT PROBLEMS

A

2 INSPECT MASS AIR FLOW METER (POWER SOURCE VOLTAGE)

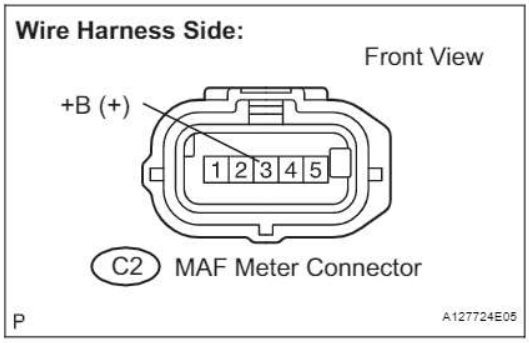

(a) Disconnect the C2 Mass Air Flow (MAF) meter connector.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage between the terminal of the wire harness side connector and body ground.
Standard voltage


Tester Connection	Specified Condition
C2-3 (+B) - Body ground	9 to 14 V

(d) Reconnect the MAF meter connector.

NG → **Go to step 5**

OK

3 INSPECT MASS AIR FLOW METER (VG VOLTAGE)

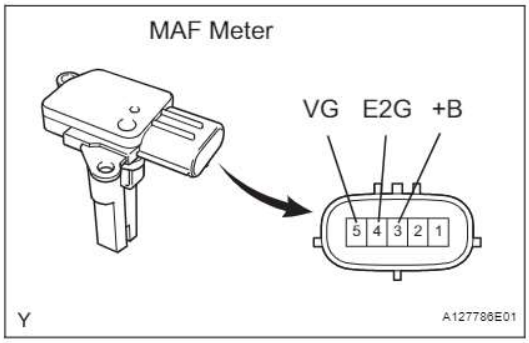

(a) Inspect output voltage.
(1) Disconnect the C2 MAF meter connector.
(2) Apply battery voltage across terminals +B and E2G.
(3) Connect the positive (+) tester probe to terminal VG, and the negative (-) tester probe to terminal E2G.
(4) Measure the voltage.
Standard voltage


Tester Connection	Specified Condition
5 (VG) - 4 (E2G)	0.2 to 4.9 V

(5) Reconnect the MAF meter connector.

NG → **REPLACE MASS AIR FLOW METER**

OK

4	CHECK HARNESS AND CONNECTOR (MASS AIR FLOW METER - ECM)

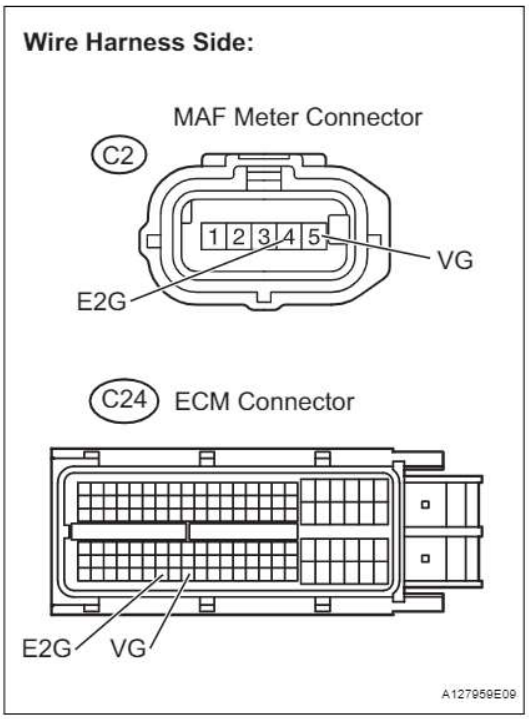

(a) Disconnect the C2 MAF meter connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)

Tester Connection	Specified Condition
C2-5 (VG) - C24-118 (VG)	Below 1 Ω
C2-4 (E2G) - C24-116 (E2G)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
C2-5 (VG) or C24-118 (VG) - Body ground	10 kΩ or higher


(d) Reconnect the MAF meter connector.
(e) Reconnect the ECM connector.

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

REPLACE ECM

5	CHECK HARNESS AND CONNECTOR (MASS AIR FLOW METER - ENGINE ROOM J/B)

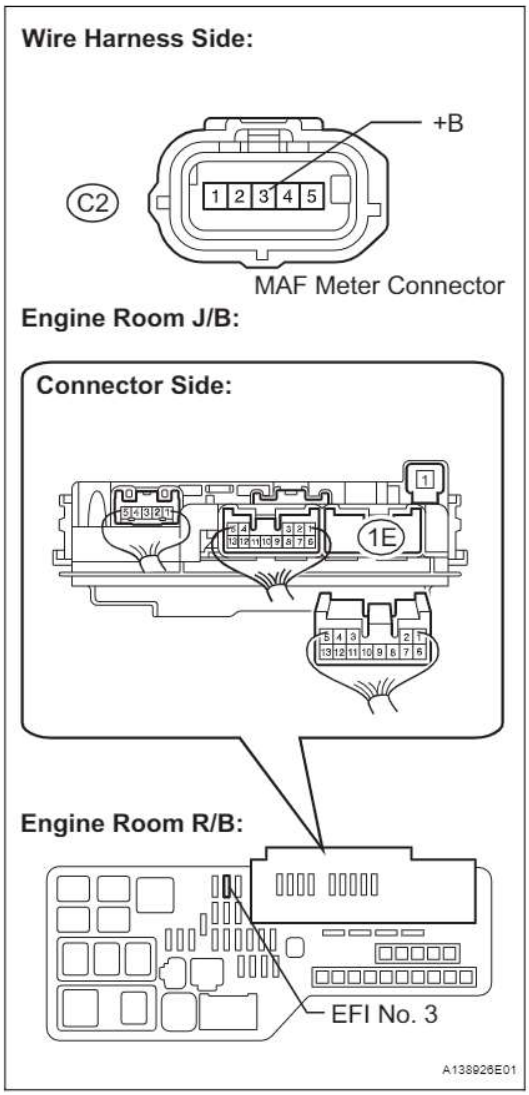

(a) Inspect the EFI No. 3 fuse.
  (1) Remove the EFI No. 3 fuse from the engine room R/B.
  (2) Measure the EFI No. 3 fuse resistance.
    Standard resistance:
    Below 1 Ω
  (3) Reinstall the EFI No. 3 fuse.
(b) Disconnect the C2 MAF meter connector.
(c) Remove the engine room J/B from the engine room R/B.
(d) Disconnect the 1E engine room J/B connector.
(e) Measure the resistance between the terminals.

Standard resistance (Check for open)

Tester Connection	Specified Condition
C2-3 (+B) - 1E-6	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
C2-3 (+B) or 1E-6 - Body ground	10 kΩ or higher


(f) Reconnect the MAF meter connector.
(g) Reconnect the engine room J/B connector.
(h) Reinstall the engine room J/B.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

CHECK ECM POWER SOURCE CIRCUIT

6 CHECK HARNESS AND CONNECTOR (SENSOR GROUND)

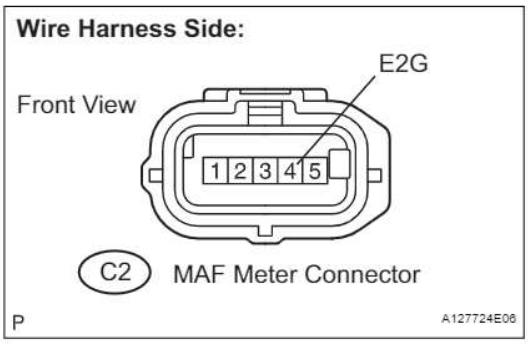

(a) Disconnect the C2 MAF meter connector.
(b) Measure the resistance.

Standard resistance


Tester Connection	Specified Condition
C2-4 (E2G) - Body ground	Below 1 Ω

(c) Reconnect the MAF meter connector.

OK → REPLACE MASS AIR FLOW METER

NG

7 CHECK HARNESS AND CONNECTOR (MASS AIR FLOW METER - ECM)

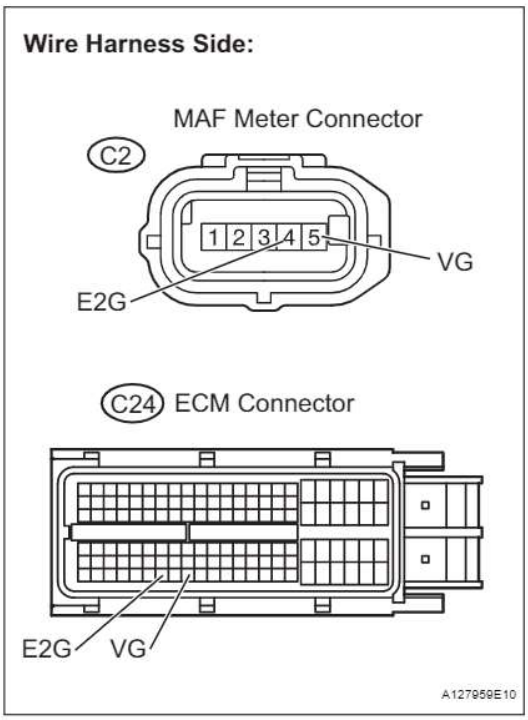

(a) Disconnect the C2 MAF meter connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)

Tester Connection	Specified Condition
C2-5 (VG) - C24-118 (VG)	Below 1 Ω
C2-4 (E2G) - C24-116 (E2G)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
C2-5 (VG) or C24-118 (VG) - Body ground	10 kΩ or higher

(d) Reconnect the MAF meter connector.
(e) Reconnect the ECM connector.

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

REPLACE ECM

DTC	P0101	Mass Air Flow Circuit Range / Performance Problem

DESCRIPTION

Refer to DTC P0100 (See page ES-89).

DTC No.	DTC Detection Condition	Trouble Area
P0101	Conditions (a), (b), (c), (d) and (e) continue for more than 10 seconds (2 trip detection logic): (a) Engine running (b) Engine coolant temperature 70°C (158°F) or higher (c) Throttle Position (TP) sensor voltage 0.24 V or more (d) Average engine load value ratio less than 0.85, or more than 1.15 (varies with estimated engine load) Average engine load value ratio = Average engine load based on MAF meter output / Average engine load estimated from driving conditions (e) Average air-fuel ratio less than -20 %, or more than 20 %	• Mass Air Flow (MAF) meter • Air induction system • PCV hose connections

ES

MONITOR DESCRIPTION

The MAF meter is a sensor that measures the amount of air flowing through the throttle valve. The ECM uses this information to determine the fuel injection time and to provide an appropriate air-fuel ratio. Inside the MAF meter, there is a heated platinum wire which is exposed to the flow of intake air. By applying a specific electrical current to the wire, the ECM heats it to a specific temperature. The flow of incoming air cools both the wire and an internal thermistor, affecting their resistance. To maintain a constant current value, the ECM varies the voltage applied to these components of the MAF meter. The voltage level is proportional to the airflow through the sensor, and the ECM uses it to calculate the intake air volume.
The ECM monitors the average engine load value ratio to check the MAF meter for malfunctions. The average engine load value ratio is obtained by comparing the average engine load calculated from the MAF meter output to the average engine load estimated from the driving conditions, such as the engine speed and the throttle opening angle. If the average engine load value ratio is below the threshold value, the ECM determines that the intake air volume is low, and if the average engine load value ratio is above the threshold value, the ECM determines that the intake air volume is high.
If this is detected in 2 consecutive driving cycles, the MIL is illuminated and a DTC is set.

MONITOR STRATEGY

Related DTCs	P0101: Mass air flow meter rationality
Required Sensors/Components (Main)	Mass air flow meter
Required Sensors/Components (Related)	Crankshaft Position (CKP) sensor, Engine Coolant Temperature (ECT) sensor and Throttle Position (TP) sensor
Frequency of Operation	Continuous
Duration	10 seconds
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	P0115 - P0118 (ECT sensor) P0120 - P0223, P2135 (TP sensor) P0125 (Insufficient ECT for closed loop) P0335 (CKP sensor) P0340 (CMP sensor)
Throttle position (TP sensor voltage)	0.24 V or more
Engine	Running

Battery voltage	10.5 V or more
Engine coolant temperature	70°C (158°F) or more
IAT sensor circuit	OK
ECT sensor circuit	OK
CKP sensor circuit	OK
TP sensor circuit	OK
Canister pressure sensor circuit	OK
EVAP leak detection pump	OK
EVAP vent valve	OK

TYPICAL MALFUNCTION THRESHOLDS

ES


Averaged engine load	Less than 0.85, or more than 1.23

WIRING DIAGRAM

Refer to DTC P0100 (See page ES-91).

CONFIRMATION DRIVING PATTERN

HINT:
Performing this confirmation pattern will activate the mass air flow performance monitor.

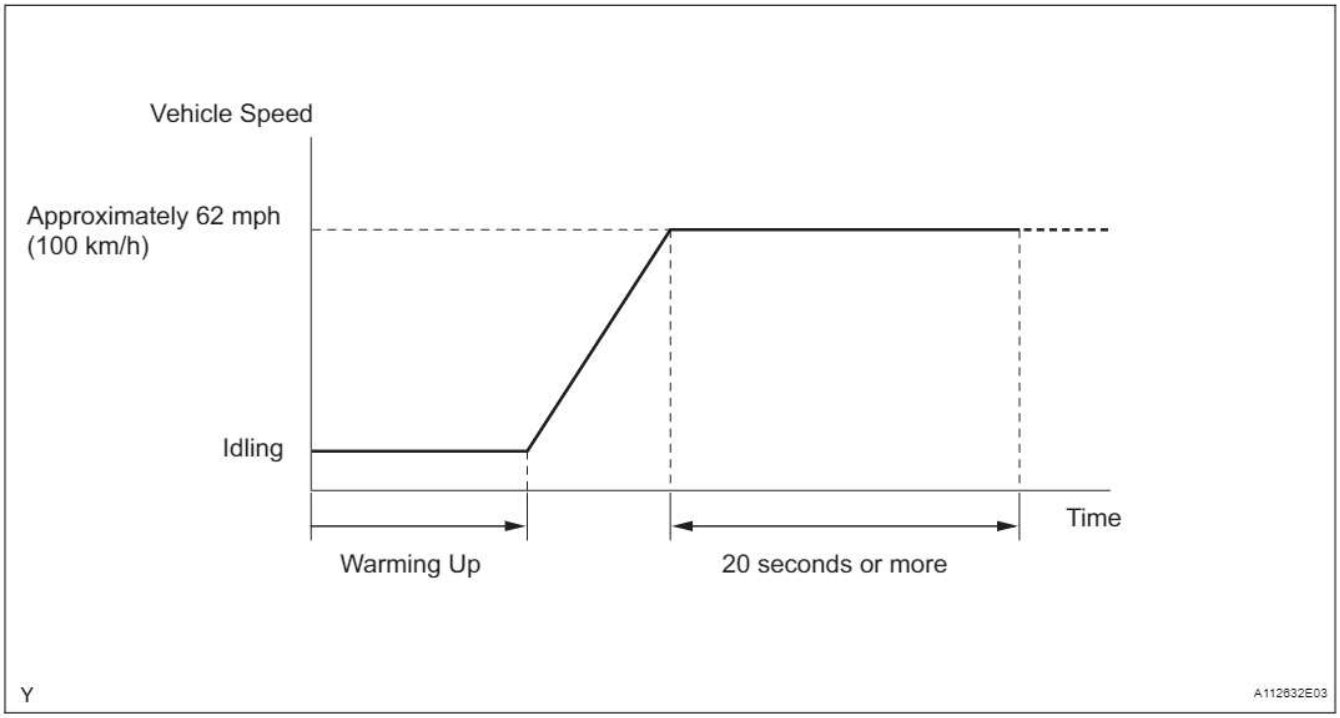

1. Connect the intelligent tester to the DLC3.
2. Turn the ignition switch to the ON position.
3. Turn the tester on.
4. Clear the DTCs (See page ES-38).
5. Start the engine, and warm it up until the engine coolant temperature reaches 70°C (158°F) or higher.
6. Drive the vehicle at approximately 62 mph (100 km/h) for 20 seconds or more.
7. On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES and check if any DTCs (any pending DTCs) are set.

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1 CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P0101)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P0101	A
P0101 and other DTCs	B

HINT:
If any DTCs other than P0101 are output, troubleshoot those DTCs first.

B → **GO TO DTC CHART**

A

2 CHECK AIR INDUCTION SYSTEM

(a) Check the air induction system for vacuum leakage.
OK:
No leakage from air induction system.

NG → **REPAIR OR REPLACE AIR INDUCTION SYSTEM**

OK

3 CHECK PCV HOSE CONNECTIONS

OK:
PCV hose is connected correctly and is not damaged.


NG → **REPAIR OR REPLACE PCV HOSE**

OK

REPLACE MASS AIR FLOW METER

DTC	P0110	Intake Air Temperature Circuit Malfunction
DTC	P0112	Intake Air Temperature Circuit Low Input
DTC	P0113	Intake Air Temperature Circuit High Input

DESCRIPTION

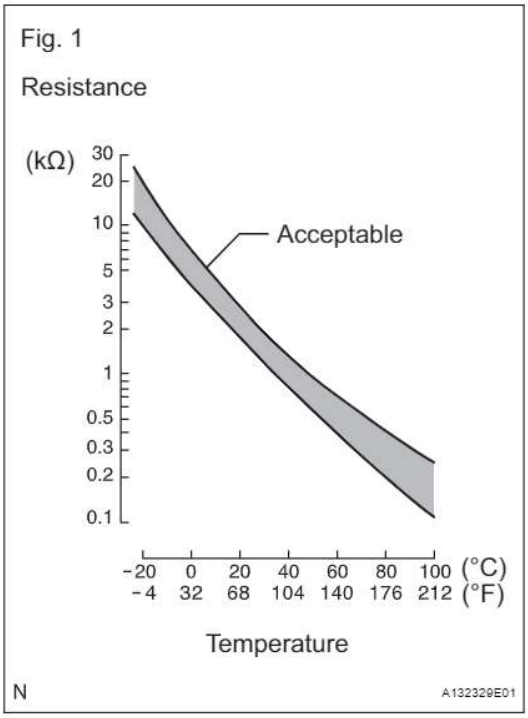

The Intake Air Temperature (IAT) sensor, mounted on the Mass Air Flow (MAF) meter, monitors the IAT. The IAT sensor has a built-in thermistor with a resistance that varies according to the temperature of the intake air. When the IAT becomes low, the resistance of the thermistor increases. When the temperature becomes high, the resistance drops. These variations in resistance are transmitted to the ECM as voltage changes (see Fig. 1).

The IAT sensor is powered by a 5 V supply from the THA terminal of the ECM, via resistor R.

Resistor R and the IAT sensor are connected in series. When the resistance value of the IAT sensor changes, according to changes in the IAT, the voltage at terminal THA also varies. Based on this signal, the ECM increases the fuel injection volume when the engine is cold to improve driveability.

HINT:

When any of DTCs P0110, P0112 and P0113 are set, the ECM enters fail-safe mode. During fail-safe mode, the IAT is estimated to be 20°C (68°F) by the ECM. Fail-safe mode continues until a pass condition is detected.

DTC No.	DTC Detection Condition	Trouble Area
P0110	Open or short in IAT sensor circuit for 0.5 seconds (1 trip detection logic)	• Open or short in IAT sensor circuit • IAT sensor (built into MAF meter) • ECM
P0112	Short in IAT sensor circuit for 0.5 seconds (1 trip detection logic)	• Short in IAT sensor circuit • IAT sensor (built into MAF meter) • ECM
P0113	Open in IAT sensor circuit for 0.5 seconds (1 trip detection logic)	• Open in IAT sensor circuit • IAT sensor (built into MAF meter) • ECM

HINT:
When any of these DTCs are set, check the IAT by selecting the following menu items on the intelligent tester: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / INTAKE AIR.

Temperature Displayed	Malfunctions
-40°C (-40°F)	Open circuit
140°C (284°F) or higher	Short circuit

MONITOR DESCRIPTION

The ECM monitors the sensor voltage and uses this value to calculate the IAT. When the sensor output voltage deviates from the normal operating range, the ECM interprets this as a malfunction in the IAT sensor and sets a DTC.
Example:
If the sensor output voltage is more than 4.91 V for 0.5 seconds or more, the ECM determines that there is an open in the IAT sensor circuit, and sets DTC P0113. Conversely, if the output voltage is less than 0.18 V for 0.5 seconds or more, the ECM determines that there is a short in the sensor circuit, and sets DTC P0112.
If the malfunction is not repaired successfully, a DTC is set 0.5 seconds after the engine is next started.

MONITOR STRATEGY

Related DTCs	P0110: IAT sensor range check (Fluctuating) P0112: IAT sensor range check (Low voltage) P0113: IAT sensor range check (High voltage)
Required Sensors/Components (Main)	IAT sensor
Required Sensors/Components (Related)	-
Frequency of Operation	Continuous
Duration	0.5 seconds
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None

TYPICAL MALFUNCTION THRESHOLDS

P0110:

IAT sensor voltage	Less than 0.18 V, or more than 4.91 V

P0112:

IAT sensor voltage [IAT]	Less than 0.18 V [More than 140°C (284°F)]


P0113:

IAT sensor voltage [IAT]	More than 4.91 V [Less than -40°C (-40°F)]

COMPONENT OPERATING RANGE

IAT sensor voltage [IAT]	0.18 to 4.91 V [-40°C to 140°C (-40°F to 284°F)]

WIRING DIAGRAM

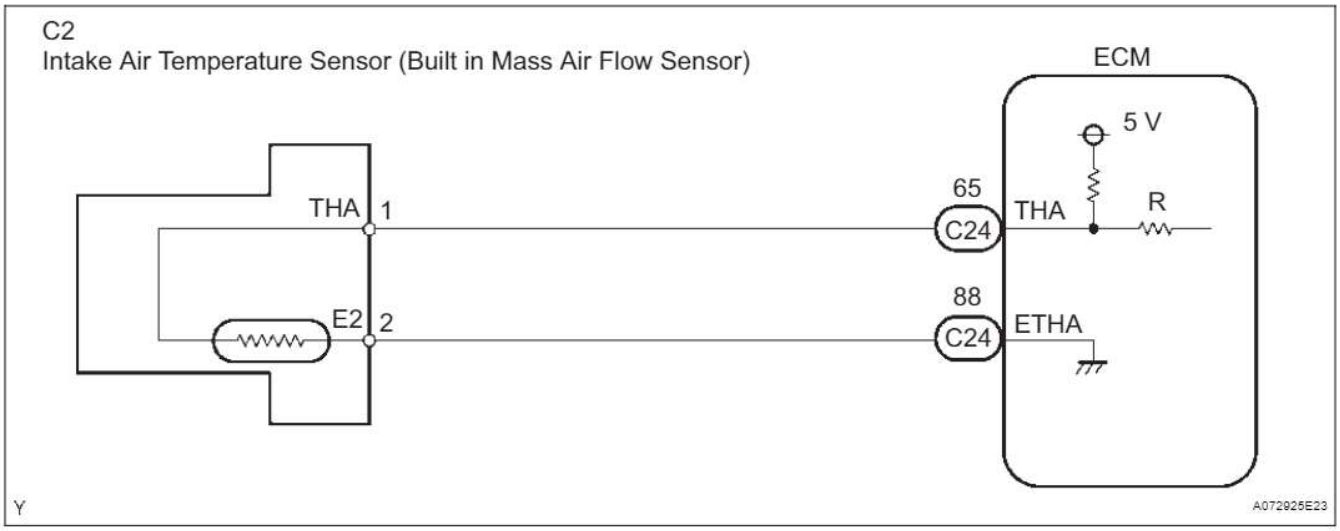

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	READ OUTPUT DTC

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the intelligent tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(d) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P0110	A
P0112	B
P0113	C

B → Go to step 5

C → Go to step 3

A

2	READ VALUE USING INTELLIGENT TESTER (INTAKE AIR TEMPERATURE)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.

(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / INTAKE AIR.
(e) Read the value displayed on the tester.
Standard:
Same as actual Intake Air Temperature (IAT).

Result

Temperature Displayed	Proceed to
-40°C (-40°F)	A
140°C (284°F) or higher	B
Same as actual IAT	C

HINT:
- If there is an open circuit, the intelligent tester indicates -40°C (-40°F).
- If there is a short circuit, the intelligent tester indicates 140°C (284°F) or higher.


ES

B → Go to step 5

C → CHECK FOR INTERMITTENT PROBLEMS

A

3 READ VALUE USING INTELLIGENT TESTER (CHECK FOR OPEN IN WIRE HARNESS)

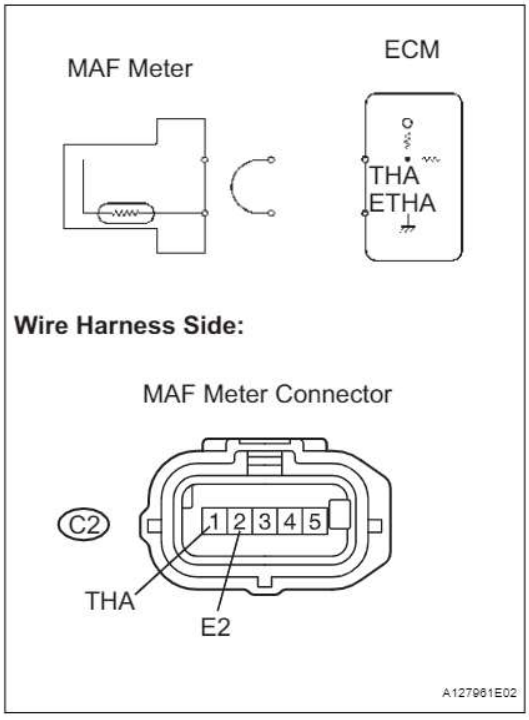


(a) Disconnect the C2 Mass Air Flow (MAF) meter connector.
(b) Connect terminals THA and E2 of the MAF meter wire harness side connector.
(c) Connect the intelligent tester to the DLC3.
(d) Turn the ignition switch to the ON position.
(e) Turn the tester on.
(f) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / INTAKE AIR.
(g) Read the value displayed on the tester.
Standard value:
140°C (284°F) or higher
(h) Reconnect the MAF meter connector.

NG → Go to step 4

OK

CONFIRM GOOD CONNECTION TO SENSOR. IF OK, REPLACE MASS AIR FLOW METER

4	CHECK HARNESS AND CONNECTOR (MASS AIR FLOW METER - ECM)

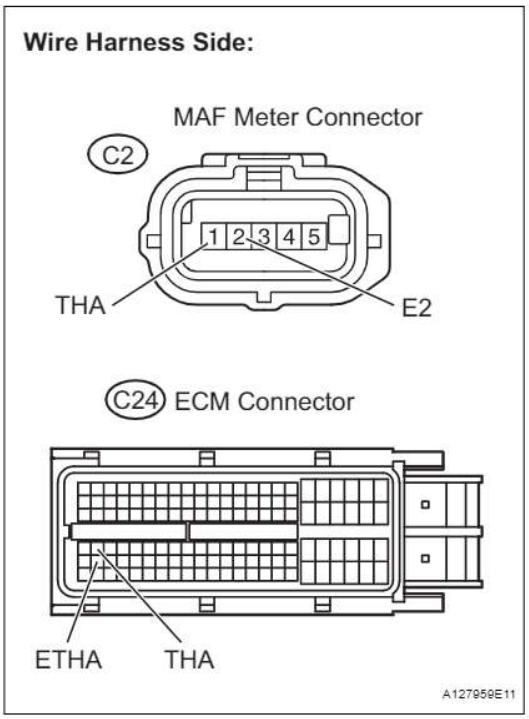

(a) Disconnect the C2 MAF meter connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connector.
Standard resistance

Tester Connection	Specified Condition
C2-1 (THA) - C24-65 (THA)	Below 1 Ω
C2-2 (E2) - C24-88 (ETHA)	Below 1 Ω


(d) Reconnect the MAF meter connector.
(e) Reconnect the ECM connector.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

CONFIRM GOOD CONNECTION TO ECM. IF OK, REPLACE ECM

5	READ VALUE USING INTELLIGENT TESTER (CHECK FOR SHORT IN WIRE HARNESS)

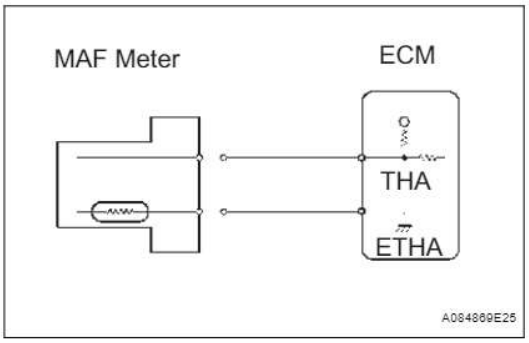


(a) Disconnect the C2 MAF meter connector.
(b) Connect the intelligent tester to the DLC3.
(c) Turn the ignition switch to the ON position.
(d) Turn the tester on.
(e) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / INTAKE AIR.
(f) Read the value displayed on the tester.
Standard value:
-40°C (-40°F)
(g) Reconnect the MAF meter connector.

NG → **Go to step 6**

OK

REPLACE MASS AIR FLOW METER

6	CHECK HARNESS AND CONNECTOR (MASS AIR FLOW METER - ECM)

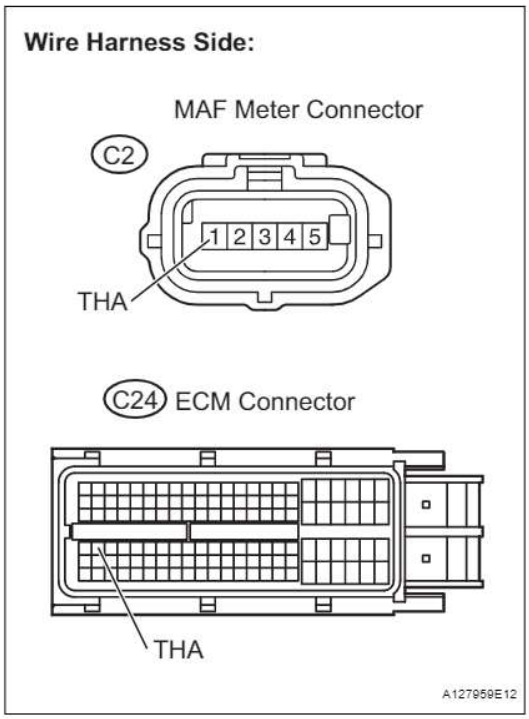

(a) Disconnect the C2 MAF meter connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance

Tester Connection	Specified Condition
C2-1 (THA) or C24-65 (THA) - Body ground	10 kΩ or higher

(d) Reconnect the MAF meter connector.
(e) Reconnect the ECM connector.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**


OK

REPLACE ECM

ES

DTC	P0111	Intake Air Temperature Sensor Gradient Too High

DESCRIPTION

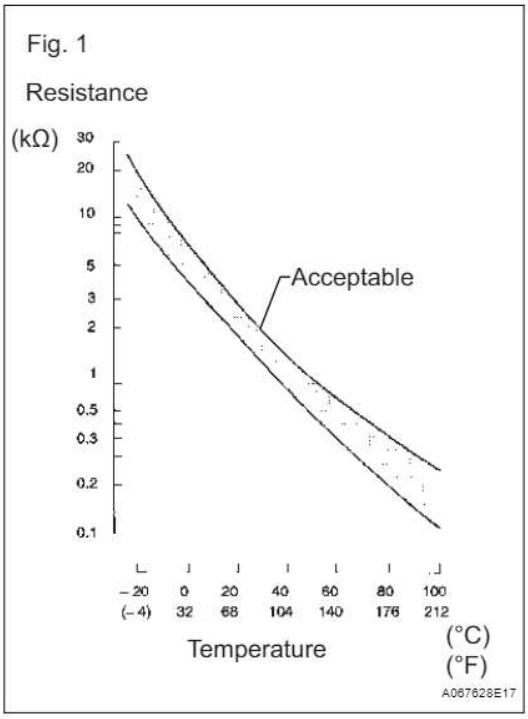

The Intake Air Temperature (IAT) sensor, mounted on the Mass Air Flow (MAF) meter, monitors the IAT. The IAT sensor has a built-in thermistor with a resistance that varies according to the temperature of the intake air. When the IAT becomes low, the resistance of the thermistor increases. When the temperature becomes high, the resistance drops. These variations in resistance are transmitted to the ECM as voltage changes (See Fig. 1).

The IAT sensor is powered by a 5 V supply from the THA terminal of the ECM, via resistor R.

Resistor R and the IAT sensor are connected in series. When the resistance value of the IAT sensor changes, according to changes in the IAT, the voltage at terminal THA also varies. Based on this signal, the ECM increases the fuel injection volume when the engine is cold to improve driveability.

DTC No.	DTC Detection Condition	Trouble Area
P0111	When either condition below is met: 1. The intake air temperature rise is large, from the previous trip warm-up to the following trip. (2 trip detection logic). 2. When the change in the intake air temperature after engine start is less than the threshold value.	Mass air flow meter assembly

MONITOR DESCRIPTION

The ECM performs OBD II monitoring based on the values from the intake air temperature sensor. If there is no change of the sensor value within the normal range, the ECM will not be able to perform OBD II monitoring or will misdiagnose that there is a malfunction in the sensor. The ECM detects the stuck intake air temperature sensor value by performing monitoring after the ignition switch is turned off or the engine is started (short soak or long soak).

MONITOR STRATEGY

Related DTCs	P0111: Intake air temperature sensor rationality (After engine stop) P0111: Intake air temperature sensor rationality (After cold engine start)
Required Sensors/Components (Main)	Intake Air Temperature (IAT) sensor
Required Sensors/Components (Sub)	-
Frequency of Operation	Once per driving cycle
Duration	5 hours or more
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

All:

Monitor runs whenever following DTCs are not present	None

After engine stop:

Time after engine start	10 seconds or more
Battery voltage	10.5 V or more
ECT sensor circuit	OK
ECT change since engine stopped	Less than 180°C (356°F)
ECT before engine stop	70°C (158°F) or more
Time that MAF is low before engine stop	70 minutes
Accumulated MAF amount before engine stop	Except PZEV: 3,549 g or more PZEV: 2,314 g or more
Key-off duration	30 minutes

After cold engine start:

Key-off duration	5 hours
Time after engine start	10 seconds or more
ECT sensor circuit	OK
ECT	70°C (158°F) or more
Accumulated MAF amount	Except PZEV: 3,549 g or more PZEV: 2,314 g or more
One of the following conditions 1 or 2 is met:	-
1. Duration while engine load is low	120 seconds or more
2. Duration while engine load is high	10 seconds or more

TYPICAL MALFUNCTION THRESHOLDS

After engine stop:

IAT change	Less than 1°C (2°F)

After cold engine start:

IAT change	Less than 1°C (2°F)

WIRING DIAGRAM

Refer to DTC P0110 (See page ES-99).

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P0111)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Enter the following menus: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

ES

Result

Display (DTC Output)	Proceed to
P0111 and other DTCs	A
P0111	B

HINT:
If any DTCs other than P0111 are output, troubleshoot those DTCs first.

B → REPLACE MASS AIR FLOW METER

A → GO TO DTC CHART

DTC	P0115	Engine Coolant Temperature Circuit Malfunction

DTC	P0117	Engine Coolant Temperature Circuit Low Input

DTC	P0118	Engine Coolant Temperature Circuit High Input

DESCRIPTION

A thermistor, whose resistance value varies according to the ECT, is built into the Engine Coolant Temperature (ECT) sensor.
The structure of the sensor and its connection to the ECM are the same as those of the Intake Air Temperature (IAT) sensor.
HINT:
When any of DTCs P0115, P0117 and P0118 are set, the ECM enters fail-safe mode. During fail-safe mode, the ECT is estimated to be 80°C (176°F) by the ECM. Fail-safe mode continues until a pass condition is detected.

ES

DTC No.	DTC Detection Condition	Trouble Area
P0115	Open or short in ECT sensor circuit for 0.5 seconds (1 trip detection logic)	• Open or short in ECT sensor circuit • ECT sensor • ECM
P0117	Short in ECT sensor circuit for 0.5 seconds (1 trip detection logic)	• Short in ECT sensor circuit • ECT sensor • ECM
P0118	Open in ECT sensor circuit for 0.5 seconds (1 trip detection logic)	• Open in ECT sensor circuit • ECT sensor • ECM

HINT:
When any of these DTCs are set, check the ECT by selecting the following menu items on the intelligent tester: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / COOLANT TEMP.

Temperature Displayed	Malfunctions
-40°C (-40°F)	Open circuit
140°C (284°F) or higher	Short circuit

MONITOR DESCRIPTION

The Engine Coolant Temperature (ECT) sensor is used to monitor the ECT. The ECT sensor has a thermistor with a resistance that varies according to the temperature of the engine coolant. When the coolant temperature becomes low, the resistance in the thermistor increases. When the temperature becomes high, the resistance drops. These variations in resistance are reflected in the output voltage from the sensor. The ECM monitors the sensor voltage and uses this value to calculate the ECT. When the sensor output voltage deviates from the normal operating range, the ECM interprets this as a fault in the ECT sensor and sets a DTC.
Example:
If the sensor output voltage is more than 4.91 V for 0.5 seconds or more, the ECM determines that there is an open in the ECT sensor circuit, and sets DTC P0118. Conversely, if the voltage output is less than 0.14 V for 0.5 seconds or more, the ECM determines that there is a short in the sensor circuit, and sets DTC P0117.
If the malfunction is not repaired successfully, a DTC is set 0.5 seconds after the engine is next started.

MONITOR STRATEGY

Related DTCs	P0115: ECT sensor range check (Fluctuating) P0117: ECT sensor range check (Low voltage) P0118: ECT sensor range check (High voltage)
Required Sensors/Components (Main)	ECT sensor
Required Sensors/Components (Related)	-
Frequency of Operation	Continuous
Duration	0.5 seconds
MIL Operation	Immediate
Sequence of Operation	None

ES

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None

TYPICAL MALFUNCTION THRESHOLDS

P0115:

ECT sensor voltage	Less than 0.14 V, or more than 4.91 V

P0117:

ECT sensor voltage [ECT]	Less than 0.14 V [More than 140°C (284°F)]


P0118:

ECT sensor voltage [ECT]	More than 4.91 V [Less than -40°C (-40°F)]

COMPONENT OPERATING RANGE

ECT sensor voltage [ECT]	0.14 to 4.91 V [-40°C to 140°C (-40°F to 284°F)]

WIRING DIAGRAM

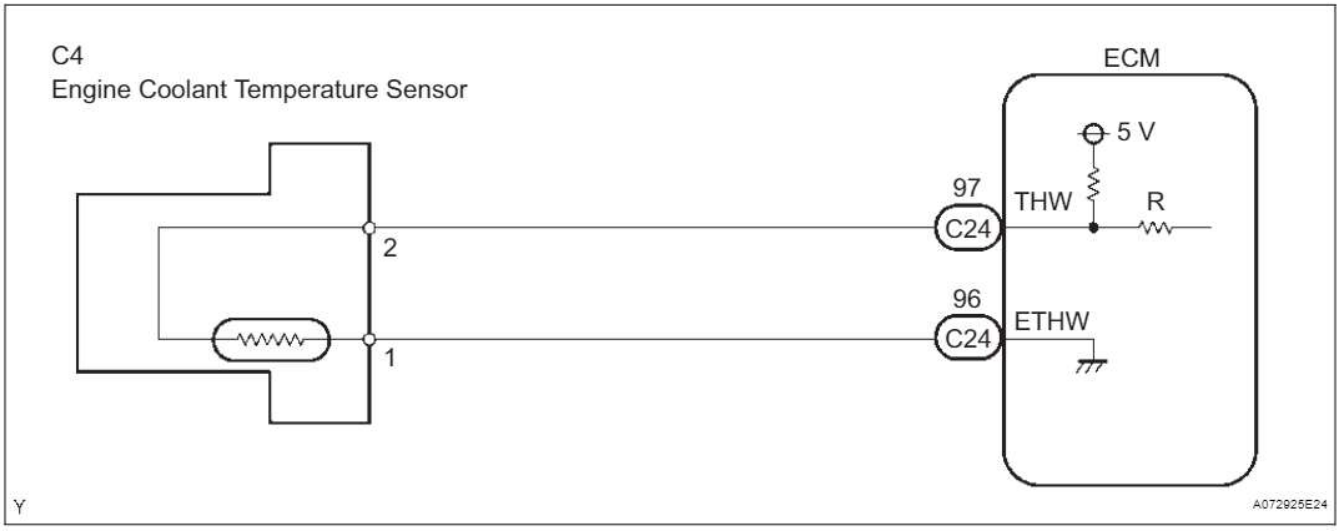

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	READ OUTPUT DTC

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the intelligent tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(d) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P0115	A
P0117	B
P0118	C

B → Go to step 5

C → Go to step 3

A

2	READ VALUE USING INTELLIGENT TESTER (ENGINE COOLANT TEMPERATURE)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / COOLANT TEMP.
(e) Read the value displayed on the tester.

Standard value:
Between 80°C and 100°C (176°F and 212°F) with warm engine.

Result

Temperature Displayed	Proceed to
-40°C (-40°F)	A
140°C (284°F) or higher	B
Between 80°C and 100°C (176°F and 212°F)	C


HINT:
- If there is an open circuit, the intelligent tester indicates -40°C (-40°F).
- If there is a short circuit, the intelligent tester indicates 140°C (284°F) or higher.

B → Go to step 5

C → CHECK FOR INTERMITTENT PROBLEMS

A

3 READ VALUE USING INTELLIGENT TESTER (CHECK FOR OPEN IN WIRE HARNESS)

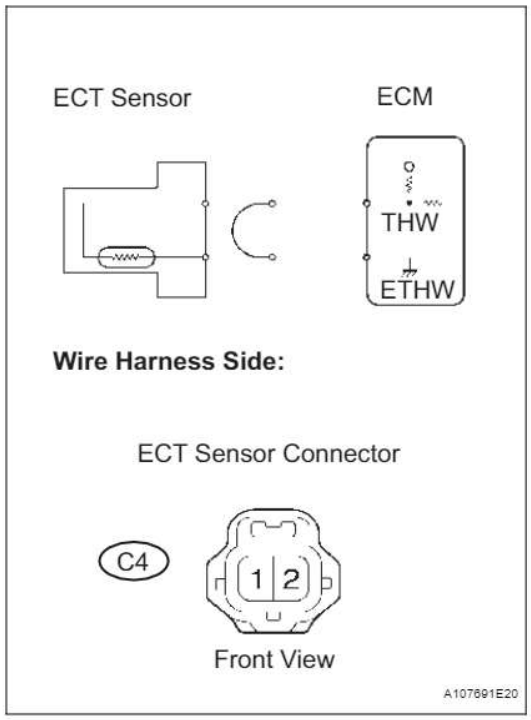


(a) Disconnect the C4 Engine Coolant Temperature (ECT) sensor connector.
(b) Connect terminals 1 and 2 of the ECT sensor connector on the wire harness side.
(c) Connect the intelligent tester to the DLC3.
(d) Turn the ignition switch to the ON position.
(e) Turn the tester on.
(f) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / COOLANT TEMP.
(g) Read the value displayed on the tester.
Standard value:
140°C (284°F) or higher.
(h) Reconnect the ECT sensor connector.

NG → **Go to step 4**

OK

CONFIRM GOOD CONNECTION TO SENSOR. IF OK, REPLACE ENGINE COOLANT TEMPERATURE SENSOR

4	CHECK HARNESS AND CONNECTOR (ENGINE COOLANT TEMPERATURE SENSOR - ECM)

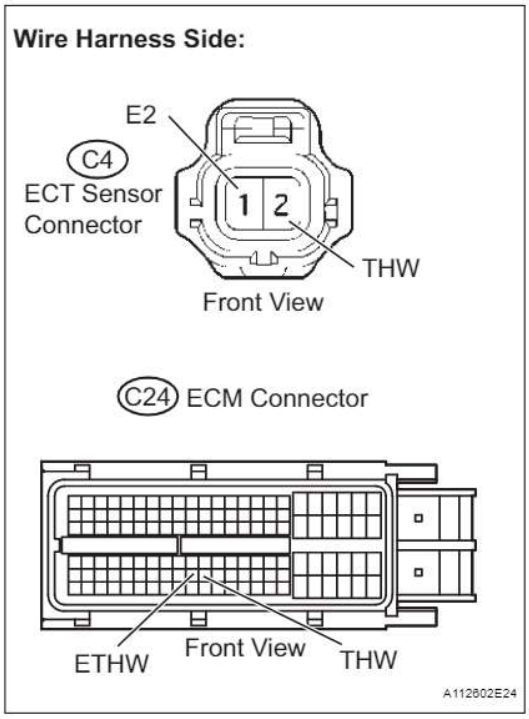

(a) Disconnect the C4 ECT sensor connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.
Standard resistance

Tester Connection	Specified Condition
C4-2 (THW) - C24-97 (THW)	Below 1 Ω
C4-1 (E2) - C24-96 (ETHW)	Below 1 Ω


(d) Reconnect the ECT sensor connector.
(e) Reconnect the ECM connector.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

CONFIRM GOOD CONNECTION TO ECM. IF OK, REPLACE ECM

5	READ VALUE USING INTELLIGENT TESTER (CHECK FOR SHORT IN WIRE HARNESS)

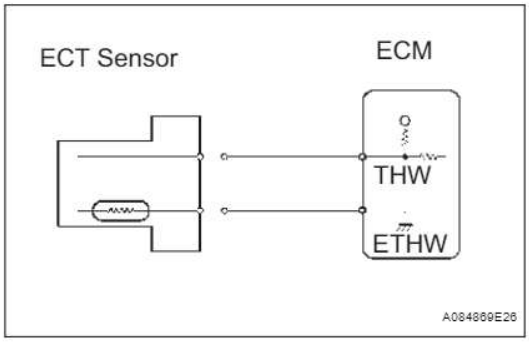


(a) Disconnect the C4 ECT sensor connector.
(b) Connect the intelligent tester to the DLC3.
(c) Turn the ignition switch to the ON position.
(d) Turn the tester on.
(e) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / COOLANT TEMP.
(f) Read the value displayed on the tester.
Standard value:
-40°C (-40°F)
(g) Reconnect the ECT sensor connector.

NG → **Go to step 6**

OK

REPLACE ENGINE COOLANT TEMPERATURE SENSOR

6	CHECK HARNESS AND CONNECTOR (ENGINE COOLANT TEMPERATURE SENSOR - ECM)

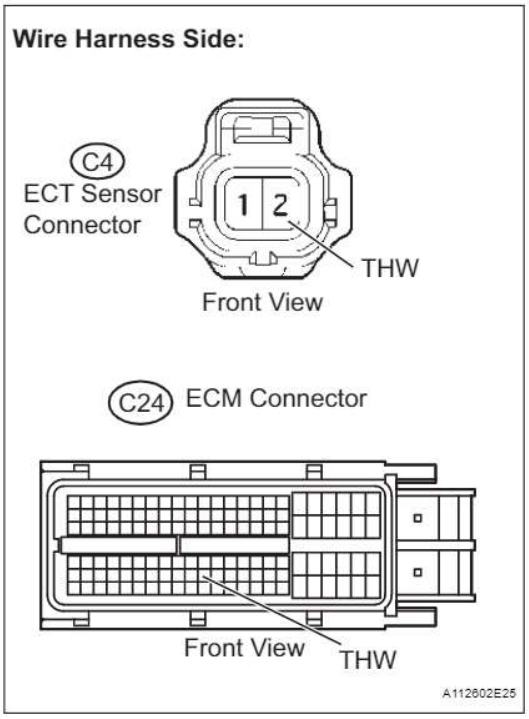

(a) Disconnect the C4 ECT sensor connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance

Tester Connection	Specified Condition
C4-2 (THW) or C24-97 (THW) - Body ground	10 kΩ or higher

(d) Reconnect the ECT sensor connector.
(e) Reconnect the ECM connector.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

REPLACE ECM

DTC	P0116	Engine Coolant Temperature Circuit Range / Performance Problem

DESCRIPTION

Refer to DTC P0115 (See page ES-108).

DTC No.	DTC Detection Condition	Trouble Area
P0116	When either of following conditions is met (2 trip detection logic): • When cold engine started and engine warmed up, Engine Coolant Temperature (ECT) sensor value does not change. • After engine is warmed up, ECT sensor value does not change when engine stopped and then next cold engine start is performed.	• Thermostat • ECT sensor

ES

MONITOR DESCRIPTION

Engine coolant temperature (ECT) sensor cold start monitor

When a cold engine start is performed and then the engine is warmed up, if the ECT sensor value does not change, it is determined that a malfunction has occurred. If this is detected in 2 consecutive driving cycles, the MIL is illuminated and a DTC is set.

ECT sensor soak monitor

After a warmed up engine is started, if the ECT sensor value does not change when the engine is stopped and then the next cold engine start is performed, it is determined that a malfunction has occurred. If this is detected in 2 consecutive driving cycles, the MIL is illuminated and a DTC is set.

MONITOR STRATEGY

Related DTCs	P0116: Engine coolant temperature (ECT) sensor cold start monitor P0116: ECT sensor soak monitor
Required Sensors/Components (Main)	ECT sensor
Required Sensors/Components (Related)	None
Frequency of Operation	Once per driving cycle
Duration	5 hours or more
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

ECT Sensor cold start monitor:

Monitor runs whenever following DTCs are not present	P0100 to P0103: Mass Air Flow (MAF) meter
Battery voltage	10.5 V or more
Time after engine start	1 second or more
ECT at engine start	Less than 60°C (140°F)
IAT sensor circuit	OK
Soak time	5 hours or more
Accumulated MAF	Except PZEV: 621.76 g or more PZEV: 608 g or more
Engine	Running
Fuel cut	OFF
Difference between ECT at engine start and IAT	Less than 40°C (72°F)

ECT Sensor soak monitor:

Monitor runs whenever following DTCs not present	P0100 to P0103: MAF meter P0110 to P0113: IAT sensor

Battery voltage	10.5 V or more
Engine	Running
Soak time	5 hours or more
Either of the following conditions (a) or (b) is met	-
(a) ECT	60°C (140°F) or more
(b) Accumulated MAF	Except PZEV: 1,021.88 g or more PZEV: 947 g or more

TYPICAL MALFUNCTION THRESHOLDS

ECT Sensor cold start monitor:

ECT sensor value change	Less than 5°C (9°F)

ECT Sensor soak monitor:

Difference between current ECT sensor value and previous ECT sensor value when engine stopped	Less than 5°C (9°F)

COMPONENT OPERATING RANGE

ECT	ECT sensor value changes in accordance with actual ECT

INSPECTION PROCEDURE

HINT:

- If any of DTCs P0115, P0117, P0118 or P0125 are set simultaneously with DTC P0116, the ECT sensor may have an open or a short circuit. Troubleshoot those DTCs first.
- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1 CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P0116)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P0116	A
P0116 and other DTCs	B

B → GO TO DTC CHART

A

2 INSPECT THERMOSTAT

(a) Remove the thermostat (See page CO-12).
(b) Measure the valve opening temperature of the thermostat.

Standard value:
80°C to 84°C (176°F to 183°F)
HINT:
In addition to the above check, confirm that the valve is completely closed when the temperature is below the standard.

(c) Reinstall the thermostat (See page CO-13).

NG → **REPLACE THERMOSTAT**

OK

REPLACE ENGINE COOLANT TEMPERATURE SENSOR

ES


DTC	P0120	Throttle / Pedal Position Sensor / Switch "A" Circuit Malfunction
DTC	P0122	Throttle / Pedal Position Sensor / Switch "A" Circuit Low Input
DTC	P0123	Throttle / Pedal Position Sensor / Switch "A" Circuit High Input
DTC	P0220	Throttle / Pedal Position Sensor / Switch "B" Circuit
DTC	P0222	Throttle / Pedal Position Sensor / Switch "B" Circuit Low Input
DTC	P0223	Throttle / Pedal Position Sensor / Switch "B" Circuit High Input
DTC	P2135	Throttle / Pedal Position Sensor / Switch "A" / "B" Voltage Correlation

ES

HINT:
These DTCs relate to the Throttle Position (TP) sensor.

DESCRIPTION

The TP sensor is mounted on the throttle body, and detects the opening angle of the throttle valve. This sensor is a non-contact type. It uses Hall-effect elements in order to yield accurate signals even in extreme driving conditions, such as at high speeds as well as very low speeds.
The TP sensor has two sensor circuits which each transmits a signal, VTA1 and VTA2. VTA1 is used to detect the throttle valve angle and VTA2 is used to detect malfunctions in VTA1. The sensor signal voltages vary between 0 V and 5 V in proportion to the throttle valve opening angle, and are transmitted to the VTA terminals of the ECM.
As the valve closes, the sensor output voltage decreases and as the valve opens, the sensor output voltage increases. The ECM calculates the throttle valve opening angle according to these signals and controls the throttle actuator in response to driver inputs. These signals are also used in calculations such as air-fuel ratio correction, power increase correction and fuel-cut control.

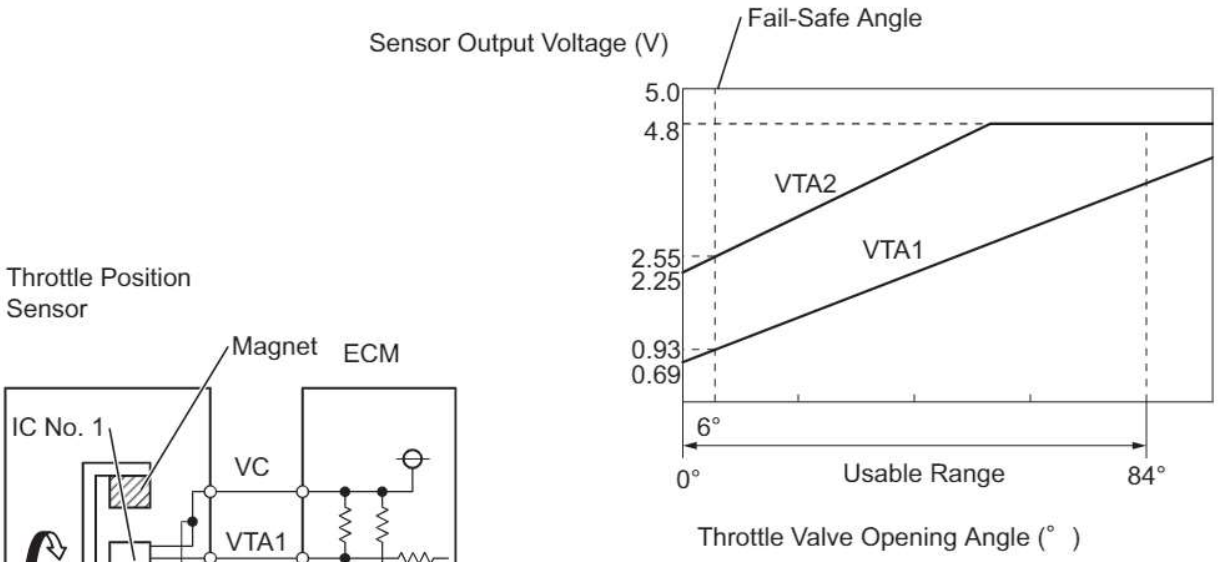

Note:

The throttle valve opening angle detected by the sensor terminal VTA1 is expressed as a percentage.

Between 10 % and 22 %: Throttle valve fully closed

Between 66 % and 98 %: Throttle valve fully open

Approximately 19 %: Fail-safe angle (6°)

A122493E04

DTC No.	DTC Detection Condition	Trouble Area
P0120	Output voltage of VTA1 quickly fluctuates beyond lower and upper malfunction thresholds for 2 seconds when accelerator pedal depressed (1 trip detection logic)	• Throttle Position (TP) sensor (built into throttle body) • ECM
P0122	Output voltage of VTA1 0.2 V or less for 2 seconds when accelerator pedal depressed (1 trip detection logic)	• TP sensor (built into throttle body) • Short in VTA1 circuit • Open in VC circuit • ECM
P0123	Output voltage of VTA1 4.535 V or more for 2 seconds when accelerator pedal depressed (1 trip detection logic)	• TP sensor (built into throttle body) • Open in VTA1 circuit • Open in E2 circuit • Short between VC and VTA1 circuits • ECM
P0220	Output voltage of VTA2 quickly fluctuates beyond lower and upper malfunction thresholds for 2 seconds when accelerator pedal depressed (1 trip detection logic)	• TP sensor (built into throttle body) • ECM

DTC No.	DTC Detection Condition	Trouble Area
P0222	Output voltage of VTA2 1.75 V or less for 2 seconds when accelerator pedal depressed (1 trip detection logic)	• TP sensor (built into throttle body) • Short in VTA2 circuit • Open in VC circuit • ECM
P0223	Output voltage of VTA2 4.8 V or more, and VTA1 between 0.2 V and 2.02 V for 2 seconds when accelerator pedal depressed (1 trip detection logic)	• TP sensor (built into throttle body) • Open in VTA2 circuit • Open in E2 circuit • Short between VC and VTA2 circuits • ECM
P2135	Either condition (a) or (b) is met (1 trip detection logic): (a) Difference between output voltages of VTA1 and VTA2 0.02 V or less for 0.5 seconds or more (b) Output voltage of VTA1 0.2 V or less, and VTA2 1.75 V or less, for 0.4 seconds or more	• Short between VTA1 and VTA2 circuits • TP sensor (built into throttle body) • ECM

ES

HINT:

- When any of these DTCs are set, check the throttle valve opening angle by selecting the following menu items on the intelligent tester: DIAGNOSIS / ENHANCED OBD II / DATA LIST / ETCS / THROTTLE POS #1 AND THROTTLE POS #2.
- THROTTLE POS #1 denotes the VTA1 signal, and THROTTLE POS #2 denotes the VTA2 signal.

Reference (Normal Condition):

Tester Display	Accelerator Pedal Fully Released	Accelerator Pedal Fully Depressed
THROTTLE POS #1	0.5 to 1.1 V	3.3 to 4.9 V
THROTTLE POS #2	2.1 to 3.1 V	4.6 to 5.0 V

MONITOR DESCRIPTION

The ECM uses the Throttle Position (TP) sensor to monitor the throttle valve opening angle. There are several checks that the ECM performs to confirm the proper operation of the TP sensor.

- A specific voltage difference is expected between the sensor terminals, VTA1 and VTA2, for each throttle valve opening angle. If the difference between VTA1 and VTA2 is incorrect, the ECM interprets this as a malfunction in the sensor, and sets a DTC.
- VTA1 and VTA2 each have a specific voltage range. If VTA1 or VTA2 is outside the normal operating range, the ECM interprets this as a malfunction in the sensor, and sets a DTC.
- VTA1 and VTA2 should never be close to the same voltage level. If VTA1 is within 0.02 V of VTA2, the ECM determines that there is a short circuit in the sensor, and sets a DTC.

If the malfunction is not repaired successfully, a DTC is set 10 seconds after the engine is next started.

MONITOR STRATEGY

Related DTCs	P0120: Throttle position sensor 1 range check (Fluctuating) P0122: Throttle position sensor 1 range check (Low voltage) P0123: Throttle position sensor 1 range check (High voltage) P0220: Throttle position sensor 2 range check (Fluctuating) P0222: Throttle position sensor 2 range check (Low voltage) P0223: Throttle position sensor 2 range check (High voltage) P2135: Throttle position sensor range check (Correlation)
Required Sensors/Components (Main)	Throttle position sensor
Required Sensors/Components (Related)	-
Frequency of Operation	Continuous
Duration	2 seconds: P0120, P0122, P0123, P0220, P0222 and P0223 (Accelerator pedal ON) 10 seconds: P0120, P0122, P0123, P0220, P0222 and P0223 (Accelerator pedal OFF) 0.5 seconds: P2135 Case 1 0.4 seconds: P2135 Case 2
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None
Electronic throttle actuator power	ON

TYPICAL MALFUNCTION THRESHOLDS

P0120:

VTA1 voltage	0.2 V or less, or 4.535 V or more

P0122:

VTA1 voltage	0.2 V or less

P0123:

VTA1 voltage	4.535 V or more

P0220:

VTA2 voltage	1.75 V or less, or 4.8 V or more

P0222:

VTA2 voltage	1.75 V or less

P0223:

VTA2 voltage when VTA1 voltage is 0.2 V or more, and 2.02 V or less	4.8 V or more

P2135 Case 1:

Difference between VTA1 and VTA2 voltages	0.02 V or less

P2135 Case 2:

VTA1 voltage	0.2 V or less
VTA2 voltage	1.75 V or less


COMPONENT OPERATING RANGE

VTA1 voltage	0.69 to 4.05 V
VTA2 voltage	2.25 to 4.8 V

FAIL-SAFE

When any of these DTCs, as well as other DTCs relating to ETCS (Electronic Throttle Control System) malfunctions, are set, the ECM enters fail-safe mode. During fail-safe mode, the ECM cuts the current to the throttle actuator off, and the throttle valve is returned to a 6° throttle angle by the return spring. The ECM then adjusts the engine output by controlling the fuel injection (intermittent fuel-cut) and ignition timing, in accordance with the accelerator pedal opening angle, to allow the vehicle to continue at a minimal speed. If the accelerator pedal is depressed gently, the vehicle can be driven slowly.
Fail-safe mode continues until a pass condition is detected, and the ignition switch is then turned off.

WIRING DIAGRAM

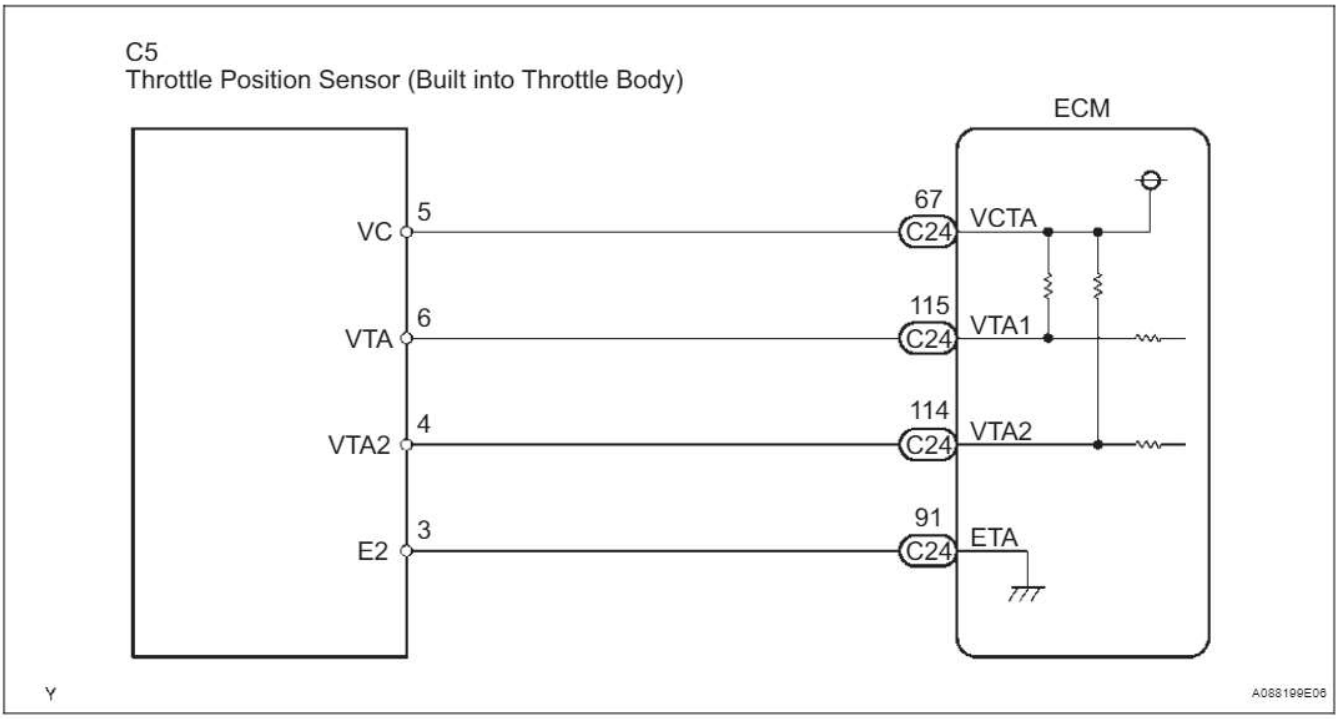

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	READ VALUE USING INTELLIGENT TESTER (THROTTLE POS #1 AND THROTTLE POS #2)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / ETCS / THROTTLE POS #1 and THROTTLE POS #2.
(d) Check the values displayed on the tester.

Result


TP#1 (VTA1) When Accelerator Pedal Released	TP#2 (VTA2) When Accelerator Pedal Released	TP#1 (VTA1) When Accelerator Pedal Depressed	TP#2 (VTA2) When Accelerator Pedal Depressed	Trouble Area	Proceed to
0 V to 0.2 V	0 V to 0.2 V	0 V to 0.2 V	0 V to 0.2 V	VC circuit open	A
4.5 V to 5.0 V	4.5 V to 5.0 V	4.5 V to 5.0 V	4.5 V to 5.0 V	E2 circuit open	
0 V to 0.2 V, or 4.5 V to 5.0 V	2.4 V to 3.4 V (Fail-safe)	0 V to 0.2 V, or 4.5 V to 5.0 V	2.4 V to 3.4 V (Fail-safe)	VTA1 circuit open or ground short	
0.7 V to 1.3 V (Fail-safe)	0 V to 0.2 V, or 4.5 V to 5.0 V	0.7 V to 1.3 V (Fail-safe)	0 V to 0.2 V, or 4.5 V to 5.0 V	VTA2 circuit open or ground short	
0.5 V to 1.1 V	2.1 V to 3.1 V	3.3 V to 4.9 V (Not fail-safe)	4.6 V to 5.0 V (Not fail-safe)	TP sensor circuit normal	B

HINT:
TP#1 denotes THROTTLE POS #1, and TP#2 denotes THROTTLE POS #2.

B → Go to step 5

A

2 CHECK HARNESS AND CONNECTOR (THROTTLE POSITION SENSOR - ECM)

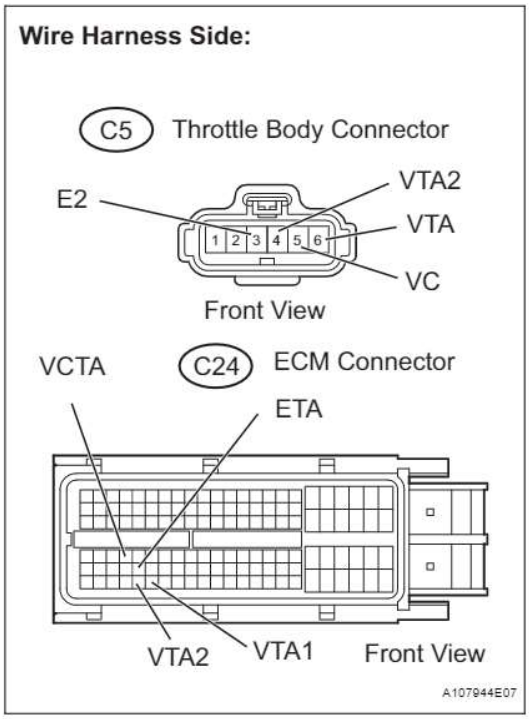

(a) Disconnect the C5 throttle body connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)

Tester Connection	Specified Condition
C5-5 (VC) - C24-67 (VCTA)	Below 1 Ω
C5-6 (VTA) - C24-115 (VTA1)	Below 1 Ω
C5-4 (VTA2) - C24-114 (VTA2)	Below 1 Ω
C5-3 (E2) - C24-91 (ETA)	Below 1 Ω

Standard resistance (Check for short)


Tester Connection	Specified Condition
C5-5 (VC) or C24-67 (VCTA) - Body ground	10 kΩ or higher
C5-6 (VTA) or C24-115 (VTA1) - Body ground	10 kΩ or higher
C5-4 (VTA2) or C24-114 (VTA2) - Body ground	10 kΩ or higher

(d) Reconnect the throttle body connector.
(e) Reconnect the ECM connector.

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

3 INSPECT ECM (VC VOLTAGE)

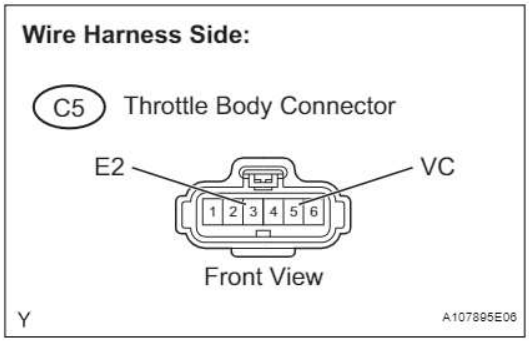

(a) Disconnect the C5 throttle body connector.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage between the terminals of the throttle body connector.

Standard voltage

Tester Connection	Specified Condition
C5-5 (VC) - C5-3 (E2)	4.5 to 5.5 V

(d) Reconnect the throttle body connector.

NG → REPLACE ECM

OK

4	REPLACE THROTTLE BODY ASSEMBLY

NEXT

5	CHECK WHETHER DTC OUTPUT RECURS (THROTTLE POSITION SENSOR DTCS)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Clear the DTCs (See page ES-38).
(d) Start the engine.
(e) Allow the engine to idle for 15 seconds or more.
(f) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(g) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P0120, P0122, P0123, P0220, P0222, P0223, and/or P2135	A
No output	B

B → SYSTEM OK

A

REPLACE ECM

DTC	P0121	Throttle / Pedal Position Sensor / Switch "A" Circuit Range / Performance Problem

HINT:
This DTC relates to the Throttle Position (TP) sensor.

DESCRIPTION

Refer to DTC P0120 (See page ES-117).

DTC No.	DTC Detection Condition	Trouble Area
P0121	Difference between VTA1 and VTA2 voltages less than 0.8 V, or more than 1.6 V for 2 seconds (1 trip detection logic)	TP sensor (built into throttle body)

MONITOR DESCRIPTION

The ECM uses the TP sensor to monitor the throttle valve opening angle.
This sensor transmits two signals: VTA1 and VTA2. VTA1 is used to detect the throttle opening angle and VTA2 is used to detect malfunctions in VTA1. The ECM performs several checks to confirm the proper operation of the TP sensor and VTA1.
For each throttle opening angle, a specific voltage difference is expected between the outputs of VTA1 and VTA2. If the output voltage difference between the two signals deviates from the normal operating range, the ECM interprets this as a malfunction of the TP sensor. The ECM illuminates the MIL and sets the DTC.
If the malfunction is not repaired successfully, the DTC is set 2 seconds after the engine is next started.

MONITOR STRATEGY

Related DTCs	P0121: TP sensor rationality
Required Sensors/Components (Main)	TP sensor
Required Sensors/Components (Related)	-
Frequency of Operation	Continuous
Duration	Within 2 seconds
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	P0120 - P0223, P2135 (TP sensor)
Either of the following conditions A or B is met	-
A. Ignition switch	ON
B. Electric throttle motor power	ON
TP sensor malfunction (P0120, P0122, P0123, P0220, P0222, P0223, P2135)	Not detected

TYPICAL MALFUNCTION THRESHOLDS

Either of the following conditions A or B is met	-
Difference of the TP sensor voltage between VTA1 and VTA2 x 0.8	More than 1.6 V
Difference of the TP sensor voltage between VTA1 and VTA2 x 0.8	Less than 0.8 V

FAIL-SAFE

When this DTC, as well as other DTCs relating to ETCS (Electronic Throttle Control System) malfunctions, is set, the ECM enters fail-safe mode. During fail-safe mode, the ECM cuts the current to the throttle actuator off, and the throttle valve is returned to a 6° throttle angle by the return spring. The ECM then adjusts the engine output by controlling the fuel injection (intermittent fuel-cut) and ignition timing, in accordance with the accelerator pedal opening angle, to allow the vehicle to continue at a minimal speed. If the accelerator pedal is depressed gently, the vehicle can be driven slowly.
Fail-safe mode continues until a pass condition is detected, and the ignition switch is then turned off.

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

ES

1	CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P0121)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

Result

Display (DTC output)	Proceed to
P0121	A
P0121 and other DTCs	B

B → GO TO DTC CHART

A → REPLACE THROTTLE BODY ASSEMBLY

DTC	P0125	Insufficient Coolant Temperature for Closed Loop Fuel Control

DESCRIPTION

Refer to DTC P0115 (See page ES-108).

DTC No.	DTC Detection Condition	Trouble Area
P0125	Engine Coolant Temperature (ECT) does not reach closed-loop enabling temperature for 20 minutes (this period varies with engine start ECT) (2 trip detection logic)	• ECT sensor • Cooling system • Thermostat

MONITOR DESCRIPTION

ES

The resistance of the ECT sensor varies in proportion to the actual ECT. The ECT supplies a constant voltage to the sensor and monitors the signal output voltage of the sensor. The signal voltage output varies according to changes in the resistance of the sensor. After the engine is started, the ECT is monitored through this signal. If the ECT sensor indicates that the engine is not yet warm enough for closed-loop fuel control, despite a specified period of time having elapsed since the engine was started, the ECM interprets this as a malfunction in the sensor or cooling system and sets the DTC.
Example:
The ECT is 0°C (32°F) at engine start. After about 1 minute running time, the ECT sensor still indicates that the engine is not warm enough to begin closed-loop fuel (air-fuel ratio feedback) control. The ECM interprets this as a malfunction in the sensor or cooling system and sets the DTC.

MONITOR STRATEGY

Related DTCs	P0125: Insufficient engine coolant temperature for closed-loop fuel control
Required Sensors/Components (Main)	Thermostat, cooling system
Required Sensors/Components (Related)	Engine coolant temperature sensor and mass air flow meter
Frequency of Operation	Once per driving cycle
Duration	Except PZEV: 62.94 seconds or more: Engine coolant temperature at engine start -8.34°C (17°F) or more 135.32 seconds or more: Engine coolant temperature at engine start -8.34 to -19.45°C (17 to -3°F) 20 minutes or more: Engine coolant temperature at engine start less than -19.45°C (-3°F) PZEV: 52.5 seconds or more: Engine coolant temperature at engine start -8.34°C (17°F) or more 97.56 seconds or more: Engine coolant temperature at engine start -8.34 to -19.45°C (17 to -3°F) 20 minutes or more: Engine coolant temperature at engine start less than -19.45°C (-3°F)
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	P0100 - P0103 (MAF meter) P0110 - P0113 (IAT sensor) P0115 - P0118 (ECT sensor)
Thermostat	OK

TYPICAL MALFUNCTION THRESHOLDS

Time until actual engine coolant temperature reaches closed-loop fuel control enabling temperature	Except PZEV: 62.94 seconds or more: Engine coolant temperature at engine start -8.34°C (17°F) or more 135.32 seconds or more: Engine coolant temperature at engine start -8.34 to -19.45°C (17 to -3°F) 20 minutes or more: Engine coolant temperature at engine start less than -19.45°C (-3°F) PZEV: 52.5 seconds or more: Engine coolant temperature at engine start -8.34°C (17°F) or more 97.56 seconds or more: Engine coolant temperature at engine start -8.34 to -19.45°C (17 to -3°F) 20 minutes or more: Engine coolant temperature at engine start less than -19.45°C (-3°F)

ES

WIRING DIAGRAM

Refer to DTC P0115 (See page ES-109).

INSPECTION PROCEDURE

HINT:

- If any of DTCs P0115, P0116, P0117 or P0118 are set simultaneously with DTC P0125, the Engine Coolant Temperature (ECT) sensor may have an open or a short circuit. Troubleshoot those DTCs first.
- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1 CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P0125)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P0125	A
P0125 and other DTCs	B

HINT:
If any DTCs other than P0125 are output, troubleshoot those DTCs first.

B → GO TO DTC CHART

A

2 INSPECT THERMOSTAT

(a) Remove the thermostat (See page CO-12).
(b) Check the valve opening temperature of the thermostat.
Standard value:
80 to 84°C (176 to 183°F)

HINT:
In addition to the above check, confirm that the valve is completely closed when the temperature is below the standard.

(c) Reinstall the thermostat (See page CO-13).

NG → REPLACE THERMOSTAT

OK

3	CHECK COOLING SYSTEM

(a) Check for defects in the cooling system that might cause the system to be too cold, such as abnormal radiator fan operation or any modifications.

NG → REPAIR OR REPLACE COOLING SYSTEM

OK

REPLACE ENGINE COOLANT TEMPERATURE SENSOR

DTC	P0128	Coolant Thermostat (Coolant Temperature Below Thermostat Regulating Temperature)

HINT:
This DTC relates to the thermostat.


DESCRIPTION

This DTC is set when the Engine Coolant Temperature (ECT) does not reach 75°C (167°F) despite sufficient engine warm-up time having elapsed.

DTC No.	DTC Detection Condition	Trouble Area
P0128	Conditions (a), (b) and (c) are met for 5 seconds (2 trip detection logic): (a) Cold start (b) Engine warmed up (c) ECT less than 75°C (167°F)	• Thermostat • Cooling system • ECT sensor • ECM

ES

MONITOR DESCRIPTION

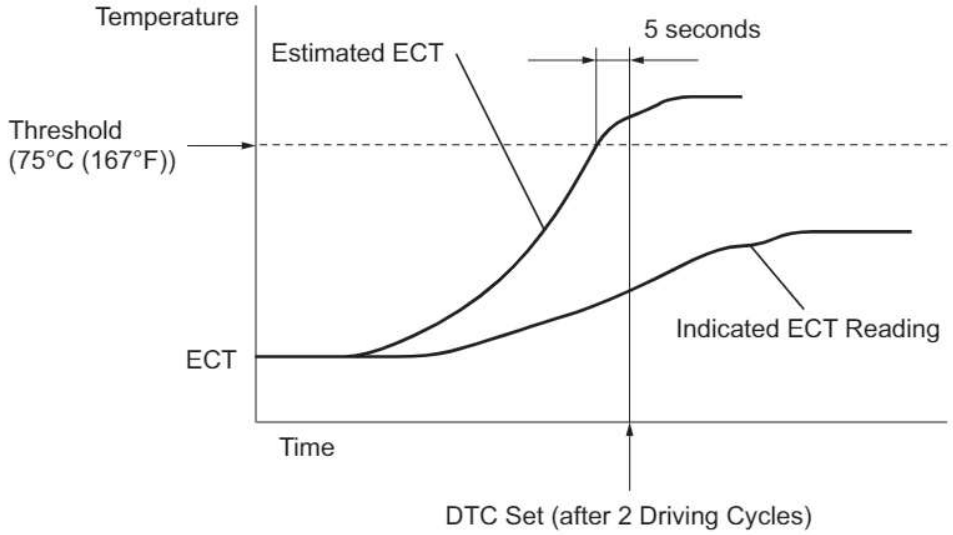

The ECM estimates the ECT based on the starting temperature, engine loads, and engine speeds. The ECM then compares the estimated temperature with the actual ECT. When the estimated ECT reaches 75°C (167°F), the ECM checks the actual ECT. If the actual ECT is less than 75°C (167°F), the ECM interprets this as a malfunction in the thermostat or the engine cooling system and sets the DTC.

MONITOR STRATEGY

Related DTCs	P0128: Coolant Thermostat
Required Sensors/Components (Main)	Thermostat

Required Sensors/Components (Related)	Engine Coolant Temperature (ECT) sensor, Intake Air Temperature (IAT) sensor, Vehicle speed sensor
Frequency of Operation	Once per driving cycle
Duration	450 seconds
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	P0010 (VVT OCV) P0011 (VVT System 1 - Advance) P0012 (VVT System 1 - Retard) P0031, P0032 (A/F sensor heater - Sensor 1) P0100 - P0103 (MAF meter) P0110 - P0113 (IAT sensor) P0115 - P0118 (ECT sensor) P0125 (Insufficient ECT for Closed Loop) P0171, P0172 (Fuel system) P0300 - P0304 (Misfire) P0335 (CKP sensor) P0340 (CMP sensor) P0351 - P0354 (Igniter) P0500 (VSS) P2196 (A/F sensor - rationality) P2A00 (A/F sensor - slow response)
Battery voltage	11 V or more
Either of the following conditions 1 or 2 is met:	-
1. All of the following conditions are met:	-
• ECT at engine start - IAT at engine start	-15 to 7°C (-27 to 12.6°F)
• ECT at engine start	-10 to 56°C (14 to 133°F)
• IAT at engine start	-10 to 56°C (14 to 133°F)
2. All of the following conditions are met:	-
• ECT at engine start - IAT at engine start	More than 7°C (12.6°F)
• ECT at engine start	56°C (133°F) or less
• IAT at engine start	-10°C (14°F) or more
Accumulated time at 80 mph (128 km/h) or more	Less than 20 seconds

TYPICAL MALFUNCTION THRESHOLDS

Duration that both following conditions (a) and (b) are met	5 seconds or more
(a) Estimated ECT	75°C (167°F) or more
(b) ECT sensor output	Below 75°C (167°F)

INSPECTION PROCEDURE

HINT:

Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P0128)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.

(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P0128	A
P0128 and other DTCs	B

HINT:
If any DTCs other than P0128 are output, troubleshoot those DTCs first.

B → GO TO DTC CHART

ES

A

2 CHECK COOLING SYSTEM

(a) Check for defects in the cooling system that might cause the system to be too cold, such as abnormal radiator fan operation or any modifications.

NG → REPAIR OR REPLACE COOLING SYSTEM

OK

3 INSPECT THERMOSTAT

(a) Remove the thermostat (See page CO-12).
(b) Measure the valve opening temperature of the thermostat.
Standard value:
80 to 84°C (176 to 183°F)
HINT:
In addition to the above check, confirm that the valve is completely closed when the temperature is below the standard.
(c) Reinstall the thermostat (See page CO-13).

NG → REPLACE THERMOSTAT

OK


REPLACE ECM

DTC	P0136	Oxygen Sensor Circuit Malfunction (Bank 1 Sensor 2)
DTC	P0137	Oxygen Sensor Circuit Low Voltage (Bank 1 Sensor 2)
DTC	P0138	Oxygen Sensor Circuit High Voltage (Bank 1 Sensor 2)


DESCRIPTION

ES

A three-way catalist converter (TWC) is used in order to convert the carbon monoxide (CO), hydrocarbons (HC), and nitrogen oxide (Nox) into less harmful substrances. To allow the TWC to function effectively, it is necessary to keep the air-fuel ratio of the engine near the stoichiometric air-fuel ratio. For the purpose of helping the ECM to deliver accurate air-fuel ratio control, a Heated Oxygen (HO2) sensor is used.
The HO2 sensor is located behind the TWC, and detects the oxygen concentration in the exhaust gas. Since the sensor is integrated with the heater that heats the sensing portion, it is possible to detect the oxygen concentration even when the intake air volume is low (the exhaust gas temperature is low).
When the air-fuel ratio becomes lean, the oxygen concentration in the exhaust gas is rich. The HO2 sensor informs the ECM that the post-TWC air-fuel ratio is lean (low voltage, i.e. less than 0.45 V). Conversely, when the air-fuel ratio is richer than the stoichiometric air-fuel level, the oxygen concentration in the exhaust gas becomes lean. The HO2 sensor informs the ECM that the post-TWC air-fuel ratio is rich (high voltage, i.e. more than 0.45 V). The HO2 sensor has the property of changing its output voltage drastically when the air-fuel ratio is close to the stoichiometric level.
The ECM uses the supplementary information from the HO2 sensor to determine whether the air-fuel ratio after the TWC is rich or lean, and adjusts the fuel injection time accordingly. Thus, if the HO2 sensor is working improperly due to internal malfunctions, the ECM is unable to compensate for deviations in the primary air-fuel ratio control.

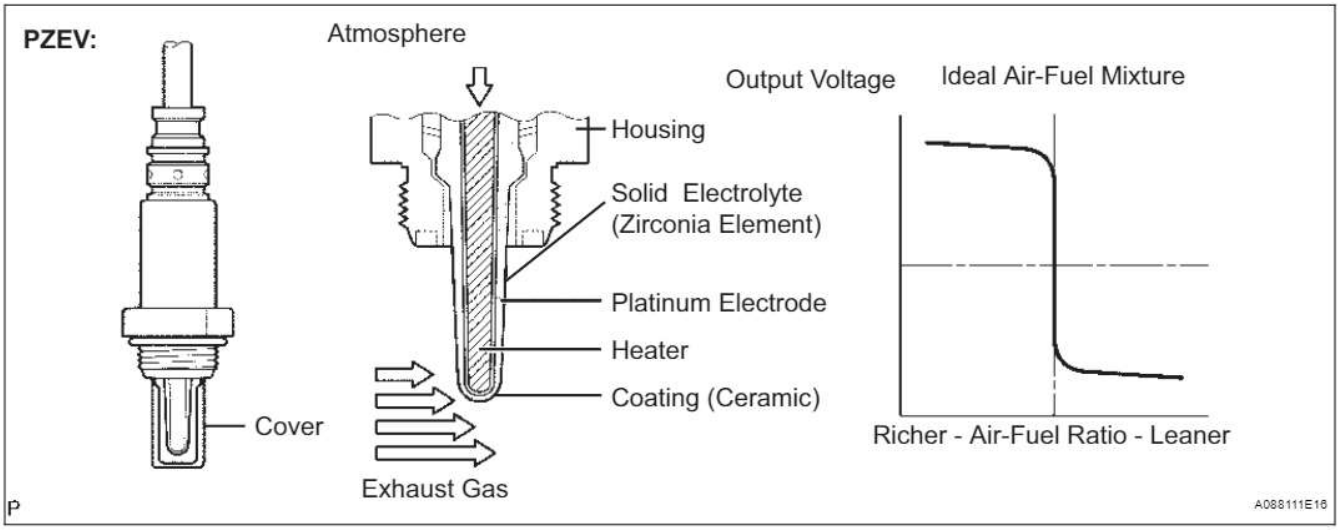

Except PZEV:

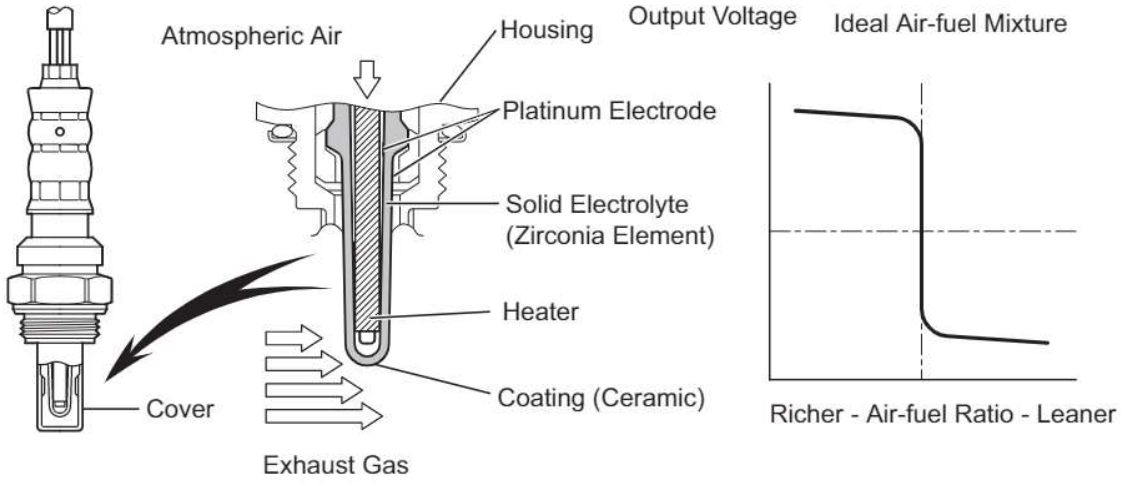

P A131740E06

DTC No.	DTC Detection Condition	Trouble Area
P0136	• Abnormal voltage output: During active air-fuel ratio control, following conditions (a) and (b) are met for a certain period of time (2 trip detection logic): (a) Heated Oxygen (HO2) sensor voltage does not decrease to less than 0.59 V (b) HO2 sensor voltage does not increase to more than 0.21 V • Low impedance: Sensor impedance less than 5 Ω for more than 30 seconds when ECM presumes sensor to be warmed up and operating normally (2 trip detection logic)	• Open or short in HO2 sensor (sensor 2) circuit • HO2 sensor (sensor 2) • HO2 sensor heater (sensor 2) • Air-fuel Ratio (A/F) sensor (sensor 1) • Engine room J/B (EFI relay) • Gas leakage from exhaust system
P0137	• Low voltage (open): During active air-fuel ratio control, following conditions (a) and (b) are met for a certain period of time (2 trip detection logic): (a) HO2 sensor voltage output less than 0.21 V (b) Target air-fuel ratio rich • High impedance: Sensor impedance 15 kΩ or more for more than 90 seconds when ECM presumes sensor to be warmed up and operating normally (2 trip detection logic)	• Open in HO2 sensor (sensor 2) circuit • HO2 sensor (sensor 2) • HO2 sensor heater (sensor 2) • Engine room J/B (EFI relay) • Gas leakage from exhaust system
P0138	• High voltage (short): During active air-fuel ratio control, following conditions (a) and (b) are met for a certain period of time (2 trip detection logic): (a) HO2 sensor voltage output more than 0.59 V (b) Target air-fuel ratio lean • Extremely high voltage (short): HO2 sensor voltage output exceeds 1.2 V for more than 10 seconds (2 trip detection logic)	• Short in HO2 sensor (sensor 2) circuit • HO2 sensor (sensor 2) • ECM internal circuit malfunction

MONITOR DESCRIPTION


Active Air-Fuel Ratio Control:

The ECM usually performs air-fuel ratio feedback control so that the Air-Fuel Ratio (A/F) sensor output indicates a near stoichiometric air-fuel level. This vehicle includes active air-fuel ratio control in addition to regular air-fuel ratio control. The ECM performs active air-fuel ratio control to detect any deterioration in the Three-Way Catalytic Converter (TWC) and Heated Oxygen (HO2) sensor malfunctions (refer to the diagram below).

Active air-fuel ratio control is performed for approximately 15 to 20 seconds while driving with a warm engine. During active air-fuel ratio control, the air-fuel ratio is forcibly regulated to become lean or rich by the ECM. If the ECM detects a malfunction, one of the following DTCs is set: DTC P0136 (abnormal voltage output), P0137 (open circuit) and P0138 (short circuit).

Abnormal Voltage Output of HO2 Sensor (DTC P0136):

While the ECM is performing active air-fuel ratio control, the air-fuel ratio is forcibly regulated to become rich or lean. If the sensor is not functioning properly, the voltage output variation is small. For example, when the HO2 sensor voltage does not decrease to less than 0.21 V and does not increase to more than 0.59 V during active air-fuel ratio control, the ECM determines that the sensor voltage output is abnormal and sets DTC P0136.

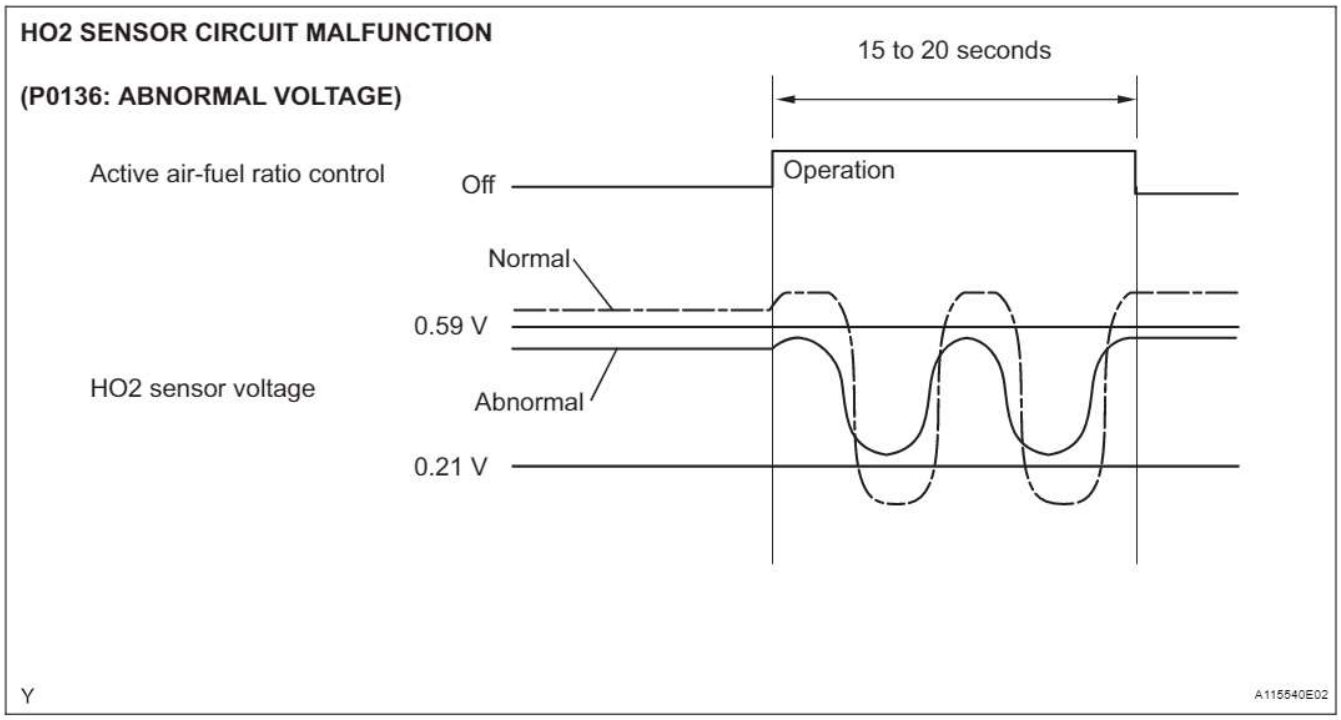

Open or Short in Heated Oxygen (HO2) Sensor Circuit (DTC P0137 or P0138):

During active air-fuel ratio control, the ECM calculates the Oxygen Storage Capacity (OSC)* of the Three-Way Catalytic Converter (TWC) by forcibly regulating the air-fuel ratio to become rich or lean. If the HO2 sensor has an open or short, or the voltage output of the sensor decreases significantly, the OSC indicates an extraordinarily high value. Even if the ECM attempts to continue regulating the air-fuel ratio to become rich or lean, the HO2 sensor output does not change.

While performing active air-fuel ratio control, when the target air-fuel ratio is rich and the HO2 sensor voltage output is 0.21 V or less (lean), the ECM interprets this as an abnormally low sensor output voltage and sets DTC P0137. When the target air-fuel ratio is lean and the voltage output is 0.59 V or more (rich) during active air-fuel ratio control, the ECM determines that the sensor voltage output is abnormally high, and sets DTC P0138.


HINT:

DTC P0138 is also set if the HO2 sensor voltage output is more than 1.2 V for 10 seconds or more.

*: The TWC has the capability to store oxygen. The OSC and the emission purification capacity of the TWC are mutually related. The ECM determines whether the catalyst has deteriorated based on the calculated OSC value (See page ES-196).


HO2 SENSOR CIRCUIT LOW VOLTAGE

(P0137: OPEN)

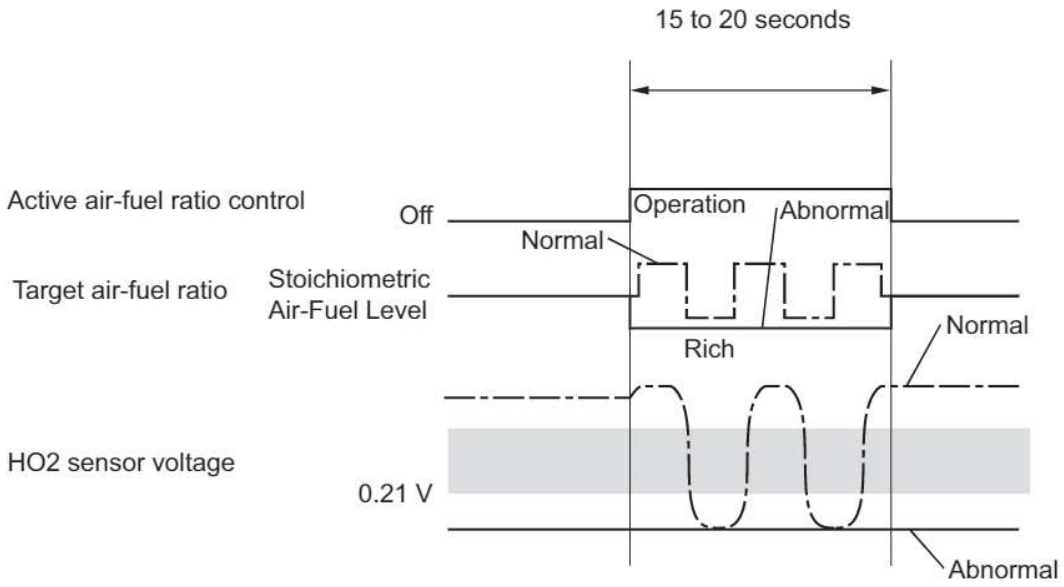


HO2 SENSOR CIRCUIT HIGH VOLTAGE

(P0138: SHORT)

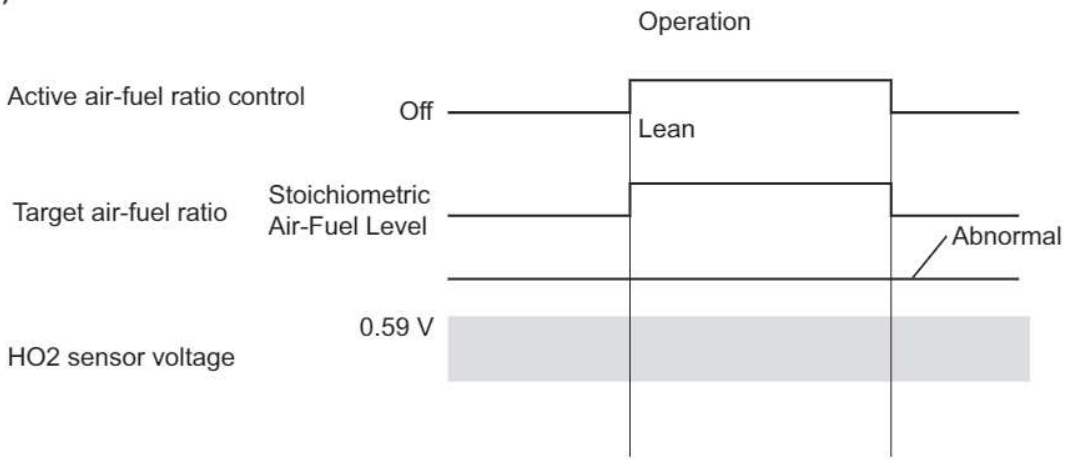

Y A115541E02

High or Low Impedance of Heated Oxygen (HO2) Sensor (DTC P0136 or P0137):

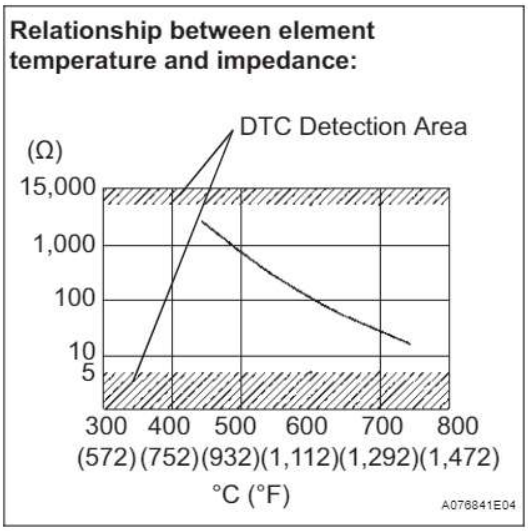

During normal air-fuel ratio feedback control, there are small variations in the exhaust gas oxygen concentration. In order to continuously monitor the slight variations in the HO2 sensor signal while the engine is running, the impedance* of the sensor is measured by the ECM. The ECM determines that there is a malfunction in the sensor when the measured impedance deviates from the standard range.
*: The effective resistance in an alternating current electrical circuit.
HINT:

- The impedance cannot be measured using an ohmmeter.
- DTC P0136 indicates the deterioration of the HO2 sensor. The ECM sets this DTC by calculating the impedance of the sensor when the typical enabling conditions are satisfied (2 driving cycles).
- DTC P0137 indicates an open or short circuit in the HO2 sensor (2 driving cycles). The ECM sets this DTC when the impedance of the sensor exceeds the threshold 15 kΩ.

MONITOR STRATEGY

Related DTCs	P0136: Heated oxygen sensor output voltage (Abnormal voltage output) P0136: Heated oxygen sensor impedance (Low) P0137: Heated oxygen sensor output voltage (Low voltage) P0137: Heated oxygen sensor impedance (High) P0138: Heated oxygen sensor output voltage (High voltage) P0138: Heated oxygen sensor output voltage (Extremely high)
Required Sensors/Components (Main)	Heated oxygen sensor
Required Sensors/Components (Related)	Crankshaft position sensor, engine coolant temperature sensor, mass air flow meter and throttle position sensor
Frequency of Operation	Once per driving cycle: Active air-fuel ratio control detection Continuous: Other
Duration	20 seconds: Heated oxygen sensor output voltage (Abnormal voltage output, High voltage and Low voltage) 90 seconds: Heated oxygen sensor impedance (High) 30 seconds: Heated oxygen sensor impedance (Low) 10 seconds: Output voltage (Stuck high)
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

All:

Monitor runs whenever following DTCs are not present	P0031, P0032 (A/F Sensor heater - Sensor 1) P0037, P0038 (O2 Sensor heater - Sensor 2) P0100 - P0103 (MAF meter) P0110 - P0113 (IAT sensor) P0115 - P0118 (ECT sensor) P0120 - P0223, P2135 (TP sensor) P0125 (Insufficient ECT for Closed Loop) P0171, P0172 (Fuel system) P0300 - P0304 (Misfire) P0335 (CKP sensor) P0340 (CMP sensor) P0451 - P0456, P2401 - P2420 (EVAP system) P0500 (VSS) P2196 (A/F Sensor - rationality) P2A00 (A/F Sensor - slow response)

ES

Heated Oxygen Sensor Output Voltage (Abnormal Voltage Output, High Voltage and Low Voltage):

Active air-fuel ratio control	Performing
Active air-fuel ratio control is performed when the following conditions are met:	-
Battery voltage	11 V or more
Engine coolant temperature	75°C (167°F) or more
Idling	OFF
Engine RPM	Less than 4,000 rpm
A/F sensor status	Activated
Fuel system status	Closed loop
Fuel cut	OFF
Engine load	10 to 80 %
Shift position	4th (Automatic Transaxle) 3rd or more (Manual Transaxle)

Heated Oxygen Sensor Impedance (Low):

Battery voltage	11 V or more
Estimated rear HO2 sensor temperature	Less than 700°C (1,292°F)
ECM monitor	Completed
DTC P0606	Not set

Heated Oxygen Sensor Impedance (High):

Battery voltage	11 V or more
Estimated rear HO2 sensor temperature	450°C (842°F) or more
DTC P0606	Not present

Heated Oxygen Sensor Output Voltage (Extremely High):

Battery voltage	11 V or more
Time after engine start	2 seconds or more

TYPICAL MALFUNCTION THRESHOLDS

Heated Oxygen Sensor Output Voltage (Abnormal Voltage Output):

Either of the following conditions is met:	1 or 2
1. All of the following conditions (a), (b) and (c) are met	-
(a) Commanded air-fuel ratio	14.3 or less
(b) Rear HO2 sensor voltage	0.21 to 0.59 V
(c) OSC (Oxygen Storage Capacity of Catalyst)	2 g or more
2. All of the following conditions (d), (e) and (f) are met	-

(d) Commanded air-fuel ratio	14.9 or more
(e) Rear HO2 sensor voltage	0.21 to 0.59 V
(f) OSC	2 g or more

Heated Oxygen Sensor Output Voltage (Low):

All of the following conditions (a), (b) and (c) are met	-
(a) Commanded air-fuel ratio	14.3 or less
(b) Rear HO2 sensor voltage	Less than 0.21 V
(c) OSC	2 g or more

Heated Oxygen Sensor Output Voltage (High):

All of the following conditions (a), (b) and (c) are met	-
(a) Commanded air-fuel ratio	14.9 or more
(b) Rear HO2 sensor voltage	More than 0.59 V
(c) OSC	2 g or more

Heated Oxygen Sensor Impedance (Low):

Duration of the following condition is met	30 seconds or more
Rear HO2 sensor impedance	Less than 5 Ω

Heated Oxygen Sensor Impedance (High):

Duration of the following condition is met	90 seconds or more
Rear HO2 sensor impedance	15 kΩ or more

Heated Oxygen Sensor Output Voltage (Extremely High):

Duration of the following condition is met	10 seconds or more
Rear HO2 sensor voltage	1.2 V or more


COMPONENT OPERATING RANGE

Duration of the following condition is met	30 seconds or more
Heated oxygen sensor voltage	Varies between 0.1 and 0.9 V

MONITOR RESULT

Refer to CHECKING MONITOR STATUS (See page ES-20).


WIRING DIAGRAM

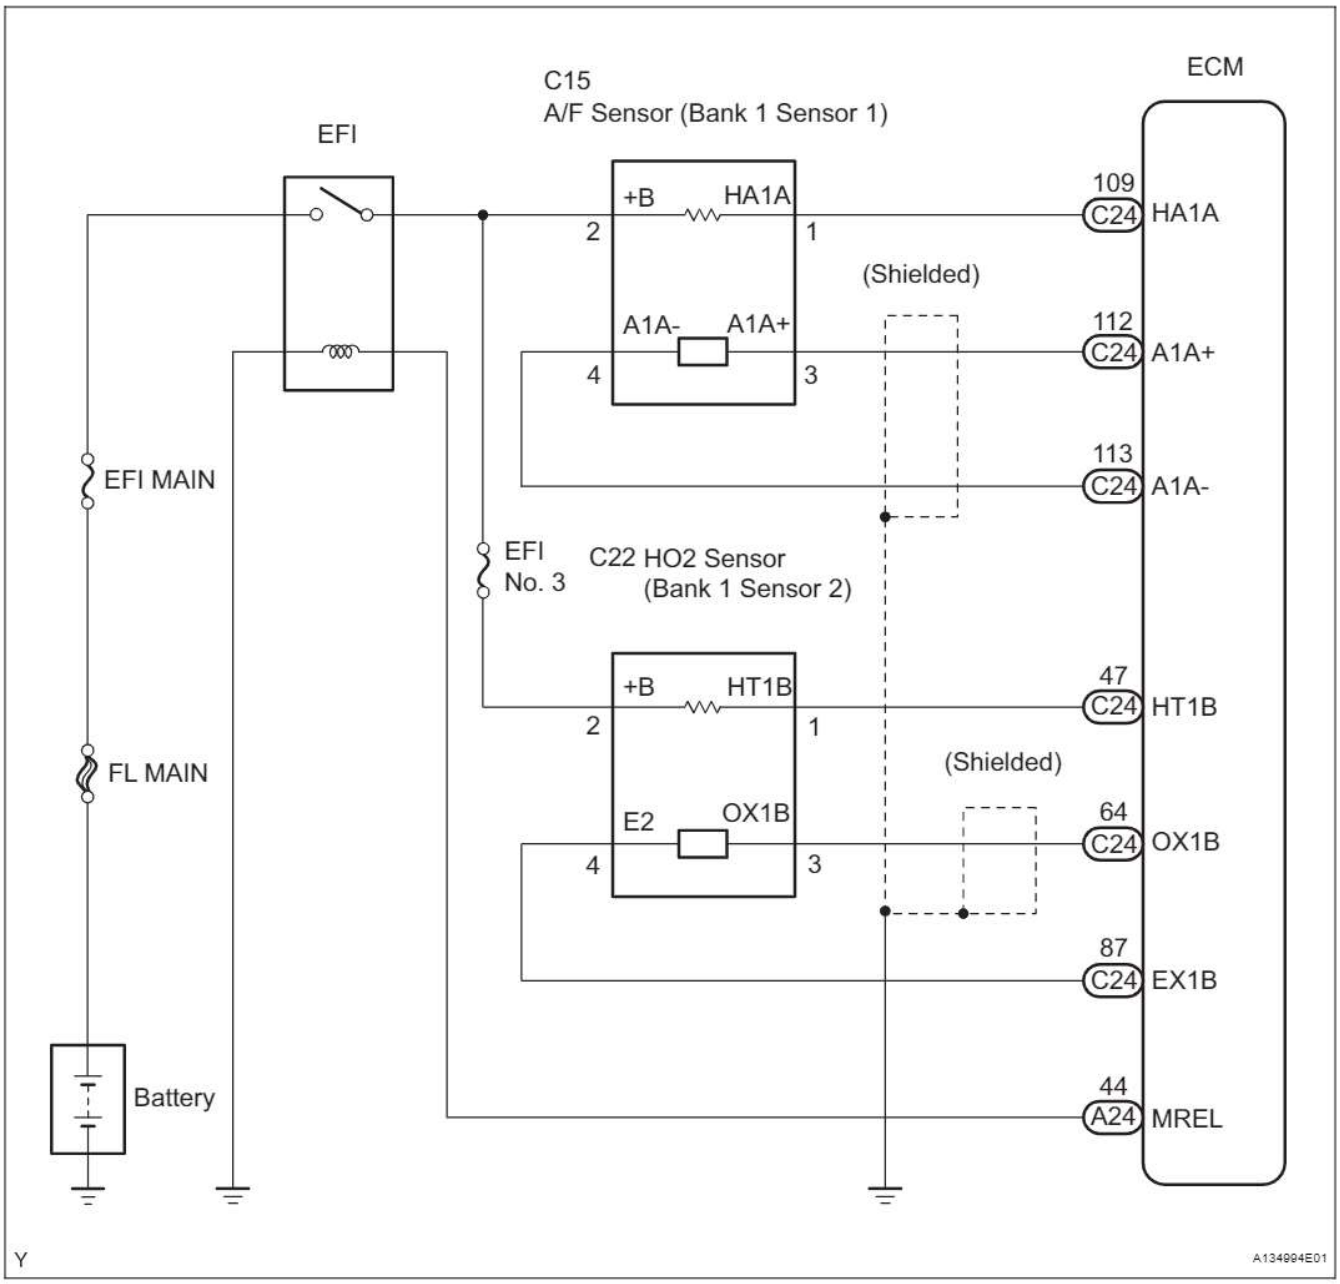


CONFIRMATION DRIVING PATTERN

HINT:

- This confirmation driving pattern is used in the "PERFORM CONFIRMATION DRIVING PATTERN" procedure of the following diagnostic troubleshooting procedure.
- Performing this confirmation pattern will activate the Heated Oxygen (HO2) sensor monitor. (The catalyst monitor is performed simultaneously.) This is very useful for verifying the completion of the repair.

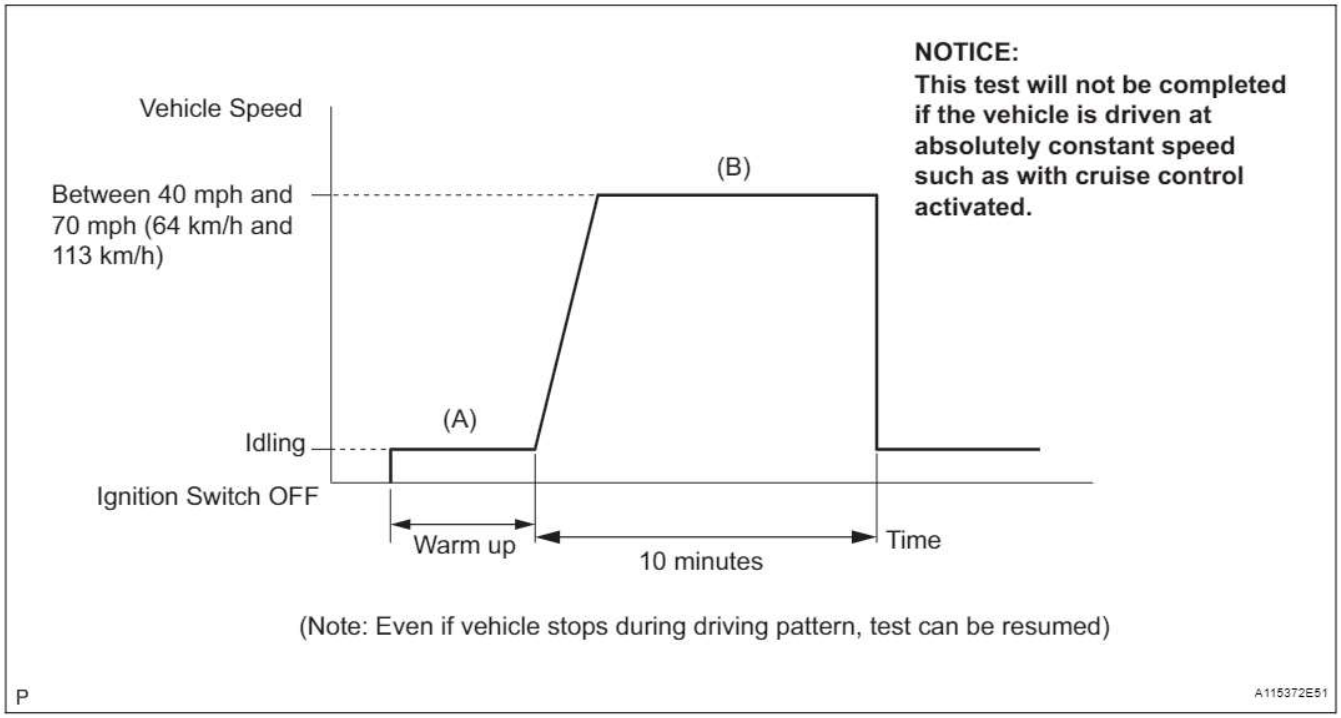

1. Connect the intelligent tester to the DLC3.

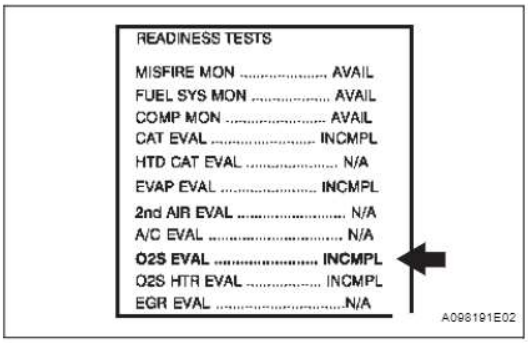

2. Turn the ignition switch to the ON position.
3. Turn the tester on.
4. Clear the DTCs (if set) (See page ES-38).
5. Select the following menu items: DIAGNOSIS / CARB OBD II / READINESS TESTS.
6. Check that O2S EVAL is INCMPL (incomplete).
7. Start the engine and warm it up. (Proceed "A")
8. Drive the vehicle at between 40 mph and 70 mph (64 km/h and 113 km/h) for at least 10 minutes. (Proceed "B")
9. Note the state of the Readiness Tests items. Those items will change to COMPL (complete) as the O2S EVAL monitor operates.
10. On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES and check if any DTCs (any pending DTCs) are set.

HINT:
If O2S EVAL does not change to COMPL, and any pending DTCs fail to set, extend the driving time.

INSPECTION PROCEDURE

HINT:
Sensor 2 refers to the sensor mounted behind the Three-Way Catalytic Converter (TWC) and located far from the engine assembly.
HINT:
Intelligent tester only:

Malfunctioning areas can be identified by performing the A/F CONTROL function provided in the ACTIVE TEST. The A/F CONTROL function can help to determine whether the Air-Fuel Ratio (A/F) sensor, Heated Oxygen (HO2) sensor and other potential trouble areas are malfunctioning.
The following instructions describe how to conduct the A/F CONTROL operation using the intelligent tester.
(a) Connect the intelligent tester to the DLC3.
(b) Start the engine and turn the tester on.
(c) Warm up the engine at an engine speed of 2,500 rpm for approximately 90 seconds.
(d) On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / A/F CONTROL.
(e) Perform the A/F CONTROL operation with the engine idling (press the RIGHT or LEFT button to change the fuel injection volume).
(f) Monitor the voltage outputs of the A/F and HO2 sensors (AFS B1 S1 and O2S B1 S2) displayed on the tester.






ES

HINT:
- The A/F CONTROL operation lowers the fuel injection volume by 12.5 % or increases the injection volume by 25 %.
- The sensors react in accordance with increases and decreases in the fuel injection volume.

Standard

Tester Display (Sensor)	Injection Volumes	Status	Voltages
AFS B1 S1 (A/F)	+25 %	Rich	Less than 3.0
	-12.5 %	Lean	More than 3.35
O2S B1 S2 (HO2)	+25 %	Rich	More than 0.5
	-12.5 %	Lean	Less than 0.4

NOTICE:
The A/F sensor has an output delay of a few seconds and the HO2 sensor has a maximum output delay of approximately 20 seconds.

Case	A/F Sensor (Sensor 1) Output Voltage		HO2 Sensor (Sensor 2) Output Voltage		Main Suspected Trouble Areas
1	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		-
	Output Voltage More than 3.35 V Less than 3.0 V		Output Voltage More than 0.5 V Less than 0.4 V		
2	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• A/F sensor • A/F sensor heater • A/F sensor circuit
	Output Voltage Almost no reaction		Output Voltage More than 0.5 V Less than 0.4 V		
3	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• HO2 sensor • HO2 sensor heater • HO2 sensor circuit
	Output Voltage More than 3.35 V Less than 3.0 V		Output Voltage Almost no reaction		

Case	A/F Sensor (Sensor 1) Output Voltage		HO2 Sensor (Sensor 2) Output Voltage		Main Suspected Trouble Areas
4	Injection volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• Injector • Fuel pressure • Gas leakage from exhaust system (Air-fuel ratio extremely lean or rich)
	Output Voltage Almost no reaction	 NG	Output Voltage Almost no reaction	 NG	

Following the A/F CONTROL procedure enables technicians to check and graph the voltage outputs of both the A/F and HO2 sensors.
To display the graph, select the following menu items on the tester: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / A/F CONTROL / USER DATA / AFS B1 S1 and O2S B1 S2; then press the YES button and then the ENTER button followed by the F4 button.
HINT:

- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.
- If the OX1B wire from the ECM connector is short-circuited to the +B wire, DTC P0138 will be set.

ES

1	READ OUTPUT DTC

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(d) Read the DTCs.

Result

Display (DTC output)	Proceed to
P0138	A
P0137	B
P0136	C

B → Go to step 14

C → Go to step 7

A

2	READ VALUE USING INTELLIGENT TESTER (OUTPUT VOLTAGE OF HEATED OXYGEN SENSOR)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / O2S B1 S2.
(d) Allow the engine to idle.
(e) Read the Heated Oxygen (HO2) sensor output voltage while idling.

Result


HO2 Sensor Output Voltages	Proceed to
More than 1.2 V	A
Less than 1.0 V	B

B → Go to step 5

A

3 CHECK HARNESS AND CONNECTOR (CHECK FOR SHORT)

ES

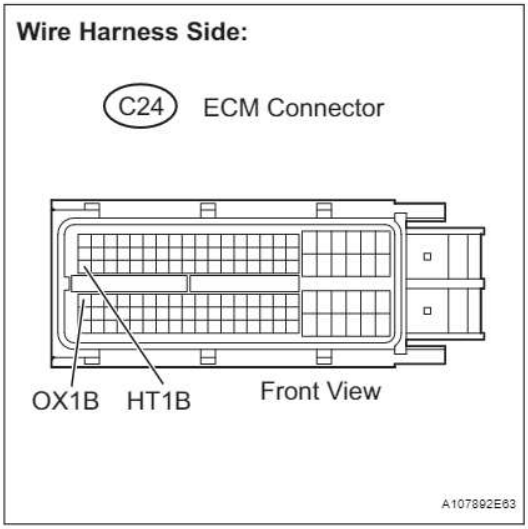

(a) Turn the ignition switch off and wait for 5 minutes.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals.
Standard resistance

Tester Connection	Specified Condition
C24-47 (HT1B) - C24-64 (OX1B)	10 kΩ or higher


(d) Reconnect the ECM connector.

NG → Go to step 4

OK

REPLACE ECM

4 INSPECT HEATED OXYGEN SENSOR (CHECK FOR SHORT)

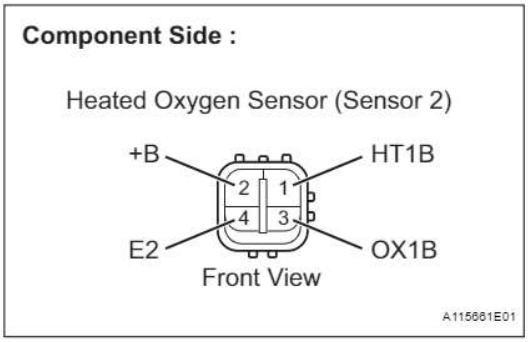

(a) Disconnect the C22 HO2 sensor connector.
(b) Measure the resistance.
Standard resistance

Tester Connection	Specified Condition
1 (HT1B) - 2 (+B)	11 to 16 Ω at 20°C (68°F)
2 (+B) - 3 (OX1B)	10 kΩ or higher

(c) Reconnect the HO2 sensor connector.

NG → REPLACE HEATED OXYGEN SENSOR

OK

REPAIR OR REPLACE HARNESS OR CONNECTOR

5	PERFORM CONFIRMATION DRIVING PATTERN

NEXT

6	CHECK WHETHER DTC OUTPUT RECURS (DTC P0138)

(a) On the intelligent tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(b) Read the DTCs.

ES

Result

Display (DTC Output)	Proceed to
P0138	A
No output	B

B → CHECK FOR INTERMITTENT PROBLEMS

A

REPLACE HEATED OXYGEN SENSOR

7	READ VALUE USING INTELLIGENT TESTER (OUTPUT VOLTAGE OF HEATED OXYGEN SENSOR)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Start the engine.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / O2S B1 S2.
(e) After warming up the engine, run the engine at an engine speed of 2,500 rpm for 3 minutes.
(f) Read the output voltage of the HO2 sensor when the engine rpm is suddenly increased.
HINT:
Quickly accelerate the engine to 4,000 rpm 3 times using the accelerator pedal.
Standard voltage:
Fluctuates between 0.4 V or less and 0.5 V or more.

NG → Go to step 14

OK

8	PERFORM CONFIRMATION DRIVING PATTERN

NEXT

9	CHECK WHETHER DTC OUTPUT RECURS (DTC P0136)

(a) On the intelligent tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(b) Read the DTCs.

ES

Result

Display (DTC Output)	Proceed to
P0136	A
No output	B

B → CHECK FOR INTERMITTENT PROBLEMS

A

10	REPLACE HEATED OXYGEN SENSOR

NEXT

11	PERFORM CONFIRMATION DRIVING PATTERN

NEXT

12	CHECK WHETHER DTC OUTPUT RECURS (DTC P0136)

(a) On the intelligent tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(b) Read the DTCs.


Result

Display (DTC Output)	Proceed to
P0136	A
No output	B

B → END

A

13	PERFORM ACTIVE TEST USING INTELLIGENT TESTER (INJECTION VOLUME)

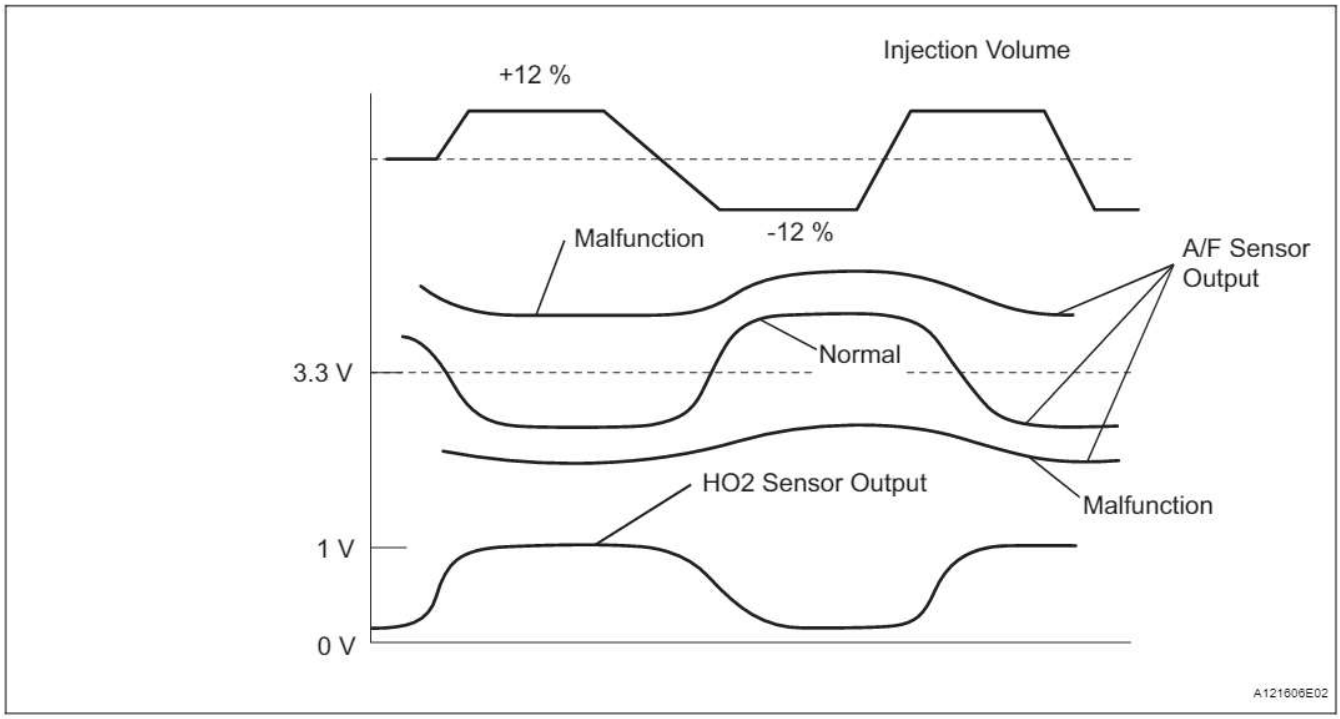

(a) Connect the intelligent tester to the DLC3.
(b) Start the engine and turn the tester on.
(c) Warm up the engine.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / INJ VOL.
(e) Change the fuel injection volume using the tester, and monitor the voltage output of Air-Fuel Ratio (A/F) and HO2 sensors displayed on the tester.

HINT:

- Change the fuel injection volume within the range of -12 % and +12 %. The injection volume can be changed in 1 % graduations within the range.
- The A/F sensor is displayed as AFS B1 S1, and the HO2 sensor is displayed as O2S B1 S2, on the intelligent tester.

Result

Tester Display (Sensor)	Voltage Variations	Proceed to
AFS B1 S1 (A/F)	Alternates between more and less than 3.3 V	OK
	Remains at more than 3.3 V	NG
	Remains at less than 3.3 V	NG

HINT:
A normal HO2 sensor voltage (O2S B1 S2) reacts in accordance with increases and decreases in fuel injection volumes. When the A/F sensor voltage remains at either less or more than 3.3 V despite the HO2 sensor indicating a normal reaction, the A/F sensor is malfunctioning.

NG → REPLACE AIR-FUEL RATIO SENSOR

OK

CHECK AND REPAIR EXTREMELY RICH OR LEAN ACTUAL AIR-FUEL RATIO (INJECTOR, FUEL PRESSURE, GAS LEAKAGE FROM EXHAUST SYSTEM, ETC.)

14	CHECK FOR EXHAUST GAS LEAKAGE

OK:
No gas leakage.

NG → REPAIR OR REPLACE EXHAUST GAS LEAKAGE POINT

ES

OK

15	INSPECT HEATED OXYGEN SENSOR (HEATER RESISTANCE) (See page ES-90)

NG → REPLACE HEATED OXYGEN SENSOR


OK

16	INSPECT ENGINE ROOM J/B (EFI RELAY) (See page ES-85)

NG → REPLACE ENGINE ROOM J/B

OK

17 CHECK HARNESS AND CONNECTOR (HEATED OXYGEN SENSOR - ECM)

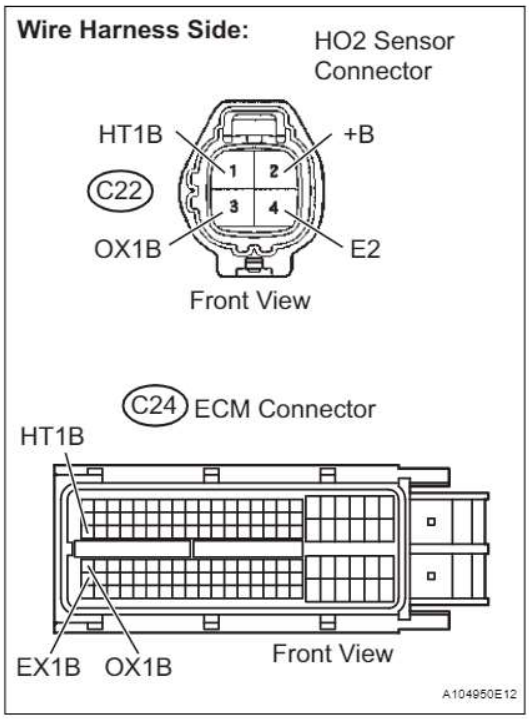

(a) Disconnect the C22 HO2 sensor connector.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage between the +B terminal of the HO2 sensor connector and body ground.

Standard voltage

Tester Connection	Specified Condition
C22-2 (+B) - Body ground	9 to 14 V

(d) Turn the ignition switch off.
(e) Disconnect the C24 ECM connector.
(f) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)


Tester Connection	Specified Condition
C22-1 (HT1B) - C24-47 (HT1B)	Below 1 Ω
C22-3 (OX1B) - C24-64 (OX1B)	Below 1 Ω
C22-4 (E2) - C24-87 (EX1B)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
C22-1 (HT1B) or C24-47 (HT1B) - Body ground	10 kΩ or higher
C22-3 (OX1B) or C24-64 (OX1B) - Body ground	10 kΩ or higher
C22-4 (E2) or C24-87 (EX1B) - Body ground	10 kΩ or higher

(g) Reconnect the HO2 sensor connector.
(h) Reconnect the ECM connector.

Reference (System Diagram of Sensor 2):

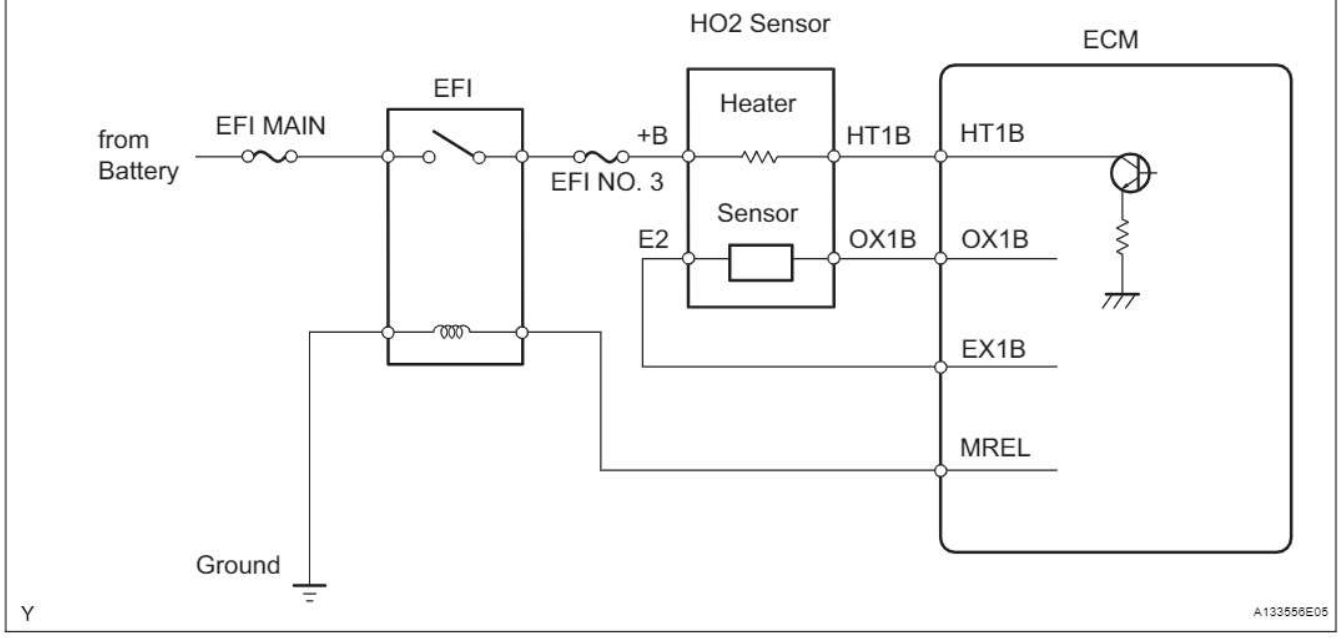

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

REPLACE HEATED OXYGEN SENSOR

DTC	P0171	System Too Lean (Bank 1)

DTC	P0172	System Too Rich (Bank 1)

DESCRIPTION

The fuel trim is related to the feedback compensation value, not to the basic injection time. The fuel trim consists of both the short-term and the long-term fuel trims.

The short-term fuel trim is fuel compensation that is used to constantly maintain the air-fuel ratio at stoichiometric levels. The signal from the Air-Fuel Ratio (A/F) sensor indicates whether the air-fuel ratio is rich or lean compared to the stoichiometric ratio. This triggers a reduction in the fuel injection volume if the air-fuel ratio is rich and an increase in the fuel injection volume if it is lean.

Factors such as individual engine differences, wear over time and changes in operating environment cause short-term fuel trim to vary from the central value. The long-term fuel trim, which controls overall fuel compensation, compensates for long-term deviations in the fuel trim from the central value caused by the short-term fuel trim compensation.

If both the short-term and long-term fuel trims are lean or rich beyond predetermined values, it is interpreted as a malfunction, and the ECM illuminates the MIL and sets a DTC.

ES

DTC No.	DTC Detection Condition	Trouble Area
P0171	With warm engine and stable air-fuel ratio feedback, fuel trim considerably in error to lean side (2 trip detection logic)	• Air induction system • Injector blockage • Mass Air Flow (MAF) meter • Engine Coolant Temperature (ECT) sensor • Fuel pressure • Gas leakage from exhaust system • Open or short in A/F sensor (sensor 1) circuit • A/F sensor (sensor 1) • A/F sensor heater (sensor 1) • Engine room J/B (EFI relay) • A/F sensor heater and EFI relay circuits • PCV valve and hose • PCV hose connections • ECM
P0172	With warm engine and stable air-fuel ratio feedback, fuel trim considerably in error to rich side (2 trip detection logic)	• Injector leakage or blockage • MAF meter • ECT sensor • Ignition system • Fuel pressure • Gas leakage from exhaust system • Open or short in A/F sensor (sensor 1) circuit • A/F sensor (sensor 1) • A/F sensor heater (sensor 1) • Engine room J/B (EFI relay) • A/F sensor heater and EFI relay circuits • ECM


HINT:

- When DTC P0171 is set, the actual air-fuel ratio is on the lean side. When DTC P0172 is set, the actual air-fuel ratio is on the rich side.
- If the vehicle runs out of fuel, the air-fuel ratio is lean and DTC P0171 may be set. The MIL is then illuminated.
- When the total of the short-term and long-term fuel trim values is within 20 % (and the engine coolant temperature is more than 75°C [167°F]), the system is functioning normally.

MONITOR DESCRIPTION

Under closed-loop fuel control, fuel injection volumes that deviate from those estimated by the ECM cause changes in the long-term fuel trim compensation value. The long-term fuel trim is adjusted when there are persistent deviations in the short-term fuel trim values. Deviations from the ECM's estimated fuel injection volumes also affect the average fuel trim learning value, which is a combination of the average short-term fuel trim (fuel feedback compensation value) and the average long-term fuel trim (learning value of the air-fuel ratio). If the average fuel trim learning value exceeds the malfunction threshold, the ECM interprets this as a fault in the fuel system and sets a DTC.
Example:
The average fuel trim learning value is +35 % or more or -35 % or less, the ECM interprets this as a fuel system malfunction.

ES

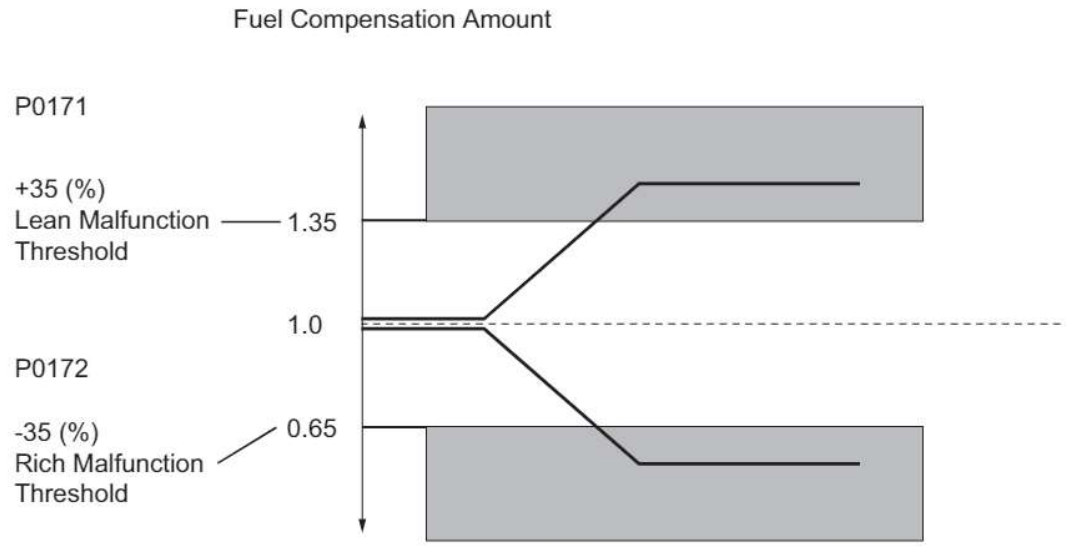

MONITOR STRATEGY

Related DTCs	P0171: Fuel trim lean P0172: Fuel trim rich
Required Sensors/Components (Main)	Fuel system
Required Sensors/Components (Related)	A/F sensor, Mass air flow meter, Crankshaft position sensor
Frequency of Operation	Continuous
Duration	Within 10 seconds
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	P0010 (VVT OCV) P0011 (VVT System 1 - Advance) P0012 (VVT System 1 - Retard) P0031, P0032 (A/F sensor heater - Sensor 1) P0100 - P0103 (MAF meter) P0115 - P0118 (ECT sensor) P0120 - P0223, P2135 (TP sensor) P0125 (Insufficient ECT for Closed Loop) P0335 (CKP sensor) P0340 (CMP sensor) P0351 - P0354 (Igniter) P0500 (VSS)
Fuel system status	Closed loop
Battery voltage	11 V or more
Either of the following conditions 1 or 2 is met	-
1. Engine RPM	Below 1,100 rpm
2. Intake air amount per revolution	0.22 g/rev or more
Catalyst monitor	Not executed

ES

TYPICAL MALFUNCTION THRESHOLDS

EVAP purge-cut	Executing
Either of the following conditions 1 or 2 is met	-
1. Average of short-term fuel trim and long-term fuel trim	35 % or more (varies with ECT)
2. Average of short-term fuel trim and long-term fuel trim	-35 % or less (varies with ECT)

WIRING DIAGRAM

Refer to DTC P2195 (See page ES-312).

INSPECTION PROCEDURE

HINT:

- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.
- A low A/F sensor voltage could be caused by a rich air-fuel mixture. Check for conditions that would cause the engine to run rich.
- A high A/F sensor voltage could be caused by a lean air-fuel mixture. Check for conditions that would cause the engine to run lean.

1	CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P0171 OR P0172)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(d) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P0171 or P0172	A
P0171 or P0172 and other DTCs	B

HINT:
If any DTCs other than P0171 or P0172 are output, troubleshoot those DTCs first.

B → GO TO DTC CHART

A



2 PERFORM ACTIVE TEST USING INTELLIGENT TESTER (A/F CONTROL)

(a) Connect the intelligent tester to the DLC3.
(b) Start the engine and turn the tester on.
(c) Warm up the engine at an engine speed of 2,500 rpm for approximately 90 seconds.
(d) On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / A/F CONTROL.
(e) Perform the A/F CONTROL operation with the engine in an idling condition (press the RIGHT or LEFT button to change the fuel injection volume).
(f) Monitor the output voltages of the A/F and HO2 sensors (AFS B1S1 and O2S B1S2) displayed on the tester.

Result:

The A/F sensor reacts in accordance with increases and decreases in the fuel injection volume:
+25 % = Rich output:
Less than 3.0 V
-12.5 % = Lean output:
More than 3.35 V

NOTICE:
The A/F sensor has an output delay of a few seconds and the HO2 sensor has a maximum output delay of approximately 20 seconds.

Case	A/F Sensor (Sensor 1) Output Voltage		HO2 Sensor (Sensor 2) Output Voltage		Main Suspected Trouble Areas
1	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		-
	Output Voltage More than 3.35 V Less than 3.0 V	 OK	Output Voltage More than 0.5 V Less than 0.4 V	 OK	
2	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• A/F sensor • A/F sensor heater • A/F sensor circuit
	Output Voltage Almost no reaction	NG	Output Voltage More than 0.5 V Less than 0.4 V	 OK	

Case	A/F Sensor (Sensor 1) Output Voltage		HO2 Sensor (Sensor 2) Output Voltage		Main Suspected Trouble Areas
3	Injection volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		Extremely rich or lean actual air-fuel ratio • Injector leakage or blockage • Gas leakage from exhaust system • Fuel pressure • MAF meter • ECT sensor • Air induction system • PCV hose connections
Output Voltage Almost no reaction —— NG		Output Voltage Almost no reaction		—— NG	

Following the A/F CONTROL procedure enables technicians to check and graph the voltage outputs of both the A/F and HO2 sensors.
To display the graph, select the following menu items on the tester: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / A/F CONTROL / USER DATA / AFS B1S1 and O2S B1S2; then press the YES button and then the ENTER button followed by the F4 button.

ES

Result

Result	Proceed to
Case 1	C
Case 2	B
Case 3	A

B → Go to step 11

C → Go to step 15

A

3	READ VALUE USING INTELLIGENT TESTER (MAF)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / MAF and COOLANT TEMP.
(d) Allow the engine to idle until the COOLANT TEMP reaches 75°C (167°F) or more.
(e) Read the MAF with the engine in an idling condition and at an engine speed of 2,500 rpm.
Standard:
MAF while engine idling:
Between 1 g/sec. and 3 g/sec. (shift position: N, A/C: OFF).
MAF at an engine speed of 2,500 rpm:
Between 2 g/sec. and 6 g/sec. (shift position: N, A/C: OFF).

NG → REPLACE MASS AIR FLOW METER

OK

4	READ VALUE USING INTELLIGENT TESTER (COOLANT TEMP)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / COOLANT TEMP.
(d) Read the COOLANT TEMP twice, when the engine is both cold and warmed up.
Standard:
With cold engine:
Same as ambient air temperature.
With warm engine:
Between 75°C and 100°C (167°F and 212°F).

NG → **REPLACE ENGINE COOLANT TEMPERATURE SENSOR**

OK

5	CHECK PCV HOSE CONNECTIONS

(a) Check for PCV hose connections.
OK:
PCV hose is connected correctly and is not damaged.

NG → **REPAIR OR REPLACE PCV HOSE**

OK

6	CHECK AIR INDUCTION SYSTEM

(a) Check the air induction system for vacuum leakage.
OK:
No leakage from air induction system.

NG → **REPAIR OR REPLACE AIR INDUCTION SYSTEM**

OK

7	CHECK FOR SPARKS AND IGNITION (See page ES-172)

NG → **REPAIR OR REPLACE IGNITION SYSTEM**

OK

8	CHECK FOR EXHAUST GAS LEAKAGE

(a) Check for exhaust gas leakage.
OK:
No gas leakage.

NG → **REPAIR OR REPLACE EXHAUST SYSTEM**

OK ↓

9	CHECK FUEL PRESSURE

(a) Check the fuel pressure (See page FU-9).
Standard pressure:
304 to 343 kPa (3.1 to 3.5 kgf/cm^2, 44.1 to 49.7 psi)

NG → **REPAIR OR REPLACE FUEL SYSTEM**

OK ↓

10	INSPECT FUEL INJECTOR (INJECTION AND VOLUME)

(a) Check the injection volume (See page FU-14).
Standard injection volume:
76 to 92 cm^3 (4.6 to 5.6 cu in.) per 15 seconds

NG → **REPLACE FUEL INJECTOR**

OK ↓

11	INSPECT AIR-FUEL RATIO SENSOR (HEATER RESISTANCE) (See page ES-84)

NG → **REPLACE AIR-FUEL RATIO SENSOR**

OK ↓

12	INSPECT ENGINE ROOM J/B (EFI RELAY) (See page ES-85)

NG → **REPLACE ENGINE ROOM J/B**

OK ↓

13	CHECK HARNESS AND CONNECTOR (A/F SENSOR - ECM) (See page ES-325)


NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK ↓

14	REPLACE AIR-FUEL RATIO SENSOR

NEXT

15	PERFORM CONFIRMATION DRIVING PATTERN

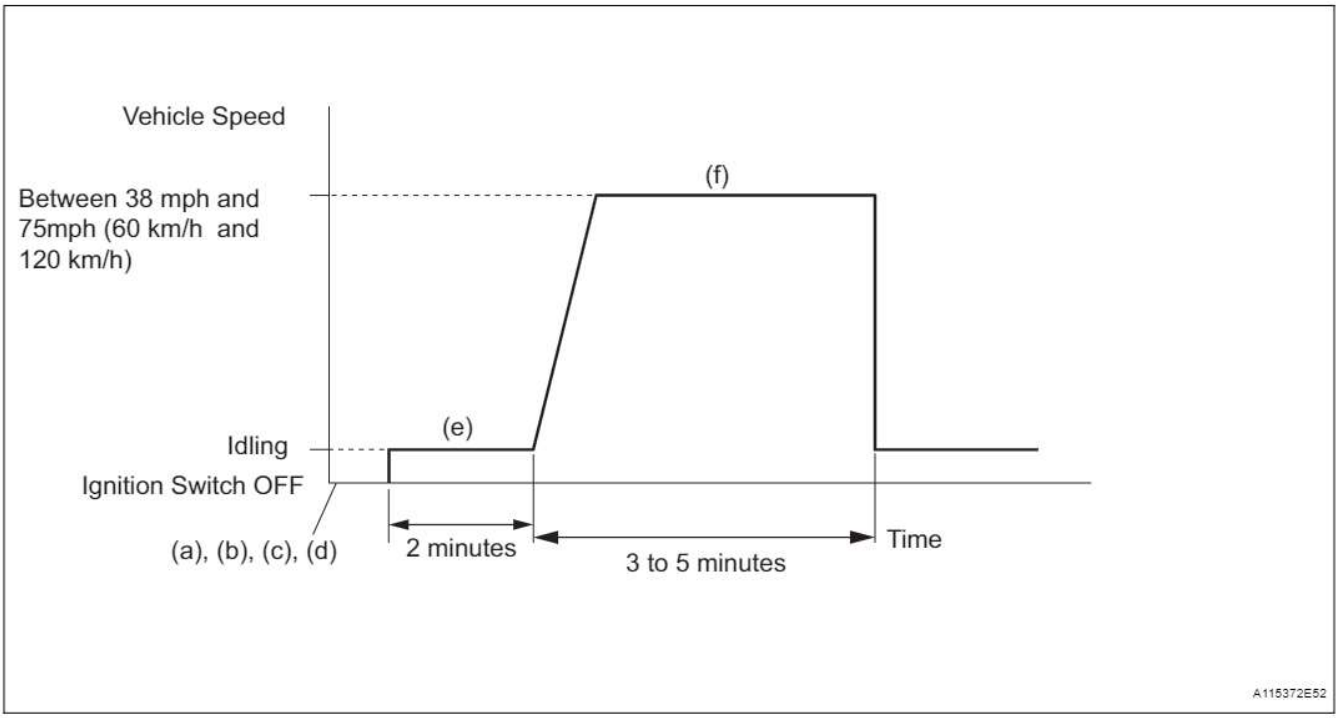

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Clear the DTCs (See page ES-38).
(d) Switch the ECM from normal mode to check mode using the tester (See page ES-41).
(e) Start the engine and warm it up with all the accessories switched OFF.
(f) Drive the vehicle at between 38 mph and 75 mph (60 km/h and 120 km/h) and at an engine speed of between 1,400 rpm and 3,200 rpm for 3 to 5 minutes.

HINT:
If the system is still malfunctioning, the MIL will be illuminated during step (f).

NOTICE:
If the conditions in this test are not strictly followed, no malfunction will be detected.

NEXT

16	CHECK WHETHER DTC OUTPUT RECURS (DTC P0171 OR P0172)

(a) On the intelligent tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(b) Read the DTCs.

Result

Display (DTC Output)	Proceed to
No output	A
P0171 or P0172	B

B → Go to step 3


A

END

DTC	P0300	Random / Multiple Cylinder Misfire Detected
DTC	P0301	Cylinder 1 Misfire Detected
DTC	P0302	Cylinder 2 Misfire Detected
DTC	P0303	Cylinder 3 Misfire Detected
DTC	P0304	Cylinder 4 Misfire Detected

ES

DESCRIPTION

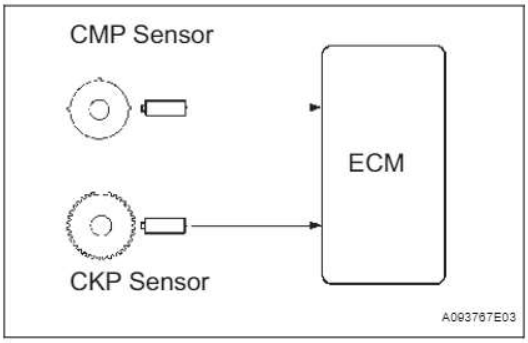

When the engine misfires, high concentrations of hydrocarbons (HC) enter the exhaust gas. Extremely high HC concentration levels can cause increases in exhaust emission levels. High concentrations of HC can also cause increases in the Three-Way Catalytic Converter (TWC) temperature, which may cause damage to the TWC. To prevent these increases in emissions and to limit the possibility of thermal damage, the ECM monitors the misfire rate. When the temperature of the TWC reaches the point of thermal degradation, the ECM blinks the MIL. To monitor misfires, the ECM uses both the Camshaft Position (CMP) sensor and the Crankshaft Position (CKP) sensor. The CMP sensor is used to identify any misfiring cylinders and the CKP sensor is used to measure variations in the crankshaft rotation speed. Misfires are counted as when the crankshaft rotation speed variations exceed predetermined thresholds. If the misfire rate exceeds the threshold level, and could cause emission deterioration, the ECM illuminates the MIL and sets a DTC.

DTC No.	DTC Detection Condition	Trouble Area
P0300	Simultaneous misfiring of several cylinders detected (2 trip detection logic)	• Open or short in engine wire harness • Connector connection • Vacuum hose connections • Ignition system • Injector • Fuel pressure • Mass Air Flow (MAF) meter • Engine Coolant Temperature (ECT) sensor • Compression pressure • Valve clearance • Valve timing • PCV valve and hose • PCV hose connections • Air induction system • ECM
P0301 P0302 P0303 P0304	Misfiring of specific cylinder detected (2 trip detection logic)	

When DTCs for misfiring cylinders are randomly set, but DTC P0300 is not set, it indicates that misfires have been detected in different cylinders at different times. DTC P0300 is only set when several misfiring cylinders are detected at the same time.

MONITOR DESCRIPTION

The ECM illuminates the MIL and sets a DTC when either of the following conditions, which could cause emission deterioration, is detected (2 trip detection logic).

- Within the first 1,000 crankshaft revolutions of the engine starting, an excessive misfiring rate (approximately 20 to 50 misfires per 1,000 crankshaft revolutions) occurs once.
- After the first 1,000 crankshaft revolutions, an excessive misfiring rate (approximately 20 to 50 misfires per 1,000 crankshaft revolutions) occurs 4 times in sequential crankshaft revolutions.

The ECM flashes the MIL and sets a DTC when either of the following conditions, which could cause Three-Way Catalytic Converter (TWC) damage, is detected (2 trip detection logic).

- In every 200 crankshaft revolutions at a high engine rpm, the threshold misfiring percentage is recorded once.
- In every 200 crankshaft revolutions at a normal engine rpm, the threshold misfiring percentage is recorded 3 times.

MONITOR STRATEGY

Related DTCs	P0300: Multiple cylinder misfire P0301: Cylinder 1 misfire P0302: Cylinder 2 misfire P0303: Cylinder 3 misfire P0304: Cylinder 4 misfire
Required Sensors/Components (Main)	Crankshaft position sensor and camshaft position sensor
Required Sensors/Components (Related)	Engine coolant temperature and intake air temperature sensors and mass air flow meter
Frequency of Operation	Continuous
Duration	1,000 crankshaft revolutions: Emission related misfire 200 crankshaft revolutions: Catalyst damaged misfire
MIL Operation	2 driving cycles: Emission related misfire MIL flashes immediately: Catalyst damaged misfire
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Misfire:

Monitor runs whenever following DTCs are not present	P0100 - P0103 (MAF meter) P0110 - P0113 (IAT sensor) P0115 - P0118 (ECT sensor) P0120 - P0223, P2135 (TP sensor) P0125 (Insufficient ECT for Closed Loop) P0327, P0328 (Knock sensor) P0335 (CKP sensor) P0340 (CMP sensor) P0500 (VSS)
Battery voltage	8 V or more
VVT system	Not operated by scan tool
Engine RPM	400 to 6,400 rpm
Either of the following conditions (a) or (b) is met	-
(a) ECT at engine start	More than -7°C (19°F)
(b) ECT	More than 20°C (68°F)
Fuel cut	OFF

Monitor period of emission-related-misfire:

First 1,000 revolutions after engine start, or Check Mode	Crankshaft 1,000 revolutions
Except above	Crankshaft 1,000 revolutions x 4

Monitor period of catalyst-damaged-misfire (MIL blinks):

All of the following conditions 1, 2 and 3 are met	Crankshaft 200 revolutions
1. Driving cycles	1st

2. Check mode	OFF
3. Engine RPM	Less than 2,600 rpm
Except above (MIL blinks immediately)	Crankshaft 200 revolutions x 3

TYPICAL MALFUNCTION THRESHOLDS

Monitor period of emission-related-misfire:

Misfire rate	PZEV: 1.33 % or more Except PZEV: 1.266 % or more

Monitor period of catalyst-damaged-misfire (MIL blinks):

Number of misfire per 200 revolutions	PZEV: 82 or more (varies with intake air amount and RPM) Except PZEV: 118 or more (varies with intake air amount and RPM)


ES

MONITOR RESULT


Refer to CHECKING MONITOR STATUS (See page ES-20).

WIRING DIAGRAM

Wiring diagram of the ignition system.

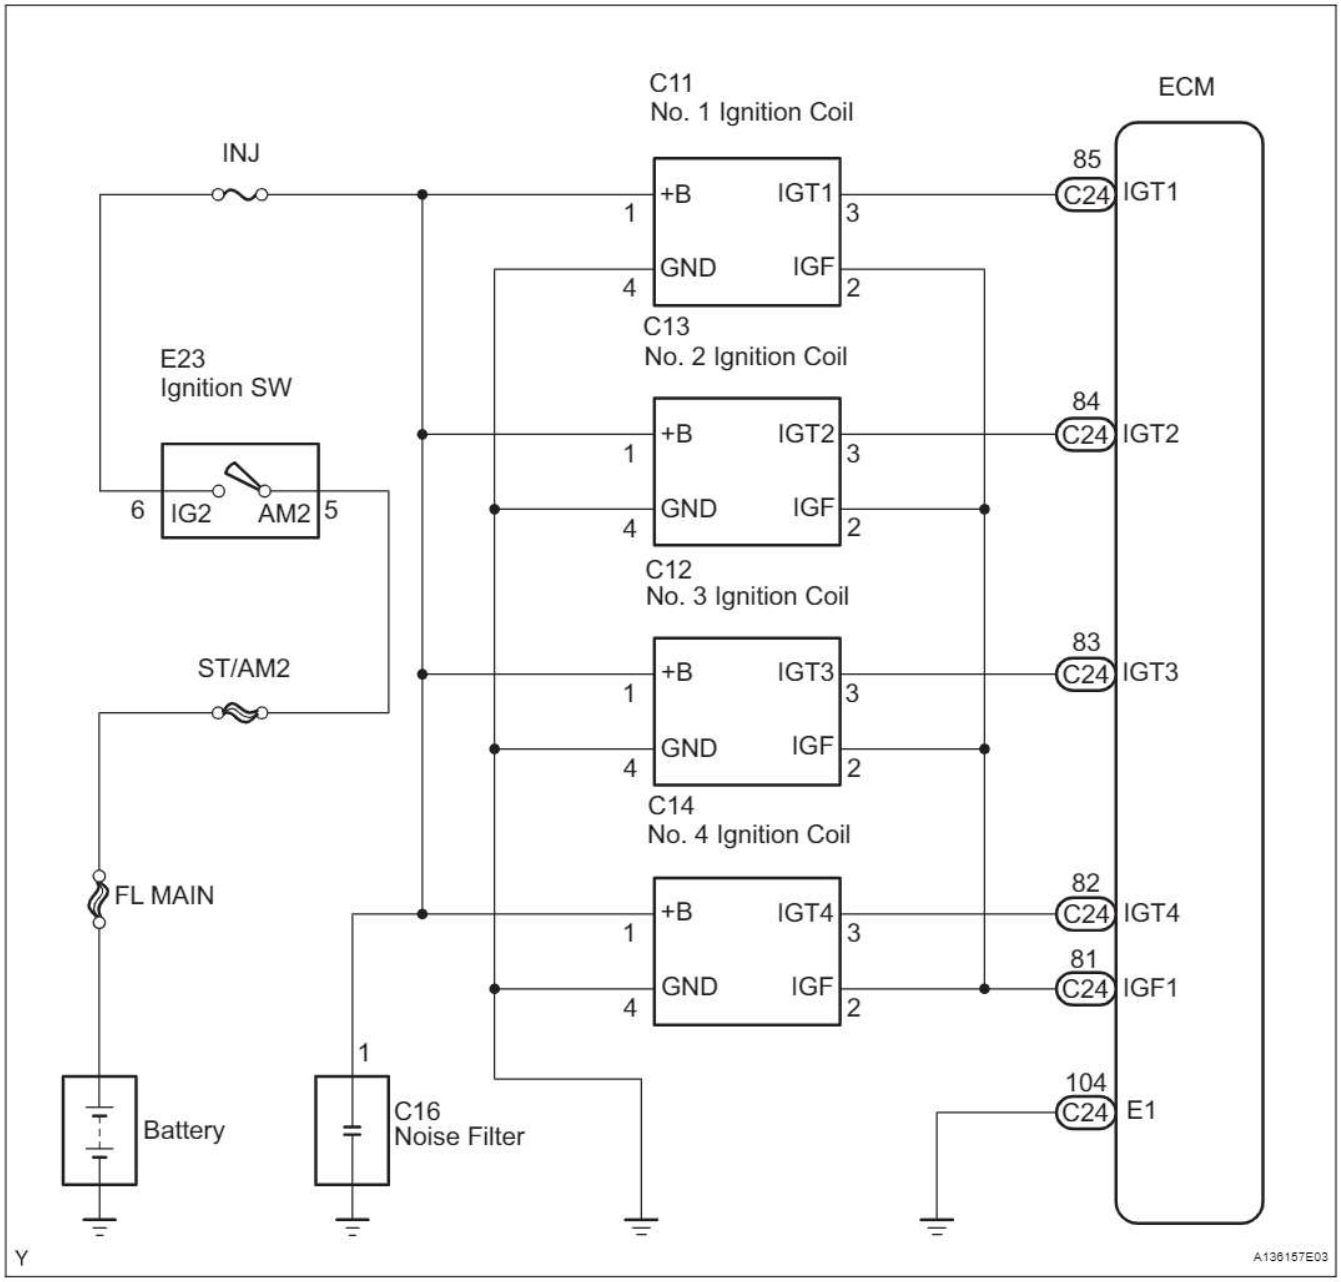

Wiring diagram of the injector circuit.

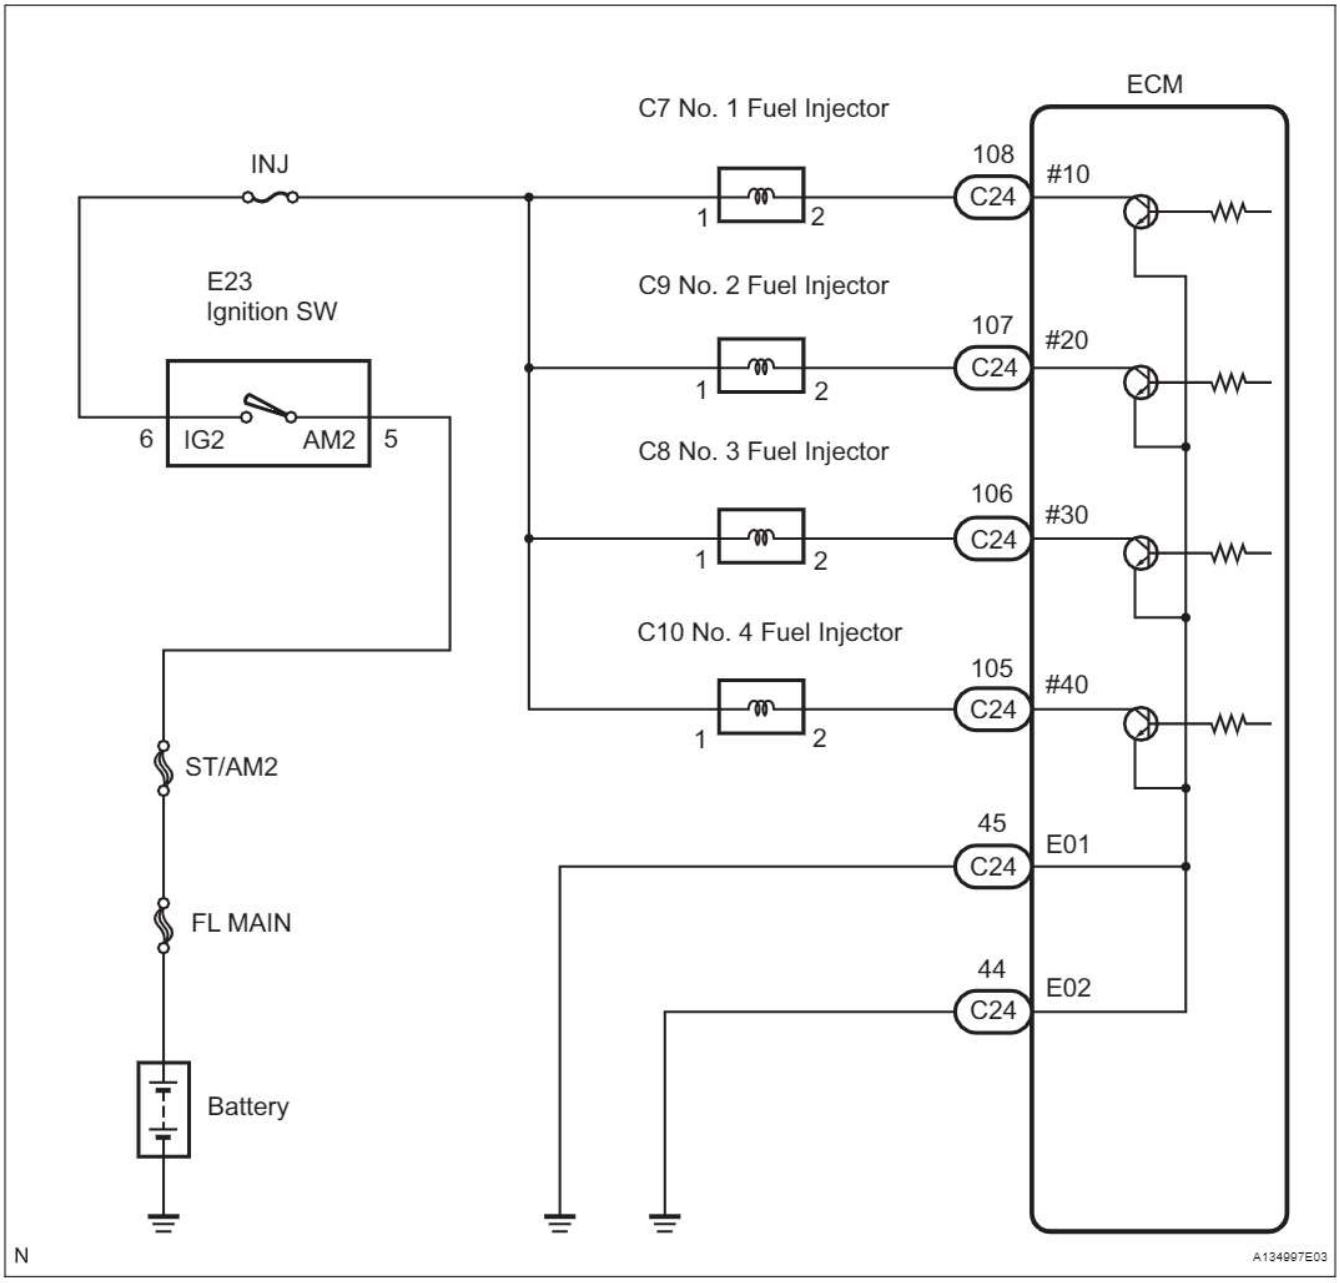

CONFIRMATION DRIVING PATTERN

1. Connect the intelligent tester to the DLC3.
2. Turn the ignition switch to the ON position.
3. Turn the tester on.
4. Record the DTC(s) and freeze frame data.
5. Using the tester, switch the ECM from normal mode to check mode (See page ES-41).
6. Read the misfire counts of each cylinder (CYL #1 to #4) with the engine in an idling condition. If any misfire count is displayed, skip the following confirmation driving pattern.

7. Drive the vehicle several times with the conditions, such as engine rpm and engine load, shown in MISFIRE RPM and MISFIRE LOAD in the DATA LIST.
   HINT:
   In order to store misfire DTCs, it is necessary to drive the vehicle for the period of time shown in the table below, with the MISFIRE RPM and MISFIRE LOAD in the DATA LIST.

Engine RPM	Duration
Idling	3.5 minutes or more
1,000	3 minutes or more
2,000	1.5 minutes or more
3,000	1 minute or more

8. Check whether misfires have occurred by checking for DTCs and freeze frame data.
   HINT:
   Do not turn the ignition switch off until the stored DTC(s) and freeze frame data have been recorded. When the ECM returns to normal mode (default), the stored DTC(s), freeze frame data and other data will be erased.
9. Record the DTC(s), freeze frame data and misfire counts.
10. Turn the ignition switch off and wait for at least 5 seconds.

ES

INSPECTION PROCEDURE

HINT:

- If any DTCs other than misfire DTCs are output, troubleshoot those DTCs first.
- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.
- If the misfire does not recur when the vehicle is brought to the workshop, reproduce the conditions stored in the freeze frame data.
- If the misfire still cannot be reproduced even though the conditions stored in the freeze frame data have been duplicated, one of the following factors is considered to be a possible cause of the problem:
  (a) The fuel level is low.
  (b) Improper fuel is used.
  (c) The spark plugs are dirty.
  (d) The problem is complex due to multiple factors.
- After finishing repairs, check that no misfires occur in each cylinder (CYL #1, #2, #3 and #4).
- Be sure to confirm that no misfiring cylinder DTCs are set again by conducting the confirmation driving pattern, after the repairs.
- For 6 and 8 cylinder engines, the ECM intentionally does not set the specific misfiring cylinder DTCs at a high engine RPM. If misfires only occur during high engine RPM driving, only DTC P0300 is set.
  In the event of DTC P0300 being present, perform the following operations:
  (a) Clear the DTC (See page ES-38).
  (b) Start the engine and conduct the confirmation driving pattern.
  (c) Read the misfiring rates of each cylinder or DTC(s) using the tester.
  (d) Repair the cylinder(s) that has a high misfiring rate or is indicated by the DTC.
  (e) After finishing repairs, conduct the confirmation driving pattern again, in order to verify that DTC P0300 is not set.
- When either SHORT FT #1 or LONG FT #1 in the freeze frame data is outside the range of +-20 %, the air-fuel ratio may be rich (-20 % or less) or lean (+20 % or more).
- When the COOLANT TEMP in the freeze frame data is less than 75°C (167°F), the misfires occurred only while warming up the engine.

1	CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO MISFIRE DTCS)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P0300, P0301, P0302, P0303 and/or P0304	A
P0300, P0301, P0302, P0303 and/or P0304 and other DTCs	B

ES

HINT:
If any DTCs other than P0300, P0301, P0302, P0303 and P0304 are output, troubleshoot those DTCs first.

B → GO TO DTC CHART

A

2	READ VALUE USING INTELLIGENT TESTER (MISFIRE RPM AND MISFIRE LOAD)

(a) Connect the intelligent tester the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / MISFIRE / MISFIRE RPM and MISFIRE LOAD.
(d) Read and note the MISFIRE RPM and MISFIRE LOAD (engine load) values.
HINT:
The MISFIRE RPM and MISFIRE LOAD indicate the vehicle conditions under which the misfire occurred.

NEXT

3	CHECK PCV HOSE CONNECTIONS

OK:
PCV hose is connected correctly and is not damaged.

NG → REPAIR OR REPLACE PCV HOSE

OK

4	CHECK MISFIRE COUNT (CYL #1, #2, #3 AND #4)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Clear the DTCs (See page ES-38).

(e) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / MISFIRE / CYL #1, #2, #3 and #4.
(f) Allow the engine to idle.
(g) Read each value for CYL #1 to #4 displayed on the tester. If no misfire counts occur in any cylinders, perform the following procedures:
  (1) Shift the gear selector lever to the D position.
  (2) Check the CYL #1 to #4.
  (3) If misfire counts are still not displayed, perform steps (h) and (i) and then check the misfire counts again.
(h) Drive the vehicle with the MISFIRE RPM and MISFIRE LOAD noted in the "READ VALUE USING INTELLIGENT TESTER (MISFIRE RPM AND MISFIRE LOAD)" procedures above.
(i) Read the CYL #1 to #4 or DTCs displayed on the tester.

ES

Result

Misfire Count	Proceed to
Most misfires occur in only 1 or 2 cylinders	A
3 cylinders or more have equal misfire counts	B

HINT:
- If it is difficult to reproduce misfires for each cylinder, check the DATA LIST item called MISFIRE MARGIN. Try to find vehicle driving conditions that lower the MISFIRE MARGIN value. Values above 30 % are considered normal.
- If the freeze frame data's record of the ECT is below 75°C (167°F), the misfire may be detected only when the engine is cold.
- If the freeze frame data's record of the ENGINE RUN TIME is below 120 seconds, the misfire may be detected immediately after the engine is started.

B → Go to step 14

A

5 PERFORM ACTIVE TEST USING INTELLIGENT TESTER (FUEL CUT #1 TO #4)

(a) Allow the engine to idle.
(b) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / FUEL CUT#1 (to #4).
(c) If a cylinder has a high misfire count, cut fuel to that cylinder. Compare the misfire count of the cylinder before fuel cut and after fuel cut.

Result

Misfire Count in Each Cylinder	Proceed to
Misfire count of cylinder before fuel cut and after fuel cut roughly same	A
Misfire count of cylinder before fuel cut lower than after fuel cut	B


NOTICE:
This ACTIVE TEST cannot be performed while the vehicle is being driven.
HINT:
If the misfire count of the cylinder before and after the fuel cut are roughly the same, the cylinder is misfiring.
If the misfire count of the cylinder before the fuel cut is lower than after the fuel cut, the cylinder misfires sometimes.

B → Go to step 11

A

ES

6 CHECK SPARK PLUG

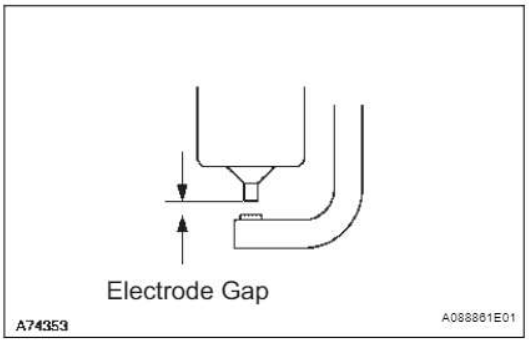

(a) Remove the ignition coil and the spark plug of the misfiring cylinder.
(b) Measure the spark plug electrode gap.
Standard gap:
1.0 to 1.1 mm (0.039 to 0.043 in.)
(c) Check the electrode for carbon deposits.
Recommended spark plug:


Manufacturers	Products
DENSO	SK20R11
NGK	IFR6A11

NOTICE:
If the electrode gap is larger than standard, replace the spark plug. Do not adjust the electrode gap.

NG → REPLACE SPARK PLUG

OK

7 CHECK FOR SPARKS AND IGNITION

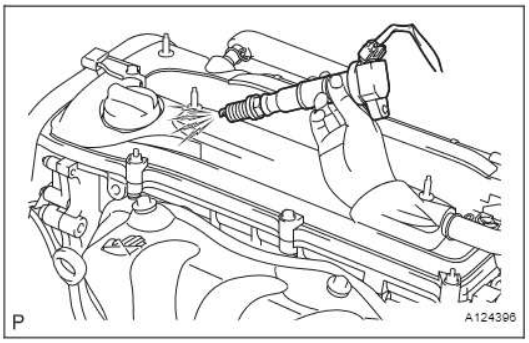

(a) Perform a spark test.
CAUTION:
All ways disconnect all fuel injector connectors.
NOTICE:
Do not crank the engine for more than 2 seconds.
(1) Remove the ignition coil from the cylinder head.
(2) Install the spark plug onto the ignition coil.
(3) Disconnect the 4 fuel injector connectors.
(4) Attach the spark plug assembly to the cylinder head.
(5) Crank the engine for less than 2 seconds and check for sparks.
OK:
Sparks jump across electrode gap.
(6) Reconnect the 4 fuel injector connectors.
(7) Install the ignition coil.

NG → Go to step 9

OK

8	CHECK CYLINDER COMPRESSION PRESSURE OF MISFIRING CYLINDER

(a) Measure the cylinder compression pressure of the misfiring cylinder (See page EM-3).

OK → Go to step 10

NG

CHECK ENGINE TO DETERMINE CAUSE OF LOW COMPRESSION

ES

9	CHANGE NORMAL SPARK PLUG AND CHECK FOR SPARKS OF MISFIRING CYLINDER

(a) Change the installed spark plug with a spark plug that functions normally.

(b) Perform a spark test.

CAUTION:

Always disconnect all fuel injector connectors.

NOTICE:

Do not crank the engine for more than 2 seconds.

(1) Install the spark plug onto the ignition coil.

(2) Disconnect the 4 fuel injector connectors.

(3) Attach the spark plug assembly to the cylinder head.

(4) Crank the engine for less than 2 seconds and check for sparks.

OK:

Sparks jump across electrode gap.

(5) Reconnect the 4 fuel injector connectors.


(6) Install the ignition coil.

NG → REPLACE IGNITION COIL ASSEMBLY THEN CONFIRM THAT THERE IS NO MISFIRE

OK

REPLACE SPARK PLUG

10	INSPECT ECM TERMINAL OF MISFIRING CYLINDER (#10, #20, #30, AND /OR #40 VOLTAGE)

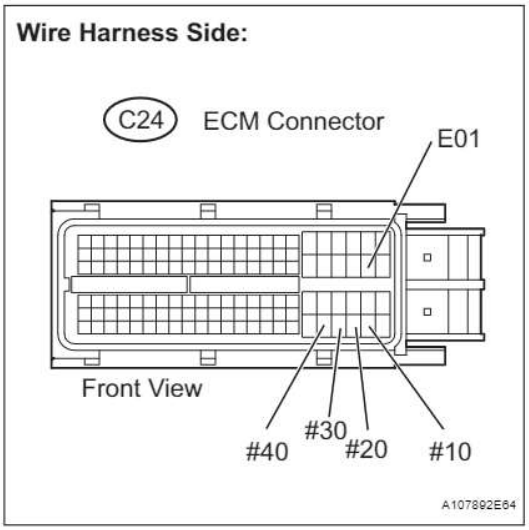

(a) Disconnect the C24 ECM connector.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage between the terminals of the ECM connector.

Standard voltage


Tester Connection	Specified Condition
C24-108 (#10) - C24-45 (E01)	9 to 14 V
C24-107 (#20) - C24-45 (E01)	9 to 14 V
C24-106 (#30) - C24-45 (E01)	9 to 14 V
C24-105 (#40) - C24-45 (E01)	9 to 14 V

(d) Reconnect the ECM connector.

OK → Go to step 12

NG

11	CHECK HARNESS AND CONNECTOR (INJECTOR - ECM)

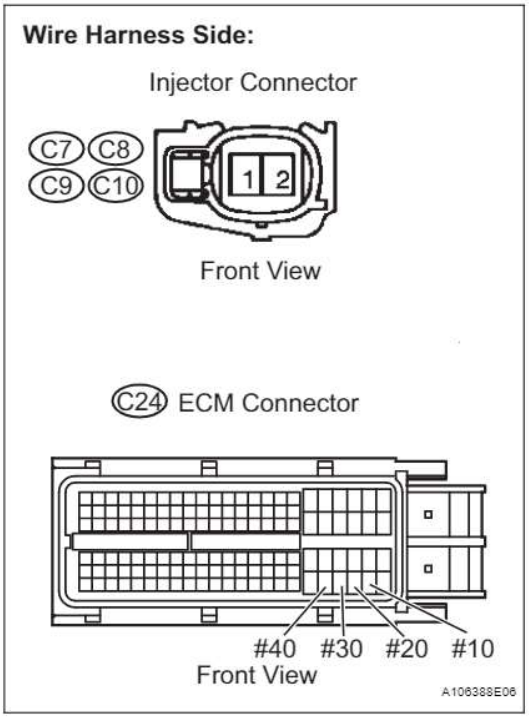

(a) Disconnect the C7 to C10 injector connectors (of the misfiring cylinder).
(b) Disconnect the C24 ECM connector.
(c) Turn the ignition switch to the ON position.
(d) Measure the resistance and voltage between the injector and the ECM connector terminals.

Standard voltage

Cylinder	Tester Connection	Specified Condition
No. 1	C7-1 - Ground	9 to 14 V
No. 2	C9-1 - Ground	9 to 14 V
No. 3	C8-1 - Ground	9 to 14 V
No. 4	C10-1 - Ground	9 to 14 V

Standard resistance

Cylinder	Tester Connection	Specified Condition
No. 1	C7-2 - Ground	10 kΩ or higher
	C7-2 - C24-108 (#10)	Below 1 Ω
No. 2	C9-2 - Ground	10 kΩ or higher
	C9-2 - C24-107 (#20)	Below 1 Ω
No. 3	C8-2 - Ground	10 kΩ or higher
	C8-2 - C24-106 (#30)	Below 1 Ω
No. 4	C10-2 - Ground	10 kΩ or higher
	C10-2 - C24-105 (#40)	Below 1 Ω

(e) Reconnect the injector connector.
(f) Reconnect the ECM connector.

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

12 CHECK FUEL INJECTOR OF MISFIRING CYLINDER

(a) Check the injector injection (whether fuel volume is high or low, and whether injection pattern is poor).

NG → REPLACE FUEL INJECTOR ASSEMBLY

OK

13 CHECK VALVE CLEARANCE OF MISFIRING CYLINDER

NG → ADJUST VALVE CLEARANCE

OK

14 CHECK AIR INDUCTION SYSTEM

(a) Check the air induction system for vacuum leakage.
OK:
No leakage from air induction system.

NG → REPAIR OR REPLACE AIR INDUCTION SYSTEM

OK

15 CHECK VALVE TIMING (See page ES-78)

NG → ADJUST VALVE TIMING

OK

16 CHECK FUEL PRESSURE

(a) Check the fuel pressure (See page FU-9).

NG → CHECK AND REPLACE FUEL PUMP, PRESSURE REGULATOR, FUEL PIPE LINE AND FILTER

OK

17	READ VALUE USING INTELLIGENT TESTER (COOLANT TEMP) (See page ES-160)

NG → REPLACE ENGINE COOLANT TEMPERATURE SENSOR

OK ↓

18	READ VALUE USING INTELLIGENT TESTER (MAF) (See page ES-159)

NG → REPLACE MASS AIR FLOW METER

OK ↓

CHECK FOR INTERMITTENT PROBLEMS

DTC	P0327	Knock Sensor 1 Circuit Low Input (Bank 1 or Single Sensor)

DTC	P0328	Knock Sensor 1 Circuit High Input (Bank 1 or Single Sensor)


DESCRIPTION

Flat type knock sensors (non-resonant type) have structures that can detect vibrations over a wide band of frequencies: between approximately 6 kHz and 15 kHz.
Knock sensor is fitted onto the engine block to detect engine knocking.
The knock sensor contains a piezoelectric element which generates a voltage when it becomes deformed. The voltage is generated when the engine block vibrates due to knocking. Any occurrence of engine knocking can be suppressed by delaying the ignition timing.

ES

DTC No.	DTC Detection Condition	Trouble Area
P0327	Output voltage of knock sensor less than 0.5 V (1 trip detection logic)	• Short in knock sensor circuit • Knock sensor • ECM
P0328	Output voltage of knock sensor more than 4.5 V (1 trip detection logic)	• Open in knock sensor circuit • Knock sensor • ECM

HINT:
When any of DTCs P0327 and P0328 are set, the ECM enters fail-safe mode. During fail-safe mode, the ignition timing is delayed to its maximum retardation. Fail-safe mode continues until the ignition switch is turned off.
Reference: Inspection using an oscilloscope

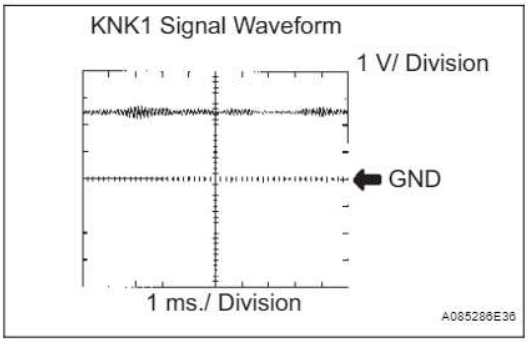

The correct waveform is as shown.

Items	Contents
Terminals	KNK1 - EKNK
Equipment Settings	1 V/Division 1 ms./Division
Conditions	Keep engine speed at 4,000 rpm with warm engine

MONITOR DESCRIPTION

If the output voltage transmitted by the knock sensor remains low or high for more than 1 second, the ECM interprets this as a malfunction in the sensor circuit, and sets a DTC.
The monitor for DTCs P0327 and P0328 begins to run when 5 seconds have elapsed since the engine was started.
If the malfunction is not repaired successfully, either DTC P0327 or P0328 is set 5 seconds after the engine is next started.

MONITOR STRATEGY

Related DTCs	P0327: Knock sensor range check (Low voltage) P0328: Knock sensor range check (High voltage)
Required Sensors/Components (Main)	Knock sensor
Required Sensors/Components (Related)	-
Frequency of Operation	Continuous
Duration	1 second
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

ES

Monitor runs whenever following DTCs are not present	None
Battery voltage	10.5 V or more
Time after engine start	5 seconds or more
Ignition switch	ON
Starter	OFF

TYPICAL MALFUNCTION THRESHOLDS


Knock Sensor Range Check (Low voltage) P0327:

Knock sensor voltage	Less than 0.5 V

Knock Sensor Range Check (High voltage) P0328:

Knock sensor voltage	More than 4.5 V

WIRING DIAGRAM

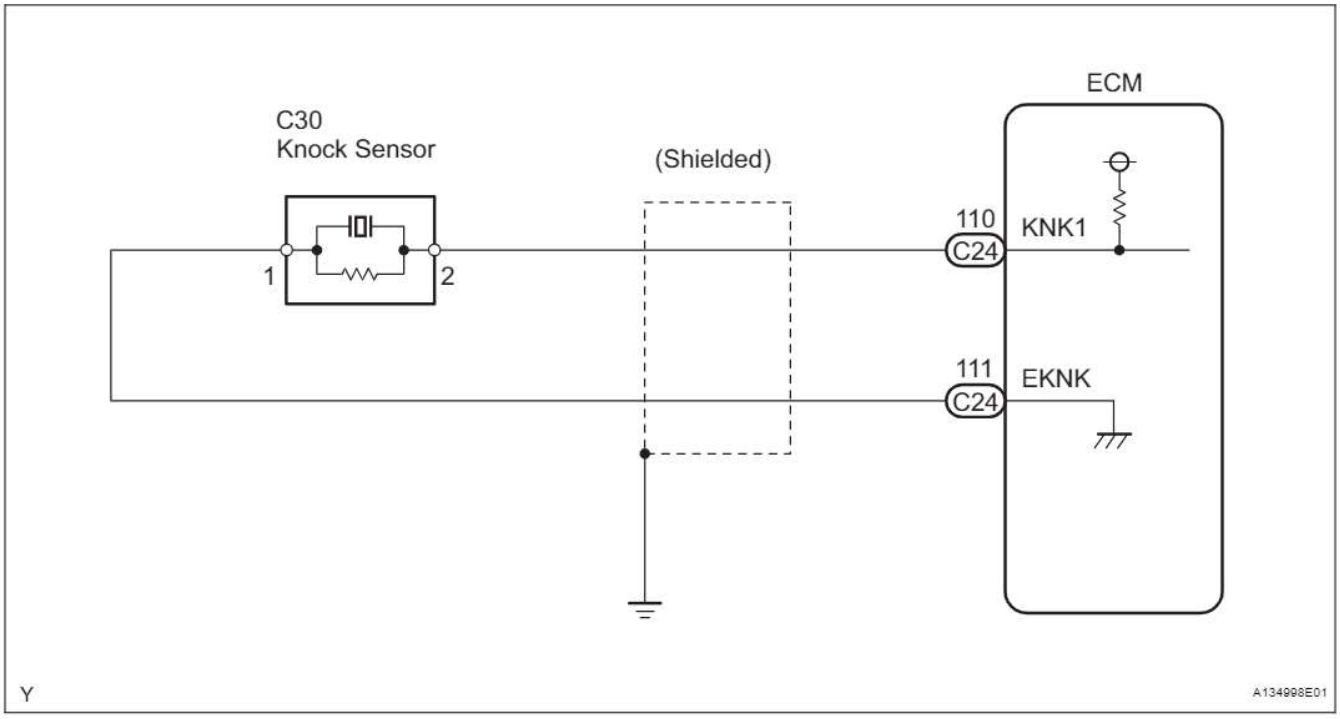

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1 READ VALUE USING INTELLIGENT TESTER (KNOCK FB VAL)

(a) Connect the intelligent tester to the DLC3.
(b) Start the engine and turn the tester on.
(c) Warm up the engine.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / USER DATA / KNOCK FB VAL.
(e) Read the values displayed on the tester while driving the vehicle.

Standard:
The values change.
HINT

Malfunction does not occur	Knock Feedback Values change
Malfunctions occur	Knock Feedback Values do not change


HINT:
The knock feedback value change can be confirmed by running the engine with a high load, for example, by activating the air conditioning system and revving up the engine.

NG → **Go to step 2**

OK

CHECK FOR INTERMITTENT PROBLEMS

2 **CHECK HARNESS AND CONNECTOR (ECM - KNOCK SENSOR)**

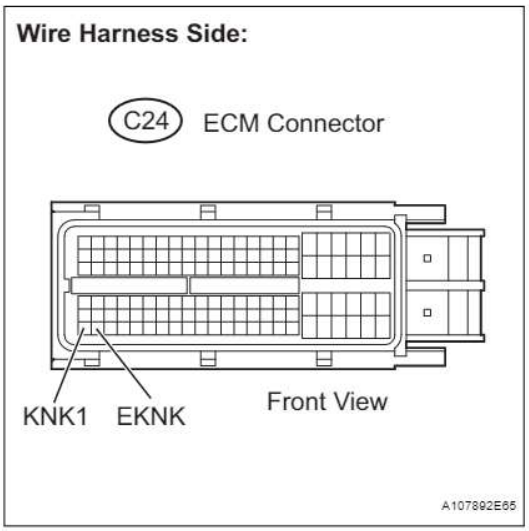

(a) Disconnect the C24 ECM connector.
(b) Measure the resistance between the terminals.
Standard


Tester Connection	Specified Condition
C24-110 (KNK1) - C24-111 (EKNK)	120 to 280 kΩ at 20°C (68°F)

(c) Reconnect the ECM connector.

NG → **Go to step 4**

OK

3 **INSPECT ECM (KNK1 VOLTAGE)**

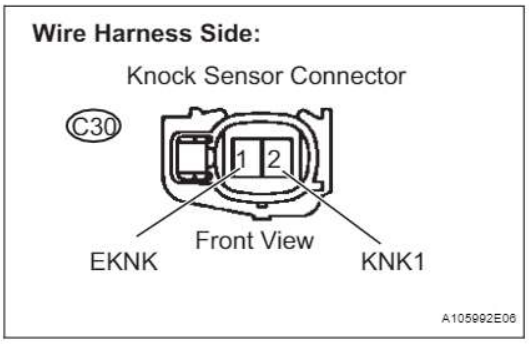

(a) Disconnect the C30 knock sensor connector.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage between the knock sensor terminals.
Standard voltage

Tester Connection	Specified Condition
C30-2 (KNK1) - C30-1 (EKNK)	4.5 to 5.5 V


(d) Reconnect the knock sensor connector.
NOTICE:
Fault may be intermittent. Check the wire harness and connectors carefully and retest.

NG → **REPLACE ECM**

OK

CHECK FOR INTERMITTENT PROBLEMS

4	INSPECT KNOCK SENSOR

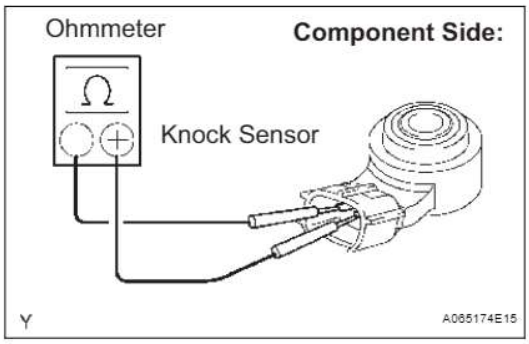

(a) Remove the knock sensor.
(b) Measure the resistance between the terminals.
Standard resistance

Tester Connection	Specified Condition
2 (KNK1) - 1 (EKNK)	120 to 280 kΩ at 20°C (68°F)

(c) Reinstall the knock sensor.

NG → REPLACE KNOCK SENSOR

OK

REPAIR OR REPLACE HARNESS OR CONNECTOR

DTC	P0335	Crankshaft Position Sensor "A" Circuit

DTC	P0339	Crankshaft Position Sensor "A" Circuit Intermittent


DESCRIPTION

The Crankshaft Position (CKP) sensor system consists of a CKP sensor plate and a pickup coil. The sensor plate has 34 teeth and is installed on the crankshaft. The pickup coil is made of wound copper wire, an iron core and magnet. The sensor plate rotates and, as each tooth passes through the pickup coil, a pulse signal is created. The pickup coil generates 34 signals per engine revolution. Based on these signals, the ECM calculates the crankshaft position and engine RPM. Using these calculations, the fuel injection time and ignition timing are controlled.

ES

DTC No.	DTC Detection Condition	Trouble Area
P0335	When either condition below is met: • No CKP sensor signal to ECM while cranking (1 trip detection logic) • No CKP sensor signal to ECM at engine speed of 600 rpm or more (1 trip detection logic)	• Open or short in CKP sensor circuit • CKP sensor • CKP sensor plate • ECM
P0339	Under conditions (a), (b) and (c), no CKP sensor signal to ECM for 0.05 seconds or more (1 trip detection logic): (a) Engine speed 1,000 rpm or more (b) Starter signal OFF (c) 3 seconds or more have elapsed since starter signal switched from ON to OFF	• Open or short in CKP sensor circuit • CKP sensor • CKP sensor plate • ECM

Reference: Inspection using an oscilloscope.

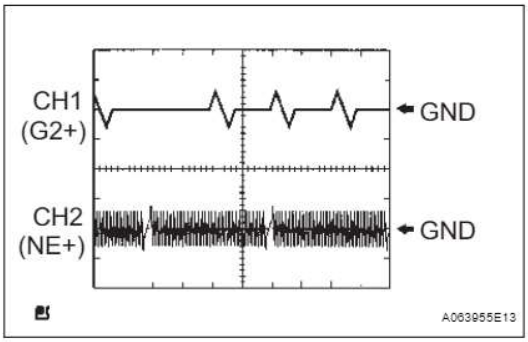

HINT:

- The correct waveform is as shown.
- G2+ stands for the Camshaft Position (CMP) sensor signal, and NE+ stands for the CKP sensor signal.
- Grounding failure of the shielded wire may cause noise in waveforms.

Items	Contents
Terminals	CH1: G2+ - G2- CH2: NE+ - NE-
Equipment Settings	5 V/Division, 20 ms./Division
Conditions	Cranking or idling

MONITOR DESCRIPTION

If there is no signal from the CKP sensor despite the engine revolving, the ECM interprets this as a malfunction of the sensor.
If the malfunction is not repaired successfully, a DTC is set 10 seconds after the engine is next started.

MONITOR STRATEGY

Related DTCs	P0335: CKP sensor range check or rationality
Required Sensors/Components (Main)	CKP sensor
Required Sensors/Components (Related)	CMP sensor
Frequency of Operation	Continuous
Duration	3 times
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

All:

Monitor runs whenever following DTCs are not present	None

Case 1:

Time after starter OFF to ON	0.3 seconds or more
Number of CMP sensor signal pulse	6 times
Battery voltage	7 V or more
CMP sensor circuit	OK
Ignition switch	ON

Case 2:

Starter	OFF
Engine speed	600 rpm or more
Time after starter from ON to OFF	3 seconds or more

TYPICAL MALFUNCTION THRESHOLDS

Case 1:

Number of CKP sensor signal pulse	132 or less, and 174 or more


Case 2:

Engine speed signal	No signal

COMPONENT OPERATING RANGE

CKP sensor	• CKP sensor output voltage fluctuates while crankshaft revolving • 34 CKP sensor signals per crankshaft revolution

WIRING DIAGRAM

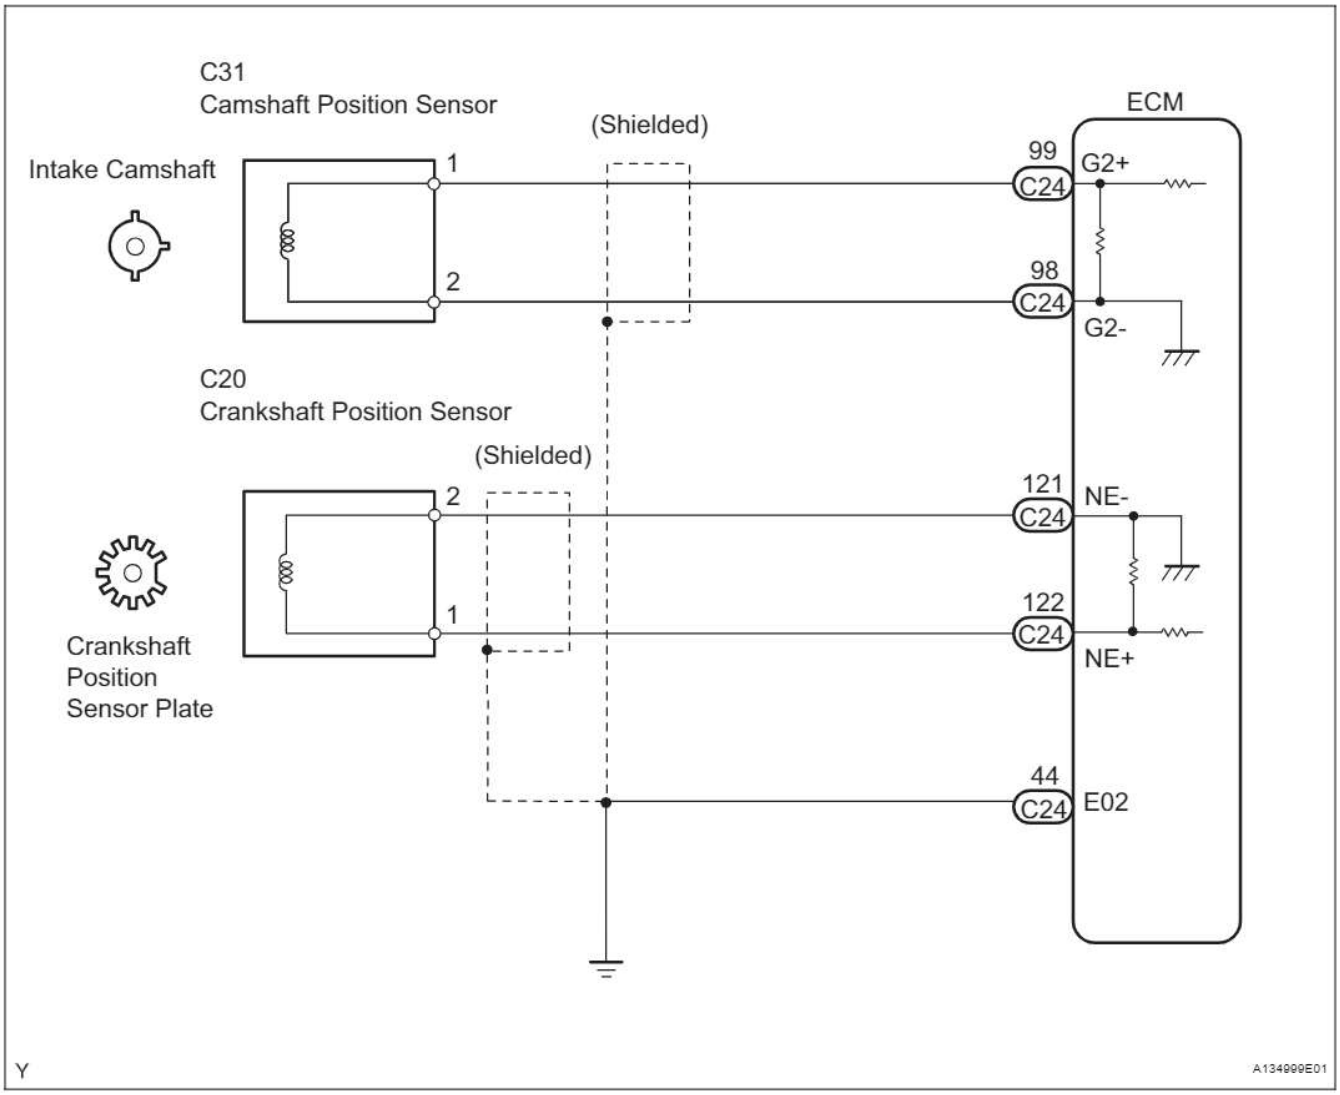

INSPECTION PROCEDURE

HINT:

- If no problem is found through this diagnostic troubleshoot procedure, troubleshoot the engine mechanical systems.
- Check the engine speed. The engine speed can be checked by using the intelligent tester. Follow the procedure below:
  (a) Connect the intelligent tester to the DLC3.
  (b) Start the engine.
  (c) Turn the tester on.
  (d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / ENGINE SPD.
  The engine speed may be indicated as zero despite the engine revolving normally. This is caused by a lack of NE signals from the Crankshaft Position (CKP) sensor. Alternatively, the engine speed may be indicated as lower than the actual engine speed if the CKP sensor output voltage is insufficient.
- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	READ VALUE USING INTELLIGENT TESTER (ENGINE SPD)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / ENGINE SPD.
(e) Start the engine.
(f) Read the values displayed on the tester while the engine is running.
Standard:
Correct values are displayed.
HINT:
- To check the engine speed change, display the graph on the tester.
- If the engine does not start, check the engine speed while cranking.
- If the engine speed indicated on the tester remains zero (0), there may be an open or short in the Crankshaft Position (CKP) sensor circuit.

NG → **Go to step 2**

OK →

CHECK FOR INTERMITTENT PROBLEMS

2	INSPECT CRANKSHAFT POSITION SENSOR (RESISTANCE)

Component Side:



CKP Sensor

G037727E07

(a) Disconnect the C20 CKP sensor connector.
(b) Measure the resistance between terminals 1 and 2.
Standard resistance


Tester Connection	Specified Condition
1 - 2	1,150 to 1,450 Ω at 20°C (68°F)

(c) Reconnect the CKP sensor connector.

NG → **REPLACE CRANKSHAFT POSITION SENSOR**

OK →

3	CHECK HARNESS AND CONNECTOR (CRANKSHAFT POSITION SENSOR - ECM)

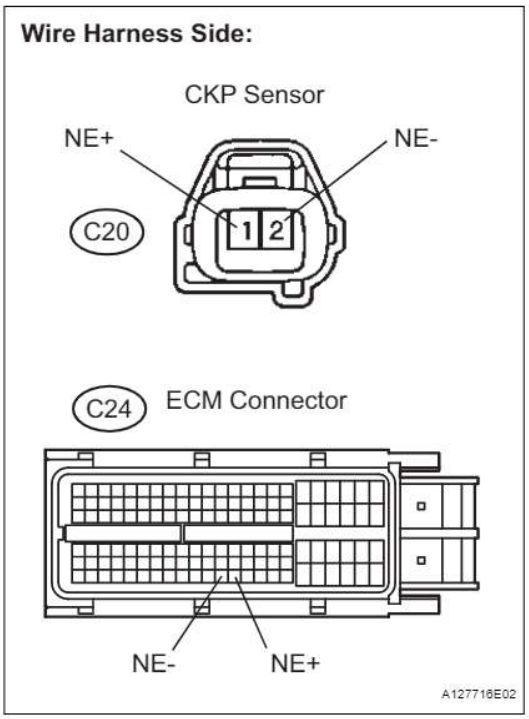

(a) Disconnect the C20 CKP sensor connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)

Tester Connection	Specified Condition
C20-1 (NE+) - C24-122 (NE+)	Below 1 Ω
C20-2 (NE-) - C24-121 (NE-)	Below 1 Ω

Standard resistance (Check for short)


Tester Connection	Specified Condition
C20-1 (NE+) or C24-122 (NE+) - Body ground	10 kΩ or higher
C20-2 (NE-) or C24-121 (NE-) - Body ground	10 kΩ or higher

(d) Reconnect the ECM connector.
(e) Reconnect the CKP sensor connector.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

4	CHECK SENSOR INSTALLATION (CRANKSHAFT POSITION SENSOR)

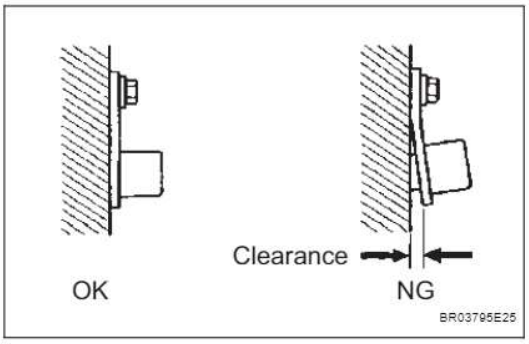

(a) Check the CKP sensor installation condition.

OK:

Sensor is installed correctly.

NG → **SECURELY REINSTALL SENSOR**

OK

5	CHECK CRANKSHAFT POSITION SENSOR PLATE (TEETH OF SENSOR PLATE)

(a) Check the teeth of the sensor plate.

OK:

Sensor plate does not have any cracks or deformation.

NG → **REPLACE CRANKSHAFT POSITION SENSOR PLATE**

OK

6	REPLACE CRANKSHAFT POSITION SENSOR

NEXT

7	CHECK WHETHER DTC OUTPUT RECURS

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Clear the DTCs (See page ES-38).
(e) Start the engine.
(f) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(g) Read the DTCs.

ES

Result

Display (DTC Output)	Proceed to
No output	A
P0335 or P0339	B

HINT:
If the engine does not start, replace the ECM.

B → REPLACE ECM

A

END

DTC	P0340	Camshaft Position Sensor "A" Circuit (Bank 1 or Single Sensor)


DESCRIPTION

The Camshaft Position (CMP) sensor consists of a magnet and an iron core which is wrapped with copper wire, and is installed onto the cylinder head. When the camshaft rotates, each of 3 teeth on the camshaft passes through the CMP sensor. This activates the internal magnet in the sensor, generating a voltage in the copper wire. The camshaft rotation is synchronized with the crankshaft rotation. When the crankshaft turns twice, the voltage is generated 3 times in the CMP sensor. The generated voltage in the sensor acts as a signal, allowing the ECM to locate the camshaft position. This signal is then used to control ignition timing, fuel injection timing, and the VVT system.

ES

DTC No.	DTC Detection Condition	Trouble Area
P0340	Case 1 • No Camshaft Position (CMP) sensor signal to ECM while cranking (2 trip detection logic) Case 2 • Camshaft/Crankshaft misalignment detected at engine speed of 600 rpm or more (1 trip detection logic)	• Open or short in CMP sensor circuit • CMP sensor • Camshaft • Jumped tooth of timing chain • ECM

HINT:
DTC P0340 indicates a malfunction relating to the CMP sensor (+) circuit (the wire harness between the ECM and CMP sensor, and the CMP sensor itself).
Reference: Inspection using an oscilloscope

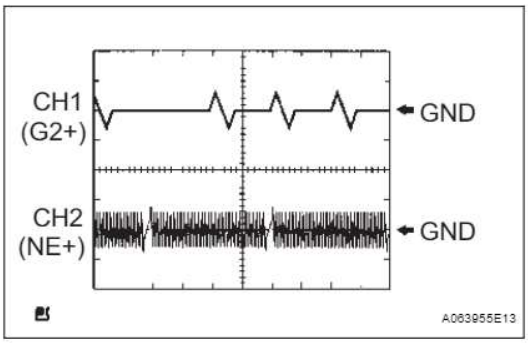

HINT:
- The correct waveform is as shown in the illustration.
- G2+ stands for the CMP sensor signal, and NE+ stands for the Crankshaft Position (CKP) sensor signal.
- Grounding failure of the shielded wire may cause noise in waveforms.

Items	Contents
Terminals	CH1: G2+ - G2- CH2: NE+ - NE-
Equipment Settings	5 V/Division, 20 ms./Division
Conditions	Cranking or idling

MONITOR DESCRIPTION

If no signal is transmitted by the CMP sensor despite the engine revolving, or the rotation of the camshaft and the crankshaft is not synchronized, the ECM interprets this as a malfunction of the sensor.
If the malfunction is not repaired successfully, a DTC is set 10 seconds after the engine is next started.

MONITOR STRATEGY

Related DTCs	P0340: Camshaft position sensor range check P0340: Camshaft position/crankshaft position misalignment
Required Sensors/Components (Main)	Camshaft Position (CMP) sensor
Required Sensors/Components (Related)	Crankshaft Position (CKP) sensor
Frequency of Operation	Continuous
Duration	4 seconds: CMP sensor range check 5 seconds: Camshaft position/crankshaft position misalignment
MIL Operation	2 driving cycles: CMP sensor range check Immediate: Camshaft position/crankshaft position misalignment
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

ES

All:

Monitor runs whenever following DTCs are not present	None

Camshaft Position Sensor Range Check:

Starter	ON
Minimal battery voltage while starter ON	Less than 11 V

Camshaft Position/Crankshaft Position Misalignment:

Engine speed	600 rpm or more
Starter	OFF

TYPICAL MALFUNCTION THRESHOLDS

Camshaft Position Sensor Range Check:

CMP sensor signal	No signal

Camshaft Position/Crankshaft Position Misalignment:

Camshaft position and crankshaft position phase	Misaligned

COMPONENT OPERATING RANGE

CMP sensor	• CMP sensor output voltage fluctuates while camshaft revolving • 3 CMP sensor signals per 2 crankshaft revolutions

WIRING DIAGRAM


Refer to DTC P0335 (See page ES-179).

INSPECTION PROCEDURE

HINT:

Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1 INSPECT CAMSHAFT POSITION SENSOR (RESISTANCE)

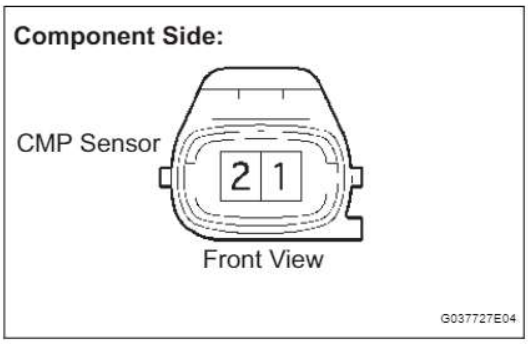

(a) Disconnect the C31 Camshaft Position (CMP) sensor connector.
(b) Measure the resistance between terminals 1 and 2.
Standard resistance


Tester Connection	Specified Condition
1 - 2	950 to 1,250 Ω

(c) Reconnect the CMP sensor connector.

NG → REPLACE CAMSHAFT POSITION SENSOR

OK

2 CHECK HARNESS AND CONNECTOR (CAMSHAFT POSITION SENSOR - ECM)

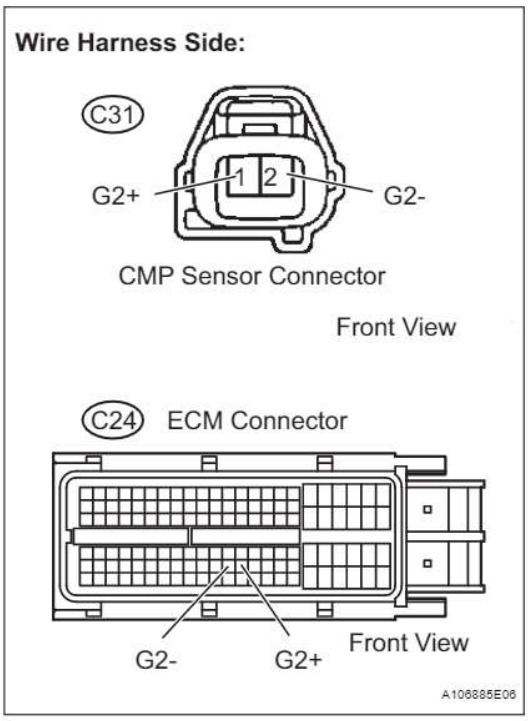

(a) Disconnect the C31 CMP sensor connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.
Standard resistance (Check for open)

Tester Connection	Specified Condition
C31-1 (G2+) - C24-99 (G2+)	Below 1 Ω
C31-2 (G2-) - C24-98 (G2-)	Below 1 Ω

Standard resistance (Check for short)


Tester Connection	Specified Condition
C31-1 (G2+) or C24-99 (G2+) - Body ground	10 kΩ or higher
C31-2 (G2-) or C24-98 (G2-) - Body ground	10 kΩ or higher

(d) Reconnect the ECM connector.
(e) Reconnect the CMP sensor connector.

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

3	CHECK SENSOR INSTALLATION (CAMSHAFT POSITION SENSOR)

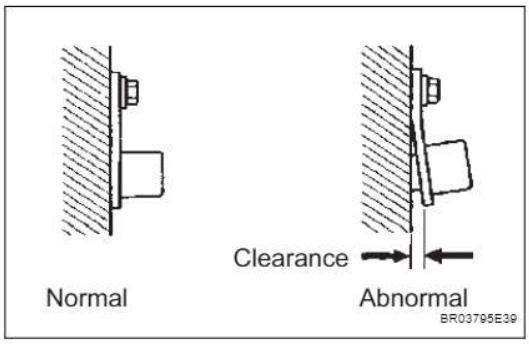

(a) Check the CMP sensor installation condition.
OK:
Sensor is installed correctly.

NG → **SECURELY REINSTALL SENSOR**

OK

4	CHECK VALVE TIMING (See page ES-78)

NG → **ADJUST VALVE TIMING**

OK

5	CHECK CAMSHAFT

(a) Check the teeth of the camshaft.
OK:
Camshaft teeth do not have any cracks or deformation.

NG → **REPLACE CAMSHAFT**

OK

6	REPLACE CAMSHAFT POSITION SENSOR

NEXT

7	CHECK WHETHER DTC OUTPUT RECURS

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Clear the DTCs (See page ES-38).
(e) Start the engine.
(f) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES.
(g) Read the DTCs.

Result

Display (DTC Output)	Proceed to
No output	A

Display (DTC Output)	Proceed to
P0340	B

HINT:
If the engine does not start, replace the ECM.

B → REPLACE ECM

A

END

ES

DTC	P0351	Ignition Coil "A" Primary / Secondary Circuit
DTC	P0352	Ignition Coil "B" Primary / Secondary Circuit
DTC	P0353	Ignition Coil "C" Primary / Secondary Circuit
DTC	P0354	Ignition Coil "D" Primary / Secondary Circuit

DESCRIPTION

HINT:


- These DTCs indicate malfunctions relating to the primary circuit.
- If DTC P0351 is set, check the No. 1 ignition coil circuit.
- If DTC P0352 is set, check the No. 2 ignition coil circuit.
- If DTC P0353 is set, check the No. 3 ignition coil circuit.
- If DTC P0354 is set, check the No. 4 ignition coil circuit.

ES


A Direct Ignition System (DIS) is used on this vehicle.

The DIS is a 1-cylinder ignition system in which each cylinder is ignited by one ignition coil and one spark plug is connected to the end of each secondary wiring. A powerful voltage, generated in the secondary wiring, is applied directly to each spark plug. The sparks of the spark plugs pass from the center electrode to the ground electrodes.

The ECM determines the ignition timing and transmits the ignition (IGT) signals to each cylinder. Using the IGT signal, the ECM turns the power transistor inside the igniter on and off. The power transistor, in turn, switches on and off the current to the primary coil. When the current to the primary coil is cut off, a powerful voltage is generated in the secondary coil. This voltage is applied to the spark plugs, causing them to spark inside the cylinders. As the ECM cuts the current to the primary coil off, the igniter sends back an ignition confirmation (IGF) signal to the ECM, for each cylinder ignition.

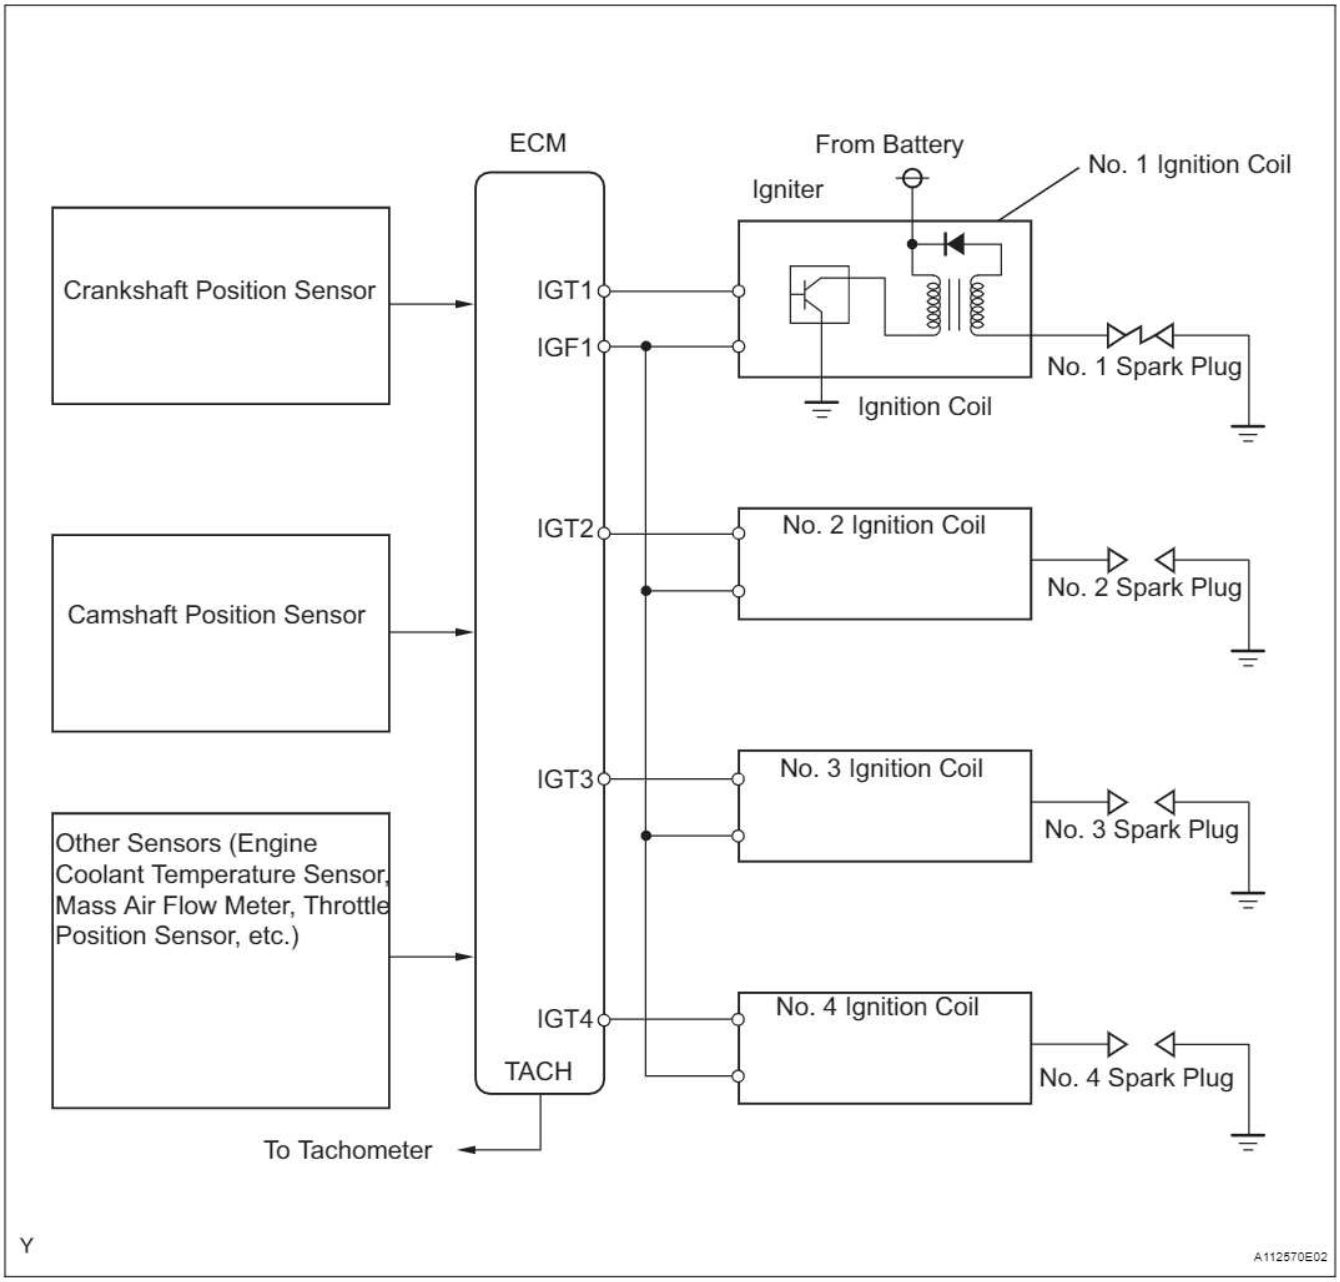

DTC No.	DTC Detection Condition	Trouble Area
P0351 P0352 P0353 P0354	No IGF signal to ECM while engine running (1 trip detection logic)	• Ignition system • Open or short in IGF1 or IGT circuit (1 to 4) between ignition coil and ECM • No. 1 to No. 4 ignition coils • ECM

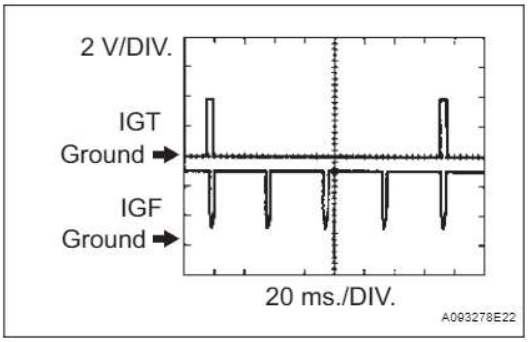


Reference: Inspection using an oscilloscope.
While cranking or idling the engine, check the waveform between terminals IGT (1 to 4) and E1, and IGF1 and E1 of the ECM connector.

ES

Items	Contents
Terminals	CH1: IGT1, IGT2, IGT3, IGT4 - E1 CH2: IGF1 - E1
Equipment Settings	2 V/Division 20 ms./Division
Conditions	Cranking or idling

MONITOR DESCRIPTION

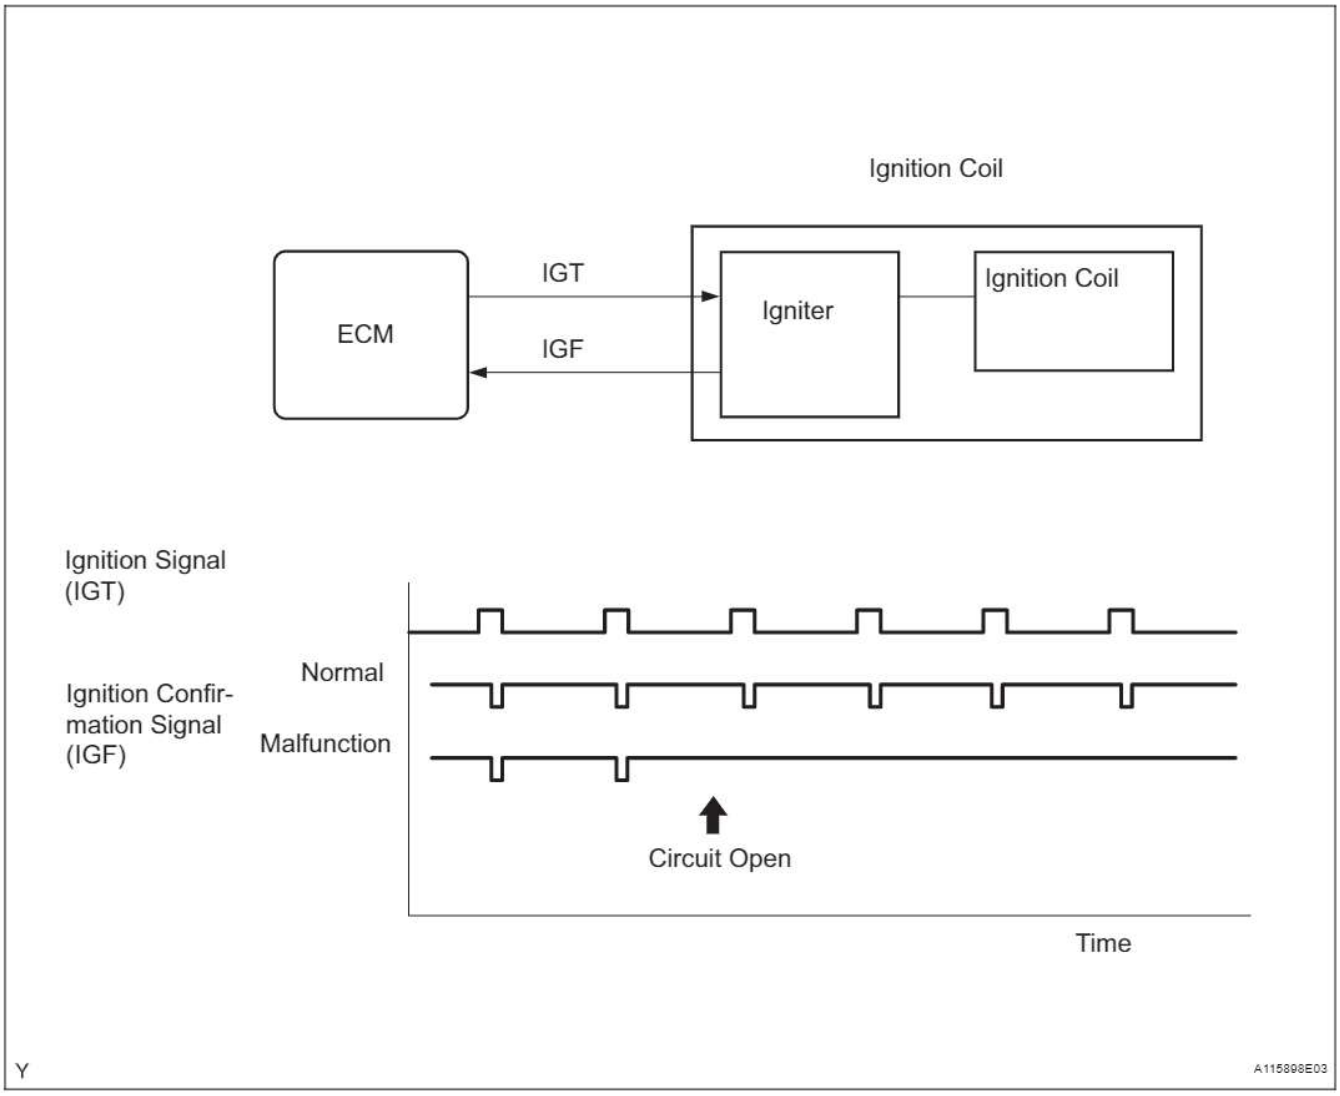

If the ECM does not receive any IGF signals despite transmitting the IGT signal, it interprets this as a fault in the igniter and sets a DTC.
If the malfunction is not repaired successfully, a DTC is set 1 second after the engine is next started.

MONITOR STRATEGY

Related DTCs	P0351: Igniter (cylinder 1) malfunction P0352: Igniter (cylinder 2) malfunction P0353: Igniter (cylinder 3) malfunction P0354: Igniter (cylinder 4) malfunction
Required Sensors/Components (Main)	Igniter
Required Sensors/Components (Related)	Crankshaft position sensor
Frequency of Operation	Continuous
Duration	0.512 seconds
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None
Either of the following conditions A or B is met	-

A. Engine RPM	1,500 rpm or less
B. Starter	OFF
Either of the following conditions C or D is met	-
C. Both of the following conditions (a) and (b) are met	-
(a) Engine speed	500 rpm or less
(b) Battery voltage	6 V or more
D. All of the following conditions (a), (b) and (c) are met	-
(a) Engine speed	More than 500 rpm
(b) Battery voltage	10 V or more
(c) Number of sparks after CPU reset	5 sparks or more


TYPICAL MALFUNCTION THRESHOLDS

IGF signal	ECM does not receive any IGF signal despite ECM sending IGT signal to igniter

COMPONENT OPERATING RANGE

IGF signal	Igniter transmits IGF signal when it receives IGT signal from ECM

WIRING DIAGRAM

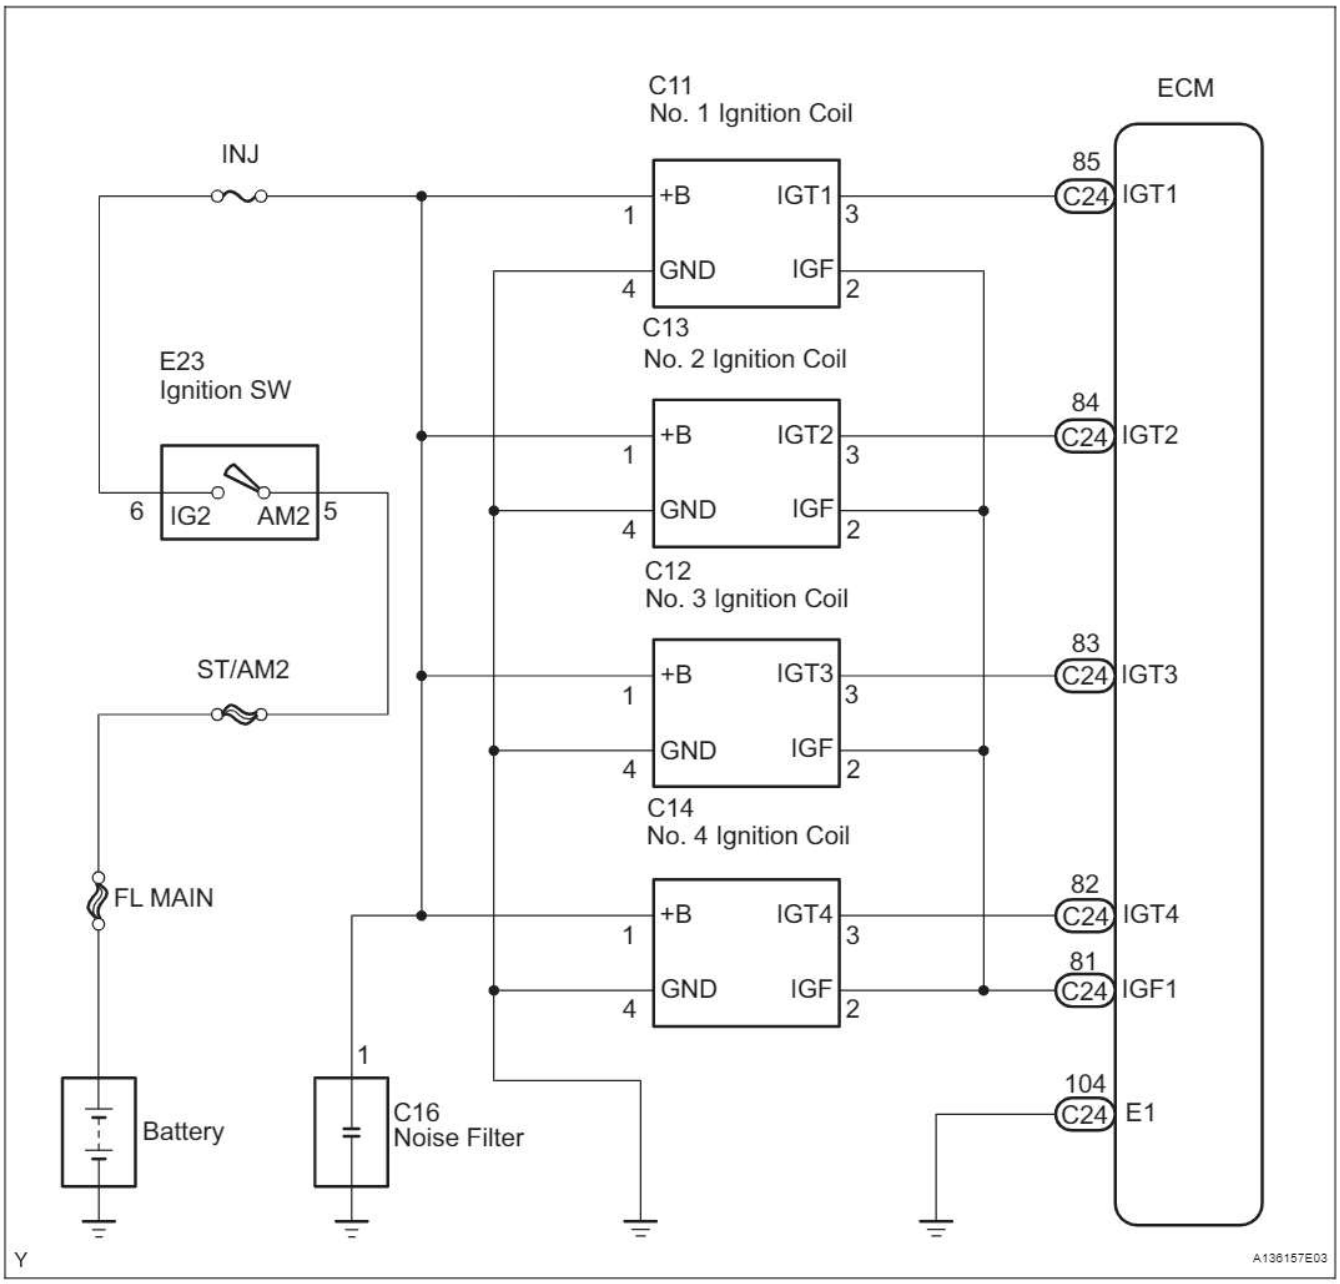


INSPECTION PROCEDURE

HINT:

Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1 INSPECT IGNITION COIL ASSEMBLY (POWER SOURCE)

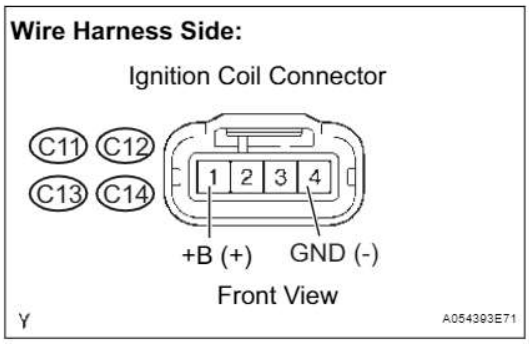

(a) Disconnect the C11 to C14 ignition coil connectors.
(b) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)

Tester Connection	Specified Condition
C11-4 (GND) - Body ground	Below 1 Ω
C13-4 (GND) - Body ground	Below 1 Ω
C12-4 (GND) - Body ground	Below 1 Ω
C14-4 (GND) - Body ground	Below 1 Ω

(c) Turn the ignition switch to the ON position.
(d) Measure the voltage between the terminals of the wire harness side connectors.

Standard voltage


Tester Connection	Specified Condition
C11-1 (+B) - C11-4 (GND)	9 to 14 V
C13-1 (+B) - C13-4 (GND)	9 to 14 V
C12-1 (+B) - C12-4 (GND)	9 to 14 V
C14-1 (+B) - C14-4 (GND)	9 to 14 V

(e) Reconnect the ignition coil connectors.

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

2 CHECK HARNESS AND CONNECTOR (IGNITION COIL ASSEMBLY - ECM)

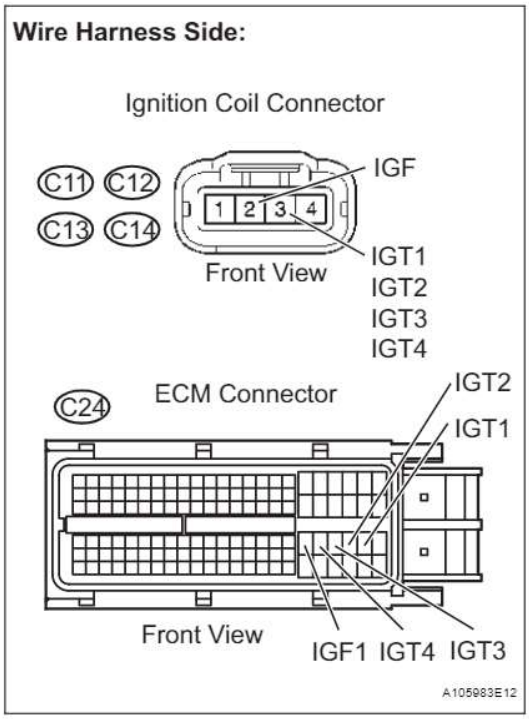

(a) Disconnect the ignition coil connectors.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)

Tester Connection	Specified Condition
C11-2 (IGF) - C24-81 (IGF1)	Below 1 Ω
C13-2 (IGF) - C24-81 (IGF1)	Below 1 Ω
C12-2 (IGF) - C24-81 (IGF1)	Below 1 Ω
C14-2 (IGF) - C24-81 (IGF1)	Below 1 Ω

Standard resistance (Check for open)

Tester Connection	Specified Condition
C11-3 (IGT1) - C24-85 (IGT1)	Below 1 Ω
C13-3 (IGT2) - C24-84 (IGT2)	Below 1 Ω
C12-3 (IGT3) - C24-83 (IGT3)	Below 1 Ω
C14-3 (IGT4) - C24-82 (IGT4)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
C11-2 (IGF) or C24-81 (IGF1) - Body ground	10 kΩ or higher
C13-2 (IGF) or C24-81 (IGF1) - Body ground	10 kΩ or higher
C12-2 (IGF) or C24-81 (IGF1) - Body ground	10 kΩ or higher
C14-2 (IGF) or C24-81 (IGF1) - Body ground	10 kΩ or higher

Standard resistance (Check for short)

Tester Connection	Specified Condition
C11-3 (IGT1) or C24-85 (IGT1) - Body ground	10 kΩ or higher
C13-3 (IGT2) or C24-84 (IGT2) - Body ground	10 kΩ or higher
C12-3 (IGT3) or C24-83 (IGT3) - Body ground	10 kΩ or higher
C14-3 (IGT4) or C24-82 (IGT4) - Body ground	10 kΩ or higher

ES

(d) Reconnect the ECM connector.
(e) Reconnect the ignition coil connectors.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

3 CHECK WHETHER DTC OUTPUT RECURS (DTC P0351, P0352, P0353 OR P0354)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Clear the DTCs (See page ES-38).
(d) Shuffle arrangement of the ignition coils (among No. 1 to No. 4 cylinders).
NOTICE:
Do not shuffle the connectors.
(e) Perform a simulation test.
(f) Check the DTCs displayed on the tester.

Result

Display (DTC Output)	Proceed to
Same DTC output	A
Different ignition coil DTC output	B

B → **REPLACE IGNITION COIL ASSEMBLY**

A

REPLACE ECM

DTC	P0420	Catalyst System Efficiency Below Threshold (Bank 1)

MONITOR DESCRIPTION

The ECM uses the sensors mounted in front of and behind the Three-Way Catalytic Converter (TWC) to monitor its efficiency.
The first sensor, the Air-Fuel Ratio (A/F) sensor, sends pre-catalyst information to the ECM. The second sensor, the Heated Oxygen (HO2) sensor, sends post-catalyst information to the ECM.
In order to detect any deterioration in the TWC, the ECM calculates the Oxygen Storage Capacity (OSC) of the TWC. This calculation is based on the voltage output of the HO2 sensor while performing active air-fuel ratio control, rather than the conventional detecting method, which uses the locus ratio.
The OSC value is an indication of the oxygen storage capacity of the TWC. When the vehicle is being driven with a warm engine, active air-fuel ratio control is performed for approximately 15 to 20 seconds. When it is performed, the ECM deliberately sets the air-fuel ratio to lean or rich levels. If the rich-lean cycle of the HO2 sensor is long, the OSC becomes greater. There is a direct correlation between the OSCs of the HO2 sensor and the TWC.
The ECM uses the OSC value to determine the state of the TWC. If any deterioration has occurred, it illuminates the MIL and sets the DTC.

DTC No.	DTC Detection Condition	Trouble Area
P0420	OSC value smaller than standard value under active air-fuel ratio control (2 trip detection logic)	• Front exhaust pipe (with TWC) • Gas leakage from exhaust system • Air-Fuel Ratio (A/F) sensor (sensor 1) • Heated Oxygen (HO2) sensor (sensor 2)

MONITOR STRATEGY

Related DTCs	P0420: Catalyst Deterioration
Required Sensors/Components (Main)	A/F sensor and HO2 sensor
Required Sensors/Components (Related)	Intake air temperature sensor, mass air flow meter, crankshaft position sensor and engine coolant temperature sensor
Frequency of Operation	Once per driving cycle
Duration	About 30 seconds
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	P0011 (VVT System 1 - Advance) P0012 (VVT System 1 - Retard) P0031, P0032 (A/F Sensor heater - Sensor 1) P0037, P0038 (O2 Sensor heater - Sensor 2) P0100 - P0103 (MAF meter) P0115 - P0118 (ECT sensor) P0120 - P0223, P2135 (TP sensor) P0125 (Insufficient ECT for Closed Loop) P0136 (O2 Sensor - Sensor 2) P0171, P0172 (Fuel system) P0300 - P0304 (Misfire) P0335 (CKP sensor) P0340 (CMP sensor) P0351 - P0354 (Igniter) P0500 (VSS) P2196 (A/F Sensor - rationality) P2A00 (A/F Sensor - slow response)
Battery voltage	11 V or more
Intake air temperature	-10°C (14°F) or more

Engine coolant temperature	75°C (167°F) or more
Atmospheric pressure	76 kPa (570 mmHg) or more
Idling	OFF
Engine RPM	Less than 4,000 rpm
A/F sensor status	Activated
Fuel system status	Closed loop
Engine load	10 to 80 %
All of the following conditions (a), (b) and (c) are met	-
(a) Mass air flow rate	2.5 to 50 g/sec.
(b) Estimated front catalyst temperature	650 to 840°C (1,202 to 1,544°F)
(c) Estimated rear catalyst temperature	400 to 770°C (752 to 1,418°F)
Rear HO2 sensor heater monitor	Completed
Shift position	4th (Automatic transaxle) 3rd or higher (Manual transaxle)

ES

TYPICAL MALFUNCTION THRESHOLDS

Oxygen Storage Capacity (OSC) of catalytic	Less than 0.07 g


MONITOR RESULT

Refer to CHECKING MONITOR STATUS (See page ES-20).

CONFIRMATION DRIVING PATTERN

HINT:

Performing this confirmation pattern will activate the catalyst monitor. This is very useful for verifying completion of a repair.

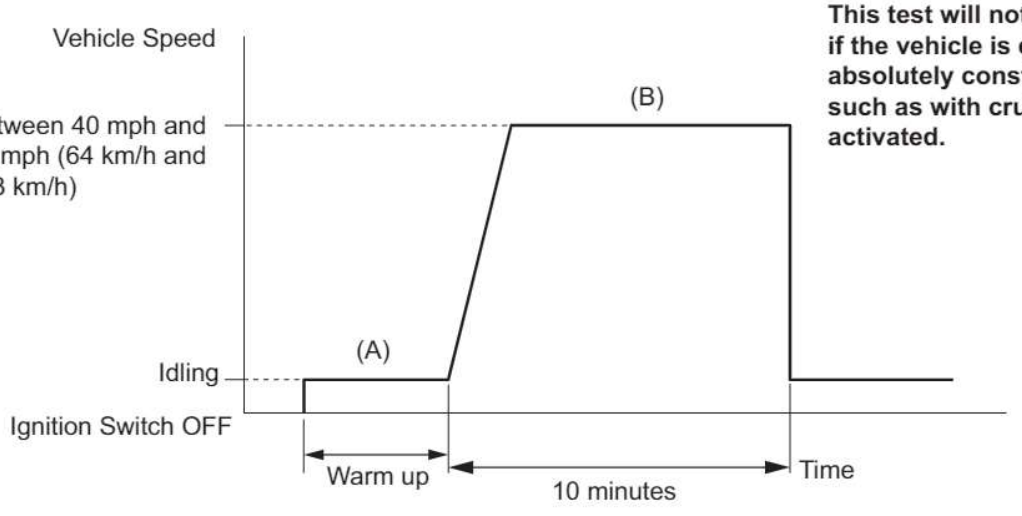


NOTICE:
This test will not be completed if the vehicle is driven at absolutely constant speed such as with cruise control activated.

(Note: Even if vehicle stops during driving pattern, test can be resumed)

P

A115372E53

1. Connect the intelligent tester to the DLC3.

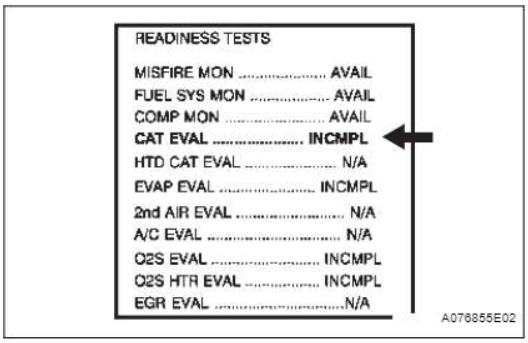


2. Turn the ignition switch to the ON position.
3. Turn the tester on.
4. Clear the DTCs (if set) (See page ES-38).
5. Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / USER DATA / CAT CMPL.
6. Check that CAT CMPL is INCMPL (incomplete).
7. Start the engine and warm it up. (Proceed to "A")
8. Drive the vehicle at between 40 mph and 70 mph (64 km/h and 113 km/h) for at least 10 minutes. (Proceed to "B")
9. Note the state of the Readiness Tests items. Those items will change to COMPL (complete) as CAT CMPL monitor operates.
10. On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES and check if any DTCs (any pending DTCs) are set.

HINT:
If CAT CMPL does not change to COMPL, and any pending DTCs fail to set, extend the driving time.

CONDITIONING FOR SENSOR TESTING

HINT:
Perform the operation with the engine speeds and time durations described below prior to checking the waveforms of the A/F and HO2 sensors. This is in order to activate the sensors sufficiently to obtain the appropriate inspection results.

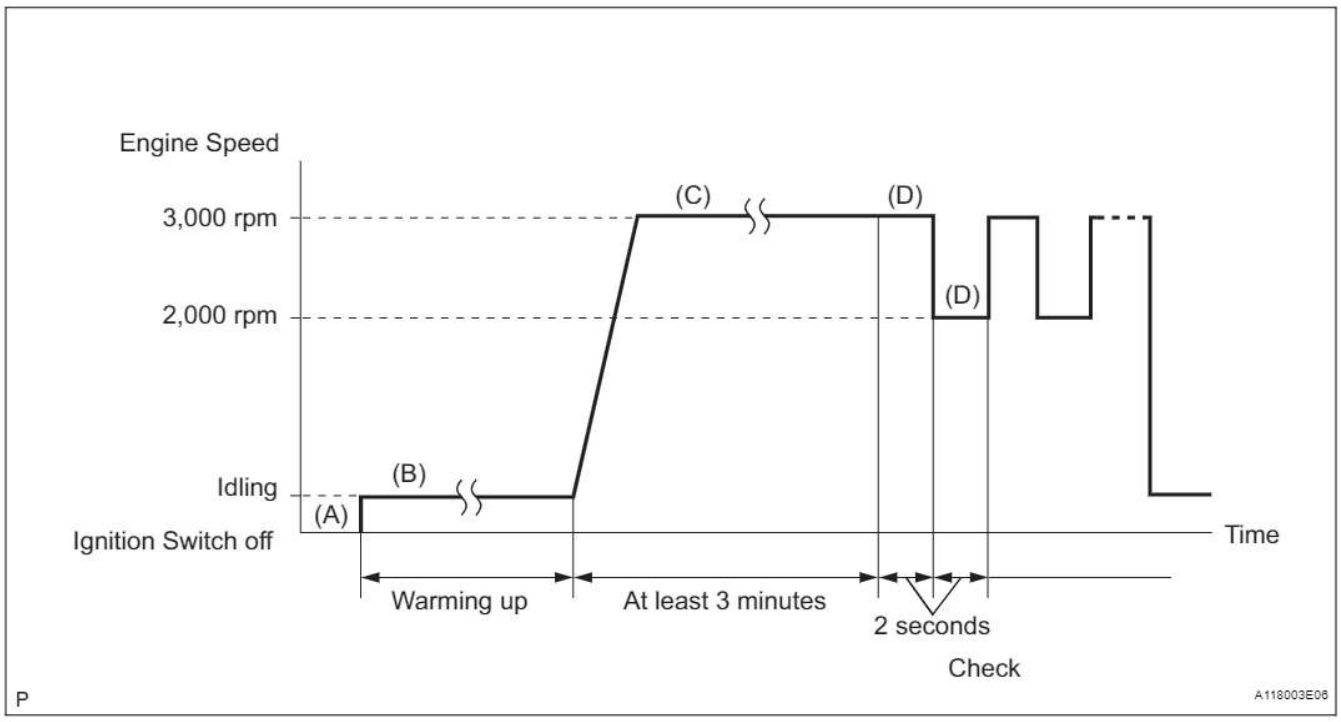


1. Connect the intelligent tester to the DLC3. (Proceed to "A")
2. Start the engine and warm it up with all the accessories switched OFF, until the engine coolant temperature stabilizes. (Proceed to "B")
3. Run the engine at an engine speed of between 2,500 rpm and 3,000 rpm for at least 3 minutes. (Proceed to "C")
4. While running the engine at 3,000 rpm and 2,000 rpm alternating at 2 second intervals, check the waveforms of the A/F and HO2 sensors using the tester. (Proceed to "D")

HINT:

- If either voltage output of the Air-Fuel Ratio (A/F) or Heated Oxygen (HO2) sensor does not fluctuate, or there is a noise in the waveform of either sensor, the sensor may be malfunctioning.
- If the voltage outputs of both the sensors remain lean or rich, the air-fuel ratio may be extremely lean or rich. In such cases, perform the following A/F CONTROL using the intelligent tester.
- If the Three-Way Catalytic Converter (TWC) has deteriorated, the HO2 sensor (located behind the TWC) voltage output fluctuates up and down frequently, even under normal driving conditions (active air-fuel ratio control is not performed).

Voltage output when active air-fuel ratio control not performed:

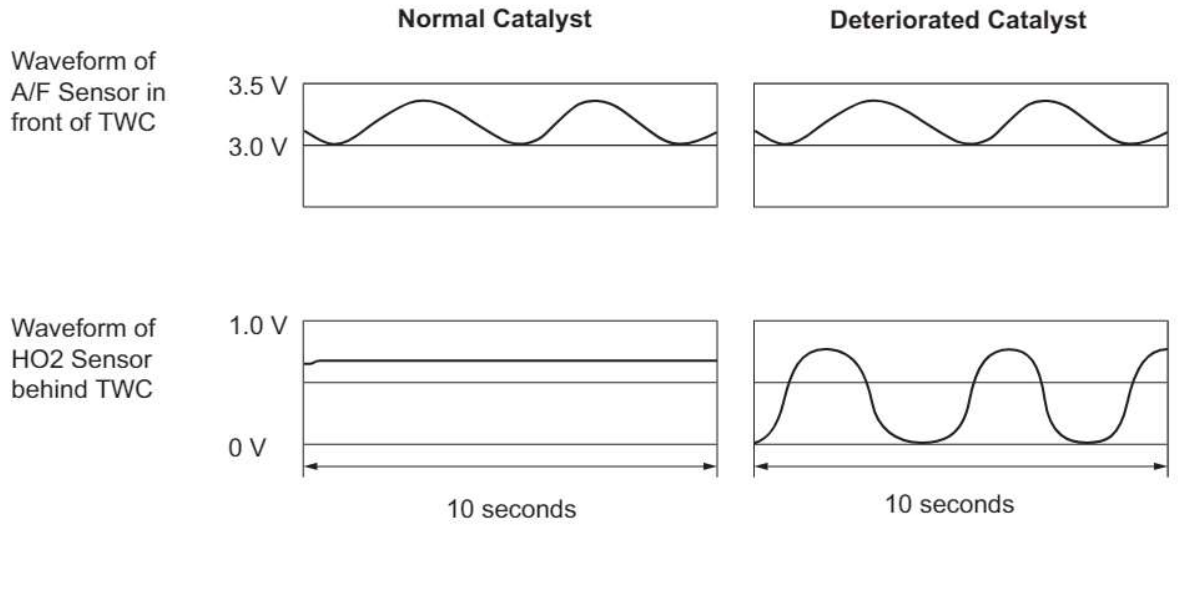

INSPECTION PROCEDURE

HINT:

Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P0420)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(d) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P0420	A
P0420 and other DTCs	B

HINT:
If any DTCs other than P0420 are output, troubleshoot those DTCs first.

B → GO TO DTC CHART

A

2 PERFORM ACTIVE TEST USING INTELLIGENT TESTER (A/F CONTROL)


ES



(a) Connect the intelligent tester to the DLC3.
(b) Start the engine and turn the tester on.
(c) Warm up the engine at an engine speed of 2,500 rpm for approximately 90 seconds.
(d) On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / A/F CONTROL.
(e) Perform the A/F CONTROL operation with the engine in an idling condition (press the RIGHT or LEFT button to change the fuel injection volume).
(f) Monitor the voltage outputs of the A/F and HO2 sensors (AFS B1 S1 and O2S B1 S2) displayed on the tester.

Result:

A/F sensor reacts in accordance with increases and decreases in fuel injection volume:
+25 % = Rich output:
Less than 3.0 V
-12.5 % = Lean output:
More than 3.35 V

NOTICE:
The A/F sensor has an output delay of a few seconds and the HO2 sensor has a maximum output delay of approximately 20 seconds.

Case	A/F Sensor (Sensor 1) Output Voltage		HO2 Sensor (Sensor 2) Output Voltage		Main Suspected Trouble Areas
1	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• Catalyst • Exhaust gas leakage
	Output Voltage More than 3.35 V Less than 3.0 V	 OK	Output Voltage More than 0.5 V Less than 0.4 V	 OK	
2	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• A/F sensor • A/F sensor heater • A/F sensor circuit
	Output Voltage Almost no reaction	NG	Output Voltage More than 0.5 V Less than 0.4 V	 OK	

Case	A/F Sensor (Sensor 1) Output Voltage		HO2 Sensor (Sensor 2) Output Voltage		Main Suspected Trouble Areas
3	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• HO2 sensor • HO2 sensor heater • HO2 sensor circuit
	Output Voltage More than 3.35 V Less than 3.0 V	 OK	Output Voltage Almost no reaction	 NG	
4	Injection volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		Extremely rich or lean actual air-fuel ratio • Injector • Fuel pressure • Gas leakage from exhaust system
	Output Voltage Almost no reaction	 NG	Output Voltage Almost no reaction	 NG	

ES

Following the A/F CONTROL procedure enables technicians to check and graph the voltage outputs of both the A/F and HO2 sensors.
To display the graph, select the following menu items on the tester: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / A/F CONTROL / USER DATA / AFS B1 S1 and O2S B1 S2; then press the YES button and then the ENTER button followed by the F4 button.

Result

Result	Proceed to
Case 1	A
Case 2	B
Case 3	C
Case 4	D

B → REPLACE AIR-FUEL RATIO SENSOR

C → Go to step 4

D → CHECK CAUSE OF EXTREMELY RICH OR LEAN ACTUAL AIR-FUEL RATIO, REPLACE FAULTY AREA AND GO TO NEXT STEP

A

3 CHECK FOR EXHAUST GAS LEAKAGE

OK:
No gas leakage.

NG → REPAIR OR REPLACE EXHAUST GAS LEAKAGE POINT

OK

REPLACE THREE-WAY CATALYTIC CONVERTER (BOTH FRONT AND REAR CATALYSTS (FRONT EXHAUST PIPE))

4	CHECK FOR EXHAUST GAS LEAKAGE

OK:
No gas leakage.

NG → REPAIR OR REPLACE EXHAUST GAS LEAKAGE POINT

OK ↓

REPLACE HEATED OXYGEN SENSOR

DTC	P043E	Evaporative Emission System Reference Orifice Clog Up
DTC	P043F	Evaporative Emission System Reference Orifice High Flow
DTC	P2401	Evaporative Emission Leak Detection Pump Stuck OFF
DTC	P2402	Evaporative Emission Leak Detection Pump Stuck ON
DTC	P2419	Evaporative Emission System Switching Valve Control Circuit Low

ES

DTC SUMMARY

DTCs	Monitoring Item	Malfunction Detection Condition	Trouble Area	Detection Timing	Detection Logic
P043E	Reference orifice clogged	P043E, P043F, P2401, P2402 and P2419 present when one of the following conditions is met during key-off EVAP monitor: • Reference orifice clogged • Reference orifice high-flow • Leak detection pump OFF malfunction • Leak detection pump ON malfunction • Vent valve ON (close) malfunction	• Canister pump module (Reference orifice, leak detection pump, vent valve) • Connector/wire harness (Canister pump module - ECM) • EVAP system hose (pipe from air inlet port to canister pump module, canister filter, fuel tank vent hose) • ECM	While ignition switch off	2 trip detection logic
P043F	Reference orifice high-flow				
P2401	Leak detection pump stuck OFF				
P2402	Leak detection pump stuck ON				
P2419	Vent valve stuck closed				

HINT:
The reference orifice is located inside the canister pump module.

DESCRIPTION

The description can be found in the EVAP (Evaporative Emission) System (See page ES-346).

INSPECTION PROCEDURE


Refer to the EVAP System (See page ES-352).


MONITOR DESCRIPTION

5 hours* after the ignition switch is turned off, the leak detection pump creates negative pressure (vacuum) in the EVAP system. The ECM monitors for leaks and actuator malfunctions based on the EVAP pressure.
HINT:
*: If the engine coolant temperature is not below 35°C (95°F) 5 hours after the ignition switch is turned off, the monitor check starts 2 hours later. If it is still not below 35°C (95°F) 7 hours after the ignition switch is turned off, the monitor check starts 2.5 hours later.

Sequence	Operations	Descriptions	Duration
-	ECM activation	Activated by soak timer 5, 7 or 9.5 hours after ignition switch turned off.	-
A	Atmospheric pressure measurement	Vent valve turned OFF (vent) and EVAP system pressure measured by ECM in order to register atmospheric pressure. If pressure in EVAP system not between 76 kPa-a and 110 kPa-a (570 mmHg-a and 825 mmHg-a), ECM cancels EVAP system monitor.	10 seconds
B	First reference pressure measurement	In order to determine reference pressure, leak detection pump creates negative pressure (vacuum) through reference orifice and then ECM checks if leak detection pump and vent valve operate normally.	60 seconds
C	EVAP system pressure measurement	Vent valve turned ON (closed) to shut EVAP system. Negative pressure (vacuum) created in EVAP system, and EVAP system pressure then measured. Write down measured value as it will be used in leak check. If EVAP pressure does not stabilize within 15 minutes, ECM cancels EVAP system monitor.	15 minutes*
D	Purge VSV monitor	Purge VSV opened and then EVAP system pressure measured by ECM. Large increase indicates normality.	10 seconds
E	Second reference pressure measurement	After second reference pressure measurement, leak check performed by comparing first and second reference pressure. If stabilized system pressure higher than second reference pressure, ECM determines that EVAP system leaking.	60 seconds
F	Final check	Atmospheric pressure measured and then monitoring result recorded by ECM.	-

*: If only a small amount of fuel is in the fuel tank, it takes longer for the EVAP pressure to stabilize.

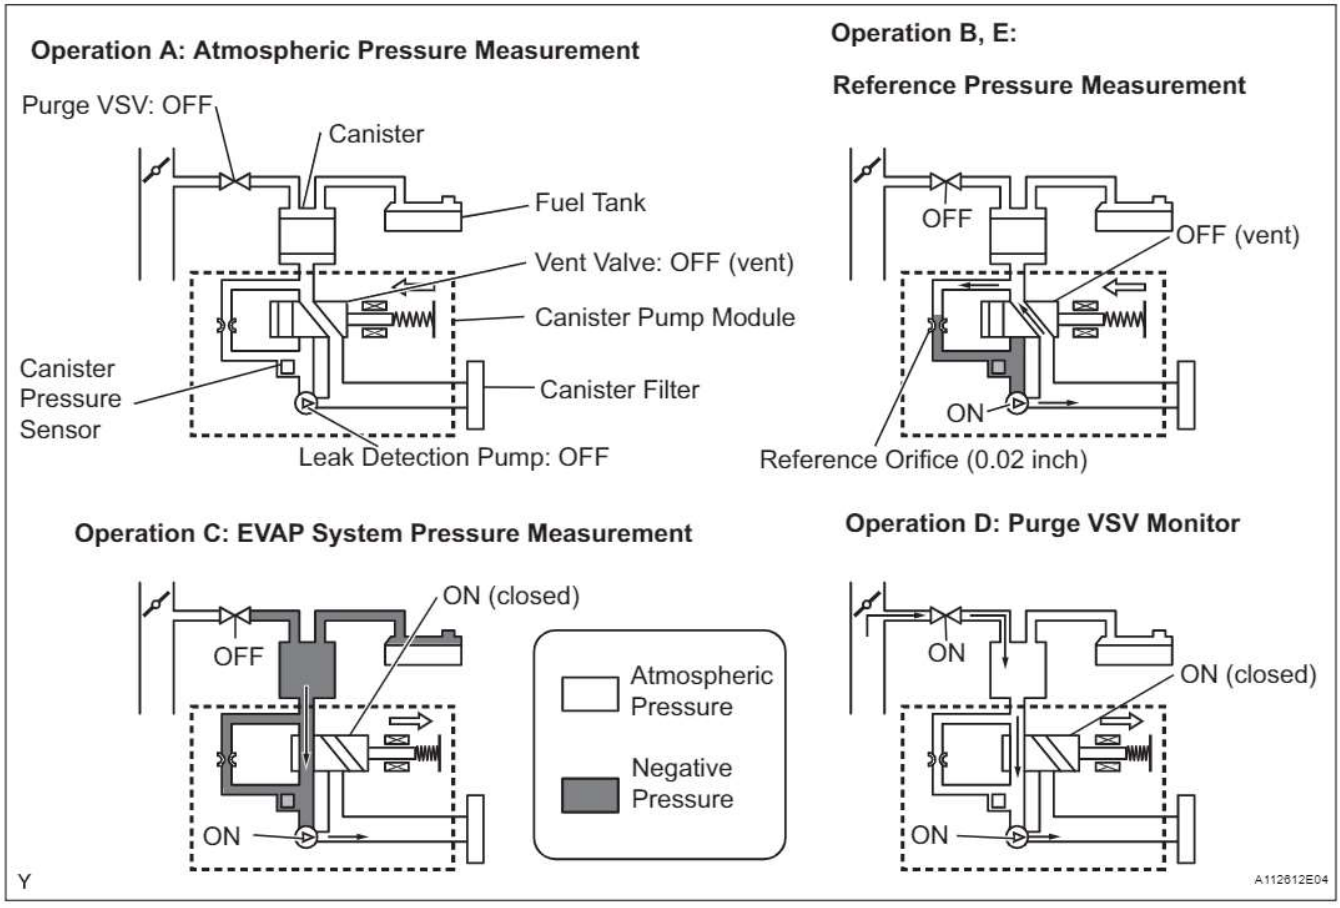

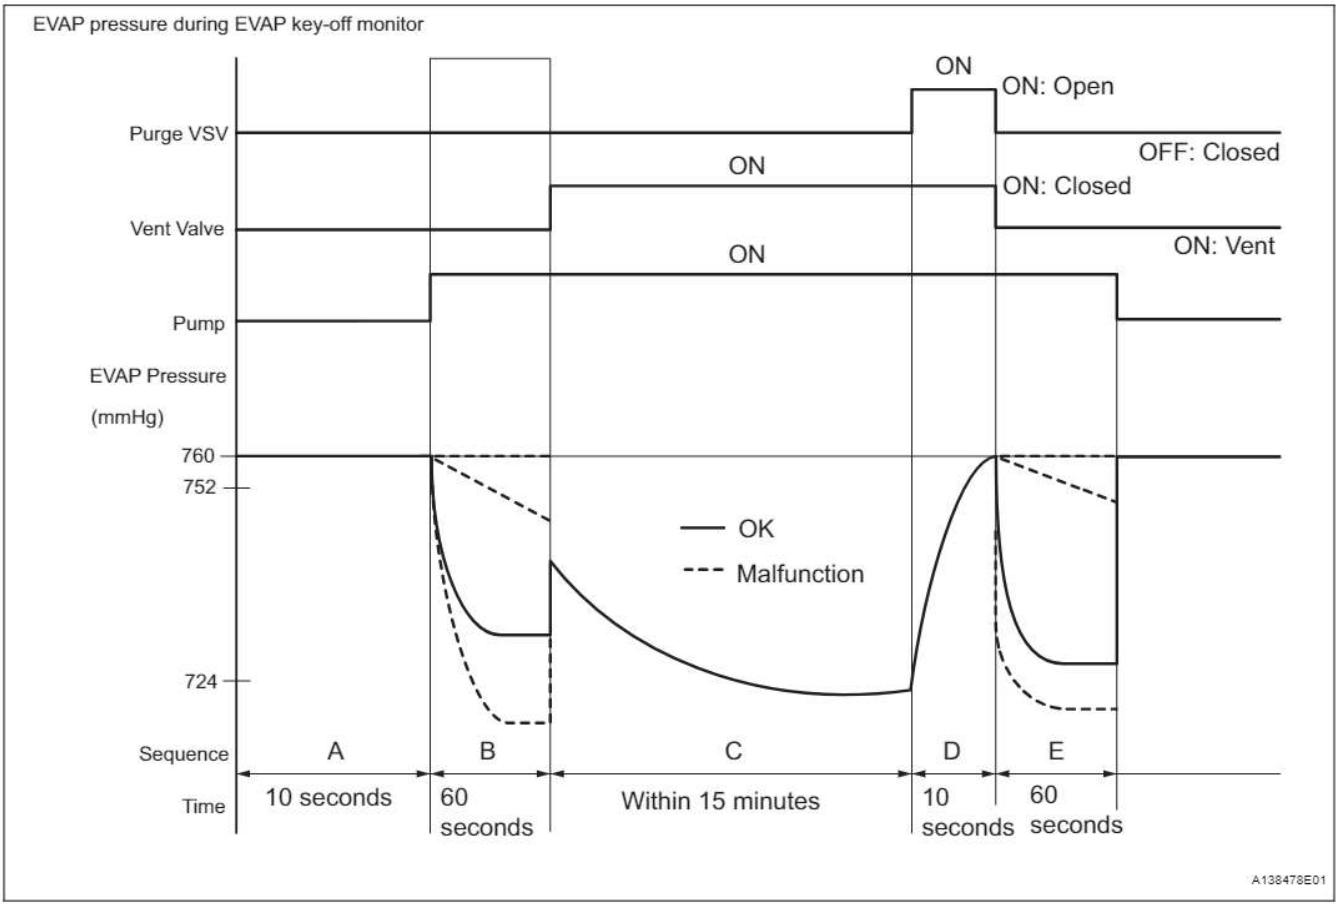

The leak detection pump creates negative pressure through the reference orifice. When the system is normal, the EVAP pressure is in 724 to 752 mmHg* and saturated within a minute.
If not, the ECM interprets this as a malfunction. The ECM will illuminate the MIL and set DTC if this malfunction is detected in consecutive drive cycle.
*: Typical valve

MONITOR STRATEGY

Required Sensors/Components	Purge VSV and canister pump module
Frequency of Operation	Once per driving cycle
Duration	Within 2 minutes (varies with amount of fuel in tank)
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None
EVAP key-off monitor runs when all of the following conditions are met	-
Atmospheric pressure	70 to 110 kPa-a (525 to 825 mmHg-a)
Battery voltage	10.5 V or more
Vehicle speed	Below 2.5 mph (4 km/h)
Ignition switch	off
Time after key off	5, 7 or 9.5 hours
EVAP pressure sensor malfunction (P0450, P0451, P0452 and P0453)	Not detected
EVAP canister purge valve	Not operated by scan tool
EVAP canister vent valve	Not operated by scan tool

EVAP leak detection pump	Not operated by scan tool
Both of the following conditions are met before key off	Conditions 1 and 2
1. Duration that vehicle has been driven	5 minutes or more
2. EVAP purge operation	Performed
ECT	4.4 to 35°C (40 to 95°F)
IAT	4.4 to 35°C (40 to 95°F)

1. Key-off monitor sequence 1 to 8

1. Atmospheric pressure measurement

Next sequence runs if following condition is met	-
Atmospheric pressure change	Less than 0.3 kPa-g (2.25 mmHg-g) in 1 second

2. First reference pressure measurement

Next sequence runs if all of the following conditions are met	Conditions 1, 2 and 3
1. EVAP pressure just after reference pressure measurement start	-1 kPa-g (-7.5 mmHg-g) or less
2. Reference pressure	-4.85 to -1.057 kPa-g (-36.4 to -7.93 mmHg-g)
3. Reference pressure	Saturated within 60 seconds

3. Vent valve stuck closed check

Next sequence runs if following condition is met	-
EVAP pressure change after vent valve is ON	0.3 kPa-g (2.25 mmHg-g) or more

4. Vacuum introduction

Next sequence runs if following condition is met	-
EVAP pressure	Saturated within 15 minutes

5. EVAP canister purge valve close stuck check

Next sequence runs if following condition is met	-
EVAP pressure change after purge valve is open	0.3 kPa-g (2.25 mmHg-g) or more

6. Second reference pressure measurement

Next sequence runs if all of the following conditions are met	Conditions 1, 2, 3 and 4
1. EVAP pressure just after reference pressure measurement start	-1 kPa-g (-7.5 mmHg-g) or less
2. Reference pressure	-4.85 to -1.057 kPa-g (-36.4 to -7.93 mmHg-g)
3. Reference pressure	Saturated within 60 seconds
4. Difference between first reference pressure and second reference pressure	Less than 0.5 kPa-g (3.75 mmHg-g)

7. Leak check

Next sequence runs if following condition is met	-
EVAP pressure when vacuum introduction is complete	Second reference pressure or less

8. Atmospheric pressure measurement

EVAP monitor complete if following condition is met	-
Atmospheric pressure difference between sequence 1 and 8	Within 0.3 kPa-g (2.25 mmHg-g)

TYPICAL MALFUNCTION THRESHOLDS

"Saturated" indicates that the EVAP pressure change is less than 0.286 kPa-g (2.14 mmHg-g) in 60 seconds.

One of the following conditions is met	-
EVAP pressure just after reference pressure measurement start	More than -1 kPa-g (-7.5 mmHg-g)
Reference pressure	Less than -4.85 kPa-g (-36.4 mmHg-g)
Reference pressure	-1.057 kPa-g (-7.93 mmHg-g) or more
Reference pressure	Not saturated within 60 seconds

Difference between first reference pressure and second reference pressure	0.7 kPa-g (5.25 mmHg-g) or more

MONITOR RESULT

Refer to CHECKING MONITOR STATUS (See page ES-20).

DTC	P0441	Evaporative Emission Control System Incorrect Purge Flow

DTC SUMMARY

DTC	Monitoring Item	Malfunction Detection Condition	Trouble Area	Detection Timing	Detection Logic
P0441	Purge VSV (Vacuum Switching Valve) stuck open	Leak detection pump creates negative pressure (vacuum) in EVAP system and EVAP system pressure measured. Reference pressure measured at start and at end of leak check. If stabilized pressure higher than [second reference pressure x 0.2], ECM determines that purge VSV stuck open.	• Purge VSV • Connector/wire harness (Purge VSV - ECM) • ECM • Canister pump module • Leakage from EVAP system	While ignition switch off	2 trip detection logic
	Purge VSV stuck closed	After EVAP leak check performed, purge VSV turned ON (open), and atmospheric air introduced into EVAP system. Reference pressure measured at start and at end of check. If pressure does not return to near atmospheric pressure, ECM determines that purge VSV stuck closed.	• Purge VSV • Connector/wire harness (Purge VSV - ECM) • ECM • Canister pump module • Leakage from EVAP system	While ignition switch off	2 trip detection logic
	Purge flow	While engine running, following conditions successively met: • Negative pressure not created in EVAP system when purge VSV turned ON (open) • EVAP system pressure change less than 0.5 kPa-g (3.75 mmHg-g) when vent valve turned ON (closed) • Atmospheric pressure change before and after purge flow monitor less than 0.1 kPa-g (0.75 mmHg-g)	• Purge VSV • Connector/wire harness (Purge VSV - ECM) • Leakage from EVAP line (Purge VSV - Intake manifold) • ECM	While engine running	2 trip detection logic

ES

DESCRIPTION

The description can be found in the EVAP (Evaporative Emission) System (See page ES-346).

INSPECTION PROCEDURE

Refer to the EVAP System (See page ES-352).

MONITOR DESCRIPTION

The two monitors, Key-Off and Purge Flow, are used to detect malfunctions relating to DTC P0441. The Key-Off monitor is initiated by the ECM internal timer, known as the soak timer, 5 hours* after the ignition switch is turned off. The purge flow monitor runs while the engine is running.

1. KEY-OFF MONITOR

   5 hours* after the ignition switch is turned off, the leak detection pump creates negative pressure (vacuum) in the EVAP system. The ECM monitors for leaks and actuator malfunctions based on the EVAP pressure.


   HINT:

   *: If the engine coolant temperature is not below 35°C (95°F) 5 hours after the ignition switch is turned off, the monitor check starts 2 hours later. If it is still not below 35°C (95°F) 7 hours after the ignition switch is turned off, the monitor check starts 2.5 hours later.

Sequence	Operations	Descriptions	Duration
-	ECM activation	Activated by soak timer 5, 7 or 9.5 hours after ignition switch turned off.	-


Sequence	Operations	Descriptions	Duration
A	Atmospheric pressure measurement	Vent valve turned OFF (vent) and EVAP system pressure measured by ECM in order to register atmospheric pressure. If pressure in EVAP system not between 76 kPa-a and 110 kPa-a (570 mmHg-a and 825 mmHg-a), ECM cancels EVAP system monitor.	10 seconds
B	First reference pressure measurement	In order to determine reference pressure, leak detection pump creates negative pressure (vacuum) through reference orifice and then ECM checks if leak detection pump and vent valve operate normally.	60 seconds
C	EVAP system pressure measurement	Vent valve turned ON (closed) to shut EVAP system. Negative pressure (vacuum) created in EVAP system, and EVAP system pressure then measured. Write down measured value as it will be used in leak check. If EVAP pressure does not stabilize within 15 minutes, ECM cancels EVAP system monitor.	15 minutes*
D	Purge VSV monitor	Purge VSV opened and then EVAP system pressure measured by ECM. Large increase indicates normality.	10 seconds
E	Second reference pressure measurement	After second reference pressure measurement, leak check performed by comparing first and second reference pressure. If stabilized system pressure higher than second reference pressure, ECM determines that EVAP system leaking.	60 seconds
F	Final check	Atmospheric pressure measured and then monitoring result recorded by ECM.	-

*: If only a small amount of fuel is in the fuel tank, it takes longer for the EVAP pressure to stabilize.

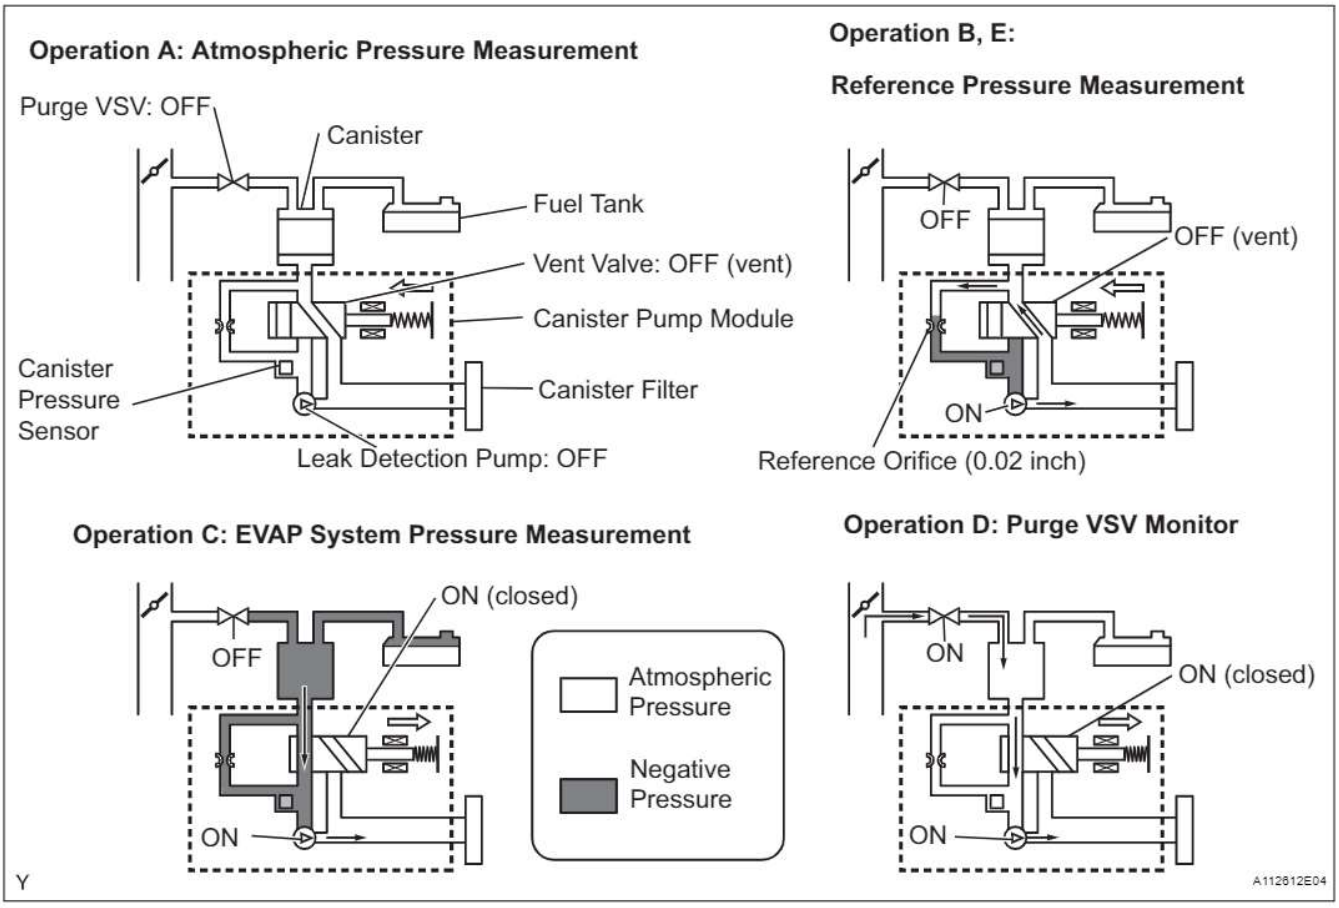

(a) Purge VSV stuck open


In operation C, the leak detection pump creates negative pressure (vacuum) in the EVAP system. The EVAP system pressure is then measured by the ECM using the canister pressure sensor. If the stabilized system pressure is higher than [second reference pressure x 0.2], the ECM interprets this as the purge VSV (Vacuum Switching Valve) being stuck open. The ECM illuminates the MIL and sets the DTC (2 trip detection logic).

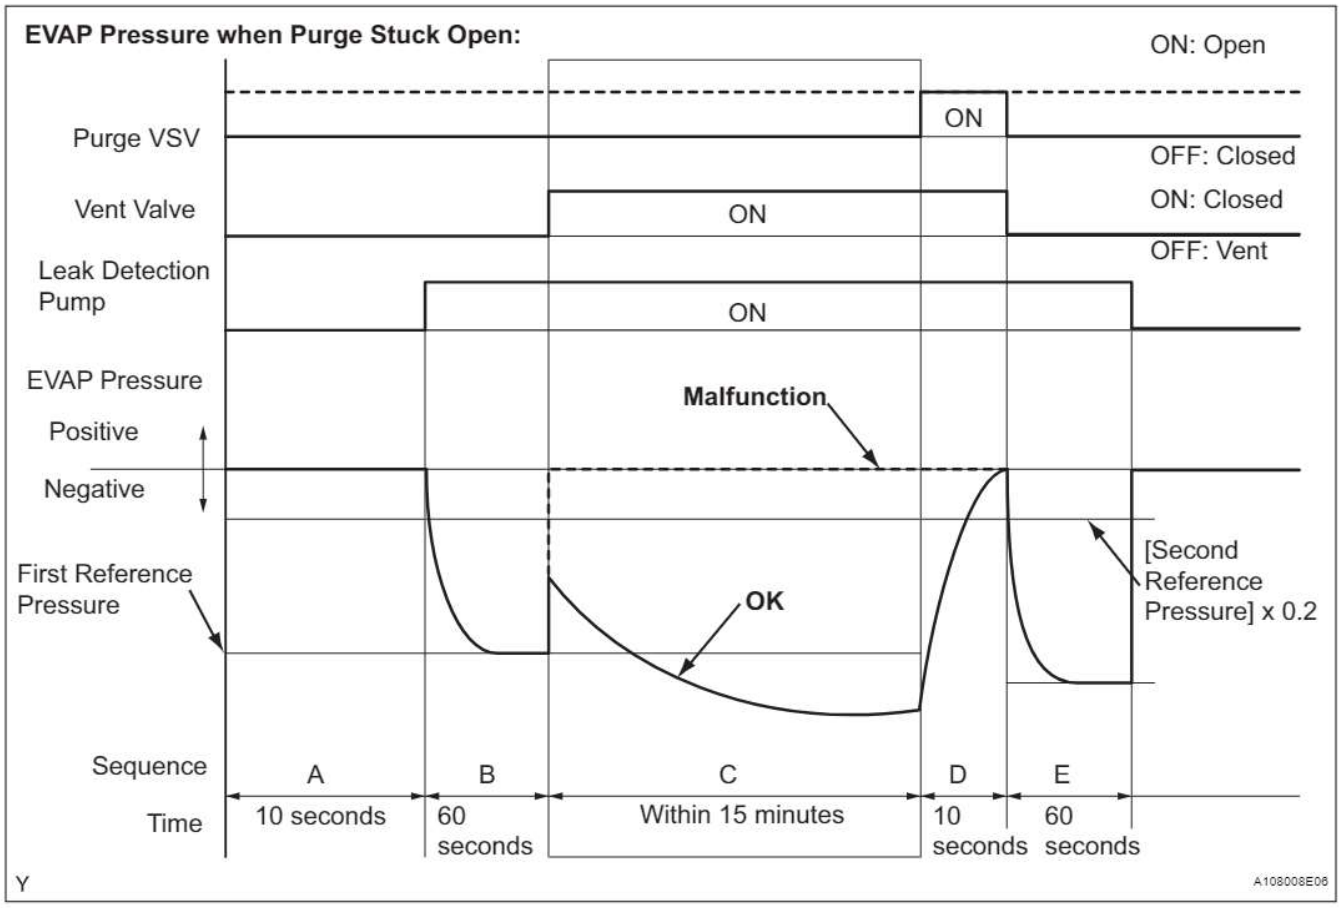

(b) Purge VSV stuck closed


In operation D, the canister pressure sensor measures the EVAP system pressure. The pressure measurement for purge VSV monitor is begun when the purge VSV is turned ON (open) after the EVAP leak check. When the measured pressure indicates an increase of 0.3 kPa-g (2.25 mmHg-g) or more, the purge VSV is functioning normally. If the pressure does not increase, the ECM interprets this as the purge VSV being stuck closed. The ECM illuminates the MIL and sets the DTC (2 trip detection logic).

EVAP Pressure when Purge VSV Stuck Closed:

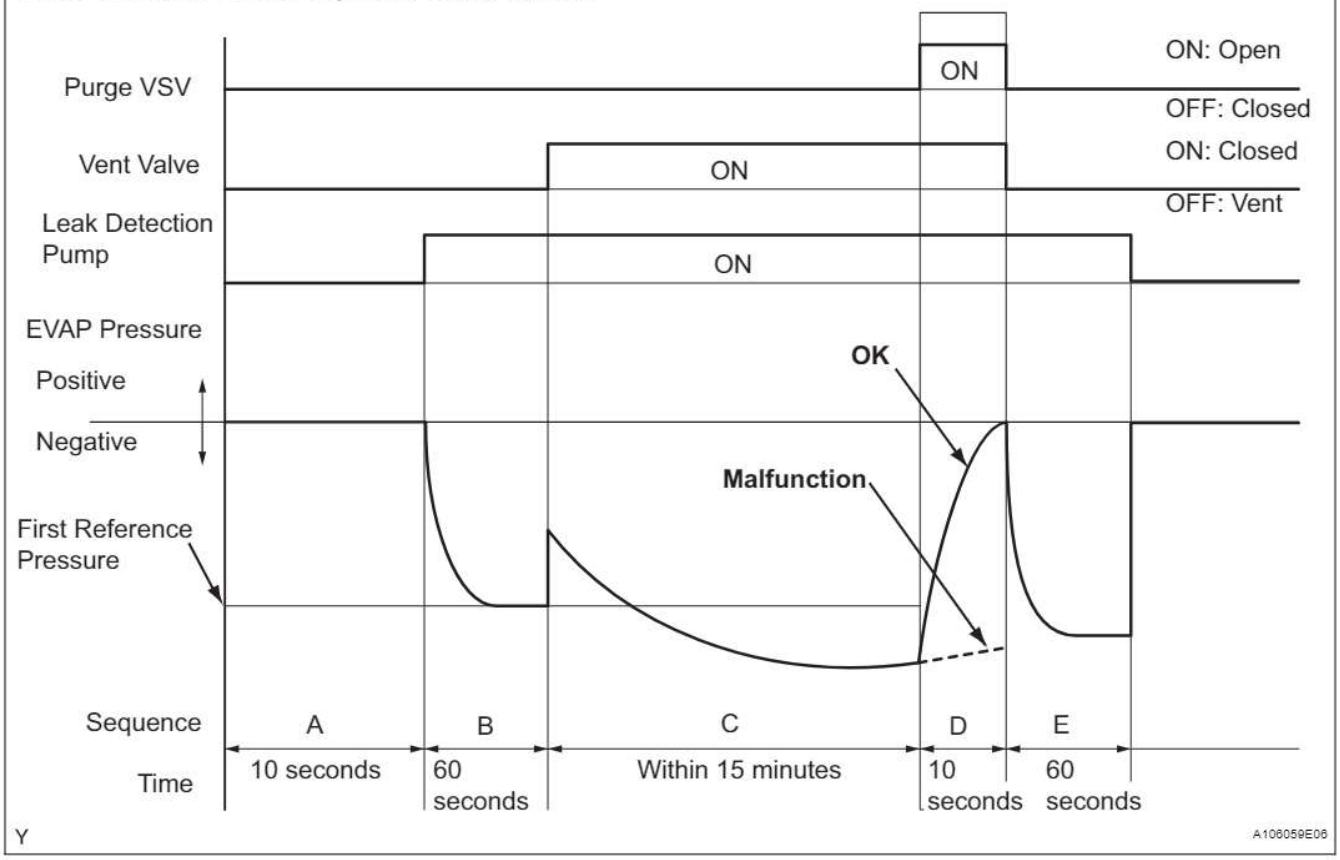

2. PURGE FLOW MONITOR

EVAP Pressure During Purge Flow Monitor:

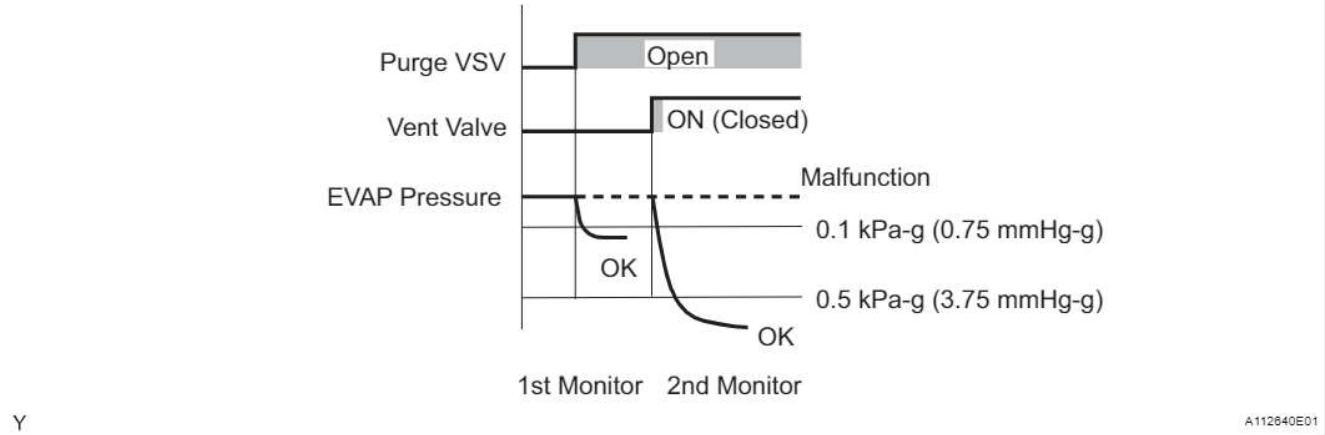

The purge flow monitor consists of the two step monitors. The 1st monitor is conducted every time and the 2nd monitor is activated if necessary.

- The 1st monitor
  While the engine is running and the purge VSV is ON (open), the ECM monitors the purge flow by measuring the EVAP pressure change. If negative pressure is not created, the ECM begins the 2nd monitor.
- The 2nd monitor
  The vent valve is turned ON (closed) and the EVAP pressure is then measured. If the variation in the pressure is less than 0.5 kPa-g (3.75 mmHg-g), the ECM interprets this as the purge VSV being stuck closed, and illuminates the MIL and sets DTC P0441 (2 trip detection logic).

Atmospheric pressure check:
In order to ensure reliable malfunction detection, the variation between the atmospheric pressures, before and after conduction of the purge flow monitor, is measured by the ECM.

OBD II MONITOR SPECIFICATIONS

1. Key-off Monitor

Monitor Strategy

Required Sensors/Components	Purge VSV and canister pump module
Frequency of Operation	Once per driving cycle
Duration	Within 15 minutes (varies with fuel in tank)
MIL Operation	2 driving cycles
Sequence of Operation	None

Typical Enabling Conditions

EVAP key-off monitor runs when all of the following conditions are met	-
Atmospheric pressure	70 to 110 kPa-a (525 to 825 mmHg-a)
Battery voltage	10.5 V or more
Vehicle speed	Below 2.5 mph (4 km/h)
Ignition switch	off
Time after key off	5, 7 or 9.5 hours
EVAP pressure sensor malfunction (P0450, P0451, P0452 and P0453)	Not detected
EVAP canister purge valve	Not operated by scan tool
EVAP canister vent valve	Not operated by scan tool
EVAP leak detection pump	Not operated by scan tool
Both of the following conditions are met before key off	Conditions 1 and 2
1. Duration that vehicle has been driven	5 minutes or more
2. EVAP purge operation	Performed
ECT	4.4 to 35°C (40 to 95°F)
IAT	4.4 to 35°C (40 to 95°F)

2. Key-off monitor sequence 1 to 8

1. Atmospheric pressure measurement

Next sequence runs if following condition is met	-
Atmospheric pressure change	Less than 0.3 kPa-g (2.25 mmHg-g) in 1 second

2. First reference pressure measurement

Next sequence runs if all of the following conditions are met	Conditions 1, 2 and 3
1. EVAP pressure just after reference pressure measurement start	-1 kPa-g (-7.5 mmHg-g) or less
2. Reference pressure	-4.85 to -1.057 kPa-g (-36.4 to -7.93 mmHg-g)
3. Reference pressure	Saturated within 60 seconds

3. Vent valve stuck closed check

Next sequence runs if following condition is met	-
EVAP pressure change after vent valve is ON	0.3 kPa-g (2.25 mmHg-g) or more

4. Vacuum introduction

Next sequence runs if following condition is met	-
EVAP pressure	Saturated within 15 minutes

5. EVAP canister purge valve close stuck check

Next sequence runs if following condition is met	-
EVAP pressure change after purge valve is open	0.3 kPa-g (2.25 mmHg-g) or more

6. Second reference pressure measurement

Next sequence runs if all of the following conditions are met	Conditions 1, 2, 3 and 4
1. EVAP pressure just after reference pressure measurement start	-1 kPa-g (-7.5 mmHg-g) or less
2. Reference pressure	-4.85 to -1.057 kPa-g (-36.4 to -7.93 mmHg-g)
3. Reference pressure	Saturated within 60 seconds
4. Difference between first reference pressure and second reference pressure	Less than 0.5 kPa-g (3.75 mmHg-g)

ES

7. Leak check

Next sequence runs if following condition is met	-
EVAP pressure when vacuum introduction is complete	Second reference pressure or less

8. Atmospheric pressure measurement

EVAP monitor complete if following condition is met	-
Atmospheric pressure difference between sequence 1 and 8	Within 0.3 kPa-g (2.25 mmHg-g)

Typical Malfunction Thresholds

EVAP canister purge valve stuck open:	-
EVAP pressure when vacuum introduction is complete	Higher than reference pressure x 0.2

EVAP canister purge valve stuck closed:	-
EVAP pressure change after EVAP canister purge valve is open	Less than 0.3 kPa-g (2.25 mmHg-g)

OBD II MONITOR SPECIFICATIONS

1. Purge Flow Monitor

Monitor Strategy

Required Sensors/Components	Purge VSV and canister pump module
Frequency of Operation	Once per driving cycle
Duration	Within 10 minutes
MIL Operation	2 driving cycles
Sequence of Operation	None

Typical Enabling Conditions

Monitor runs whenever following DTCs are not present	P0011 (VVT System 1 - Advance) P0012 (VVT System 1 - Retard) P0100 - P0103 (MAF meter) P0110 - P0113 (IAT sensor) P0115 - P0118 (ECT sensor) P0120 - P0223, P2135 (TP sensor) P0125 (Insufficient ECT for Closed Loop) P0171, P0172 (Fuel system) P0300 - P0304 (Misfire) P0335 (CKP sensor) P0340 (CMP sensor) P0351 - P0354 (Igniter) P0450 - P0453 (EVAP press sensor) P0500 (VSS)
Engine	Running
ECT	4.4°C (40°F) or more

IAT	4.4°C (40°F) or more
EVAP pressure sensor malfunction	Not detected
EVAP canister purge valve	Not operated by scan tool
EVAP system check	Not operated by scan tool
Battery voltage	10 V or more
Purge duty cycle	8 % or more

Typical Malfunction Thresholds

Both of the following conditions are met	Conditions 1 and 2
1. EVAP pressure change when purge flow is started	Less than 0.1 kPa-g (0.75 mmHg-g)
2. EVAP pressure change during purge flow when EVAP pressure switching valve is ON (closed)	Less than 0.5 kPa-g (3.75 mmHg-g)

ES

MONITOR RESULT

Refer to CHECKING MONITOR STATUS (See page ES-20).

DTC	P0450	Evaporative Emission Control System Pressure Sensor / Switch

DTC	P0451	Evaporative Emission Control System Pressure Sensor Range / Performance

DTC	P0452	Evaporative Emission Control System Pressure Sensor / Switch Low Input

ES

DTC	P0453	Evaporative Emission Control System Pressure Sensor / Switch High Input

DTC SUMMARY

DTC	Monitoring Item	Malfunction Detection Condition	Trouble Ares	Detection Timing	Detection Logic
P0450	Canister pressure sensor voltage fluctuation abnormal	Sensor output voltage rapidly fluctuates beyond upper and lower malfunction thresholds for 0.5 seconds.	• Canister pump module • EVAP system hose (pipe from air inlet port to canister pump module, canister filter, fuel tank vent hose) • ECM	• EVAP monitoring (ignition off) • Ignition ON position	1 trip detection logic
P0451	Canister pressure sensor noise	Sensor output voltage fluctuates frequently within certain time period.	• Canister pump module • Connector/wire harness (Canister pump module - ECM) • EVAP system hose (pipe from air inlet port to canister pump module, canister filter, fuel tank vent hose) • ECM	• EVAP monitoring (ignition off) • Engine running	2 trip detection logic
	Canister pressure sensor signal becomes fixed/flat	Sensor output voltage does not vary within certain time period.	• Canister pump module • Connector/wire harness (Canister pump module - ECM) • EVAP system hose (pipe from air inlet port to canister pump module, canister filter, fuel tank vent hose) • ECM	• EVAP monitoring (ignition off)	2 trip detection logic
P0452	Canister pressure sensor low input	EVAP pressure less than 42.1 kPa for 0.5 seconds.	• Canister pump module • Connector/wire harness (Canister pump module - ECM) • EVAP system hose (pipe from air inlet port to canister pump module, canister filter, fuel tank vent hose) • ECM	• Ignition ON position • EVAP monitoring (ignition off)	1 trip detection logic

DTC	Monitoring Item	Malfunction Detection Condition	Trouble Ares	Detection Timing	Detection Logic
P0453	Canister pressure sensor high input	EVAP pressure more than 123.8 kPa for 0.5 seconds.	• Canister pump module • Connector/wire harness (Canister pump module - ECM) • EVAP system hose (pipe from air inlet port to canister pump module, canister filter, fuel tank vent hose) • ECM	• Ignition ON position • EVAP monitoring (ignition off)	1 trip detection logic

HINT:
The canister pressure sensor is built into the canister pump module.


ES

DESCRIPTION

The description can be found in the EVAP (Evaporative Emission) System (See page ES-346).

MONITOR DESCRIPTION

Canister Pressure Sensor Specification:

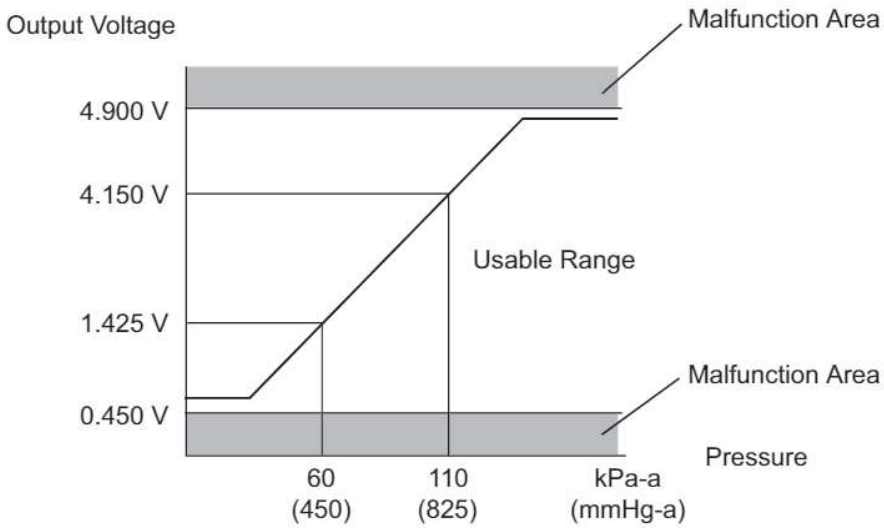

HINT:

Standard atmospheric pressure is 101.3 kPa-a (760 mmHg-a)

A115643E05

1. DTC P0450: Canister pressure sensor abnormal fluctuation
   If the canister pressure sensor output [pressure] rapidly fluctuates between less than 42.1 kPa-a (315.9 mmHg-a) and more than 123.8 kPa-a (928.4 mmHg-a), the ECM interprets this as an open or short circuit malfunction in the canister pressure sensor or its circuit, and stops the EVAP (Evaporative Emission) system monitor. The ECM then illuminates the MIL and sets the DTC (1 trip detection logic).

2. DTC P0451: Canister pressure sensor noise or fixed/flat
   If the canister pressure sensor voltage output fluctuates rapidly for 10 seconds, the ECM stops the EVAP system monitor. The ECM interprets this as noise from the canister pressure sensor, and stops the EVAP system monitor. The ECM then illuminates the MIL and sets the DTC.
   Alternatively, if the sensor voltage output does not change for 10 seconds, the ECM interprets this as the sensor being fixed/flat, and stops the monitor. The ECM then illuminates the MIL and sets the DTC. (Both the malfunctions are detected by 2 trip detection logic).
3. DTC P0452: Canister pressure sensor voltage low
   If the canister pressure sensor output [pressure] is below 42.1 kPa-a (315.9 mmHg-a), the ECM interprets this as an open or short circuit malfunction in the canister pressure sensor or its circuit, and stops the EVAP system monitor. The ECM then illuminates the MIL and sets the DTC (1 trip detection logic).
4. DTC P0453: Canister pressure sensor voltage high
   If the canister pressure sensor output [pressure] is 123.8 kPa-a (928.4 mmHg-a) or more, the ECM interprets this as an open or short circuit malfunction in the canister pressure sensor or its circuit, and stops the EVAP system monitor. The ECM then illuminates the MIL and sets the DTC (1 trip detection logic).

ES

MONITOR STRATEGY

Required Sensors/Components	Canister pump module
Frequency of Operation	Once per driving cycle: P0451 sensor fixed/flat Continuous: P0451 sensor noise, P0450, P0452 and P0453
Duration	0.5 seconds: P0450, P0452 and P0453 2 minutes: P0451
MIL Operation	Immediate: P0450, P0452 and P0453 2 driving cycles: P0451
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

P0451 (Noise monitor):

Monitor runs whenever following DTCs are not present	None
Atmospheric pressure (absolute pressure)	70 to 110 kPa-a (525 to 825 mmHg-a)
Battery voltage	10.5 V or more
Intake air temperature	4.4 to 35°C (40 to 95°F)
EVAP pressure sensor malfunction (P0450, P0452, 0453)	Not detected
Either of the following conditions A or B is met	-
A. Engine condition	Running
B. Time after key off	5, 7 or 9.5 hours

P0451 (Fixed/flat monitor):

Monitor runs whenever following DTCs are not present	None
Battery voltage	10.5 V or more
Intake air temperature	4.4 to 35°C (40 to 95°F)
EVAP pressure sensor malfunction (P0450, P0452, 0453)	Not detected
Atmospheric pressure (absolute pressure)	70 to 110 kPa-a (525 to 825 mmHg-a)
Time after key off	5, 7 or 9.5 hours

P0450, P0452 and P0453:

Monitor runs whenever following DTCs are not present	None
Either of following conditions is met	(a) or (b)
(a) Ignition switch	ON
(b) Soak timer	ON
Battery voltage	8 V or more

Starter	OFF

TYPICAL MALFUNCTION THRESHOLDS

P0450: Canister pressure sensor chattering

EVAP pressure	Less than 42.1 kPa-a (315.9 mmHg-a), or more than 123.8 kPa-a (928.4 mmHg-a)

P0451: Canister pressure sensor noise

Frequency that EVAP pressure change 0.3 kPa-g (2.25 mmHg-g) or more	10 times or more in 10 seconds

P0451: Canister pressure sensor fixed/flat

EVAP pressure change during reference pressure measurement	Less than 0.65 kPa-g (4.88 mmHg-g)


P0452: Canister pressure sensor low voltage

EVAP pressure	Less than 42.1 kPa-a (315.9 mmHg-a)

P0453: Canister pressure sensor high voltage

EVAP pressure	More than 123.8 kPa-a (928.4 mmHg-a)

WIRING DIAGRAM

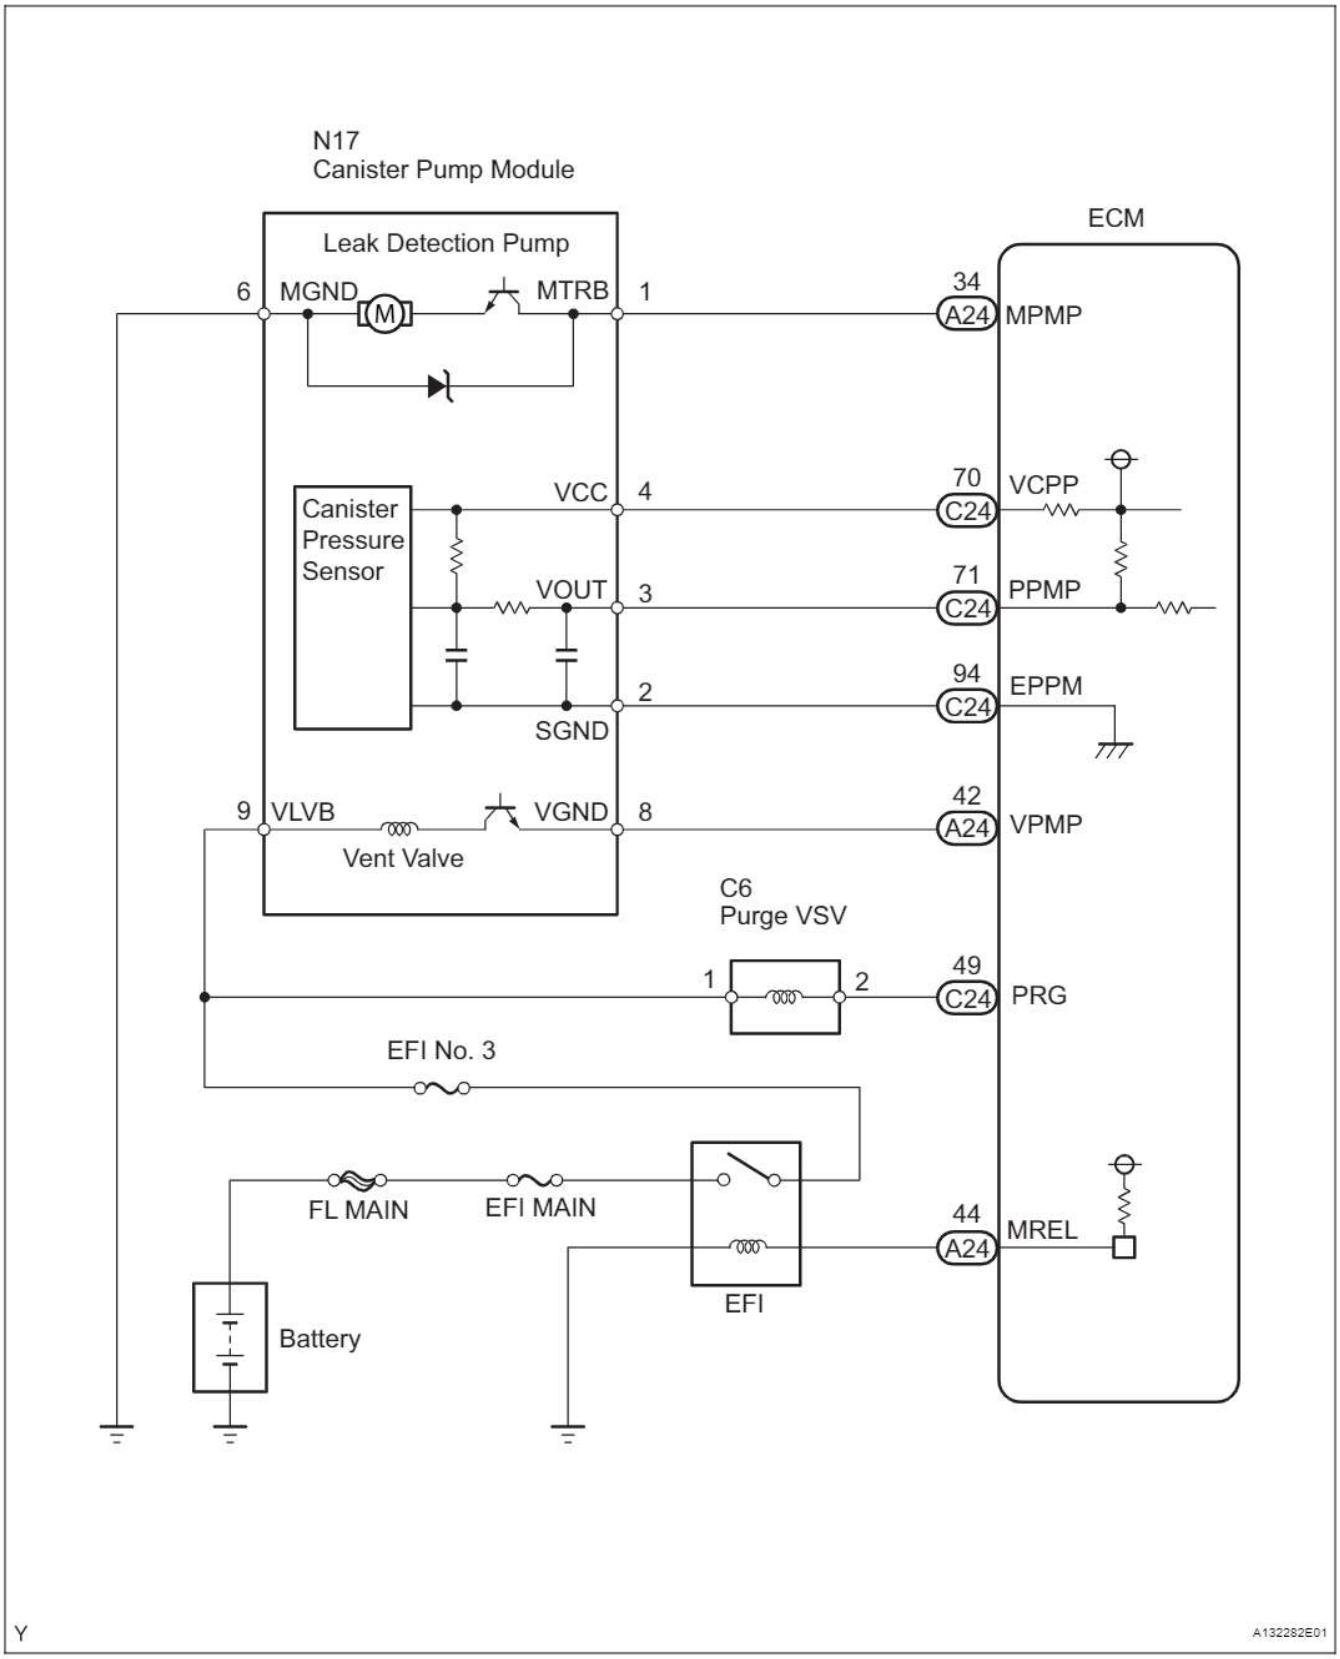

INSPECTION PROCEDURE

NOTICE:


- **When a vehicle is brought into the workshop, leave it as it is. Do not change the vehicle condition. For example, do not tighten the fuel cap.**
- **Do not disassemble the canister pump module.**
- **An intelligent tester is required to conduct the following diagnostic troubleshooting procedure.**

HINT:

Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

ES

1 CHECK HARNESS AND CONNECTOR (CANISTER PUMP MODULE - ECM)

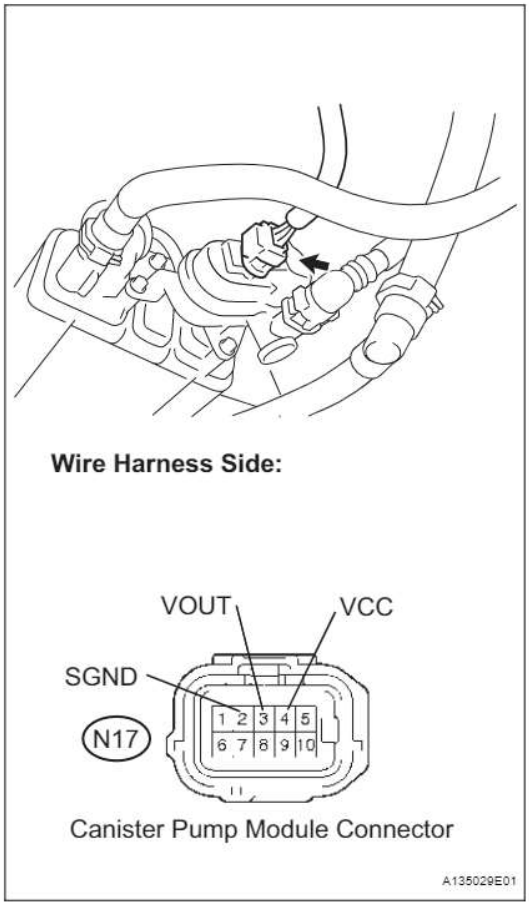

(a) Disconnect the N17 canister pump module connector.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage and resistance of the canister connector.

Standard

Tester Connection	Specified Condition
N17-4 (VCC) - Body ground	4.5 to 5.5 V
N17-3 (VOUT) - Body ground	4.5 to 5.5 V
N17-2 (SGND) - Body ground	100 Ω or less

Result

Test Result	Proceed to
Voltage and resistance within standard ranges	A
Voltage and resistance outside standard ranges	B

(d) Reconnect the canister pump module connector.

B → Go to step 3


A

2 REPLACE CHARCOAL CANISTER ASSEMBLY

(a) Replace the canister assembly (See page EC-9).

NOTICE:
When replacing the canister, check the canister pump module interior and related pipes for water, fuel and other liquids. If liquids are present, check for disconnections and/or cracks in the following: 1) the pipe from the air inlet port to the canister pump module; 2) the canister filter; and 3) the fuel tank vent hose.

Except PZEV:

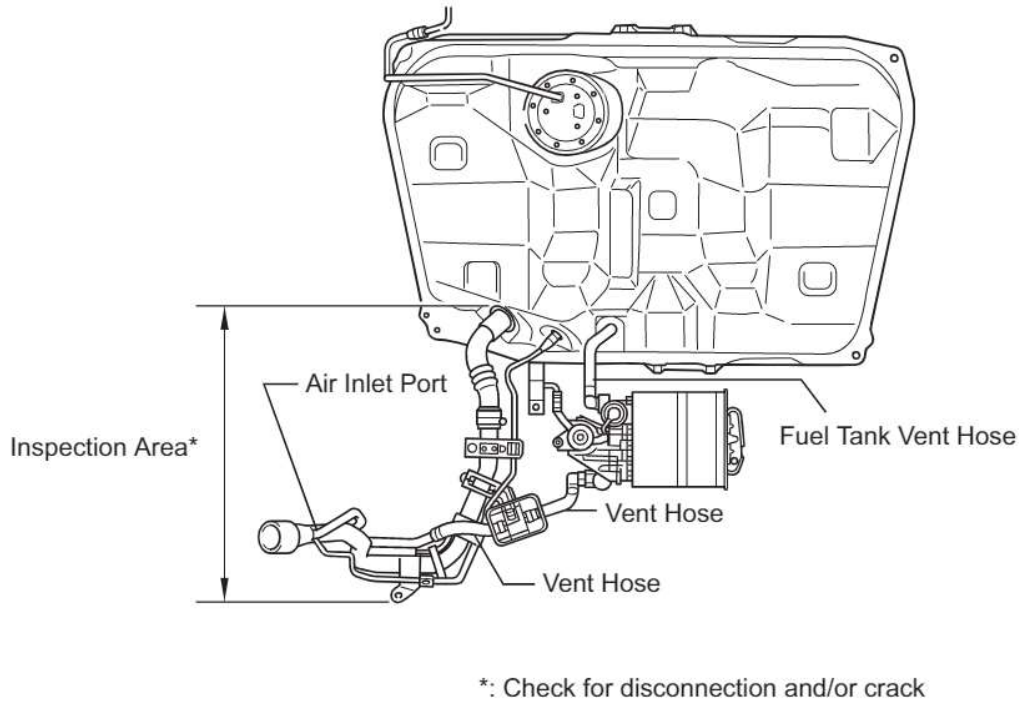


*: Check for disconnection and/or crack

N

A132283E01


PZEV:

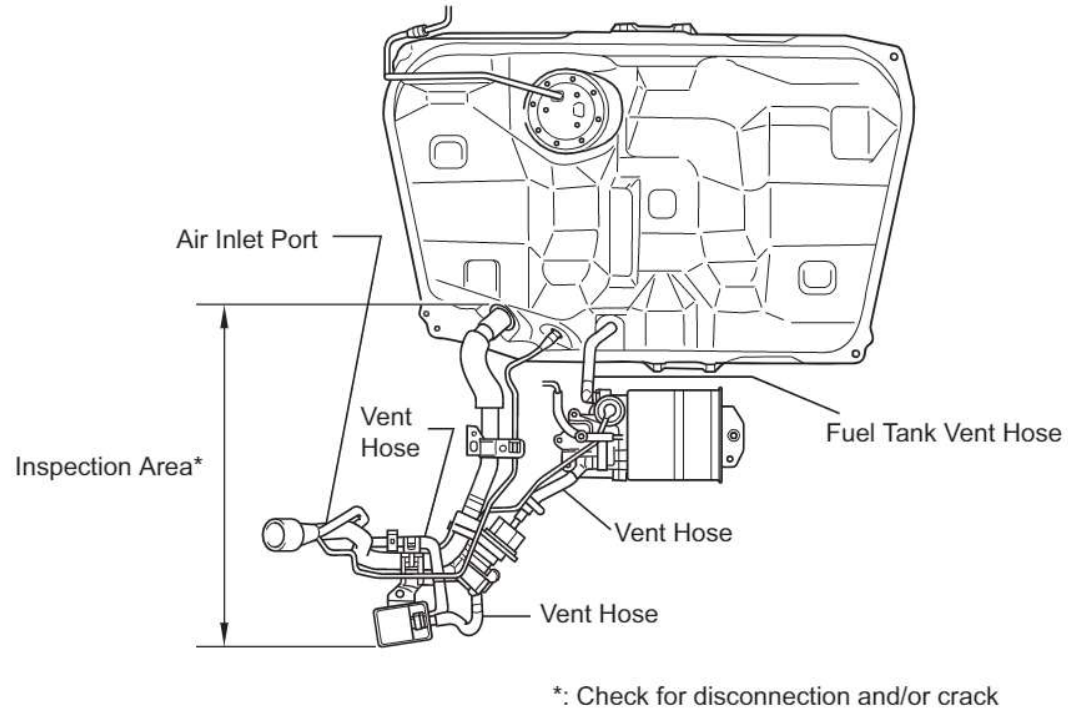

NEXT → **Go to step 5**


3 CHECK HARNESS AND CONNECTOR (CANISTER PUMP MODULE - ECM)

Wire Harness Side:

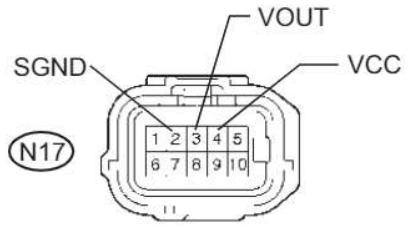

Canister Pump Module Connector

C24 ECM Connector

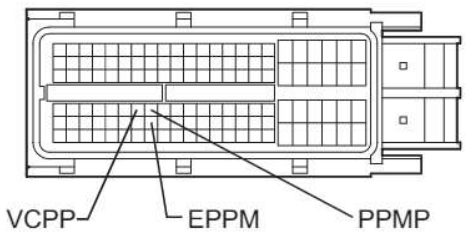

(a) Disconnect the N17 canister pump module connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)

Tester Connection	Specified Condition
N17-4 (VCC) - C24-70 (VCPP)	Below 1 Ω
N17-3 (VOUT) - C24-71 (PPMP)	Below 1 Ω
N17-2 (SGND) - C24-94 (EPPM)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
N17-4 (VCC) or C24-70 (VCPP) - Body ground	10 kΩ or higher
N17-3 (VOUT) or C24-71 (PPMP) - Body ground	10 kΩ or higher
N17-2 (SGND) or C24-94 (EPPM) - Body ground	10 kΩ or higher

(d) Reconnect the canister pump module connector.
(e) Reconnect the ECM connector.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR AND GO TO STEP 5**

OK

4	REPLACE ECM

(a) Replace the ECM (See page ES-432).

NEXT → Go to step 5

5	CHECK WHETHER DTC OUTPUT RECURS (AFTER REPAIR)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Wait for at least 60 seconds.
(d) On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES.
HINT:
If no pending DTCs are displayed on the tester, the repair has been successfully completed.

NEXT

COMPLETED

DTC	P0455	Evaporative Emission Control System Leak Detected (Gross Leak)

DTC	P0456	Evaporative Emission Control System Leak Detected (Very Small Leak)

DTC SUMMARY

DTCs	Monitoring Item	Malfunction Detection Condition	Trouble Area	Detection Timing	Detection Logic
P0455	EVAP gross leak	Leak detection pump creates negative pressure (vacuum) in EVAP system and EVAP system pressure measured. Reference pressure measured at start and at end of leak check. If stabilized pressure higher than [second reference pressure x 0.2], ECM determines that EVAP system has large leak.	• Fuel cap (loose) • Leakage from EVAP line (Canister - Fuel tank) • Leakage from EVAP line (Purge VSV - Canister) • Canister pump module • Leakage from fuel tank • Leakage from canister	While ignition switch off	2 trip detection logic
P0456	EVAP small leak	Leak detection pump creates negative pressure (vacuum) in EVAP system and EVAP system pressure measured. Reference pressure measured at start and at end of leak check. If stabilized pressure higher than second reference pressure, ECM determines that EVAP system has a small leak.	• Fuel cap (loose) • Leakage from EVAP line (Canister - Fuel tank) • Leakage from EVAP line (Purge VSV - Canister) • Canister pump module • Leakage from fuel tank • Leakage from canister	While ignition switch off	2 trip detection logic

ES

DESCRIPTION

The description can be found in the EVAP (Evaporative Emission) System (See page ES-346).

INSPECTION PROCEDURE

Refer to the EVAP System (See page ES-352).

MONITOR DESCRIPTION

5 hours* after the ignition switch is turned off, the leak detection pump creates negative pressure (vacuum) in the EVAP system. The ECM monitors for leaks and actuator malfunctions based on the EVAP pressure.


HINT:

*: If the engine coolant temperature is not below 35°C (95°F) 5 hours after the ignition switch is turned off, the monitor check starts 2 hours later. If it is still not below 35°C (95°F) 7 hours after the ignition switch is turned off, the monitor check starts 2.5 hours later.

Sequence	Operations	Descriptions	Duration
-	ECM activation	Activated by soak timer 5, 7 or 9.5 hours after ignition switch turned off.	-
A	Atmospheric pressure measurement	Vent valve turned OFF (vent) and EVAP system pressure measured by ECM in order to register atmospheric pressure. If pressure in EVAP system not between 76 kPa-a and 110 kPa-a (570 mmHg-a and 825 mmHg-a), ECM cancels EVAP system monitor.	10 seconds
B	First reference pressure measurement	In order to determine reference pressure, leak detection pump creates negative pressure (vacuum) through reference orifice and then ECM checks if leak detection pump and vent valve operate normally.	60 seconds
C	EVAP system pressure measurement	Vent valve turned ON (closed) to shut EVAP system. Negative pressure (vacuum) created in EVAP system, and EVAP system pressure then measured. Write down measured value as it will be used in leak check. If EVAP pressure does not stabilize within 15 minutes, ECM cancels EVAP system monitor.	15 minutes*

Sequence	Operations	Descriptions	Duration
D	Purge VSV monitor	Purge VSV opened and then EVAP system pressure measured by ECM. Large increase indicates normality.	10 seconds
E	Second reference pressure measurement	After second reference pressure measurement, leak check performed by comparing first and second reference pressure. If stabilized system pressure higher than second reference pressure, ECM determines that EVAP system leaking.	60 seconds
F	Final check	Atmospheric pressure measured and then monitoring result recorded by ECM.	-


*: If only a small amount of fuel is in the fuel tank, it takes longer for the EVAP pressure to stabilize.

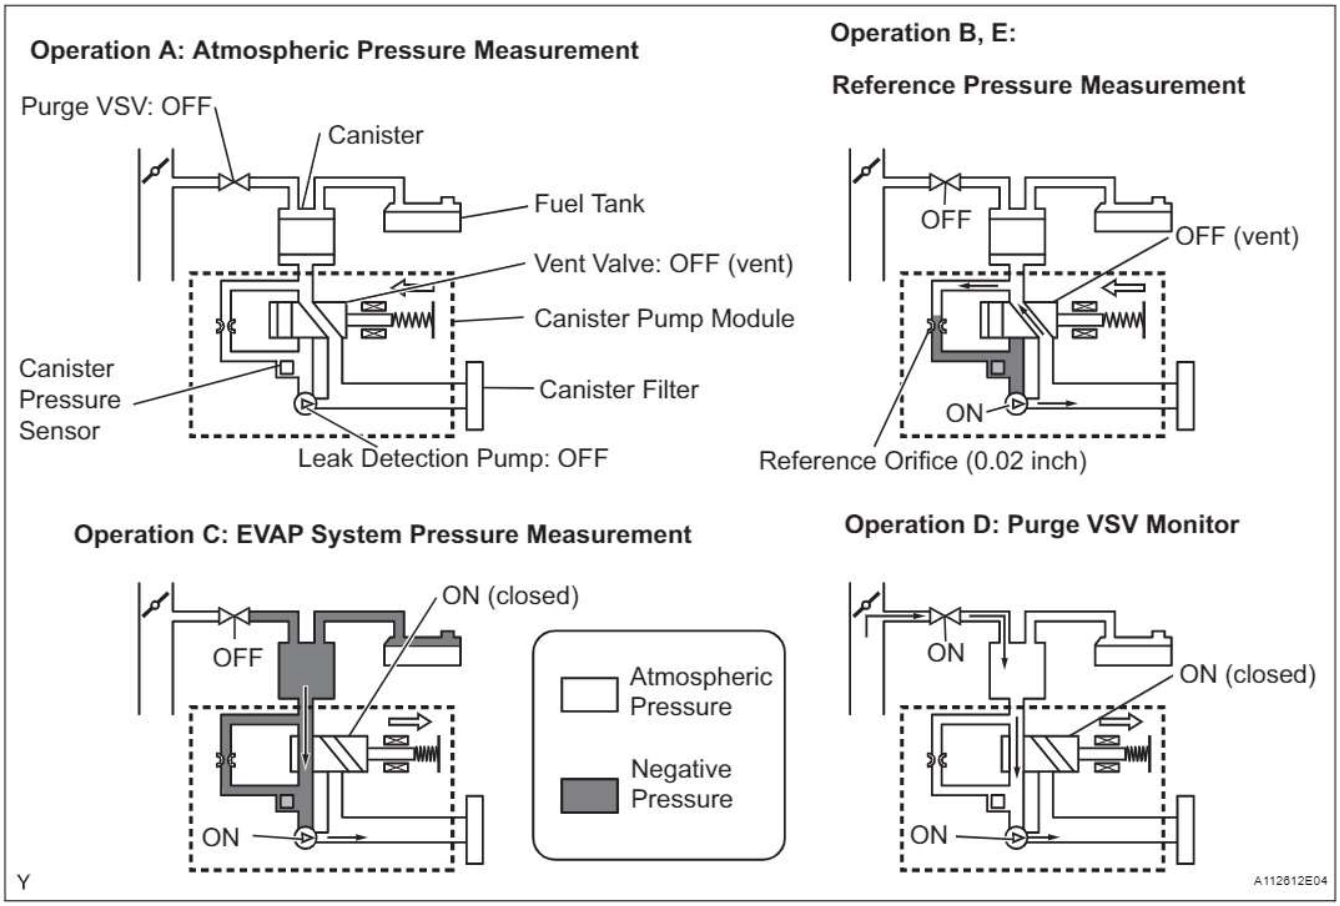

(a) P0455: EVAP gross leak

In operation C, the leak detection pump creates negative pressure (vacuum) in the EVAP system and the EVAP system pressure is measured. If the stabilized system pressure is higher than [second reference pressure x 0.2] (near atmospheric pressure), the ECM determines that the EVAP system has a large leakage, illuminates the MIL and sets the DTC (2 trip detection logic).

(b) P0456: EVAP very small leak
In operation C, the leak detection pump creates negative pressure (vacuum) in the EVAP system and the EVAP system pressure is measured. If the stabilized system pressure is higher than the second reference pressure, the ECM determines that the EVAP system has a small leakage, illuminates the MIL and sets the DTC (2 trip detection logic).

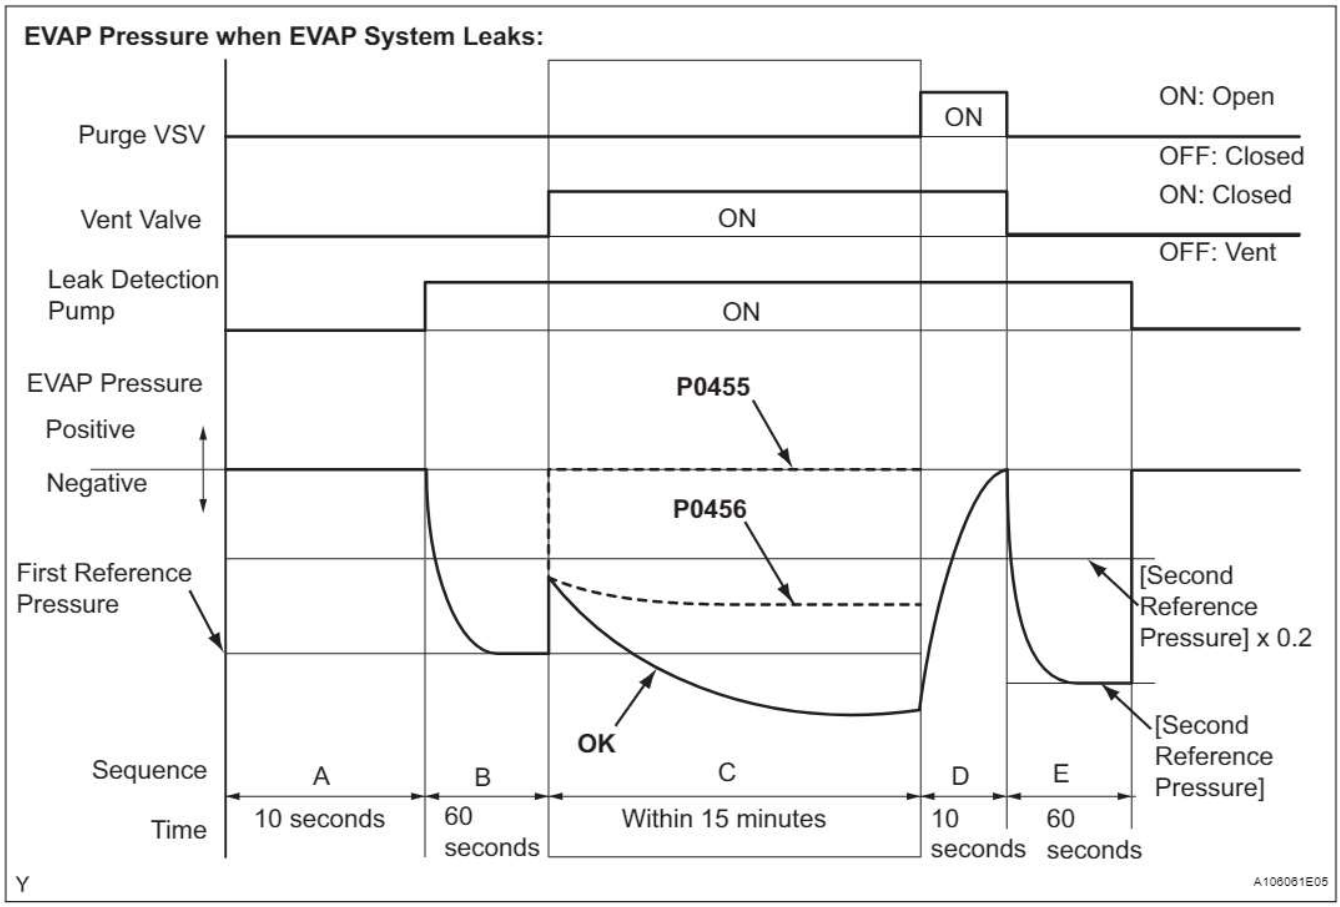

MONITOR STRATEGY

Required Sensors/Components	Purge VSV and canister pump module
Frequency of Operation	Once per driving cycle
Duration	Within 15 minutes (varies with amount of fuel in tank)
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None
EVAP key-off monitor runs when all of the following conditions are met	-
Atmospheric pressure	70 to 110 kPa-a (525 to 825 mmHg-a)
Battery voltage	10.5 V or more
Vehicle speed	Below 2.5 mph (4 km/h)
Ignition switch	off
Time after key off	5, 7 or 9.5 hours
EVAP pressure sensor malfunction (P0450, P0451, P0452 and P0453)	Not detected
EVAP canister purge valve	Not operated by scan tool
EVAP canister vent valve	Not operated by scan tool

EVAP leak detection pump	Not operated by scan tool
Both of the following conditions are met before key off	Conditions 1 and 2
1. Duration that vehicle has been driven	5 minutes or more
2. EVAP purge operation	Performed
ECT	4.4 to 35°C (40 to 95°F)
IAT	4.4 to 35°C (40 to 95°F)

1. Key-off monitor sequence 1 to 8

1. Atmospheric pressure measurement

Next sequence runs if following condition is met	-
Atmospheric pressure change	Less than 0.3 kPa-g (2.25 mmHg-g) in 1 second

2. First reference pressure measurement

Next sequence runs if all of the following conditions are met	Conditions 1, 2 and 3
1. EVAP pressure just after reference pressure measurement start	-1 kPa-g (-7.5 mmHg-g) or less
2. Reference pressure	-4.85 to -1.057 kPa-g (-36.4 to -7.93 mmHg-g)
3. Reference pressure	Saturated within 60 seconds

3. Vent valve stuck closed check

Next sequence runs if following condition is met	-
EVAP pressure change after vent valve is ON	0.3 kPa-g (2.25 mmHg-g) or more

4. Vacuum introduction

Next sequence runs if following condition is met	-
EVAP pressure	Saturated within 15 minutes

5. EVAP canister purge valve close stuck check

Next sequence runs if following condition is met	-
EVAP pressure change after purge valve is open	0.3 kPa-g (2.25 mmHg-g) or more

6. Second reference pressure measurement

Next sequence runs if all of the following conditions are met	Conditions 1, 2, 3 and 4
1. EVAP pressure just after reference pressure measurement start	-1 kPa-g (-7.5 mmHg-g) or less
2. Reference pressure	-4.85 to -1.057 kPa-g (-36.4 to -7.93 mmHg-g)
3. Reference pressure	Saturated within 60 seconds
4. Difference between first reference pressure and second reference pressure	Less than 0.5 kPa-g (3.75 mmHg-g)

7. Leak check

Next sequence runs if following condition is met	-
EVAP pressure when vacuum introduction is complete	Second reference pressure or less

8. Atmospheric pressure measurement

EVAP monitor complete if following condition is met	-
Atmospheric pressure difference between sequence 1 and 8	Within 0.3 kPa-g (2.25 mmHg-g)

TYPICAL MALFUNCTION THRESHOLDS

P0455: EVAP gross leak

EVAP pressure when vacuum introduction is complete	Higher than reference pressure x 0.2

P0456: EVAP small leak

EVAP pressure when vacuum introduction is complete	Between reference pressure and reference pressure x 0.2


MONITOR RESULT

Refer to CHECKING MONITOR STATUS (See page ES-20).

DTC	P0500	Vehicle Speed Sensor "A"

DESCRIPTION

The speed sensor detects the wheel speed and sends the appropriate signals to the skid control ECU. The skid control ECU converts these wheel speed signals into a 4-pulse signal and outputs it to the ECM via the combination meter. The ECM determines the vehicle speed based on the frequency of these pulse signals.

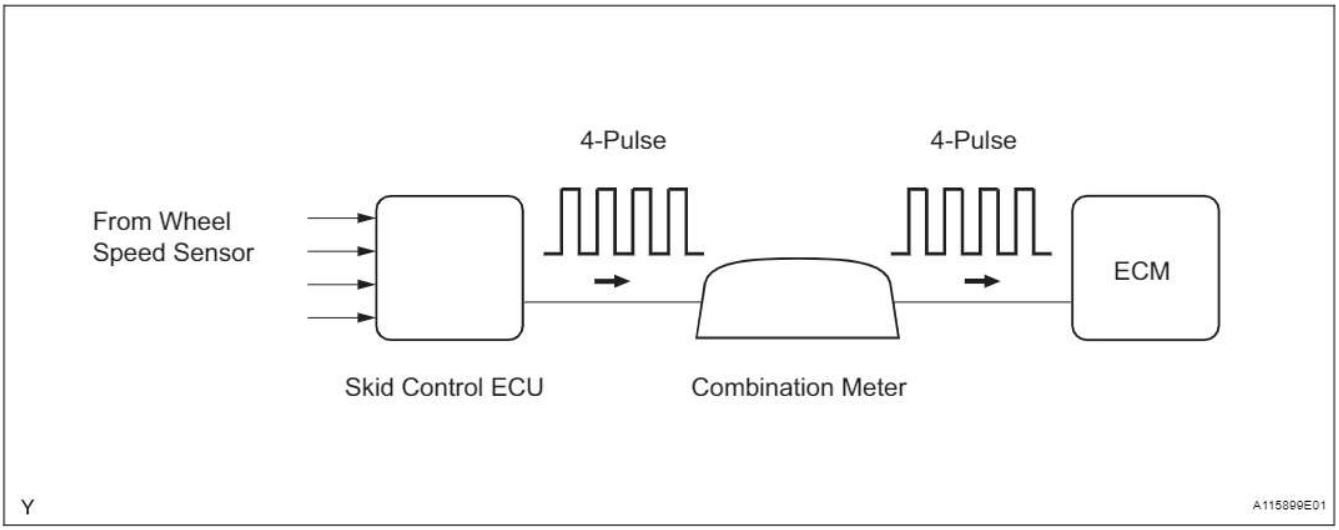

DTC No.	DTC Detection Condition	Trouble Area
P0500	While vehicle being driven, no vehicle speed sensor signal transmitted to ECM (1 trip detection logic: Automatic transaxle) (2 trip detection logic: Manual transaxle)	• Open or short in speed signal circuit • Vehicle speed sensor • Combination meter • ECM • Skid control ECU

MONITOR DESCRIPTION

The ECM assumes that the vehicle is being driven, when the indicated engine speed is more than 2,300 rpm and 30 seconds have elapsed since the Park/Neutral Position (PNP) switch was turned OFF. If there is no speed signal from the combination meter, despite these conditions being met, the ECM interprets this as a malfunction in the speed signal circuit. The ECM then illuminates the MIL and sets the DTC.

MONITOR STRATEGY

Related DTCs	P0500: Vehicle speed sensor "A" pulse input error
Required Sensors/Components (Main)	Vehicle Speed Sensor (VSS), Combination meter and Skid control ECU
Required Sensors/Components (Related)	Park/Neutral Position (PNP) switch, Engine Coolant Temperature (ECT) sensor, Crankshaft Position (CKP) sensor, Throttle Position (TP) sensor and Mass Air Flow (MAF) meter
Frequency of Operation	Continuous
Duration	2 seconds: Automatic Transaxle 8 seconds: Manual Transaxle
MIL Operation	Immediate: Automatic Transaxle 2 driving cycles: Manual Transaxle
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Automatic transmission:

Monitor runs whenever following DTCs are not present	P0120 - P0223, P2135 (TP sensor)
Either of the following conditions (a) or (b) is met:	-
(a) Following conditions 1 and 2 are met:	-
1. ECT and ECT sensor	20°C (68°F) or more, and sensor does not malfunction (P0115 or P0116)
2. Time after PNP switch turned OFF	10 seconds or more
(b) Following conditions 1 and 2 are met:	-
1. ECT and ECT sensor	Less than 20°C (68°F), and sensor malfunction (P0115 or P0116)
2. Time after PNP switch turned OFF	30 seconds or more
Time after ignition switch turned ON position	More than 0.5 seconds
Battery voltage	8 V or more
Ignition switch	ON
Starter	OFF


Manual transmission:

Monitor runs whenever following DTCs are not present	P0100 - P0103, (MAF sensor) P0115 - P0118 (ECT sensor) P0125 (Insufficient ECT for closed loop)
ECT	70°C (158°F) or more
Engine PRM	2,000 rpm or more, and less than 4,500 rpm
Engine Load	33.7%
Battery voltage	8 V or more
Starter	OFF
Ignition switch	ON
ECT sensor circuit	OK
MAF sensor circuit	OK

TYPICAL MALFUNCTION THRESHOLDS

Vehicle speed sensor signal	No pulse input

WIRING DIAGRAM

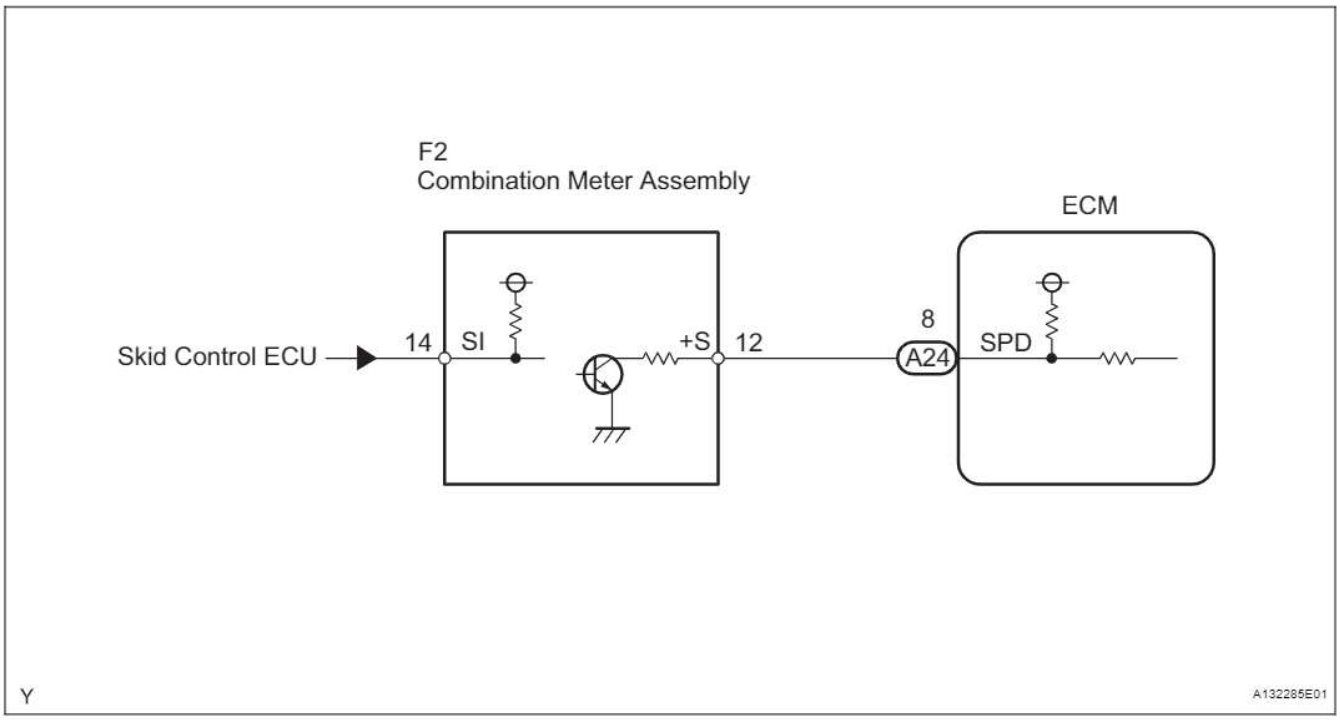

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	CHECK OPERATION OF SPEEDOMETER

(a) Drive the vehicle and check whether the operation of the speedometer in the combination meter is normal.
HINT:
- The vehicle speed sensor is operating normally if the speedometer reading is normal.
- If the speedometer does not operate, check it by following the procedure described in speedometer malfunction (See page ME-44).

NG → GO TO MALFUNCTION IN SPEEDOMETER

OK

2	READ VALUE USING INTELLIGENT TESTER (VEHICLE SPD)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.


(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / VEHICLE SPD.
(e) Drive the vehicle.
(f) Read the value displayed on the tester.
OK:
Vehicle speeds displayed on tester and speedometer display are equal.

OK → **CHECK FOR INTERMITTENT PROBLEMS**

NG

ES

3 CHECK COMBINATION METER ASSEMBLY (+S VOLTAGE)

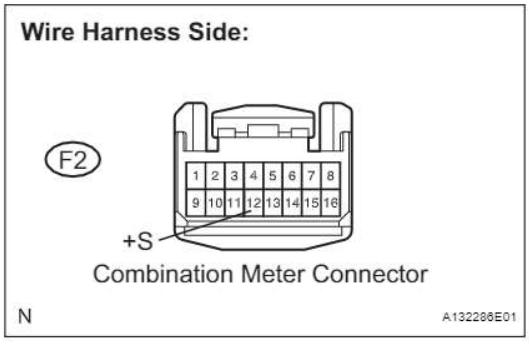

(a) Disconnect the F2 combination meter connector.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage between the terminal of the combination meter and body ground.
Standard voltage


Tester Connection	Specified Condition
F2-12 (+S) - Body ground	4.5 to 5.5 V

(d) Reconnect the combination meter connector.

NG → **Go to step 5**

OK

4 CHECK COMBINATION METER ASSEMBLY (SPD SIGNAL WAVEFORM)

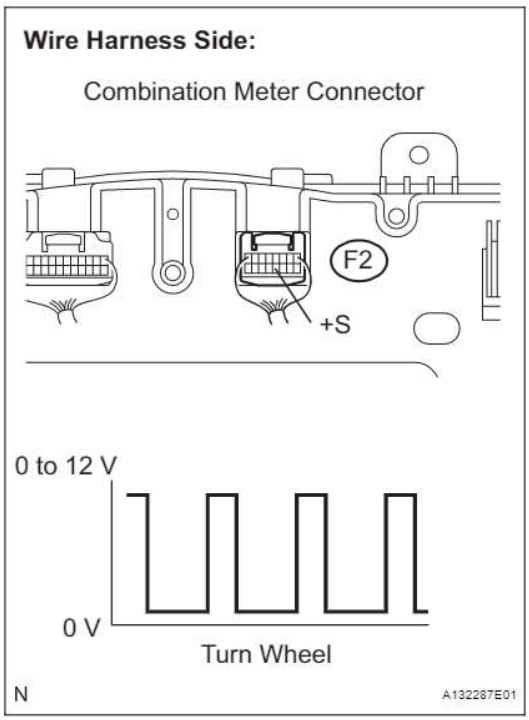

(a) Shift the transmission gear selector lever to the neutral position.
(b) Jack up the vehicle.
(c) Turn the ignition switch to the ON position.
(d) Measure the voltage between the terminal of the combination meter and body ground while the wheel is turned slowly.
Standard voltage


Tester Connection	Specified Condition
F2-12 (+S) - Body ground	Voltage generated intermittently

HINT:
The output voltage should fluctuate up and down, similarly to the diagram, when the wheel is turned slowly.

NG → **REPLACE COMBINATION METER ASSEMBLY**

OK

5	CHECK HARNESS AND CONNECTOR (COMBINATION METER ASSEMBLY - ECM)

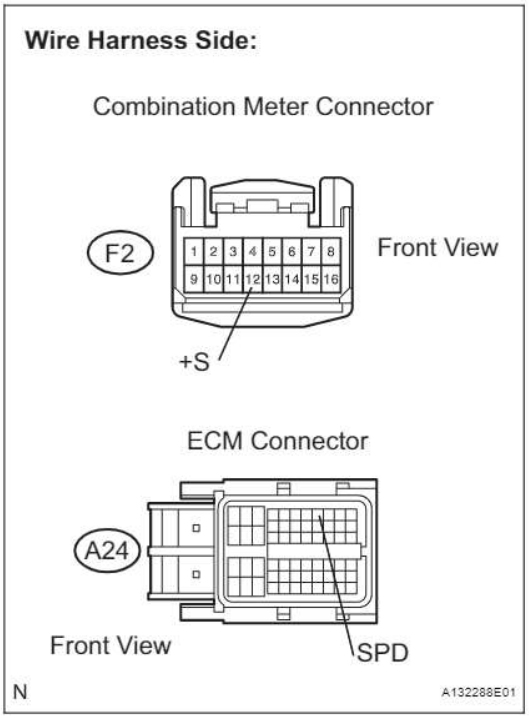

(a) Disconnect the F2 combination meter connector.
(b) Disconnect the A24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)

Tester Connection	Specified Condition
F2-12 (+S) - A24-8 (SPD)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
F2-12 (+S) or A24-8 (SPD) - Body ground	10 kΩ or higher

(d) Reconnect the combination meter connector.
(e) Reconnect the ECM connector.

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

REPLACE ECM

DTC	P0504	Brake Switch "A" / "B" Correlation

DESCRIPTION

The stop light switch is a duplex system that transmits two signals: STP and ST1-. These two signals are used by the ECM to monitor whether or not the brake system is working properly. If the signals, which indicate the brake pedal is being depressed and released, are detected simultaneously, the ECM interprets this as a malfunction in the stop light switch and sets the DTC.


HINT:

The normal conditions are as shown in the table below. The signals can be read using the intelligent tester.

Signals	Brake Pedal Released	In Transition	Brake Pedal Depressed
STP	OFF	ON	ON
ST1-	ON	ON	OFF

DTC No.	DTC Detection Condition	Trouble Area
P0504	Conditions (a), (b) and (c) continue for 0.5 seconds or more (1 trip detection logic): (a) Ignition switch to the ON position (b) Brake pedal released (c) STP signal OFF when ST1- signal OFF	• Short in stop light switch signal circuit • STOP fuse • IGN fuse • Stop light switch • ECM

WIRING DIAGRAM

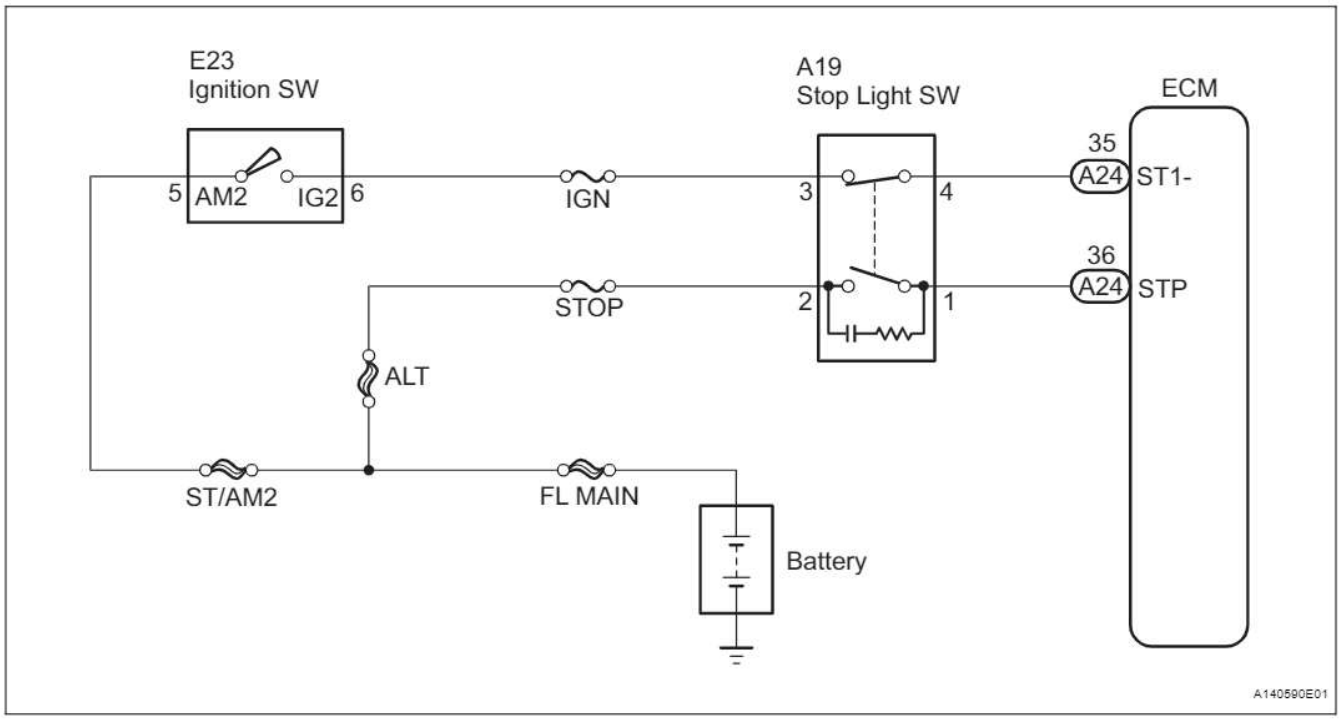

INSPECTION PROCEDURE

HINT:


- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.
- STP signal conditions can be checked using the intelligent tester.

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / STOP LIGHT SW.
(e) Check the STP signal when the brake pedal is depressed and released.

Brake Pedal Operation	Specified Condition
Depressed	STP signal ON
Released	STP signal OFF

ES

1 CHECK STOP LIGHT SWITCH ASSEMBLY (TERMINAL B VOLTAGE)

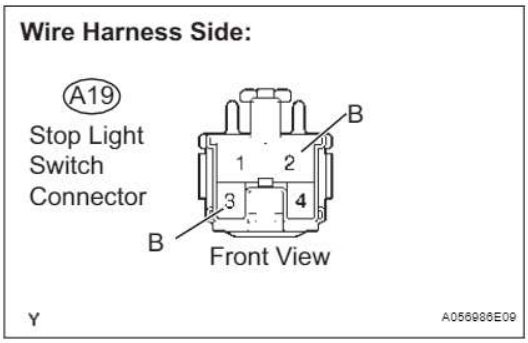

(a) Disconnect the A19 stop light switch connector.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage between the terminals of the stop light switch connector and body ground.
Standard voltage


Tester Connection	Specified Condition
A19-2 (B) - Body ground	9 to 14 V
A19-3 (B) - Body ground	9 to 14 V

(d) Reconnect the stop light switch connector.

NG → Go to step 4

OK

2 INSPECT STOP LIGHT SWITCH ASSEMBLY

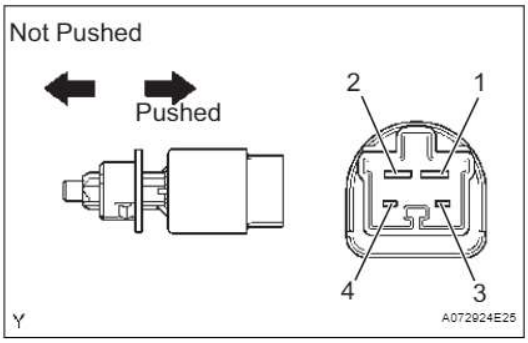

(a) Remove the stop light switch assembly.
(b) Measure the resistance between the terminals.
Standard resistance


Tester Connection	Switch Position	Specified Condition
1 - 2	Switch pin not pushed	Below 1 Ω
	Switch pin pushed	10 kΩ or higher
3 - 4	Switch pin not pushed	10 kΩ or higher
	Switch pin pushed	Below 1 Ω

(c) Reinstall the stop light switch assembly.

NG → REPLACE STOP LIGHT SWITCH ASSEMBLY

OK

3 CHECK ECM (STP AND ST1 - VOLTAGE)

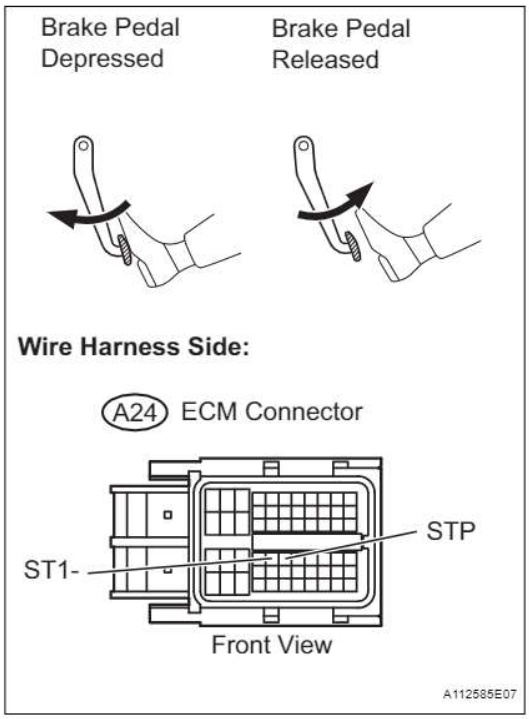

(a) Disconnect the A24 ECM connector.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage between terminals ST1- and STP of the A24 ECM connector and body ground.
Standard voltage

Tester Connection	Brake Pedal Operation	Specified Condition
A24-35 (ST1-) - Body ground	Released	9 to 14 V
	Depressed	0 to 3 V
A24-36 (STP) - Body ground	Released	0 to 3 V
	Depressed	9 to 14 V


(d) Reconnect the ECM connector.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK →

REPLACE ECM

4 INSPECT FUSE (STOP AND IGN FUSE)

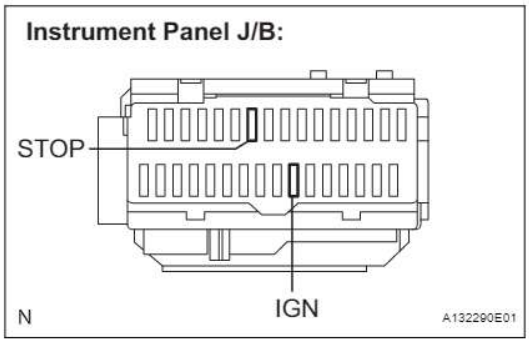

(a) Remove the STOP and IGN fuses from the instrument panel J/B.
(b) Measure the resistance.
Standard resistance:
Below 1 Ω
(c) Reinstall the STOP and IGN fuses.

NG → **REPLACE FUSES (STOP AND/OR IGN FUSES)**

OK →

REPAIR OR REPLACE HARNESS OR CONNECTOR

DTC	P0505	Idle Control System Malfunction

DESCRIPTION

The idling speed is controlled by the ETCS (Electronic Throttle Control System). The ETCS is comprised of: 1) the one valve type throttle body; 2) the throttle actuator, which operates the throttle valve; 3) the Throttle Position (TP) sensor, which detects the opening angle of the throttle valve; 4) the Accelerator Pedal Position (APP) sensor, which detects the accelerator pedal position; and 5) the ECM, which controls the ETCS. Based on the target idling speed, the ECM controls the throttle actuator to provide the proper throttle valve opening angle.

DTC No.	DTC Detection Condition	Trouble Area
P0505	Idling speed continues to vary greatly from target idling speed (2 trip detection logic)	• ETCS • Air induction system • PCV hose connections • ECM

ES

MONITOR DESCRIPTION

The ECM monitors the idling speed and idling air flow volume to conduct Idle Speed Control (ISC). The ECM determines that the ISC system is malfunctioning if the following conditions are met:

- The learned idling air flow volume remains at the maximum or minimum volume 5 times or more during a driving cycle.
- After driving at 6.25 mph (10 km/h) or more, the actual engine idling speed varies from the target idling speed by between 100 rpm and 200 rpm, 5 times or more during a driving cycle.


Example:

If the actual idling speed varies from the target idling speed by more than 200 rpm* 5 times during a driving cycle, the ECM illuminates the MIL and sets the DTC.

HINT:

*: Threshold idling speed varies with engine load.

Example:

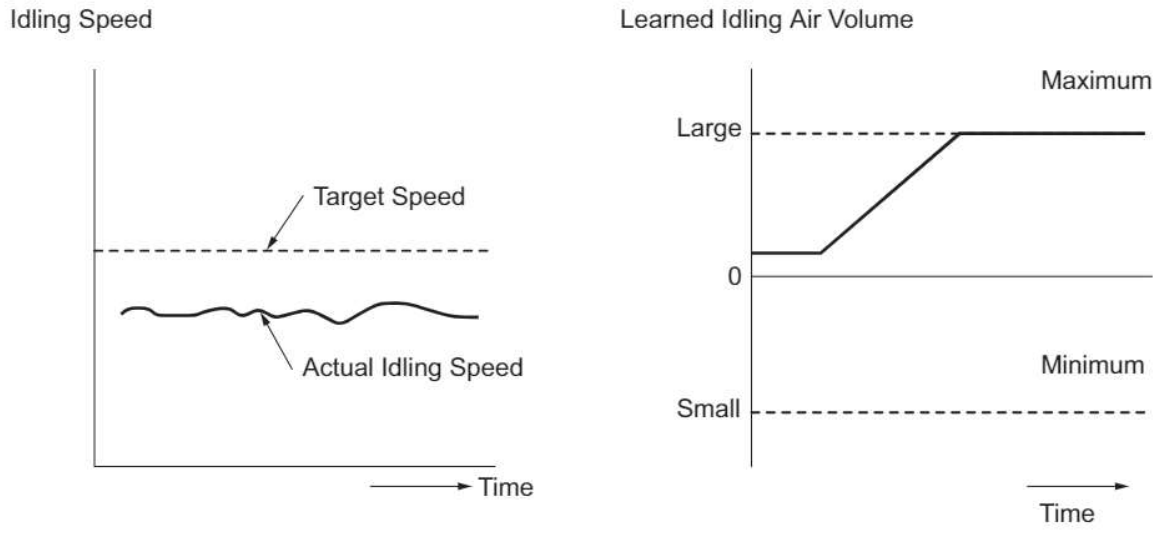

Y A121611E02

MONITOR STRATEGY

Related DTCs	P0505: ISC function
Required Sensors/Components (Main)	ETCS
Required Sensors/Components (Related)	Crankshaft position sensor, Engine coolant temperature sensor, and Vehicle speed sensor
Frequency of Operation	Once per driving cycle
Duration	10 minutes
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor will run whenever these DTCs are not present	None
Engine	Running

TYPICAL MALFUNCTION THRESHOLDS

Either of the following conditions 1 or 2 is met	-
1. Frequency that both of the following conditions (a) and (b) are met	5 times or more
(a) Engine rpm - Target engine rpm	Less than -100 rpm, or more than 150 rpm
(b) Vehicle condition	Stop after vehicle was driven by 6.25 mph (10 km/h) or more
2. Frequency that both of the following conditions (c) and (d) are met	Once
(c) Engine rpm - Target engine rpm	Less than -100 rpm, or more than 150 rpm
(d) IAC flow rate learning value	1.3 L/sec. or less, or 6 L/sec. or more

INSPECTION PROCEDURE

HINT:

- The following conditions may also cause DTC P0505 to be set:
  (a) The floor carpet overlapping slightly onto the accelerator pedal, causing the accelerator pedal to be slightly depressed and therefore the throttle valve position to be slightly open.
  (b) The accelerator pedal being not fully released.
- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

ES

1 CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P0505)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following the menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P0505	A
P0505 and other DTCs	B

HINT:
If any DTCs other than P0505 are output, troubleshoot those DTCs first.

B → **GO TO DTC CHART**

A

2 CHECK PCV HOSE CONNECTIONS

OK:
PCV hose is connected correctly and is not damaged.

NG → **REPAIR OR REPLACE PCV HOSE**

OK

3 CHECK AIR INDUCTION SYSTEM

(a) Check the air induction system for vacuum leakage.
OK:
No leakage from air induction system.

NG → **REPAIR OR REPLACE AIR INDUCTION SYSTEM**

OK

4	CHECK THROTTLE VALVE

(a) Check the throttle valve condition.
OK:
Throttle valve is not contamainated with foreign objects and moves smoothly.

NG → REPLACE THROTTLE BODY ASSEMBLY

OK ↓

REPLACE ECM

DTC	P050A	Cold Start Idle Air Control System Performance

DTC	P050B	Cold Start Ignition Timing Performance


DESCRIPTION

The Electronic Throttle Control System (ETCS) controls the engine idling speed. The ETCS operates the throttle actuator to open and close the throttle valve, and adjusts the intake air amount to achieve the target idling speed.
In addition, the ECM retards the ignition timing and the ETCS increases the intake air amount to quickly increase the catalyst temperature at cold start to reduce emissions.

ES

DTC No.	DTC Detection Condition	Trouble Area
P050A	Accumulated intake air amount during 10 seconds of idling after cold start is less than threshold (2 trip detection logic)	• Throttle body assembly • Mass air flow meter • Air induction system • PCV hose connections • VVT system • Air cleaner filter element • ECM
P050B	Ignition timing retard value insufficient for 5 seconds or more during 10 seconds of P050A monitoring duration at cold start (2 trip detection logic)	• Throttle body assembly • Mass air flow meter • Air induction system • PCV hose connections • VVT system • Air cleaner filter element • ECM

MONITOR DESCRIPTION

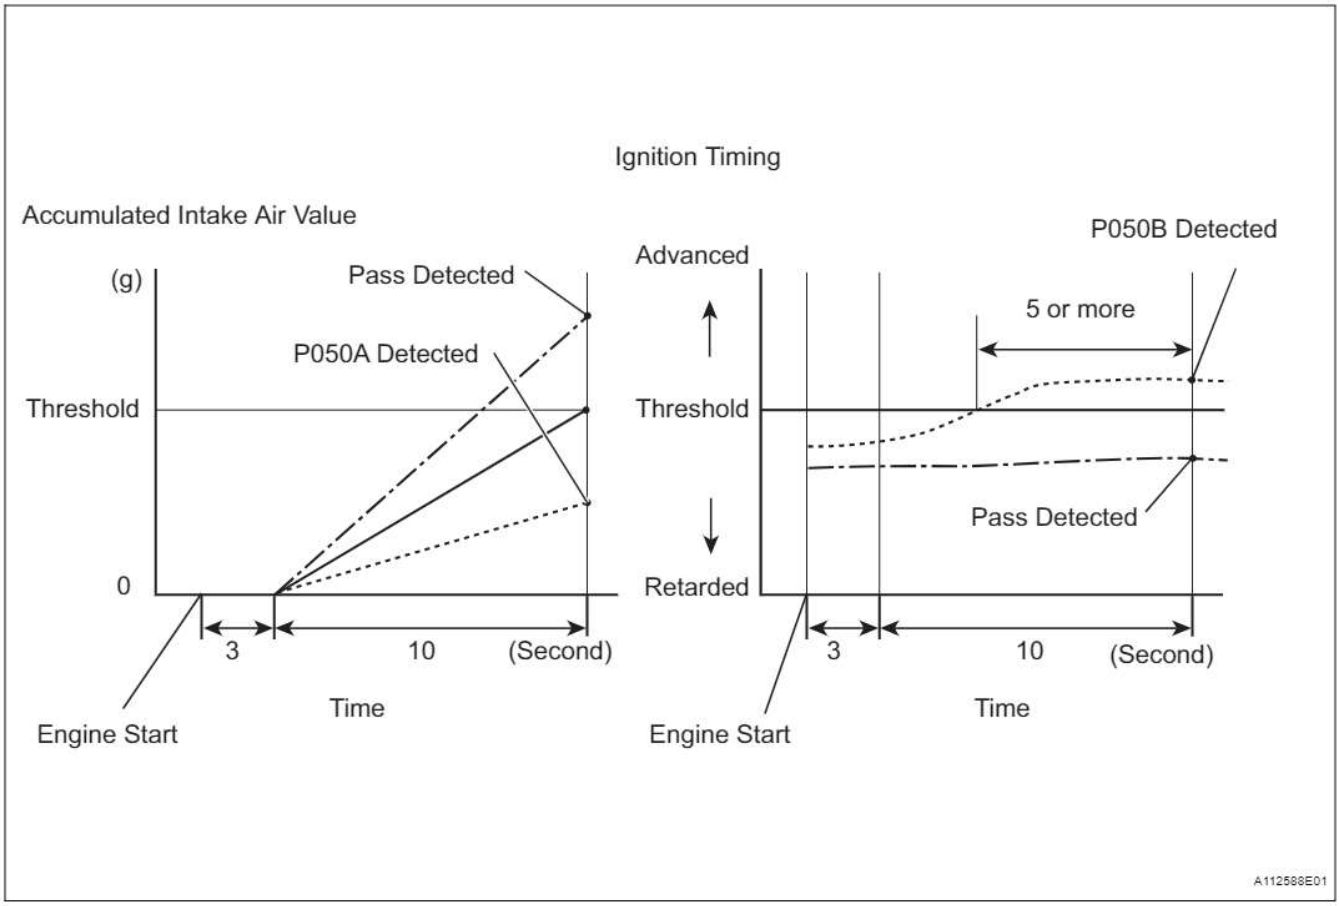

The ECM monitors the intake air amount during idling and the ignition timing.
When the Engine Coolant Temperature (ECT) is between -10°C and 50°C (14°F and 122°F), the ECM calculates the idling intake air amount for 10 seconds, beginning 3 seconds after the engine starts.
When the accumulated value is below the threshold, the ECM interprets this as a malfunction in the Idle Speed Control (ISC) system at cold start.
The ECM also monitors the ignition timing at cold start, and judges it to be incorrect when it is advanced to the same value for a warm engine for 5 seconds or more of the 10 second monitoring period.
Example:
P050A is detected when all conditions below are met (2 trip detection logic).
1. The ECT is between -10°C and 50°C (14°F and 122°F) when the engine starts.
2. The engine idles for 13 seconds after engine start.
3. The accumulated intake air amount is below the threshold.

The ECM sets the DTC and illuminates the MIL 13 seconds after the engine is next started.

NOTICE:

When the negative battery terminal is disconnected during inspection or repairs, the ISC learning values are cleared. The ISC learning must be performed by warming up the engine and idling for 5 minutes with the ECT at 75°C (167°F) or more because DTCs cannot be detected with the ISC learning values cleared.

MONITOR STRATEGY

Related DTCs	P050A: Idle speed control problem at cold P050B: Idle ignition timing problem at cold
Required Sensors/Components (Main)	Mass air flow meter
Required Sensors/Components (Related)	Engine Coolant Temperature (ECT) sensor, Throttle position sensor, Vehicle speed sensor
Frequency of Operation	Once per driving cycle
Duration	10 seconds
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

P050A:

Battery voltage	8 V or more
Time after engine start	3 seconds or more
Starter	OFF
ECT at engine start	-10°C (14°F) or more
ECT	-10°C to 50°C (14°F to 122°F)
Engine idling time	3 seconds or more
Fuel-cut	OFF
Vehicle speed	Less than 1.875 mph (3 km/h)
Time after shift position changed (PZEV)	1 second or more
Atmospheric pressure	76 kPa (570 mmHg) or more

P050B:

Battery voltage	8 V or more
Time after engine start	3 seconds or more
Starter	OFF
ECT at engine start	-10°C (14°F) or more
ECT	-10°C to 50°C (14°F to 122°F)
Engine idling time	3 seconds or more
Fuel-cut	OFF
Vehicle speed	Less than 1.875 mph (3 km/h)

TYPICAL MALFUNCTION THRESHOLDS

P050A:

Accumulated mass air flow	Manual transaxle: Less than 14.375 g Automatic transaxle (Except PZEV): Less than 13.75 g Automatic transaxle (PZEV): Less than 21.25 g

P050B:

Accumulated time when ignition timing retard is cut off	5 seconds or more

INSPECTION PROCEDURE

HINT:

ES

Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1 CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P050A AND/OR P050B)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following the menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P050A and/or P050B	A
P050A and/or P050B and other DTCs	B

HINT:
If any DTCs other than P050A and P050B are output, troubleshoot those DTCs first.

B → **GO TO DTC CHART**

A

2 READ VALUE USING INTELLIGENT TESTER (FUEL TRIM)

HINT:
Calculate the total fuel trim values to check the characteristic deviation of the mass air flow meter.

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / SHORT FT #1 and LONG FT #1.
(e) Read the values displayed on the tester.
(f) Add together the SHORT FT #1 and LONG FT #1 values to obtain the total FUEL TRIM.

OK:
Total of SHORT FT #1 and LONG FT #1 values is between -20 % and 20 %.

OK → **Go to step 12**

NG

3	PERFORM ACTIVE TEST USING INTELLIGENT TESTER (OPERATE OCV)

(a) Connect the intelligent tester to the DLC3.
(b) Start the engine and turn the tester on.
(c) Warm up the engine.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / VVT CTRL B1.
(e) Check the engine speed while operating the Oil Control Valve (OCV) using the tester.

OK

Tester Operation	Specified Condition
OCV OFF	Normal engine speed
OCV ON	Engine idles roughly or stalls (soon after OCV switched from OFF to ON)

NG → **Go to step 8**

OK

4	CHECK PCV HOSE CONNECTIONS

OK:
PCV hose is connected correctly and is not damaged.

NG → **Go to step 9**

OK

5	CHECK AIR INDUCTION SYSTEM

(a) Check the air induction system for vacuum leakage.
OK:
No leakage from air induction system.

NG → **Go to step 10**

OK

6	CHECK AIR CLEANER FILTER ELEMENT SUB-ASSEMBLY

(a) Visually check that the air cleaner filter element is not excessively contaminated with dirt or oil.
OK:
Air cleaner filter element is not excessively contaminated with dirt or oil.

NG → Go to step 11

OK

7	REPLACE MASS AIR FLOW METER

NEXT → Go to step 15

8	CHECK AND REPAIR VVT SYSTEM

NEXT → Go to step 15

9	REPAIR OR REPLACE PCV HOSE

NEXT → Go to step 15

10	REPAIR OR REPLACE AIR INDUCTION SYSTEM

NEXT → Go to step 15

11	REPLACE AIR CLEANER FILTER ELEMENT SUB-ASSEMBLY

NEXT → Go to step 15

12	CHECK THROTTLE VALVE

(a) Check for deposits around the throttle valve and throttle valve condition.

OK:

No deposits around throttle valve and throttle valve moves smoothly.

NG → Go to step 14

OK

13	REPLACE ECM

NEXT → Go to step 15

14	REPAIR OR REPLACE THROTTLE BODY ASSEMBLY

NEXT → Go to step 15

15	CHECK WHETHER DTC OUTPUT RECURS (DTC P050A AND/OR P050B)

NOTICE:
In this operation, the engine must be cold (the same level as the engine coolant temperature recorded in the freeze frame data).

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Clear the DTCs (See page ES-38).
(e) Switch the ECM from normal mode to check mode using the tester (See page ES-41).
(f) Start the engine to idle for a minute.
OK:
Stable fast idling.
(g) Read the DTCs.
OK:
No DTC output.

ES

NEXT

END

DTC	P0560	System Voltage

DESCRIPTION

The battery supplies electricity to the ECM even when the ignition switch is off. This power allows the ECM to store data such as DTC history, freeze frame data and fuel trim values. If the battery voltage falls below a minimum level, the memory is cleared and the ECM determines that there is a malfunction in the power supply circuit. When the engine is next started, the ECM illuminates the MIL and set the DTC.

DTC No.	DTC Detection Condition	Trouble Area
P0560	Open in ECM back up power source circuit (1 trip detection logic)	• Open in back up power source circuit • Battery • Battery terminals • EFI No. 1 fuse • ECM

ES

HINT:
If DTC P0560 is set, the ECM does not store other DTCs or the data stored in the ECM are partly erased.

MONITOR STRATEGY

Related DTCs	P0560: ECM system voltage
Required Sensors/Components (Main)	ECM
Required Sensors/Components (Related)	-
Frequency of Operation	Continuous
Duration	3 seconds
MIL Operation	Immediate (MIL illuminated after next engine start)
Sequence of Operation	None


TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None
Stand-by RAM	Initialized

TYPICAL MALFUNCTION THRESHOLDS

ECM power source	Less than 3.5 V


WIRING DIAGRAM

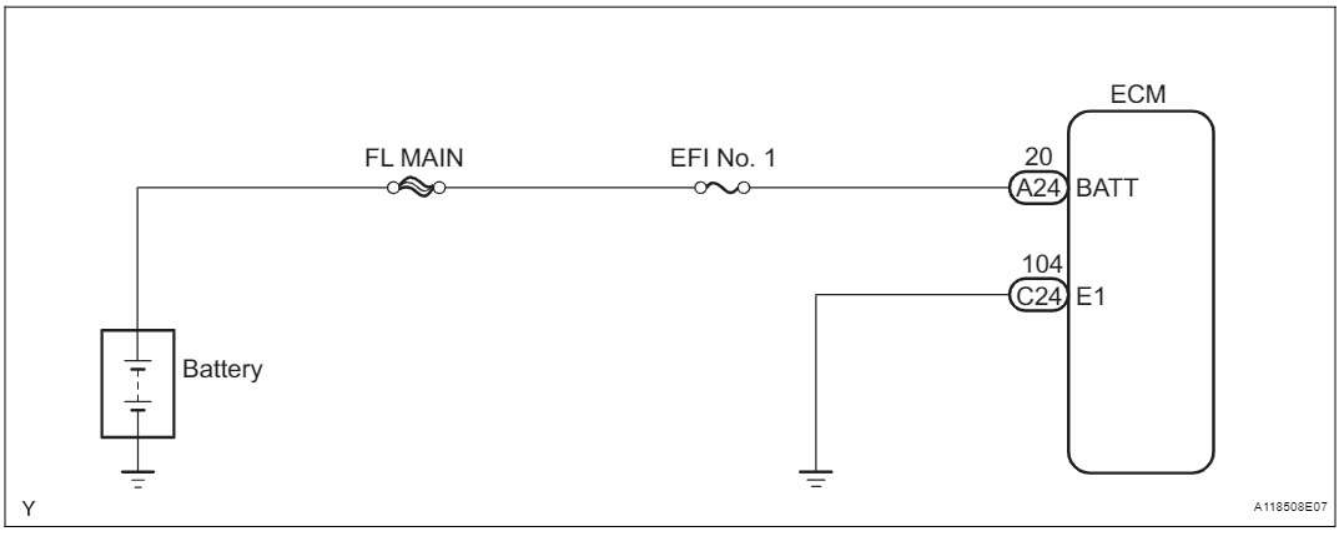

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	CHECK FUSE (EFI NO. 1 FUSE)

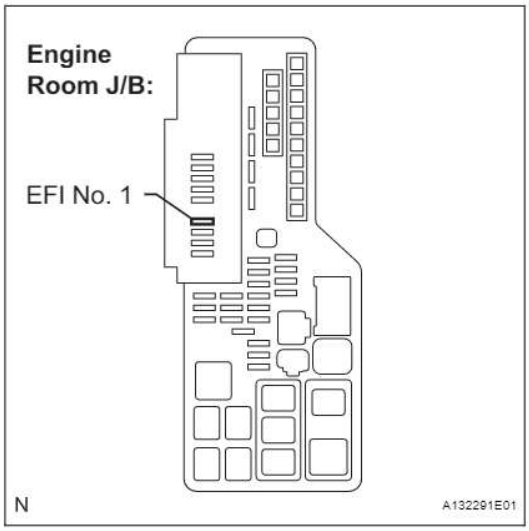


(a) Remove the EFI No. 1 fuse from the engine room J/B.
(b) Measure the resistance of the EFI No. 1 fuse.
Standard resistance:
Below 1 Ω
(c) Reinstall the EFI No. 1 fuse.

NG → **REPLACE FUSE (EFI NO. 1 FUSE)**

OK

ES

2	CHECK HARNESS AND CONNECTOR (ECM - EFI NO. 1 FUSE, EFI NO. 1 FUSE - BATTERY)

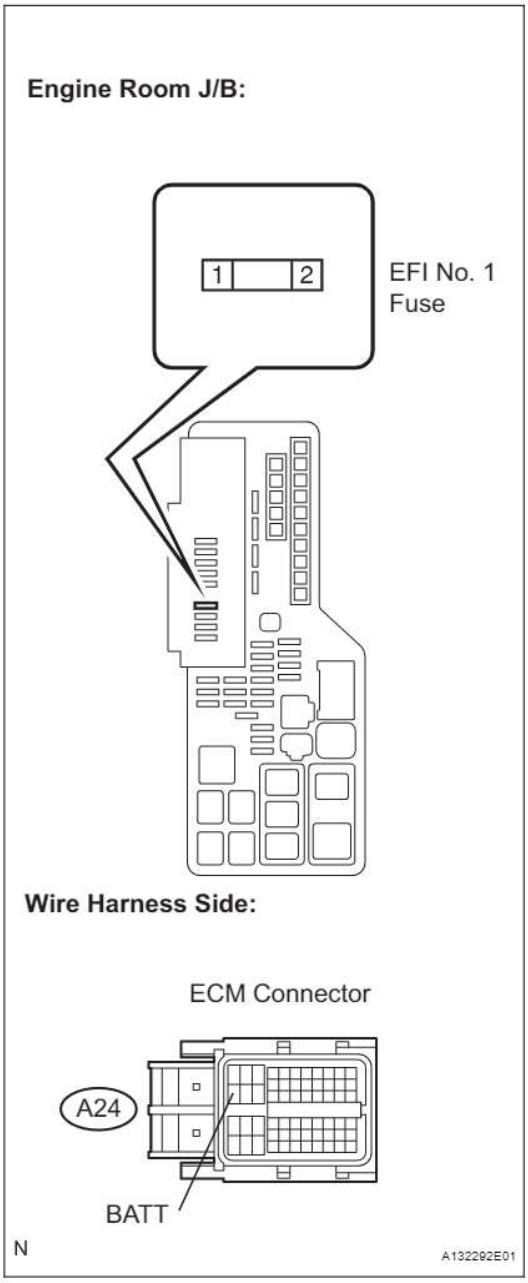

(a) Check the harness and the connector between the EFI No. 1 fuse and ECM.
(1) Remove the EFI No. 1 fuse from the engine room J/B.
(2) Disconnect the A24 ECM connector.
(3) Measure the resistance.

Standard resistance (Check for open)

Tester Connection	Specified Condition
2 (EFI No. 1 fuse) - A24-20 (BATT)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
2 (EFI No. 1 fuse) or A24-20 (BATT) - Body ground	10 kΩ or higher

(4) Reconnect the ECM connector.
(5) Reinstall the EFI No. 1 fuse.

(b) Check the harness and the connector between the EFI No. 1 fuse and battery.
(1) Remove the EFI No. 1 fuse from the engine room J/B.
(2) Disconnect the negative battery terminal.
(3) Disconnect the positive battery terminal.
(4) Measure the resistance.

Standard resistance (Check for open)

Tester Connection	Specified Condition
Battery positive terminal - 1 (EFI No. 1 fuse)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
Battery positive terminal or 1 (EFI No. 1 fuse) - Body ground	10 kΩ or higher

(5) Reconnect the positive battery terminal.
(6) Reconnect the negative battery terminal.
(7) Reinstall the EFI No. 1 fuse.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

3	INSPECT BATTERY

(a) Check the battery voltage.
Standard voltage:
12.5 to 12.9 V at 20°C (68°F)

NG → **REPLACE BATTERY**

OK

4	CHECK BATTERY TERMINAL

(a) Check that the battery terminals are not loose or corroded.
OK:
Battery terminals are not loose or corroded.

NG → REPAIR OR REPLACE BATTERY TERMINAL

OK

5	CHECK WHETHER DTC OUTPUT RECURS

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Clear the DTCs (See page ES-38).
(d) Turn the ignition switch off and turn the tester off.
(e) Start the engine and turn the tester on.
(f) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(g) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P0560	A
No output	B

B → CHECK FOR INTERMITTENT PROBLEMS

A

REPLACE ECM

DTC	P0604	Internal Control Module Random Access Memory (RAM) Error
DTC	P0606	ECM / PCM Processor
DTC	P0607	Control Module Performance
DTC	P0657	Actuator Supply Voltage Circuit / Open

ES

DESCRIPTION

The ECM continuously monitors its own internal memory status, internal circuits, and output signals transmitted to the throttle actuator. This self-check ensures that the ECM is functioning properly. If any malfunction is detected, the ECM sets the appropriate DTC and illuminates the MIL.
The ECM memory status is diagnosed by internal mirroring of the main CPU and the sub CPU to detect Random Access Memory (RAM) errors. The two CPUs also perform continuous mutual monitoring. The ECM illuminates the MIL and sets a DTC if: 1) outputs from the two CPUs are different or deviate from the standards, 2) the signals sent to the throttle actuator deviate from the standards, 3) a malfunction is found in the throttle actuator supply voltage, and 4) any other ECM malfunction is found.

DTC No.	DTC Detection Condition	Trouble Area
P0604 P0606 P0607 P0657	ECM internal error (1 trip detection logic)	ECM

MONITOR STRATEGY

Related DTCs	P0604: ECM RAM error P0606: ECM range check P0607: ECM CPU malfunction P0657: ETCS power supply
Required Sensors/Components (Main)	ECM
Required Sensors/Components (Related)	-
Frequency of Operation	Once per driving cycle: P0657 Continuous: P0604, P0606 and P0607
Duration	Within 1 second
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None

TYPICAL MALFUNCTION THRESHOLDS

ECM RAM errors (P0604):

RAM mirror check	Fail

ECM CPU range check (P0606):

Either of the following conditions is met:	-
Difference between throttle valve position of main CPU and throttle valve position of sub CPU	0.3 V or more
Difference between accelerator pedal position of main CPU and accelerator pedal position of sub CPU	0.3 V or more

ECM CPU malfunction (P0607):

Either of the following conditions A or B is met	-
A. All of the following conditions (a), (b) and (c) are met	-
(a) CPU reset	1 time or more
(b) Learned TP - learned APP	0.4 V or more
(c) Electronic throttle actuator	OFF
B. CPU reset	2 times or more

ETCS power supply (P0657):

ETCS power supply when ignition switch turned ON position	7 V or more

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P0604, P0606, P0607 OR P0657)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P0604, P0606, P0607 or P0657	A
P0604, P0606, P0607 or P0657 and other DTCs	B

B → GO TO DTC CHART

A

REPLACE ECM

DTC	P0617	Starter Relay Circuit High

DESCRIPTION

While the engine is being cranked, the positive battery voltage is applied to terminal STA of the ECM. If the ECM detects the Starter Control (STA) signal while the vehicle is being driven, it determines that there is a malfunction in the STA circuit. The ECM then illuminates the MIL and sets the DTC.
This monitor runs when the vehicle is driven at 12.43 mph (20 km/h) for over 20 seconds.

DTC No.	DTC Detection Condition	Trouble Area
P0617	When conditions (a), (b) and (c) are met, positive (+B) battery voltage 10.5 V or more is applied to ECM for 20 seconds (1 trip detection logic) (a) Vehicle speed 12.43 mph (20 km/h) or more (b) Engine speed 1,000 rpm or more (c) STA signal ON	• Park/Neutral Position (PNP) switch • Starter relay circuit • Ignition switch • ECM

ES

MONITOR STRATEGY

Related DTCs	P0617: Starter signal
Required Sensors/Components (Main)	STARTER relay, PNP switch, Clutch start switch and Ignition switch
Required Sensors/Components (Related)	Vehicle Speed Sensor (VSS), Crankshaft Position (CKP) sensor
Frequency of Operation	Continuous
Duration	20 seconds
MIL Operation	Immediate
Sequence of Operation	None


TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None
Battery voltage	10.5 V or more
Vehicle speed	12.43 mph (20 km/h) or more
Engine speed	1,000 rpm or more

TYPICAL MALFUNCTION THRESHOLDS

Starter signal	ON

WIRING DIAGRAM

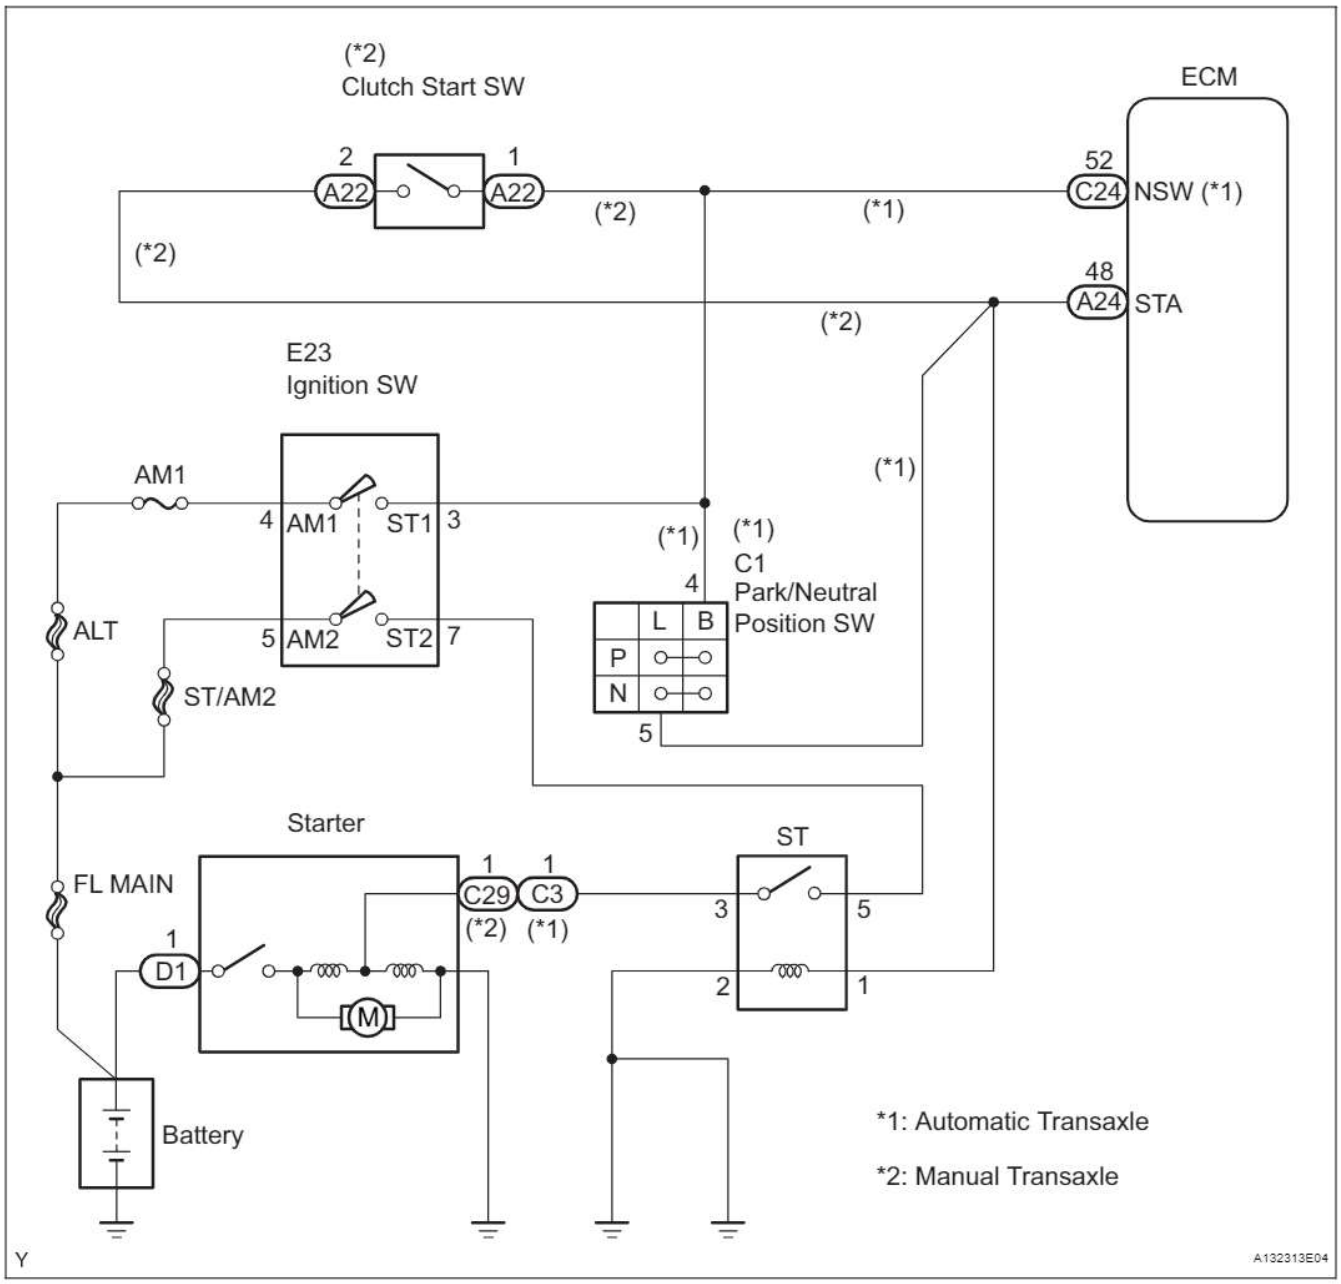

INSPECTION PROCEDURE

HINT:

- The following troubleshooting flowchart is based on the premise that the engine is cranked normally. If the engine does not crank, proceed to the problem symptoms table (See page ES-27).
- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	READ VALUE USING INTELLIGENT TESTER (STARTER SIGNAL)

(a) Connect the intelligent tester to the DLC3.

(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / STARTER SIG.
(d) Read the value displayed on the tester when turn the ignition switch to the ON and START positions.

OK

Ignition Switch Position	STARTER SIG
ON	OFF
START	ON

ES

NG → **Go to step 2**

OK

CHECK FOR INTERMITTENT PROBLEMS


2 INSPECT PARK/NEUTRAL POSITION SWITCH ASSEMBLY

HINT:
For vehicles with the manual transaxle, proceed to step 5.
(a) Disconnect the C1 PNP switch connector.
(b) Measure the resistance when the transmission gear selector lever is moved to each position.

Standard resistance

Gear Selector Lever Position	Tester Connection	Specified Condition
P	2 - 6, 4 - 5	Below 1 Ω
R	1 - 2	Below 1 Ω
N	2 - 9, 4 - 5	Below 1 Ω
D	2 - 7	Below 1 Ω
2	2 - 3	Below 1 Ω
L	2 - 8	Below 1 Ω

Component Side:

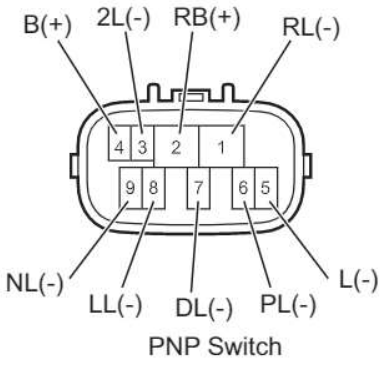

(c) Reconnect the PNP switch connector.

OK → **Go to step 8**

NG

3 REPLACE PARK/NEUTRAL POSITION SWITCH ASSEMBLY

NEXT

4 READ VALUE USING INTELLIGENT TESTER (STARTER SIGNAL)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.

(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / STARTER SIG.
(d) Read the value displayed on the tester when turn the ignition switch to the ON and START positions.

OK

Ignition Switch Positions	STARTER SIG
ON	OFF
START	ON


NG → Go to step 8

OK

ES

SYSTEM OK

5 INSPECT CLUTCH START SWITCH ASSEMBLY

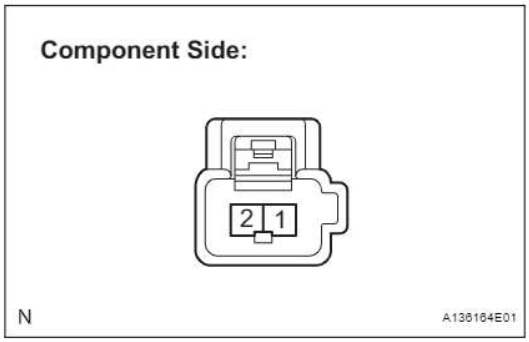

(a) Disconnect the A22 clutch start switch connector.
(b) Measure the resistance between the terminals.
Standard resistance

Tester Connection	Switch Condition	Specified Condition
1 - 2	Clutch pedal released	10 kΩ or higher
1 - 2	Clutch pedal depressed	Below 1 Ω

(c) Reconnect the clutch start switch connector.

OK → Go to step 8

NG

6 REPLACE CLUTCH START SWITCH ASSEMBLY

NEXT

7 READ VALUE USING INTELLIGENT TESTER (STARTER SIGNAL)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / STARTER SIG.
(d) Check the value displayed on the tester when turn the ignition switch to the ON and START positions.

OK

Ignition Switch Position	STARTER SIG
ON	OFF
START	ON


NG → Go to step 8

OK

SYSTEM OK

8 INSPECT IGNITION SWITCH ASSEMBLY

Component Side:



A056879E35

(a) Disconnect the E23 ignition switch connector.
(b) Measure the resistance between the terminals.

Standard resistance

Tester Connection	Ignition Switch Position	Specified Condition
All Terminals	LOCK	10 kΩ or higher
2 - 4	ACC	Below 1 Ω
1 - 2 - 4, 5 - 6	ON	
1 - 3 - 4, 5 - 6 - 7	START	

(c) Reconnect the ignition switch connector.

OK → Go to step 10

NG

9 REPLACE IGNITION SWITCH ASSEMBLY

NEXT

10 READ VALUE USING INTELLIGENT TESTER (STARTER SIGNAL)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / STARTER SIG.
(d) Check the value displayed on the tester when turn the ignition switch to the ON and START positions.

OK

Ignition Switch Position	STARTER SIG
ON	OFF
START	ON

NG → Go to step 11

OK

SYSTEM OK

11	REPAIR OR REPLACE HARNESS OR CONNECTOR (PNP SWITCH OR CLUTCH START SWITCH - STA TERMINAL OF ECM)

NEXT

12	CHECK WHETHER DTC OUTPUT RECURS

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Clear the DTCs (See page ES-38).
(e) Drive the vehicle at more than 12.43 mph (20 km/h) for over 20 seconds.
(f) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(g) Read the DTCs.

ES

Result

Display (DTC Output)	Proceed to
P0617	A
No DTC	B

B → SYSTEM OK

A

REPLACE ECM

DTC	P0630	VIN not Programmed or Mismatch - ECM / PCM

DESCRIPTION

DTC P0630 is set when the Vehicle Identification Number (VIN) is not stored in the Engine Control Module (ECM) or the input VIN is incorrect. Input the VIN with the intelligent tester.

DTC No.	DTC Detection Condition	Trouble Area
P0630	• VIN not stored in ECM • Input VIN incorrect (1 trip detection logic)	ECM

MONITOR STRATEGY

ES

Related DTCs	P0630: VIN not programmed
Required Sensors/Components (Main)	ECM
Required Sensors/Components (Related)	-
Frequency of Operation	Continuous
Duration	0.325 seconds
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Battery voltage	8 V or more
Ignition switch	ON
Starter	OFF

TYPICAL MALFUNCTION THRESHOLDS

VIN code	Not programmed

COMPONENT OPERATING RANGE

VIN code	Programmed

INSPECTION PROCEDURE

HINT:

Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	READ CURRENT DTC

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(d) Read the DTCs.

Result

Display (DTC Output)	Proceed To
P0630	A
P0630 and other DTCs	B

If any DTCs other than P0630 are output, troubleshoot those DTCs first.

NOTICE:
If P0630 is set, the VIN must be input to the ECM using the intelligent tester. However, all DTCs are cleared automatically by the tester when the VIN is input. If DTCs other than P0630 are set, check them first.

B → GO TO DTC CHART

ES

A

2	INPUT VIN WITH INTELLIGENT TESTER

(a) Refer to REGISTRATION (See page ES-17).

NEXT

END

DTC	P0724	Brake Switch "B" Circuit High

DESCRIPTION

The purpose of this circuit is to prevent the engine from stalling while driving in the lock-up condition when the brakes are suddenly applied.
When the brake pedal is depressed, this switch sends a signal to the ECM. Then the ECM cancels the operation of the lock-up clutch while braking is in progress.

DTC No.	DTC Detection Condition	Trouble Area
P0724	Stop light switch remains ON even when vehicle is driven in GO (18.65 mph (30 km/h) or more) and STOP (less than 1.86 mph (3 km/h)) pattern 5 times (2 trip detection logic)	• Short in stop light switch signal circuit • Stop light switch • ECM

ES

MONITOR DESCRIPTION

This DTC indicates that the stop light switch remains ON. When the stop light switch remains ON during GO and STOP driving, the ECM interprets this as a fault in the stop light switch. Then the MIL illuminates and the ECM stores the DTC. The vehicle must be driven in GO (18.65 mph (30 km/h) or more) and STOP (less than 1.86 mph (3 km/h)) pattern 5 times in 2 driving cycles in order for the DTC to be output.

MONITOR STRATEGY

Related DTCs	P0724: Stop light switch/Range check/Rationality
Required sensors/Components	Stop light switch, Vehicle speed sensor
Frequency of operation	Continuous
Duration	GO and STOP 5 times
MIL operation	2 driving cycles
Sequence of operation	None


TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None
Battery voltage	8 V or more
Starter	OFF
Ignition switch	ON
GO (Vehicle speed is 18.65 mph (30 km/h) or more)	Once
STOP (Vehicle speed is less than1.86 mph (3 km/h))	Once

TYPICAL MALFUNCTION THRESHOLDS

Brake switch	Stuck ON

WIRING DIAGRAM

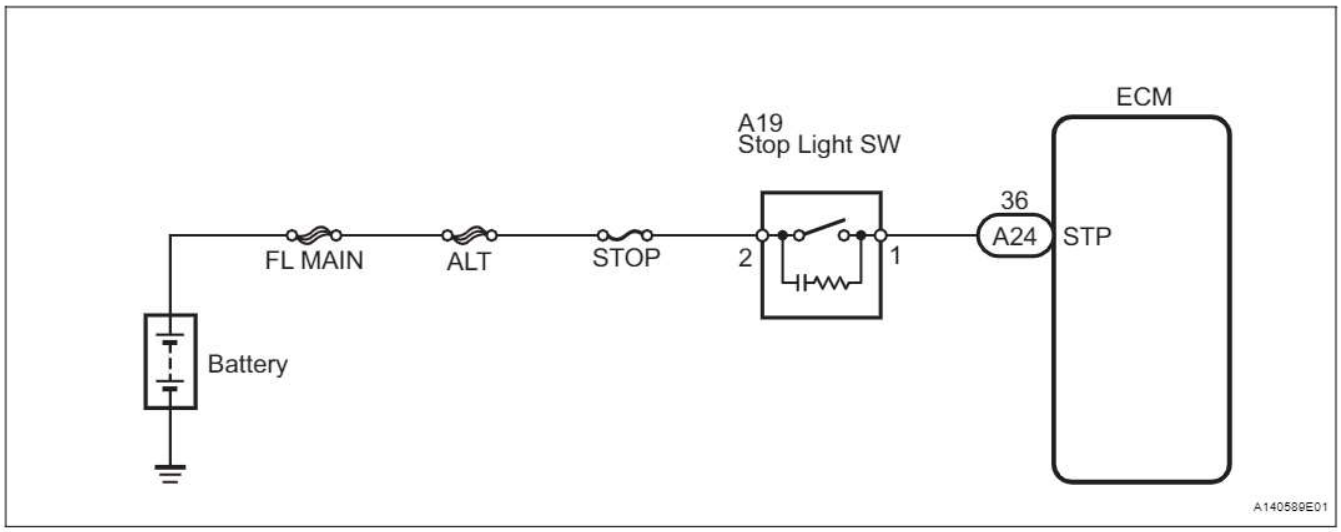

INSPECTION PROCEDURE

HINT:

- Using the intelligent tester's DATA LIST allows switch, sensor, actuator and other item values to be read without removing any parts. Reading the DATA LIST early in troubleshooting is one way to save time.
- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.


NOTICE:

In the table below, the values listed under "Normal Condition" are reference values. Do not depend solely on these reference values when deciding whether a part is faulty or not.

1. Warm up the engine.
2. Turn the ignition switch off.
3. Connect the intelligent tester to the DLC3.
4. Turn the ignition switch to the ON position.
5. Turn the intelligent tester on.
6. Enter the following menus: DIAGNOSIS / ENHANCED OBD II / DATA LIST.
7. Follow the instructions on the tester and read the DATA LIST.

Item	Measurement Item/ Range (Display)	Normal Condition	Diagnostic Note
STOP LIGHT SW	Stop light switch status/ ON or OFF	• Brake pedal is depressed: ON • Brake pedal is released: OFF	-

1 INSPECT STOP LIGHT SWITCH

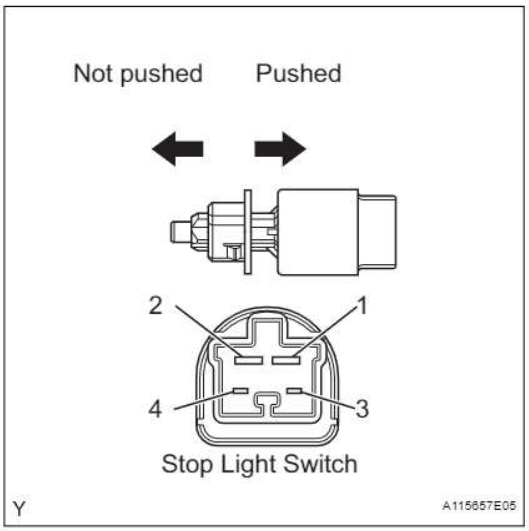

(a) Remove the stop light switch.
(b) Measure the resistance between the terminals.
Standard resistance


Tester Connection	Switch Condition	Specified Condition
1 - 2	Switch pin released	Below 1 Ω
	Switch pin pushed in	10 kΩ or higher
3 - 4	Switch pin released	10 kΩ or higher
	Switch pin pushed in	Below 1 Ω

(c) Reinstall the stop light switch.

NG → **REPLACE STOP LIGHT SWITCH**

OK

2 CHECK WIRE HARNESS (ECM - BATTERY)

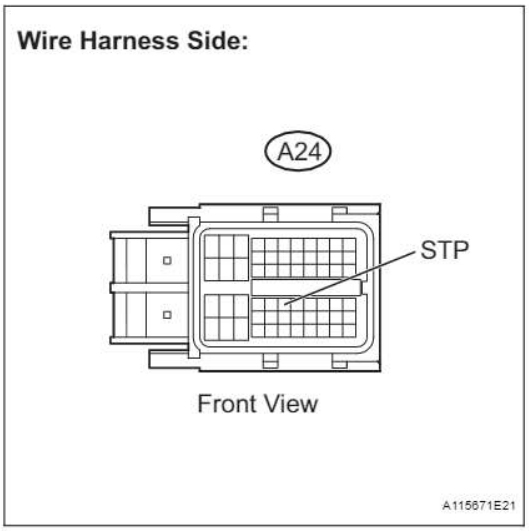

(a) Measure the voltage of the wire harness side connector.
(1) Disconnect the A24 ECM connector.
(2) Measure the voltage.
Standard voltage

Tester Connection	Condition	Specified Condition
A24-36 (STP) - Body ground	Brake pedal is depressed	10 to 14 V
A24-36 (STP) - Body ground	Brake pedal is released	Below 1 V

(3) Reconnect the ECM connector.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

REPLACE ECM

DTC	P2004	Intake Manifold Runner Control Stuck Open (Bank 1)

DTC	P2006	Intake Manifold Runner Control Stuck Closed (Bank 1)

DESCRIPTION

The intake manifold runner valve system is mounted on the intake manifold and consists of the intake manifold runner valve (IMRV), the IMRV motor and the IMRV position sensor. The IMRV motor opens and closes the IMRV using multiple gears (See page ES-270 for details). The valve position sensor detects the opening angle of the IMRV (See page ES-275 for details).


The IMRV has a groove on its upper portion.

When the IMRV is closed, air flows through a groove into the cylinder from the intake manifold, so that a dynamic air flow or "tumble" air flow is generated in the cylinder. The tumble air flow drastically reduces fuel deposits inside the intake air port and the combustion wall surface inside the cylinder. This improves the combustion efficiency by boosting the air-fuel mixture and air flow turbulence.

The related DTCs are P2009 and P2010 (See page ES-270), and P2014, P2016 and P2017 (See page ES-275).

NOTICE:

Do not disassemble the IMRV and the IMRV motor.

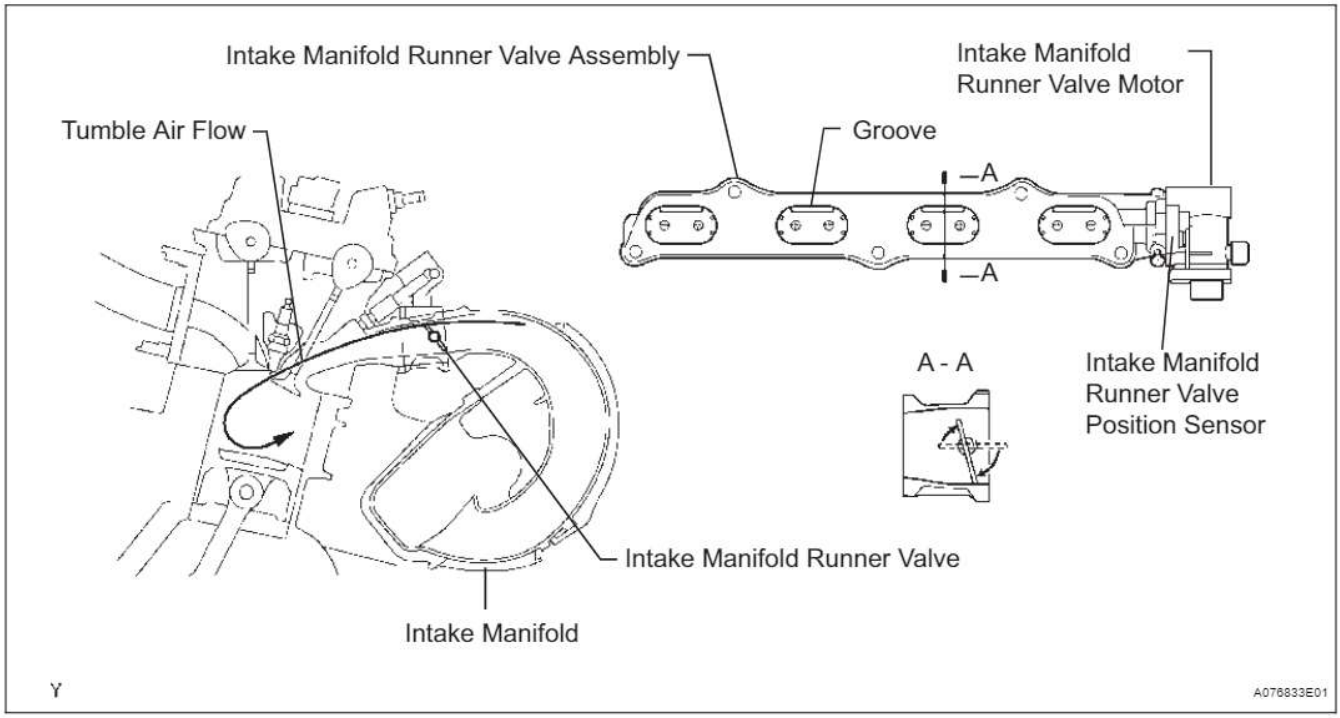


The ECM fully closes the IMRV during the first idle with the engine coolant temperature more than -10°C (14°F) and less than 60°C (140°F) and the intake air temperature is more than -10°C (14°F) before the engine is warmed up. In other condition, the ECM fully opens the IMRV.


Open and closed condition for IMRV:

Temperatures of the engine coolant and the intake air when the engine starting up	**Before warming up the engine**	**When one of the following conditions is met:** **(a) Throttle valve opening angle is 1.5° or more.** **(b) Vehicle speed is 3 mph (5 km/h) or more.** **(c) Engine speed is 3,000 rpm or more.** **(d) When the shift lever is in any position other than N.**	**After warming up the engine**
Engine coolant temp. is less than -10°C (14°F) or more than 60°C 140°F) or intake air temp. is less than -10°C (14°F).	OPEN	OPEN	OPEN
Engine coolant temp. is between -10°C (14°F) and 60°C (140°F). Intake air temp. is -10°C (14°F) or more.	CLOSED	OPEN	OPEN

IMRV Operation (Normal Condition)

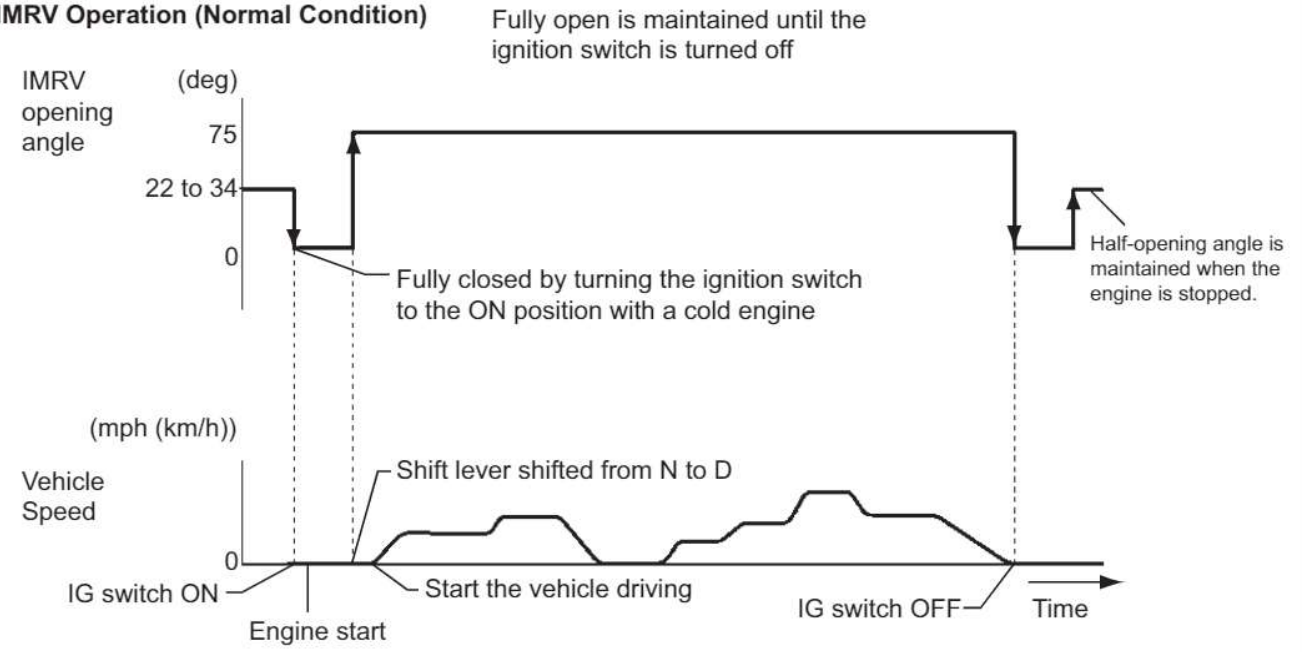

IMRV Malfunction Detection

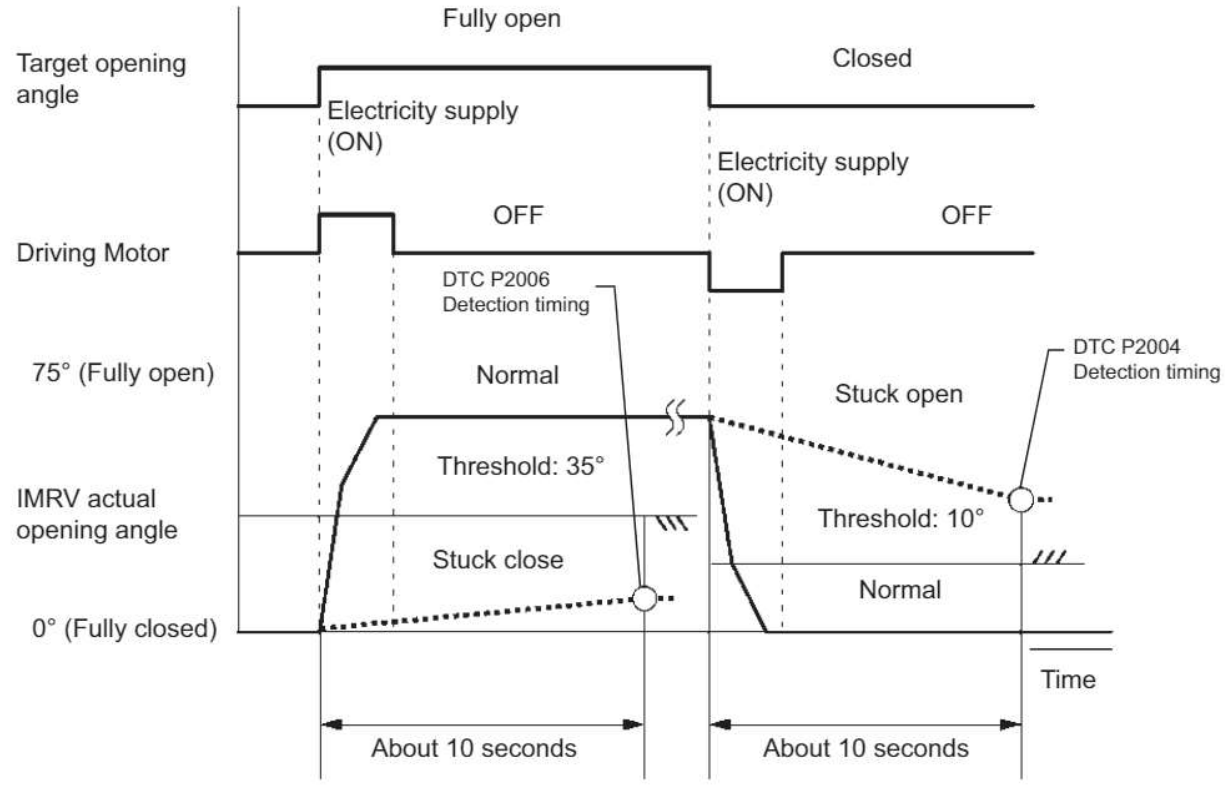

DTC No.	DTC Detection Condition	Trouble Area
P2004 (Stuck open)	When the IMRV opening angle is more than 10° after requesting the IMRV full close (2 trip detection logic)	• IMRV motor circuit • IMRV motor • IMRV position sensor • IMRV • ECM
P2006 (Stuck closed)	When the IMRV opening angle is less than 35° after requesting the IMRV full open (2 trip detection logic)	Same as DTC No. P2004

MONITOR STRATEGY

Related DTCs	P2004: IMRC Valve Stuck Open P2006: IMRC Valve Stuck Closed
Required sensors/components (Main)	IMRC Valve
Required sensors/components (Related)	IAT sensor, ECT sensor
Frequency of operation	Once per driving cycles
Duration	10 seconds
MIL operation	2 driving cycles
Sequence operation	None

TYPICAL ENABLING CONDITIONS

All:

Monitor runs whenever following DTCs are not present	P0110 - P0113 (IAT sensor) P0115 - P0118 (ECT sensor)

P2004:

Battery voltage	8 V or more
ECT	-10°C (14°F) or more
IAT	-10°C (14°F) or more
Ignition switch	ON
Command IMRC valve	Closed

P2006:

Battery voltage	8 V or more
Command IMRC valve	Closed

TYPICAL MALFUNCTION THRESHOLDS

P2004:

IMRC valve angle	10° or more


P2006:

IMRC valve angle	Less than 35°

COMPONENT OPERATING RANGE

IMRC valve position sensor voltage	0.2 and 4.8 V

WIRING DIAGRAM

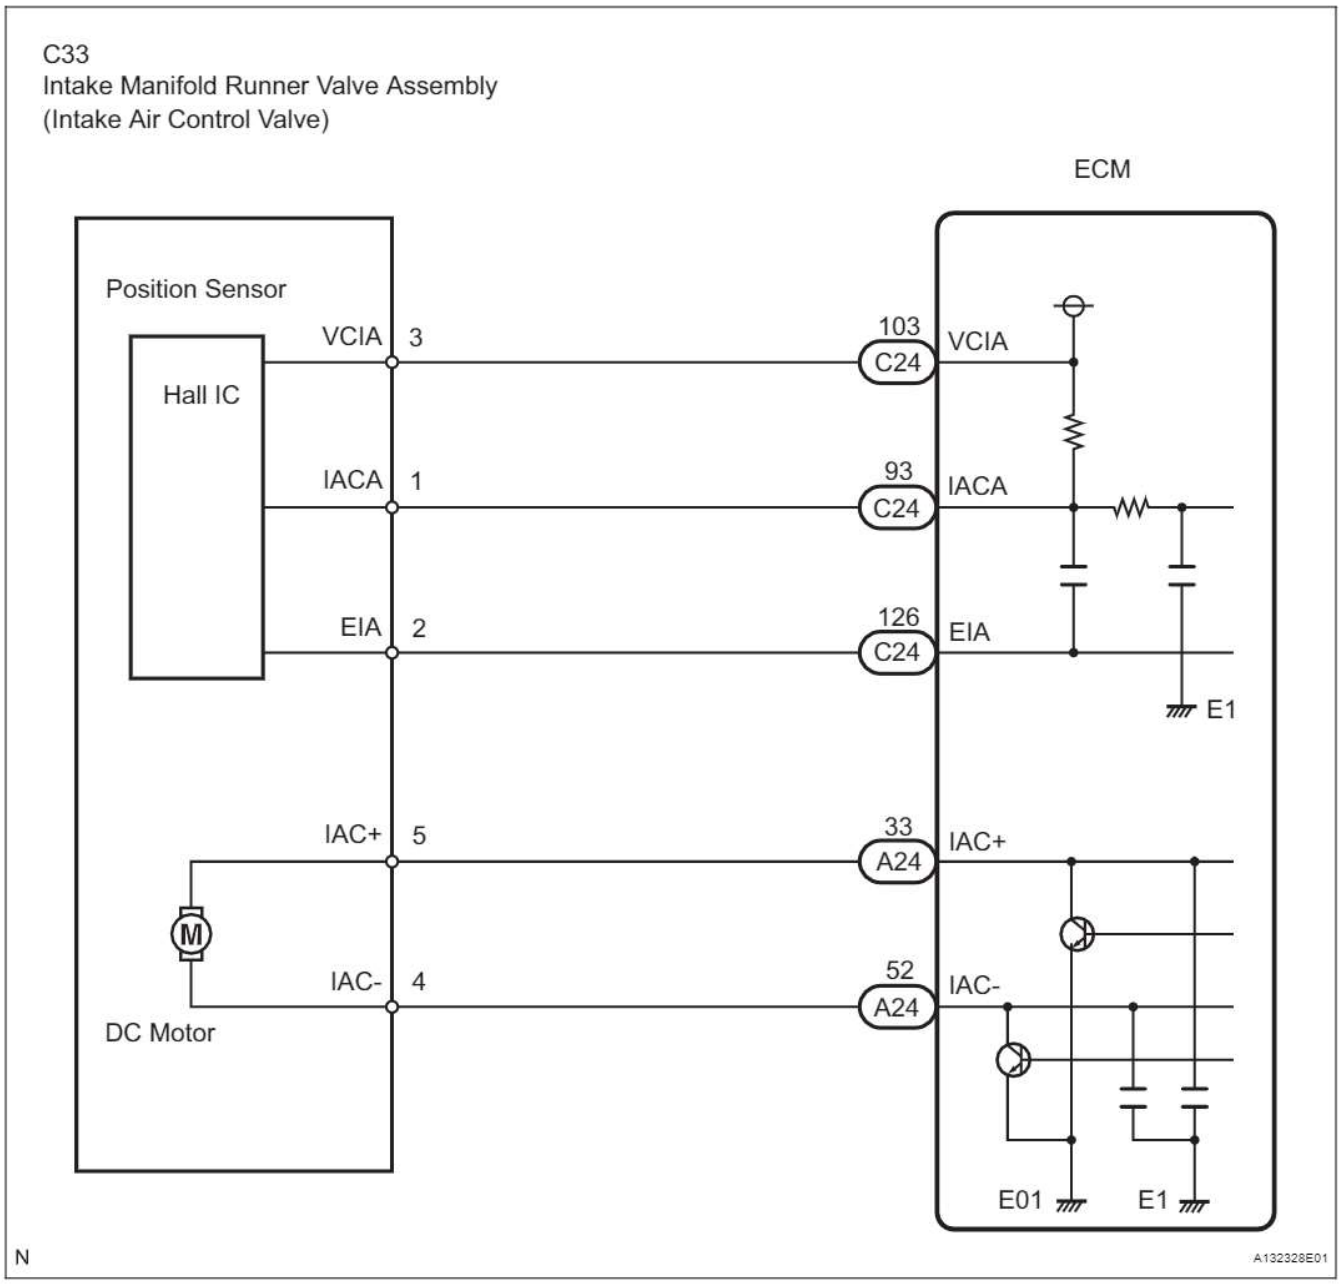

INSPECTION PROCEDURE

HINT:

Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	CHECK WHETHER DTC OUTPUT RECURS

(a) Clear the DTC (See page ES-38).
(b) Start the engine.

(c) Allow the engine to idle for 20 seconds or more after running the engine at more than 3,000 rpm for 20 seconds.
(d) Turn the ignition switch off. Let the engine remain stopped for 20 seconds.
HINT:
As running the engine to 3,000 rpm, the IMRV usually becomes fully opened. If the ignition switch is turned off under this condition, the IMRV is fully closed and then becomes half-opening angle.
(e) Connect the intelligent tester to the DLC3.
(f) Turn the ignition switch to the ON position.
(g) Enter the following menus: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.

ES

Result

Display (DTC output)	Proceed to
P2004 and/or P2006 are output again	A
No DTC output	B

B → CHECK FOR INTERMITTENT PROBLEMS

A

REPLACE INTAKE MANIFOLD RUNNER VALVE ASSEMBLY

DTC	P2009	Intake Manifold Runner Control Circuit Low (Bank 1)

DTC	P2010	Intake Manifold Runner Control Circuit High (Bank 1)

DESCRIPTION


The Intake Manifold Runner Valve (IMRV) motor is driven by the ECM. The IMRV motor opens and closes the IMRV.

When the current of the IMRV motor deviates from the standard range, the ECM determines that there is a malfunction.

The related DTCs are P2004 and P2006 (See page ES-264), and P2014, P2016 and P2017 (See page ES-275).

NOTICE:

Do not disassemble the IMRV and the IMRV motor.

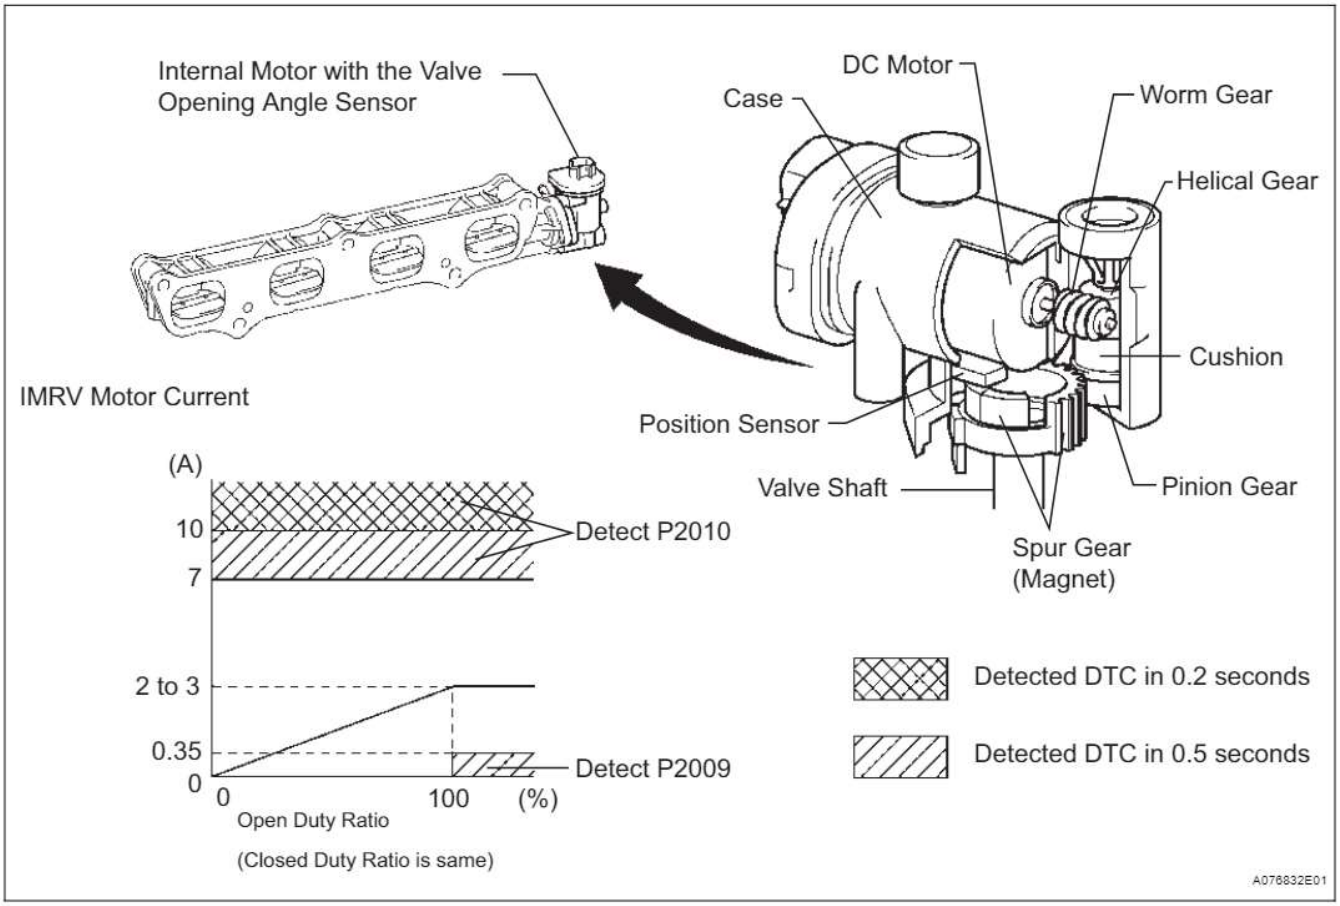

DTC No.	DTC Detection Condition	Trouble Area
P2009	Detecting open (in the motor or in the motor circuit) Condition (a) and (b) continue for 1 second: (1 trip detection logic) (a) IMRV motor output duty is 100 % (b) IMRV motor current is less than 0.35 A	• Open in IMRV motor circuit • IMRV motor • ECM

DTC No.	DTC Detection Condition	Trouble Area
P2010	• Detecting excess current (in the motor or in the motor circuit) Condition (a) continues for 0.2 seconds: (1 trip detection logic) (a) IMRV motor current is 10 A or more • Condition (a) continues for 0.5 seconds: (1 trip detection logic) (a) IMRV motor current is 7 A or more	• Short in IMRV motor circuit • IMRV motor • ECM

MONITOR STRATEGY

Related DTCs	P2009: IMRC Actuator Range Check (Low Current) P2010: IMRC Actuator Range Check (High Current)
Required sensors/components (Main)	IMRC Valve (Actuator)
Required sensors/components (Related)	None
Frequency of operation	Continuous
Duration	1 second: IMRC Actuator Range Check (Low Current) 6 times: IMRC Actuator Range Check (High Current)
MIL operation	Immediate
Sequence operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None
Battery voltage	8 V or more
Ignition switch	ON
Starter	OFF

TYPICAL MALFUNCTION THRESHOLDS

P2009:

IMRC actuator current	Less than 0.35 A


P2010:

IMRC actuator control IC current limiter port	Fail

COMPONENT OPERATING RANGE

IMRC actuator current	0.4 to 3 A

WIRING DIAGRAM

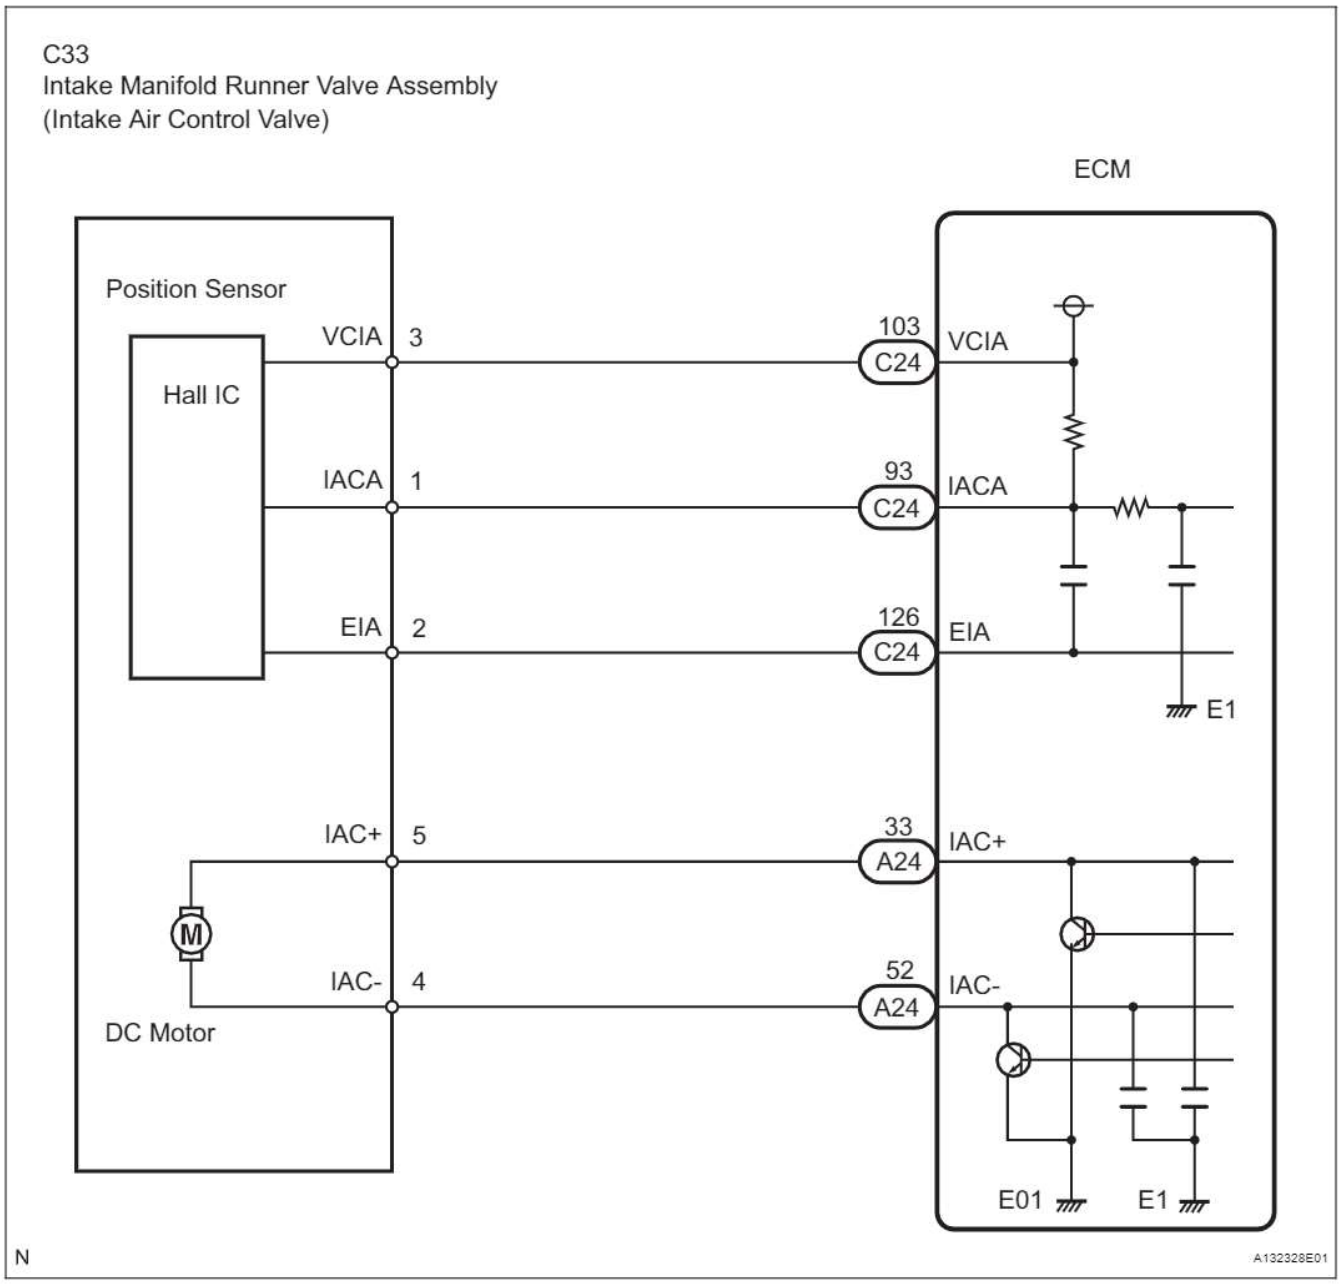


INSPECTION PROCEDURE

HINT:

Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1 INSPECT INTAKE MANIFOLD RUNNER VALVE ASSEMBLY (IMRV MOTOR RESISTANCE)

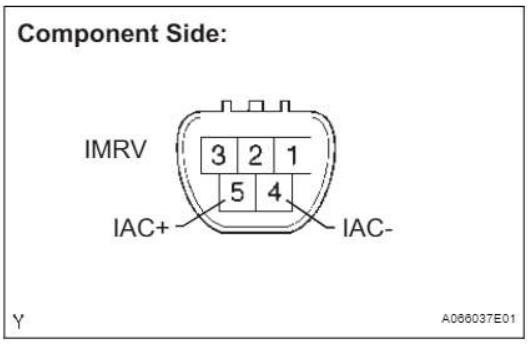

(a) Disconnect the C33 IMRV connector.
(b) Measure the motor resistance between the terminals.

Standard resistance


Tester Connection	Condition	Specified Condition
C33-5 (IAC+) - C33-4 (IAC-)	20°C (68°F)	1 to 19 Ω

NG → **REPLACE INTAKE MANIFOLD RUNNER VALVE ASSEMBLY**

ES

OK

2 CHECK HARNESS AND CONNECTOR (IMRV MOTOR - ECM)

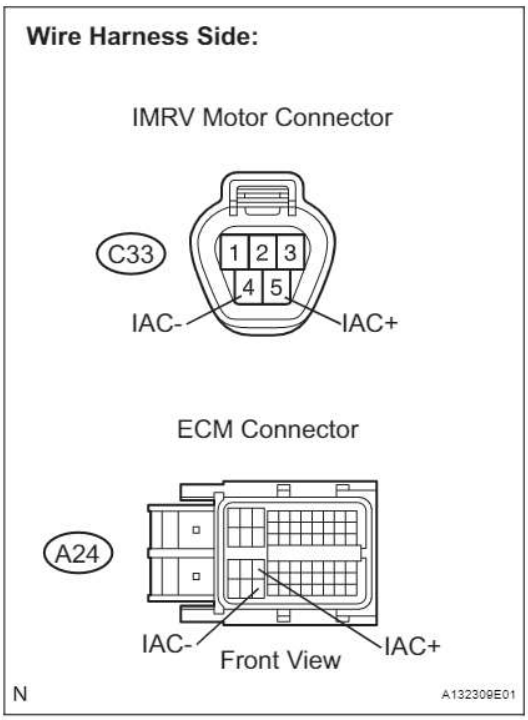

(a) Disconnect the A24 ECM connector.
(b) Disconnect the C33 IMRV motor connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)

Tester Connection	Specified Condition
A24-33 (IAC+) - C33-5 (IAC+)	Below 1 Ω
A24-52 (IAC-) - C33-4 (IAC-)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
A24-33 (IAC+) or C33-5 (IAC+) - Body ground	10 kΩ or more
A24-52 (IAC-) or C33-4 (IAC-) - Body ground	10 kΩ or more

(d) Reconnect the connectors.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

3 CHECK WHETHER DTC OUTPUT RECURS

(a) Clear the DTC (See page ES-38).
(b) Start the engine.
(c) Run the engine at more than 3,000 rpm.
(d) Turn the ignition switch off.

HINT:
As running the engine to 3,000 rpm, the IMRV usually becomes fully opened. If the ignition switch is turned off under this condition, the IMRV is fully closed and then becomes half-opening angle.

(e) Read the DTC.

Result

Display (DTC output)	Proceed to
P2009 and/or P2010 are output again	A
No DTC output	B

B → CHECK FOR INTERMITTENT PROBLEMS

A → REPLACE ECM

DTC	P2014	Intake Manifold Runner Position Sensor / Switch Circuit (Bank 1)
DTC	P2016	Intake Manifold Runner Position Sensor / Switch Circuit Low (Bank 1)
DTC	P2017	Intake Manifold Runner Position Sensor / Switch Circuit High (Bank 1)

ES

DESCRIPTION

HINT:


This IMRV position sensor is non-contact type.

The IMRV position sensor is mounted on the valve shaft axis (See page ES-264) and is used to measure the opening angle of the IMRV. Since this sensor is electronically controlled with hall elements, accurate control and reliability can be obtained.

Voltage of approximately 0.6 V is applied to terminal IACA of the ECM when the IMRV is fully closed. The voltage applied to terminal IACA increases in proportion to the IMRV opening angle, approximately 3.6 V is applied to the terminal when it is fully opened.

The ECM detects a malfunction in the IMRV position sensor when its voltage output deviates from the standard range. When a malfunction is detected, the ECM fully opens the IMRV using the IMRV motor until the IMRV position sensor returns to normal.

The related DTCs are P2004 and P2006 (See page ES-264), and P2009 and P2010 (See page ES-270).

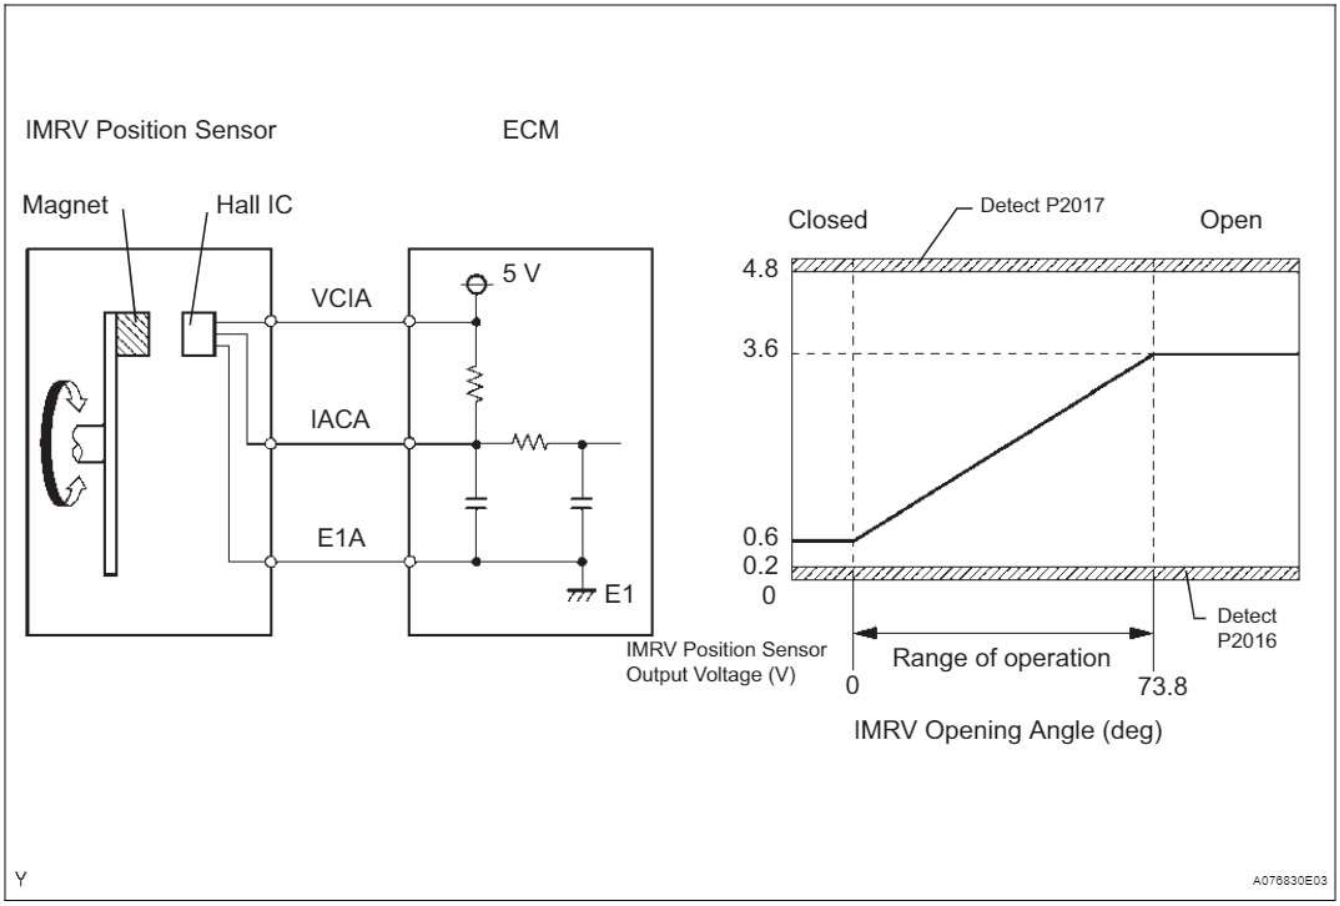

DTC No.	DTC Detection Condition	Trouble Area
P2014	Condition (a) continues for 0.5 seconds: (1 trip detection logic) (a) IMRV position sensor output voltage is "0.2 V or less" or "4.8 V or more".	• Open or short in IMRV position sensor circuit • IMRV position sensor • ECM
P2016	Condition (a) continues for 0.5 seconds: (1 trip detection logic) (a) IMRV position sensor output voltage is 0.2 V or less.	Same as DTC No. P2014
P2017	Condition (a) continues for 0.5 seconds: (1 trip detection logic) (a) IMRV position sensor output voltage is 4.8 V or more.	Same as DTC No. P2014

MONITOR STRATEGY

Related DTCs	P2014: IMRC Valve Position Sensor Range Check (Chattering) P2016: IMRC Valve Position Sensor Range Check (Low Voltage) P2017: IMRC Valve Position Sensor Range Check (High Voltage)
Required sensors/components (Main)	IMRC Valve Position Sensor
Required sensors/components (Related)	None
Frequency of operation	Continuous
Duration	0.5 seconds
MIL operation	Immediate
Sequence operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None

TYPICAL MALFUNCTION THRESHOLDS

P2014:

IMRC valve position sensor voltage	Less than 0.2 V, or more than 4.8 V

P2016:

IMRC valve position sensor voltage	Less than 0.2 V


P2017:

IMRC valve position sensor voltage	Less than 4.8 V

COMPONENT OPERATING RANGE

IMRC valve position sensor voltage	0.2 to 4.8 V

WIRING DIAGRAM

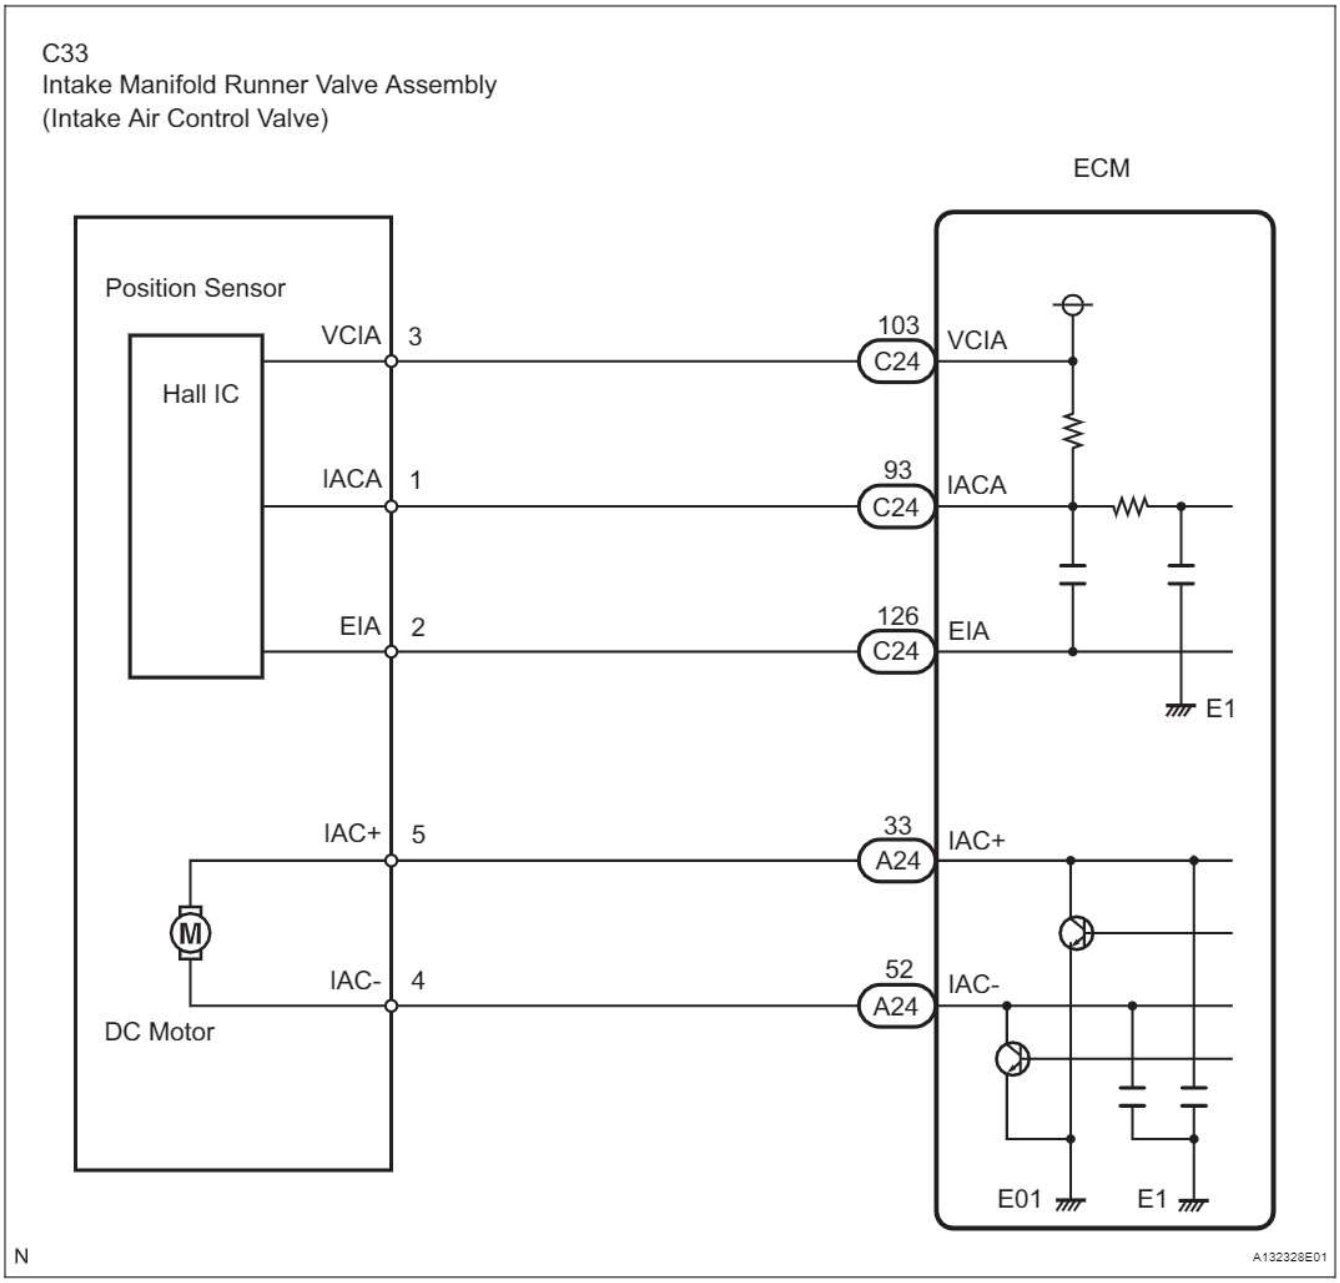


INSPECTION PROCEDURE

HINT:

If different DTCs that are related to a different system are output simultaneously while terminal E2 is used as a ground terminal, terminal E2 may be open.

1	CHECK HARNESS AND CONNECTOR (ECM - IMRV)

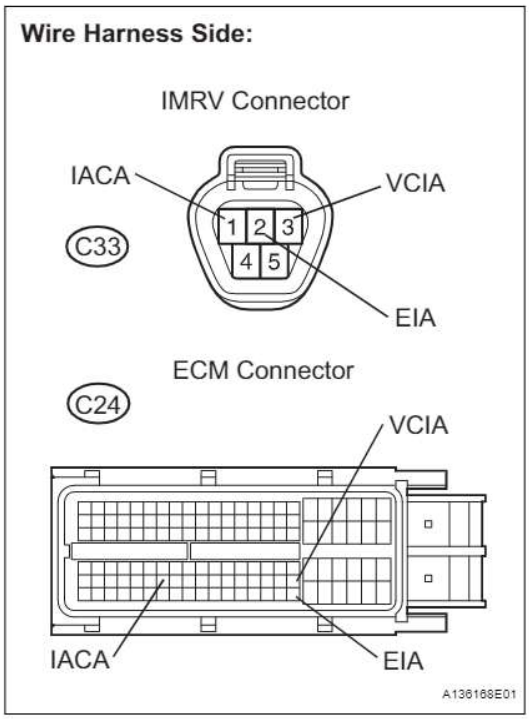

(a) Disconnect the C33 IMRV connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)

Tester Connection	Specified Condition
C33-1 (IACA) - C24-93 (IACA)	Below 1 Ω
C33-2 (EIA) - C24-126 (EIA)	Below 1 Ω
C33-3 (VCIA) - C24-103 (VCIA)	Below 1 Ω

Standard resistance (Check for short)


Tester Connection	Specified Condition
C33-1 (IACA) or C24-93 (IACA) - Body ground	10 kΩ or more
C33-3 (VCIA) or C24-103 (VCIA) - Body ground	10 kΩ or more

(d) Reconnect the connectors.

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

2	INSPECT ECM (VC VOLTAGE)

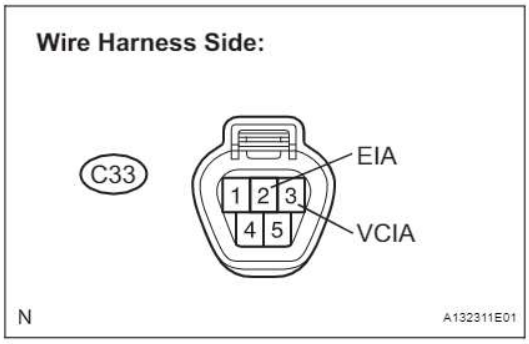

(a) Disconnect the C33 IMRV connector.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage.

Standard voltage

Tester Connection	Specified Condition
C33-1 (VCIA) - C33-2 (EIA)	4.5 to 5.5 V

NG → REPLACE ECM

OK

3	REPLACE INTAKE MANIFOLD RUNNER VALVE ASSEMBLY

NEXT

4	CHECK WHETHER DTC OUTPUT RECURS

(a) Clear the DTC (See page ES-38).
(b) Start the engine.
(c) Run the engine at more than 3,000 rpm.

(d) Turn the ignition switch off.
HINT:
As running the engine to 3,000 rpm, the IMRV usually becomes fully opened. If the ignition switch is turned off under this condition, the IMRV is fully closed and then becomes half-opening angle.
(e) Turn the ignition switch to the ON position 20 seconds later.
(f) Read the DTCs.

Result

Display (DTC output)	Proceed to
P2014, P2016 and/or P2017 are output again	A
No DTC output	B

ES

B → SYSTEM OK

A

REPLACE ECM

DTC	P2102	Throttle Actuator Control Motor Circuit Low

DTC	P2103	Throttle Actuator Control Motor Circuit High

DESCRIPTION

The throttle actuator is operated by the ECM and opens and closes the throttle valve using gears. The opening angle of the throttle valve is detected by the Throttle Position (TP) sensor, which is mounted on the throttle body assembly. The TP sensor provides feedback to the ECM. This feedback allows the ECM to appropriately control the throttle actuator and monitor the throttle opening angle as the ECM responds to driver inputs.

HINT:

This ETCS (Electronic Throttle Control System) does not use a throttle cable.

DTC No.	DTC Detection Condition	Trouble Area
P2102	Conditions (a) and (b) continue for 2.0 seconds (1 trip detection logic): (a) Throttle actuator duty ratio 80 % or more (b) Throttle actuator current 0.5 A or less	• Open in throttle actuator circuit • Throttle actuator • ECM
P2103	Either of following conditions is met (1 trip detection logic): • Hybrid IC diagnosis signal failure • Hybrid IC current limiter port failure	• Short in throttle actuator circuit • Throttle actuator • Throttle valve • Throttle body assembly • ECM

MONITOR DESCRIPTION

The ECM monitors the electrical current through the electronic actuator, and detects malfunctions and open circuits in the throttle actuator based on this value. If the current is outside the standard range, the ECM determines that there is a malfunction in the throttle actuator. In addition, if the throttle valve does not function properly (for example, stuck on), the ECM determines that there is a malfunction. The ECM then illuminates the MIL and sets a DTC.

Example:

When the electrical current is less than 0.5 A and the throttle actuator duty ratio exceeds 80 %, the ECM interprets this as the current being outside the standard range, and illuminates the MIL and sets a DTC. If the malfunction is not repaired successfully, a DTC is set when the engine is quickly revved to a high rpm several times after the engine has idled for 5 seconds after engine start.

MONITOR STRATEGY

Related DTCs	P2102: Throttle actuator current (low current) P2103: Throttle actuator current (high current)
Required Sensors/Components (Main)	Throttle actuator (throttle body)
Required Sensors/Components (Related)	None
Frequency of Operation	Continuous
Duration	2 seconds: P2102 25 times or 0.6 seconds: P2103
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None

P2102:

Throttle motor	ON
Duty-cycle ratio to open throttle actuator	80 % or more

Throttle actuator power supply	8 V or more

P2103:

Throttle motor	ON
Throttle actuator power supply	8 V or more
Battery voltage	8 V or more
Starter	OFF

TYPICAL MALFUNCTION THRESHOLDS

P2102:

Throttle actuator current	Less than 0.5 A

ES


P2103:

Hybrid IC current limiter port	Fail

FAIL-SAFE

When either of these DTCs, or other DTCs relating to ETCS (Electronic Throttle Control System) malfunctions, are set, the ECM enters fail-safe mode. During fail-safe mode, the ECM cuts the current to the throttle actuator off, and the throttle valve is returned to a 6° throttle angle by the return spring. The ECM then adjusts the engine output by controlling the fuel injection (intermittent fuel-cut) and ignition timing, in accordance with the accelerator pedal opening angle, to allow the vehicle to continue at a minimal speed. If the accelerator pedal is depressed gently, the vehicle can be driven slowly.
Fail-safe mode continues until a pass condition is detected, and the ignition switch is then turned off.

WIRING DIAGRAM

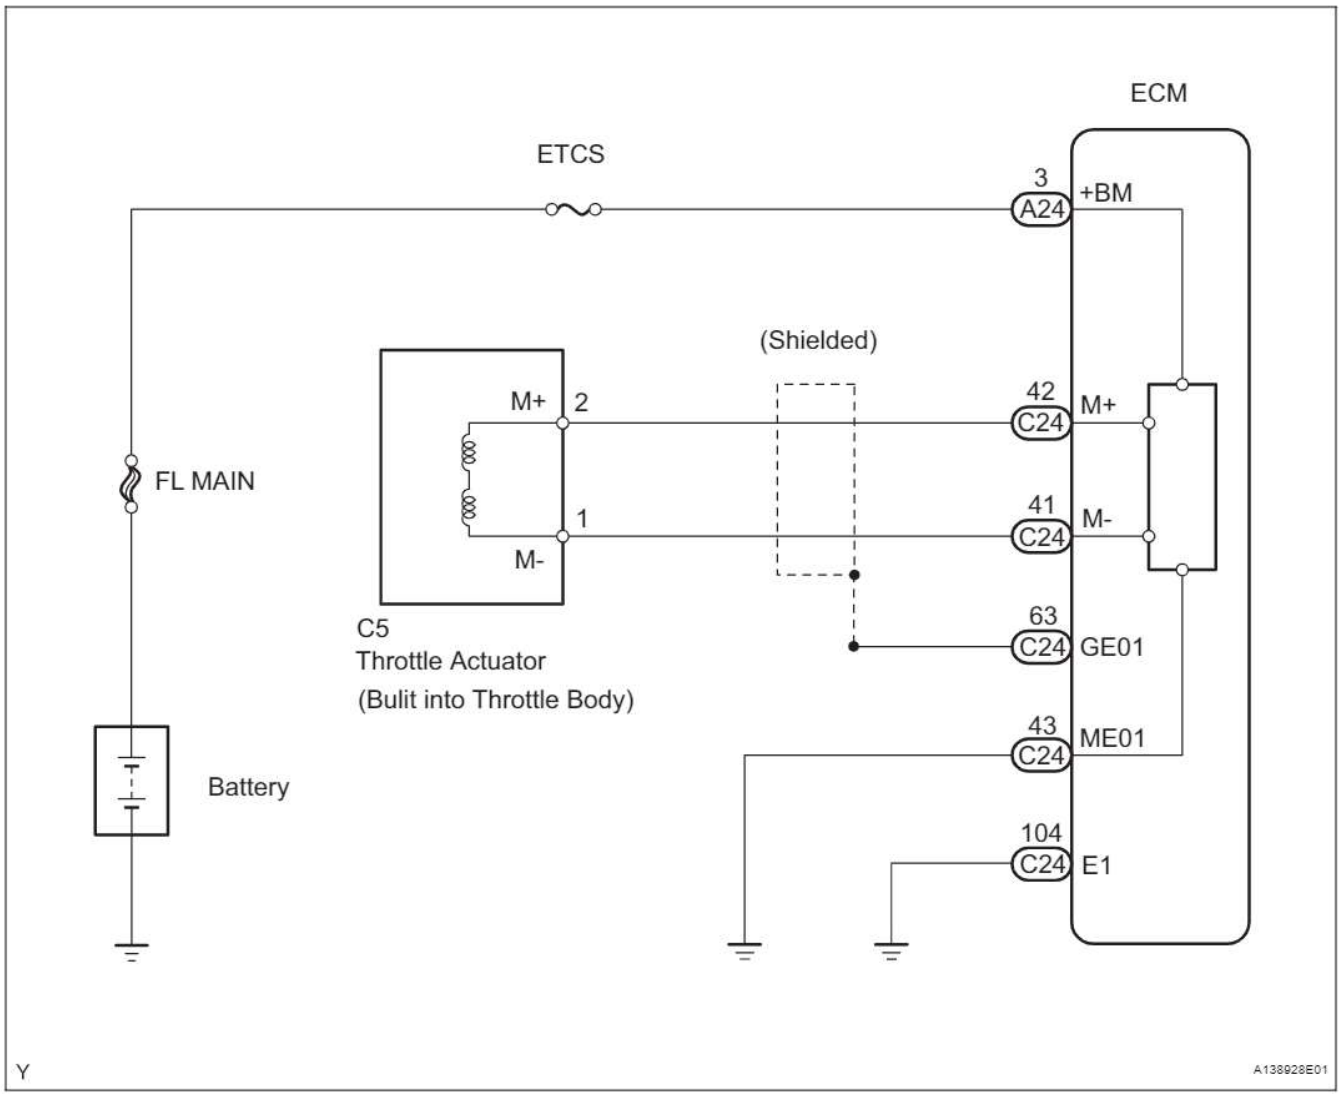


ES

INSPECTION PROCEDURE

HINT:

- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.
- The throttle actuator current (THROTTLE MOT) and the throttle actuator duty ratio (THROTL OPN DUTY / THROTL CLS DUTY) can be read using the intelligent tester. However, the ECM shuts off the throttle actuator current when the ETCS malfunctions.

1 INSPECT THROTTLE BODY (RESISTANCE OF THROTTLE ACTUATOR)

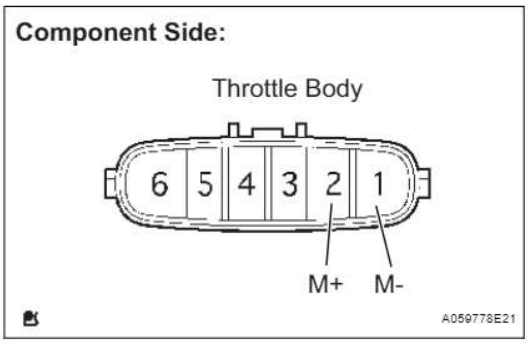

(a) Disconnect the C5 throttle body connector.
(b) Measure the resistance between terminals of the wire harness side connectors.
Standard resistance


Tester Connection	Specified Condition
2 (M+) - 1 (M-)	0.3 to 100 Ω at 20°C (68°F)

(c) Reconnect the throttle body connector.

NG → **REPLACE THROTTLE BODY ASSEMBLY**

OK

2 CHECK HARNESS AND CONNECTOR (THROTTLE ACTUATOR - ECM)

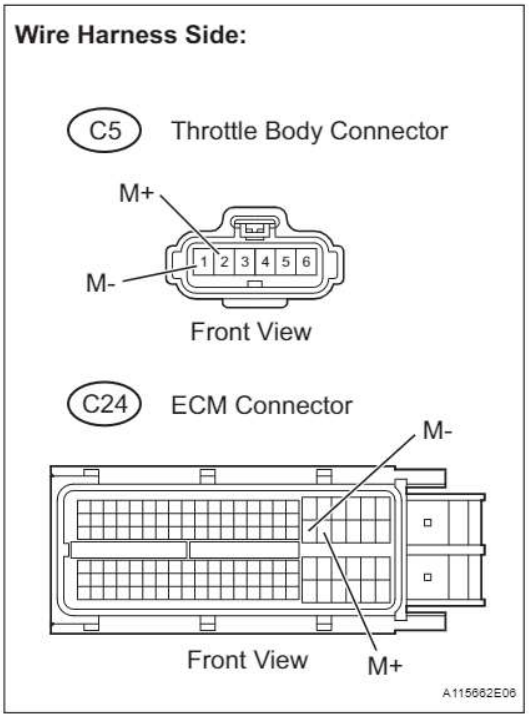

(a) Disconnect the C5 throttle body connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connector.
Standard resistance (Check for open)

Tester Connection	Specified Condition
C5-2 (M+) - C24-42 (M+)	Below 1 Ω
C5-1 (M-) - C24-41 (M-)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
C5-2 (M+) or C24-42 (M+) - Body ground	10 kΩ or higher
C5-1 (M-) or C24-41 (M-) - Body ground	10 kΩ or higher

(d) Reconnect the throttle body connector.
(e) Reconnect the ECM connector.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

3 INSPECT THROTTLE BODY ASSEMBLY

(a) Check for foreign objects between the throttle valve and the housing.
OK:
No foreign objects between throttle valve and housing.

NG → **REMOVE FOREIGN OBJECT AND CLEAN THROTTLE BODY**

OK

4	INSPECT THROTTLE VALVE

(a) Check if the throttle valve opens and closes smoothly.
OK:
Throttle valve opens and closes smoothly.

NG → REPLACE THROTTLE BODY ASSEMBLY

OK

REPLACE ECM

ES

DTC	P2111	Throttle Actuator Control System - Stuck Open

DTC	P2112	Throttle Actuator Control System - Stuck Closed

DESCRIPTION

The throttle actuator is operated by the ECM, and opens and closes the throttle valve using gears. The opening angle of the throttle valve is detected by the Throttle Position (TP) sensor, which is mounted on the throttle body assembly. The TP sensor provides feedback to the ECM in order that it can control the throttle actuator, and therefore the throttle valve, appropriately in response to driver inputs.

HINT:

ES This ETCS (Electronic Throttle Control System) does not use a throttle cable.

DTC No.	DTC Detection Condition	Trouble Area
P2111	Throttle actuator does not close when signaled by ECM (1 trip detection logic)	• Throttle actuator • Throttle body assembly • Throttle valve
P2112	Throttle actuator does not open when signaled by ECM (1 trip detection logic)	• Throttle actuator • Throttle body assembly • Throttle valve

MONITOR DESCRIPTION

The ECM determines that there is a malfunction in the ETCS when the throttle valve remains at a fixed angle despite a high drive current from the ECM. The ECM illuminates the MIL and sets a DTC.

If the malfunction is not repaired successfully, a DTC is set when the accelerator pedal is fully depressed and released quickly (to fully open and close the throttle valve) after the engine is next started.

MONITOR STRATEGY

Related DTCs	P2111: Throttle actuator stuck open P2112: Throttle actuator stuck closed
Required Sensors/Components (Main)	Throttle actuator
Required Sensors/Components (Related)	-
Frequency of Operation	Continuous
Duration	0.5 seconds
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

All:

Monitor runs whenever following DTCs are not present	None

P2111 (Throttle actuator stuck open):

All of the following conditions are met	-
System guard*	ON
Throttle actuator current	2 A or more
Duty cycle to close throttle	80 % or more
* System guard is ON when the following conditions are met	-
Throttle actuator	ON
Throttle actuator duty calculation	Executing
Throttle position sensor	Fail determined
Throttle actuator current-cut operation	Not executing

Throttle actuator power supply	4 V or more
Throttle actuator	Fail determined

P2112 (Throttle actuator stuck closed):

All of the following conditions are met	-
System guard*	ON
Throttle actuator current	2 A or more
Duty cycle to open throttle	80 % or more
* System guard is ON when the following conditions are met	-
Throttle actuator	ON
Throttle actuator duty calculation	Executing
Throttle position sensor	Fail determined
Throttle actuator current-cut operation	Not executing
Throttle actuator power supply	4 V or more
Throttle actuator	Fail determined

TYPICAL MALFUNCTION THRESHOLDS

P2111 (Throttle actuator stuck open):

TP sensor voltage change	No change

P2112 (Throttle actuator stuck closed):

TP sensor voltage change	No change

FAIL-SAFE

When either of these DTCs, or other DTCs relating to ETCS (Electronic Throttle Control System) malfunctions, are set, the ECM enters fail-safe mode. During fail-safe mode, the ECM cuts the current to the throttle actuator off, and the throttle valve is returned to a 6° throttle angle by the return spring. The ECM then adjusts the engine output by controlling the fuel injection (intermittent fuel-cut) and ignition timing, in accordance with the accelerator pedal opening angle, to allow the vehicle to continue at a minimal speed. If the accelerator pedal is depressed gently, the vehicle can be driven slowly.
Fail-safe mode continues until a pass condition is detected, and the ignition switch is then turned off.

WIRING DIAGRAM

Refer to DTC P2102 (See page ES-282).

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P2111 OR P2112)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P2111 or P2112	A
P2111 or P2112 and other DTCs	B

HINT:
If any DTCs other than P2111 or P2112 are output, troubleshoot those DTCs first.

B → **GO TO DTC CHART**

A

ES

2 INSPECT THROTTLE BODY ASSEMBLY (VISUALLY CHECK THROTTLE VALVE)

(a) Check for contamination between the throttle valve and the housing. If necessary, clean the throttle body. And check that the throttle valve moves smoothly.
OK:
Throttle valve is not contaminated with foreign objects and moves smoothly.

NG → **REPLACE THROTTLE BODY ASSEMBLY**

OK

3 CHECK WHETHER DTC OUTPUT RECURS (DTC P2111 OR P2112)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Clear the DTCs (See page ES-38).
(e) Start the engine, and fully depress and release the accelerator pedal quickly (to fully open and close the throttle valve).
(f) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(g) Read the DTCs.

Result

Display (DTC Output)	Proceed to
No DTC	A
P2111 or P2112	B

B → **REPLACE ECM**


A

CHECK FOR INTERMITTENT PROBLEMS

DTC	P2118	Throttle Actuator Control Motor Current Range / Performance

DESCRIPTION

The ETCS (Electronic Throttle Control System) has a dedicated power supply circuit. The voltage (+BM) is monitored and when it is low (less than 4 V), the ECM determines that there is a malfunction in the ETCS and cuts off the current to the throttle actuator.
When the voltage becomes unstable, the ETCS itself becomes unstable. For this reason, when the voltage is low, the current to the throttle actuator is cut. If repairs are made and the system returns to normal, turn the ignition switch off. The ECM then allows the current to flow to the throttle actuator so that it can be restarted.
HINT:
The ETCS does not use a throttle cable.

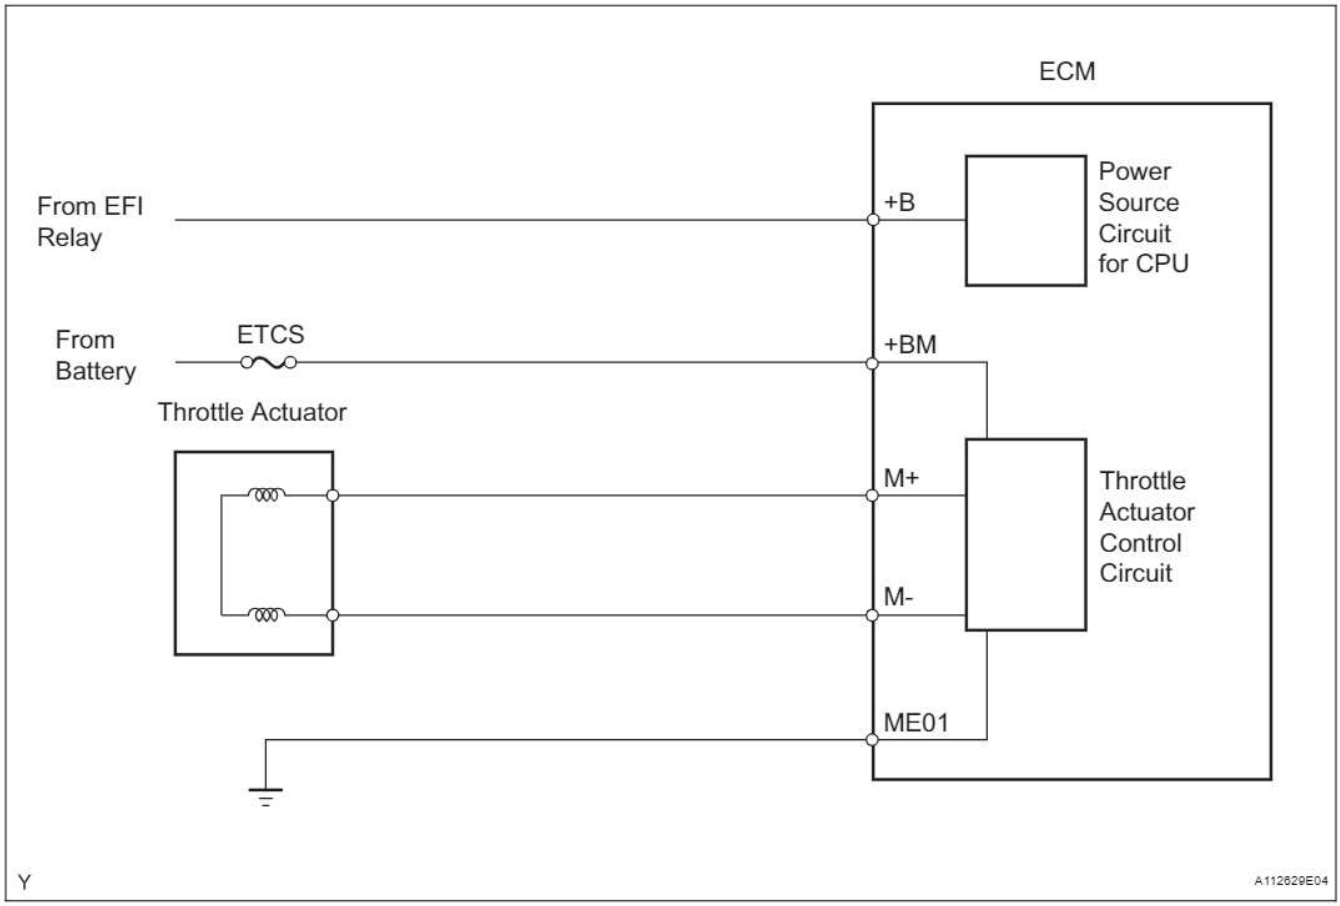

DTC No.	DTC Detection Condition	Trouble Area
P2118	Open in ETCS power source (+BM) circuit (1 trip detection logic)	• Open in ETCS power source circuit • Battery • Battery terminals • ETCS fuse • ECM

MONITOR DESCRIPTION

The ECM monitors the battery supply voltage applied to the throttle actuator.
When the power supply voltage (+BM) drops below 4 V for 0.8 seconds or more, the ECM interprets this as an open in the power supply circuit (+BM). The ECM illuminates the MIL and sets the DTC.
If the malfunction is not repaired successfully, the DTC is set 5 seconds after the engine is next started.

MONITOR STRATEGY

Related DTCs	P2118: Throttle actuator power supply
Required Sensors/Components (Main)	Throttle actuator, throttle valve, ETCS fuse
Required Sensors/Components (Related)	None
Frequency of Operation	Continuous
Duration	0.8 seconds
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

ES

Monitor runs whenever following DTCs are not present	None
Battery voltage	8 V or more
Electronic throttle actuator power	ON

TYPICAL MALFUNCTION THRESHOLDS

Throttle actuator power supply voltage (+BM)	Less than 4 V


COMPONENT OPERATING RANGE

Throttle actuator power supply voltage (+BM)	9 to 14 V

FAIL-SAFE

When this DTC, or other DTCs relating to ETCS (Electronic Throttle Control System) malfunctions, are set, the ECM enters fail-safe mode. During fail-safe mode, the ECM cuts the current to the throttle actuator off, and the throttle valve is returned to a 6° throttle angle by the return spring. The ECM then adjusts the engine output by controlling the fuel injection (intermittent fuel-cut) and ignition timing, in accordance with the accelerator pedal opening angle, to allow the vehicle to continue at a minimal speed. If the accelerator pedal is depressed gently, the vehicle can be driven slowly.
Fail-safe mode continues until a pass condition is detected, and the ignition switch is then turned off.

WIRING DIAGRAM

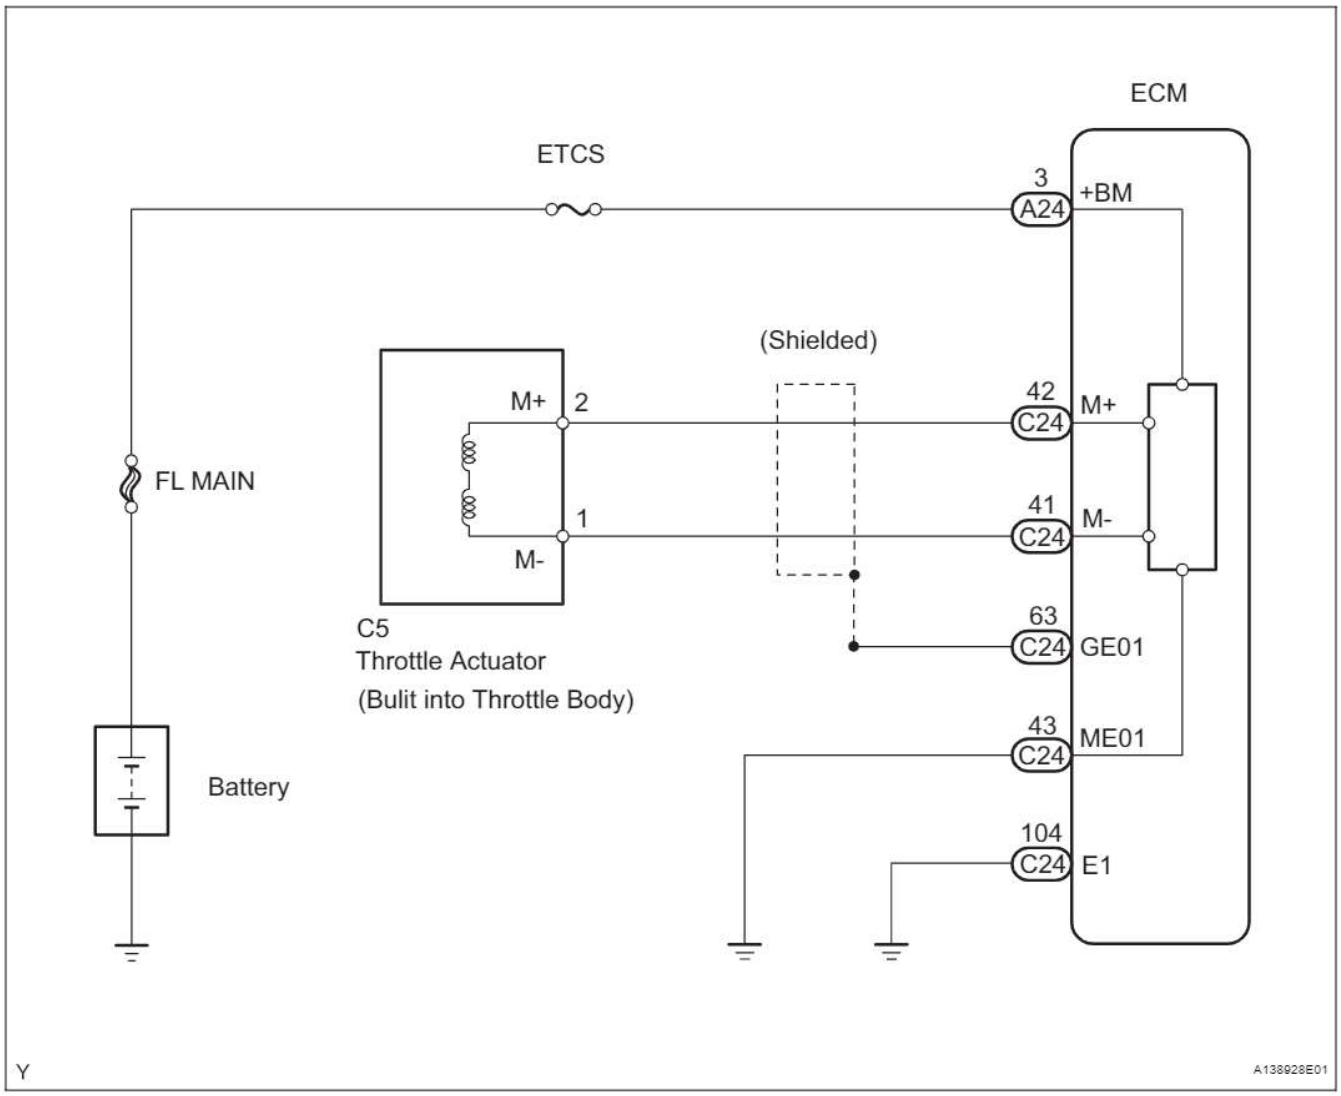

ES

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.


1	READ VALUE USING INTELLIGENT TESTER (+BM VOLTAGE)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / +BM VOLTAGE.
(e) Read the value displayed on the tester.
Standard voltage:
9 to 14 V

OK → Go to step 5

NG

2	CHECK FUSE (ETCS FUSE)

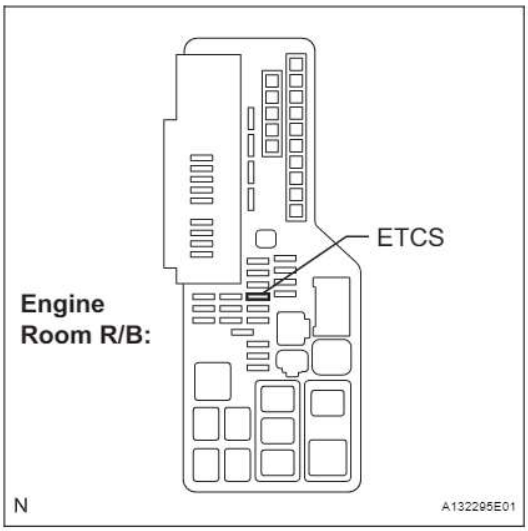


(a) Remove the ETCS fuse from the engine room R/B.
(b) Measure the ETCS fuse resistance.
Standard resistance:
Below 1 Ω
(c) Reinstall the ETCS fuse.

NG → REPLACE FUSE (ETCS FUSE)

OK

3	CHECK HARNESS AND CONNECTOR (ECM - ETCS FUSE, ETCS FUSE - BATTERY)

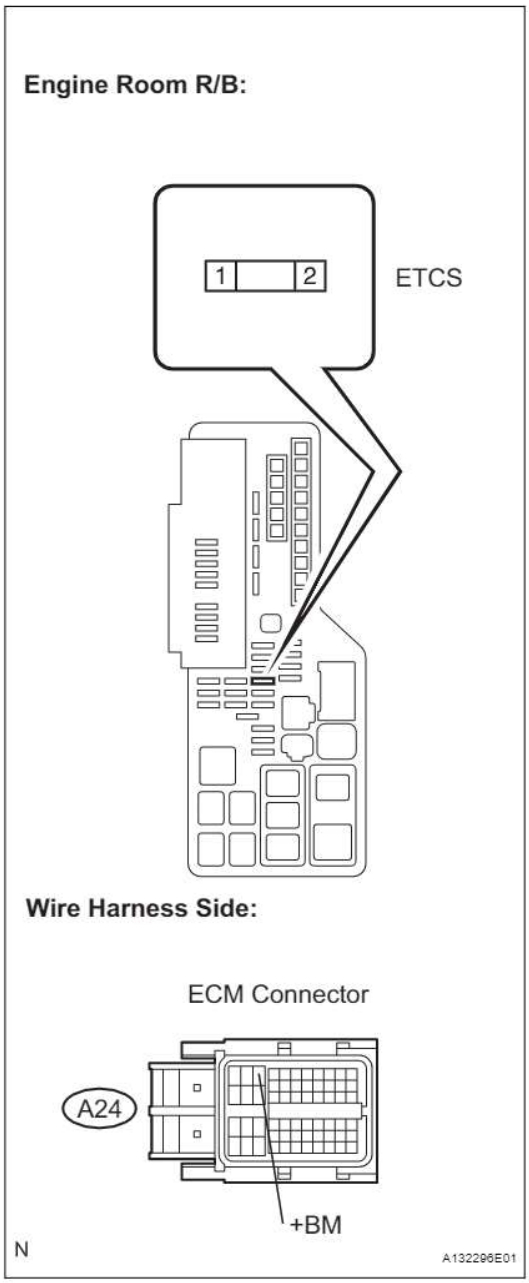

(a) Remove the ETCS fuse from the engine room R/B.
(b) Disconnect the cable from the negative (-) battery terminal.
(c) Disconnect the cable from the negative (+) battery terminal.
(d) Disconnect the A24 ECM connector.
(e) Measure the resistance.

Standard resistance (Check for open)

Tester Connection	Specified Condition
2 (ETCS fuse) - A24-3 (+BM)	Below 1 Ω
Positive battery terminal - 1 (ETCS fuse)	Below 1 Ω

Standard resistance (Check for short)


Tester Connection	Specified Condition
2 (ETCS fuse) or A24-3 (+BM) - Body ground	10 kΩ or higher
Positive battery terminal or 1 (ETCS fuse) - Body ground	10 kΩ or higher

(f) Reinstall the ETCS fuse.
(g) Reconnect the cable to the positive (+) battery terminal.
(h) Reconnect the cable to the negative (-) battery terminal.
(i) Reconnect the ECM connector.

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

4	INSPECT ECM (+BM VOLTAGE)

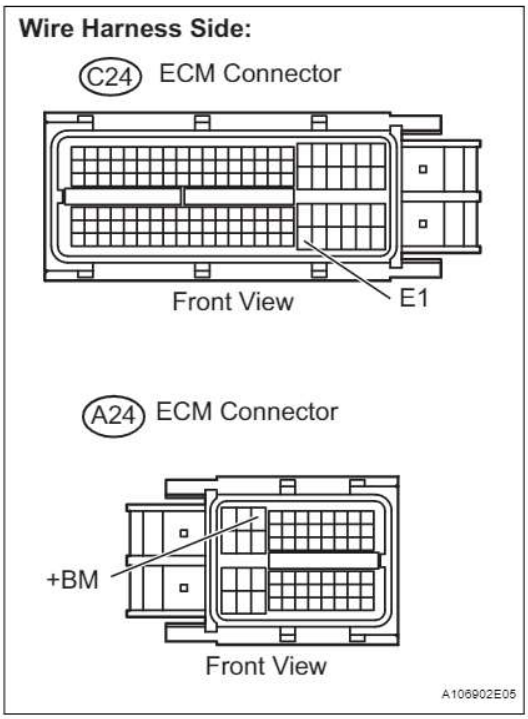

(a) Disconnect the A24 and C24 ECM connectors.
(b) Measure the voltage between the terminals of the A24 and C24 ECM connectors.
Standard voltage

Tester Connection	Specified Condition
A24-3 (+BM) - C24-104 (E1)	9 to 14 V

(c) Reconnect the ECM connectors.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR (TERMINAL E1 - BODY GROUND)**

OK

REPLACE ECM

5	INSPECT BATTERY

(a) Check the battery voltage.
Standard voltage:
12.5 to 12.9 V at 20°C (68°F)

NG → **REPLACE BATTERY**

OK

6	CHECK BATTERY TERMINAL

(a) Check that the battery terminals and ECM ground are not loose or corroded.
OK:
Battery terminals and ECM ground are not loose or corroded.

NG → **REPAIR OR REPLACE BATTERY TERMINAL**

OK

CHECK FOR INTERMITTENT PROBLEMS

DTC	P2119	Throttle Actuator Control Throttle Body Range / Performance

DESCRIPTION

The Electronic Throttle Control System (ETCS) is composed of the throttle actuator, Throttle Position (TP) sensor, Accelerator Pedal Position (APP) sensor, and ECM. The ECM operates the throttle actuator to regulate the throttle valve in response to driver inputs. The TP sensor detects the opening angle of the throttle valve, and provides the ECM with feedback so that the throttle valve can be appropriately controlled by the ECM.

DTC No.	DTC Detection Condition	Trouble Area
P2119	Throttle valve opening angle continues to vary greatly from target opening angle (1 trip detection logic)	• ETCS • ECM

ES

MONITOR DESCRIPTION

The ECM determines the actual opening angle of the throttle valve from the TP sensor signal. The actual opening angle is compared to the target opening angle commanded by the ECM. If the difference between these two values is outside the standard range, the ECM interprets this as a malfunction in the ETCS. The ECM then illuminates the MIL and sets the DTC.
If the malfunction is not repaired successfully, the DTC is set when the accelerator pedal is quickly released (to close the throttle valve) after the engine speed reaches 5,000 rpm by the accelerator pedal being fully depressed (fully open the throttle valve).

MONITOR STRATEGY

Related DTCs	P2119: ETCS malfunction
Required Sensors/Components (Main)	Throttle actuator
Required Sensors/Components (Related)	-
Frequency of Operation	Continuous
Duration	Within 1 second
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None
System guard*	ON
*System guard is ON when the following conditions are met	-
Throttle actuator	ON
Throttle actuator duty calculation	Executing
Throttle position sensor	Fail determined
Throttle actuator current-cut operation	Not executing
Throttle actuator power supply	4 V or more
Throttle actuator	Fail determined

TYPICAL MALFUNCTION THRESHOLDS

Either of the following conditions A or B is met	-
A. Difference between commanded closed throttle position and current closed throttle position	0.3 V or more
B. Difference between commanded open throttle position and current open throttle position	0.3 V or more

FAIL-SAFE

When this DTC, or other DTCs relating to ETCS (Electronic Throttle Control System) malfunctions, are set, the ECM enters fail-safe mode. During fail-safe mode, the ECM cuts the current to the throttle actuator off, and the throttle valve is returned to a 6° throttle angle by the return spring. The ECM then adjusts the engine output by controlling the fuel injection (intermittent fuel-cut) and ignition timing, in accordance with the accelerator pedal opening angle, to allow the vehicle to continue at a minimal speed. If the accelerator pedal is depressed gently, the vehicle can be driven slowly.
Fail-safe mode continues until a pass condition is detected, and the ignition switch is then turned off.

WIRING DIAGRAM

Refer to DTC P2102 (See page ES-282).

ES

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P2119)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P2119	A
P2119 and other DTCs	B

HINT:
If any DTCs other than P2119 are output, troubleshoot those DTCs first.

B → GO TO DTC CHART

A

2	CHECK WHETHER DTC OUTPUT RECURS (DTC P2119)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Clear the DTCs (See page ES-38).
(e) Allow the engine to idle for 15 seconds.
CAUTION:
Exercise extreme care and take precautions in steps (f) and (g) below. Failure to do so may result in the vehicle unexpectedly rolling away.

(f) Securely apply the parking brake and move the gear selector lever to the D position.
(g) While depressing the brake pedal securely, fully depress the accelerator pedal for 5 seconds.
(h) On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(i) Read the DTCs.
HINT:
The output voltage of the throttle position sensor can be checked during step (g) using the intelligent tester. Variations in the output voltage indicate that the throttle actuator is in operation. To check the output voltage using the intelligent tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / ETCS / THROTTLE POS #1.
OK:
No DTC output.

ES

NG → **REPLACE THROTTLE BODY ASSEMBLY**

OK


CHECK FOR INTERMITTENT PROBLEMS

DTC	P2120	Throttle / Pedal Position Sensor / Switch "D" Circuit
DTC	P2122	Throttle / Pedal Position Sensor / Switch "D" Circuit Low Input
DTC	P2123	Throttle / Pedal Position Sensor / Switch "D" Circuit High Input
DTC	P2125	Throttle / Pedal Position Sensor / Switch "E" Circuit
DTC	P2127	Throttle / Pedal Position Sensor / Switch "E" Circuit Low Input
DTC	P2128	Throttle / Pedal Position Sensor / Switch "E" Circuit High Input
DTC	P2138	Throttle / Pedal Position Sensor / Switch "D" / "E" Voltage Correlation

HINT:
These DTCs relate to the Accelerator Pedal Position (APP) sensor.

DESCRIPTION

HINT:
This ETCS (Electronic Throttle Control System) does not use a throttle cable.
The APP sensor is mounted on the accelerator pedal bracket and has 2 sensor circuits: VPA (main) and VPA2 (sub). This sensor is a non-contact type It uses Hall-effect elements in order to yield accurate signals even in extreme driving conditions, such as at high speeds as well as very low speeds. The voltage, which is applied to terminals VPA and VPA2 of the ECM, varies between 0 V and 5 V in proportion to the operating angle of the accelerator pedal (throttle valve). A signal from VPA indicates the actual accelerator pedal opening angle (throttle valve opening angle) and is used for engine control. A signal from VPA2 conveys the status of the VPA circuit and is used to check the APP sensor itself.
The ECM monitors the actual accelerator pedal opening angle (throttle valve opening angle) through the signals from VPA and VPA2, and controls the throttle actuator according to these signals.

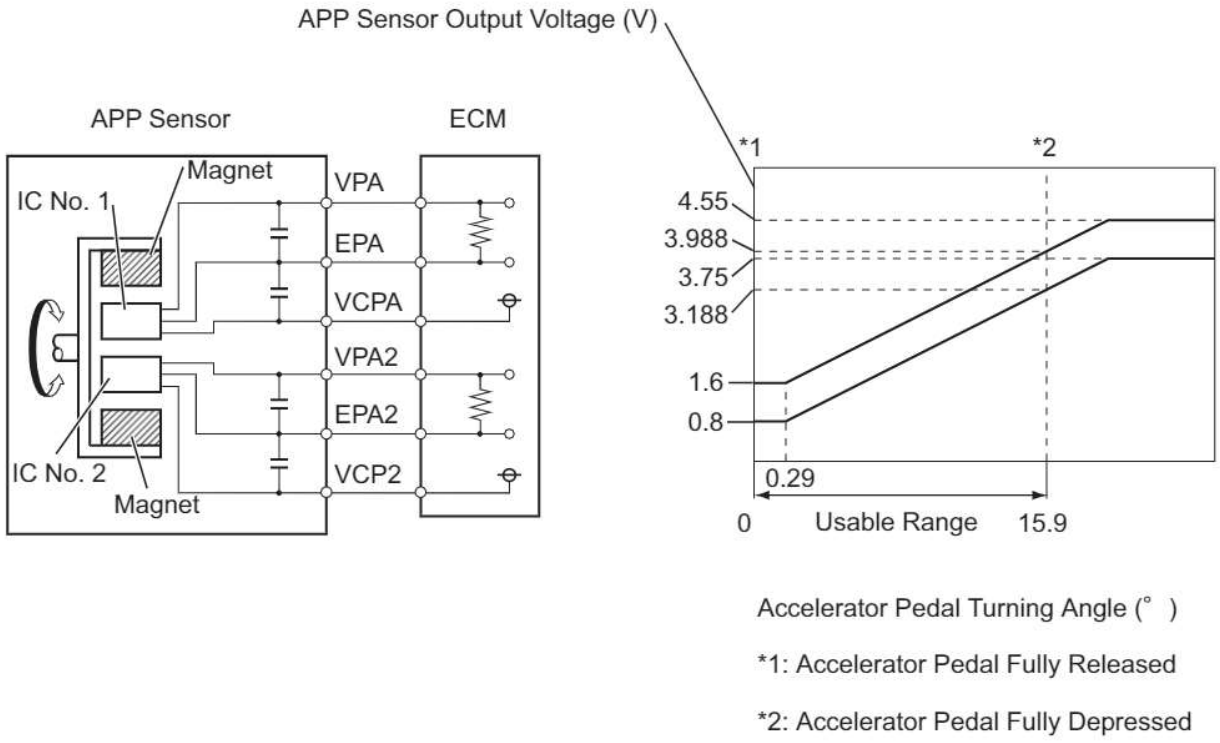

Y

A112620E03

DTC No.	DTC Detection Condition	Trouble Area
P2120	VPA fluctuates rapidly beyond upper and lower malfunction thresholds for 0.5 seconds or more (1 trip detection logic)	• APP sensor • ECM
P2122	VPA 0.4 V or less for 0.5 seconds or more when accelerator pedal fully released (1 trip detection logic)	• APP sensor • Open in VCP1 circuit • Open or ground short in VPA circuit • ECM
P2123	VPA 4.8 V or more for 2.0 seconds or more (1 trip detection logic)	• APP sensor • Open in EPA circuit • ECM
P2125	VPA2 fluctuates rapidly beyond upper and lower malfunction thresholds for 0.5 seconds or more (1 trip detection logic)	• APP sensor • ECM
P2127	VPA2 1.2 V or less for 0.5 seconds or more when accelerator pedal fully released (1 trip detection logic)	• APP sensor • Open in VCP2 circuit • Open or ground short in VPA2 circuit • ECM
P2128	Conditions (a) and (b) continue for 2.0 seconds or more (1 trip detection logic): (a) VPA2 4.8 V or more (b) VPA between 0.4 V and 3.45 V	• APP sensor • Open in EPA2 circuit • ECM

DTC No.	DTC Detection Condition	Trouble Area
P2138	Condition (a) or (b) continues for 2.0 seconds or more (1 trip detection logic): (a) Difference between VPA and VPA2 0.02 V or less (b) VPA 0.4 V or less and VPA2 1.2 V or less	• Short between VPA and VPA2 circuits • APP sensor • ECM

HINT:
When any of these DTCs are set, check the APP sensor voltage by selecting the following menu items on the intelligent tester: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / ACCEL POS #1 and ACCEL POS #2.

Trouble Areas	ACCEL POS #1 When AP Released	ACCEL POS #2 When AP Released	ACCEL POS #1 When AP Depressed	ACCEL POS #2 When AP Depressed
VCP circuit open	0 to 0.2 V	0 to 0.2 V	0 to 0.2 V	0 to 0.2 V
Open or ground short in VPA circuit	0 to 0.2 V	1.2 to 2.0 V	0 to 0.2 V	3.4 to 5.0 V
Open or ground short in VPA2 circuit	0.5 to 1.1 V	0 to 0.2 V	2.6 to 4.5 V	0 to 0.2 V
EPA circuit open	4.5 to 5.0 V	4.5 to 5.0 V	4.5 to 5.0 V	4.5 to 5.0 V
Normal condition	0.5 to 1.1 V	1.2 to 2.0 V	2.6 to 4.5 V	3.4 to 5.0 V

HINT:
- Accelerator pedal positions are expressed as voltages.
- AP denotes Accelerator Pedal.

MONITOR DESCRIPTION

When either output voltage of VPA or VPA2 deviates from the standard range, or the difference between the output voltages of the 2 sensor circuits is less than the threshold, the ECM determines that there is a malfunction in the APP sensor. The ECM then illuminates the MIL and sets a DTC.
Example:
When the output voltage of VPA drops below 0.4 V for more than 0.5 seconds when the accelerator pedal is fully depressed, DTC P2122 is set.
If the malfunction is not repaired successfully, a DTC is set 2 seconds after the engine is next started.

MONITOR STRATEGY

Related DTCs	P2120: APP sensor 1 range check (fluctuating) P2122: APP sensor 1 range check (low voltage) P2123: APP sensor 1 range check (high voltage) P2125: APP sensor 2 range check (fluctuating) P2127: APP sensor 2 range check (low voltage) P2128: APP sensor 2 range check (high voltage) P2138: APP sensor range check (correlation)
Required Sensors/Components (Main)	APP sensor
Required Sensors/Components (Related)	-
Frequency of Operation	Continuous
Duration	0.5 seconds: P2120, P2122, P2125 and P2127 2.0 seconds: P2123, P2128 and P2138
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None
Either of the following conditions 1 or 2 is met:	-
1. Ignition switch	ON
2. Throttle actuator power	ON

TYPICAL MALFUNCTION THRESHOLDS

P2120:

Either of the following conditions 1 or 2 is met:	-
1. VPA voltage when VPA2 voltage is 0.04 V or more	0.4 V or less
2. VPA voltage	4.8 V or more

P2122:

VPA voltage when VPA2 voltage is 0.04 V or more	0.4 V or less

P2123:

VPA voltage	4.8 V or more

P2125:

Either of the following conditions 1 or 2 is met:	-
1. VPA2 voltage when VPA voltage is 0.04 V or more	1.2 V or less
2. VPA2 voltage when VPA voltage is 0.4 to 3.45 V	4.8 V or more

P2127:

VPA2 voltage when VPA voltage is 0.04 V or more	1.2 V or less

P2128:

VPA2 voltage when VPA voltage is 0.4 to 3.45 V	4.8 V or more

P2138:

Either of the following conditions A or B is met:	-
Condition A	-
Difference between VPA and VPA 2 voltages	0.02 V or less
Condition B	-
VPA voltage	0.4 V or less
VPA2 voltage	1.2 V or less

COMPONENT OPERATING RANGE


VPA voltage	0.5 V to 4.5 V
VPA2 voltage	1.2 V to 5.0 V
Difference between VPA and VPA2 voltages	More than 0.02 V

FAIL-SAFE

When any of DTCs P2120, P2121, P2122, P2123, P2125, P2127, P2128 and P2138 are set, the ECM enters fail-safe mode. If either of the 2 sensor circuit malfunctions, the ECM uses the remaining circuit to calculate the accelerator pedal position to allow the vehicle to continue driving. If both of the circuits malfunction, the ECM regards the accelerator pedal as being released. As a result, the throttle valve is closed and the engine idles.

Fail-safe mode continues until a pass condition is detected, and the ignition switch is turned off.


WIRING DIAGRAM

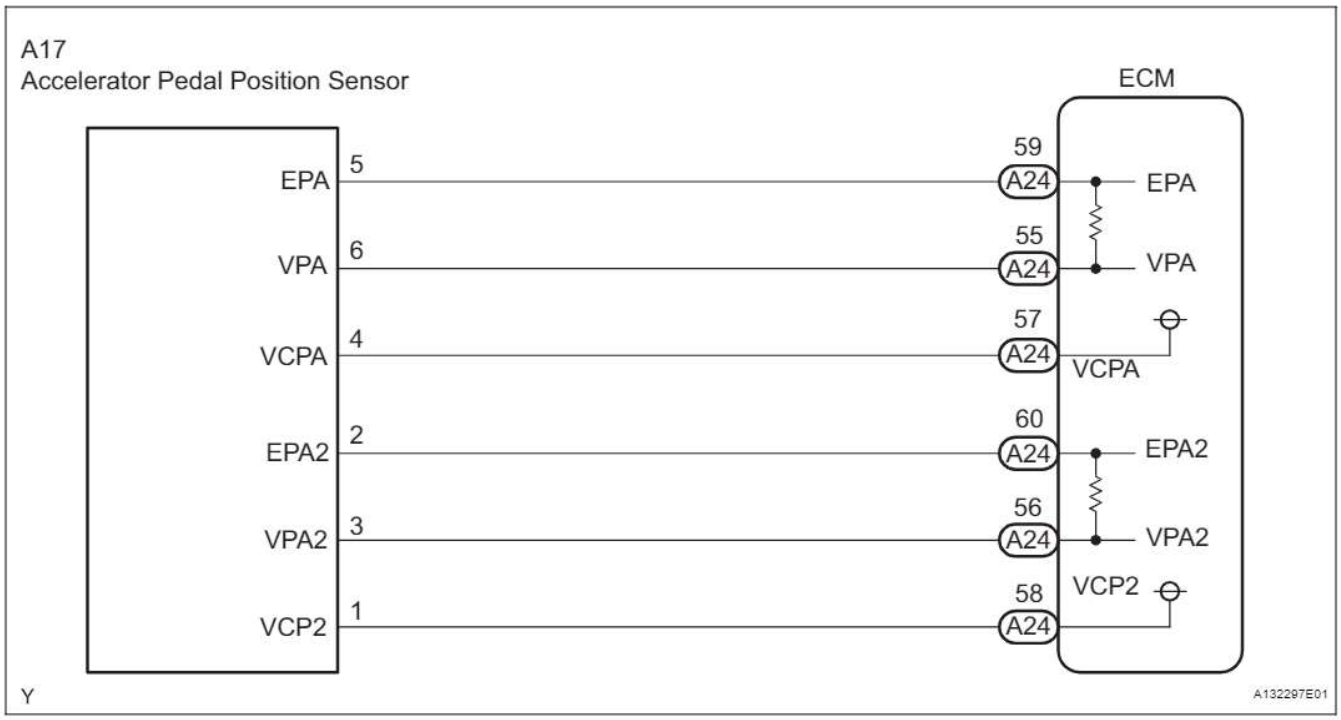

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	READ VALUE USING INTELLIGENT TESTER (ACCEL POS #1 AND ACCEL POS #2)

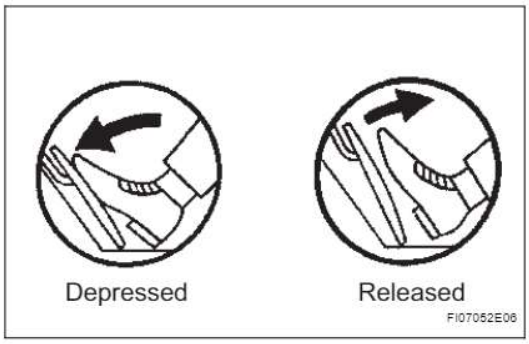

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / ETCS / ACCEL POS #1 and ACCEL POS #2.
(d) Read the value displayed on the tester.

Standard voltage


Accelerator Pedal Operations	ACCEL POS #1	ACCEL POS #2
Released → Depressed → Released	0.5 to 4.5 V	1.2 to 5.0 V
	Difference between ACCEL POS #1 and ACCEL POS #2 is greater than 0.02 V	Difference between ACCEL POS #1 and ACCEL POS #2 is greater than 0.02 V

OK → Go to step 5

NG

ES

2 CHECK HARNESS AND CONNECTOR (ACCELERATOR PEDAL POSITION SENSOR - ECM)

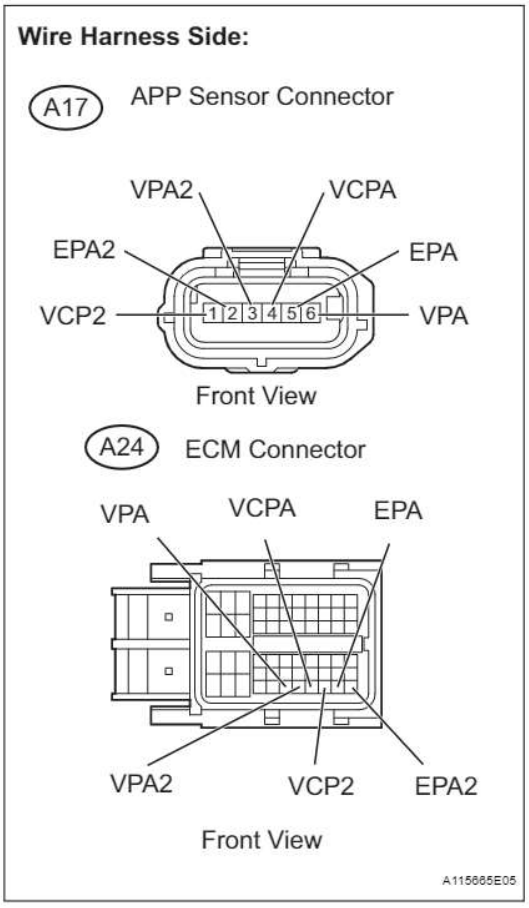

(a) Disconnect the A17 Accelerator Pedal Position (APP) sensor connector.
(b) Disconnect the A24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)

Tester Connection	Specified Condition
A17-6 (VPA) - A24-55 (VPA)	Below 1 Ω
A17-5 (EPA) - A24-59 (EPA)	Below 1 Ω
A17-4 (VCPA) - A24-57 (VCPA)	Below 1 Ω
A17-3 (VPA2) - A24-56 (VPA2)	Below 1 Ω
A17-2 (EPA2) - A24-60 (EPA2)	Below 1 Ω
A17-1 (VCP2) - A24-58 (VCP2)	Below 1 Ω

Standard resistance (Check for short)


Tester Connection	Specified Condition
A17-6 (VPA) or A24-55 (VPA) - body ground	10 kΩ or higher
A17-5 (EPA) or A24-59 (EPA) - body ground	10 kΩ or higher
A17-4 (VCPA) or A24-57 (VCPA) - body ground	10 kΩ or higher
A17-3 (VPA2) or A24-56 (VPA2) - body ground	10 kΩ or higher
A17-2 (EPA2) or A24-60 (EPA2) - body ground	10 kΩ or higher
A17-1 (VCP2) or A24-58 (VCP2) - body ground	10 kΩ or higher

(d) Reconnect the APP sensor connector.
(e) Reconnect the ECM connector.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

3 CHECK ECM (VCPA AND VCP2 VOLTAGE)

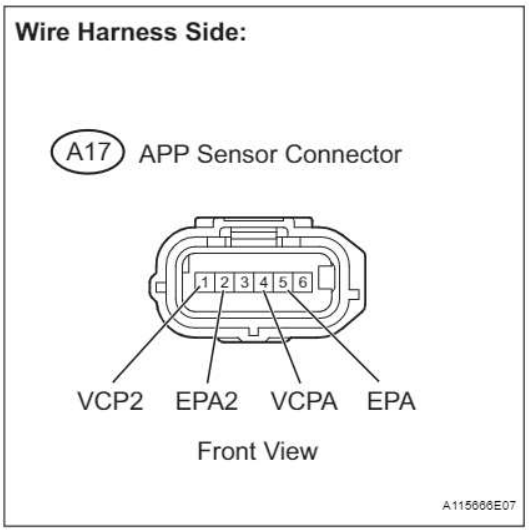

(a) Disconnect the A17 APP sensor connector.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage between the terminals of the A17 APP sensor connector.

Standard voltage

Tester Connection	Specified Condition
A17-4 (VCPA) - A17-5 (EPA)	4.5 to 5.5 V
A17-1 (VCP2) - A17-2 (EPA2)	4.5 to 5.5 V

(d) Reconnect the APP sensor connector.

NG → **REPLACE ECM**

OK

4	REPLACE ACCELERATOR PEDAL ASSEMBLY

NEXT

5	CHECK WHETHER DTC OUTPUT RECURS (ACCELERATOR PEDAL POSITION SENSOR DTCS)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Clear the DTCs (See page ES-38).
(d) Start the engine.
(e) Allow the engine to idle for 15 seconds.
(f) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(g) Read the DTCs.

ES

Result

Display (DTC Output)	Proceed to
P2120, P2122, P2123, P2125, P2127, P2128, and/or P2138	A
No output	B

B → SYSTEM OK

A

REPLACE ECM

DTC	P2121	Throttle / Pedal Position Sensor / Switch "D" Circuit Range / Performance

DESCRIPTION

HINT:

Refer to DTC P2120 (See page ES-298).

DTC No.	DTC Detection Condition	Trouble Area
P2121	Difference between VPA and VPA2 less than 0.4 V, or more than 1.2 V for 0.5 seconds (1 trip detection logic)	• Accelerator Pedal Position (APP) sensor • ECM

MONITOR DESCRIPTION

When the difference between the output voltages of VPA and VPA2 deviates from the standard, the ECM determines that the Accelerator Pedal Position (APP) sensor is malfunctioning. The ECM turns on the MIL and the DTC is set.

MONITOR STRATEGY

Related DTCs	P2121: APP sensor rationality
Required Sensors/Components (Main)	APP sensor
Required Sensors/Components (Related)	-
Frequency of Operation	Continuous
Duration	0.5 seconds
MIL Operation	Immediate
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None
Either of the following conditions 1 or 2 is met:	-
1. Ignition switch	ON
2. Throttle actuator power	ON

TYPICAL MALFUNCTION THRESHOLDS

Difference between VPA voltage (learned value) and VPA2 voltage (learned value)	Less than 0.4 V, or more than 1.2 V

FAIL-SAFE

The APP sensor has two (main and sub) sensor circuits. If a malfunction occurs in either of the sensor circuits, the ECM detects the abnormal signal voltage difference between the two sensor circuits and switches to limp mode. In limp mode, the functioning circuit is used to calculate the accelerator pedal opening angle to allow the vehicle to continue driving. If both circuits malfunction, the ECM regards the opening angle of the accelerator pedal as being fully closed. In this case, the throttle valve remains closed as if the engine is idling.

If a pass condition is detected and then the ignition switch is turned off, the fail-safe operation stops and the system returns to a normal condition.

WIRING DIAGRAM

Refer to DTC P2120 (See page ES-302).

INSPECTION PROCEDURE

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1 CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P2121)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

Result


Display (DTC Output)	Proceed to
P2121	A
P2121 and other DTCs	B

HINT:
If any DTCs other than P2121 are output, troubleshoot those DTCs first.

B → GO TO DTC CHART

A

2 READ VALUE USING INTELLIGENT TESTER (ACCEL POS #1 AND ACCEL POS #2)

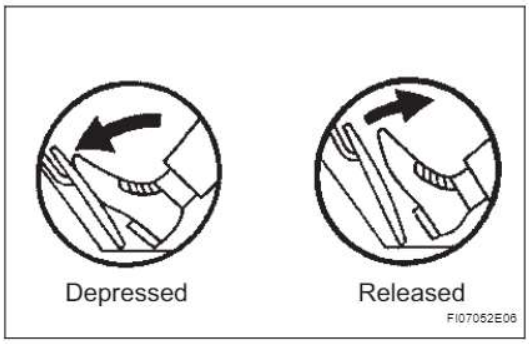

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / ETCS / ACCEL POS #1 and ACCEL POS #2.
(d) Read the values displayed on the tester.

Standard voltage

Accelerator Pedal Operations	ACCEL POS #1	ACCEL POS #2
Released → Depressed → Released	0.5 to 4.5 V	1.2 to 5.0 V
	Difference between ACCEL POS #1 and ACCEL POS #2 is greater than 0.02 V	Difference between ACCEL POS #1 and ACCEL POS #2 is greater than 0.02 V

OK → CHECK FOR INTERMITTENT PROBLEMS

NG

3	REPLACE ACCELERATOR PEDAL ASSEMBLY

NEXT

4	CHECK WHETHER DTC OUTPUT RECURS (DTC P2121)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Clear the DTCs (See page ES-38).
(d) Start the engine.
(e) Allow the engine to idle for 15 seconds.
(f) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(g) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P2121	A
No output	B

B → SYSTEM OK

A

REPLACE ECM

DTC	P2195	Oxygen (A/F) Sensor Signal Stuck Lean (Bank 1 Sensor 1)

DTC	P2196	Oxygen (A/F) Sensor Signal Stuck Rich (Bank 1 Sensor 1)

HINT:
- Although the DTC titles say oxygen sensor, these DTCs relate to the Air-Fuel Ratio (A/F) sensor.
- Sensor 1 refers to the sensor mounted in front of the Three-Way Catalytic Converter (TWC) and located near the engine assembly.

ES


DESCRIPTION

The A/F sensor generates a voltage* that corresponds to the actual air-fuel ratio. This sensor voltage is used to provide the ECM with feedback so that it can control the air-fuel ratio. The ECM determines the deviation from the stoichiometric air-fuel ratio level, and regulates the fuel injection time. If the A/F sensor malfunctions, the ECM is unable to control the air-fuel ratio accurately.

The A/F sensor is of the planar type and is integrated with the heater, which heats the solid electrolyte (zirconia element). This heater is controlled by the ECM. When the intake air volume is low (the exhaust gas temperature is low), a current flows into the heater to heat the sensor, in order to facilitate accurate air-fuel ratio detection. In addition, the sensor and heater portions are narrower than the conventional type. The heat generated by the heater is conducted to the solid electrolyte through the alumina, therefore the sensor activation is accelerated.

A three-way catalytic converter (TWC) is used in order to convert the carbon monxide (CO), hydrocarbons (HC), and nitrogen oxide (NOX) into less harmful substances. To allow the TWC to function effectively, it is necessary to keep the air-fuel ratio of the engine near the stoichiometric air-fuel ratio.

*: Value changes inside the ECM. Since the A/F sensor is the current output element, a current is converted into a voltage inside the ECM. Any measurements taken at the A/F sensor or ECM connectors will show a constant voltage.

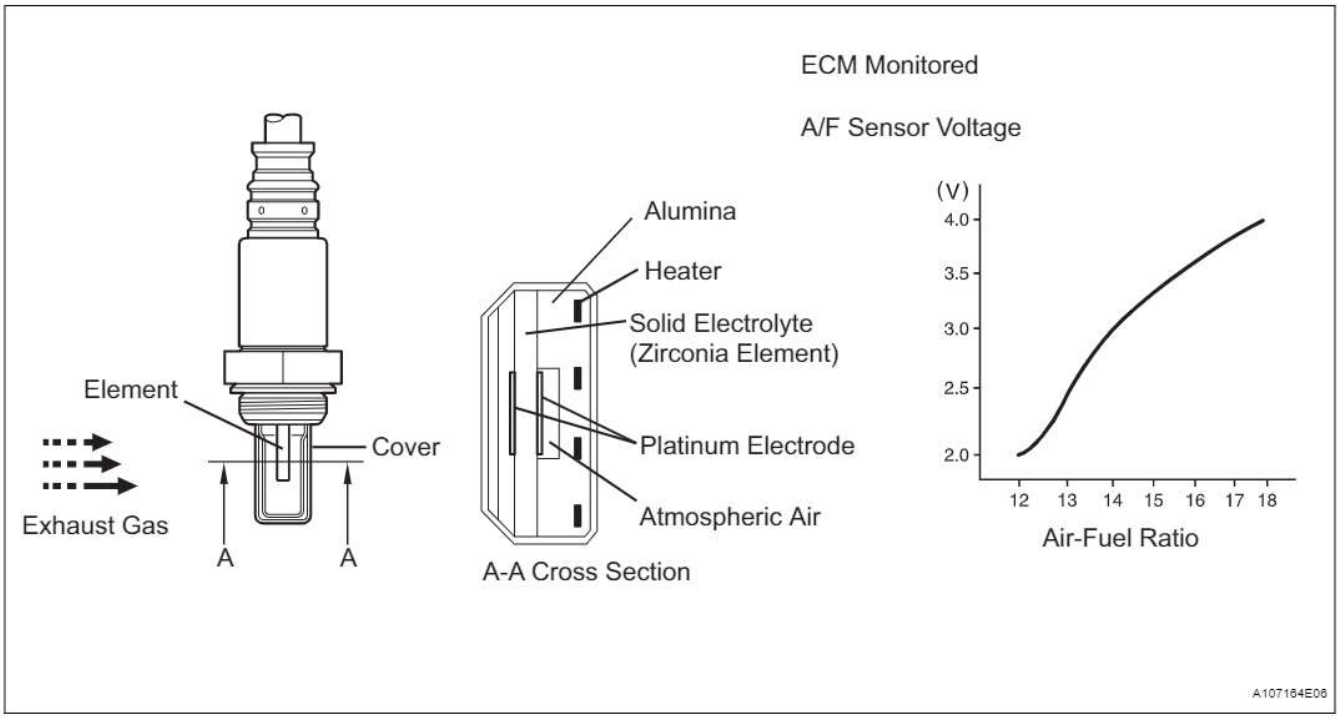

DTC No.	DTC Detection Condition	Trouble Area
P2195	Conditions (a) and (b) continue for 10 seconds or more (2 trip detection logic): (a) A/F sensor voltage more than 3.8 V (b) Heated Oxygen (HO2) sensor voltage 0.15 V or more	• Open or short in A/F sensor (sensor 1) circuit • A/F sensor (sensor 1) • A/F sensor heater (sensor 1) • Engine room J/B (EFI relay) • A/F sensor heater and EFI relay circuits • ECM
	While fuel-cut operation is performed (during vehicle deceleration), A/F sensor current 3.6 mA or more for 3 seconds (2 trip detection logic)	• A/F sensor • ECM
P2196	Conditions (a) and (b) continue for 10 seconds or more (2 trip detection logic): (a) A/F sensor voltage less than 2.8 V for 10 seconds (b) HO2 sensor voltage less than 0.6 V	• Open or short in A/F sensor (sensor 1) circuit • A/F sensor (sensor 1) • A/F sensor heater (sensor 1) • Engine room J/B (EFI relay) • A/F sensor heater and EFI relay circuits • ECM
	While fuel-cut operation is performed (during vehicle deceleration), A/F sensor current less than 1.0 mA for 3 seconds (2 trip detection logic)	• A/F sensor • ECM

ES

HINT:

- When either of these DTCs is set, check the A/F sensor output voltage by selecting the following menu items on the intelligent tester: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / AFS B1 S1.
- Short-term fuel trim values can also be read using the intelligent tester.
- The ECM regulates the voltages at the A1A+ and A1A- terminals of the ECM to a constant level. Therefore, the A/F sensor output voltage cannot be confirmed without using the intelligent tester.
- If the A/F sensor is malfunctioning, the ECM sets the DTC P2195 or P2196.

MONITOR DESCRIPTION

Sensor voltage detection monitor

Under the air-fuel ratio feedback control, if the A/F sensor output voltage indicates rich or lean for a certain period of time, the ECM determines that there is a malfunction in the A/F sensor. The ECM illuminates the MIL and sets a DTC.

Example:


If the A/F sensor output voltage is less than 2.8 V (very rich condition) for 10 seconds, despite the rear HO2 sensor output voltage being less than 0.6 V, the ECM sets DTC P2196. Alternatively, if the A/F sensor output voltage is more than 3.8 V (very lean condition) for 10 seconds, despite the rear HO2 sensor output voltage being 0.15 V or more, DTC P2195 is set.

Sensor current detection monitor

A rich air-fuel mixture causes a low A/F sensor current, and a lean air-fuel mixture causes a high A/F sensor current. Therefore, the sensor output becomes low during acceleration, and it becomes high during deceleration with the throttle valve fully closed. The ECM monitors the A/F sensor current during fuel-cut and detects any abnormal current values.

If the A/F sensor output is 3.6 mA or more for more than 3 seconds of cumulative time, the ECM interprets this as a malfunction in the A/F sensor and sets DTC P2195 (high-side stuck). If the A/F sensor output is less than 1.0 mA for more than 3 seconds of cumulative time, the ECM sets DTC P2196 (low-side stuck).

A/F Sensor Current Monitor:

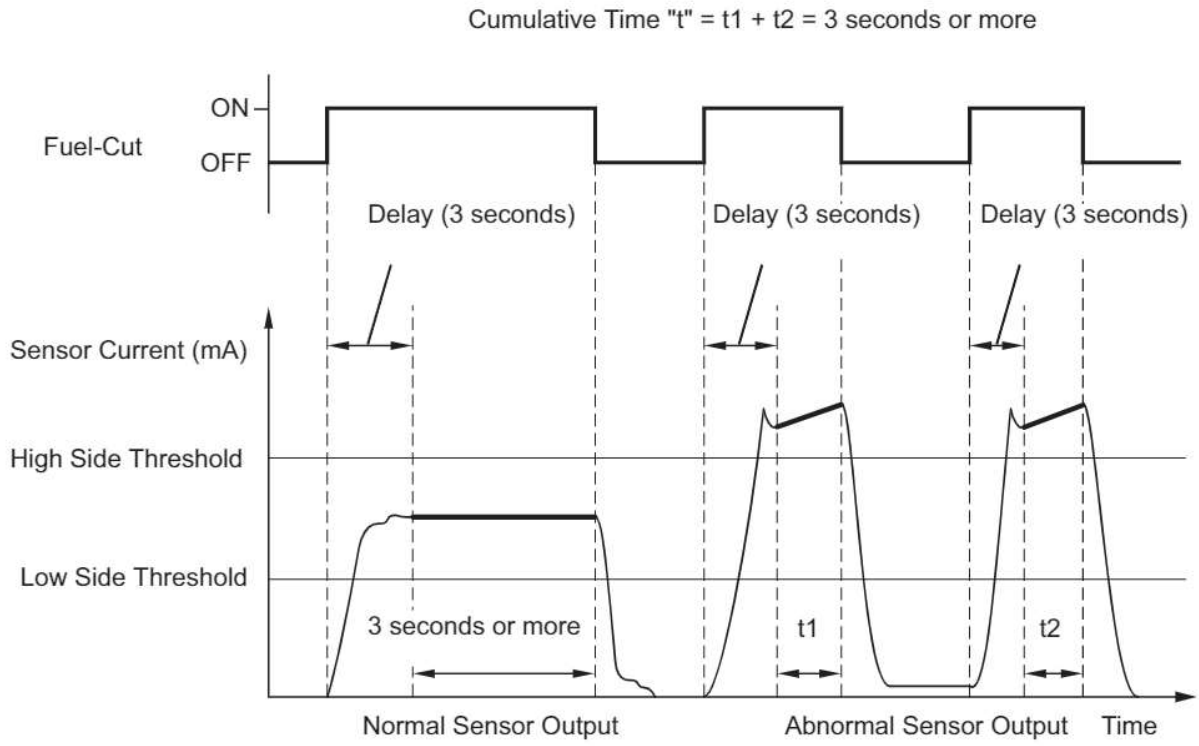

MONITOR STRATEGY

Related DTCs	P2195: A/F sensor signal stuck lean P2196: A/F sensor signal stuck rich
Required Sensors/Components (Main)	A/F sensor
Required Sensors/Components (Related)	HO2 sensor
Frequency of Operation	Continuous
Duration	10 seconds: Sensor voltage detection monitor 3 seconds: Sensor current detection monitor
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

All

Monitor runs whenever following DTCs are not present	P0031, P0032 (A/F sensor heater - Sensor 1) P0037, P0038 (O2 sensor heater - Sensor 2) P0100 - P0103 (MAF meter) P0110 - P0113 (IAT sensor) P0115 - P0118 (ECT sensor) P0120 - P0223, P2135 (TP sensor) P0125 (Insufficient ECT for Closed Loop) P0136 (O2 Sensor - Sensor 2) P0171, P0172 (Fuel system) P0300 - P0304 (Misfire) P0335 (CKP sensor) P0340 (CMP sensor) P0441 - P0456, P2401 - P2420 (EVAP system) P0500 (VSS)

Sensor voltage detection monitor (Lean side malfunction P2195):

Duration while all of the following conditions are met	2 seconds or more
Rear HO2 sensor voltage	0.15 V or more
Time after engine start	30 seconds or more
A/F sensor status	Activated
Fuel system status	Closed-loop
Engine	Running

Sensor voltage detection monitor (Rich side malfunction P2196):

Duration while all of the following conditions are met	2 seconds or more
Rear HO2 sensor voltage	Below 0.6 V
Time after engine start	30 seconds or more
A/F sensor status	Activated
Fuel system status	Closed-loop
Engine	Running

Sensor current detection monitor P2195 and P2196

Battery voltage	11 V or more
Atmospheric pressure	76 kPa (570 mmHg) or more
A/F sensor status	Activated
Continuous time of fuel cut	3 to 10 seconds
ECT	75°C (167°F) or more

TYPICAL MALFUNCTION THRESHOLDS

Sensor voltage detection monitor (Lean side malfunction P2195):

A/F sensor voltage	More than 3.8 V

Sensor voltage detection monitor (Rich side malfunction P2196):

A/F sensor voltage	Less than 2.8 V

Sensor current detection monitor (High side malfunction P2195):

A/F sensor current	3.6 mA or more


Sensor current detection monitor (Low side malfunction P2196):

A/F sensor current	Less than 1 mA

MONITOR RESULT

Refer to CHECKING MONITOR STATUS (See page ES-20).


WIRING DIAGRAM

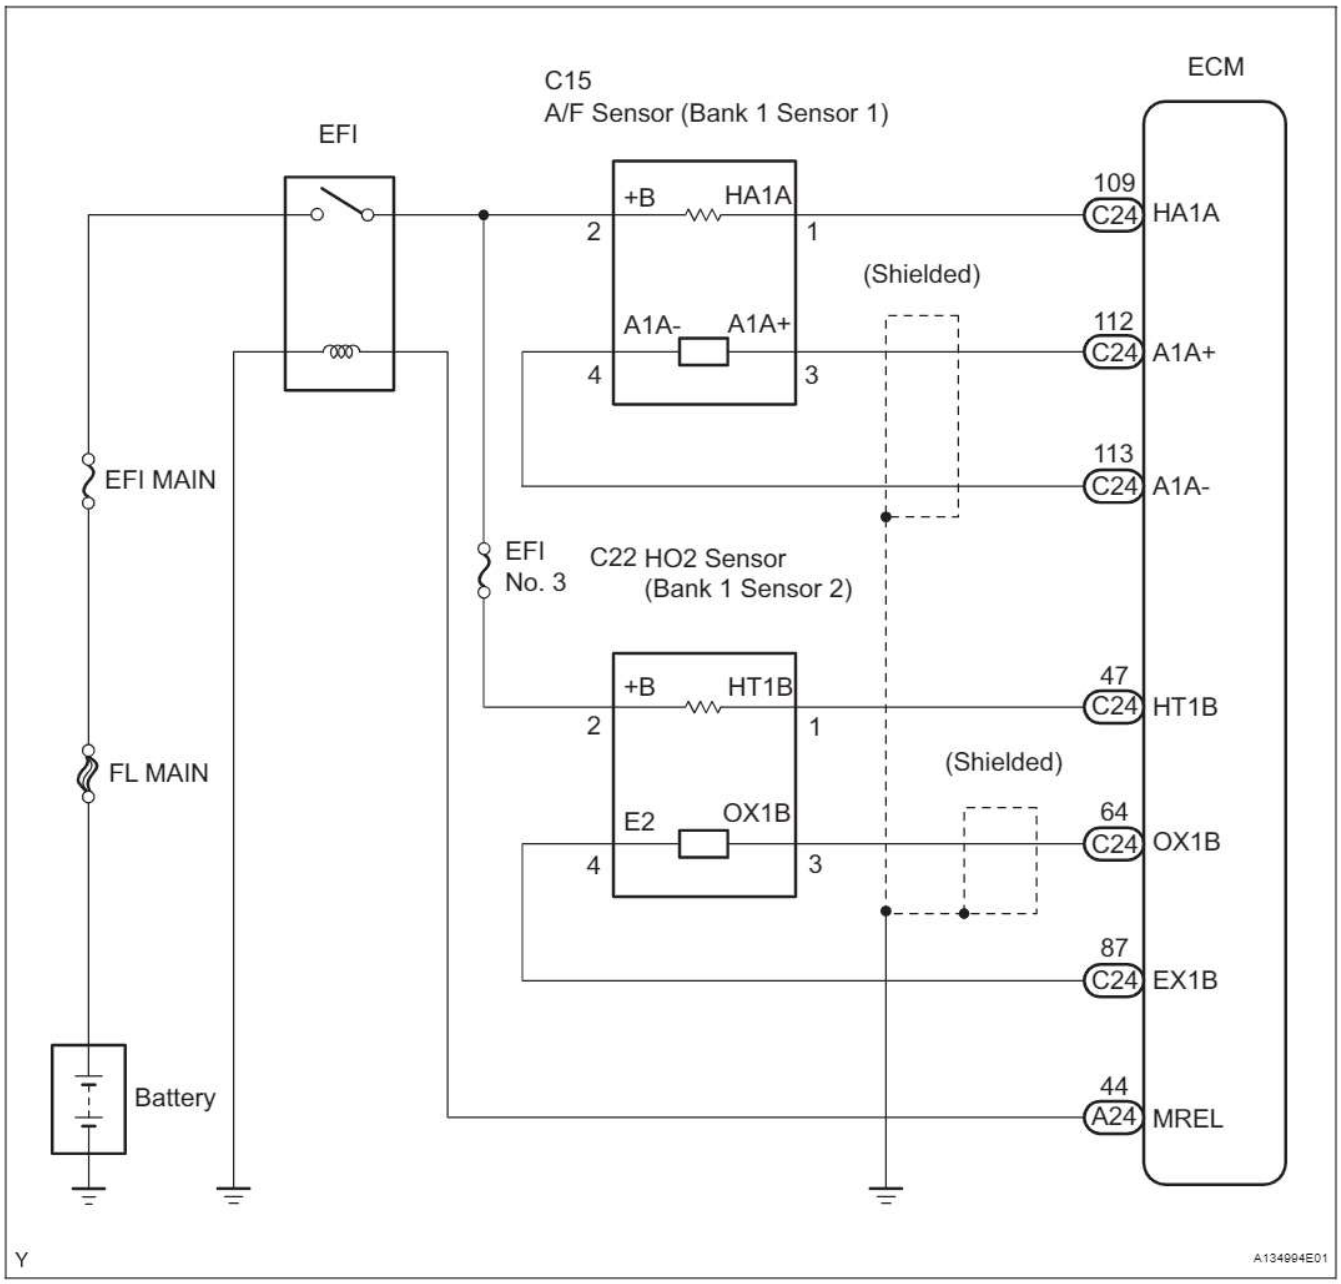


ES

CONFIRMATION DRIVING PATTERN

This confirmation driving pattern is used in the "PERFORM CONFIRMATION DRIVING PATTERN" procedure of the following diagnostic troubleshooting procedure.

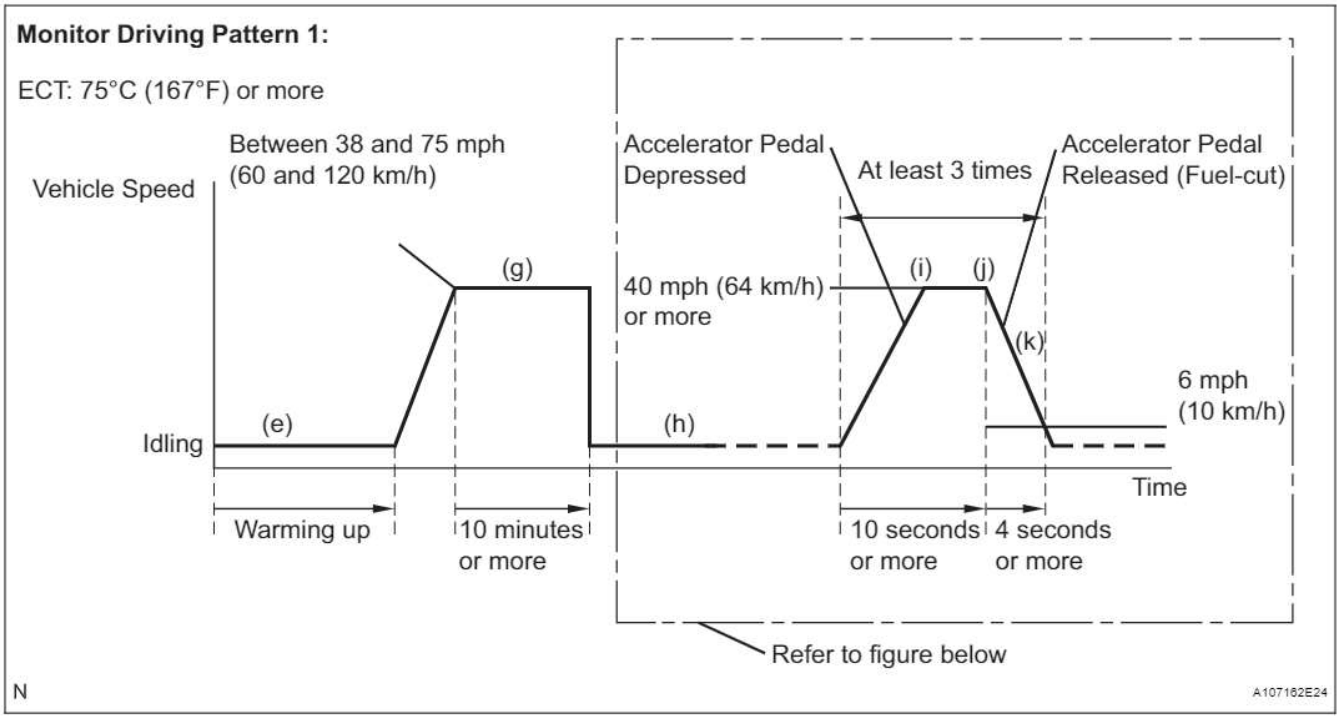

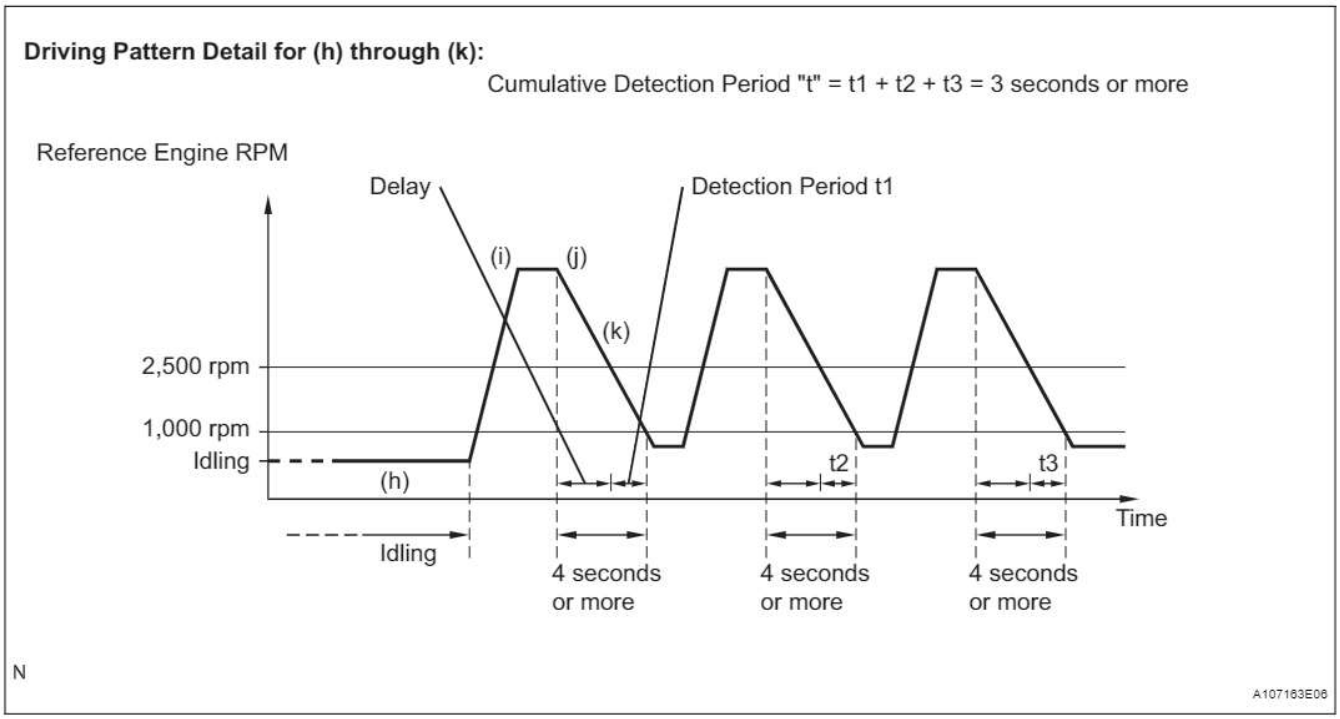

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Clear the DTCs (See page ES-38).
(e) Start the engine, and warm it up until the ECT reaches 75°C (167°F) or higher.
(f) On the intelligent tester, select the following menu items to check the fuel-cut status: DIAGNOSIS / ENHANCED OBD II / DATA LIST / USER DATA / FC IDL.
(g) Drive the vehicle at between 38 mph (60 km/h) and 75 mph (120 km/h) for at least 10 minutes.

(h) Change the transmission to the 2nd gear.
(i) Drive the vehicle at a proper vehicle speed to perform fuel-cut operation.
(j) Accelerate the vehicle to 40 mph (64 km/h) or more by depressing the accelerator pedal for at least 10 seconds.
HINT:
Fuel-cut is performed when the following conditions are met:
- Accelerator pedal fully is released.
- Engine speed is 2,500 rpm or more (fuel injection resumes at 1,000 rpm).

(k) Soon after performing step (j) above, release the accelerator pedal for at least 4 seconds without depressing the brake pedal, in order to execute fuel-cut control.
(l) Allow the vehicle to decelerate until the vehicle speed declines to less than 6 mph (10 km/h).
(m) Repeat steps from (h) through (k) above at least 3 times in one driving cycle.
HINT:
Completion of all A/F sensor monitors is required to change the value in TEST RESULT.
CAUTION:
Strictly observe posted speed limits, traffic laws, and road conditions when performing these driving patterns.

ES

INSPECTION PROCEDURE

HINT:
Intelligent tester only:
Malfunctioning areas can be identified by performing the A/F CONTROL function provided in the ACTIVE TEST. The A/F CONTROL function can help to determine whether the Air-fuel Ratio (A/F) sensor, Heated Oxygen (HO2) sensor and other potential trouble areas are malfunctioning.
The following instructions describe how to conduct the A/F CONTROL operation using the intelligent tester.




1. Connect the intelligent tester to the DLC3.
2. Start the engine and turn the tester on.
3. Warm up the engine at an engine speed of 2,500 rpm for approximately 90 seconds.
4. On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / A/F CONTROL.
5. Perform the A/F CONTROL operation with the engine idling (press the RIGHT or LEFT button to change the fuel injection volume).
6. Monitor the output voltages of the A/F and HO2 sensors (AFS B1 S1 and O2S B1 S2) displayed on the tester.

HINT:
- The A/F CONTROL operation lowers the fuel injection volume by 12.5 % or increases the injection volume by 25%.
- The sensors react in accordance with increases and decreases in the fuel injection volume.

Standard

Tester Display (Sensor)	Injection Volume	Status	Voltages
AFS B1 S1 (A/F)	+25%	Rich	Less than 3.0
	-12.5%	Lean	More than 3.35
O2S B1 S2 (HO2)	+25%	Rich	More than 0.5
	-12.5%	Lean	Less than 0.4

NOTICE:
The A/F sensor has an output delay of a few seconds and the HO2 sensor (sensor 2) output has a maximum output delay of approximately of 20 seconds.

Case	A/F Sensor (Sensor 1) Output Voltage		HO2 Sensor (Sensor 2) Output Voltage		Main Suspected Trouble Areas
1	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		-
	Output Voltage More than 3.35 V Less than 3.0 V		Output Voltage More than 0.5 V Less than 0.4 V		
2	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• A/F sensor • A/F sensor heater • A/F sensor circuit
	Output Voltage Almost no reaction		Output Voltage More than 0.5 V Less than 0.4 V		
3	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• HO2 sensor • HO2 sensor heater • HO2 sensor circuit
	Output Voltage More than 3.35 V Less than 3.0 V		Output Voltage Almost no reaction		
4	Injection volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• Injector • Fuel pressure • Gas leakage from exhaust system (Air-fuel ratio extremely lean or rich)
	Output Voltage Almost no reaction		Output Voltage Almost no reaction		

Following the A/F CONTROL procedure enables technicians to check and graph the voltage outputs of both the A/F and HO2 sensors.
To display the graph, select the following menu items on the tester: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / A/F CONTROL / USER DATA / AFS B1 S1 and O2S B1 S2, and press the YES button and then the ENTER button followed by the F4 button.
HINT:

- DTC P2A00 may be set when the air-fuel ratio is stuck rich or lean.
- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.
- A low A/F sensor voltage could be caused by a rich air-fuel mixture. Check for conditions that would cause the engine to run rich.
- A high A/F sensor voltage could be caused by a lean air-fuel mixture. Check for conditions that would cause the engine to run lean.

1	CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO P2195 OR P2196)

(a) Connect an intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P2195 or P2196	A
P2195 or P2196 and other DTCs	B

HINT:
If any DTCs relating to the A/F sensor (DTCs for the A/F sensor heater or A/F sensor admittance) are output, troubleshoot those DTCs first.

B → GO TO DTC CHART

A

ES

2 READ VALUE USING INTELLIGENT TESTER (TEST VALUE OF A/F SENSOR)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Clear the DTCs (See page ES-38).
(d) Drive the vehicle in accordance with the drive pattern described in the CONFIRMATION DRIVING PATTERN.
(e) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / MONITOR INFO / MONITOR STATUS.
(f) Check that the status of O2S MON is COMPL.
If the status is still INCMPL, drive the vehicle according to the driving pattern again.
HINT:
- AVAIL indicates that the component has not been monitored yet.
- COMPL indicates that the component is functioning normally.
- INCMPL indicates that the component is malfunctioning.

(g) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / MONITOR INFO / TEST RESULT / RANGE B1 S1; then press the ENTER button.
(h) Check the test value of the A/F sensor output current during fuel-cut.

Result

Test Value	Proceed to
Within normal range (1.0 mA or more, and less than 3.6 mA)	A
Outside normal range (Less than 1.0 mA, or 3.6 mA or more)	B

B → Go to step 12

A

3 READ VALUE USING INTELLIGENT TESTER (OUTPUT VOLTAGE OF A/F SENSOR)


(a) Connect the intelligent tester to the DLC3.
(b) Start the engine.

(c) Turn the tester on.
(d) Warm up the A/F sensor at an engine speed of 2,500 rpm for 90 seconds.
(e) On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / SNAPSHOT / MANUAL SNAPSHOT / USER DATA / AFS B1 S1 and ENGINE SPD.
(f) Check the A/F sensor voltage 3 times, when the engine is in each of the following conditions:
(1) While idling (for at least 30 seconds)
(2) At an engine speed of approximately 2,500 rpm (without any sudden changes in engine speed)
(3) Raise the engine speed to 4,000 rpm and then quickly release the accelerator pedal so that the throttle valve is fully closed.

ES

Standard voltage

Conditions	A/F Sensor Voltage Variations	Reference
(1) and (2)	Remains at approximately 3.3 V	Between 3.1 V and 3.5 V
(3)	Increases to 3.8 V or more	This occurs during engine deceleration (when fuel-cut performed)

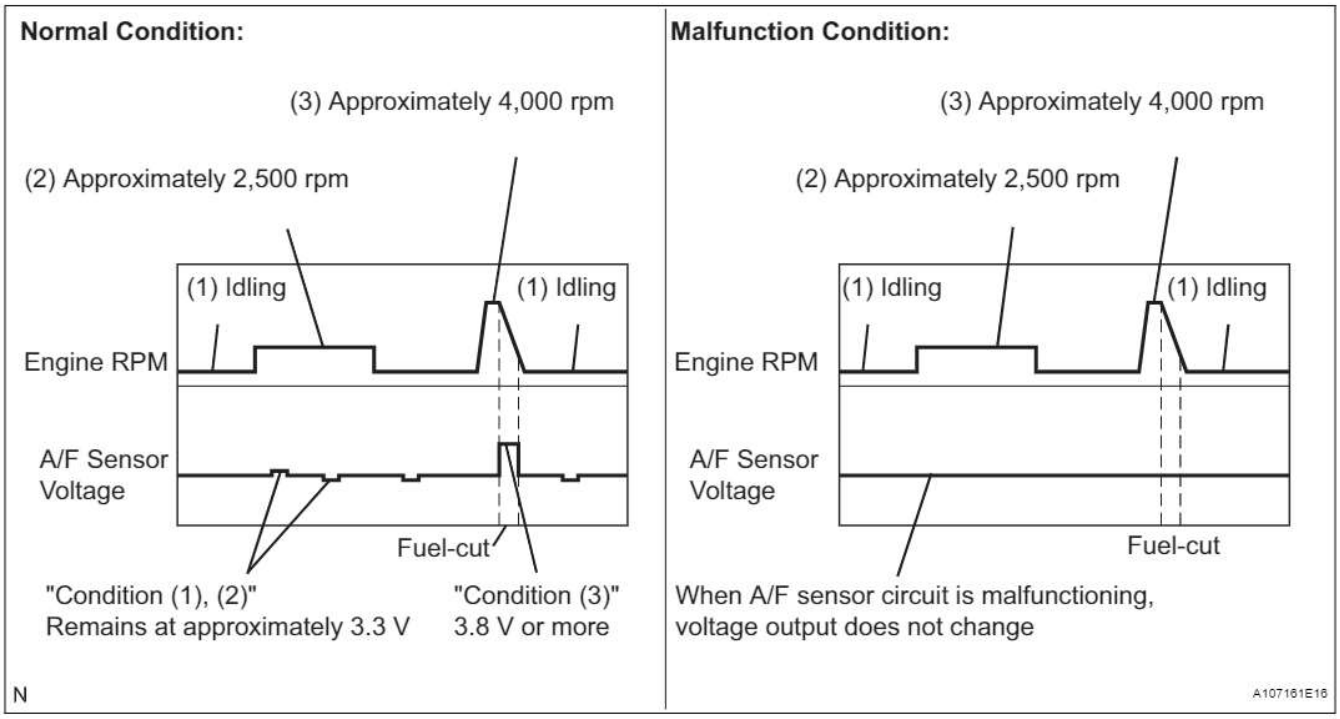

HINT:
- For more information, see the diagrams below.
- If the output voltage of the A/F sensor remains at approximately 3.3 V (see Malfunction Condition diagram) under any conditions, including those above, the A/F sensor may have an open circuit. (This will also happen if the A/F sensor heater has an open circuit.)

- If the output voltage of the A/F sensor remains at either approximately 3.8 V or more, or 2.8 V or less (see Malfunction Condition diagram) under any conditions, including those above, the A/F sensor may have a short circuit.
- The ECM stops fuel injection (fuel cut) during engine deceleration. This causes a lean condition and results in a momentary increase in the A/F sensor output voltage.
- The ECM must establish a closed throttle valve position learning value to perform fuel cut. If the battery terminal has been reconnected, the vehicle must be driven over 10 mph (16 km/h) to allow the ECM to learn the closed throttle valve position.
- When the vehicle is driven:
  The output voltage of the A/F sensor may be below 2.8 V during fuel enrichment. For the vehicle, this translates to a sudden increase in speed with the accelerator pedal fully depressed when trying to overtake another vehicle. The A/F sensor is functioning normally.
- The A/F sensor is a current output element; therefore, the current is converted into a voltage inside the ECM. Measuring the voltage at the connectors of the A/F sensor or ECM will show a constant voltage result.

NG → Go to step 9

OK

4	PERFORM CONFIRMATION DRIVING PATTERN

NEXT

5	CHECK WHETHER DTC OUTPUT RECURS (DTC P2195 OR P2196)

(a) Read the DTCs using the intelligent tester.
(b) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES.

Result

Display (DTC Output)	Proceed to
P2195 or P2196	A
No output	B

B → END

A

6	REPLACE AIR-FUEL RATIO SENSOR

NEXT

7	PERFORM CONFIRMATION DRIVING PATTERN

NEXT

ES

8	CHECK WHETHER DTC OUTPUT RECURS (DTC P2195 OR P2196)

(a) Read the DTCs using the intelligent tester.
(b) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES.

Result

Display (DTC Output)	Proceed to
No output	A
P2195 or P2196	B

B → REPLACE ECM

A

END

9	INSPECT AIR-FUEL RATIO SENSOR (HEATER RESISTANCE) (See page ES-84)

NG → REPLACE AIR-FUEL RATIO SENSOR

OK


10	INSPECT ENGINE ROOM J/B (EFI RELAY) (See page ES-85)

NG → REPLACE ENGINE ROOM J/B

OK

11 CHECK HARNESS AND CONNECTOR (A/F SENSOR - ECM)

Wire Harness Side:

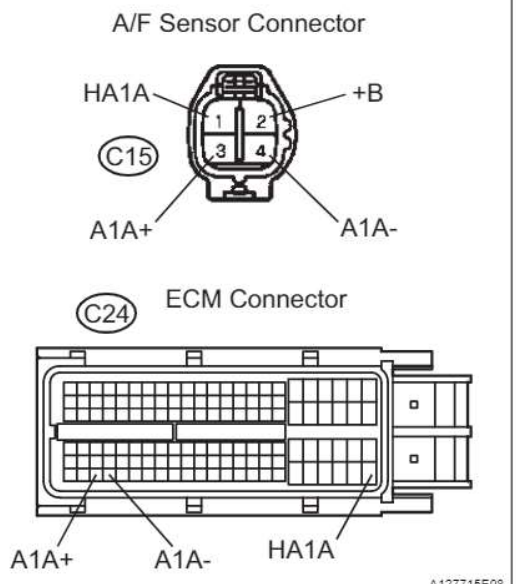

(a) Disconnect the C15 A/F sensor connector.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage between the +B terminal of the A/F sensor connector and body ground.

Standard voltage

Tester Connection	Specified Condition
C15-2 (+B) - Body ground	9 to 14 V

(d) Turn the ignition switch off.
(e) Disconnect the C24 ECM connector.
(f) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)


Tester Connection	Specified Condition
C15-1 (HA1A) - C24-109 (HA1A)	Below 1 Ω
C15-3 (A1A+) - C24-112 (A1A+)	Below 1 Ω
C15-4 (A1A-) - C24-113 (A1A-)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
C15-1 (HA1A) or C24-109 (HA1A) - Body ground	10 kΩ or higher
C15-3 (A1A+) or C24-112 (A1A+) - Body ground	10 kΩ or higher
C15-4 (A1A-) or C24-113 (A1A-) - Body ground	10 kΩ or higher

(g) Reconnect the ECM connector.
(h) Reconnect the A/F sensor connector.

Reference (System Diagram of Sensor 1):

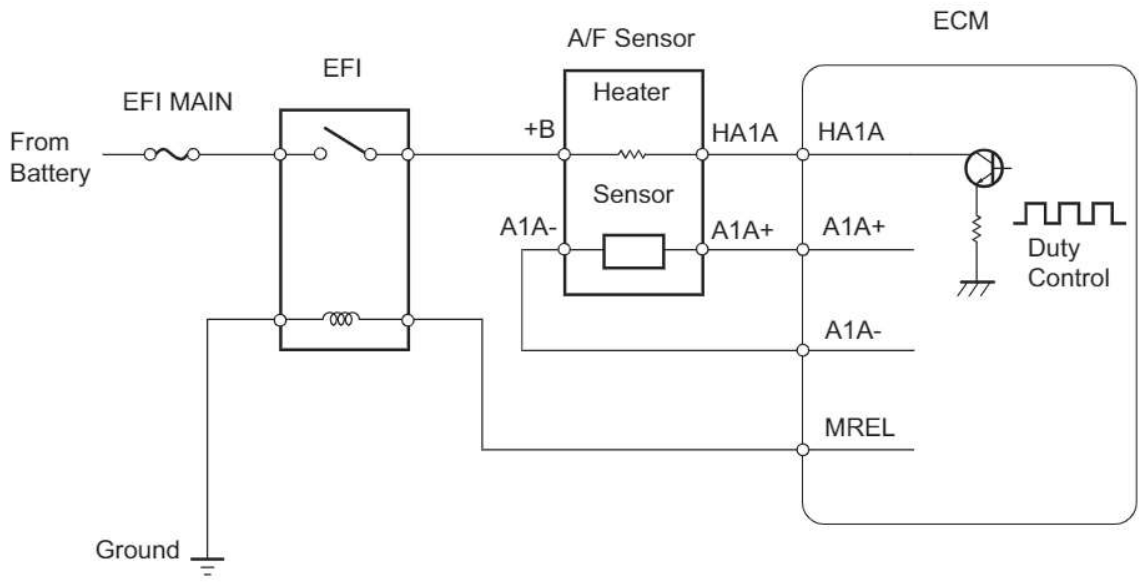

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

12	REPLACE AIR-FUEL RATIO SENSOR

NEXT

13	PERFORM CONFIRMATION DRIVING PATTERN

NEXT

ES

14	CHECK WHETHER DTC OUTPUT RECURS (DTC P2195 OR P2196)

(a) Read the DTCs using the intelligent tester.
(b) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES.

Result

Display (DTC Output)	Proceed to
No output	A
P2195 or P2196	B

B → REPLACE ECM

A

END


DTC	P2237	Oxygen (A/F) Sensor Pumping Current Circuit / Open (Bank 1 Sensor 1)
DTC	P2238	Oxygen (A/F) Sensor Pumping Current Circuit Low (Bank 1 Sensor 1)
DTC	P2239	Oxygen (A/F) Sensor Pumping Current Circuit High (Bank 1 Sensor 1)
DTC	P2252	Oxygen (A/F) Sensor Reference Ground Circuit Low (Bank 1 Sensor 1)
DTC	P2253	Oxygen (A/F) Sensor Reference Ground Circuit High (Bank 1 Sensor 1)

HINT:
- Although the DTC titles say oxygen sensor, these DTCs relate to the Air-Fuel Ratio (A/F) sensor.
- Sensor 1 refers to the sensor mounted in front of the Three-Way Catalytic Converter (TWC) and located near the engine assembly.


DESCRIPTION

These DTCs are set when there is an open or short in the A/F sensor circuit, or if A/F sensor output drops. To detect these problems, the voltage of the A/F sensor is monitored when turn the ignition switch to the ON position, and the admittance (admittance is an electrical term that indicates the ease of flow of current) is checked while driving. If the voltage of the A/F sensor is between 0.6V and 4.5V, it is considered normal. If the voltage is out of the specified range, or the admittance is less than the standard value, the ECM will determine that there is a malfunction in the A/F sensor. If the same malfunction is detected in next driving cycle, the MIL will be illuminated and a DTC will be stored.
The A/F sensor, which is located between the exhaust manifold and catalyst, consists of alloyed metal elements and a heater.
Depending on the engine operating conditions, the heater heats the sensor elements to activate them. Battery voltage is applied to the heater, the sensor ground is controlled by the ECM using a duty ratio. The sensor elements convert the oxygen concentration in the exhaust gas into voltage values to output. Based on the voltage, the ECM determines the air-fuel ratio and regulates the fuel injection volume depending on the air-fuel ratio and engine operating conditions. The voltage changes between 0.6V and 4.5V while the engine is running. If the air-fuel ratio is LEAN, which means the oxygen concentration in the exhaust gas is high, the voltage is high. If the air-fuel ratio is RICH, which means the oxygen concentration in the exhaust gas is low, the voltage is low.

Reference (System Diagram of Sensor 1):

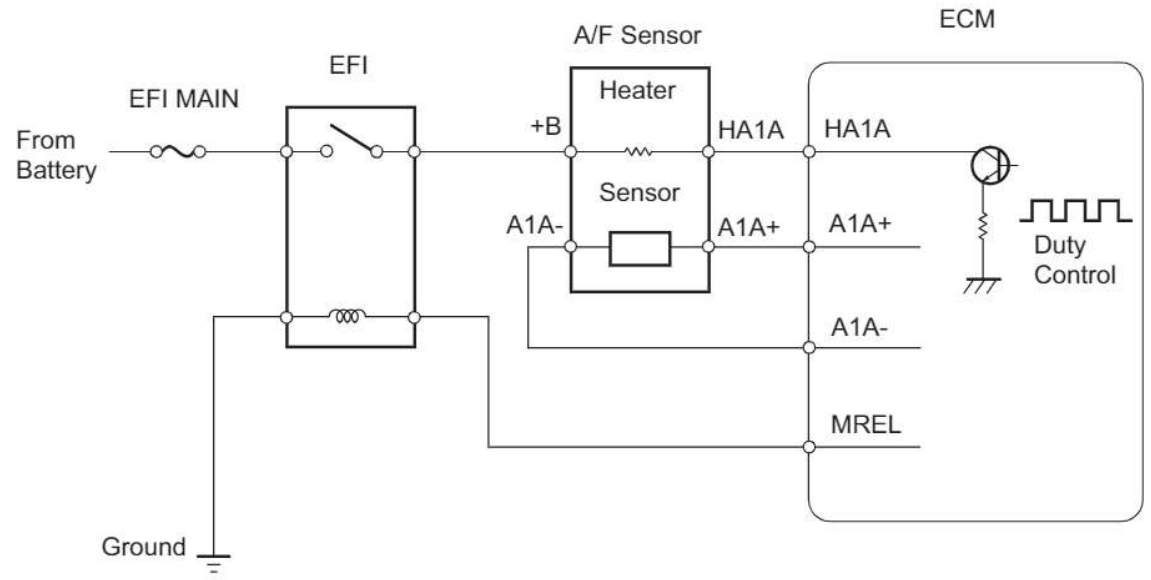

A140695E01

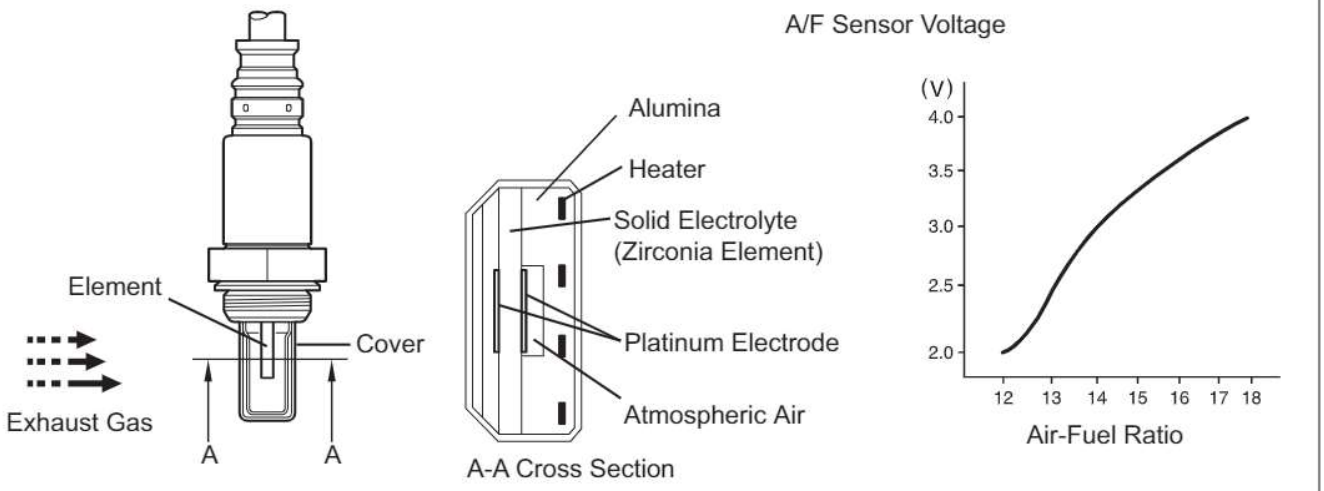

A107164E12

DTC No.	DTC Detection Condition	Trouble Area
P2237	Open in the circuit between terminals AF+ and AF- of the AF sensor while engine is running (2 trip detection logic)	• Open or short in A/F sensor (sensor 1) circuit • A/F sensor (sensor 1) • ECM
P2238	Any of the following conditions are met (2 trip detection logic) • AF sensor output drops while engine is running. • Voltage at terminal AF+ is 0.5V or less. • Voltage difference between terminals AF+ and AF- is 0.1V or less.	• Open or short in A/F sensor (sensor 1) circuit • A/F sensor (sensor 1) • ECM

DTC No.	DTC Detection Condition	Trouble Area
P2239	AF+ voltage more than 4.5 V (2 trip detection logic)	• Open or short in A/F sensor (sensor 1) circuit • A/F sensor (sensor 1) • ECM
P2252	AF- voltage 0.5 V or less (2 trip detection logic)	• Open or short in A/F sensor (sensor 1) circuit • A/F sensor (sensor 1) • ECM
P2253	AF- voltage more than 4.5 V (2 trip detection logic)	• Open or short in A/F sensor (sensor 1) circuit • A/F sensor (sensor 1) • ECM

MONITOR DESCRIPTION

These DTCs are output when there is an open or short in the A/F sensor circuit, or if A/F sensor output drops. To detect these problems, the voltage of the A/F sensor is monitored when turn the ignition switch to the ON position, and the admittance (admittance is an electrical term that indicates the ease of flow of current) is checked while driving. If the voltage of the A/F sensor is between 0.6V and 4.5V, it is considered normal. If the voltage is out of the specified range, or the admittance is less than the standard value, the ECM will determine that there is a malfunction in the A/F sensor. If the same malfunction is detected in next driving cycle, the MIL will be illuminated and a DTC will be stored.

ES

MONITOR STRATEGY

Related DTCs	P2237: A/F sensor open circuit between AF+ and AF- P2238: A/F sensor short circuit between AF+ and AF- P2238: A/F sensor short circuit between AF+ and GND P2238: A/F sensor admittance low P2239: A/F sensor short circuit between AF+ and +B P2252: A/F sensor short circuit between AF- and GND P2253: A/F sensor short circuit between AF- and +B
Required Sensors/Components (Main)	A/F sensor
Required Sensors/Components (Related)	Engine Coolant Temperature (ECT) sensor, Crankshaft position sensor
Frequency of Operation	Continuous
Duration	10 seconds
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	P0031, P0032 (A/F sensor heater - Sensor 1) P0100 - P0103 (MAF meter) P0110 - P0113 (IAT sensor) P0115 - P0118 (ECT sensor) P0120 - P0223, P2135 (TP sensor) P0125 (Insufficient ECT for Closed Loop) P0171, P0172 (Fuel trim) P0300 - P0304 (Misfire) P0335 (CKP sensor) P0340 (CMP sensor) P0441 - P0456, P2401 - P2420 (EVAP system) P0500 (VSS)
Battery voltage	11 V or more
Engine	Running
ECT	10°C (50°F) or more (Closed loop enabling ECT)
Estimated sensor temperature	450 to 550°C (842 to 1,022°F) (for P2237) 700 to 800°C (1,292 to 1,472°F) (for P2238)
Fuel-cut	Not executed

TYPICAL MALFUNCTION THRESHOLDS

P2237:

A/F sensor admittance	Below 0.002 1/Ω

P2238:

One of the following conditions is met	-
1. A/F sensor admittance	Below 0.022 1/Ω
2. AF+ terminal voltage	0.5 V or less
3. Difference between AF+ and AF- terminal voltages	Below 0.1 V

P2239:

AF+ terminal voltage	More than 4.5 V

P2252:

AF- terminal voltage	0.5 V or less


P2253:

AF- terminal voltage	More than 4.5 V

COMPONENT OPERATING RANGE

A/F sensor admittance	0.022 1/Ω or more
AF+ terminal voltage	0.6 to 4.5 V
AF- terminal voltage	0.6 to 4.5 V
Difference between AF+ and AF- terminal voltages	0.1 to 0.8 V

WIRING DIAGRAM

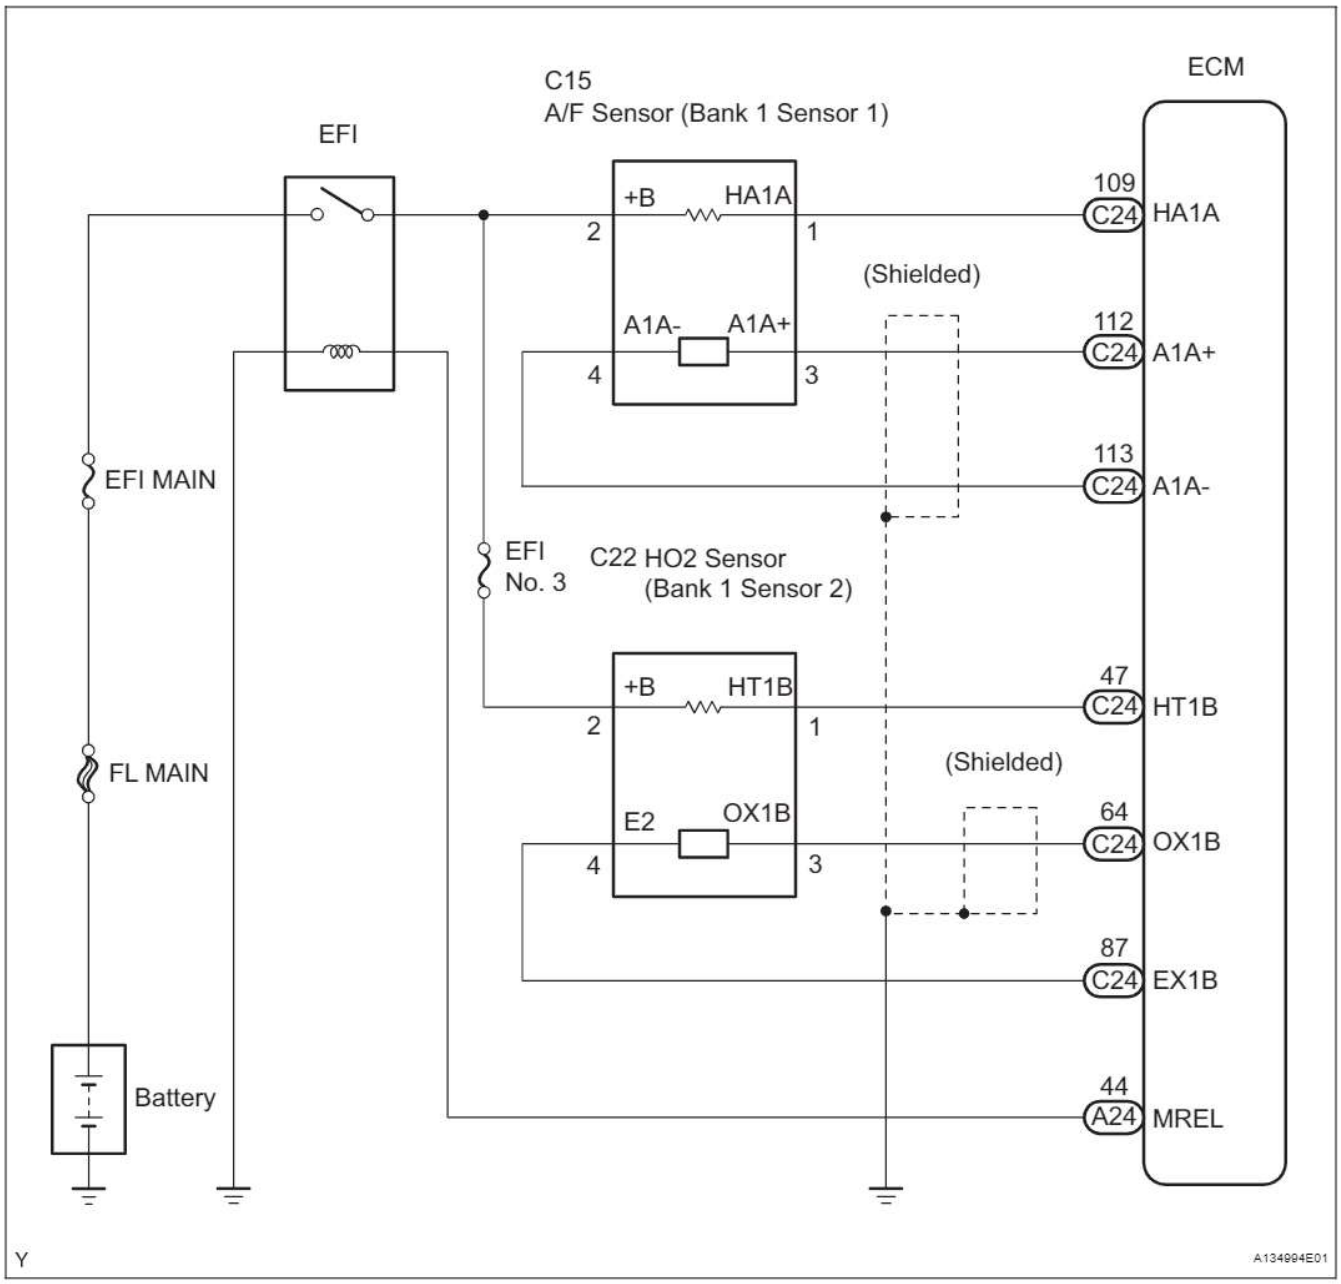

INSPECTION PROCEDURE

HINT:

Intelligent tester only:

Malfunctioning areas can be identified by performing the A/F CONTROL function provided in the ACTIVE TEST. The A/F CONTROL function can help to determine whether the Air-Fuel Ratio (A/F) sensor, Heated Oxygen (HO2) sensor and other potential trouble areas are malfunctioning.

The following instructions describe how to conduct the A/F CONTROL operation using the intelligent tester.

1. Connect the intelligent tester to the DLC3.
2. Start the engine and turn the tester on.
3. Warm up the engine at an engine speed of 2,500 rpm for approximately 90 seconds.
4. On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / A/F CONTROL.

5. Perform the A/F CONTROL operation with the engine idling (press the RIGHT or LEFT button to change the fuel injection volume).
6. Monitor the output voltages of the A/F and HO2 sensors (AFS B1 S1 and O2S B1 S2) displayed on the tester.





HINT:

- The A/F CONTROL operation lowers the fuel injection volume by 12.5 % or increases the injection volume by 25 %.
- The sensors react in accordance with increases and decreases in the fuel injection volume.

Standard

Tester Display (Sensor)	Injection Volume	Status	Voltages
AFS B1 S1 (A/F)	+25 %	Rich	Less than 3.0
	-12.5 %	Lean	More than 3.35
O2S B1 S2 (HO2)	+25 %	Rich	More than 0.5
	-12.5 %	Lean	Less than 0.4

NOTICE:
The A/F sensor has an output delay of a few seconds and the HO2 sensor has a maximum output delay of approximately 20 seconds.


Case	A/F Sensor (Sensor 1) Output Voltage		HO2 Sensor (Sensor 2) Output Voltage		Main Suspected Trouble Areas
1	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		-
	Output Voltage More than 3.35 V Less than 3.0 V		Output Voltage More than 0.5 V Less than 0.4 V		
2	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• A/F sensor • A/F sensor heater • A/F sensor circuit
	Output Voltage Almost no reaction		Output Voltage More than 0.5 V Less than 0.4 V		
3	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• HO2 sensor • HO2 sensor heater • HO2 sensor circuit
	Output Voltage More than 3.35 V Less than 3.0 V		Output Voltage Almost no reaction		
4	Injection volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• Injector • Fuel pressure • Gas leakage from exhaust system (Air-fuel ratio extremely lean or rich)
	Output Voltage Almost no reaction		Output Voltage Almost no reaction		

Following the A/F CONTROL procedure enables technicians to check and graph the output voltages of both the A/F and HO2 sensors.
To display the graph, select the following menu items on the tester: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / A/F CONTROL / USER DATA / AFS B1 S1 and O2S B1 S2; then press the YES button and then the ENTER button followed by the F4 button.

HINT:
Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	CHECK HARNESS AND CONNECTOR (A/F SENSOR - ECM)

Wire Harness Side:

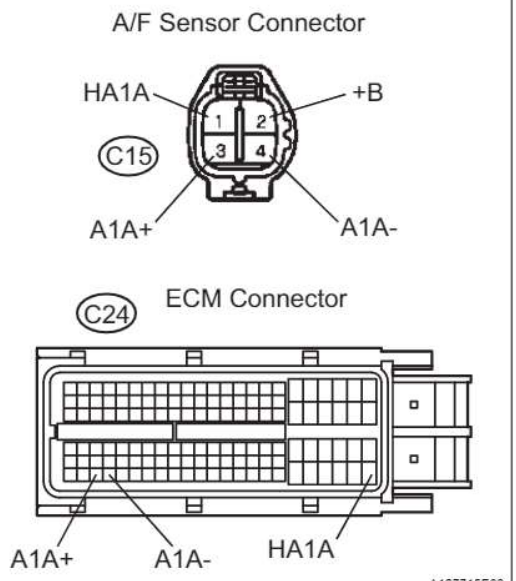

(a) Disconnect the C15 A/F sensor connector.
(b) Disconnect the C24 ECM connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.

Standard resistance (Check for open)


Tester Connection	Specified Condition
C15-3 (A1A+) - C24-112 (A1A+)	Below 1 Ω
C15-4 (A1A-) - C24-113 (A1A-)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
C15-3 (A1A+) or C24-112 (A1A+) - Body ground	10 kΩ or higher
C15-4 (A1A-) or C24-113 (A1A-) - Body ground	10 kΩ or higher

(d) Reconnect the ECM connector.
(e) Reconnect the A/F sensor connector.

Reference (System Diagram of Sensor 1):

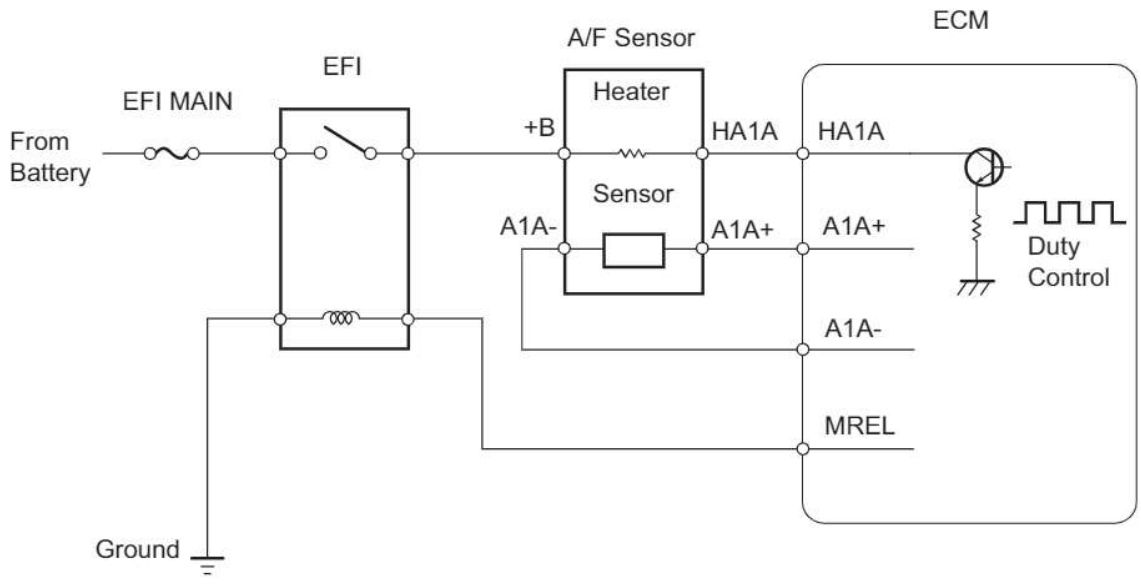

NG	REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

2	REPLACE AIR-FUEL RATIO SENSOR

NEXT

3	CHECK WHETHER DTC OUTPUT RECURS

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Clear the DTCs (See page ES-38).
(d) Start the engine.
(e) Allow the engine to idle for 5 minutes or more.
(f) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES.
(g) Read pending DTCs.

Result

Display (DTC Output)	Proceed to
No output	A
P2237, P2238, P2239, P2252 or P2253	B

B → REPLACE ECM

A

END

DTC	P2420	Evaporative Emission System Switching Valve Control Circuit High

DTC SUMMARY

DTCs	Monitoring Item	Malfunction Detection Condition	Trouble Area	Detection Timing	Detection Logic
P2420	Vent valve stuck open (vent)	Following condition is met during key-off EVAP monitor: • EVAP pressure change when vent valve closed (ON) less than 0.3 kPa-g (2.25 mmHg-g)	• Canister pump module (Reference orifice, leak detection pump, vent valve) • Connector/wire harness (Canister pump module - ECM) • ECM	While ignition switch off	2 trip detection logic

ES

HINT:
The vent valve is built into the canister pump module.

DESCRIPTION

The description can be found in the EVAP (Evaporative Emission) System (See page ES-346).

INSPECTION PROCEDURE


Refer to the EVAP System (See page ES-352).

MONITOR DESCRIPTION


5 hours* after the ignition switch is turned off, the leak detection pump creates negative pressure (vacuum) in the EVAP system. The ECM monitors for leaks and actuator malfunctions based on the EVAP pressure.
HINT:
*: If the engine coolant temperature is not below 35°C (95°F) 5 hours after the ignition switch is turned off, the monitor check starts 2 hours later. If it is still not below 35°C (95°F) 7 hours after the ignition switch is turned off, the monitor check starts 2.5 hours later.

Sequence	Operations	Descriptions	Duration
-	ECM activation	Activated by soak timer 5, 7 or 9.5 hours after ignition switch turned off.	-
A	Atmospheric pressure measurement	Vent valve turned OFF (vent) and EVAP system pressure measured by ECM in order to register atmospheric pressure. If pressure in EVAP system not between 76 kPa-a and 110 kPa-a (570 mmHg-a and 825 mmHg-a), ECM cancels EVAP system monitor.	10 seconds
B	First reference pressure measurement	In order to determine reference pressure, leak detection pump creates negative pressure (vacuum) through reference orifice and then ECM checks if leak detection pump and vent valve operate normally.	60 seconds
C	EVAP system pressure measurement	Vent valve turned ON (closed) to shut EVAP system. Negative pressure (vacuum) created in EVAP system, and EVAP system pressure then measured. Write down measured value as it will be used in leak check. If EVAP pressure does not stabilize within 15 minutes, ECM cancels EVAP system monitor.	15 minutes*
D	Purge VSV monitor	Purge VSV opened and then EVAP system pressure measured by ECM. Large increase indicates normality.	10 seconds
E	Second reference pressure measurement	After second reference pressure measurement, leak check performed by comparing first and second reference pressure. If stabilized system pressure higher than second reference pressure, ECM determines that EVAP system leaking.	60 seconds
F	Final check	Atmospheric pressure measured and then monitoring result recorded by ECM.	-

*: If only a small amount of fuel is in the fuel tank, it takes longer for the EVAP pressure to stabilize.

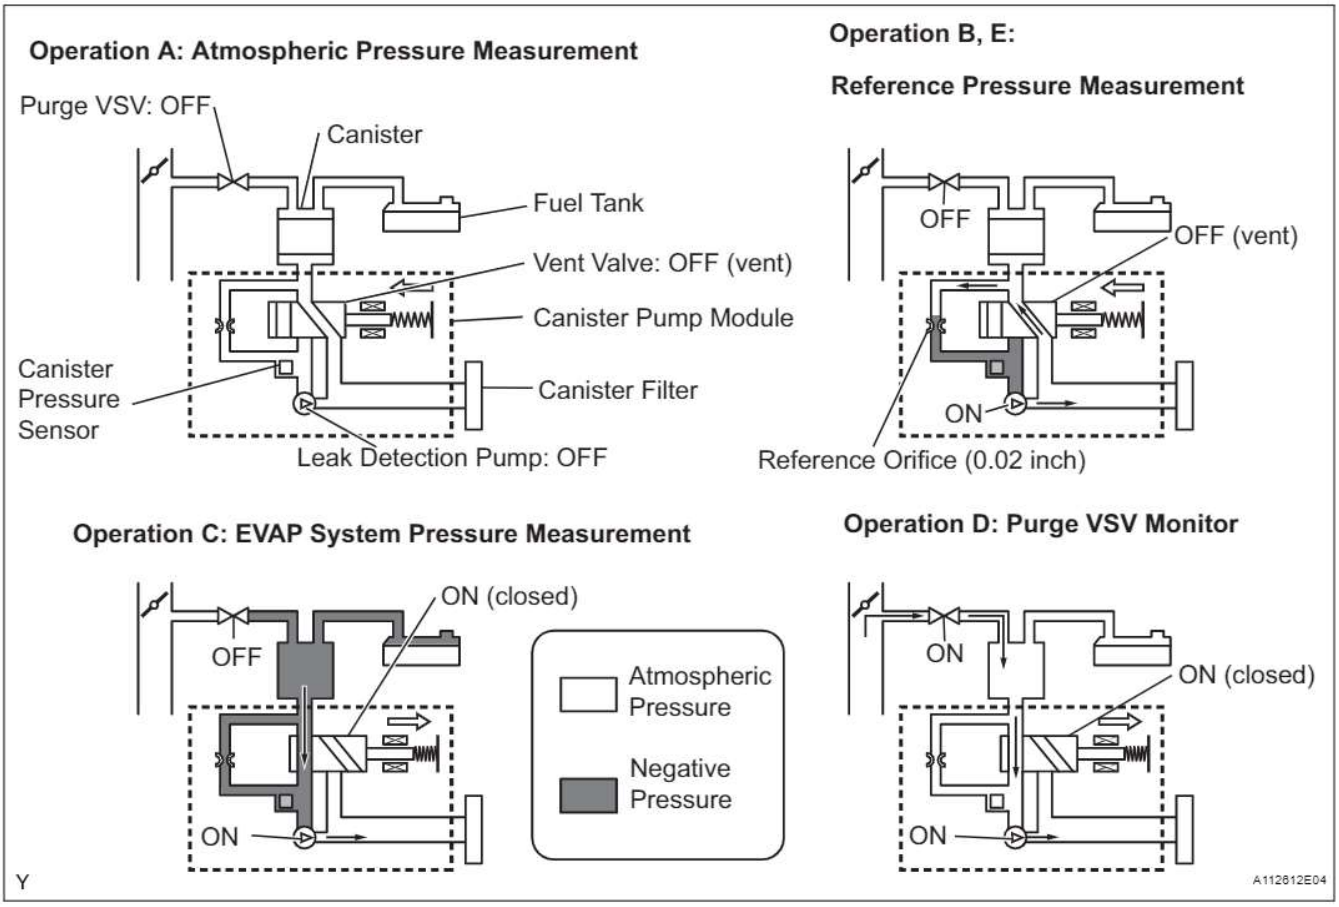

The vent valve turns ON (closes) and the EVAP system pressure is then measured by the ECM, using the canister pressure sensor, to conduct an EVAP leak check. If the pressure does not increase when the vent valve is open, the ECM interprets this as the vent valve being stuck open. The ECM illuminates the MIL and sets the DTC.

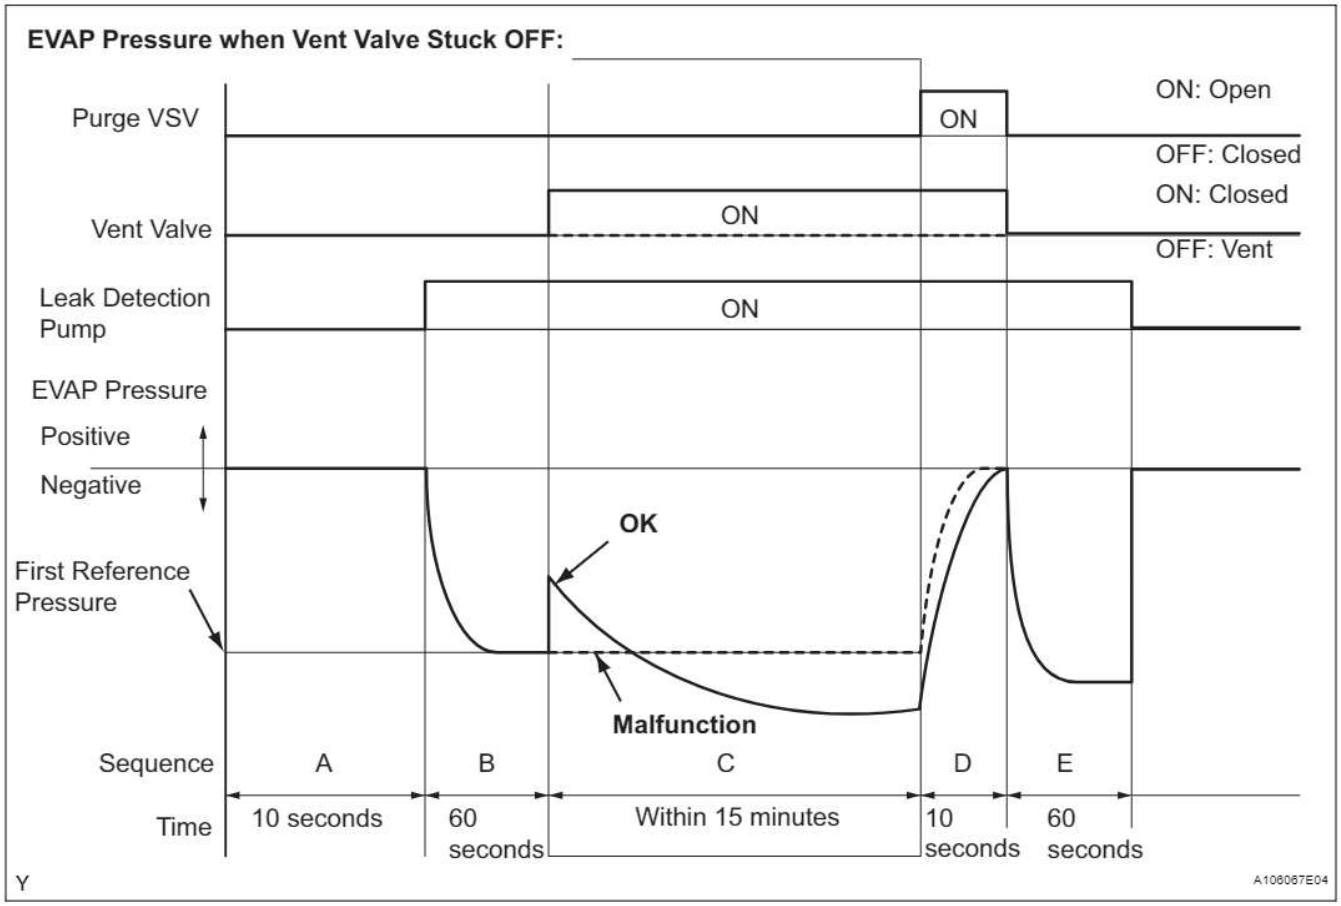

MONITOR STRATEGY

Required Sensors/Components	Purge VSV and canister pump module
Frequency of Operation	Once per driving cycle
Duration	Within 2 minutes (varies with amount of fuel in tank)
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

Monitor runs whenever following DTCs are not present	None
EVAP key-off monitor runs when all of the following conditions are met	-
Atmospheric pressure	70 to 110 kPa-a (525 to 825 mmHg-a)
Battery voltage	10.5 V or more
Vehicle speed	Below 2.5 mph (4 km/h)
Ignition switch	off
Time after key off	5, 7 or 9.5 hours
EVAP pressure sensor malfunction (P0450, P0451, P0452 and P0453)	Not detected
EVAP canister purge valve	Not operated by scan tool
EVAP canister vent valve	Not operated by scan tool
EVAP leak detection pump	Not operated by scan tool
Both of the following conditions are met before key off	Conditions 1 and 2
1. Duration that vehicle has been driven	5 minutes or more
2. EVAP purge operation	Performed

ECT	4.4 to 35°C (40 to 95°F)
IAT	4.4 to 35°C (40 to 95°F)

1. Key-off monitor sequence 1 to 8

1. Atmospheric pressure measurement

Next sequence runs if following condition is met	-
Atmospheric pressure change	Less than 0.3 kPa-g (2.25 mmHg-g) in 1 second

2. First reference pressure measurement

Next sequence runs if all of the following conditions are met	Conditions 1, 2 and 3
1. EVAP pressure just after reference pressure measurement start	-1 kPa-g (-7.5 mmHg-g) or less
2. Reference pressure	-4.85 to -1.057 kPa-g (-36.4 to -7.93 mmHg-g)
3. Reference pressure	Saturated within 60 seconds

ES

3. Vent valve stuck closed check

Next sequence runs if following condition is met	-
EVAP pressure change after vent valve is ON	0.3 kPa-g (2.25 mmHg-g) or more

4. Vacuum introduction

Next sequence runs if following condition is met	-
EVAP pressure	Saturated within 15 minutes

5. EVAP canister purge valve close stuck check

Next sequence runs if following condition is met	-
EVAP pressure change after purge valve is open	0.3 kPa-g (2.25 mmHg-g) or more

6. Second reference pressure measurement

Next sequence runs if all of the following conditions are met	Conditions 1, 2, 3 and 4
1. EVAP pressure just after reference pressure measurement start	-1 kPa-g (-7.5 mmHg-g) or less
2. Reference pressure	-4.85 to -1.057 kPa-g (-36.4 to -7.93 mmHg-g)
3. Reference pressure	Saturated within 60 seconds
4. Difference between first reference pressure and second reference pressure	Less than 0.5 kPa-g (3.75 mmHg-g)

7. Leak check

Next sequence runs if following condition is met	-
EVAP pressure when vacuum introduction completes	Second reference pressure or less

8. Atmospheric pressure measurement

EVAP monitor complete if following condition is met	-
Atmospheric pressure difference between sequence 1 and 8	Within 0.3 kPa-g (2.25 mmHg-g)

TYPICAL MALFUNCTION THRESHOLDS

"Saturated" indicates that the EVAP pressure change is less than 0.286 kPa-g (2.14 mmHg-g) in 60 seconds.

EVAP pressure change after EVAP canister vent valve ON	Less than 0.3 kPa-g (2.25 mmHg-g)

MONITOR RESULT

Refer to CHECKING MONITOR STATUS (See page ES-20).

DTC	P2610	ECM / PCM Internal Engine Off Timer Performance


DTC SUMMARY

DTC	Monitoring Item	Malfunction Detection Condition	Trouble Area	Detection Timing	Detection Logic
P2610	Soak timer (built into ECM)	ECM internal malfunction	ECM	Engine running	2 trip detection logic

DESCRIPTION

ES

To ensure the accuracy of the EVAP (Evaporative Emission) monitor values, the soak timer, which is built into the ECM, measures 5 hours (+-15 minutes) from when the ignition switch is turned off, before the monitor is run. This allows the fuel to cool down, which stabilizes the EVAP pressure. When 5 hours have elapsed, the ECM turns on.

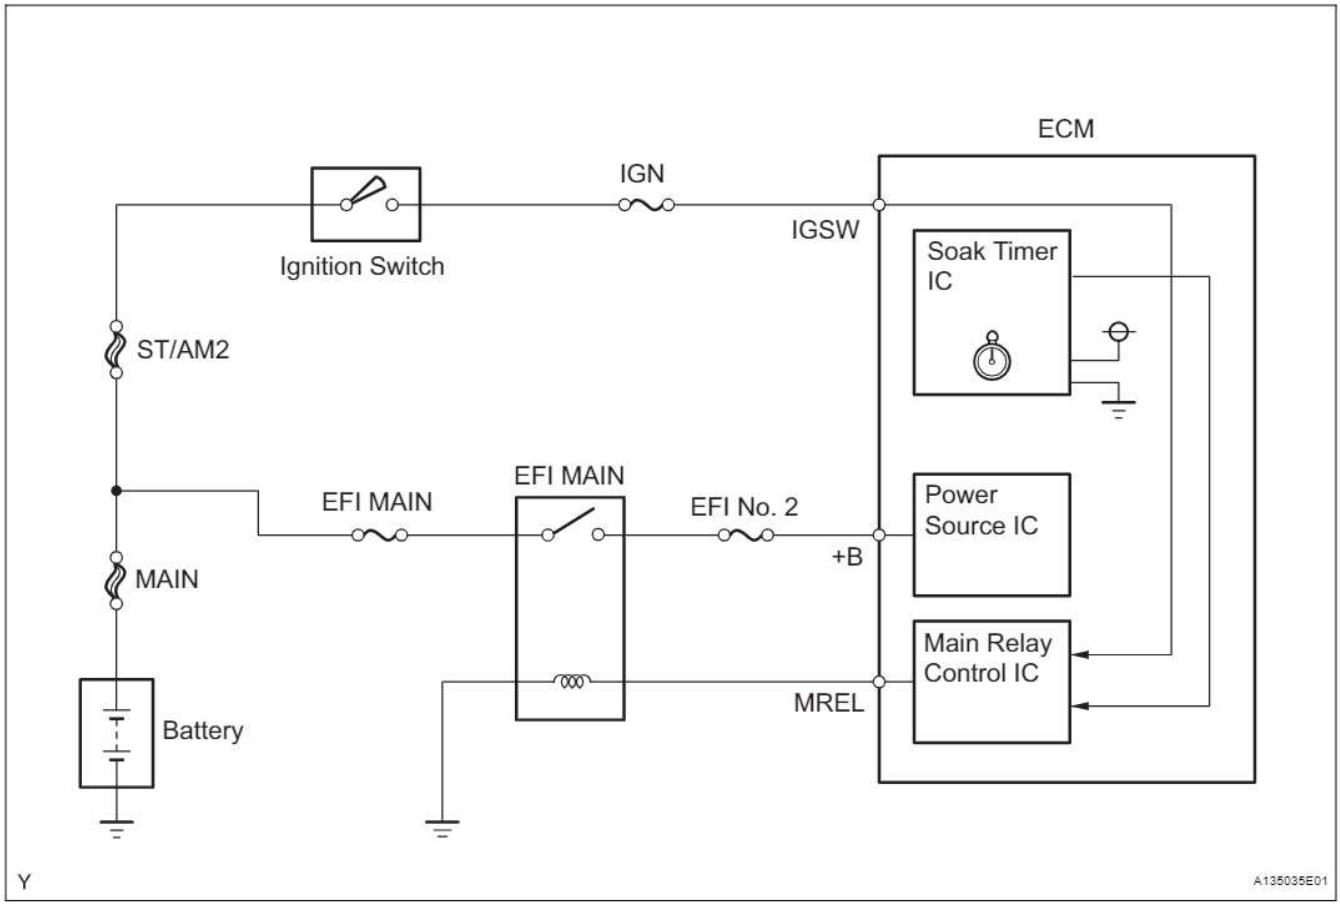

MONITOR DESCRIPTION

5 hours after the ignition switch is turned off, the soak timer activates the ECM to begin the EVAP system monitor. While the engine is running, the ECM monitors the synchronization of the soak timer and the CPU clock. If these two are not synchronized, the ECM interprets this as a malfunction, illuminates the MIL and sets the DTC (2 trip detection logic).

MONITOR STRATEGY

Required Sensors/Components	ECM

Frequency of Operation	Once per driving cycle
Duration	10 minutes
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

All:

Monitor runs whenever following DTC are not present	None

Case 1:

Engine	Running
Battery voltage	8 V or more
Ignition switch	ON
Starter	OFF

Case 2:

Internal engine OFF timer (elapsed time from engine stop)	10 to 300 minutes
Battery voltage	8 V or more
Ignition switch	ON
Starter	OFF

Case 3:

Internal engine OFF timer (elapsed time from engine stop)	310 minutes or more
Battery voltage	8 V or more
Ignition switch	ON
Starter	OFF

TYPICAL MALFUNCTION THRESHOLDS

Case 1:

Soak timer measurement when ECM CPU clock counts 10 minutes	Less than 7 minutes, or more than 13 minutes

Case 2:

ECM had the started record by internal engine OFF timer	YES

Case 3:

ECM had the starter record by internal engine OFF timer	NO

INSPECTION PROCEDURE

HINT:

- DTC P2610 is set if an internal ECM problem is detected. Diagnostic procedures are not required. ECM replacement is necessary.
- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	**REPLACE ECM**

(a) Replace the ECM (See page ES-432).

NEXT

2	CHECK WHETHER DTC OUTPUT RECURS

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester on.
(d) Clear the DTCs (See page ES-38).
(e) Start the engine and wait for 10 minutes or more.
(f) On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES.
(g) If no pending DTC is displayed, the repair has been successfully completed.

NEXT

END

DTC	P2A00	A/F Sensor Circuit Slow Response (Bank 1 Sensor 1)

HINT:
Sensor 1 refers to the sensor mounted in front of the Three-Way Catalytic Converter (TWC) and located near the engine assembly.

DESCRIPTION


Refer to DTC P2195 (See page ES-308).

DTC No.	DTC Detection Condition	Trouble Area
P2A00	Calculated value of air-fuel ratio (A/F) sensor response rate deterioration level less than threshold (2 trip detection logic)	• Open or short in A/F sensor circuit • A/F sensor • ECM

ES


MONITOR DESCRIPTION

After the engine is warmed up, the ECM performs air-fuel ratio feedback control to maintain the air-fuel ratio at the stoichiometric level. In addition, active A/F control is performed for approximately 10 seconds after the preconditions are met in order to measure the A/F sensor response rate. During active A/F control, the ECM forcibly increases and decreases the injection volume by a certain amount, based on the stoichiometric air-fuel ratio learned during normal air-fuel ratio control, and measures the A/F sensor response rate. The ECM receives a signal from the A/F sensor while performing active A/F control and uses it to calculate the A/F sensor response rate deterioration level.
If the A/F sensor response rate deterioration level is less than the threshold, the ECM interprets this as a malfunction and sets the DTC.

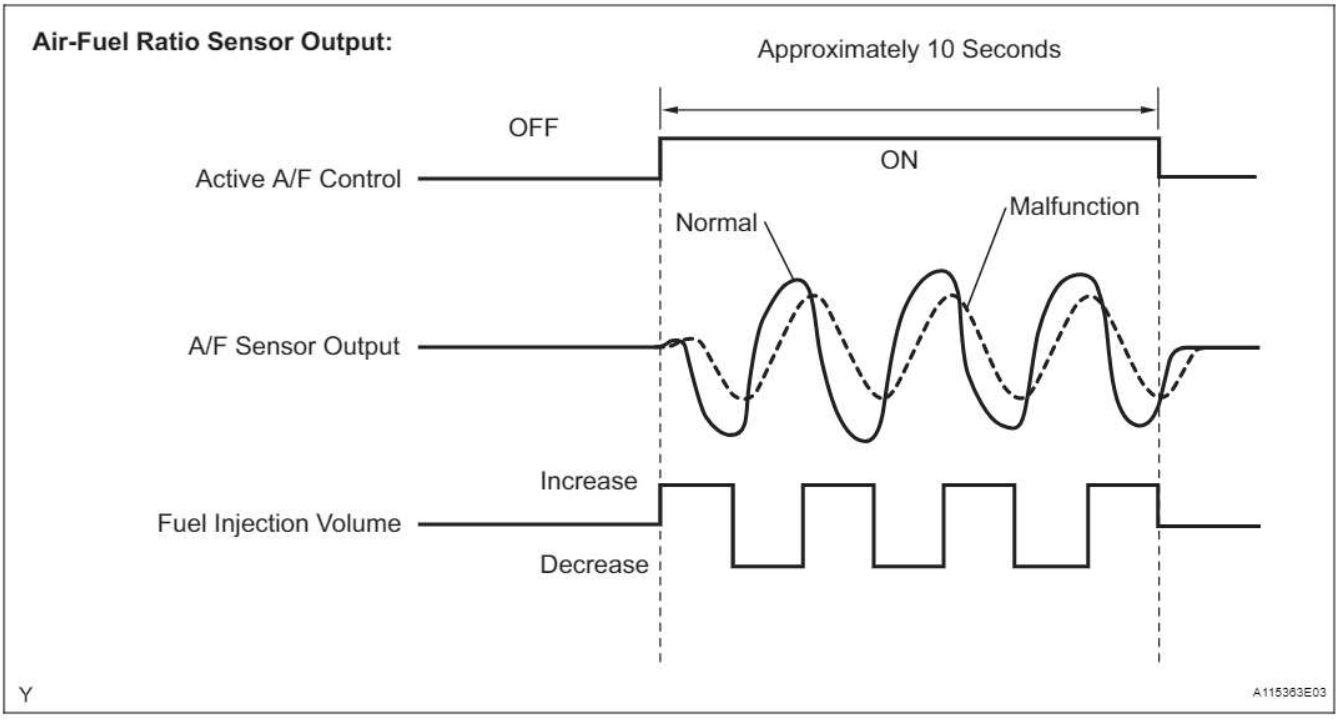


CONFIRMATION DRIVING PATTERN

HINT:
Performing this confirmation pattern will activate the A/F sensor response monitor.

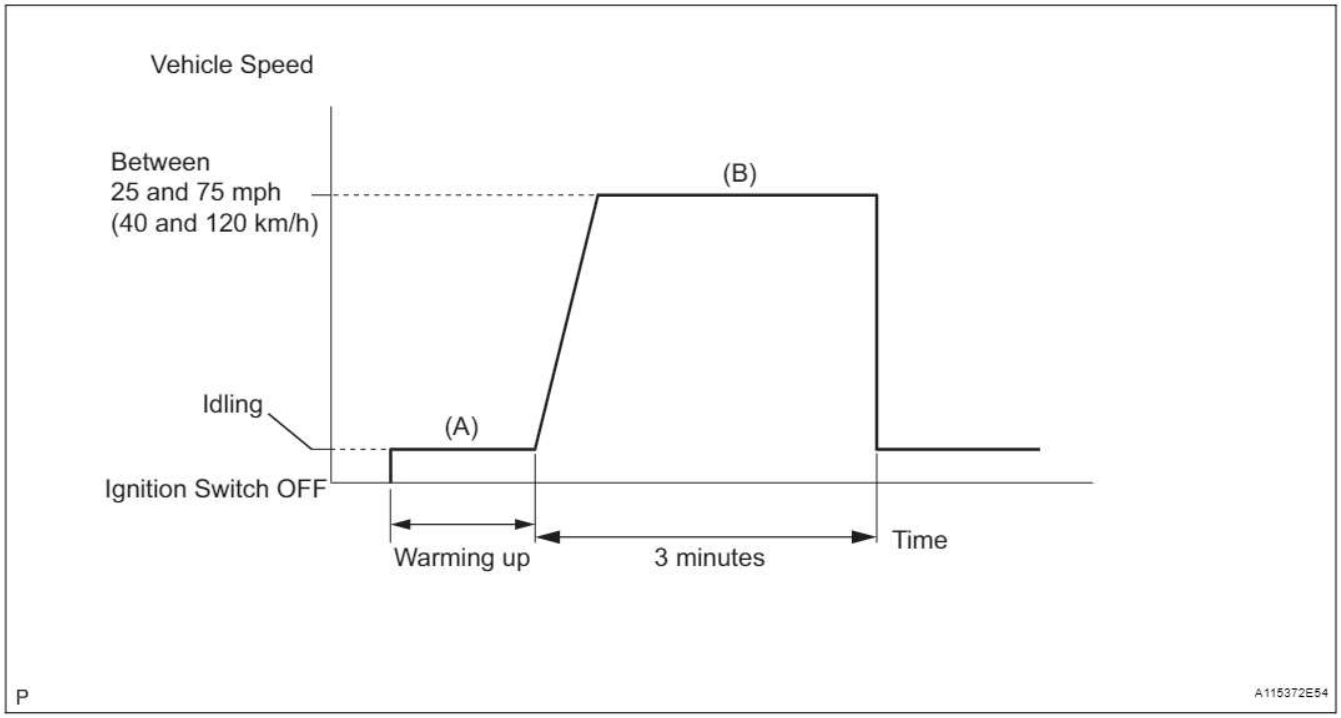

1. Connect the intelligent tester to the DLC3.

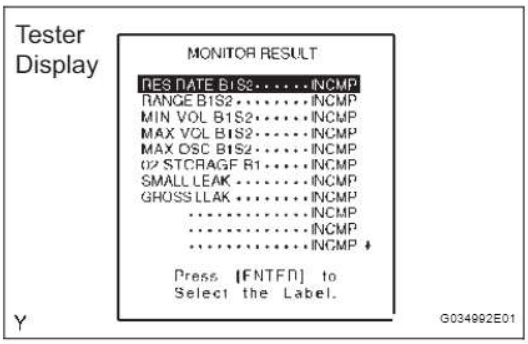

2. Turn the ignition switch to the ON position.
3. Turn the tester on.
4. Clear the DTCs (if set) (See page ES-38).
5. Select the following menu items: DIAGNOSIS / ENHANCED OBD II / MONITOR INFO / MONITOR RESULT.
6. Check that RES RATE B1S1 is INCOMP.
7. Start the engine and warm it up. (Proceed "A")
8. Drive the vehicle at a constant speed of between 25 mph and 75 mph (40 km/h and 120 km/h) for 3 minutes. (Proceed "B")
9. Check the monitor result values on the intelligent tester by selecting the following menu items: DIAGNOSIS / ENHANCED OBD II / MONITOR INFO / TEST RESULT.
10. If the values indicated on the tester do not change, perform READINESS MONITOR DRIVE PATTERN for the A/F sensor and the heated oxygen sensor (See page ES-23).
    HINT:
    Completion of all A/F sensor monitors is required to change the value in TEST RESULT.
11. Note the value of the Monitor Result.
12. Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES.
13. Check if any DTCs (any pending DTCs) are set.

MONITOR STRATEGY

Related DTCs	P2A00: Air-Fuel Ratio (A/F) sensor slow response
Required Sensors/Components (Main)	A/F sensor
Required Sensors/Components (Related)	Vehicle speed sensor, Crankshaft position sensor
Frequency of Operation	Once per driving cycle
Duration	10 to 15 seconds
MIL Operation	2 driving cycles
Sequence of Operation	None

TYPICAL ENABLING CONDITIONS

ES

Monitor runs whenever following DTCs are not present	P0031, P0032 (A/F Sensor heater - Sensor 1) P0100 - P0103 (MAF meter) P0110 - P0113 (IAT sensor) P0115 - P0118 (ECT sensor) P0120 - P0223, P2135 (TP sensor) P0125 (Insufficient ECT for Closed Loop) P0171, P0172 (Fuel system) P0300 - P0304 (Misfire) P0335 (CKP sensor) P0340 (CMP sensor) P00441 - P0456, P2401 - P2420 (EVAP system) P0500 (VSS) P2196 (A/F Sensor - rationality)
Active A/F control	Performing
Active A/F control performed when the following conditions are met	-
Engine coolant temperature	75°C (167°F) or more
Battery voltage	11 V or more
Idle	OFF
Engine RPM	Less than 4,000 rpm
A/F sensor status	Activated
Fuel-cut	OFF
Engine load	10 to 70 %
Shift position	2 or more
Catalyst monitor	Not yet
Intake air amount	4 to 16 g/sec.


TYPICAL MALFUNCTION THRESHOLDS

Response rate deterioration level	Less than 0.12 V

MONITOR RESULT

Refer to CHECKING MONITOR STATUS (See page ES-20).

WIRING DIAGRAM

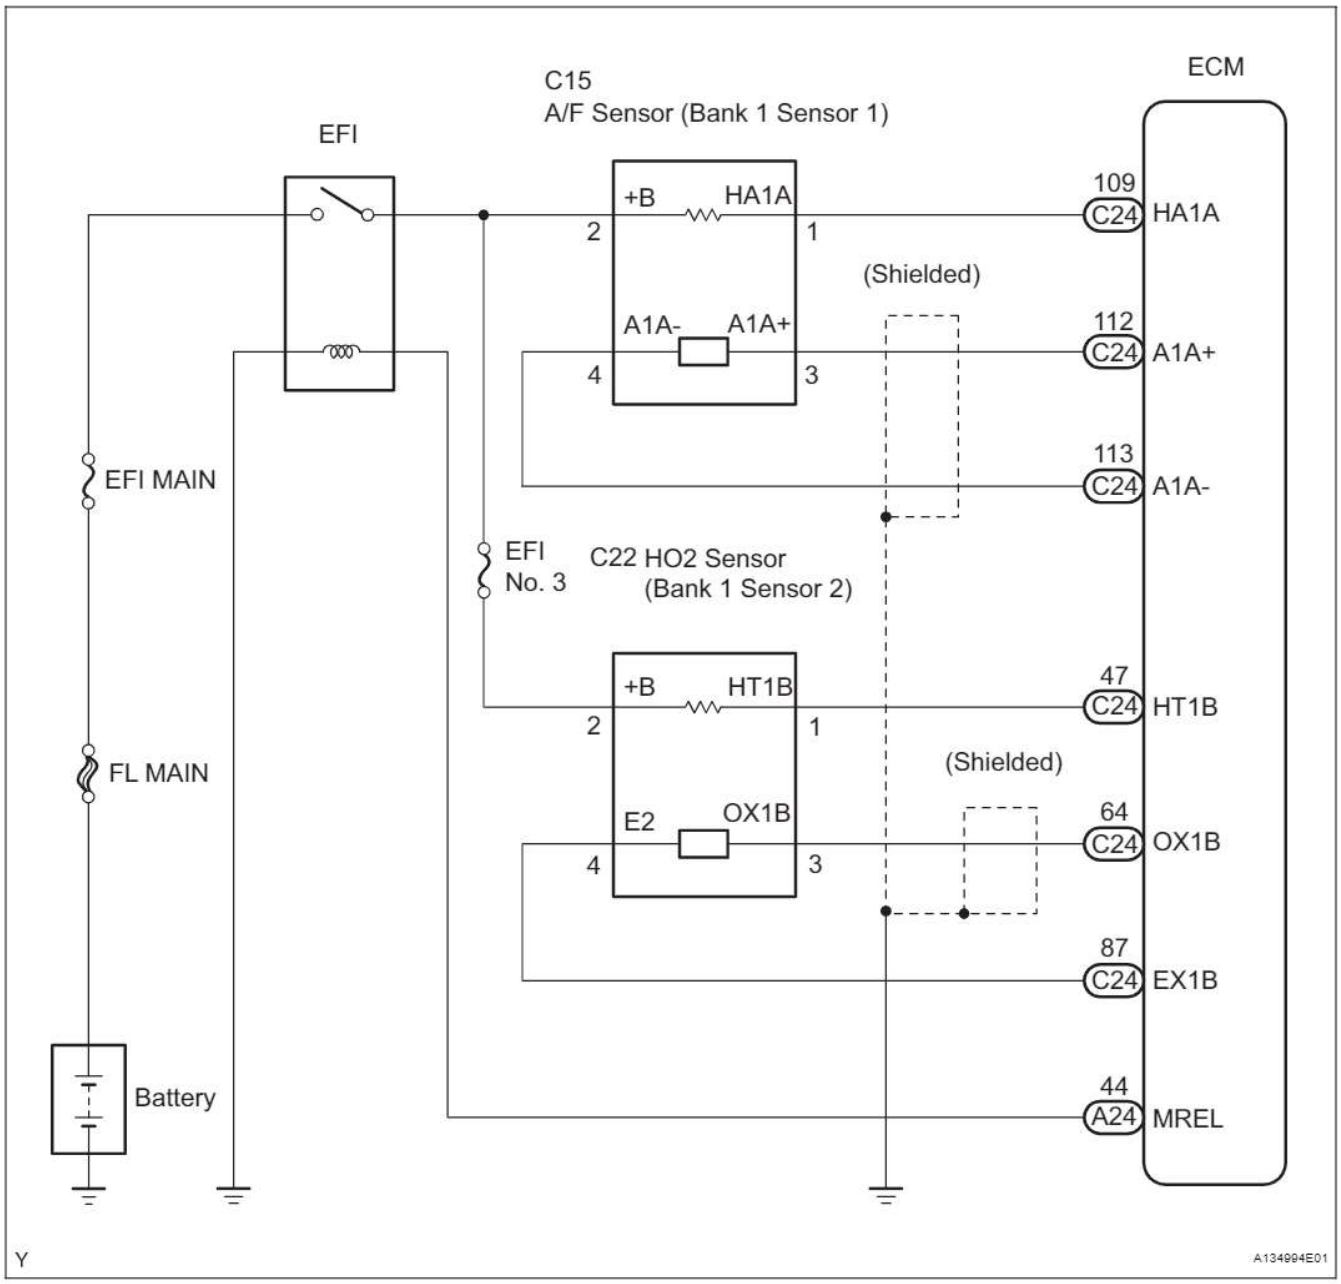

INSPECTION PROCEDURE

HINT:

Intelligent tester only:

Malfunctioning areas can be identified by performing the A/F CONTROL function provided in the ACTIVE TEST. The A/F CONTROL function can help to determine whether the Air-Fuel Ratio (A/F) sensor, Heated Oxygen (HO2) sensor and other potential trouble areas are malfunctioning.

The following instructions describe how to conduct the A/F CONTROL operation using the intelligent tester.

1. Connect the intelligent tester to the DLC3.
2. Start the engine and turn the tester on.
3. Warm up the engine at an engine speed of 2,500 rpm for approximately 90 seconds.
4. On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / A/F CONTROL.





5. Perform the A/F CONTROL operation with the engine idling (press the RIGHT or LEFT button to change the fuel injection volume).
6. Monitor the voltage outputs of the A/F and HO2 sensors (AFS B1 S1 and O2S B1 S2) displayed on the tester.
   HINT:
   - The A/F CONTROL operation lowers the fuel injection volume by 12.5% or increases the injection volume by 25 %.
   - The sensors react in accordance with increases and decreases in the fuel injection volume.

Standard

Tester Display (Sensor)	Injection Volumes	Status	Voltages
AFS B1 S1 (A/F)	+25%	Rich	Less than 3.0
	-12.5%	Lean	More than 3.35
O2S B1 S2 (HO2)	+25%	Rich	More than 0.5
	-12.5%	Lean	Less than 0.4

ES

NOTICE:
The A/F sensor has an output delay of a few seconds and the HO2 sensor has a maximum output delay of approximately 20 seconds.

Case	A/F Sensor (Sensor 1) Output Voltage		HO2 Sensor (Sensor 2) Output Voltage		Main Suspected Trouble Areas
1	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		-
	Output Voltage More than 3.35 V Less than 3.0 V		Output Voltage More than 0.5 V Less than 0.4 V		
2	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• A/F sensor • A/F sensor heater • A/F sensor circuit
	Output Voltage Almost no reaction		Output Voltage More than 0.5 V Less than 0.4 V		
3	Injection Volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• HO2 sensor • HO2 sensor heater • HO2 sensor circuit
	Output Voltage More than 3.35 V Less than 3.0 V		Output Voltage Almost no reaction		
4	Injection volume +25 % -12.5 %		Injection Volume +25 % -12.5 %		• Injector • Fuel pressure • Gas leakage from exhaust system (Air-fuel ratio extremely lean or rich)
	Output Voltage Almost no reaction		Output voltage Almost no reaction		

Following the A/F CONTROL procedure enables technicians to check and graph the voltage outputs of both the A/F and HO2 sensors.
To display the graph, select the following menu items on the tester: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / A/F CONTROL / USER DATA / AFS B1 S1 and O2S B1 S2; and press the YES button and then the ENTER button followed by the F4 button.
HINT:
- DTC P2A00 may be set when the air-fuel ratio is stuck rich or lean.

- A low A/F sensor voltage could be caused by a rich air-fuel mixture. Check for conditions that would cause the engine to run rich.
- A high A/F sensor voltage could be caused by a lean air-fuel mixture. Check for conditions that would cause the engine to run lean.
- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1 CHECK ANY OTHER DTCS OUTPUT (IN ADDITION TO DTC P2A00)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Turn the tester ON.
(d) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(e) Read the DTCs.

Result

Display (DTC Output)	Proceed to
P2A00	A
P2A00 and other DTCs	B

If any DTCs relating to the A/F sensor (DTCs for the A/F sensor heater or A/F sensor admittance) are output, troubleshoot those DTCs first.

B → GO TO DTC CHART

A

2 INSPECT AIR-FUEL RATIO SENSOR (HEATER RESISTANCE) (See page ES-84)

NG → REPLACE AIR-FUEL RATIO SENSOR

OK

3 CHECK HARNESS AND CONNECTOR (A/F SENSOR - ECM) (See page ES-325)

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

4 PERFORM CONFIRMATION DRIVING PATTERN

NEXT

5 CHECK WHETHER DTC OUTPUT RECURS (DTC P2A00)

(a) Connect the intelligent tester to the DLC3.

(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES.
(d) Read pending DTCs.

Result

Display (DTC Output)	Proceed to
P2A00	A
No output	B

B → CHECK FOR INTERMITTENT PROBLEMS

A

6	REPLACE AIR-FUEL RATIO SENSOR

NEXT

7	PERFORM CONFIRMATION DRIVING PATTERN

NEXT

8	CHECK WHETHER DTC OUTPUT RECURS (DTC P2A00)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES.
(d) Read pending DTCs.

Result

Display (DTC Output)	Proceed to
No output	A
P2A00	B


B → REPLACE ECM


A

END

ACCELERATOR PEDAL ROD

COMPONENTS

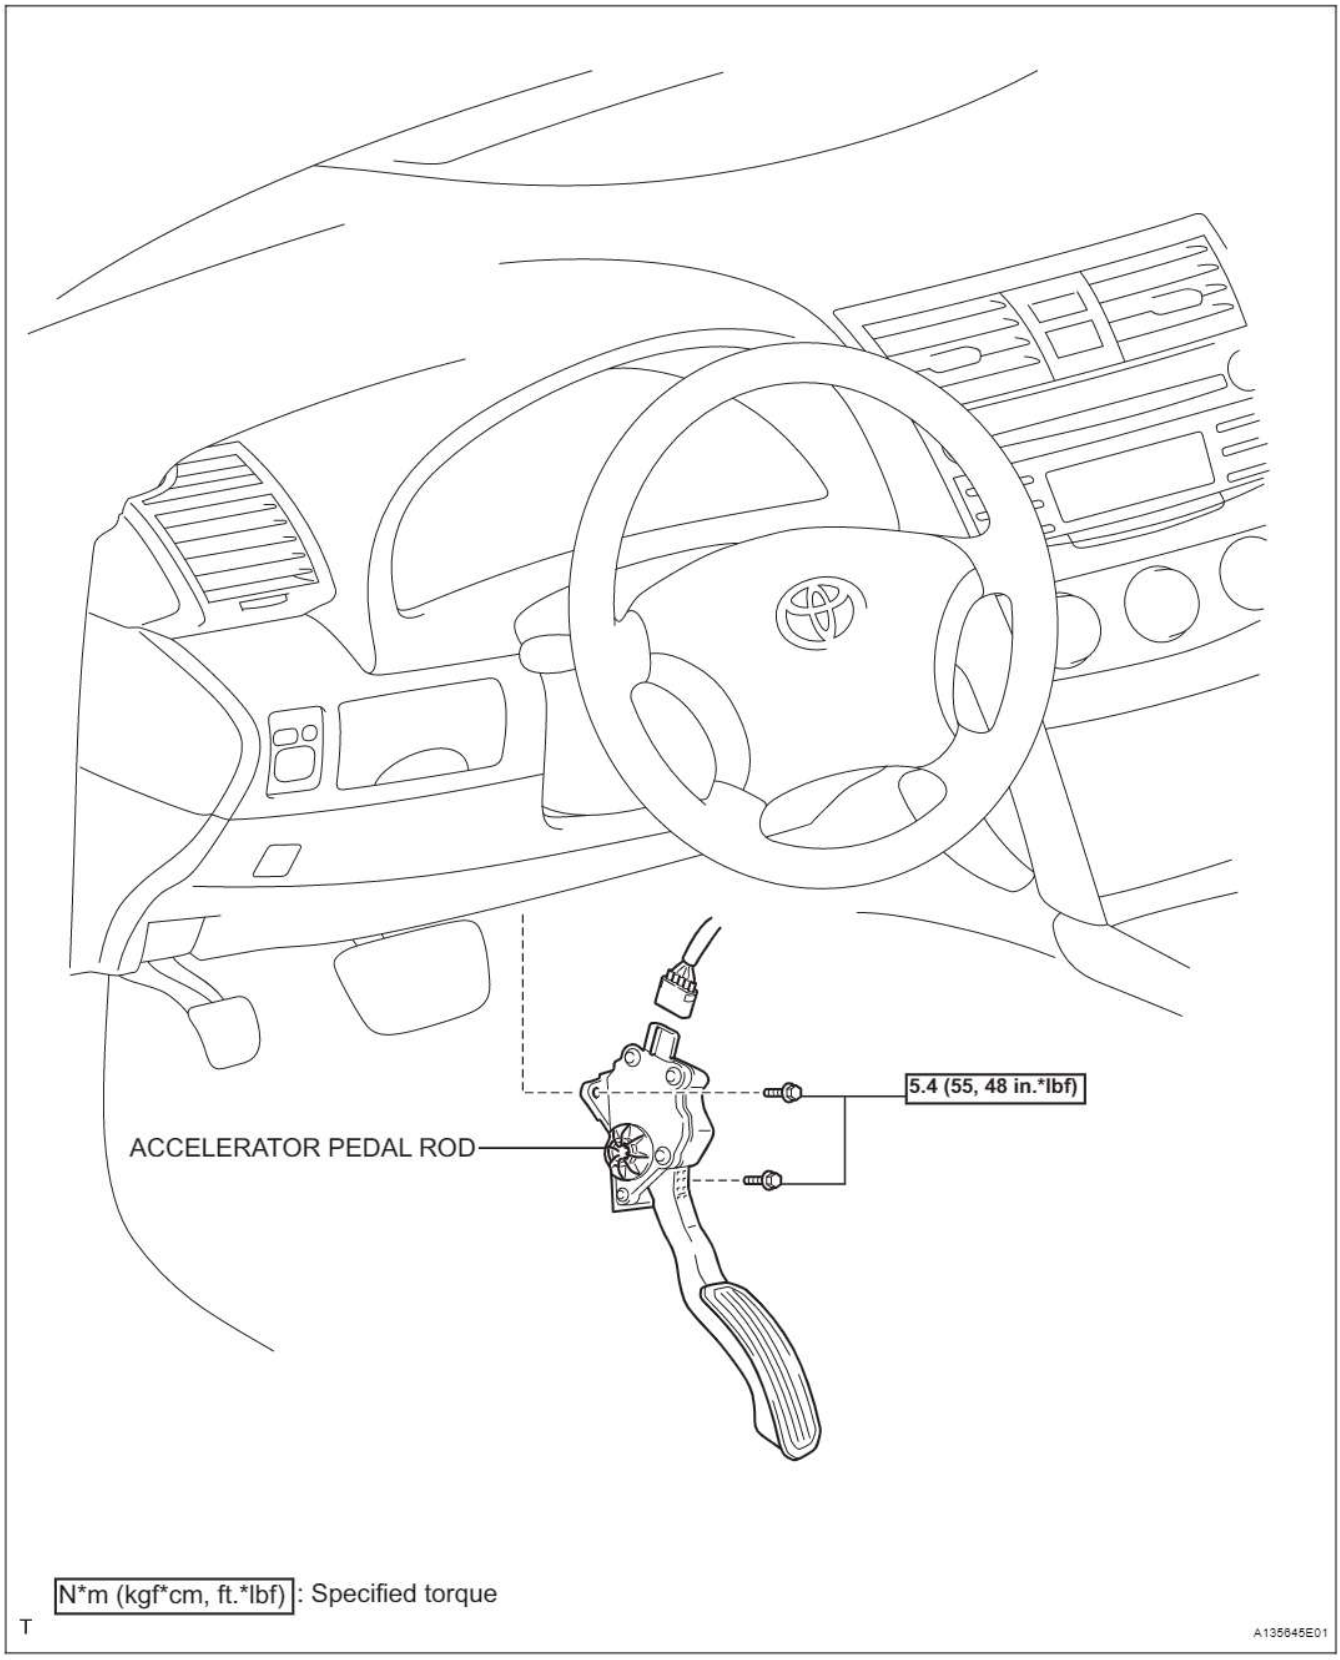

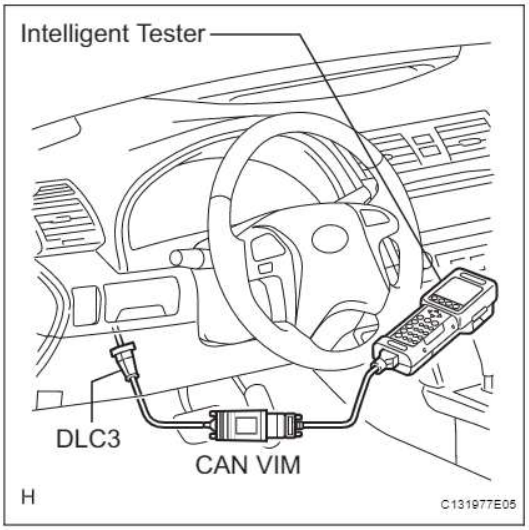

ON-VEHICLE INSPECTION

1. CHECK ACCELERATOR PEDAL ROD

(a) Measure the voltage.

(1) Connect the intelligent tester to the DLC3.

(2) Turn the ignition switch to the ON position.

(3) Turn the intelligent tester ON.

(4) Select the menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / ALL / ACCEL POS #1, ACCEL POS #2.

(5) Operate the accelerator pedal, and then check that the ACCEL POS #1 and ACCEL POS #2 values are within the specifications.


Standard voltage (ACCEL POS #1)

Accelerator Pedal Condition	Specified Condition
Released	0.5 to 1.1 V
Depressed	2.5 to 4.5 V

Standard voltage (ACCEL POS #2)

Accelerator Pedal Condition	Specified Condition
Released	1.2 to 2.0 V
Depressed	3.4 to 5.0 V

If the result is not as specified, check the accelerator pedal rod, wire harness or ECM.

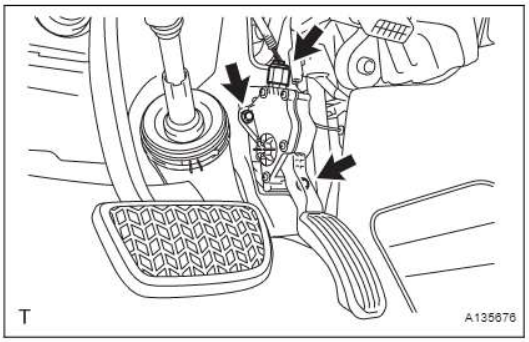

REMOVAL


1. REMOVE ACCELERATOR PEDAL ROD

(a) Disconnect the accelerator pedal position sensor connector.

(b) Remove the 2 bolts and accelerator pedal rod.

INSTALLATION


1. **INSTALL ACCELERATOR PEDAL ROD**
   NOTICE:
   - **Avoid physical shock to the accelerator pedal assembly.**
   - **Do not disassemble the accelerator pedal assembly.**

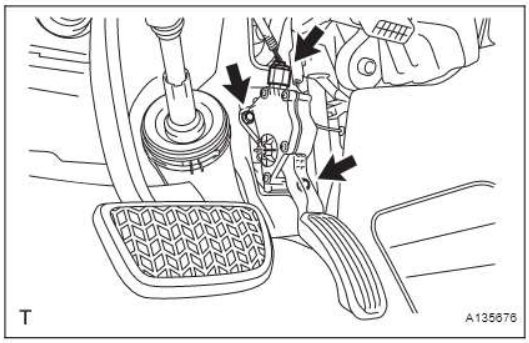


(a) Install the accelerator pedal rod with the 2 bolts.
Torque: 5.4 N*m (55 kgf*cm, 48 in.*lbf)

(b) Connect the accelerator pedal position sensor connector.

ES

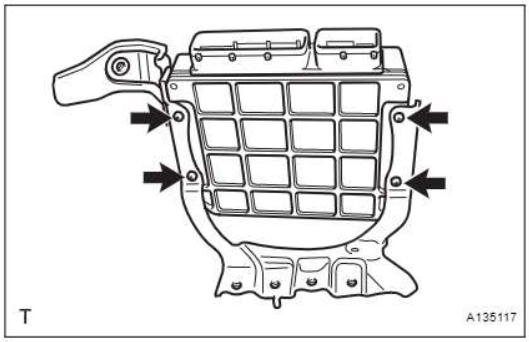


(c) Remove the 4 screws and ECM bracket.

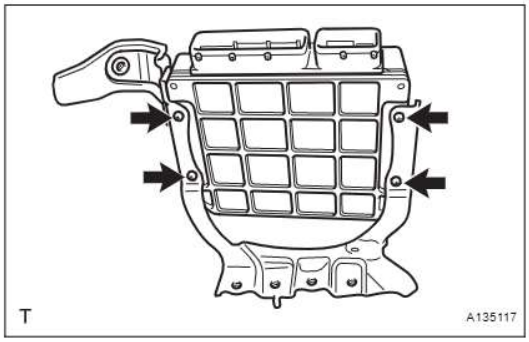


INSTALLATION

1. **INSTALL ECM**
   (a) Install the bracket to the ECM with the 4 screws.
   Torque: 3.0 N*m (30 kgf*cm, 27 in.*lbf)

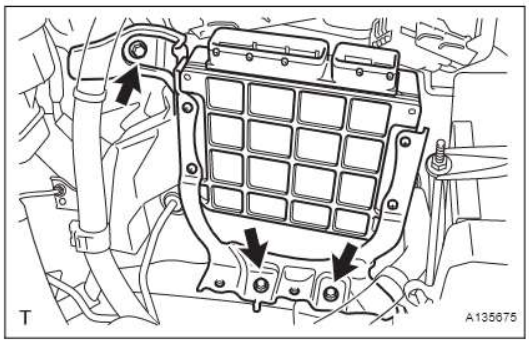

(b) Install the ECM with the 3 bolts.
Torque: 8.0 N*m (82 kgf*cm, 71 in.*lbf)

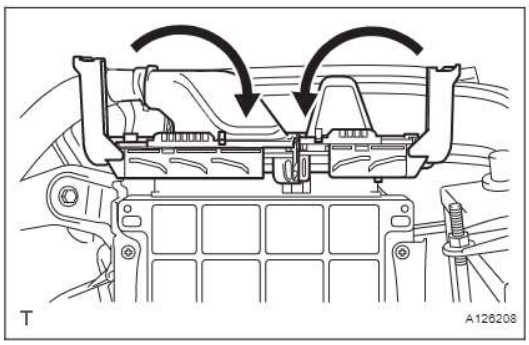

2. **CONNECT CONNECTOR**
   (a) Connect the 2 ECM connectors.
   NOTICE:
   When connecting the connector, make sure that dirt, water and other foreign matter does not become stuck between the connector and other part.
   (1) Connect the 2 ECM connectors and lower the 2 levers.
   NOTICE:
   Make sure that the 2 levers are securely lowered.

3. **INSTALL AIR CLEANER CASE SUB-ASSEMBLY (See page EM-120)**

4. **INSTALL AIR CLEANER CAP SUB-ASSEMBLY (See page ES-419)**


5. **INSTALL ENGINE COVER SUB-ASSEMBLY (See page EM-121)**

6. RESET MEMORY

(a) When replacing the ECM, perform the RESET MEMORY procedure (A/T initialization) (See page AX-16).

ECM


COMPONENTS

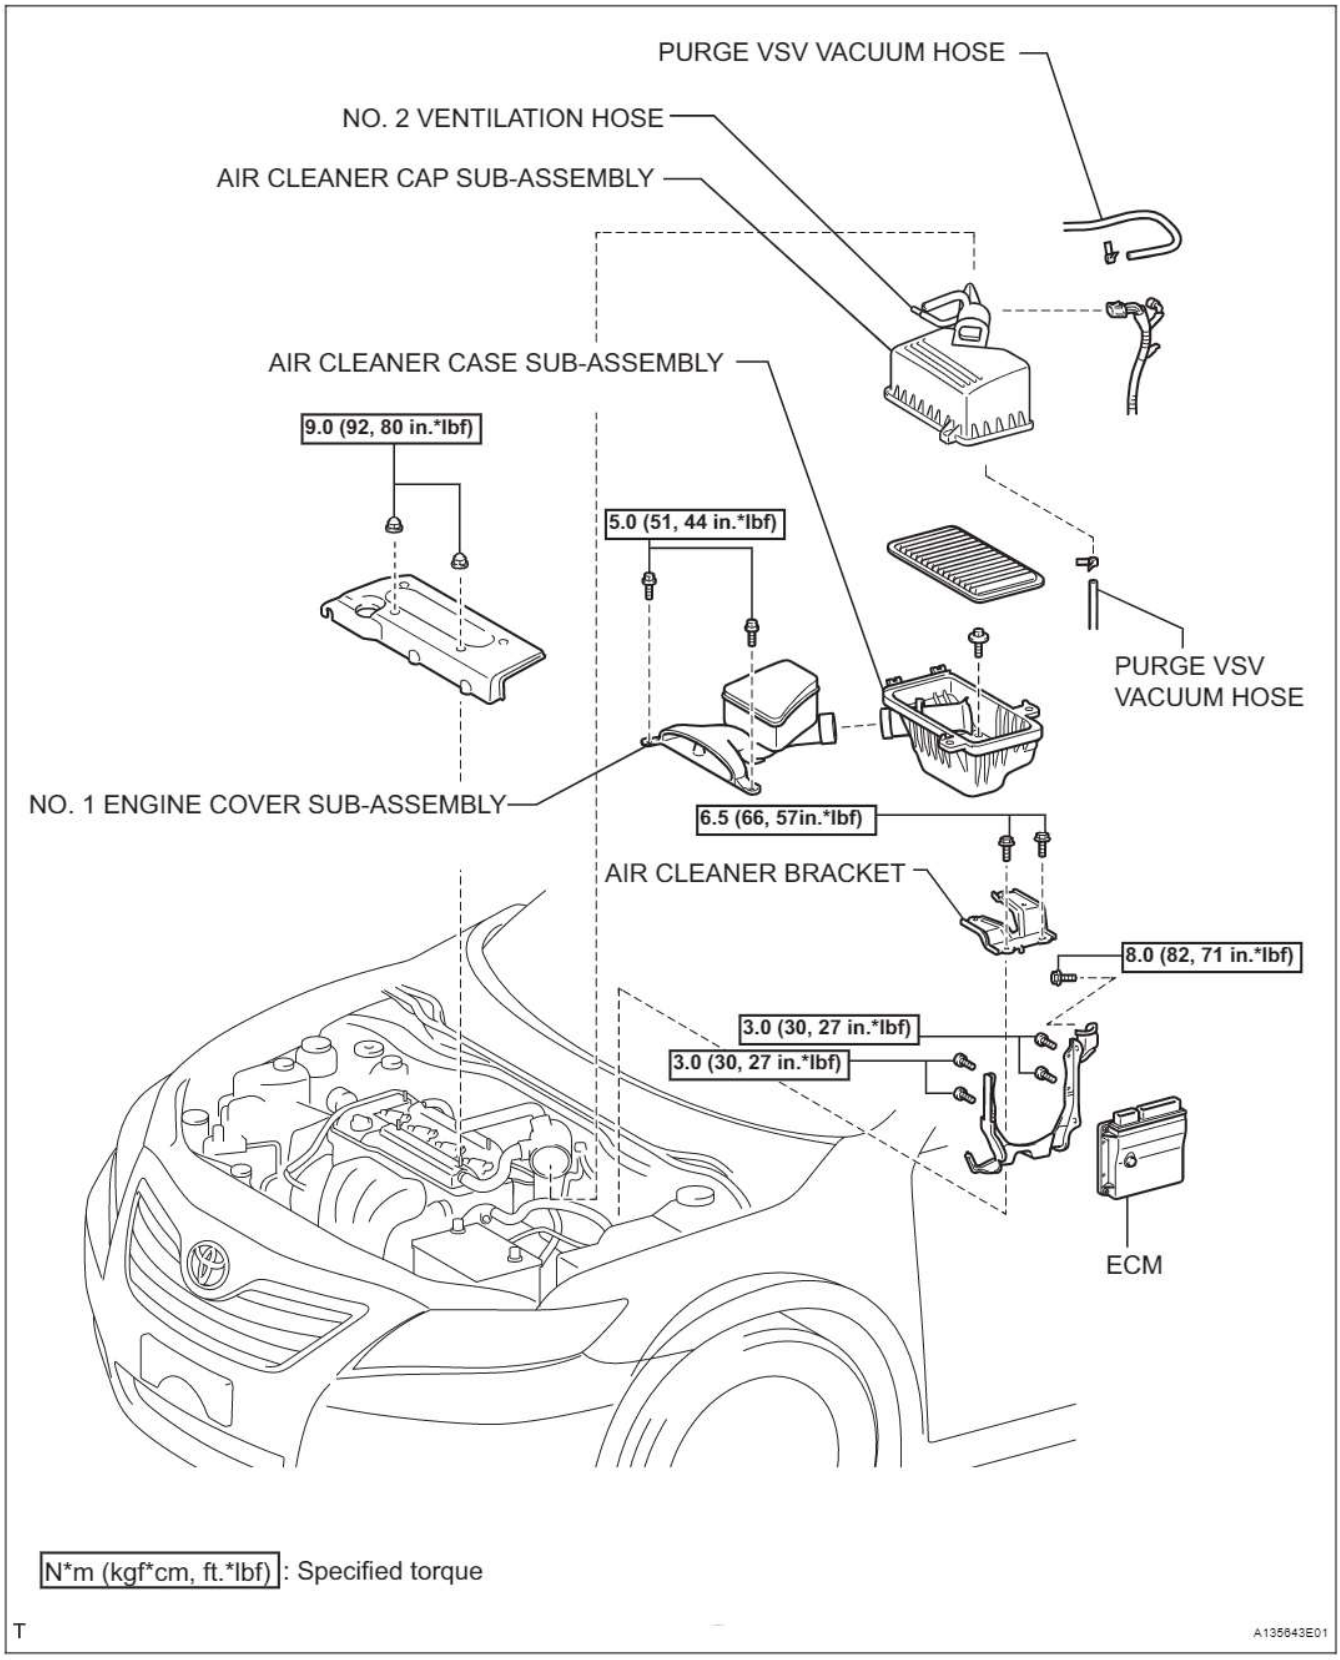


ES

REMOVAL


1. **DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL**
2. **REMOVE NO. 1 ENGINE COVER SUB-ASSEMBLY (See page EM-94)**
3. **REMOVE AIR CLEANER INLET ASSEMBLY (See page EM-94)**
4. **REMOVE AIR CLEANER CAP SUB-ASSEMBLY (See page ES-416)**
5. **REMOVE AIR CLEANER CASE SUB-ASSEMBLY (See page EM-95)**
6. **REMOVE AIR CLEANER BRACKET**
   (a) Remove the 2 bolts and air cleaner bracket.

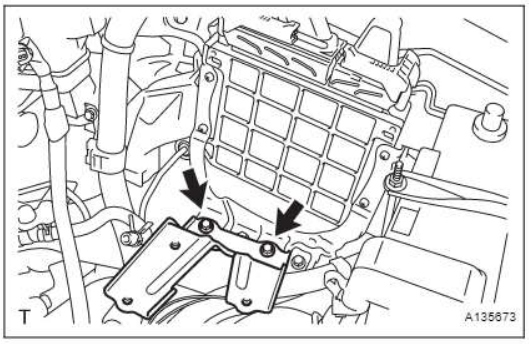


7. **DISCONNECT ECM CONNECTOR**
   (a) Disconnect the 2 ECM connectors.
      (1) Raise the levers while pushing the locks on the levers, and disconnect the 2 ECM connectors.
      NOTICE:
      After disconnecting the connector, make sure that dirt, water and other foreign matter does not contact the connecting part of the connector.

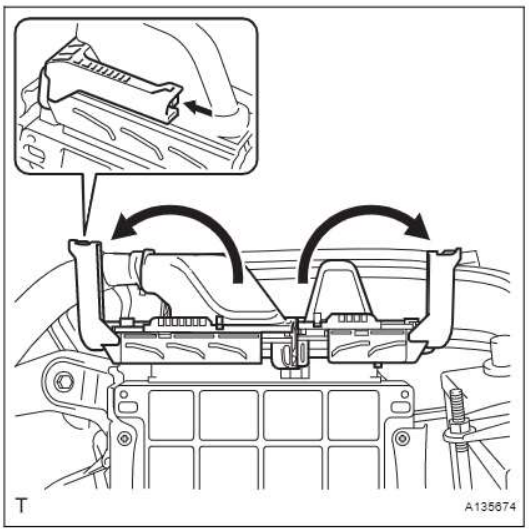

8. **REMOVE ECM**
   (a) Remove the 3 bolts of the ECM with bracket.
   (b) Remove the ECM with bracket.

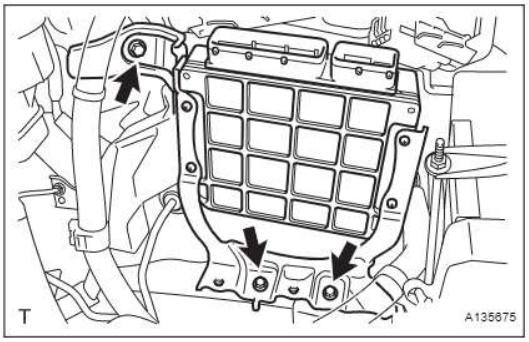

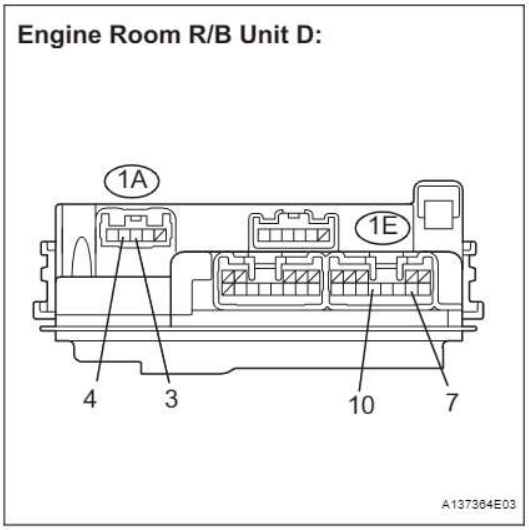

AIR FUEL RATIO SENSOR RELAY

INSPECTION

1. INSPECT AIR FUEL RATIO SENSOR RELAY


(a) Using an ohmmeter, measure the resistance according to the value(s) in the table below.

Standard resistance

Tester connection	Specified Condition
1E-7 - 1E-10	Below 1 Ω
1A-3 - 1A-4	10 kΩ or higher
1A-3 - 1A-4	Below 1 Ω (Battery voltage applied between terminals 1E-7 and 1E-10)

ES

Engine Room R/B Unit D:

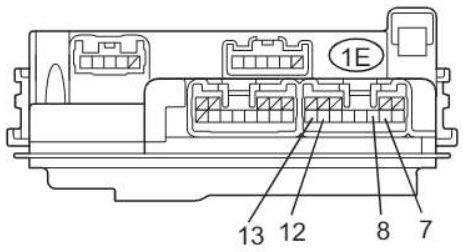

A137364E02

CIRCUIT OPENING RELAY

INSPECTION

1. INSPECT CIRCUIT OPENING RELAY


(a) Using an ohmmeter, measure the resistance according to the value(s) in the table below.

Standard resistance

Tester connection	Specified Condition
1E-8 - 1E-12	Below 1 Ω
1E-7 - 1E-13	10 kΩ or higher
1E-7 - 1E-13	Below 1 Ω (Battery voltage applied between terminals 1E-8 and 1E-12)

ES

Engine Room R/B Unit D:

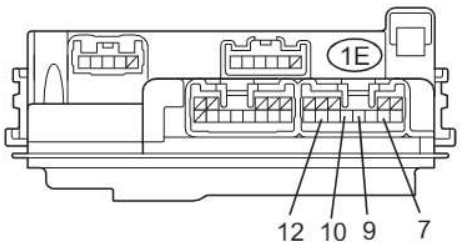

A137364E01

EFI RELAY

INSPECTION

1. INSPECT EFI RELAY

(a) Using an ohmmeter, measure the resistance according to the value(s) in the table below.


Standard resistance

Tester connection	Specified Condition
1E-9 - 1E-10	Below 1 Ω
1E-7 - 1E-12	10 kΩ or higher
1E-7 - 1E-12	Below 1 Ω (Battery voltage applied between terminals 1E-9 and 1E-10)


ES


REMOVAL

1. DISCHARGE FUEL SYSTEM PRESSURE (See page FU-12)
2. DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL
3. REMOVE NO. 1 ENGINE COVER (See page EM-94)
4. DRAIN COOLANT (See page CO-5)
5. REMOVE WINDSHIELD WIPER ARM AND BLADE ASSEMBLY LH (See page WW-9)
6. REMOVE WINDSHIELD WIPER ARM AND BLADE ASSEMBLY RH (See page WW-9)
7. REMOVE FRONT FENDER TO COWL SIDE SEAL LH (See page WW-9)
8. REMOVE FRONT FENDER TO COWL SIDE SEAL RH (See page WW-9)
9. REMOVE COWL TOP VENTILATOR LOUVER SUB-ASSEMBLY (See page WW-10)
10. REMOVE WINDSHIELD WIPER MOTOR AND LINK (See page WW-10)

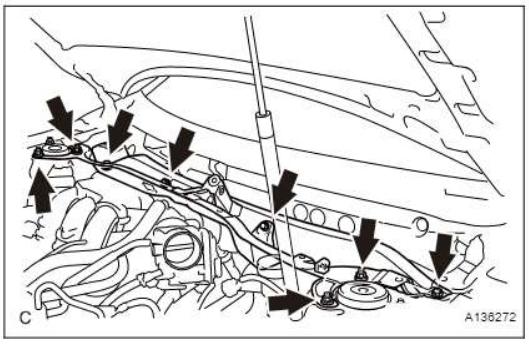


11. REMOVE COWL TOP PANEL OUTER SUB-ASSEMBLY
    (a) Remove the 4 bolts, 4 nuts and cowl top panel outer sub-assembly.
12. REMOVE AIR CLEANER CAP SUB-ASSEMBLY (See page ES-502)
13. REMOVE AIR CLEANER CASE SUB-ASSEMBLY (See page EM-95)
14. REMOVE THROTTLE BODY (See page ES-417)
15. DISCONNECT FUEL TUBE (See page FU-12)
16. REMOVE FUEL DELIVERY PIPE WITH INJECTOR (See page FU-13)
17. REMOVE INTAKE MANIFOLD
    (a) Disconnect the union to check valve hose from the brake booster.
    (b) Disconnect the camshaft timing oil control valve connector.
    (c) Remove the wire harness clamp.
    (d) Remove the union to check valve hose from the vacuum hose clamp.
    (e) Remove the 5 bolts, 2 nuts and intake manifold.

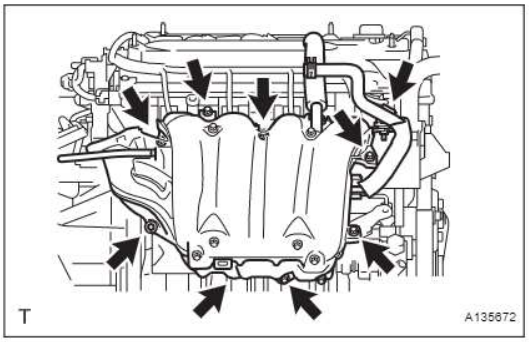

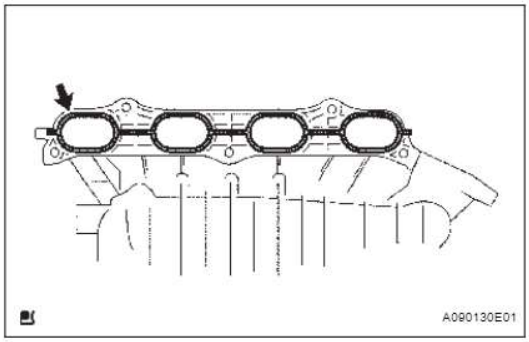

(f) Remove the gasket from the intake manifold.

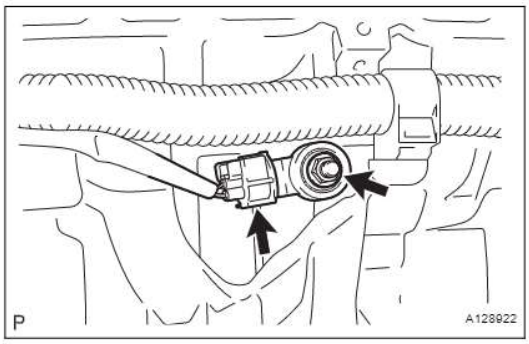


18. REMOVE KNOCK SENSOR

(a) Disconnect the knock sensor connector.

(b) Remove the nut and knock sensor.

ES

INSPECTION

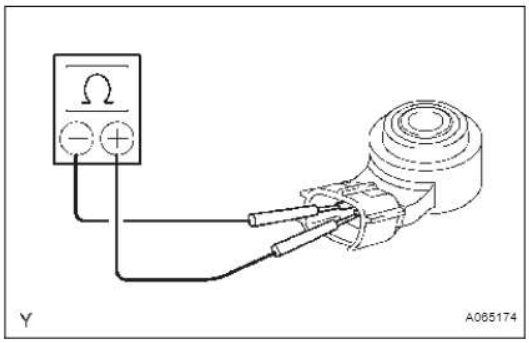

1. KNOCK CONTROL SENSOR


(a) Using an ohmmeter, measure the resistance between the terminals.

Standard resistance:

120 to 280 kΩ at 20°C (68°F)

If the resistance is not specified, replace the sensor.

INSTALLATION

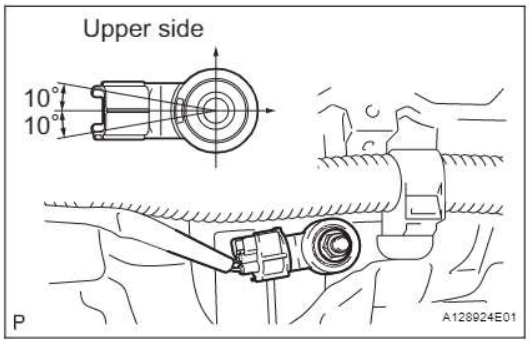

1. INSTALL KNOCK SENSOR


(a) Install the knock sensor with the nut.

Torque: 20 N*m (204 kgf*cm, 15 ft.*lbf)

NOTICE:


Make sure that the knock sensor is in the correct position.

(b) Connect the knock sensor connector.

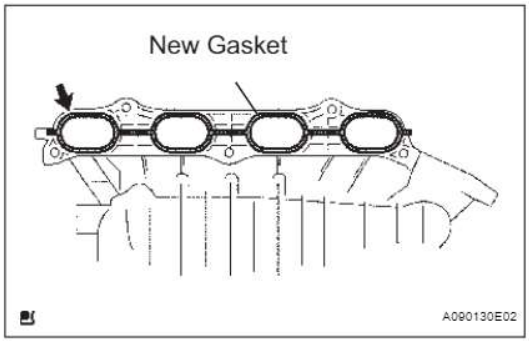


2. INSTALL INTAKE MANIFOLD

(a) Install a new gasket into the intake manifold.

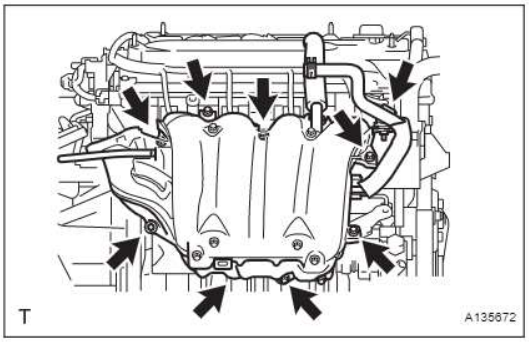

(b) Install the intake manifold with the 5 bolts and 2 nuts.
Torque: 30 N*m (306 kgf*cm, 22 ft.*lbf)
(c) Fit the union to check valve hose into the vacuum hose clamp.
(d) Install the wire harness clamp.
(e) Connect the camshaft timing oil control valve connector.
(f) Connect the union to check valve hose to the brake booster.

3. **INSTALL FUEL DELIVERY PIPE WITH INJECTOR (See page FU-15)**
4. **INSTALL FUEL TUBE (See page FU-16)**
5. **INSTALL THROTTLE BODY (See page ES-418)**
6. **INSTALL AIR CLEANER CASE SUB-ASSEMBLY (See page EM-120)**
7. **INSTALL AIR CLEANER CAP SUB-ASSEMBLY (See page ES-419)**
8. **INSTALL AIR CLEANER INLET ASSEMBLY (See page EM-120)**
9. **CONNECT CABLE TO NEGATIVE BATTERY TERMINAL (See page EM-120)**
10. **ADD ENGINE COOLANT (See page CO-5)**
11. **CHECK FOR ENGINE COOLANT LEAKS (See page CO-1)**
12. **CHECK FOR FUEL LEAKS (See page FU-9)**
13. **INSTALL NO. 1 ENGINE COVER SUB-ASSEMBLY (See page EM-121)**

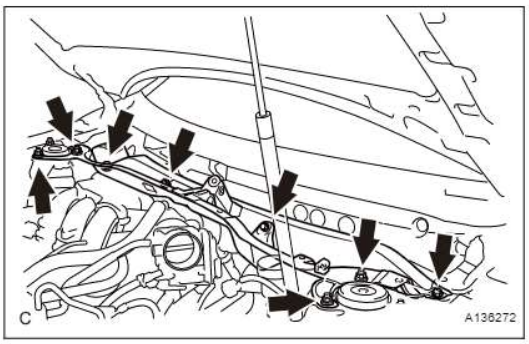



14. **INSTALL COWL TOP PANEL OUTER SUB-ASSEMBLY**
(a) Install the outer cowl top panel sub-assembly with the 4 bolts and 4 nuts.
Torque: Bolt
5.0 N*m (51 kgf*cm, 44 in.*lbf)
Nut
85 N*m (867 kgf*cm, 44 ft.*lbf)
15. **INSTALL WINDSHIELD WIPER MOTOR AND LINK (See page WW-14)**
16. **INSTALL COWL TOP VENTILATOR LOUVER SUB-ASSEMBLY (See page WW-15)**
17. **INSTALL FRONT FENDER TO COWL SIDE SEAL RH (See page WW-15)**
18. **INSTALL FRONT FENDER TO COWL SIDE SEAL LH (See page WW-15)**
19. **INSTALL WINDSHIELD WIPER ARM AND BLADE ASSEMBLY LH (See page WW-15)**


20. INSTALL WINDSHIELD WIPER ARM AND BLADE ASSEMBLY RH (See page WW-16)

KNOCK SENSOR

COMPONENTS

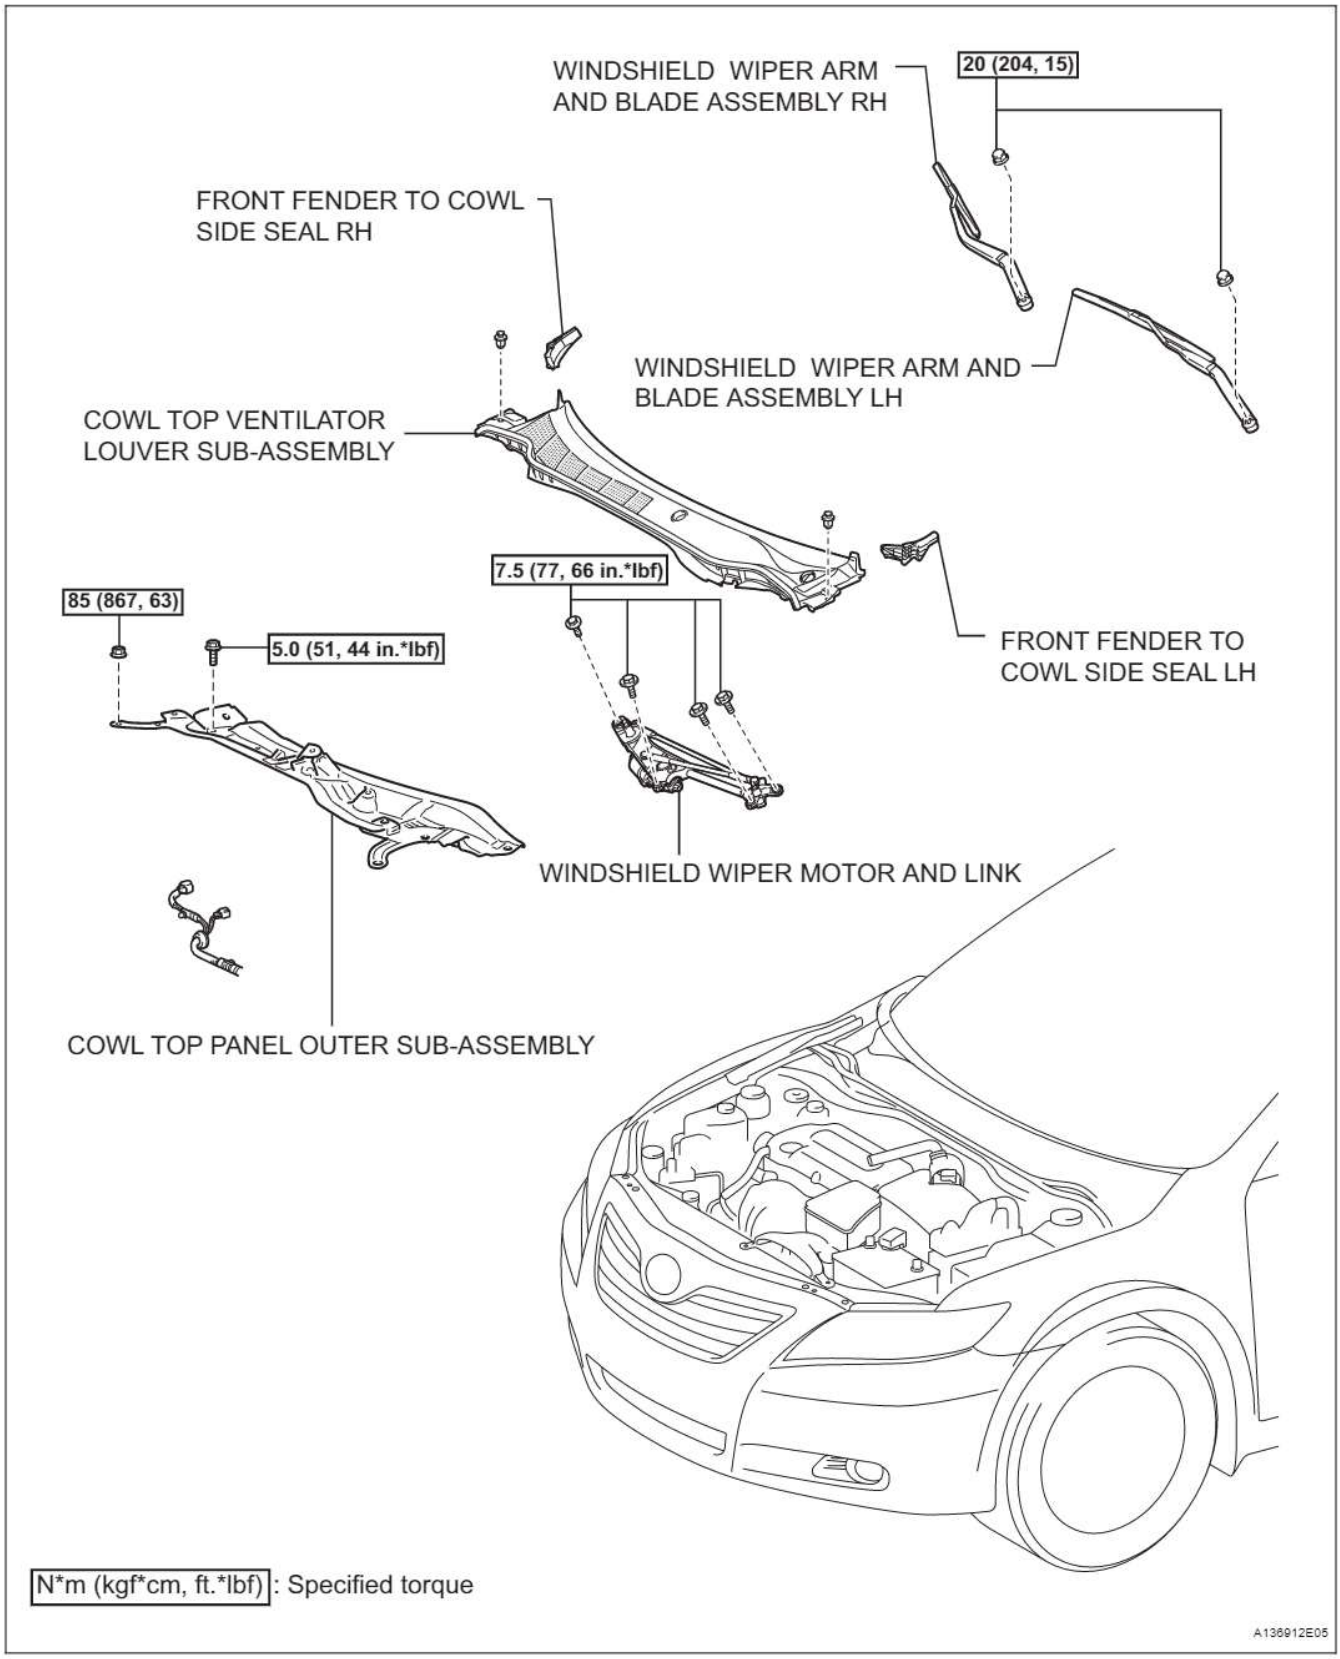


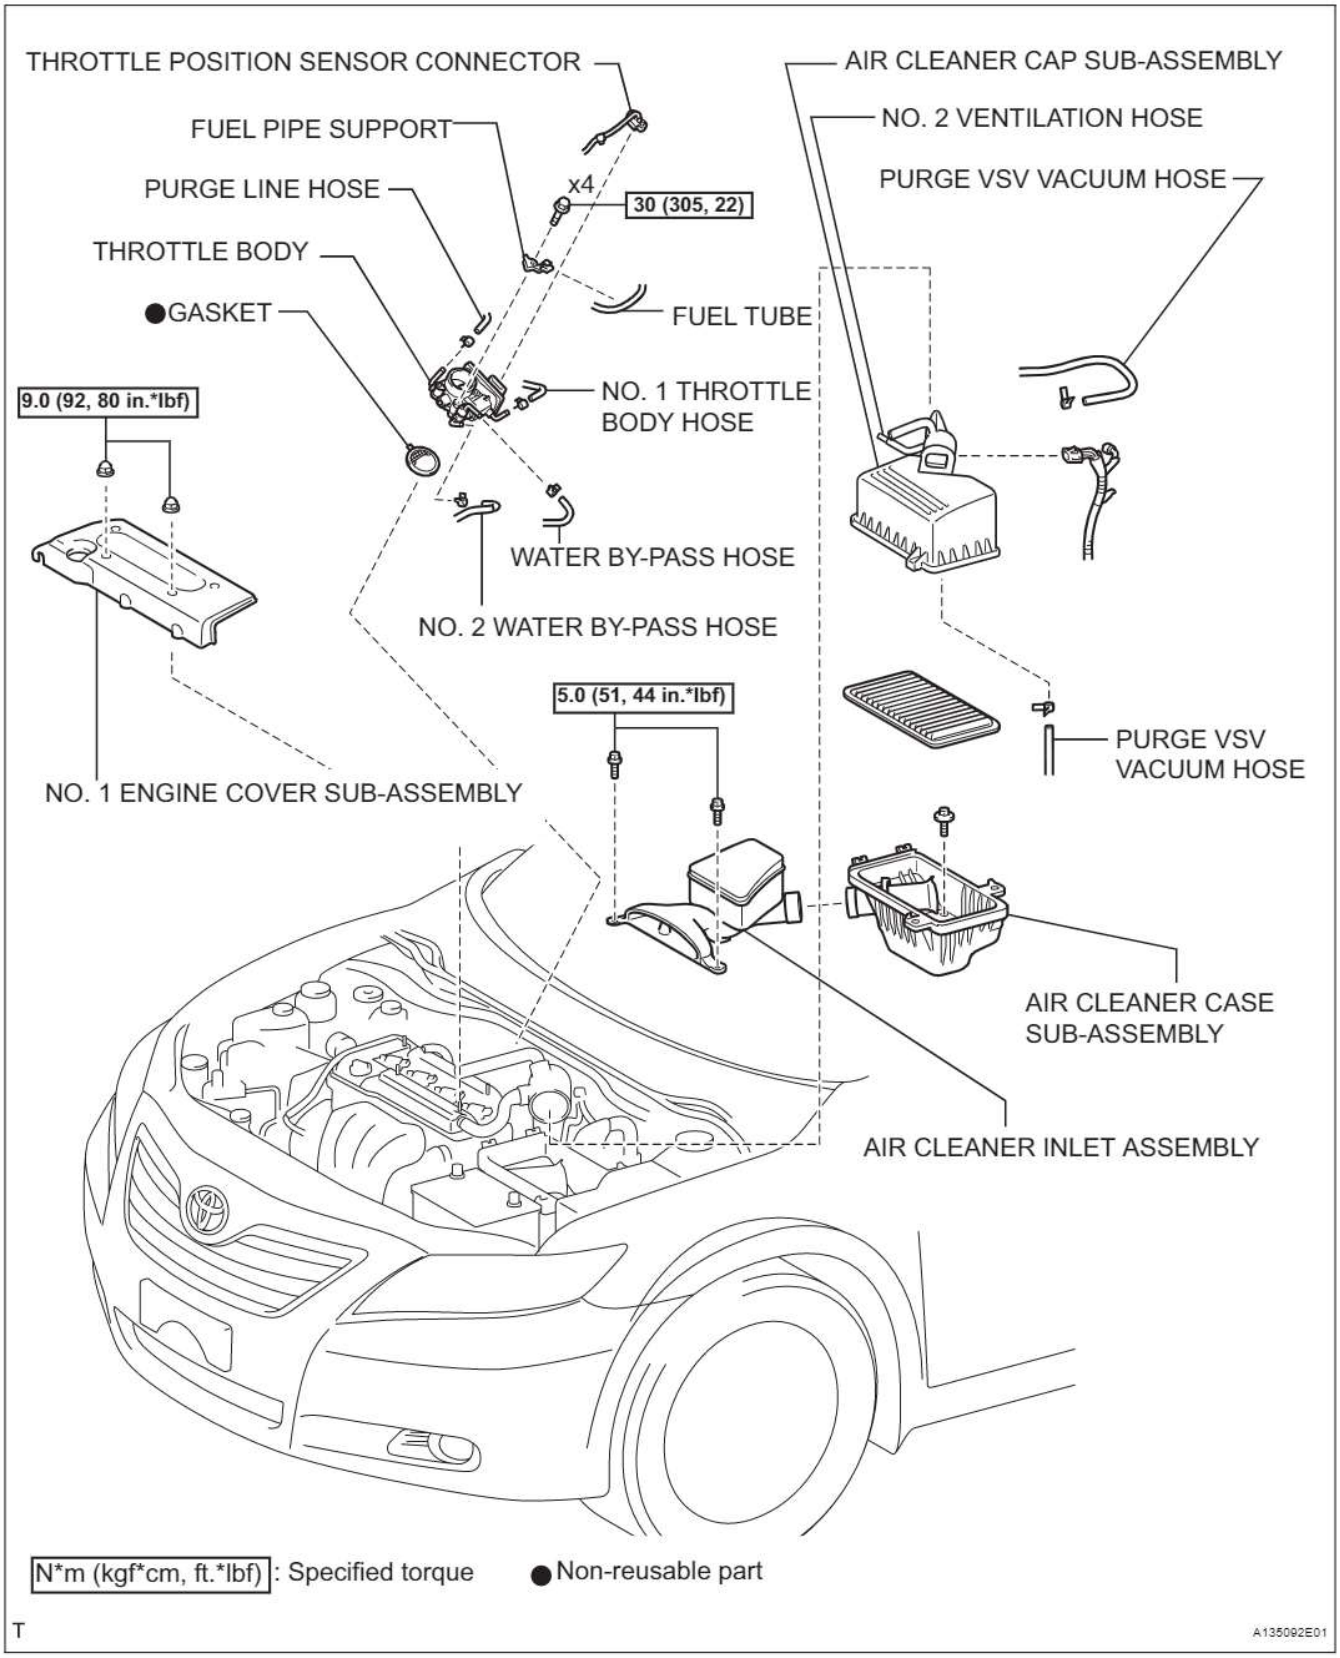
THROTTLE POSITION SENSOR CONNECTOR
FUEL PIPE SUPPORT
PURGE LINE HOSE
THROTTLE BODY
●GASKET
x4
30 (305, 22)
FUEL TUBE
NO. 1 THROTTLE BODY HOSE
9.0 (92, 80 in.*lbf)
WATER BY-PASS HOSE
NO. 2 WATER BY-PASS HOSE
NO. 1 ENGINE COVER SUB-ASSEMBLY
5.0 (51, 44 in.*lbf)
AIR CLEANER CAP SUB-ASSEMBLY
NO. 2 VENTILATION HOSE
PURGE VSV VACUUM HOSE
PURGE VSV VACUUM HOSE
AIR CLEANER CASE SUB-ASSEMBLY
AIR CLEANER INLET ASSEMBLY
N*m (kgf*cm, ft.*lbf): Specified torque
● Non-reusable part
T
A135092E01

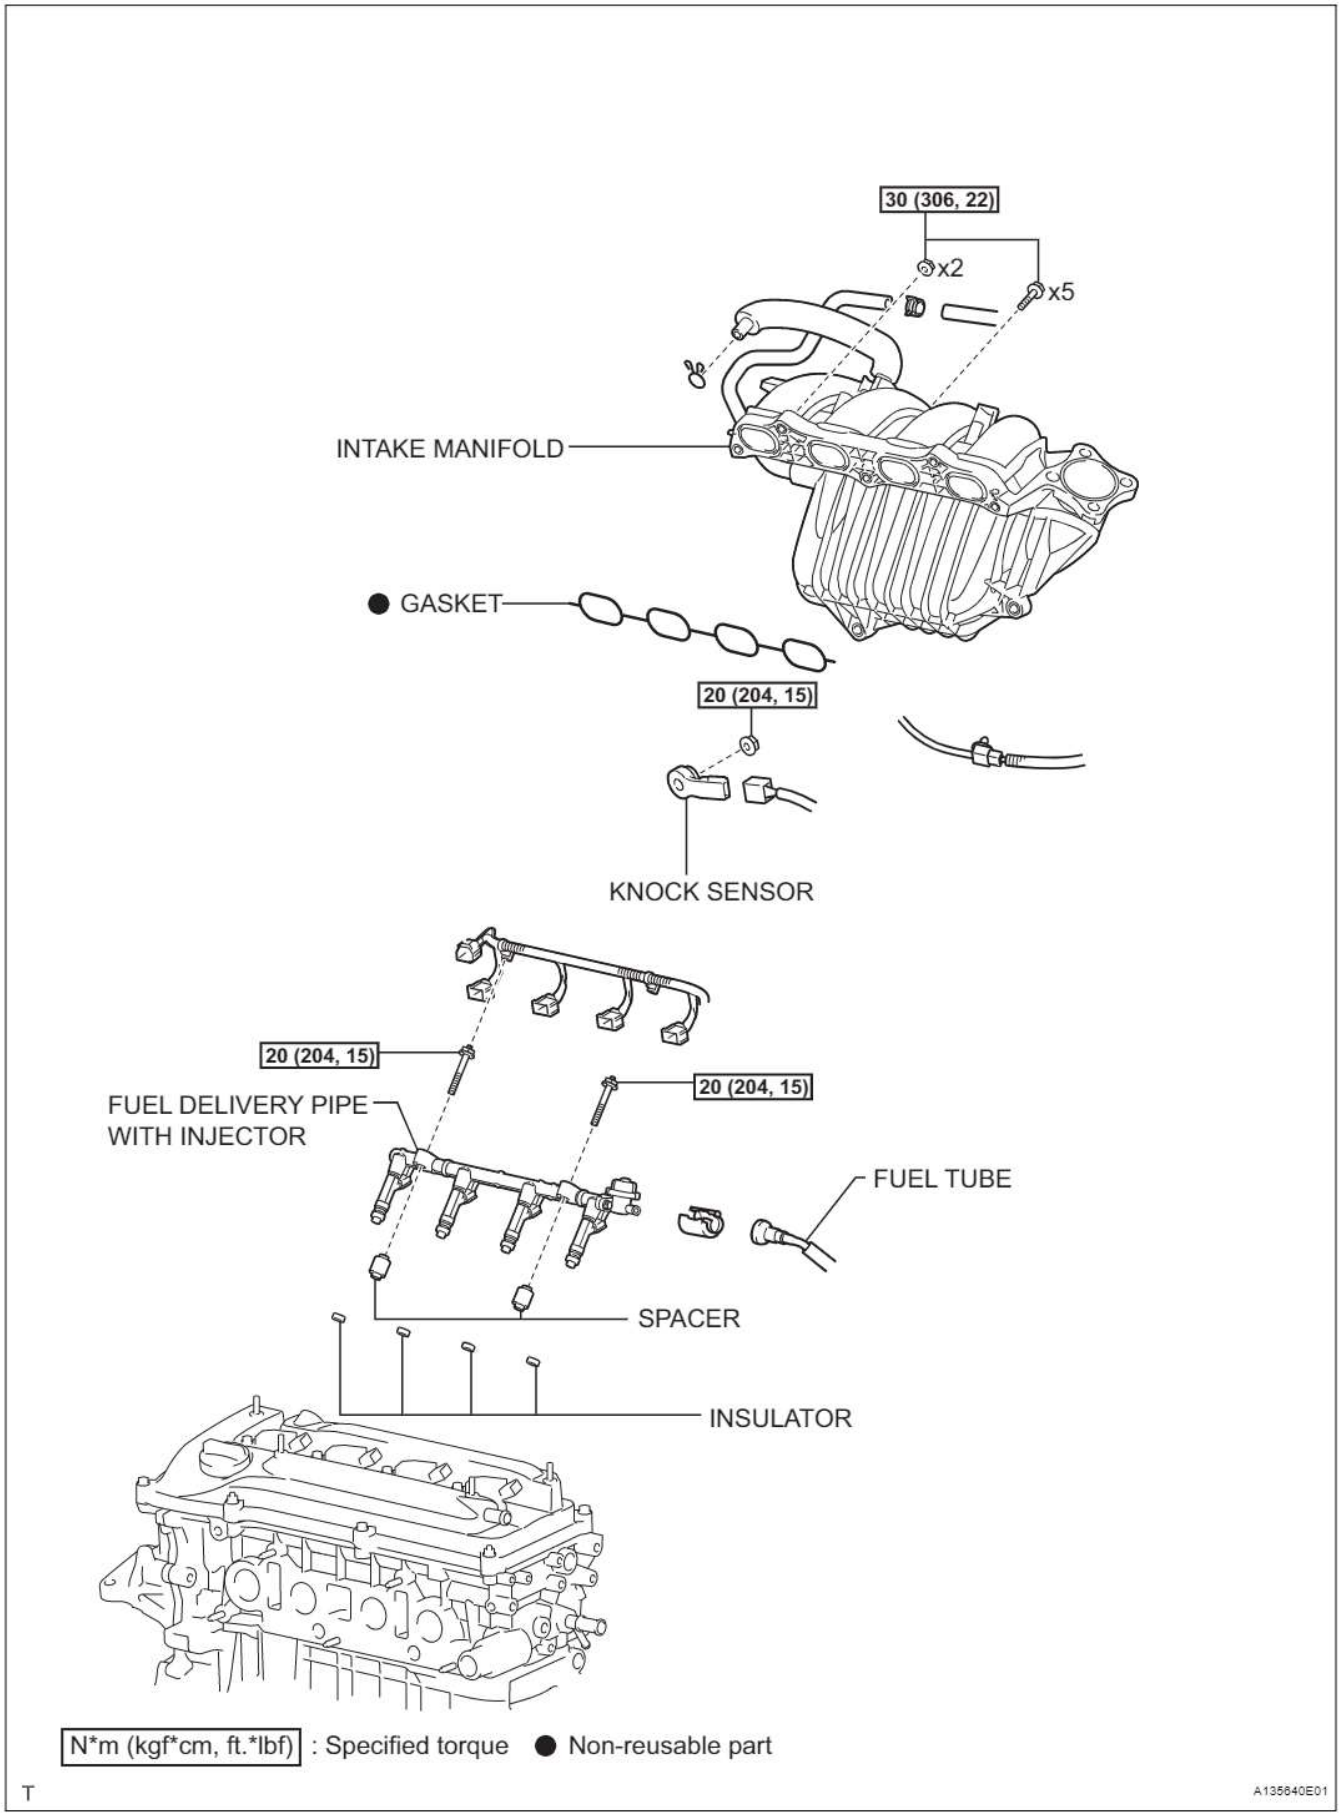

30 (306, 22)
x2
x5
INTAKE MANIFOLD
GASKET
20 (204, 15)
KNOCK SENSOR
20 (204, 15)
20 (204, 15)
FUEL DELIVERY PIPE
WITH INJECTOR
FUEL TUBE
SPACER
INSULATOR
N*m (kgf*cm, ft.*lbf) : Specified torque
Non-reusable part
T
A135640E01

REMOVAL


1. **DRAIN ENGINE COOLANT (See page CO-5)**
2. **REMOVE NO. 1 ENGINE COVER SUB-ASSEMBLY (See page EM-94)**
3. **REMOVE AIR CLEANER CAP SUB-ASSEMBLY**

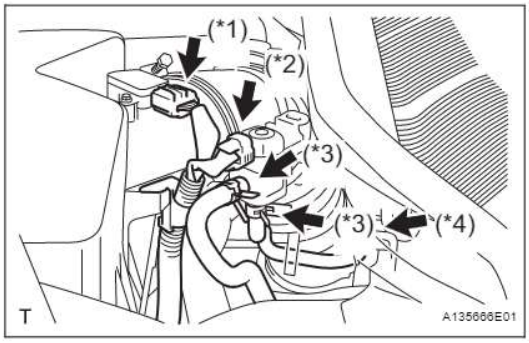


(a) Disconnect the mass air flow meter connector (*1).
(b) Disconnect the purge VSV connector (*2).
(c) Disconnect the 2 purge VSV vacuum hoses (*3).
(d) Disconnect the purge line hose from the clamp (*4).

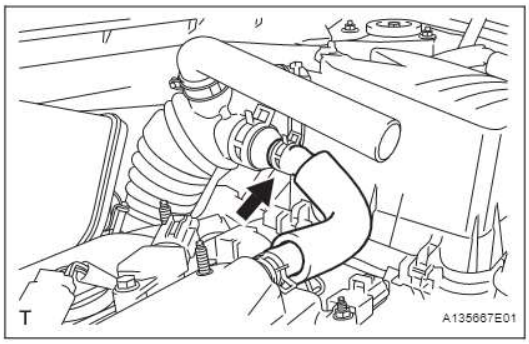

(e) Disconnect the No. 2 ventilation hose from the air cleaner hose.

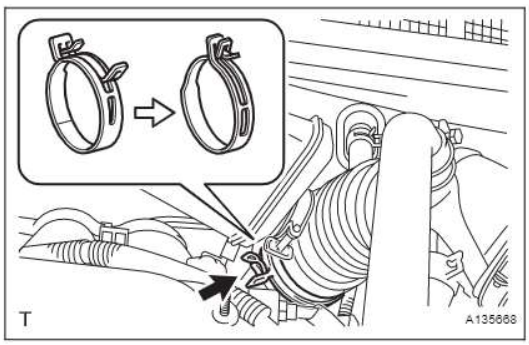


(f) Lock the No. 1 air cleaner hose clamp, and then disconnect the No. 1 air cleaner hose from the throttle body.

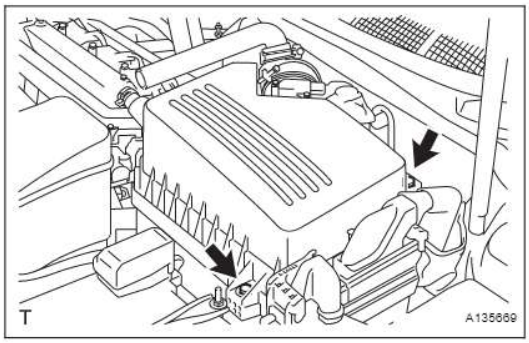


(g) Remove the 2 bolts and air cleaner cap.
(h) Remove the air cleaner filter element from the air cleaner case.

4. **REMOVE AIR CLEANER CASE SUB-ASSEMBLY (See page EM-95)**

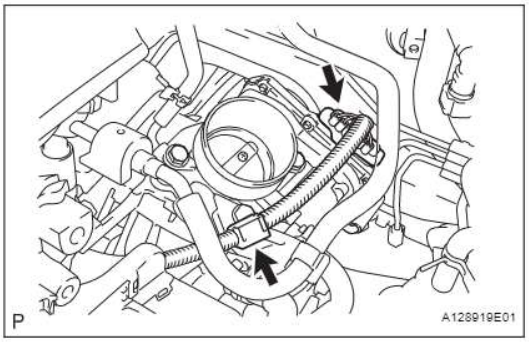


5. REMOVE THROTTLE BODY


(a) Disconnect the throttle position sensor connector and wire harness clamp.

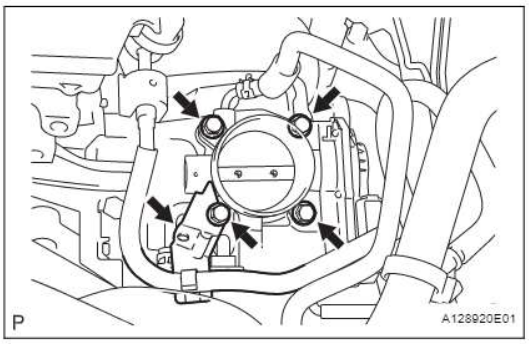

(b) Remove the 4 bolts, and then remove the fuel pipe support and throttle body.

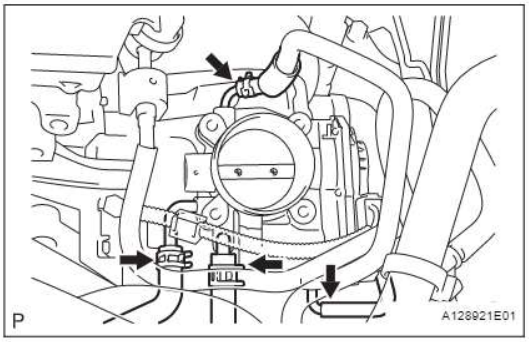

(c) Disconnect the purge line hose from the throttle body.
(d) Disconnect the water by-pass hose from the throttle body.
(e) Disconnect the No. 2 water by-pass hose from the throttle body.
(f) Disconnect the No. 1 throttle body hose from the throttle body.

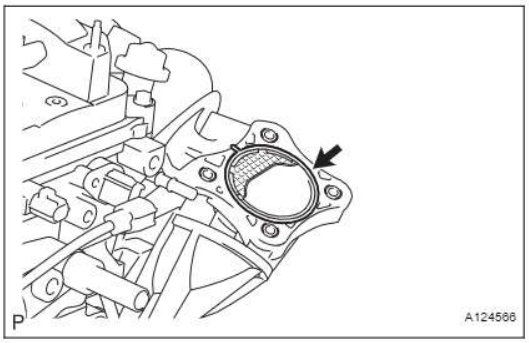


(g) Remove the gasket from the intake manifold.

INSPECTION

1. INSPECT THROTTLE BODY ASSEMBLY


(a) Using an ohmmeter, measure the resistance between the terminals.

Standard resistance

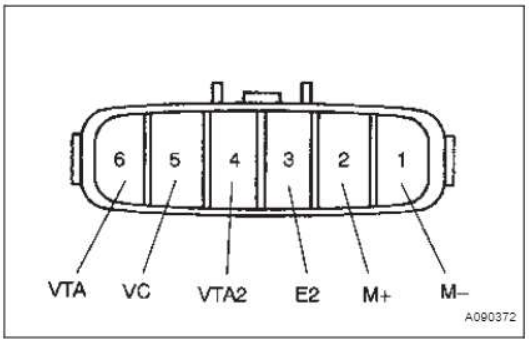


Symbols (terminal No.)	Resistance	Temperature
M+ (2) - M- (1)	0.3 to 100 Ω	20°C (68°F)

If the result is not as specified, replace the throttle body assembly.

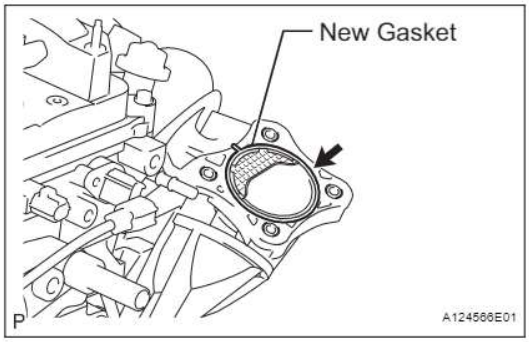


INSTALLATION


1. **INSTALL THROTTLE BODY**
   (a) Install a new gasket onto the intake manifold.

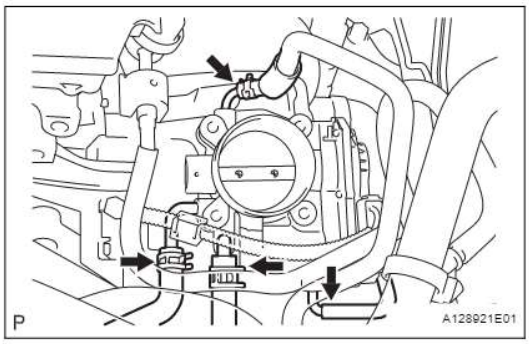

(b) Connect the purge line hose to the throttle body.
(c) Connect the water by-pass hose to the throttle body.
(d) Connect the No. 2 water by-pass hose to the throttle body.
(e) Connect the No. 1 throttle body hose to the throttle body.

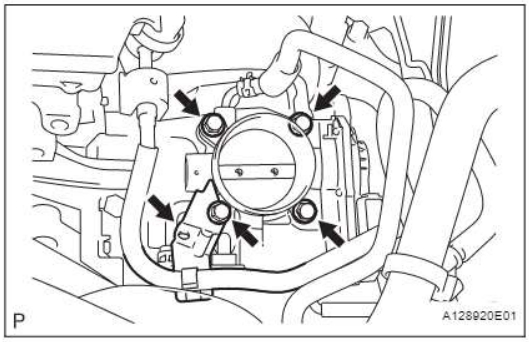


(f) Install the throttle body and fuel pipe clamp with the 4 bolts.
Torque: 30 N*m (305 kgf*cm, 22 ft.*lbf)
(g) Connect the fuel tube into the clamp.

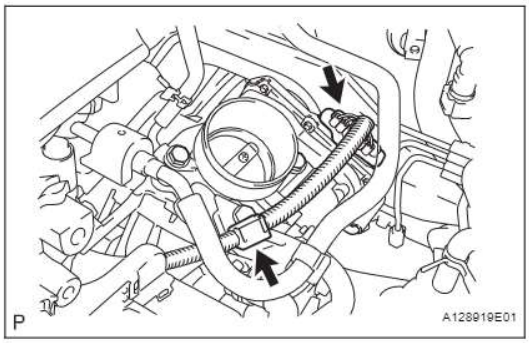


(h) Connect the throttle position sensor connector.
(i) Connect the wire harness clamp.

2. **INSTALL AIR CLEANER CASE SUB-ASSEMBLY (See page EM-120)**


3. **INSTALL AIR CLEANER CAP SUB-ASSEMBLY**
   (a) Install the air cleaner filter element onto the air cleaner case.

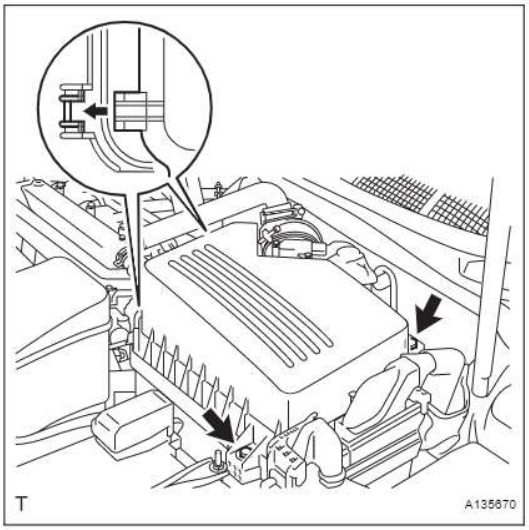


(b) Insert the hinges. Install the air cleaner cap sub-assembly with the 2 bolts.

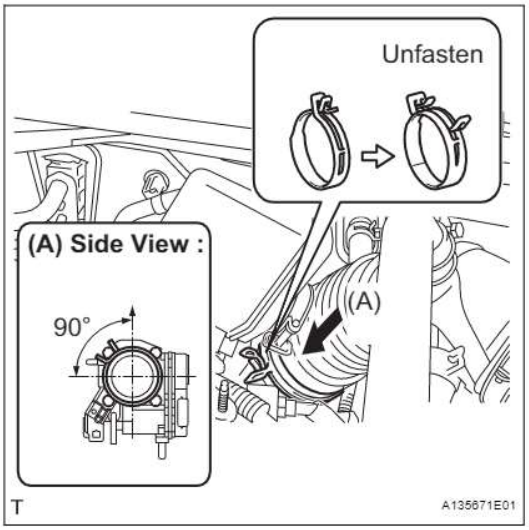

(c) Align the matchmarks of the No. 1 air cleaner hose and throttle body, and then connect the air cleaner hose No. 1 to the throttle body and unfasten the No. 1 air cleaner hose clamp.
NOTICE:
Make sure that the hose clamp is at the correct angle.

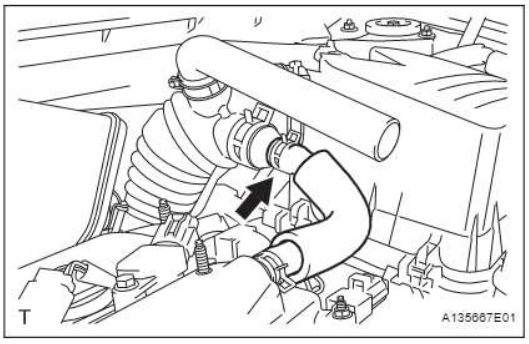

(d) Connect the No. 2 ventilation hose to the air cleaner hose.

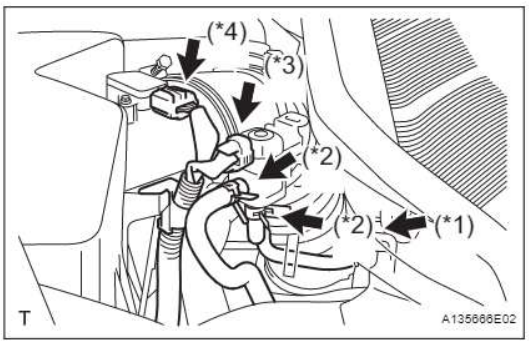


(e) Connect the purge line hose to the clamp (*1).
(f) Connect the 2 purge VSV vacuum hoses (*2).
(g) Connect the purge VSV connector (*3).
(h) Connect the mass air flow meter connector (*4).

4. **INSTALL AIR CLEANER INLET ASSEMBLY (See page EM-120)**
5. **ADD ENGINE COOLANT (See page CO-5)**

6. CHECK FOR ENGINE COOLANT LEAKS (See page CO-1)
7. INSTALL NO. 1 ENGINE COVER SUB-ASSEMBLY (See page EM-121)

THROTTLE BODY

COMPONENTS

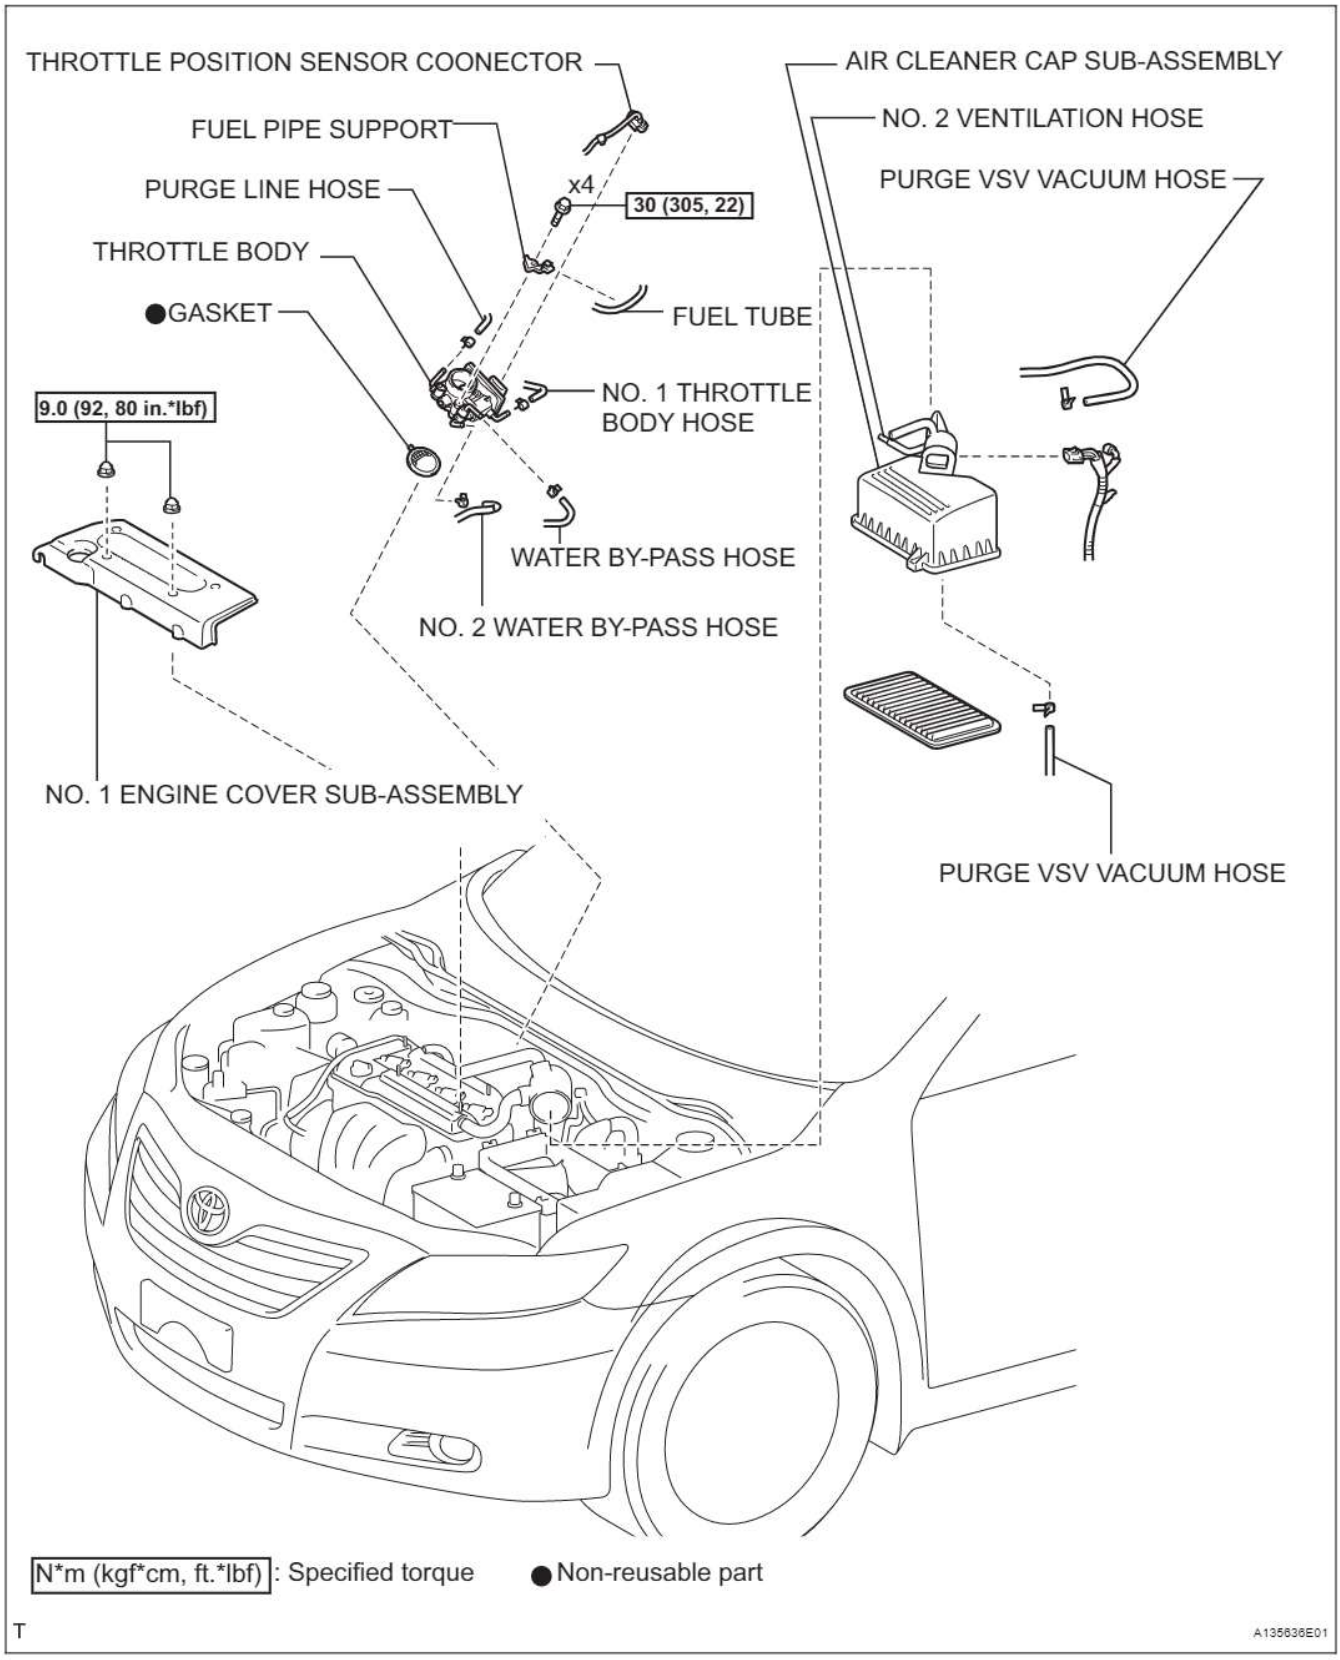


ES


ON-VEHICLE INSPECTION

1. INSPECT THROTTLE BODY ASSEMBLY

(a) Listen to the throttle control motor operating sounds.
  (1) Turn the ignition switch to the ON position.
  (2) When pressing the accelerator pedal position sensor lever, listen to the running motor. Make sure that no friction noise comes from the motor.
  If friction noise exists, replace the throttle body assembly.

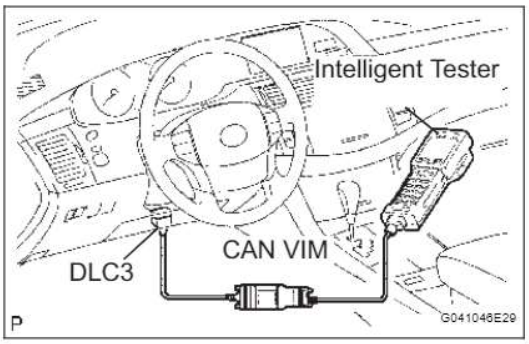

(b) Inspect the throttle position sensor.
  (1) Connect the intelligent tester to the DLC3.
  (2) Turn the ignition switch to the ON position.
  (3) Check that the MIL turns off.
  (4) Under CURRENT DATA, the throttle valve opening percentage (THROTTLE POS) should be within the standard range below.
  Standard throttle valve opening percentage: 60% or more
  If the percentage is less than 60%, replace the throttle body assembly.
  NOTICE:
  When checking the throttle valve opening percentage, the transmission should be in neutral.

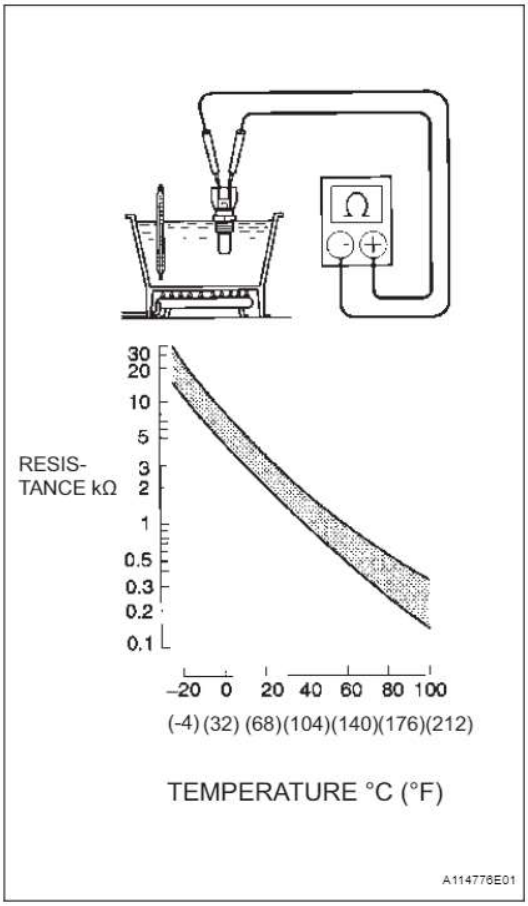


INSPECTION

1. **INSPECT ENGINE COOLANT TEMPERATURE SENSOR**
   (a) Using an ohmmeter, measure the resistance between the terminals.
   Standard resistance

Condition	Specified Condition
20°C (68°F)	2.32 to 2.59 kΩ
80°C (176°F)	0.310 to 0.326 kΩ

If the result is not as specified, replace the sensor.
NOTICE:
In case of checking the water temperature sensor in the water, do not allow water to go into the terminals. After checking, dry the sensor.

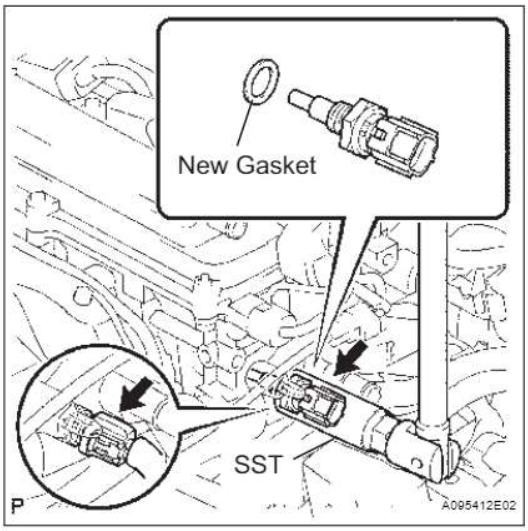


INSTALLATION

1. **INSTALL ENGINE COOLANT TEMPERATURE SENSOR**
   (a) Install a new gasket onto the engine coolant temperature sensor.
   (b) Using SST, install the engine coolant temperature sensor.
   SST 09817-33190
   Torque: 20 N*m (204 kgf*cm, 15 ft.*lbf)
   (c) Connect the engine coolant temperature sensor connector.
2. **INSTALL AIR CLEANER CASE SUB-ASSEMBLY (See page EM-120)**
3. **INSTALL AIR CLEANER CAP SUB-ASSEMBLY (See page ES-419)**
4. **INSTALL AIR CLEANER INLET ASSEMBLY (See page EM-120)**
5. **ADD ENGINE COOLANT (See page CO-5)**
6. **CHECK FOR ENGINE COOLANT LEAKS (See page CO-1)**
7. **INSTALL NO. 1 ENGINE COVER SUB-ASSEMBLY (See page EM-121)**


ENGINE COOLANT TEMPERATURE SENSOR

COMPONENTS

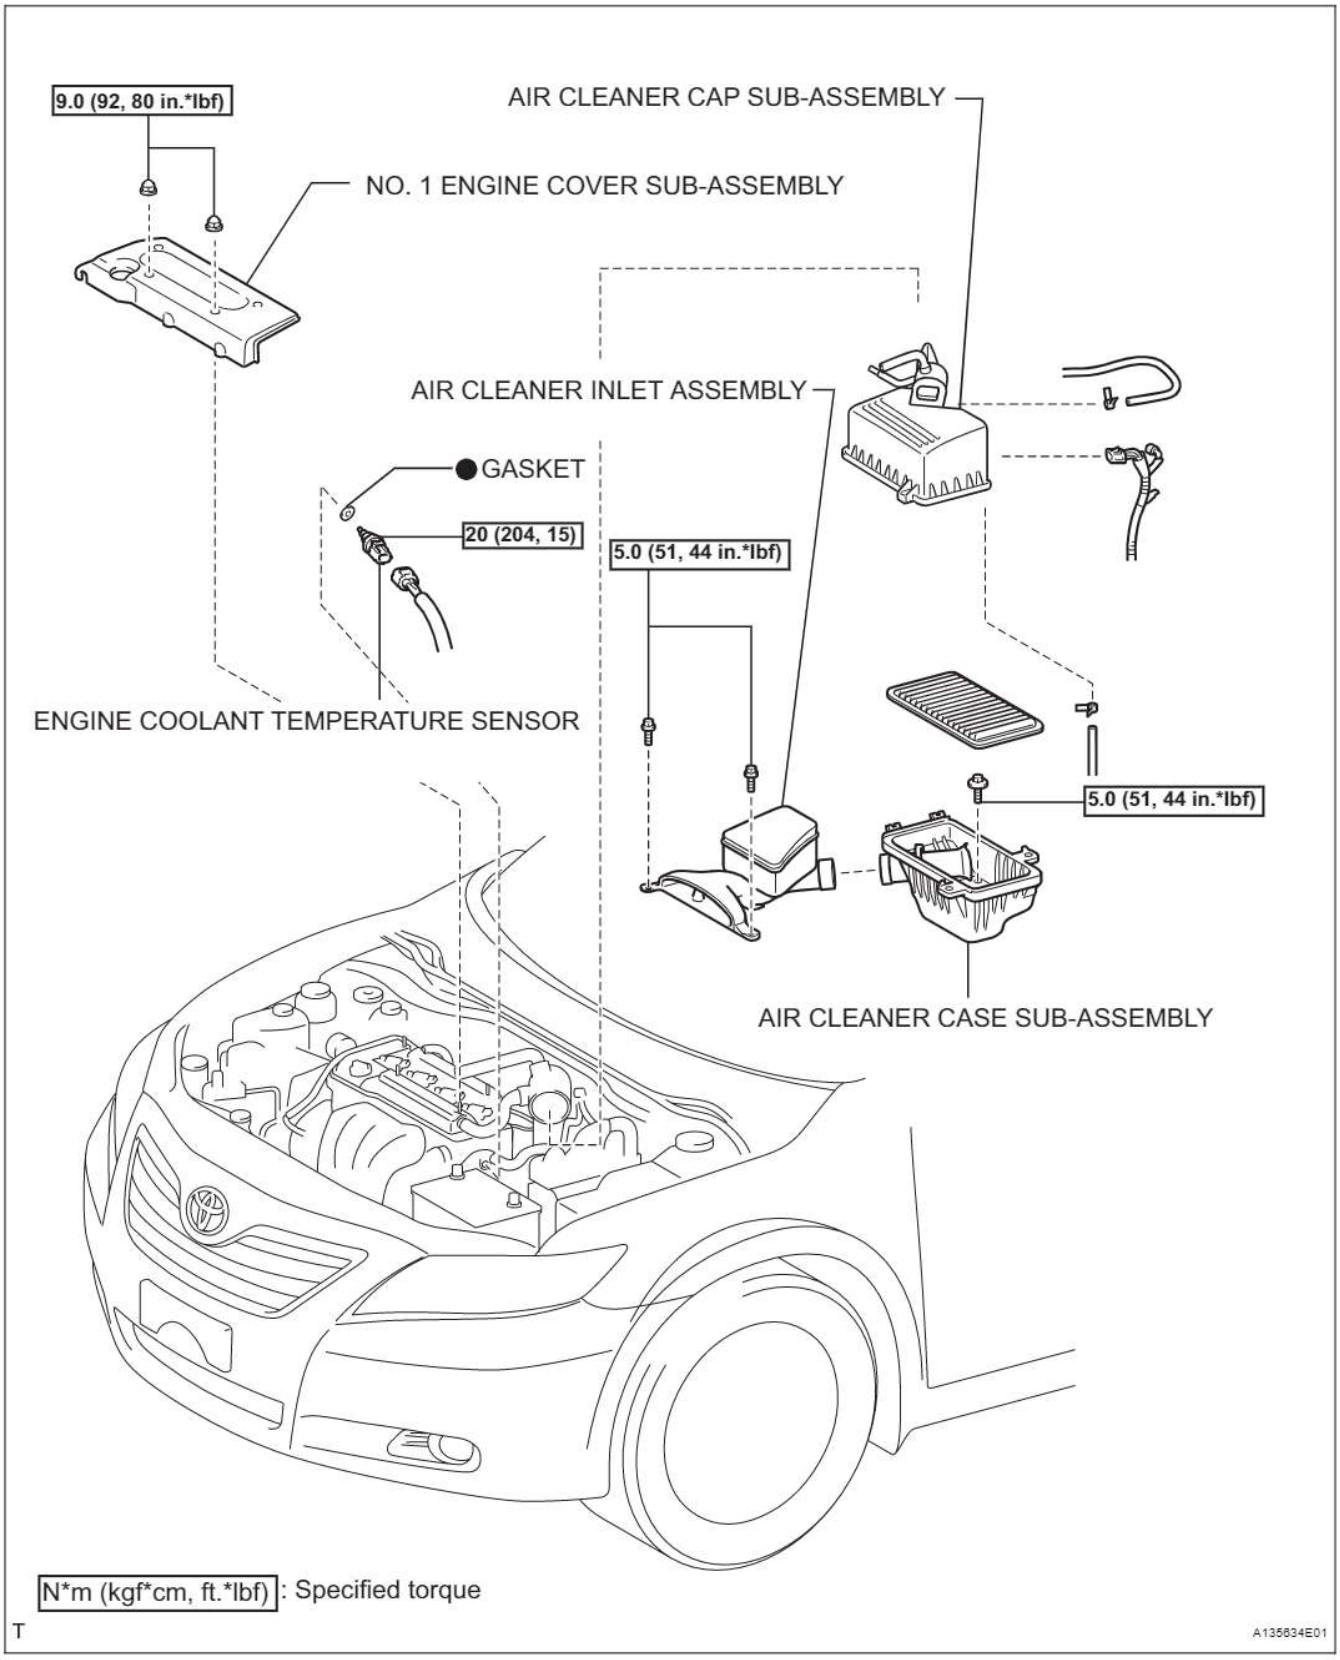


REMOVAL

1. **DRAIN ENGINE COOLANT (See page CO-5)**
2. **REMOVE NO. 1 ENGINE COVER SUB-ASSEMBLY (See page EM-94)**
3. **REMOVE AIR CLEANER INLET ASSEMBLY (See page EM-94)**
4. **REMOVE AIR CLEANER CAP SUB-ASSEMBLY (See page ES-416)**
5. **REMOVE AIR CLEANER CASE SUB-ASSEMBLY (See page EM-95)**
6. **REMOVE ENGINE COOLANT TEMPERATURE SENSOR**
   (a) Disconnect the engine coolant temperature sensor connector.
   (b) Using SST, remove the engine coolant temperature sensor and gasket.
   SST 09817-33190

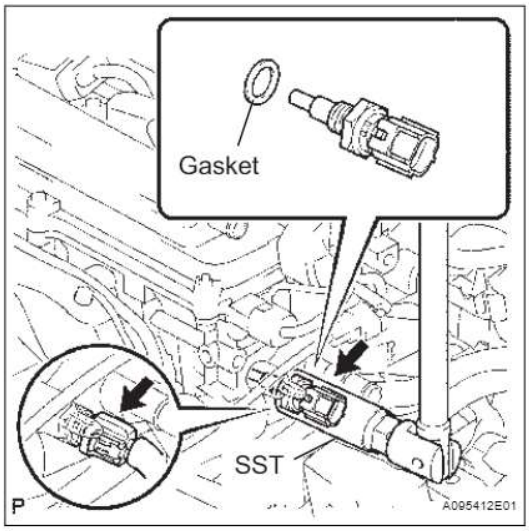


CRANKSHAFT POSITION SENSOR


COMPONENTS

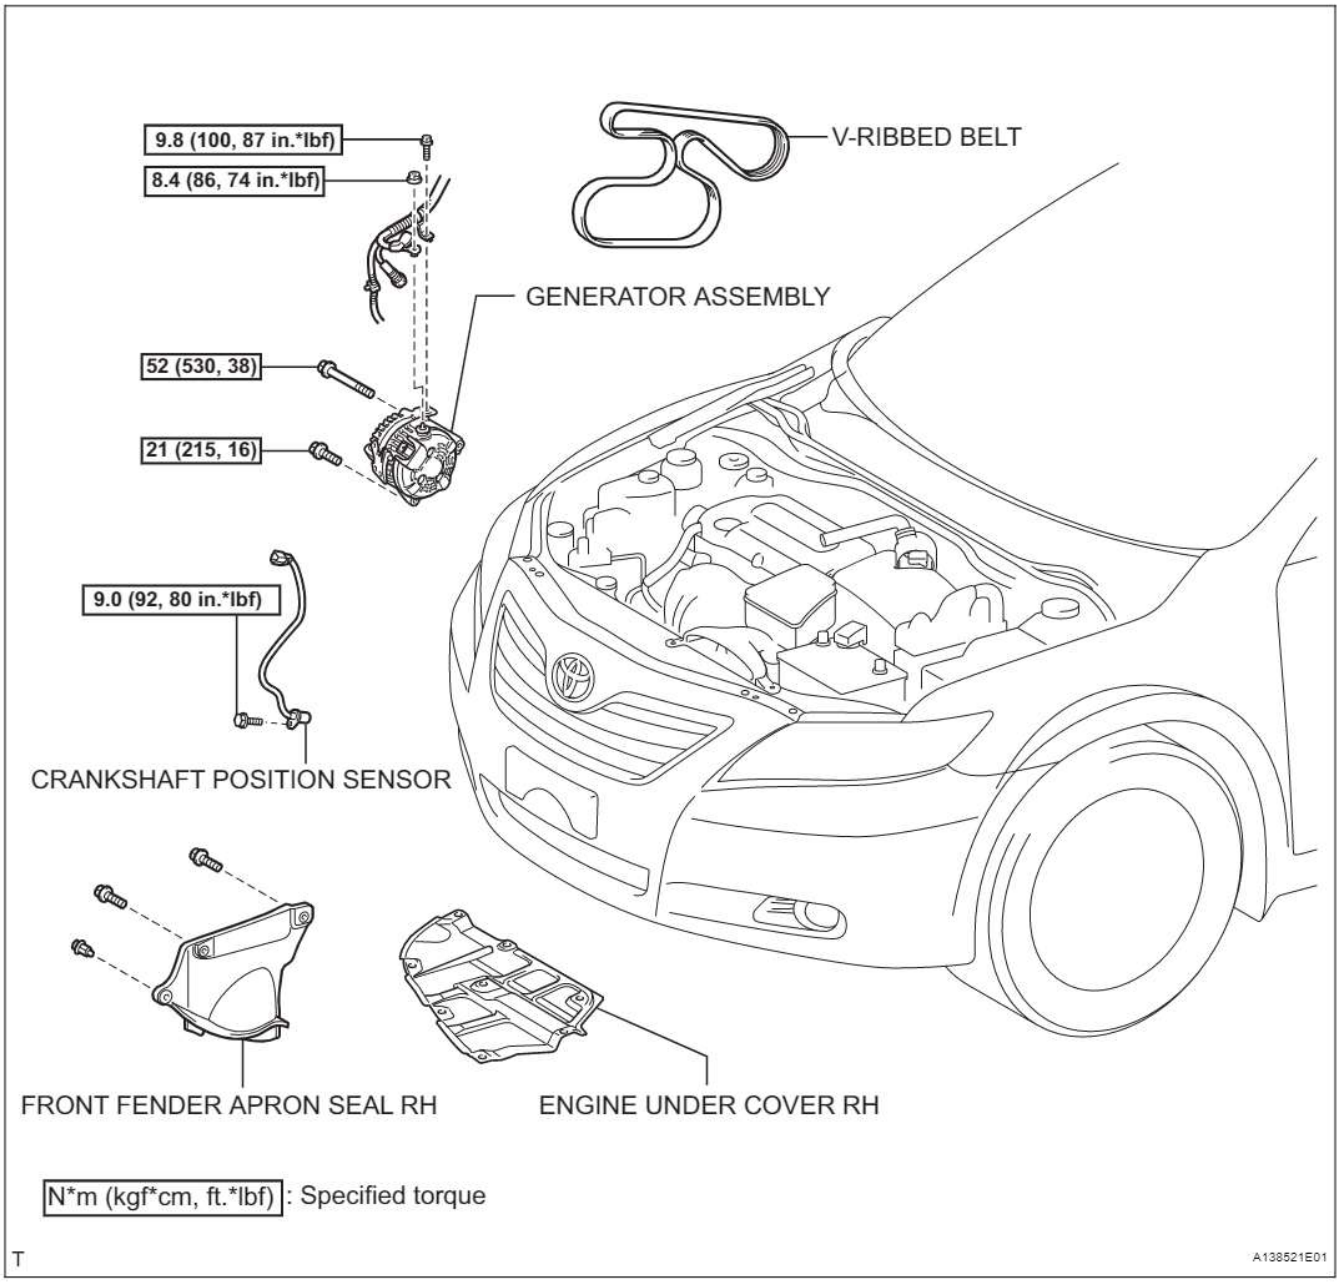

REMOVAL

1. DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL
2. REMOVE FRONT WHEEL RH
3. REMOVE FRONT FENDER APRON RH
4. REMOVE V-RIBBED BELT (See page EM-6)
5. REMOVE GENERATOR ASSEMBLY (See page CH-11)
6. REMOVE CRANKSHAFT POSITION SENSOR
   (a) Disconnect the crankshaft position sensor connector.
   (b) Remove the connector clamp and wire harness clamp.
   (c) Remove the wire harness clamp bracket from the wire harness.
   (d) Remove the bolt, and then remove the crankshaft position sensor.

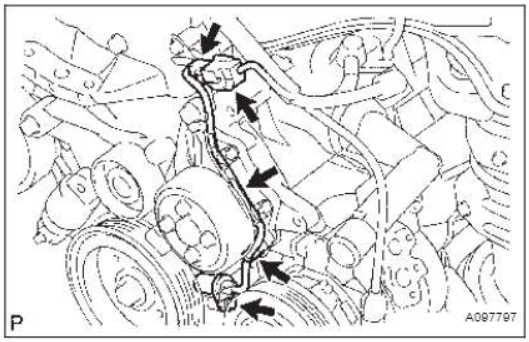

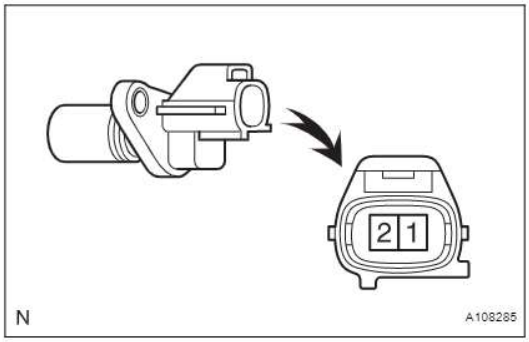

INSPECTION


1. INSPECT CRANKSHAFT POSITION SENSOR
   (a) Using an ohmmeter, measure the resistance between the terminals.
   Standard resistance


Temperature	Specified Condition
Cold	985 to 1,600 Ω
Hot	1,265 to 1,890 Ω

NOTICE:
"Cold" and "Hot" mean the temperature of the coils themselves. "Cold" is from -10 to 50°C (14 to 122°F) and "Hot" is from 50 to 100°C (122 to 212°F).
If the resistance is not as specified, replace the sensor.

INSTALLATION

1. INSTALL CRANKSHAFT POSITION SENSOR
   (a) Apply a light coat of engine oil to the O-ring on the crankshaft position sensor.

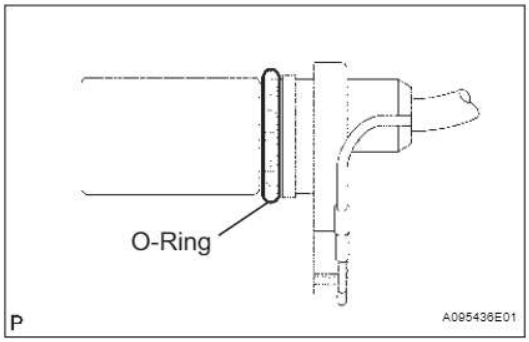

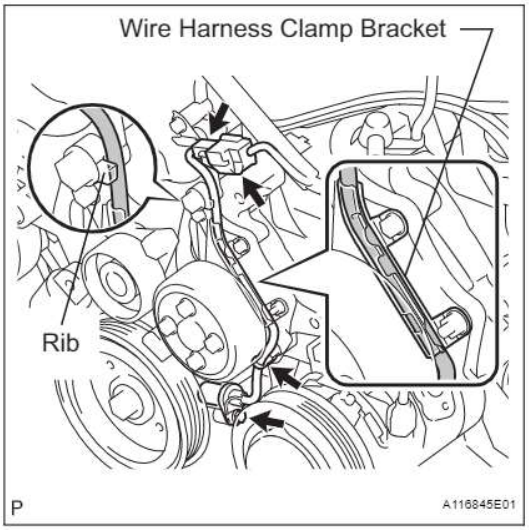


(b) Install the crankshaft position sensor with the bolt.
Torque: 9.0 N*m (92 kgf*cm, 80 in.*lbf)
(c) Connect the crankshaft position sensor connector.

2. **INSTALL GENERATOR ASSEMBLY (See page CH-19)**
3. **INSTALL V-RIBBED BELT (See page EM-7)**
4. **INSTALL FRONT FENDER APRON SEAL RH**
5. **INSTALL FRONT WHEEL RH**
6. **CONNECT CABLE TO NEGATIVE BATTERY TERMINAL**

ES


CAMSHAFT POSITION SENSOR

COMPONENTS

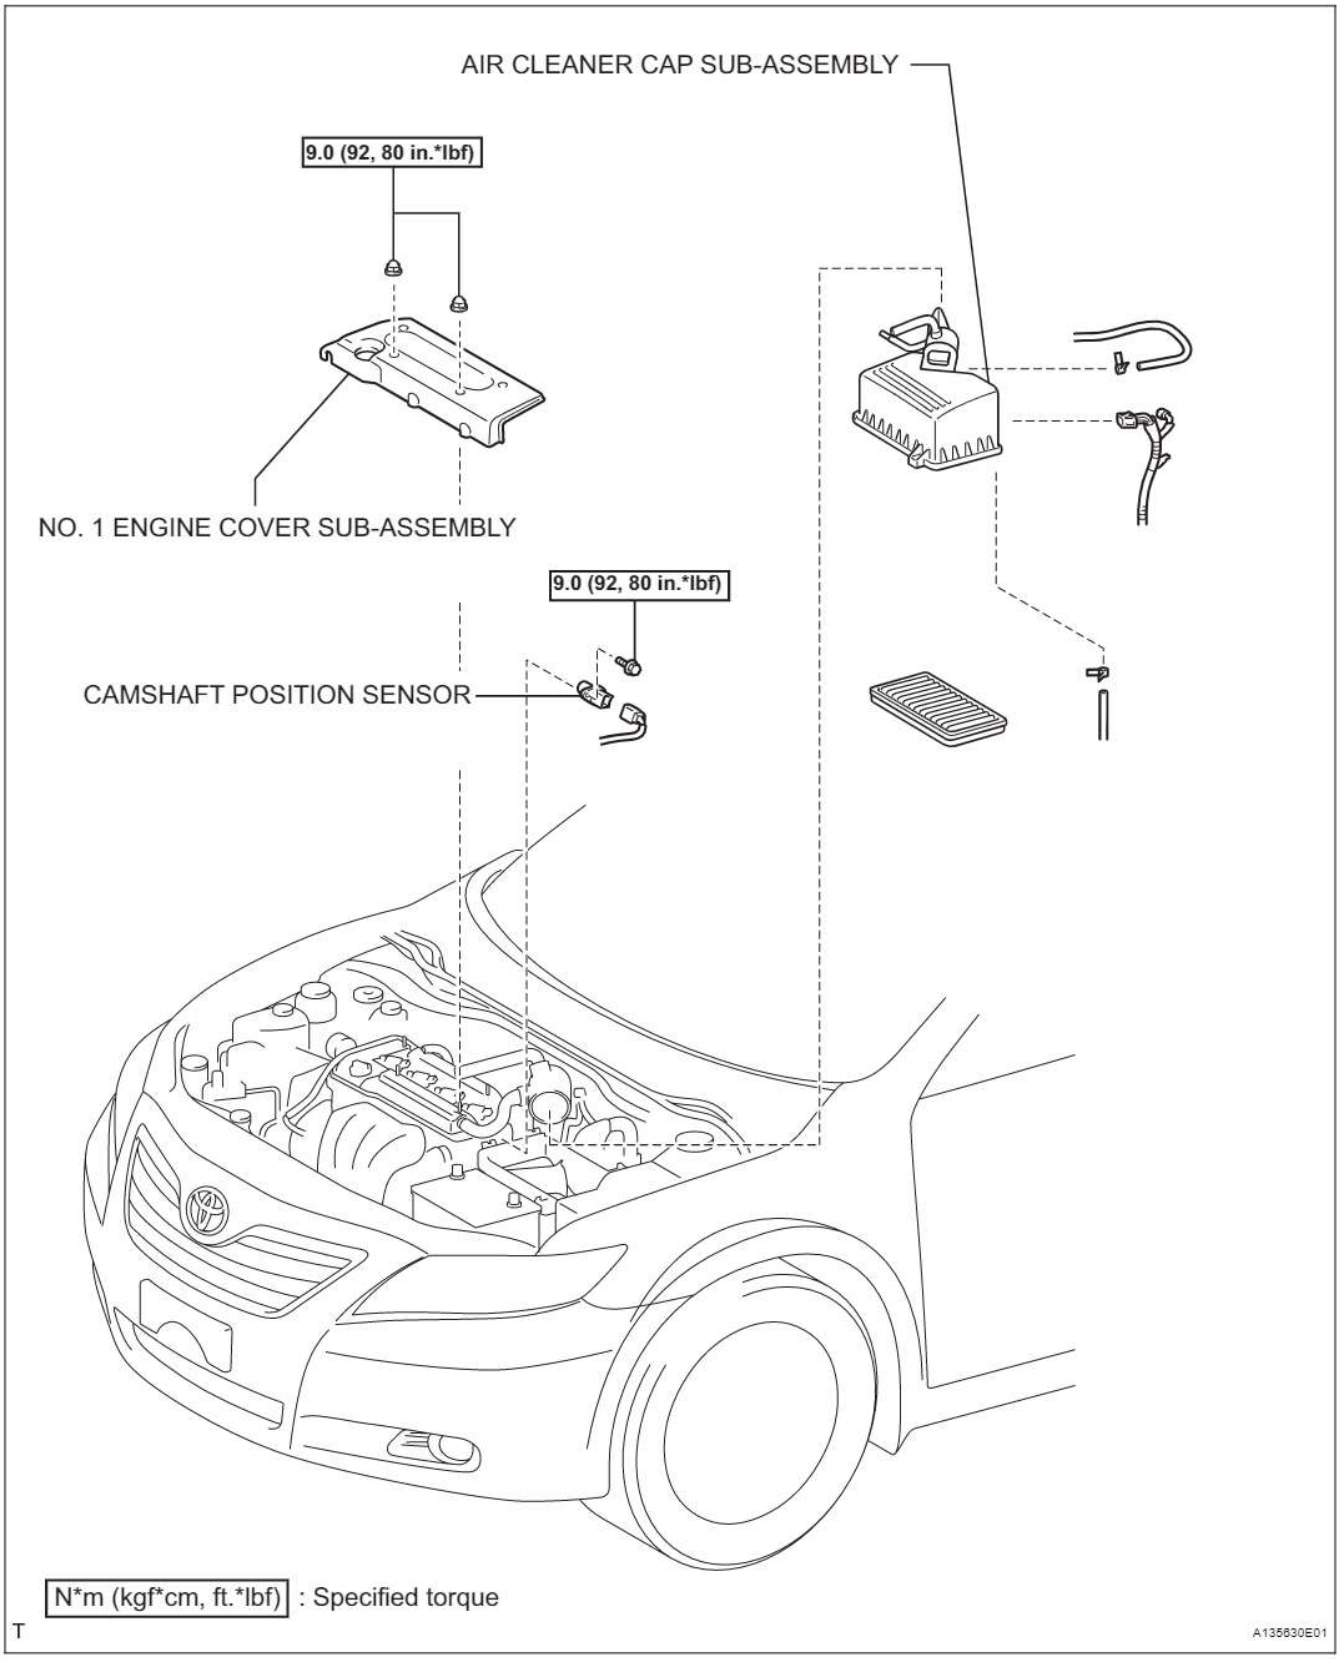

REMOVAL


1. **REMOVE NO. 1 ENGINE COVER SUB-ASSEMBLY (See page EM-94)**
2. **REMOVE AIR CLEANER CAP SUB-ASSEMBLY (See page ES-416)**
3. **REMOVE CAMSHAFT POSITION SENSOR**
   (a) Disconnect the camshaft position sensor connector.
   (b) Remove the bolt and camshaft position sensor.

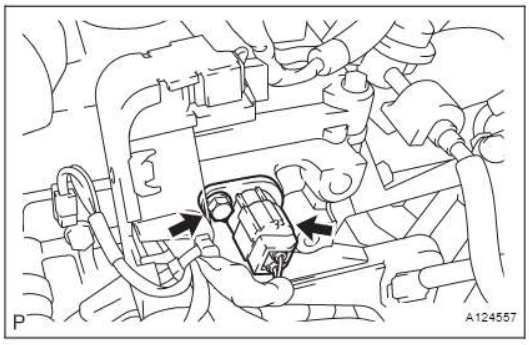

INSPECTION

1. **INSPECT CAMSHAFT POSITION SENSOR**
   (a) Measure the resistance of the sensor.
   Standard resistance


Tester Connection	Specified Condition
1 (G+) - 2 (G-)	835 to 1,400 Ω at Cold
1 (G+) - 2 (G-)	1,060 to 1,645 Ω at Hot

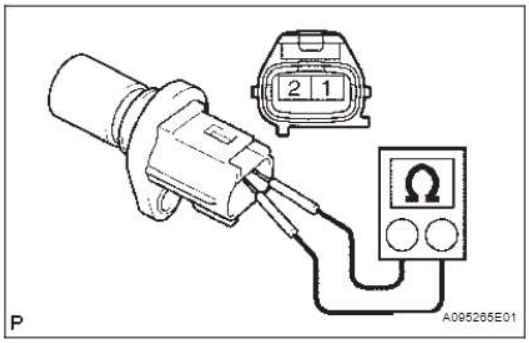


NOTICE:
"Cold" and "Hot" mean the temperature of the coils themselves. "Cold" is from -10 to 50°C (14 to 122 °F) and "Hot" is from 50 to 100°C (122 to 212°F).
If the result is not as specified, replace the camshaft position sensor.

INSTALLATION

1. **INSTALL CAMSHAFT POSITION SENSOR**
   (a) Apply a light coat of engine oil to the O-ring of the sensor.
   NOTICE:
   Make sure that the O-ring is not cracked or jammed when installing it.

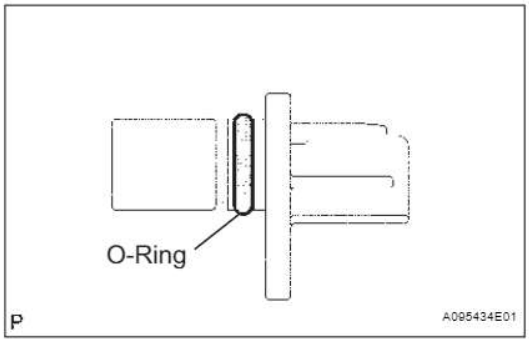

   (b) Install the camshaft position sensor with the bolt.
   Torque: 9.0 N*m (90 kgf*cm, 80 in.*lbf)
   (c) Connect the camshaft position sensor connector.
2. **INSTALL AIR CLEANER CAP SUB-ASSEMBLY (See page ES-416)**
3. **CHECK FOR ENGINE OIL LEAKS**
4. **INSTALL NO. 1 ENGINE COVER SUB-ASSEMBLY (See page EM-121)**

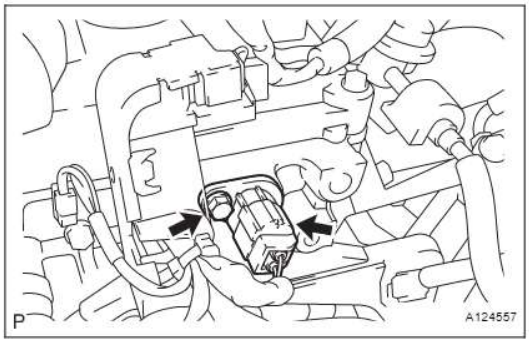


ES


REMOVAL

1. **REMOVE NO. 1 ENGINE COVER SUB-ASSEMBLY (See page EM-94)**


2. **REMOVE VACUUM HOSE CLAMP**
   (a) Remove the bolt and disconnect the vacuum hose clamp.

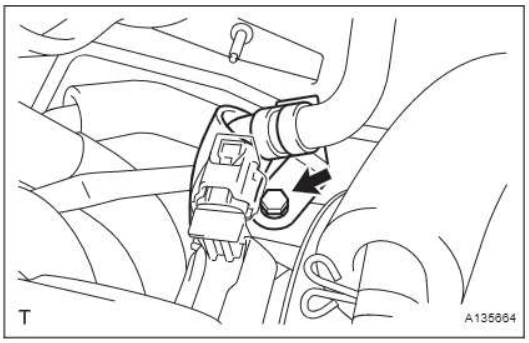

3. **REMOVE CLIP NUT**
   (a) Remove the clip nut.

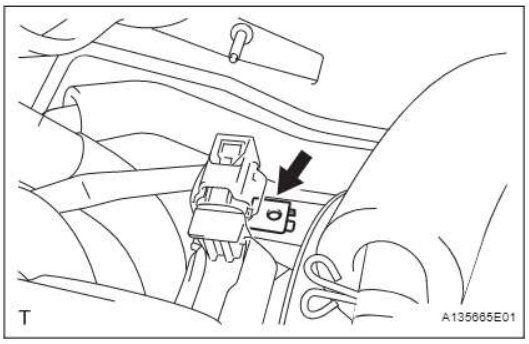

4. **REMOVE CAMSHAFT TIMING OIL CONTROL VALVE ASSEMBLY**
   (a) Disconnect the camshaft timing oil control valve assembly connector.
   (b) Remove the bolt and camshaft timing oil control valve assembly.

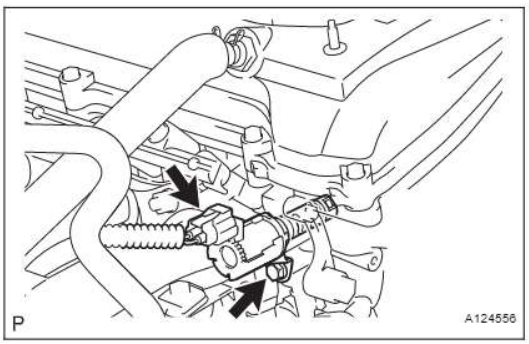

INSPECTION

1. INSPECT CAMSHAFT TIMING OIL CONTROL VALVE ASSEMBLY


(a) Resistance inspection.

(1) Using an ohmmeter, measure the resistance between the terminals.

Standard resistance:

6.9 to 7.9 Ω at 20°C (68°F)

If necessary, replace the camshaft timing oil control valve assembly.

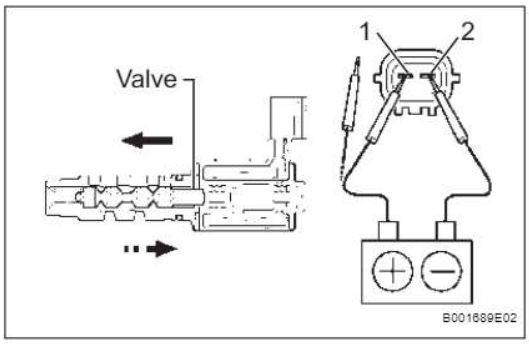

(b) Movement inspection.

(1) Connect the positive (+) lead from the battery to terminal 1 and the negative (-) lead to terminal 2, and check the movement of the valve.

NOTICE:

Confirm that the valve moves freely and does not stick in any position.

If necessary, replace the camshaft timing oil control valve assembly.

HINT:


Accumulation of foreign objects causes subtle pressure leaks. The subtle pressure leaks will cause the camshaft to advance, and this will cause a DTC to be set.

ES

INSTALLATION

1. INSTALL CAMSHAFT TIMING OIL CONTROL VALVE ASSEMBLY


(a) Apply a light coat of engine oil to an O-ring of the camshaft timing oil control valve assembly sensor.

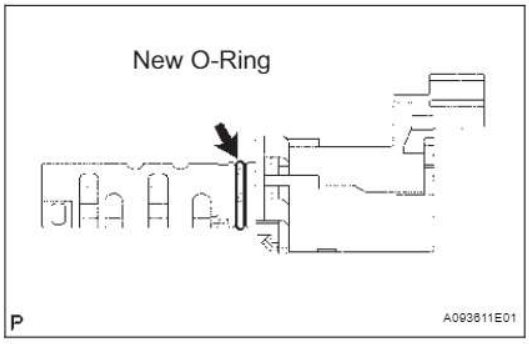


(b) Install the camshaft timing oil control valve assembly with the bolt.

Torque: 9.0 N*m (92 kgf*cm, 80 in.*lbf)


(c) Connect the camshaft timing oil control valve assembly connector.

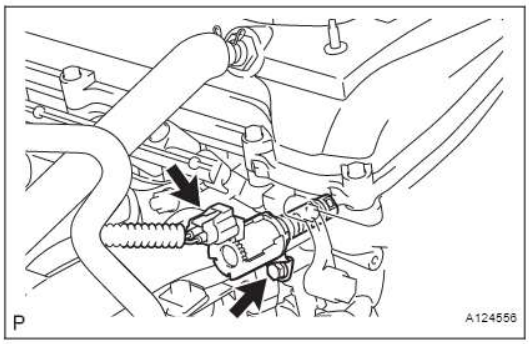

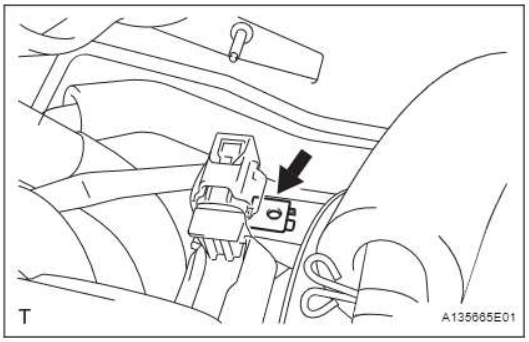

2. INSTALL CLIP NUT

(a) Install the clip nut.

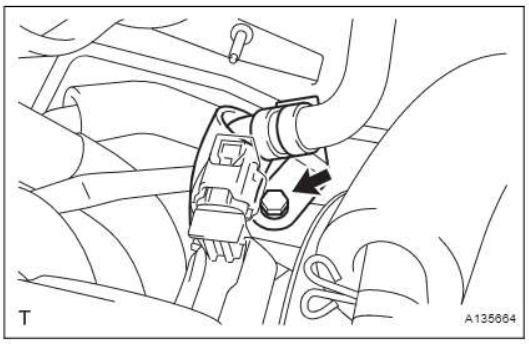

3. INSTALL VACUUM HOSE CLAMP

(a) Install the vacuum hose clamp with the bolt.


Torque: 5.0 N*m (51 kgf*cm, 44 in.*lbf)


4. INSTALL NO. 1 ENGINE COVER SUB-ASSEMBLY

(See page EM-94)

CAMSHAFT TIMING OIL CONTROL VALVE ASSEMBLY

COMPONENTS

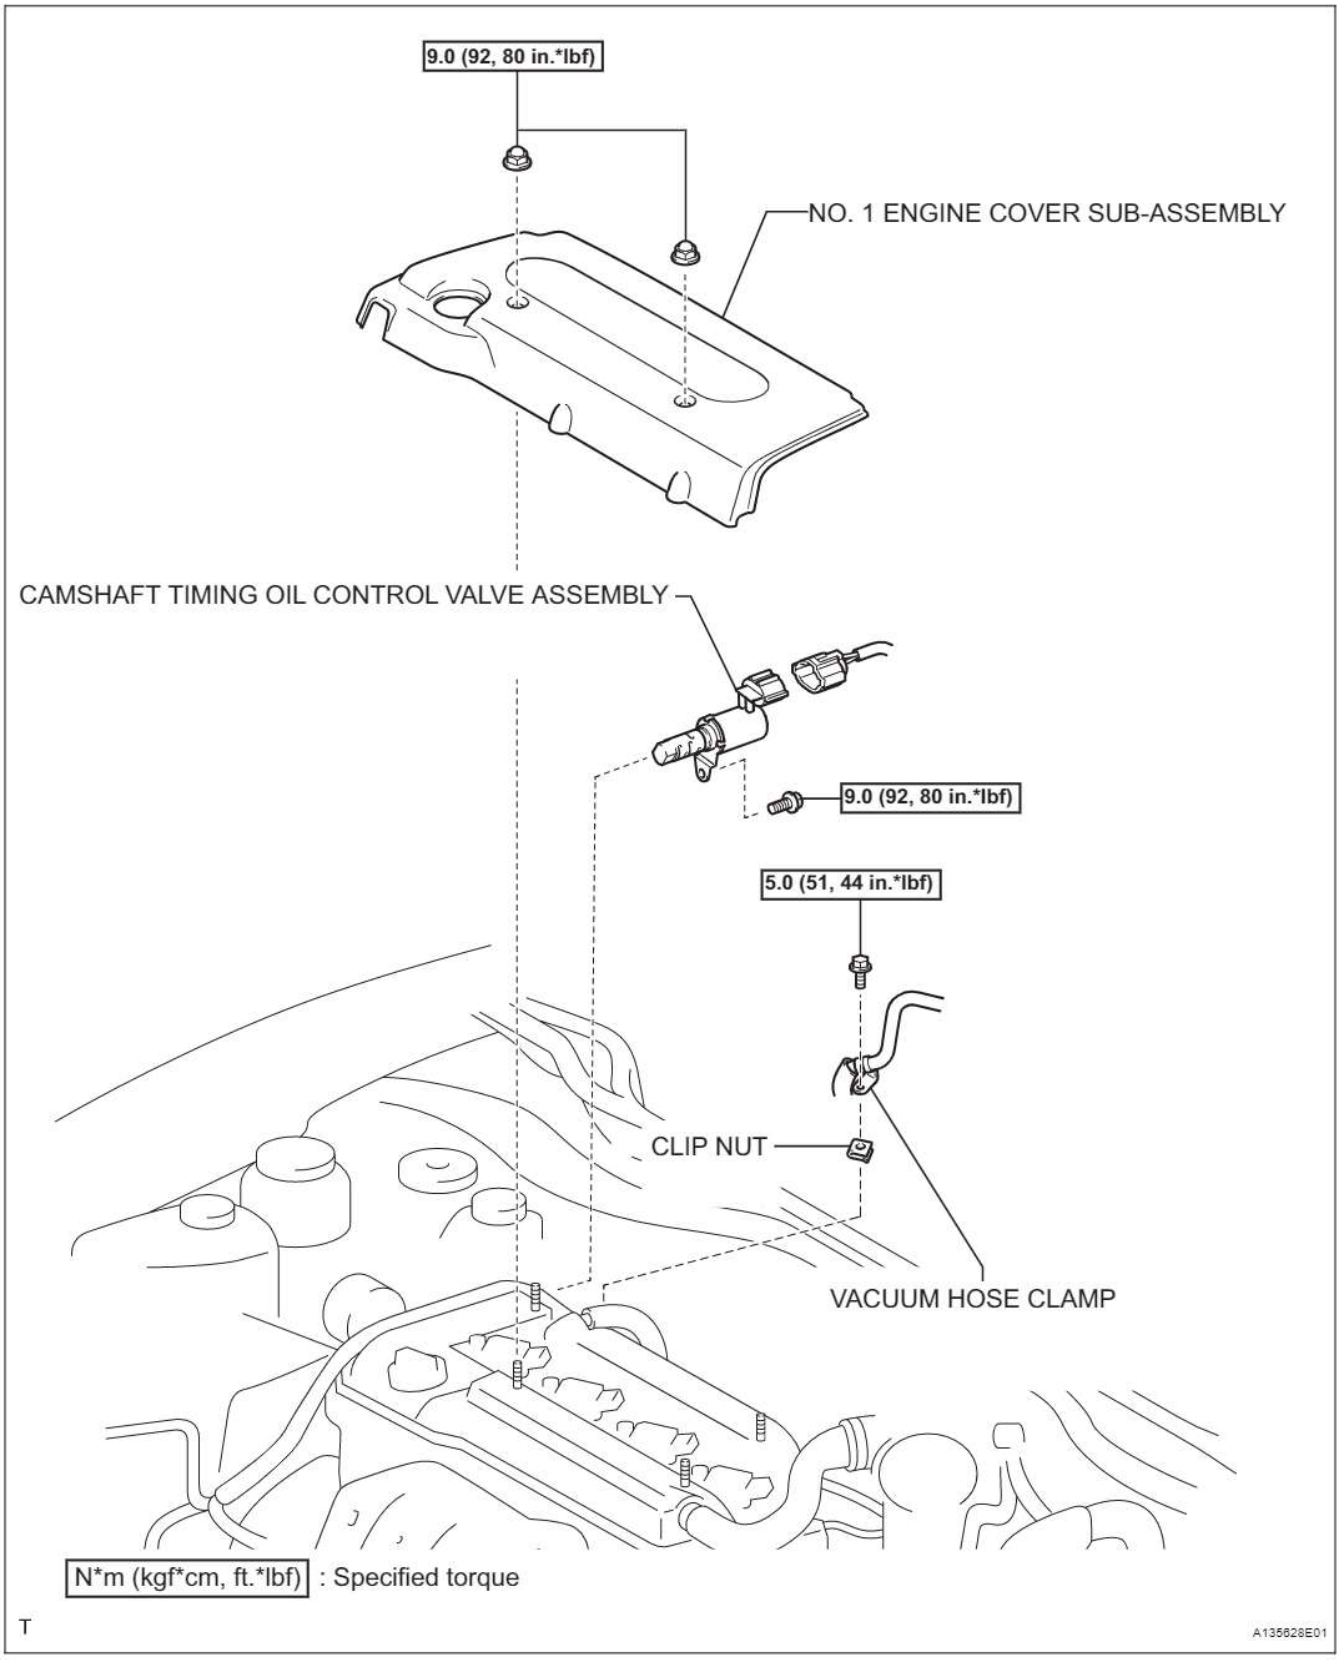

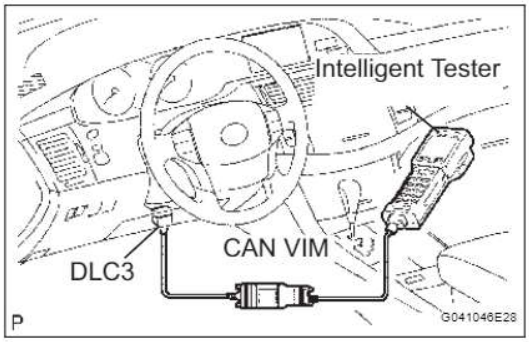

ON-VEHICLE INSPECTION

1. INSPECT CAMSHAFT TIMING OIL CONTROL VALVE ASSEMBLY

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position.
(c) Start the engine and warm it up.
(d) Select the intelligent tester from the ACTIVE TEST menu.
(e) Check the engine speed when the OCV is operated by the intelligent tester.


Standard

Condition	Specified Condition
VVT system is OFF (OCV is OFF)	Normal engine speed
VVT system is ON (OCV is ON)	Rough idle or engine stalled

ES

MASS AIR FLOW METER

COMPONENTS

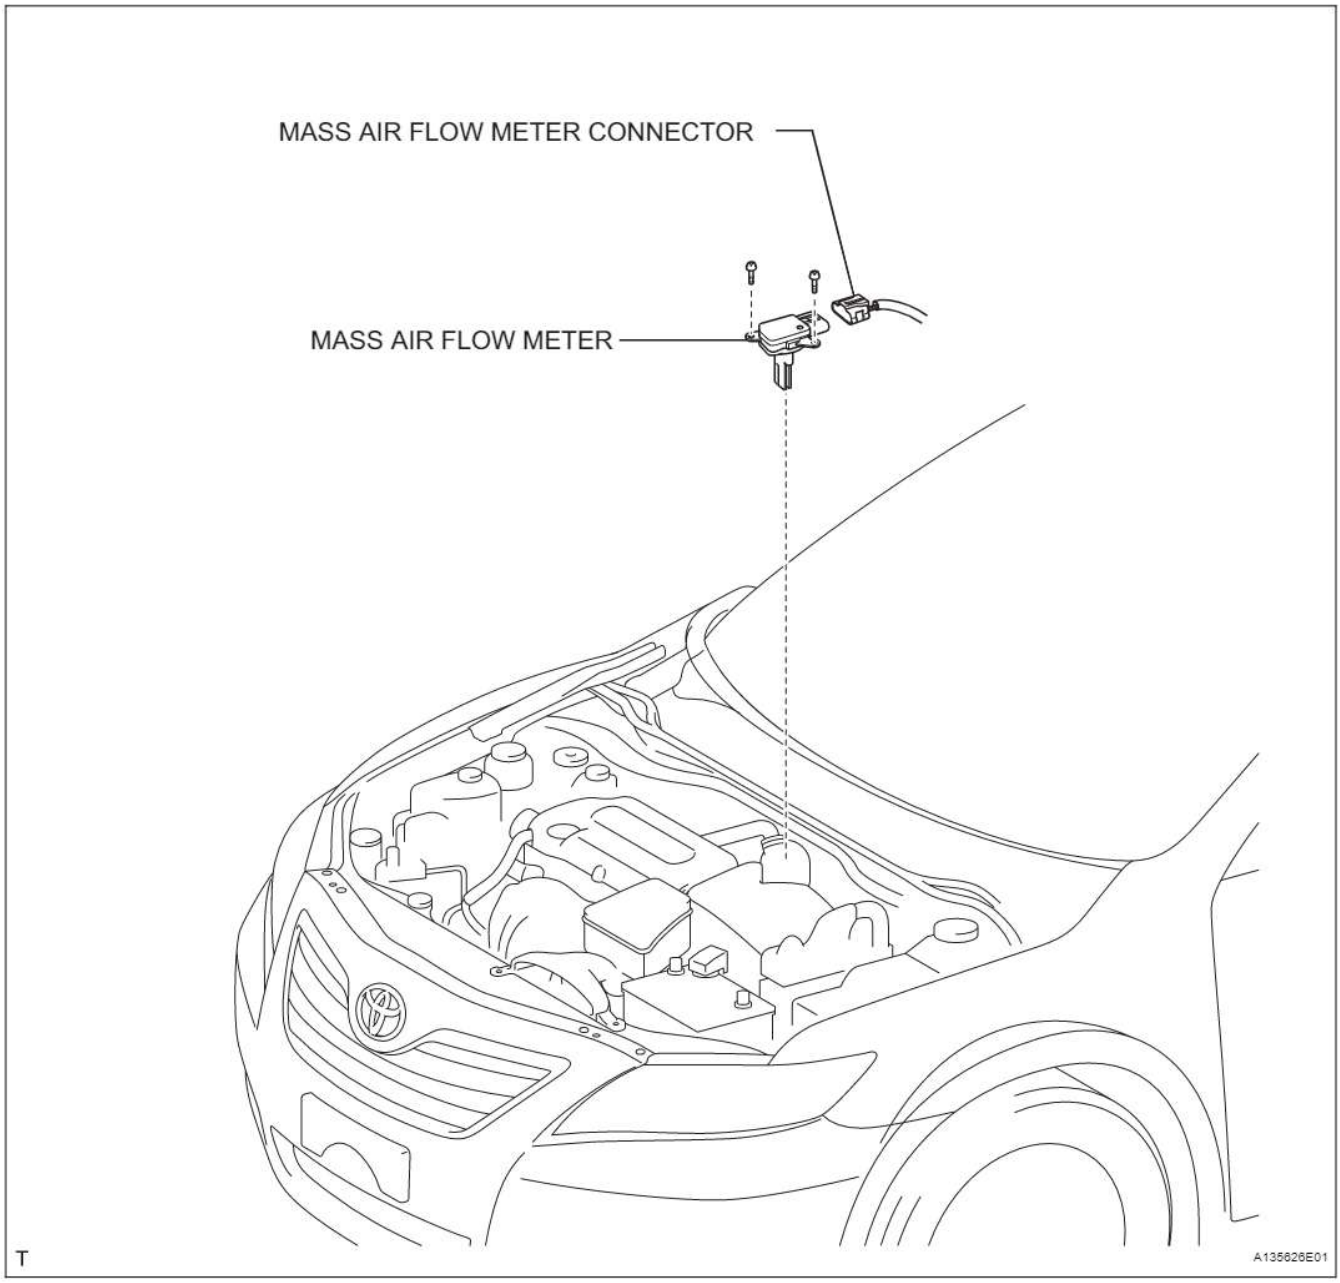

ES

ON-VEHICLE INSPECTION


NOTICE:

- **Perform the MAF meter inspection according to the procedures below.**
- **Only replace the MAF meter when both the LONG FT#1 value and MAF value in the DATA LIST (with the engine stopped) are not within the normal operating range.**

1. INSPECT MASS AIR FLOW METER

(a) Perform confirmation driving pattern.

(1) Connect the intelligent tester to the DLC3.
(2) Turn the ignition switch to the ON position.
(3) Turn the tester ON.
(4) Clear the DTCs (See page ES-38).
(5) Start the engine and warm it up with all accessory switches OFF (until the engine coolant temperature is 75°C (167°F) or more).
(6) Drive the vehicle at 50 km/h (31 mph) or more for 3 to 5 minutes (*1).
(7) Allow the engine to idle for 2 minutes (*2).
(8) Perform steps (*1) and (*2) at least 3 times.

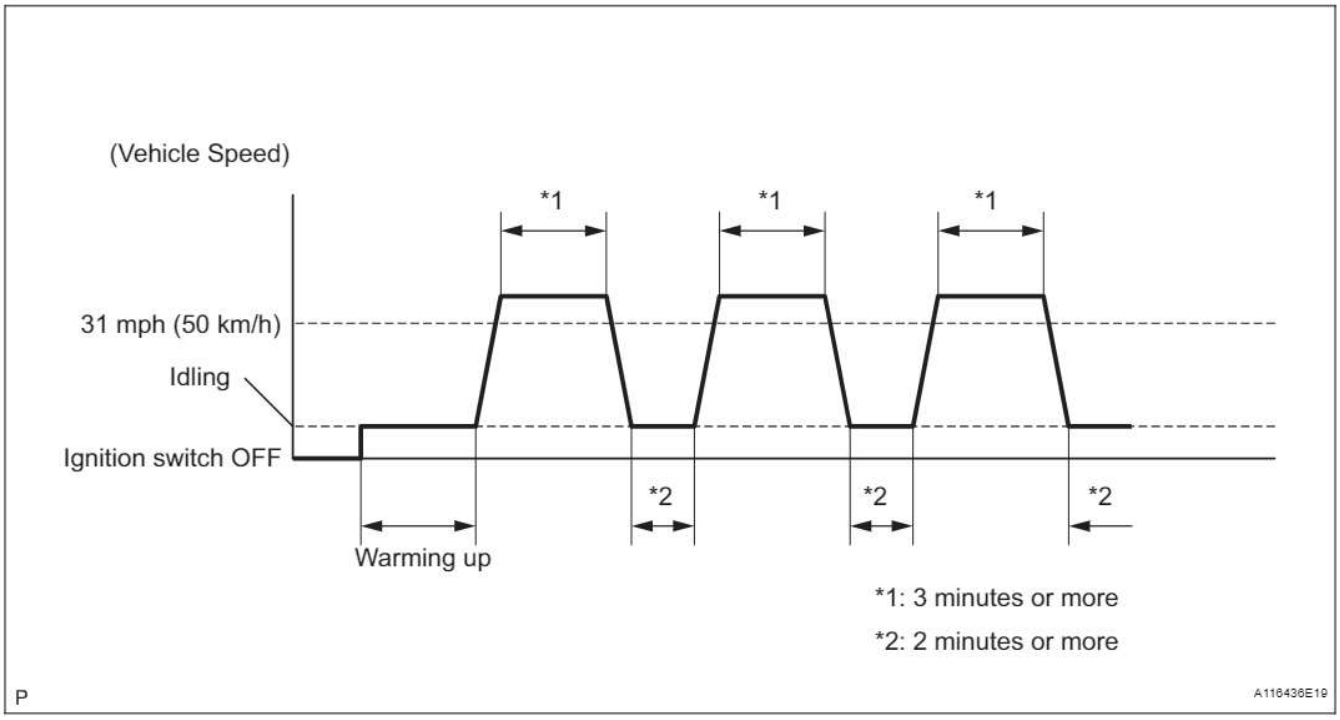


(b) Read values using the intelligent tester (LONG FT#1).

(1) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / LONG FT#1.
(2) Read the values displayed on the tester.
Standard value:
Within -15 to +15 %
If the result is not within the specified range, perform the inspection below.


(c) Read values using the intelligent tester (MAF).
NOTICE:
- **Turn off the engine.**
- **Perform the inspection with the vehicle indoors and on a level surface.**
- **Perform the inspection of the MAF meter while it is installed to the air cleaner case (installed to the vehicle).**
- **During the test, do not use the exhaust air duct to perform suction on the exhaust pipe.**

(1) Turn the ignition switch to the ACC position.
(2) Turn the ignition switch to the ON position (do not run the engine).

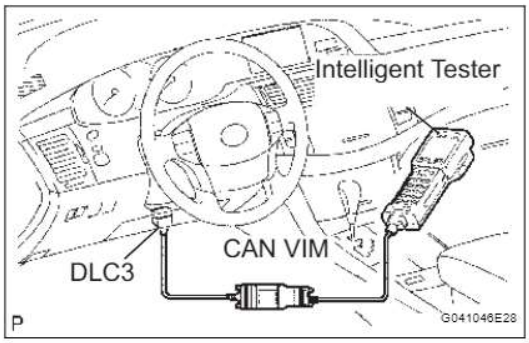

(3) Turn the intelligent tester ON.
(4) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DATA LIST / PRIMARY / MAF.
(5) Wait 30 seconds, and read the values on the intelligent tester.
Standard condition:
Less than 0.50 g/sec.
- If the result is not as specified, replace the MAF meter.
- If the result is within the specified range, inspect the cause of the extremely rich or lean air fuel ratio (See page EC-20).


REMOVAL

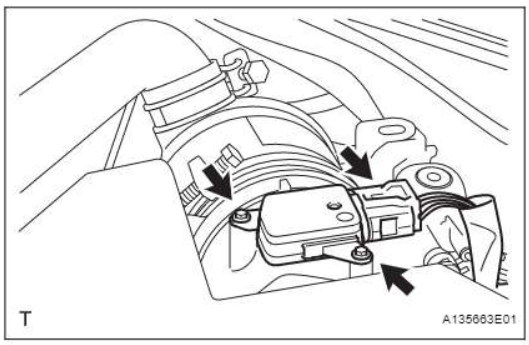

1. REMOVE MASS AIR FLOW METER

(a) Disconnect the mass air flow meter connector.
(b) Remove the 2 screws and mass air flow meter.

INSTALLATION

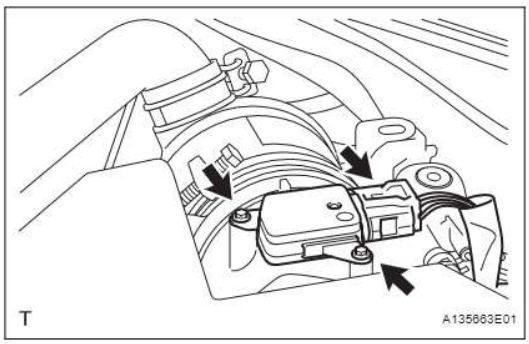

1. INSTALL MASS AIR FLOW METER

(a) Install the mass air flow meter with the 2 screws.
(b) Connect the mass air flow meter connector.


MIL Circuit

DESCRIPTION

The MIL (Malfunction Indicator Lamp) is used to indicate vehicle malfunction detected by the ECM. When the ignition switch is turned ON position, power is supplied to the MIL circuit, and the ECM provides the circuit ground which illuminates the MIL.
The MIL operation can be checked visually: When the ignition switch is first turned ON position, the MIL should be illuminated and should then turn off. If the MIL remains illuminated or is not illuminated, conduct the following troubleshooting procedure using the intelligent tester.

WIRING DIAGRAM

ES

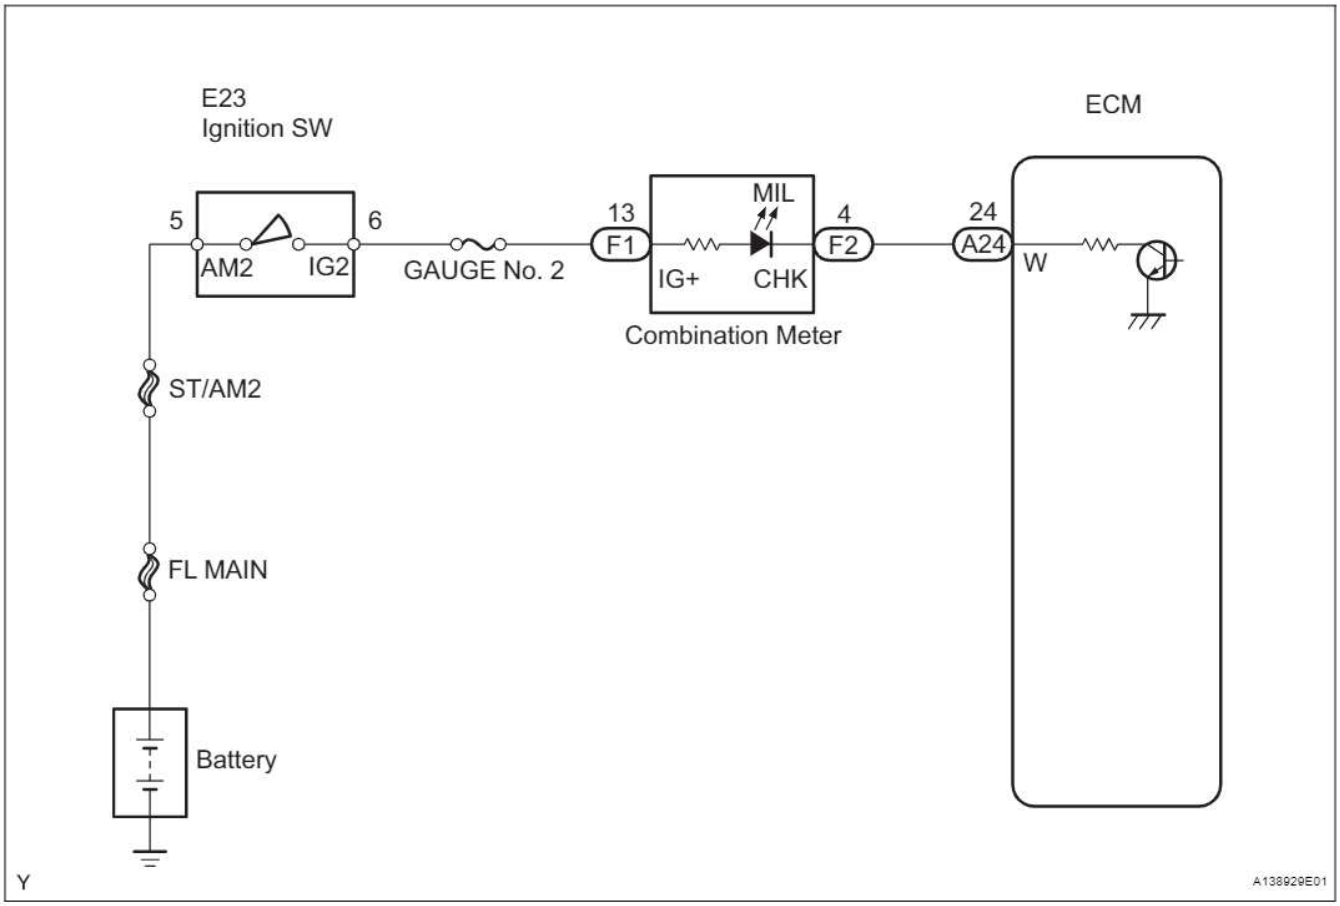

INSPECTION PROCEDURE

1	CHECK THAT MIL IS ILLUMINATED

(a) Perform troubleshooting in accordance with the table below.
Result

Condition	Proceed to
MIL remains ON	A
MIL does not illuminate	B

B → Go to step 5

A

2	CHECK WHETHER MIL TURNS OFF

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(d) Check if any DTCs have been stored. Note down any DTCs.
(e) Clear the DTCs (See page ES-38).
(f) Check if the MIL goes off.
Standard:
MIL goes off.

ES


OK → **REPAIR CIRCUITS INDICATED BY OUTPUT DTCS**

NG

3	CHECK HARNESS AND CONNECTOR (CHECK FOR SHORT IN WIRE HARNESS)

Wire Harness Side:

A24 ECM Connector



Front View


A115671E23

(a) Disconnect the A24 ECM connector.
(b) Turn the ignition switch to the ON position.
(c) Check that the MIL is not illuminated.
OK:
MIL is not illuminated.
(d) Reconnect the ECM connector.

OK → **REPLACE ECM**

NG

4	CHECK HARNESS AND CONNECTOR (COMBINATION METER - ECM)

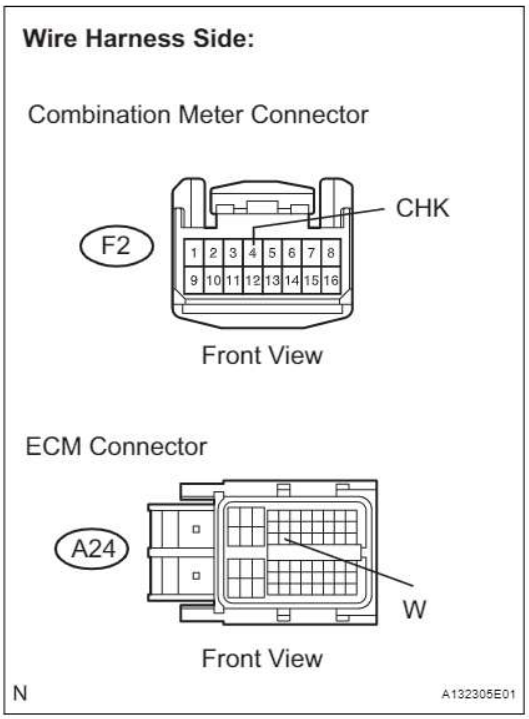

(a) Disconnect the A24 ECM connector.
(b) Disconnect the F2 combination meter connector.
(c) Measure the resistance between the terminals of the wire harness side connectors.
Standard resistance (Check for short)

Tester Connection	Specified Condition
A24-24 (W) or F2-4 (CHK) - Body ground	10 kΩ or higher

(d) Reconnect the ECM connector.
(e) Reconnect the combination meter connector.

OK → **REPAIR OR REPLACE COMBINATION METER ASSEMBLY**

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

5	CHECK THAT MIL IS ILLUMINATED

(a) Check if the MIL is illuminated when the ignition switch is turned ON position.
OK:
MIL is illuminated.

OK → **SYSTEM OK**

NG

6	CHECK THAT ENGINE STARTS

(a) Turn the ignition switch to the ON position.
(b) Start the engine.
Result

Result	Proceed to
Engine starts	A
Engine does not start*	B

HINT:
*: The intelligent tester cannot communicate with the ECM.

B → GO TO VC OUTPUT CIRCUIT

A

7	INSPECT COMBINATION METER ASSEMBLY (MIL CIRCUIT)

(a) Check the MIL circuit (See page ME-19).

NG → REPAIR OR REPLACE COMBINATION METER ASSEMBLY

OK


CHECK AND REPLACE HARNESS AND CONNECTOR (COMBINATION METER - ECM)

Fuel Pump Control Circuit


DESCRIPTION

When the engine is cranked, the starter relay drive signal output from the STAR terminal of the ECM is input into the STA terminal of the ECM, and NE signal generated by the crankshaft position sensor is also input into the NE+ terminal. Thus, the ECM interprets that the engine is cranked, and turns the transistor Tr1 in the ECM internal circuit ON. The current flows to the C/OPN (Circuit Opening) relay by turning the Tr1 ON. Then, the fuel pump operates.

While the NE signal is input into the ECM, when the engine is running, the ECM turns the Tr1 on continuously.

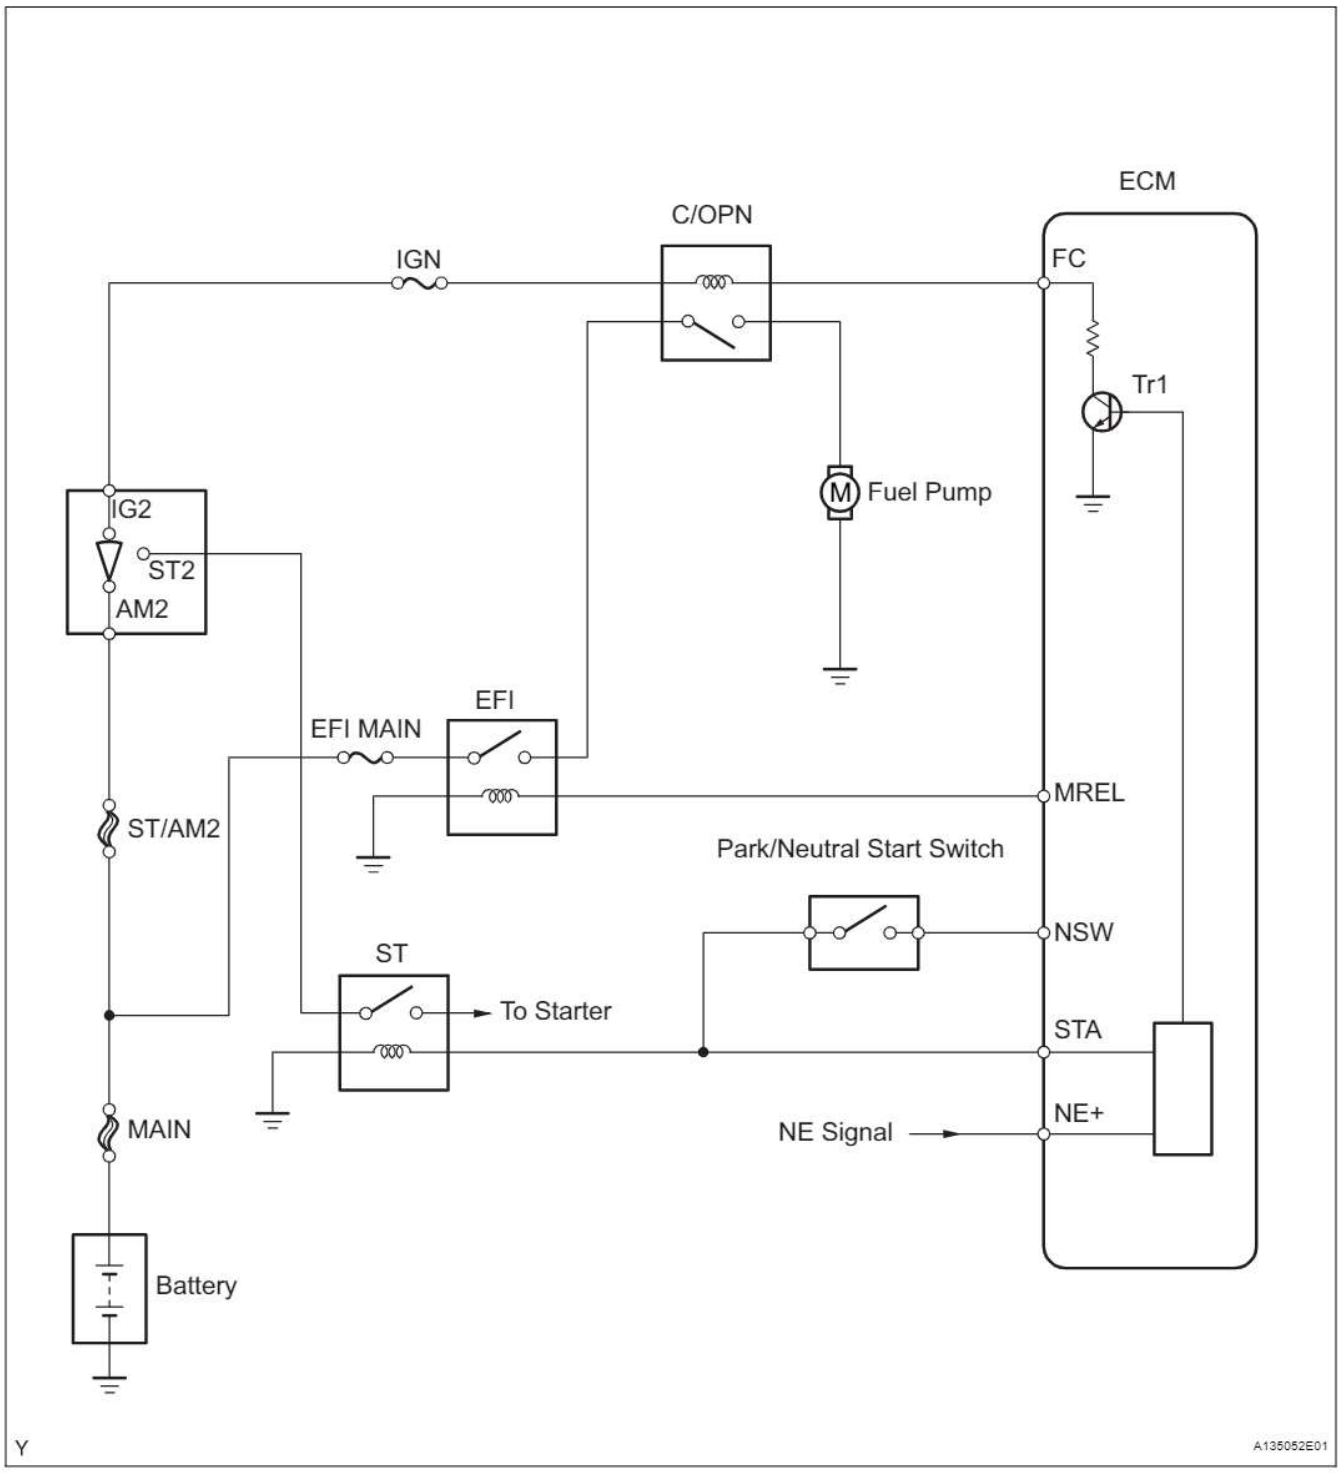

WIRING DIAGRAM

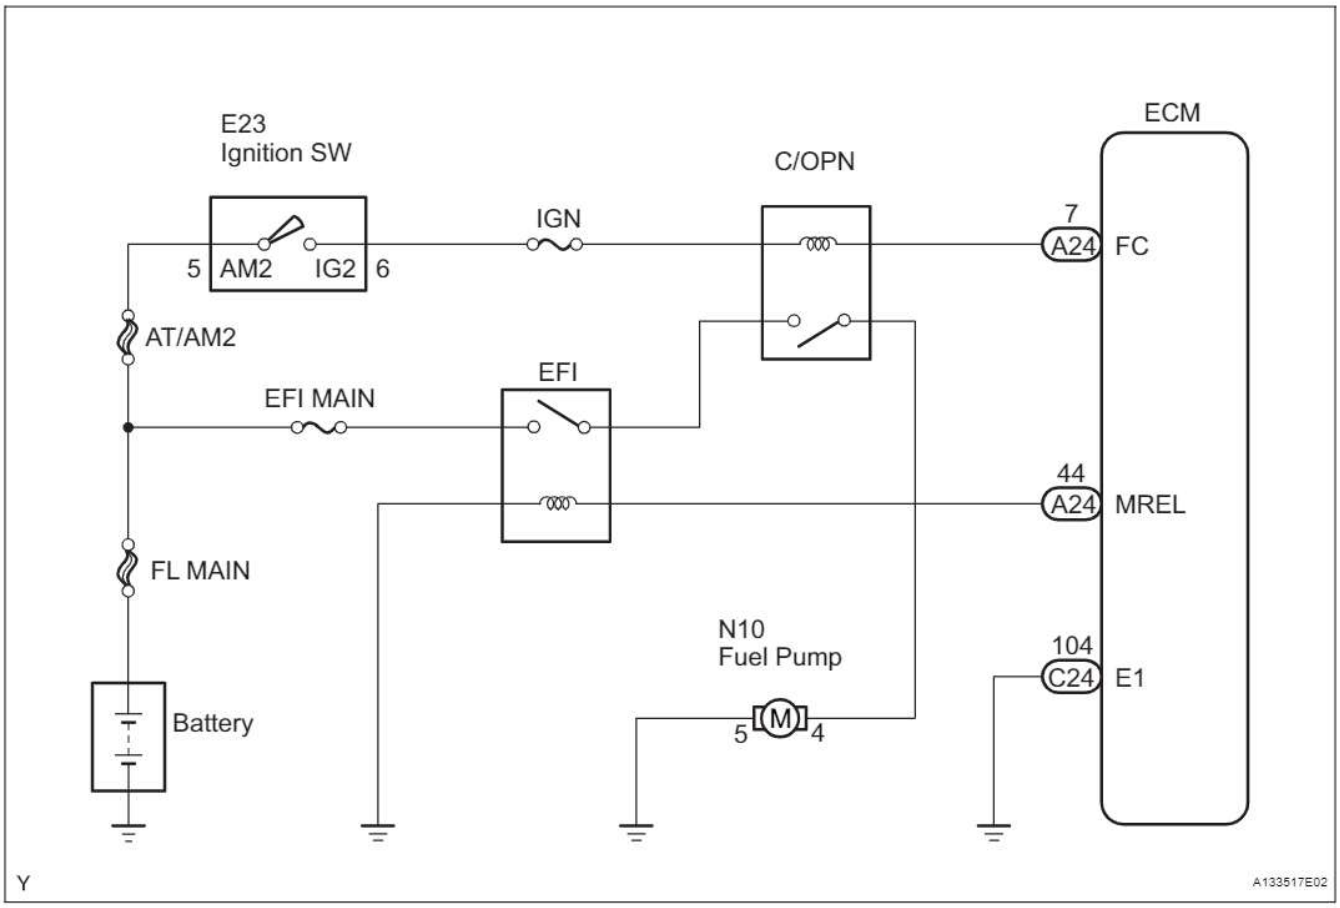

INSPECTION PROCEDURE

1	PERFORM ACTIVE TEST USING INTELLIGENT TESTER (OPERATE C/OPN RELAY)

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / FUEL PUMP / SPD.
(d) Check whether the fuel pump operation sound occurs when performing the Active Test on the tester.
OK:
Fuel pump operating sound occurs.

NG → **Go to step 2**

OK →


PROCEED TO NEXT CIRCUIT INSPECTION SHOWN IN PROBLEM SYMPTOMS TABLE

2	CHECK ECM POWER SOURCE CIRCUIT

NG → REPAIR OR REPLACE ECM POWER SOURCE CIRCUIT

OK

3	INSPECT ENGINE ROOM J/B (C/OPN RELAY)

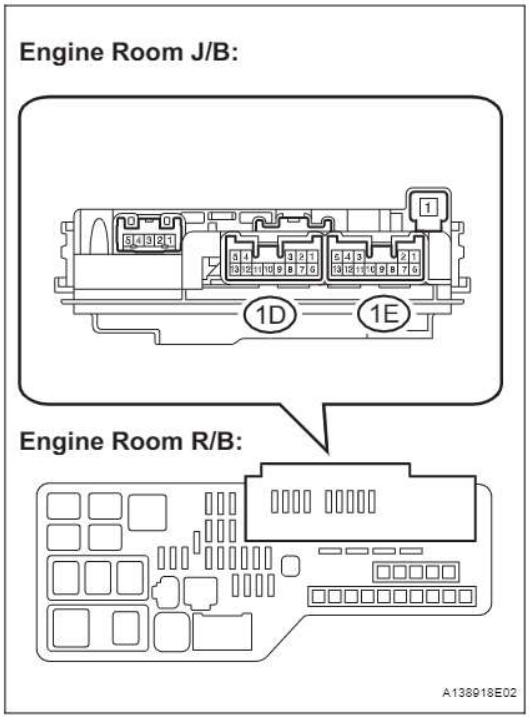

(a) Remove the engine room J/B from the engine room R/B.
(b) Inspect the C/OPN relay.
(1) Measure the C/OPN relay resistance.
Standard resistance

Tester Connection	Specified Condition
1E-7 - 1E-13	10 kΩ or higher
	Below 1 Ω (Apply battery voltage between terminals 1D-12 and 1E-8)


(c) Reinstall the engine room J/B.

NG → REPLACE ENGINE ROOM J/B

OK

ES

4	INSPECT ECM (FC VOLTAGE)

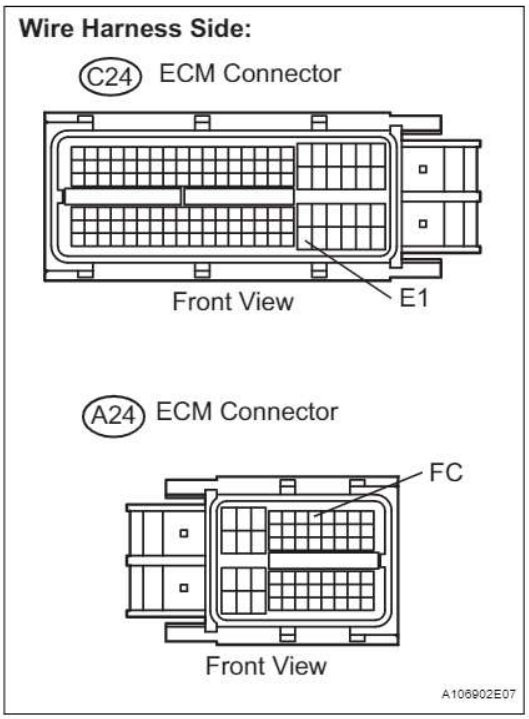

(a) Disconnect the A24 and C24 ECM connectors.
(b) Measure the voltage between the terminals of the A24 and C24 ECM connectors.

Standard voltage

Tester Connection	Specified Condition
A24-7 (FC) - C24-104 (E1)	9 to 14 V

(c) Reconnect the ECM connectors.

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR (ECM - BATTERY)


OK

5	INSPECT FUEL PUMP

NG → REPLACE FUEL PUMP

OK

6	CHECK HARNESS AND CONNECTOR (C/OPN RELAY - FUEL PUMP - BODY GROUND)

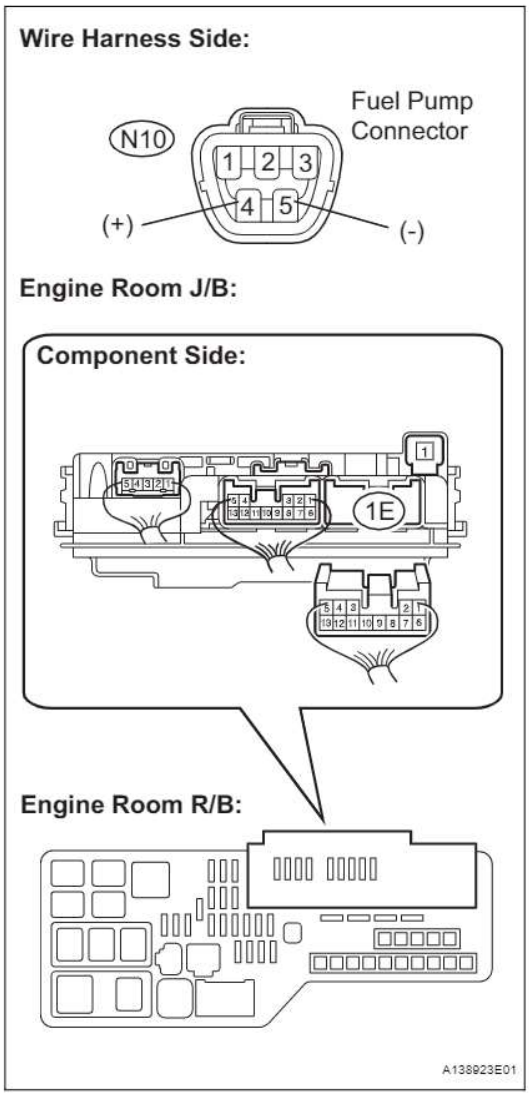

(a) Check the harness and the connectors between the engine room J/B and the fuel pump.
(1) Remove the engine room J/B from the engine room R/B.
(2) Disconnect the 1E engine room J/B connector.
(3) Disconnect the N10 fuel pump connector.
(4) Measure the resistance between the terminals.

Standard resistance (Check for open)

Tester Connection	Specified Condition
1E-13 - N10-4 (Fuel pump)	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
1E-13 or N10-4 (Fuel pump) - Body ground	10 kΩ or higher

(b) Check the harness and the connectors between the fuel pump and body ground.
(1) Disconnect the N10 fuel pump connector.
(2) Measure the resistance.

Standard resistance (Check for open)

Tester Connection	Specified Condition
N10-5 (Fuel pump) - Body ground	Below 1 Ω

(c) Reconnect the engine room J/B connector.
(d) Reconnect the fuel pump connector.
(e) Reinstall the engine room J/B.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**


OK

REPLACE ECM

VC Output Circuit

DESCRIPTION

The ECM constantly generates 5 V power from the battery voltages supplied to the +B (BATT) terminal to operate the microprocessor. The ECM also provides this power to the sensors through the VC output circuit.

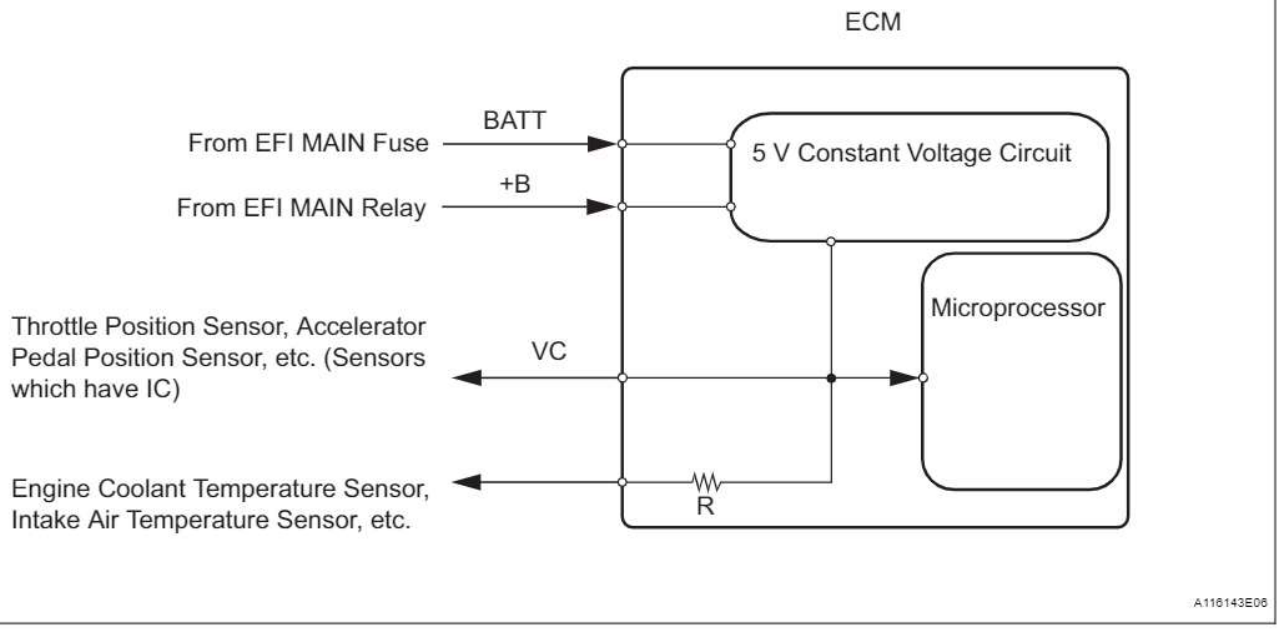


When the VC circuit is short-circuited, the microprocessor in the ECM and sensors that are supplied with power through the VC circuit are inactivated because the power is not supplied from the VC circuit. Under this condition, the system does not start up and the MIL does not illuminate even if the system malfunctions.

HINT:

Under normal conditions, the MIL is illuminated for several seconds when the ignition switch is first turned ON position. The MIL goes off when the engine is started.

WIRING DIAGRAM

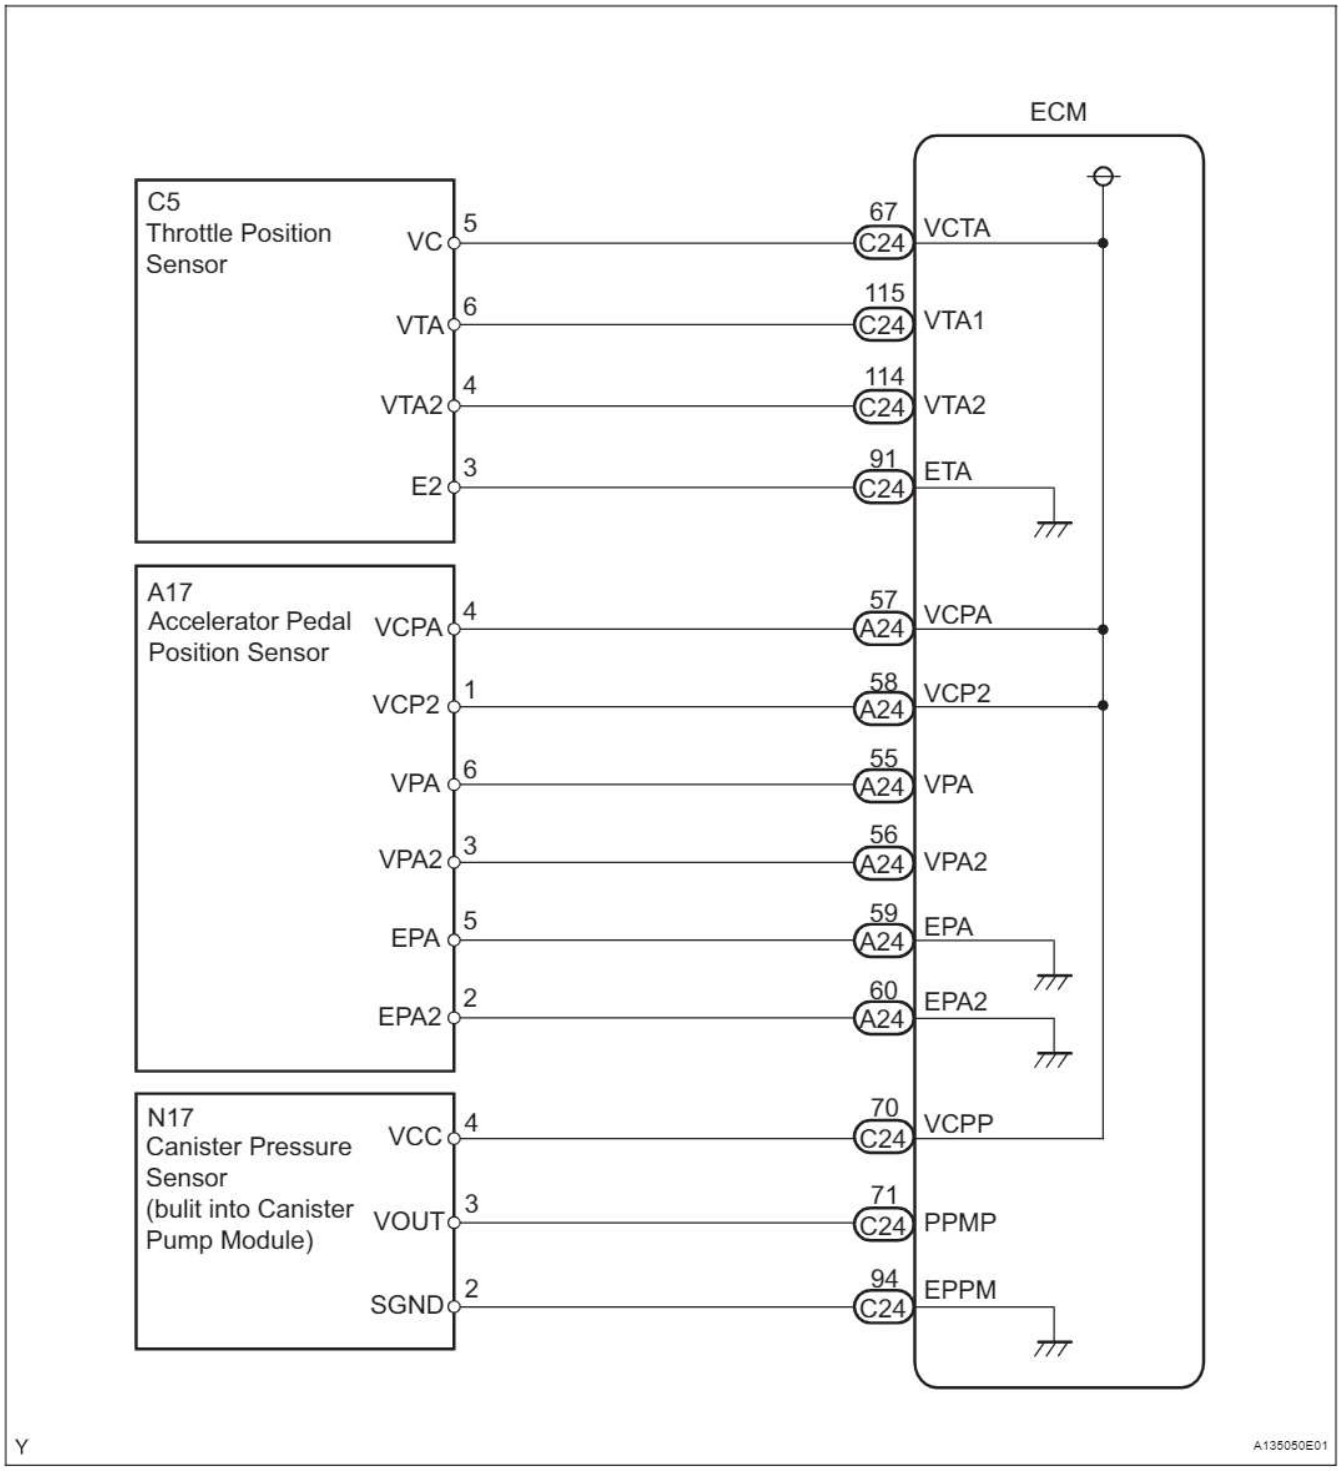

INSPECTION PROCEDURE

1	CHECK MIL CONDITION

(a) Check that the Malfunction Indicator Lamp (MIL) lights up when turning the ignition switch to the ON position.
OK:
MIL lights up.

OK → SYSTEM OK

NG

2	CHECK COMMUNICATION BETWEEN INTELLIGENT TESTER AND ECM

(a) Connect the intelligent tester to the DLC3.
(b) Turn the ignition switch to the ON position and turn the tester on.
(c) Check for communication between the tester and ECM.

Result

Result	Proceed to
Communication is possible	A
Communication is not possible	B

A → GO TO MIL CIRCUIT

B

3	CHECK MIL (THROTTLE POSITION SENSOR)

(a) Disconnect the C5 throttle body connector.
(b) Turn the ignition switch to the ON position.
(c) Check the MIL.

Result

Result	Proceed to
MIL illuminates	A
MIL does not illuminate	B

(d) Reconnect the throttle body connector.

A → REPLACE THROTTLE BODY ASSEMBLY

B

4	CHECK MIL (ACCELERATOR PEDAL POSITION SENSOR)

(a) Disconnect the A17 accelerator pedal position sensor connector.
(b) Turn the ignition switch to the ON position.
(c) Check the MIL.

Result


Result	Proceed to
MIL illuminates	A
MIL does not illuminate	B

(d) Reconnect the accelerator pedal position sensor connector.

A → REPLACE ACCELERATOR PEDAL ASSEMBLY

B

5 CHECK MIL (CANISTER PUMP MODULE)

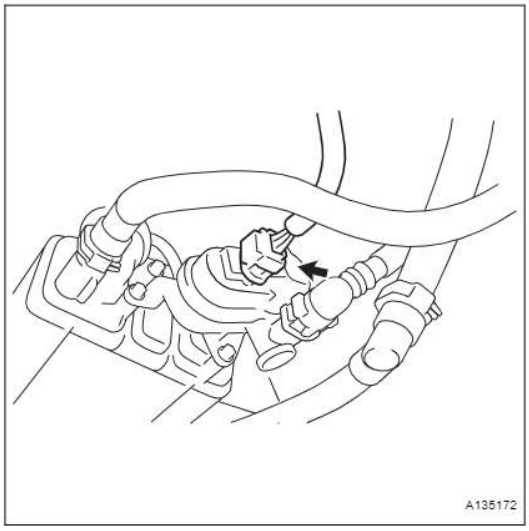

(a) Disconnect the N17 canister pump module connector.
(b) Turn the ignition switch to the ON position.
(c) Check the MIL.
Result


Result	Proceed to
MIL illuminates	A
MIL does not illuminate	B

(d) Reconnect the canister pump module connector.

A → **REPLACE CHARCOAL CANISTER ASSEMBLY**

B

6 CHECK HARNESS AND CONNECTOR

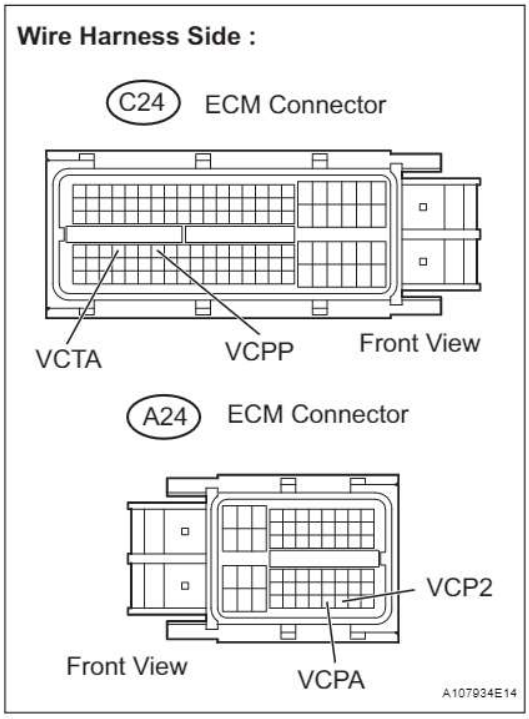

(a) Disconnect the C5 throttle body connector.
(b) Disconnect the A17 accelerator pedal position sensor connector.
(c) Disconnect the N17 canister pump module connector.
(d) Disconnect the A24 and C24 ECM connectors.
(e) Measure the resistance between the terminals of the wire harness side connectors.
Standard resistance (Check for short)

Tester Connection	Specified Condition
C24-67 (VCTA) - Body ground	10 kΩ or higher
A24-57 (VCPA) - Body ground	10 kΩ or higher
A24-58 (VCP2) - Body ground	10 kΩ or higher
C24-70 (VCPP) - Body ground	10 kΩ or higher

(f) Reconnect the throttle body connector.
(g) Reconnect the accelerator pedal position sensor connector.
(h) Reconnect the canister pump module connector.
(i) Reconnect the ECM connectors.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

ES

OK

REPLACE ECM

EVAP System

RELATED DTCS

DTC	Monitoring Item	See page
P043E	Reference orifice clogged (built into canister pump module)	ES-203
P043F	Reference orifice high-flow (built into canister pump module)	
P0441	• Purge VSV (Vacuum Switching Valve) stuck closed • Purge VSV stuck open • Purge flow	ES-208
P0450	Canister pressure sensor (built into canister pump module) voltage abnormal fluctuation	ES-215
P0451	• Canister pressure sensor (built into canister pump module) noise • Canister pressure sensor (built into canister pump module) signal becomes fixed/flat	
P0452	Canister pressure sensor (built into canister pump module) voltage low	
P0453	Canister pressure sensor (built into canister pump module) voltage high	
P0455	EVAP gross leak	ES-224
P0456	EVAP small leak	
P2401	Leak detection pump stuck OFF (built into canister pump module)	ES-203
P2402	Leak detection pump stuck ON (built into canister pump module)	
P2419	Vent valve stuck closed (built into canister pump module)	
P2420	Vent valve stuck open (vent) (built into canister pump module)	ES-330
P2610	Soak timer (built into ECM)	ES-334

If any EVAP system DTCs are set, the malfunctioning area can be determined using the table below.

DTCs / Malfunctioning Areas	P043E P043F	P0441	P0450	P0451	P0452	P0453	P0455	P0456	P2401 P2402	P2419	P2420
Reference orifice clogged	●								●	●	
Reference orifice high-flow	●								●	●	
Purge VSV stuck open		●					●				
Purge VSV stuck closed		●									
Canister pressure sensor fixed output				●							
Canister pressure sensor noise				●							
Canister pressure sensor low output			●		●						
Canister pressure sensor high output			●			●					
Gross leak		●					●				
Small leak								●			
Leak detection pump stuck OFF	●								●	●	
Leak detection pump stuck ON	●								●	●	
Vent valve stuck closed	●								●	●	
Vent valve stuck open (vent)											●

Y


A106731E11

NOTICE:
If the reference pressure difference between the first and second checks is greater than the specification, all the DTCs relating to the reference pressure (P043E, P043F, P2401, P2402 and P2419) are stored.

DESCRIPTION

Location of EVAP (Evaporative Emission) System:

Except PZEV

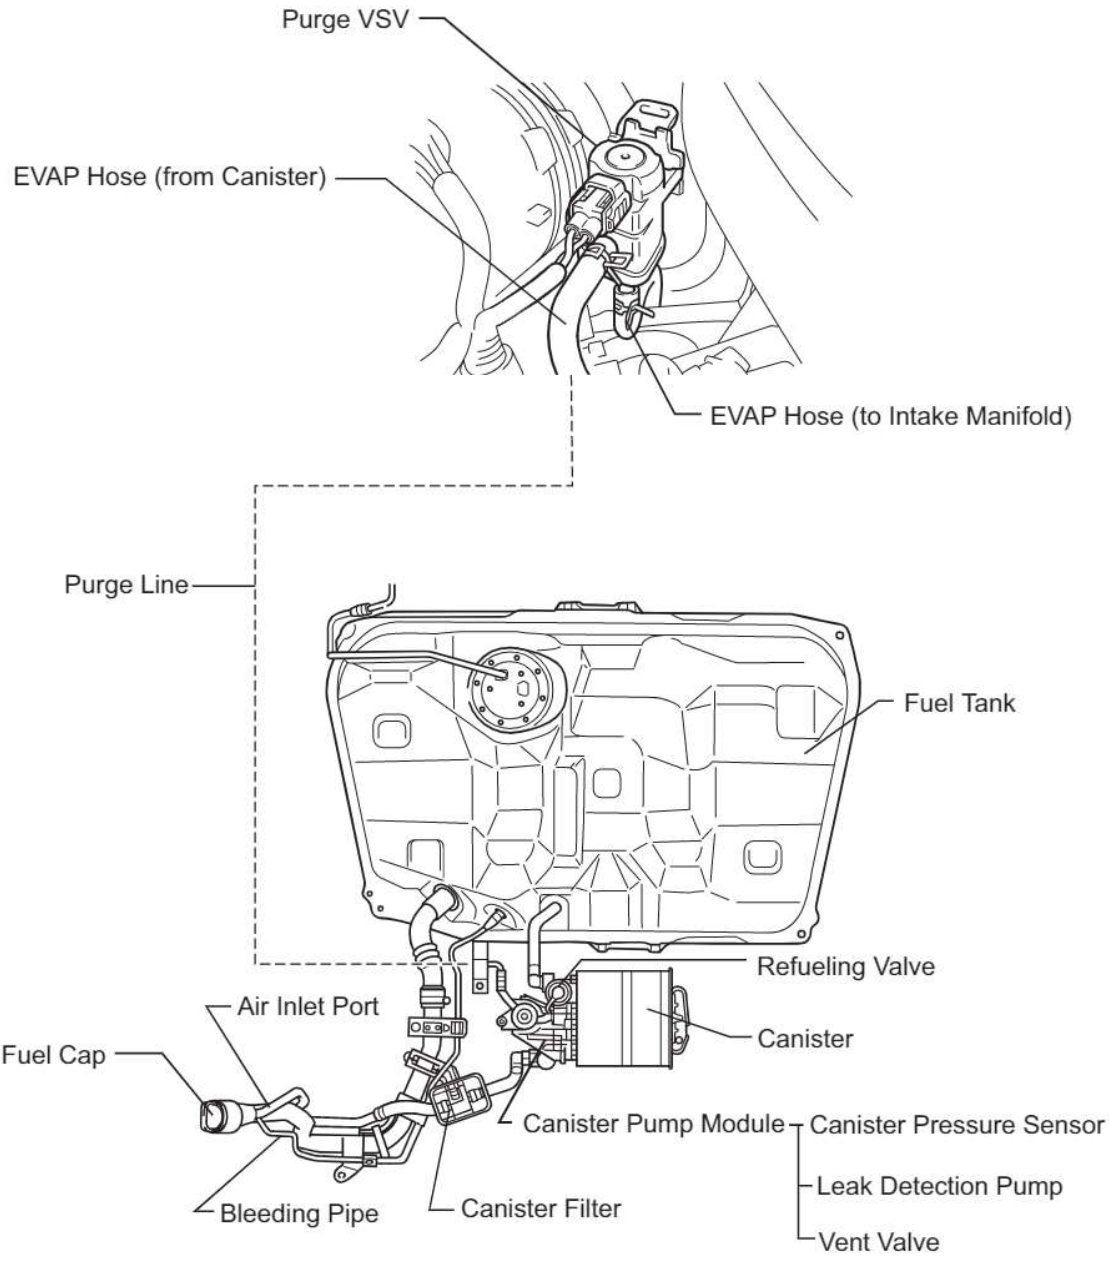

Note:

The canister is located near the fuel tank, underneath the body.


N

A135200E01

ES

Location of EVAP (Evaporative Emission) System:

PZEV

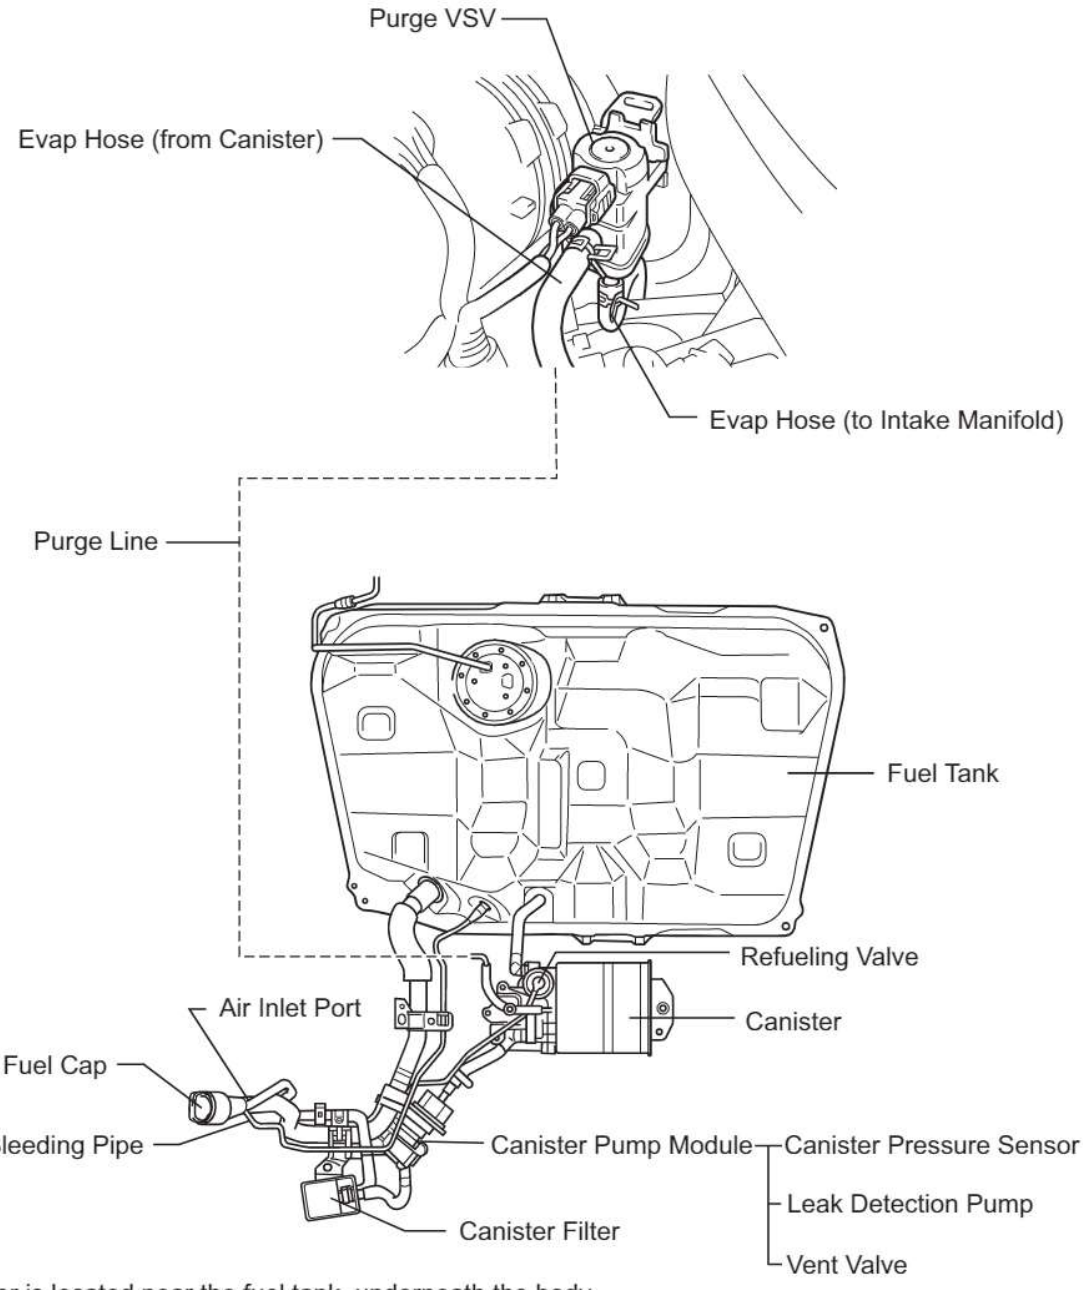


Note:

The canister is lecated near the fuel tank, underneath the body.

N

A135201E01

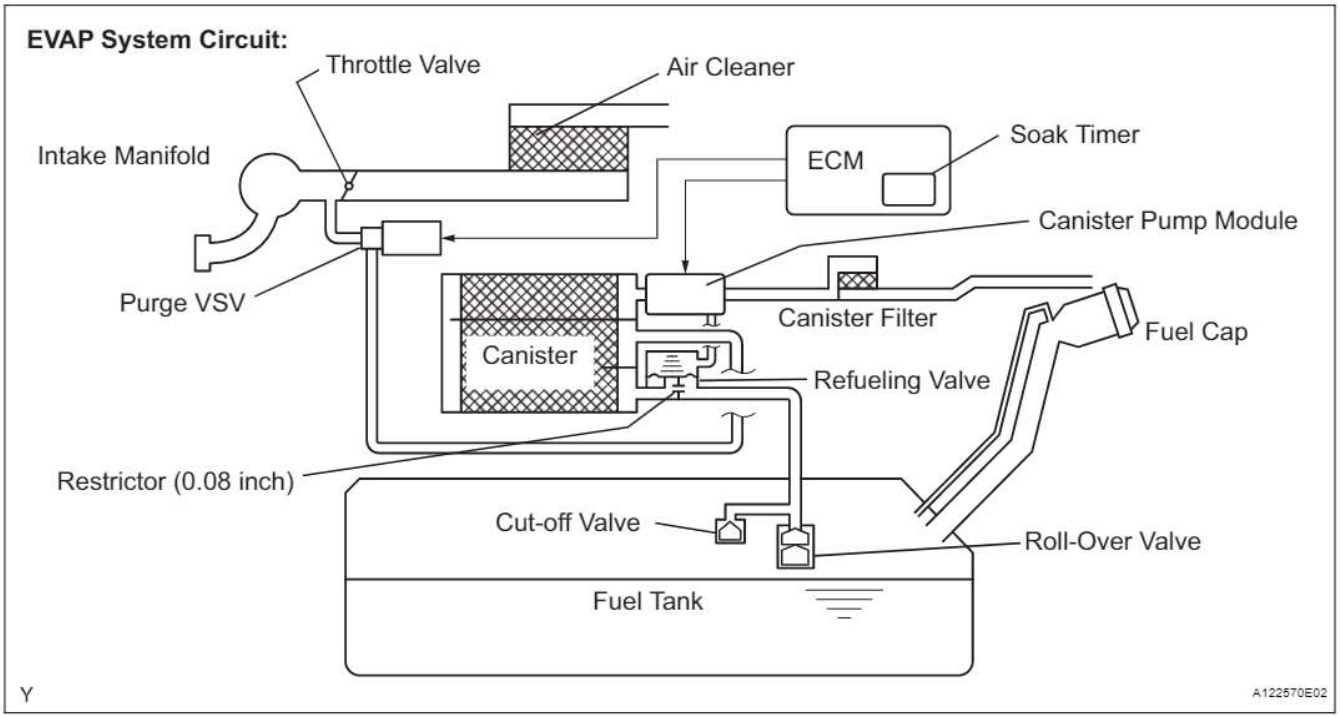

NOTICE:

In this vehicle's EVAP system, turning ON the vent valve does not seal off the EVAP system. To check for leaks in the EVAP system, disconnect the air inlet vent hose and apply pressure from the atmospheric side of the canister.

While the engine is running, if a predetermined condition (closed-loop, etc.) is met, the purge VSV is opened by the ECM and stored fuel vapors in the canister are purged into the intake manifold. The ECM changes the duty cycle ratio of the purge VSV to control purge flow volume.

The purge flow volume is also determined by the intake manifold pressure. Atmospheric pressure is allowed into the canister through the vent valve to ensure that the purge flow is maintained when the negative pressure (vacuum) is applied to the canister.

The following two monitors run to confirm the appropriate EVAP system operation.

1. **Key-off monitor**

   This monitor checks for EVAP (Evaporative Emission) system leaks and canister pump module malfunctions. The monitor starts 5 hours* after the ignition switch is turned off. At least 5 hours are required for the fuel to cool down to stabilize the EVAP pressure, thus making the EVAP system monitor more accurate.

   The leak detection pump creates negative pressure (vacuum) in the EVAP system and the pressure is measured. Finally, the ECM monitors for leaks from the EVAP system, and malfunctions in both the canister pump module and purge VSV, based on the EVAP pressure.

   HINT:

   *: If the engine coolant temperature is not below 35°C (95°F) 5 hours after the ignition switch is turned off, the monitor check starts 2 hours later. If it is still not below 35°C (95°F) 7 hours after the ignition switch is turned off, the monitor check starts 2.5 hours later.

2. **Purge flow monitor**

   The purge flow monitor consists of the two monitors. The 1st monitor is conducted every time and the 2nd monitor is activated if necessary.


   - The 1st monitor

     While the engine is running and the purge VSV (Vacuum Switching Valve) is ON (open), the ECM monitors the purge flow by measuring the EVAP pressure change. If negative pressure is not created, the ECM begins the 2nd monitor.

- The 2nd monitor
  The vent valve is turned OFF (open) and the EVAP pressure is measured. If the variation in the pressure is less than 0.5 kPa-g (3.75 mmHg-g), the ECM interprets this as the purge VSV being stuck closed, and illuminates the MIL and sets DTC P0441 (2 trip detection logic).

Atmospheric pressure check:
In order to ensure reliable malfunction detection, the variation between the atmospheric pressures, before and after conduction of the purge flow monitor, is measured by the ECM.


EVAP Purge Flow:

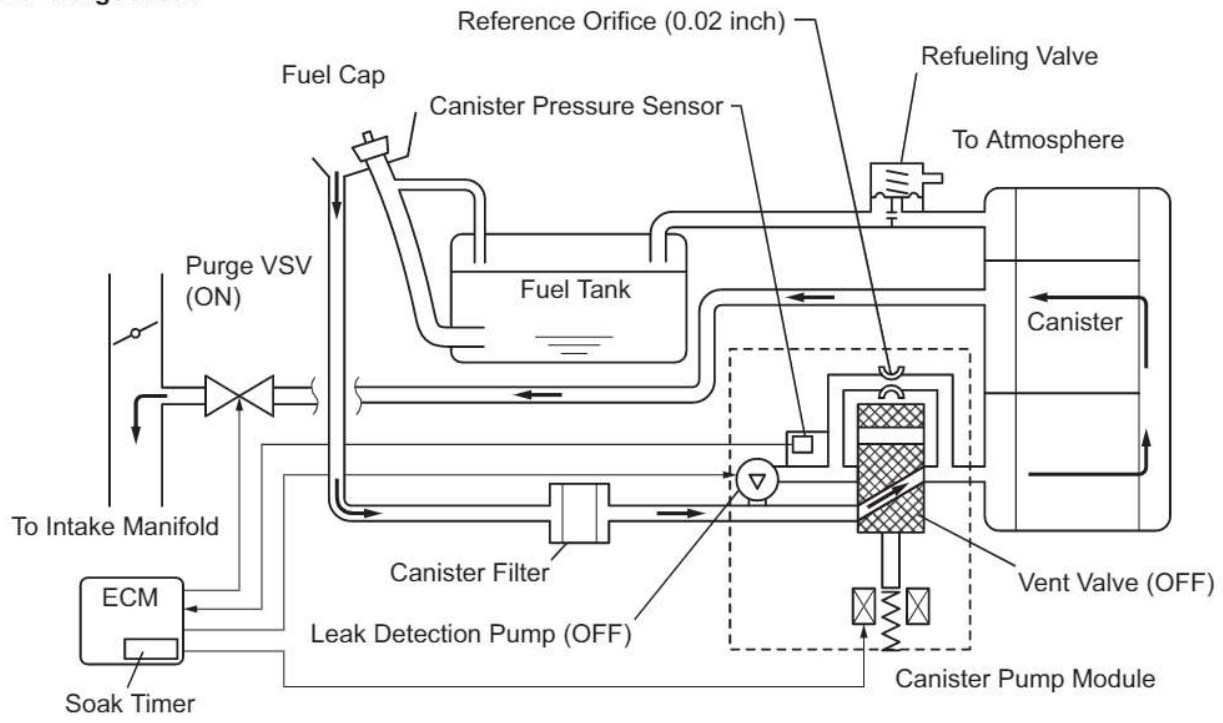

Components	Operations
Canister	Contains activated charcoal to absorb EVAP (Evaporative Emissions) generated in fuel tank.
Cut-off valve	Located in fuel tank. Valve floats and closes when fuel tank 100 % full.
Purge VSV (Vacuum Switching Valve)	Opens or closes line between canister and intake manifold. ECM uses purge VSV to control EVAP purge flow. In order to discharge EVAP absorbed by canister to intake manifold, ECM opens purge VSV. EVAP discharge volume to intake manifold controlled by purge VSV duty cycle ratio (current-carrying time) (Open: ON; Closed: OFF).
Refueling valve	Controls EVAP pressure from fuel tank to canister. Valve consists of diaphragm, spring and restrictor (diameter: 0.08 inch). When fuel vapor and pressure inside fuel tank increase, valve opens. While EVAP purged, valve closes and restrictor prevents large amount of vacuum from affecting pressure in fuel tank. Valve opened while refueling.
Roll-over valve	Located in fuel tank. Valve closed by its own weight when vehicle overturns to prevent fuel from spilling out.
Soak timer	Built into ECM. To ensure accurate EVAP monitor, measures 5 hours (+-15 min) after ignition switch turned off. This allows fuel to cool down, stabilizing EVAP pressure. When approximately 5 hours elapsed, ECM activates (refer to fig. 3).
Canister pump module	Consists of (a) to (d) below. Canister pump module cannot be disassembled.
(a) Vent valve	Vents and closes EVAP system. When ECM turns valve ON, EVAP system closed. When ECM turns valve OFF, EVAP system vented. Negative pressure (vacuum) created in EVAP system to check for EVAP leaks by closing purge VSV, turning on vent valve (closed) and operating leak detection pump (refer to fig. 1).
(b) Canister pressure sensor	Indicates pressure as voltages. ECM supplies regulated 5 V to canister pressure sensor, and uses feedback from sensor to monitor EVAP system pressure (refer to fig. 2).


Components	Operations
(c) Leak detection pump	Creates negative pressure (vacuum) in EVAP system for leak check.
(d) Reference orifice	Has opening with 0.02 inch diameter. Vacuum produced through orifice by closing purge VSV, turning off vent valve and operating leak detection pump, to monitor reference pressure. Reference pressure indicates small leak of EVAP.

Canister Pump Module (fig. 1):

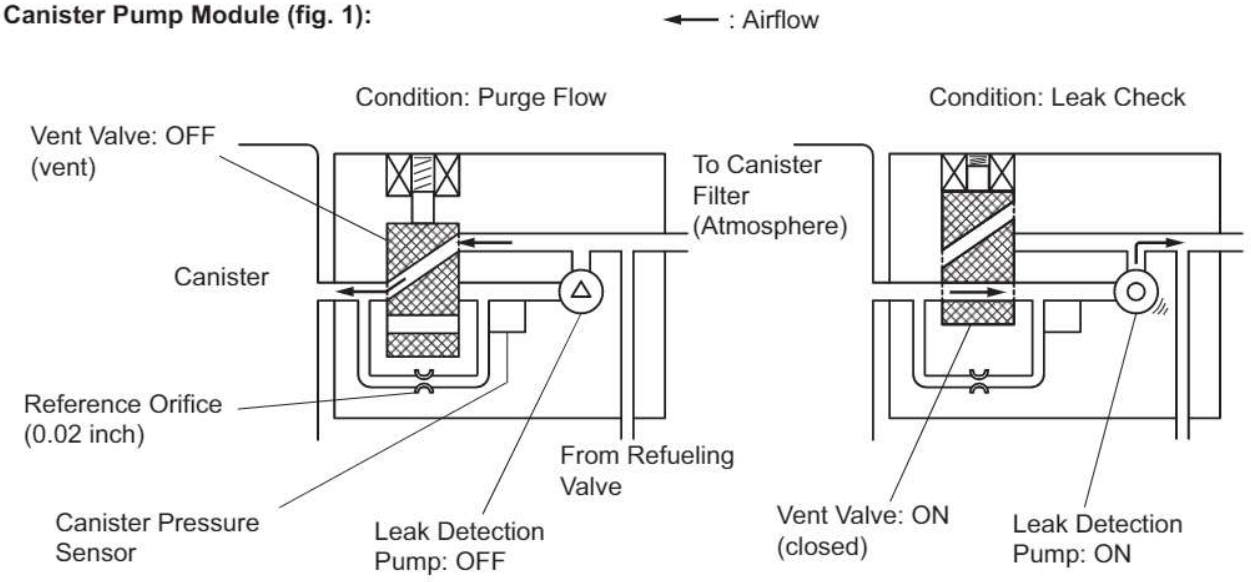

Y A115902E04

Canister Pressure Sensor Specification (fig. 2):

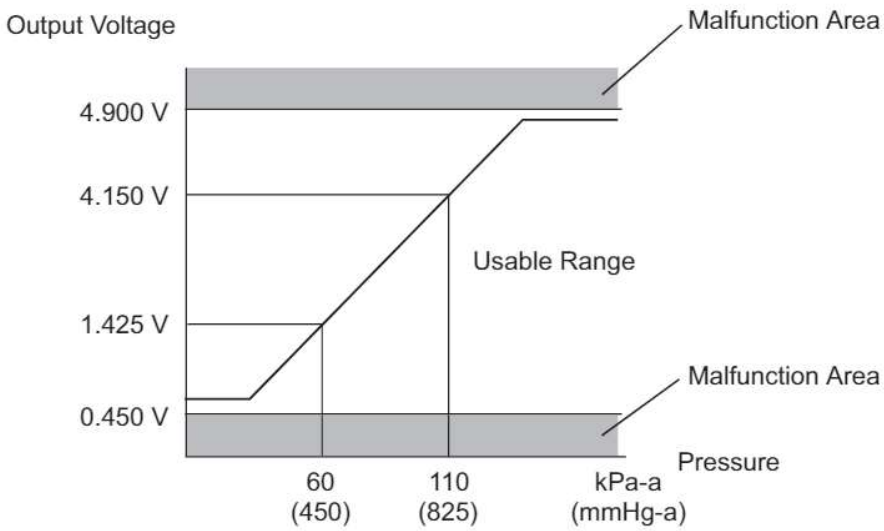


HINT:


Standard atmospheric pressure is 101.3 kPa-a (760 mmHg-a)

A115543E06

Soak Timer Circuit (fig. 3):

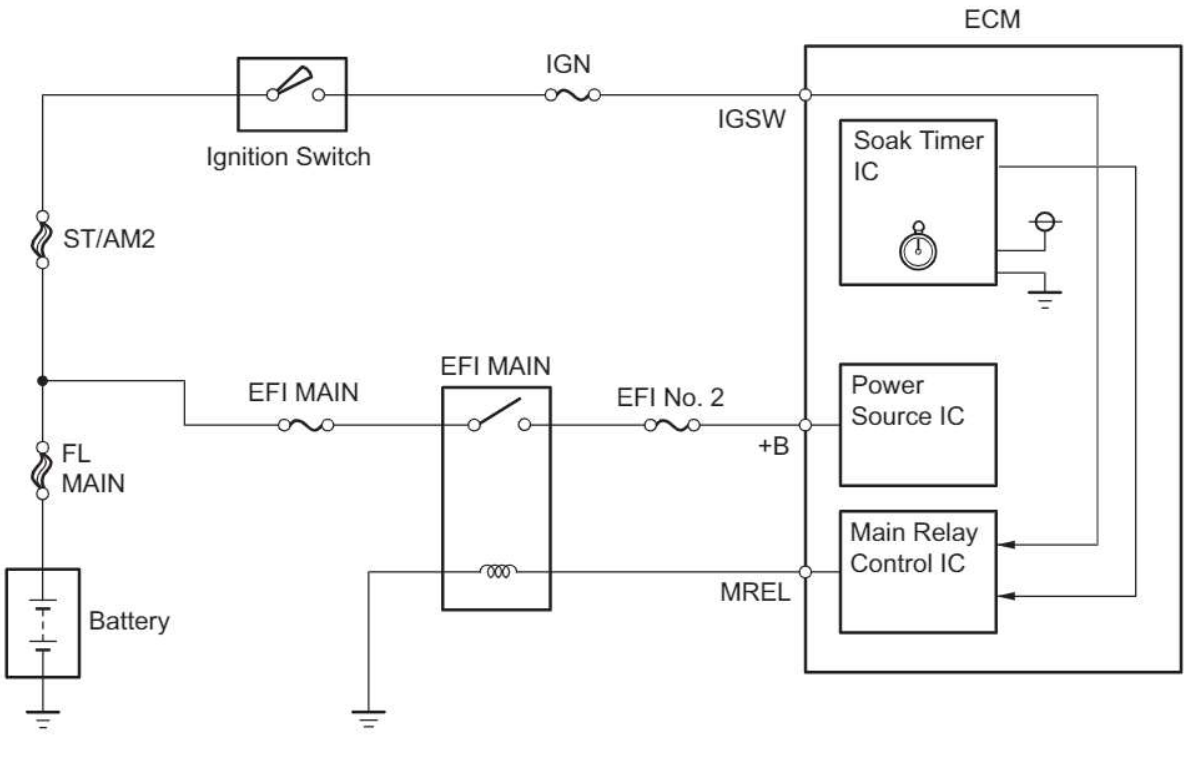

WIRING DIAGRAM

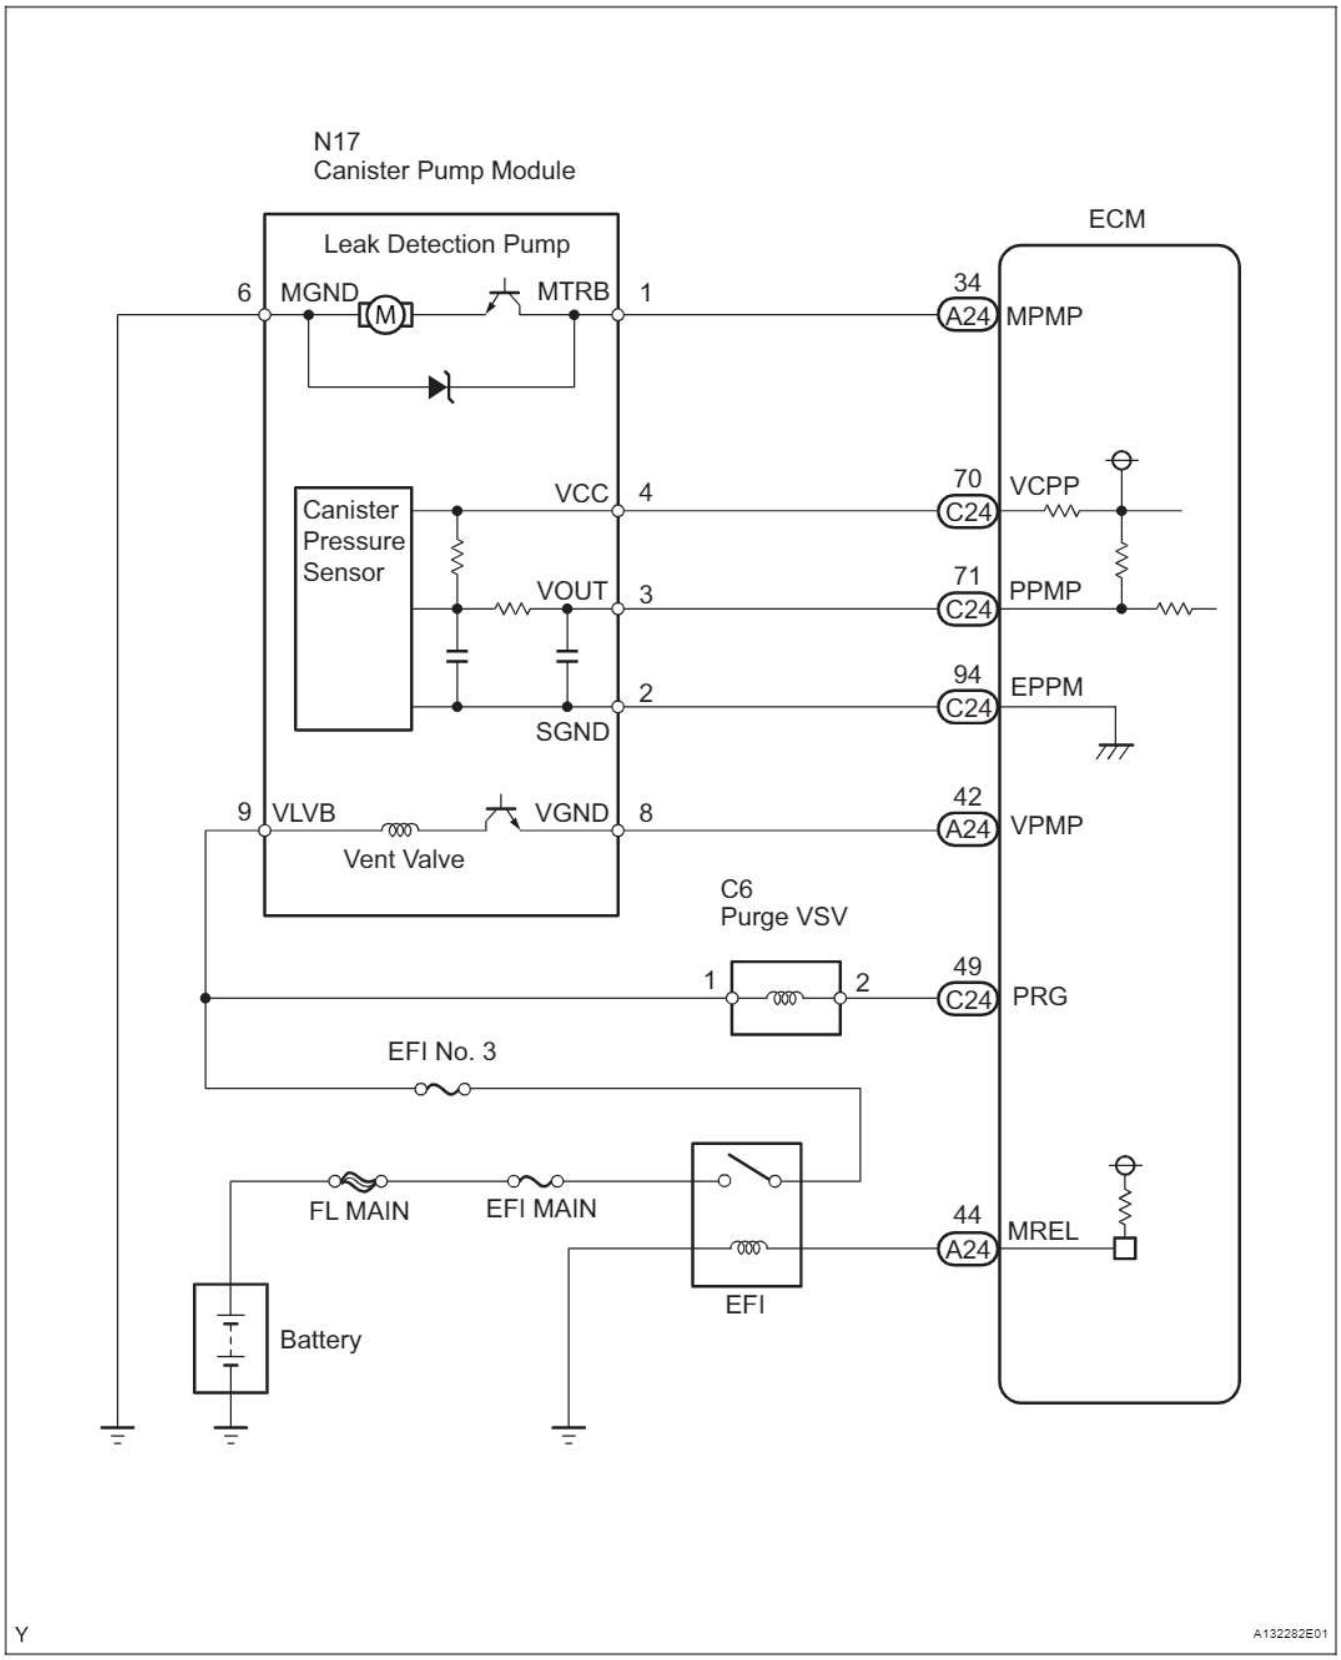

INSPECTION PROCEDURE

NOTICE:

The intelligent tester is required to conduct the following diagnostic troubleshooting procedure.

HINT:

- Using intelligent tester monitor results enables the EVAP (Evaporative Emission) system to be confirmed.
- Read freeze frame data using the intelligent tester. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was moving or stationary, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

1	CONFIRM DTC

(a) Turn the ignition switch off and wait for 10 seconds.
(b) Turn the ignition switch to the ON position.
(c) Turn the ignition switch off and wait for 10 seconds.
(d) Connect an intelligent tester to the DLC3.
(e) Turn the ignition switch to the ON position and turn the tester on.
(f) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / CURRENT CODES.
(g) Confirm DTCs and freeze frame data.
If any EVAP system DTCs are set, the malfunctioning area can be determined using the table below.
NOTICE:
If the reference pressure difference between the first and second checks is greater than the specification, all the DTCs relating to the reference pressure (P043E, P043F, P2401, P2402 and P2419) are stored.

DTCs / Malfunctioning Areas	P043E P043F	P0441	P0450	P0451	P0452	P0453	P0455	P0456	P2401 P2402	P2419	P2420
Reference orifice clogged	●								●	●	
Reference orifice high-flow	●								●	●	
Purge VSV stuck open		●					●				
Purge VSV stuck closed		●									
Canister pressure sensor fixed output				●							
Canister pressure sensor noise				●							
Canister pressure sensor low output			●		●						
Canister pressure sensor high output			●			●					
Gross leak		●					●				
Small leak								●			
Leak detection pump stuck OFF	●								●	●	
Leak detection pump stuck ON	●								●	●	
Vent valve stuck closed	●								●	●	
Vent valve stuck open (vent)											●

Y

A106731E11

ES

NEXT

2	PERFORM EVAP SYSTEM CHECK (AUTO OPERATION)

NOTICE:

- **The EVAP SYSTEM CHECK (AUTO OPERATION) consists of 5 steps performed automatically by the intelligent tester. It takes a maximum of approximately 18 minutes.**
- **Do not perform the EVAP SYSTEM CHECK when the fuel tank is more than 90% full because the cut-off valve may be closed, making the fuel tank leak check unavailable.**
- **Do not run the engine during this operation.**
- **When the temperature of the fuel is 35°C (95°F) or more, a large amount of vapor forms and any check results become inaccurate. When performing the EVAP SYSTEM CHECK, keep the temperature below 35°C (95°F).**

(a) Clear the DTCs (See page ES-38).


(b) On the tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / SYSTEM CHECK / EVAP SYS CHECK / AUTO OPERATION.

(c) After the EVAP SYSTEM CHECK is completed, check for pending DTCs by selecting the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES.
HINT:
If no pending DTCs are displayed, perform MONITOR CONFIRMATION (see "Diagnostic Help" menu). After this confirmation, check for pending DTCs. If no DTCs are displayed, the EVAP system is normal.

ES

NEXT

3	PERFORM EVAP SYSTEM CHECK (MANUAL OPERATION)

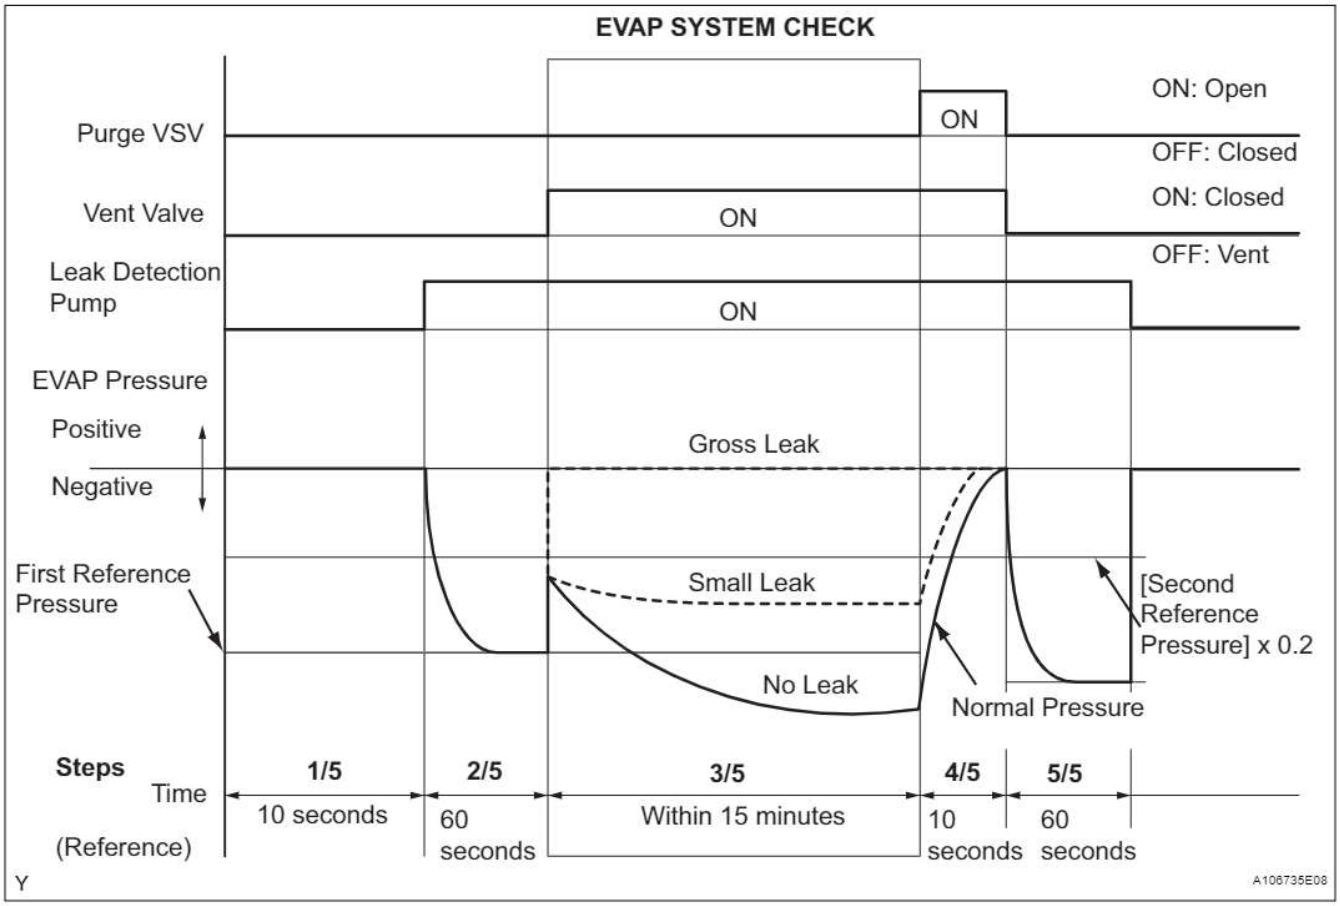

NOTICE:

- **In the EVAP SYSTEM CHECK (MANUAL OPERATION), perform the series of 5 EVAP SYSTEM CHECK steps manually using the intelligent tester.**
- **Do not perform the EVAP SYSTEM CHECK when the fuel tank is more than 90% full because the cut-off valve may be closed, making the fuel tank leak check unavailable.**
- **Do not run the engine during this operation.**


- **When the temperature of the fuel is 35°C (95°F) or more, a large amount of vapor forms and any check results become inaccurate. When performing the EVAP SYSTEM CHECK, keep the temperature below 35°C (95°F).**

(a) Clear the DTCs (See page ES-38).
(b) Select the following menu items: DIAGNOSIS / ENHANCED OBD II / SYSTEM CHECK / EVAP SYS CHECK / MANUAL OPERATION.

NEXT

4	PERFORM EVAP SYSTEM CHECK (STEP 1/5)

ES

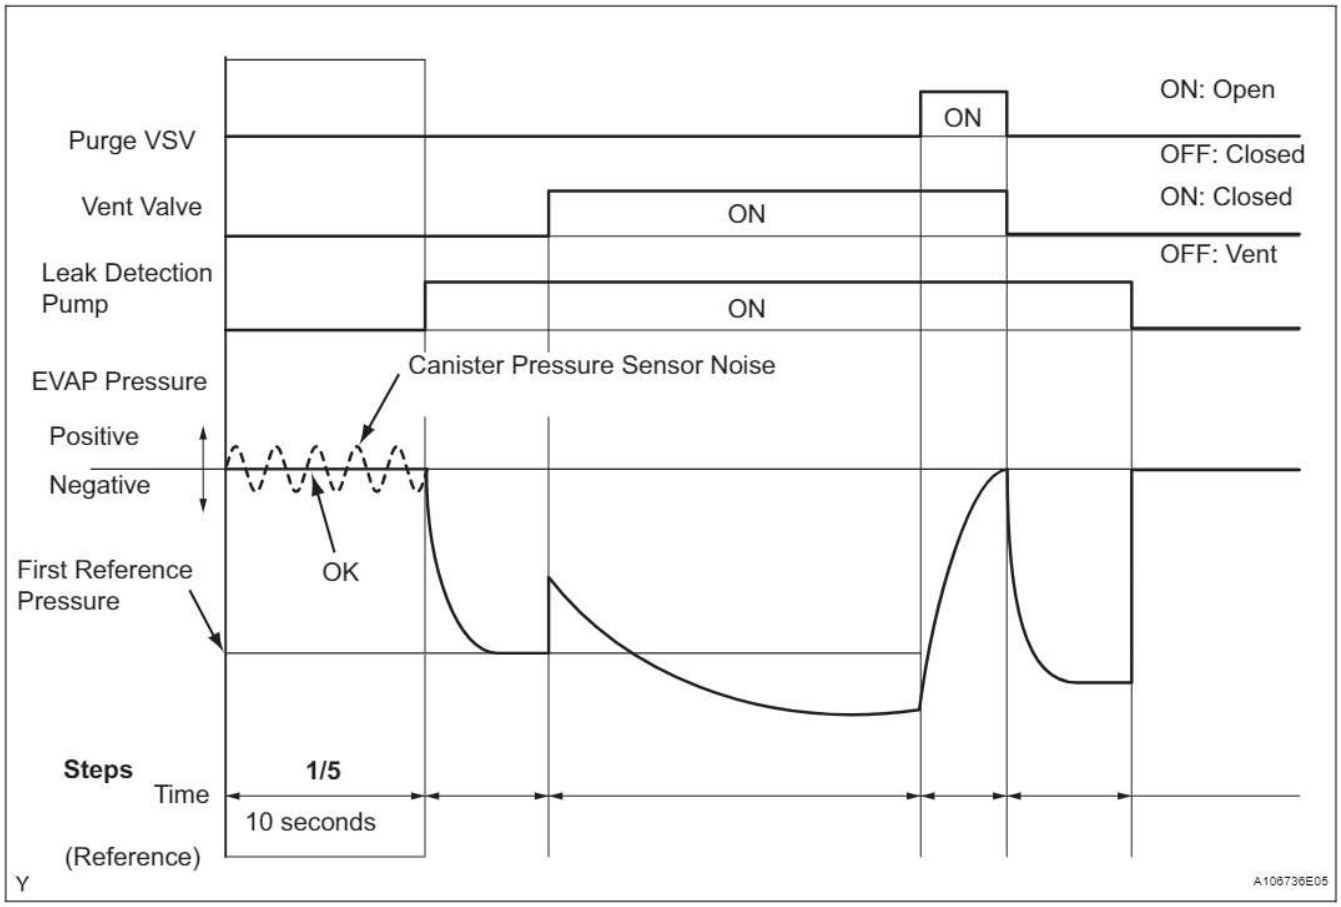

(a) Check the EVAP pressure in step 1/5.

Result


DTCs*	Test Result	Suspected Trouble Area	Proceed to
-	Virtually no variation in EVAP pressure	Not yet determined	A
P0451	EVAP pressure fluctuates by +-0.3 kPa-g (2.25 mmHg-g) or more	Canister pressure sensor noise	B

*: These DTCs are already present in the ECM when the vehicle arrives and are confirmed in the "CONFIRM DTC" procedures above.

B → Go to step 29

A

5	PERFORM EVAP SYSTEM CHECK (STEP 1/5 TO 2/5)

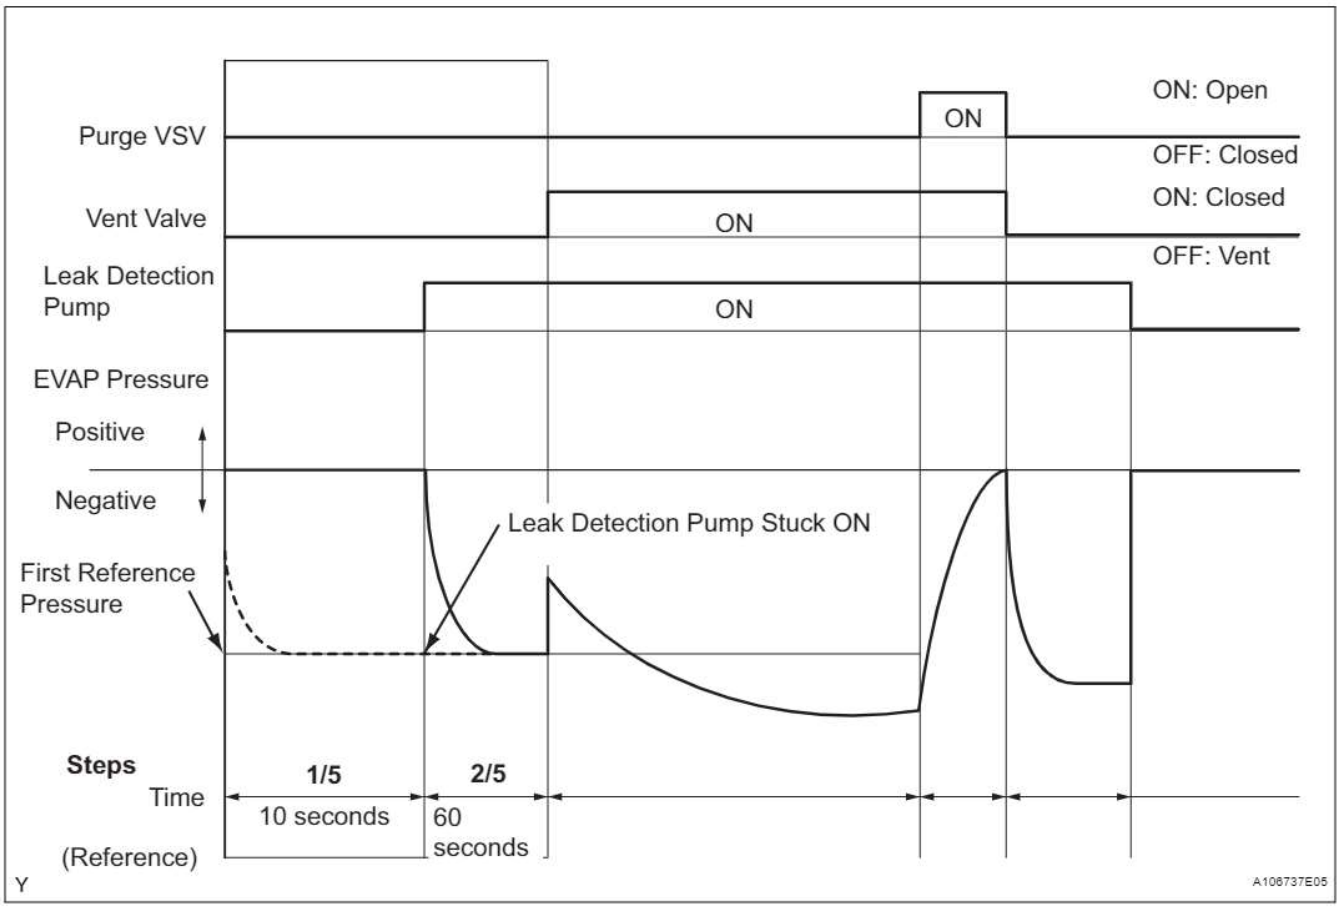

(a) Check the EVAP pressure in steps 1/5 and 2/5.

Result


DTCs*	Test Results	Suspected Trouble Area	Proceed to
-	Virtually no variation in EVAP pressure during step 1/5. Then decreases to reference pressure	Not yet determined	A
P2402	Small difference between EVAP pressures during steps 1/5 and 2/5	Leak detection pump stuck ON	B

*: These DTCs are already present in the ECM when the vehicle arrives and are confirmed in the "CONFIRM DTC" procedures above.
HINT:
The first reference pressure is the value determined in step 2/5.

B → Go to step 22

A

6	PERFORM EVAP SYSTEM CHECK (STEP 2/5)

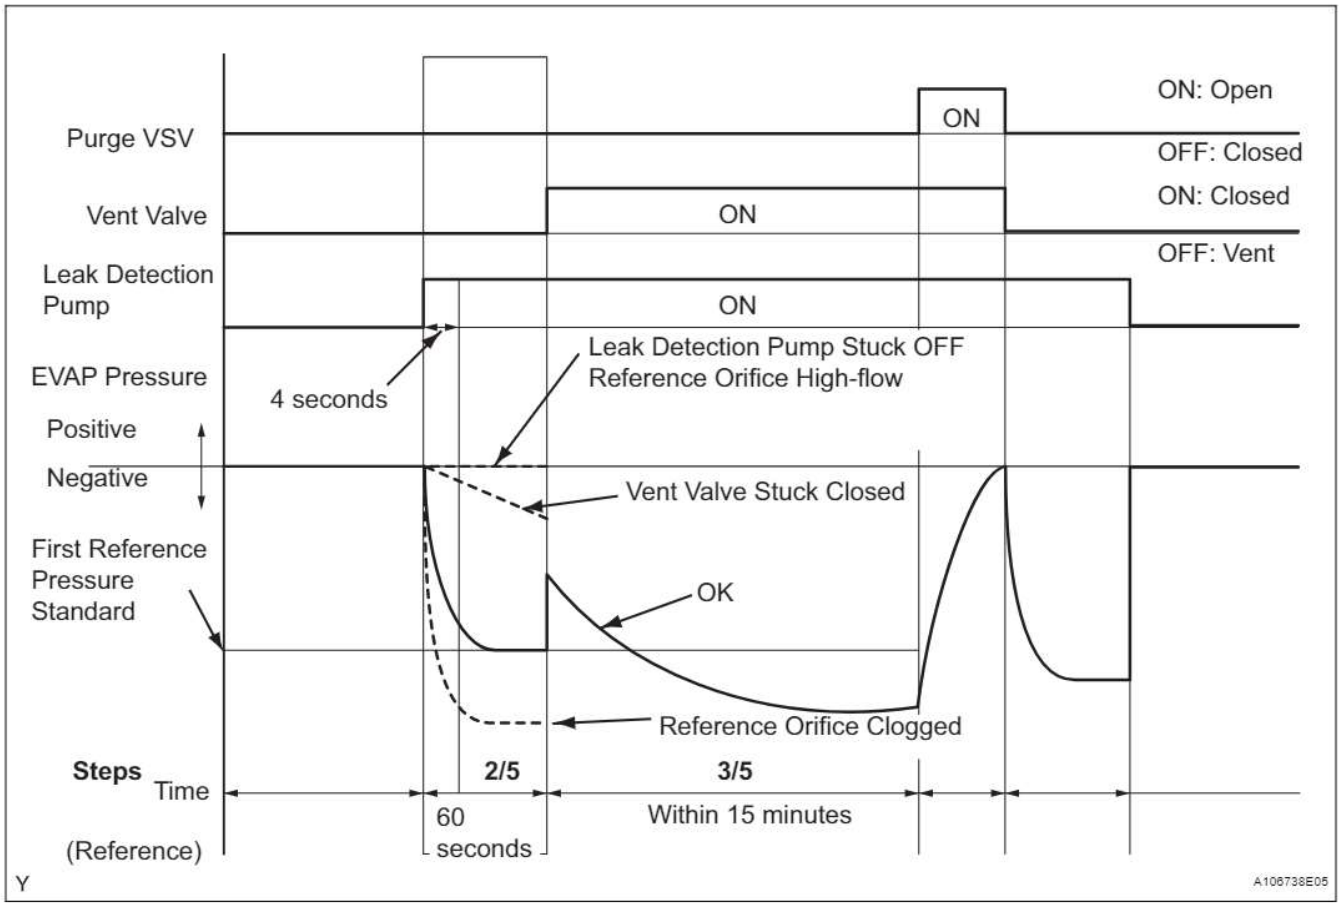

HINT:
Make a note of the pressures checked in steps (a) and (b) below.

(a) Check the EVAP pressure 4 seconds after the leak detection pump is activated*.
HINT:
*: The leak detection pump begins to operate as step 1/5 finishes and step 2/5 starts.

(b) Check the EVAP pressure again when it has stabilized. This pressure is the reference pressure.

Result

DTCs*	Test Result	Suspected Trouble Area	Proceed to
-	EVAP pressure in step (b) between -4.85 kPa-g and -1.057 kPa-g (-36.4 mmHg-g and -7.93 mmHg-g)	Not yet determined	A
P043F and P2401	EVAP pressure in step (b) -1.057 kPa-g (-7.93 mmHg-g) or more	• Reference orifice high-flow • Leak detection pump stuck OFF	B
P043E	EVAP pressure in step (b) below -4.85 kPa-g (-36.4 mmHg-g)	Reference orifice clogged	C
P2419	EVAP pressure in step (a) more than -1.057 kPa-g (-7.93 mmHg-g)	Vent valve stuck closed	D


*: These DTCs are already present in the ECM when the vehicle arrives and are confirmed in the "CONFIRM DTC" procedures above.

B	Go to step 11
C	Go to step 29
D	Go to step 20

A

ES

7	PERFORM EVAP SYSTEM CHECK (STEP 2/5 TO 3/5)

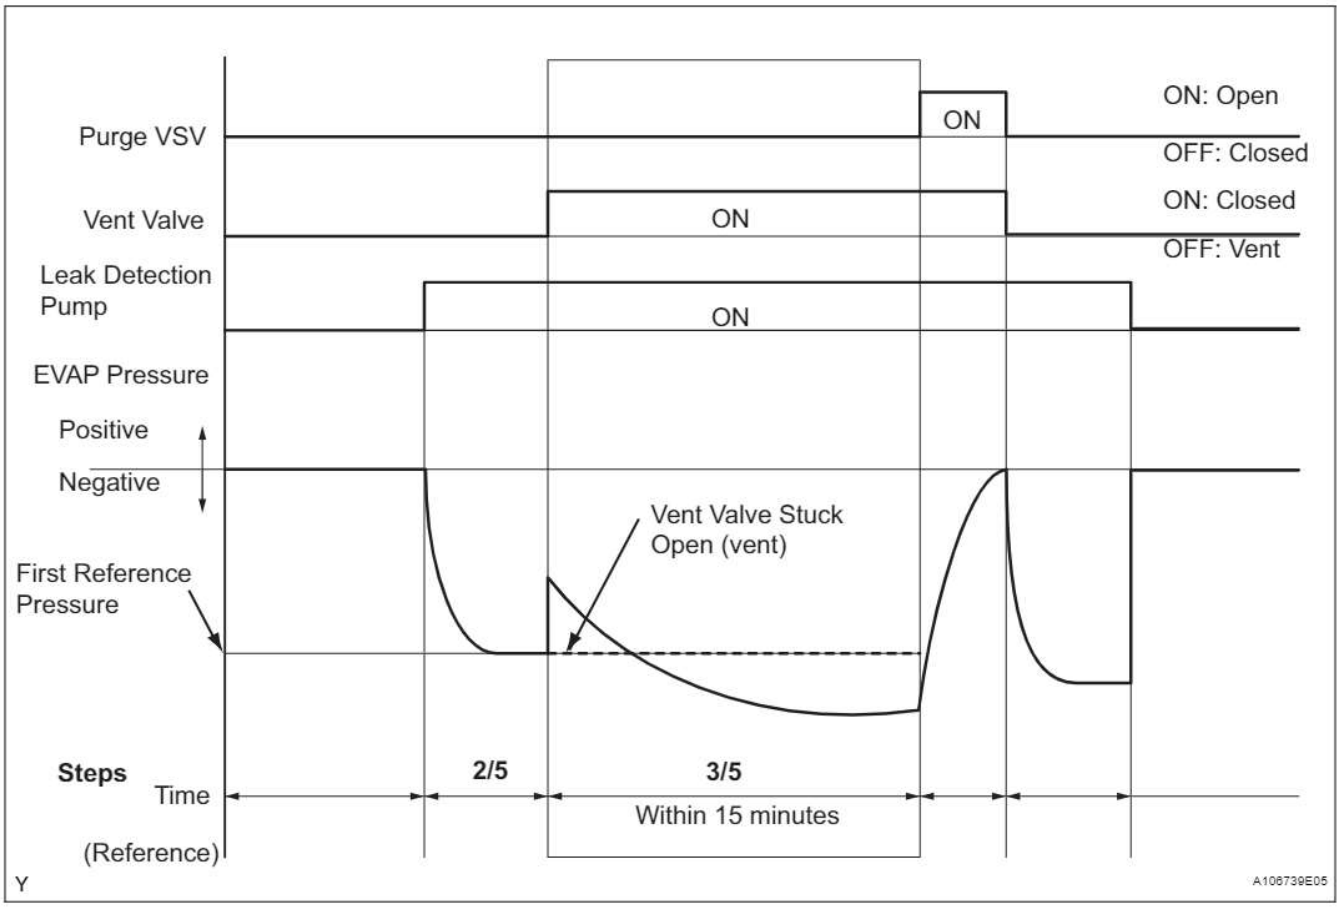

(a) Check the EVAP pressure increases in step 3/5.

Result


DTCs*	Test Result	Suspected Trouble Area	Proceed to
-	EVAP pressure increases by 0.3 kPa-g (2.25 mmHg-g) or more within 10 seconds of proceeding from step 2/5 to step 3/5	Not yet determined	A
P2420	No variation in EVAP pressure despite proceeding from step 2/5 to step 3/5	Vent valve stuck open (vent)	B
P0451	No variation in EVAP pressure during steps 1/5 through 3/5	Canister pressure sensor malfunction fixed	C

*: These DTCs are already present in the ECM when the vehicle arrives and are confirmed in the "CONFIRM DTC" procedures above.

B	Go to step 19
C	Go to step 29

A


8	PERFORM EVAP SYSTEM CHECK (STEP 3/5)

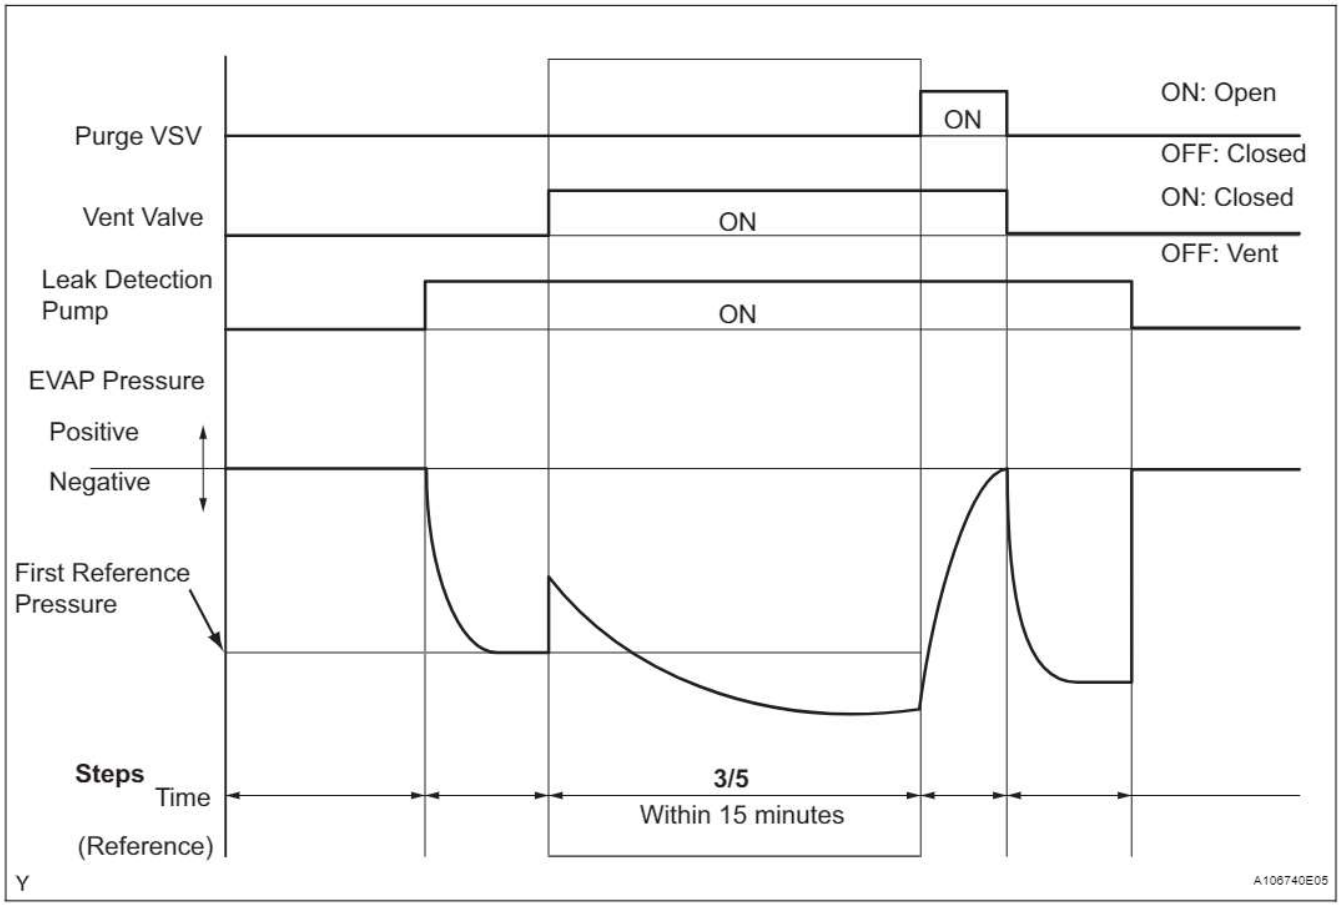

(a) Wait until the EVAP pressure change is less than 0.1 kPa-g (0.75 mmHg-g) for 30 seconds.
(b) Measure the EVAP pressure and record it.
HINT:
A few minutes are required for the EVAP pressure to become saturated. When there is little fuel in the fuel tank, it takes up to 15 minutes.

NEXT

9	PERFORM EVAP SYSTEM CHECK (STEP 4/5)

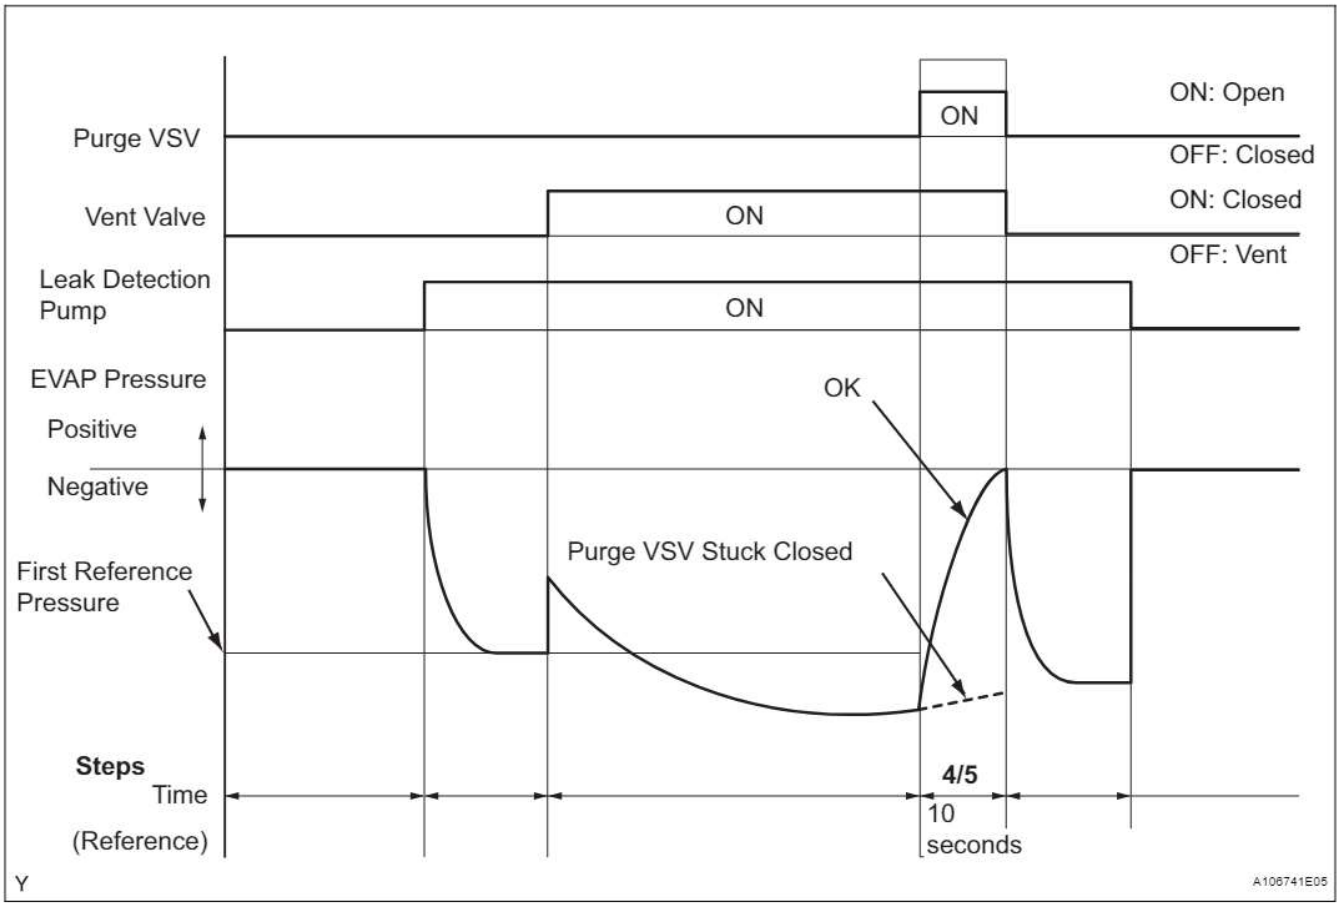

(a) Check the EVAP pressure in step 4/5.

Result

DTCs*	Test Result	Suspected Trouble Area	Proceed to
-	EVAP pressure increases by 0.3 kPa-g (2.25 mmHg-g) or more within 10 seconds of proceeding from step 3/5 to step 4/5	Not yet determined	A
P0441	EVAP pressure increases by 0.3 kPa-g (2.25 mmHg-g) or more within 10 seconds of proceeding from step 3/5 to step 4/5	Problems in EVAP hose between purge VSV and intake manifold	B
P0441	Variation in EVAP pressure less than 0.3 kPa-g (2.25 mmHg-g) for 10 seconds, after proceeding from step 3/5 to step 4/5	Purge VSV stuck closed	C


*: These DTCs are already present in the ECM when the vehicle arrives and are confirmed in the "CONFIRM DTC" procedures above.

B → Go to step 15

C → Go to step 12

A

10	PERFORM EVAP SYSTEM CHECK (STEP 5/5)

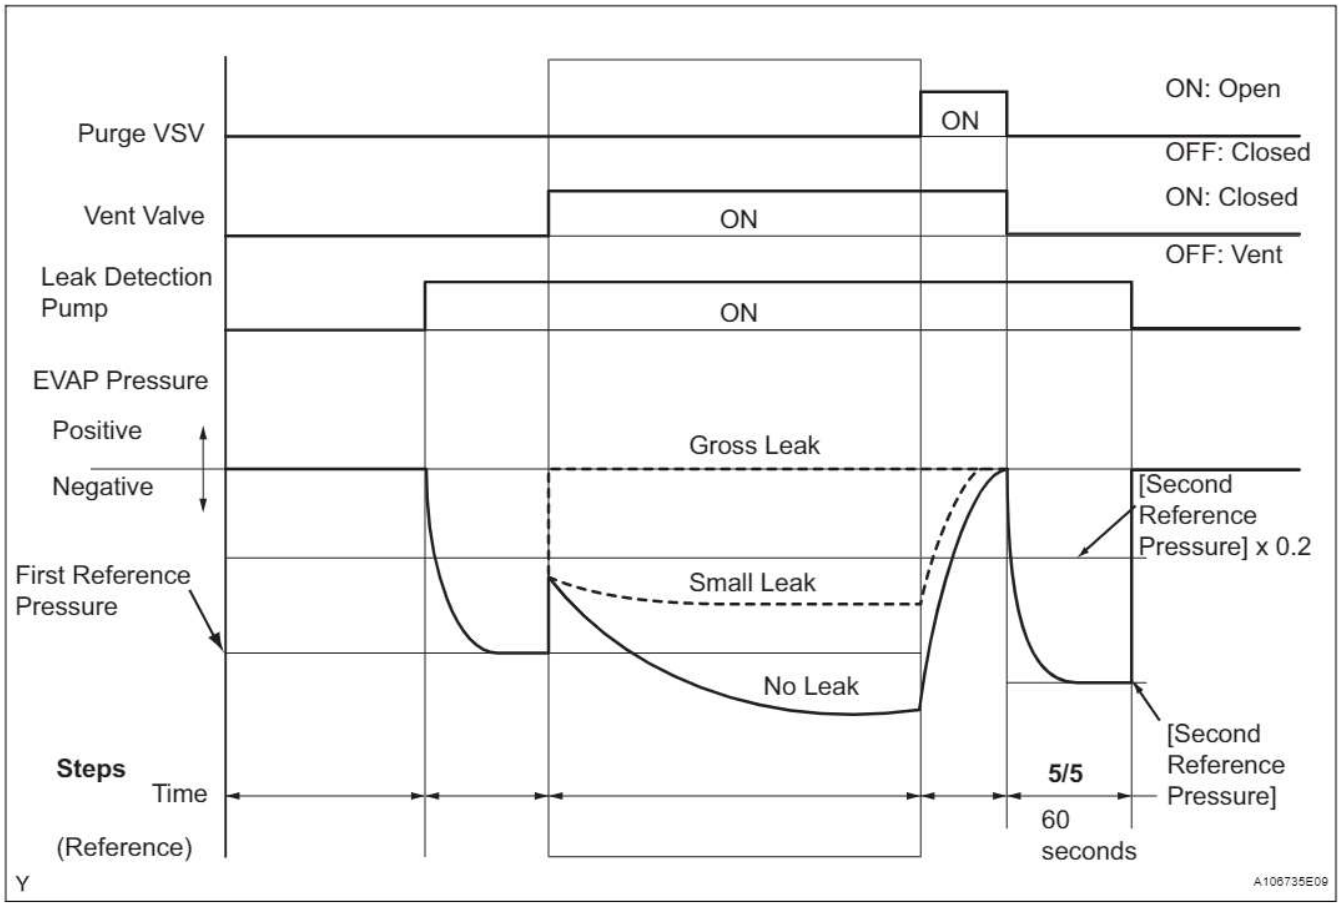

(a) Check the EVAP pressure in step 5/5.
(b) Compare the EVAP pressure in step 3/5 and the second reference pressure (step 5/5).


Result

DTCs*	Test Result	Suspected Trouble Area	Proceed to
-	EVAP pressure (step 3/5) lower than second reference pressure (step 5/5)	Not yet determined (no leakage from EVAP system)	A
P0441 and P0455	EVAP pressure (step 3/5) higher than [second reference pressure (step 5/5) x 0.2]	• Purge VSV stuck open • EVAP gross leak	B
P0456	EVAP pressure (step 3/5) higher than second reference pressure (step 5/5)	EVAP small leak	B

*: These DTCs are already present in the ECM when the vehicle arrives and are confirmed in the "CONFIRM DTC" procedures above.

A	Go to step 35
B	Go to step 12

11	PERFORM EVAP SYSTEM CHECK (STEP 3/5)

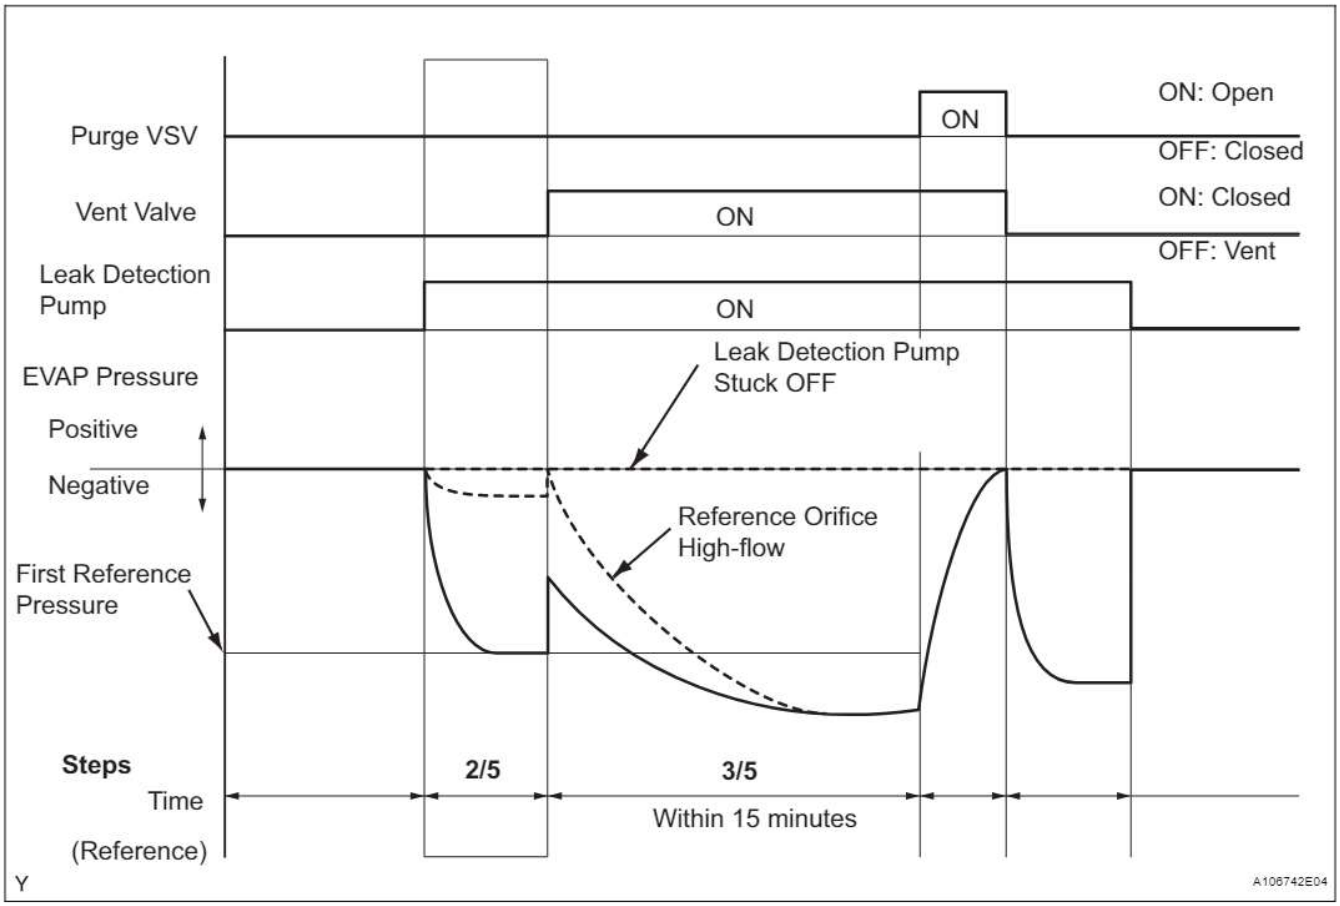

(a) Check the EVAP pressure in step 3/5.


Result

DTCs*	Test Result	Suspected Trouble Area	Proceed to
P043F	EVAP pressure less than [reference pressure] measured at 2/5	Reference orifice high-flow	A
P2401	EVAP pressure almost same as [reference pressure] measured at 2/5	Leak detection pump stuck OFF	B

*: These DTCs are already present in the ECM when the vehicle arrives and are confirmed in the "CONFIRM DTC" procedures above.
HINT:
The first reference pressure is the value determined in step 2/5.

A	Go to step 29
B	Go to step 22

12	PERFORM ACTIVE TEST USING INTELLIGENT TESTER (PURGE VSV)

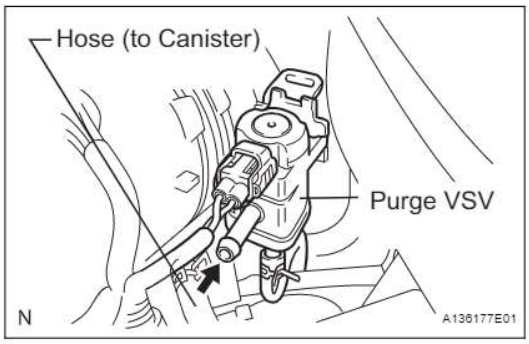

(a) On the intelligent tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / EVAP VSV (ALONE).
(b) Disconnect the hose (connected to the canister) from the purge VSV.
(c) Start the engine.
(d) Using the tester, turn off the purge VSV (EVAP VSV: OFF).
(e) Use your finger to confirm that the purge VSV has no suction.
(f) Using the tester, turn on the purge VSV (EVAP VSV: ON).
(g) Use your finger to confirm that the purge VSV has suction.

ES

Result

Test Result	Suspected Trouble Area	Proceed to
No suction when purge VSV turned OFF, and suction applied when turned ON	Purge VSV normal	A
Suction applied when purge VSV turned OFF	Purge VSV stuck open	B
No suction when purge VSV turned ON	• Purge VSV stuck closed • Problems with EVAP hose between purge VSV and intake manifold	C

(h) Reconnect the hose.

B → Go to step 14

C → Go to step 15

A

13	CHECK FUEL CAP

(a) Check that the fuel cap is correctly installed and confirm the fuel cap meets OEM specifications.
(b) Tighten the fuel cap until a few click sounds are heard.
HINT:
If an EVAP tester is available, check the fuel cap using the tester.
1. Remove the fuel cap and install it onto a fuel cap adapter.
2. Connect an EVAP tester pump hose to the adapter, and pressurize the cap to 3.2 to 3.7 kPa (24 to 28 mmHg) using an EVAP tester pump.
3. Seal the adapter and wait for 2 minutes.
4. Check the pressure. If the pressure is 2 kPa (15 mmHg) or more, the fuel cap is normal.

Result

Test Result	Suspected Trouble Area	Proceed to
Fuel cap correctly installed	-	A


Test Result	Suspected Trouble Area	Proceed to
Fuel cap loose	• Fuel cap improperly installed • Defective fuel cap • Fuel cap does not meet OEM specifications	B
Defective fuel cap	-	B
No fuel cap	-	C

(c) Reinstall the fuel cap.

A	Go to step 28
B	Go to step 26
C	Go to step 27

ES

14 INSPECT DUTY VACUUM SWITCHING VALVE (PURGE VSV)

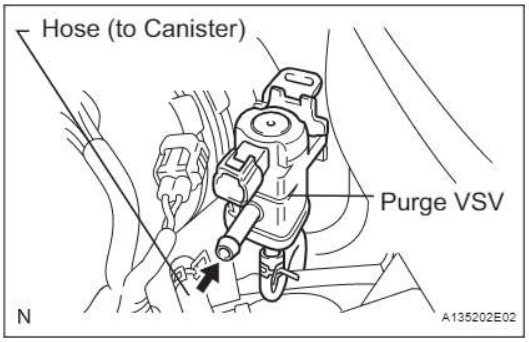

(a) Turn the ignition switch off.
(b) Disconnect the C6 purge VSV connector.
(c) Disconnect the hose (connected to the canister) from the purge VSV.
(d) Start the engine.
(e) Use your finger to confirm that the purge VSV has no suction.


Result

Test Result	Suspected Trouble Area	Proceed to
No suction	ECM	A
Suction applied	Purge VSV	B

(f) Reconnect the purge VSV connector.
(g) Reconnect the hose.

A	Go to step 34
B	Go to step 30

15 CHECK EVAP HOSE (PURGE VSV - INTAKE MANIFOLD)

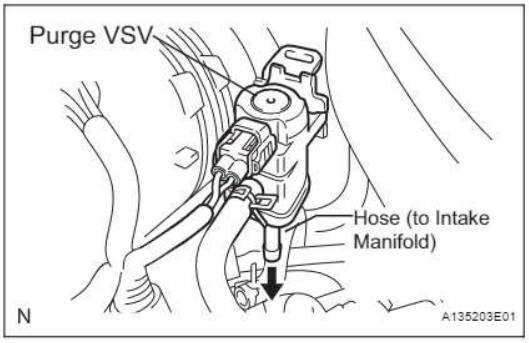

(a) Disconnect the hose (connected to the intake manifold) from the purge VSV.
(b) Start the engine.
(c) Use your finger to confirm that the hose has suction.

Result


Test Result	Suspected Trouble Area	Proceed to
Suction applied	EVAP hose between purge VSV and intake manifold normal	A
No suction	• Intake manifold port • EVAP hose between purge VSV and intake manifold	B

(d) Reconnect the hose.

B → Go to step 25

A

16 INSPECT DUTY VACUUM SWITCHING VALVE (PURGE VSV)

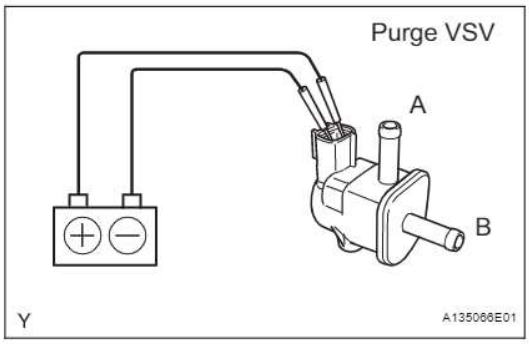

(a) Remove the purge VSV.
(b) Apply the battery voltage to the terminals of the purge VSV.
(c) Using an air gun, confirm that air flows from port A to port B.

Result


Test Result	Suspected Trouble Area	Proceed to
Air flows	Purge VSV normal	A
No air flow	Purge VSV	B

(d) Install the purge VSV.

B → Go to step 30

A

17 CHECK HARNESS AND CONNECTOR (POWER SOURCE OF PURGE VSV)

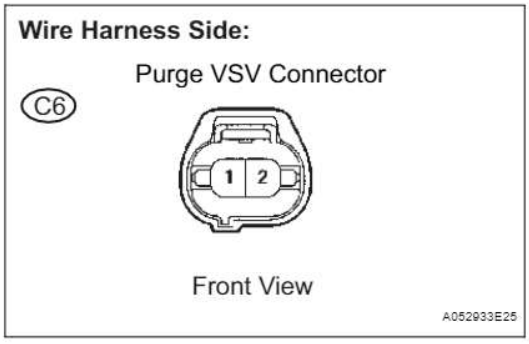

(a) Disconnect the C6 purge VSV connector.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage between terminal 1 of the purge VSV connector and body ground.

Result


Test Result	Suspected Trouble Area	Proceed to
9 to 14 V	Normal	A
Other than result above	Wire harness or connectors between purge VSV and ECM	B

(d) Reconnect the purge VSV connector.

B → Go to step 31

A

18 CHECK HARNESS AND CONNECTOR (PURGE VSV - ECM)

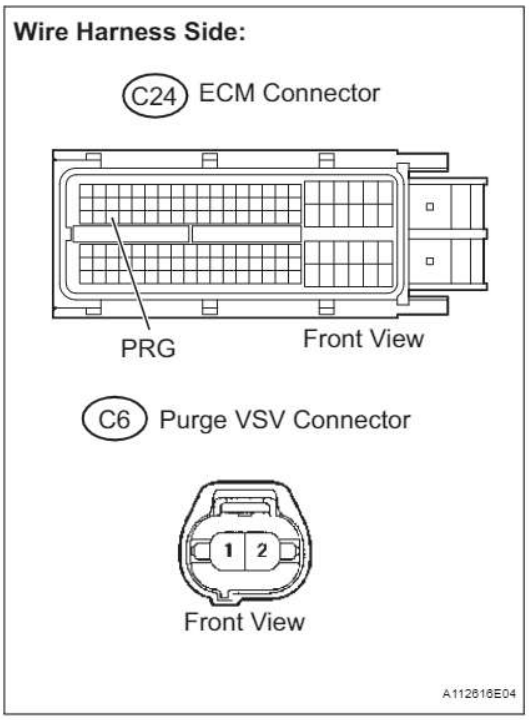

(a) Disconnect the C24 ECM connector and the C6 purge VSV connector.
(b) Measure the resistance between the terminals of the wire harness side connectors.
Standard resistance


Tester Connection	Specified Condition
C24-49 (PRG) - C6-2 (Purge VSV)	Below 1 Ω
C24-49 (PRG) - Body ground	10 kΩ or higher
C6-2 (Purge VSV) - Body ground	10 kΩ or higher

(c) Reconnect the purge VSV connector.
(d) Reconnect the ECM connector.

OK → Go to step 34

NG → Go to step 31

19	INSPECT CANISTER PUMP MODULE (POWER SOURCE FOR VENT VALVE)

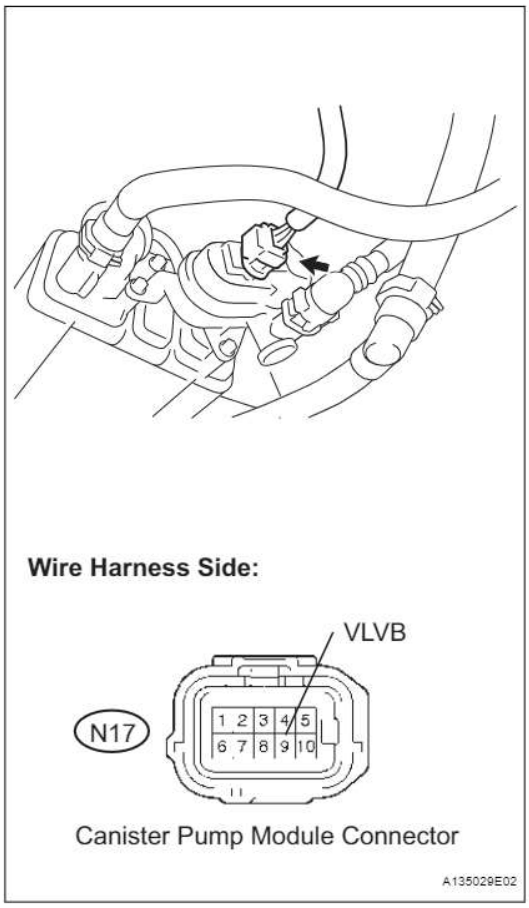

(a) Turn the ignition switch off.
(b) Disconnect the N17 canister pump module connector.
(c) Turn the ignition switch to the ON position.
(d) Measure the voltage between the VLVB terminal of the canister pump module connector and body ground.

ES

Result


Test Result	Suspected Trouble Area	Proceed to
9 to 14 V	1. Wire harness between vent valve and ECM 2. Vent valve 3. ECM	A
Below 3 V	Power source wire harness of vent valve	B

(e) Reconnect the canister pump module connector.

B → Go to step 31

A

20	INSPECT CANISTER PUMP MODULE (VENT VALVE OPERATION)

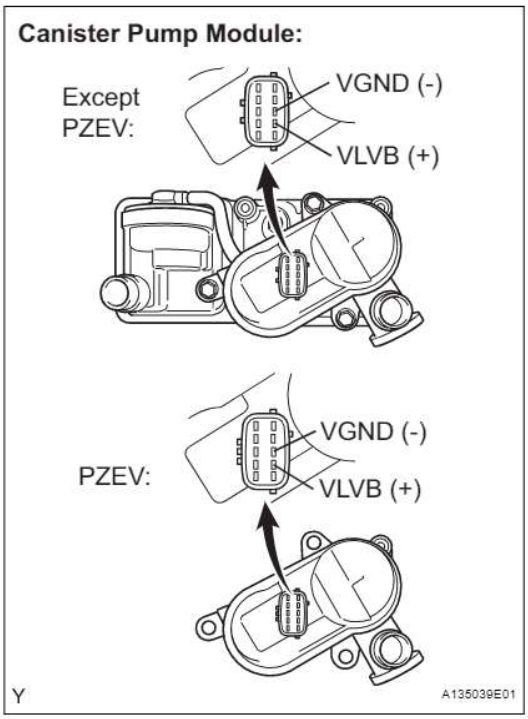

(a) Turn the ignition switch off.
(b) Disconnect the N17 canister pump module connector.
(c) Apply the battery voltage to the VLVB and VGND terminals of the canister pump module.
(d) Touch the canister pump module to confirm the vent valve operation.

Result


Test Result	Suspected Trouble Areat	Proceed to
Operating	1. Wire harness between vent valve and ECM 2. ECM	A
Not operating	Vent valve	B

(e) Reconnect the canister connector.

B → Go to step 29

A

21	CHECK HARNESS AND CONNECTOR (ECM - CANISTER PUMP MODULE)

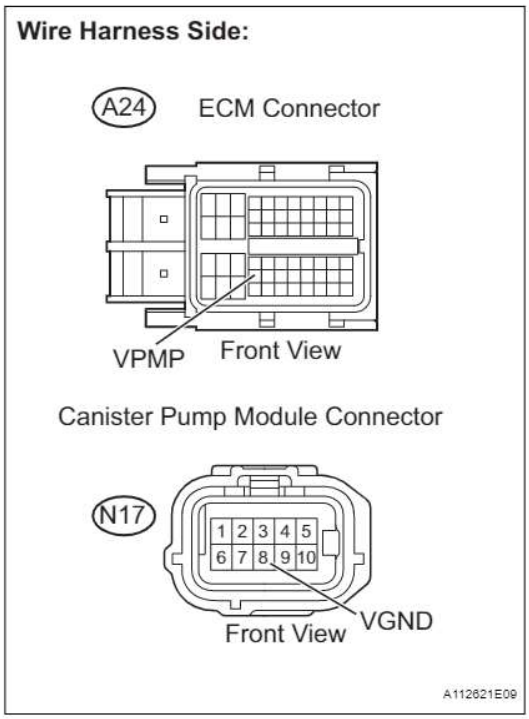

(a) Disconnect the A24 ECM connector.
(b) Disconnect the N17 canister pump module connector.
(c) Measure the resistance between the VPMP terminal of the ECM connector and the VGND terminal of the canister pump module connector.

ES


Result

Test Result	Suspected Trouble Area	Proceed to
Below 1 Ω	ECM	A
10 kΩ or higher	Wire harness between ECM and canister pump module	B

(d) Reconnect the ECM connector.
(e) Reconnect the canister pump module connector.

A	Go to step 34
B	Go to step 31

22	PERFORM ACTIVE TEST USING INTELLIGENT TESTER (VACUUM PUMP (ALONE))

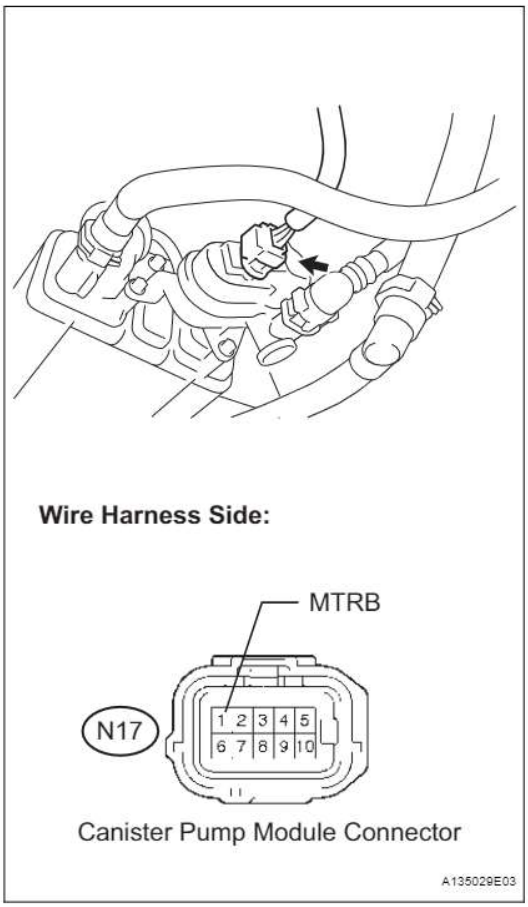

(a) Turn the ignition switch off.
(b) Disconnect the N17 canister pump module connector.
(c) Turn the ignition switch to the ON position.
(d) On the intelligent tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / ACTIVE TEST / VACUUM PUMP.
(e) Measure the voltage between MTRB terminal 1 of the canister pump module connector and body ground when the leak detection pump is turned ON and OFF using the tester.


Result

Test Result	Suspected Trouble Area	Proceed to
Below 3 V when OFF 9 to 14 V when ON	1. Wire harness between leak detection pump and body ground 2. Leak detection pump	A
Below 3 V when OFF and ON	1. Wire harness between leak detection pump and ECM 2. ECM	B

B → Go to step 24

A

23	CHECK HARNESS AND CONNECTOR (CANISTER PUMP MODULE - BODY GROUND)

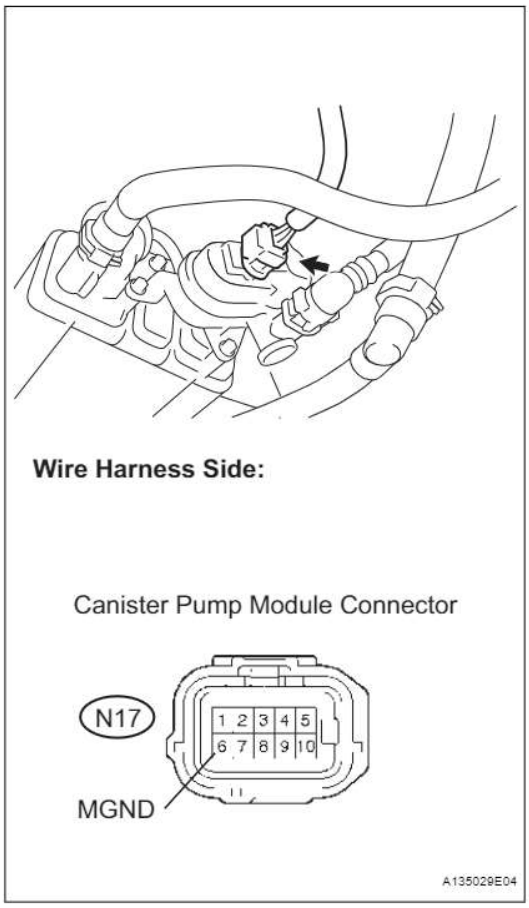

(a) Turn the ignition switch off.
(b) Disconnect the N17 canister pump module connector.
(c) Measure the resistance between the MGND terminal of the canister pump module connector and body ground.

ES


Result

Test Result	Suspected Trouble Area	Proceed to
Below 1 Ω	Leak detection pump	A
10 kΩ or higher	Wire harness between canister pump module and body ground	B

(d) Reconnect the canister pump module connector.

A	Go to step 29
B	Go to step 31

24 CHECK HARNESS AND CONNECTOR (ECM - CANISTER PUMP MODULE)

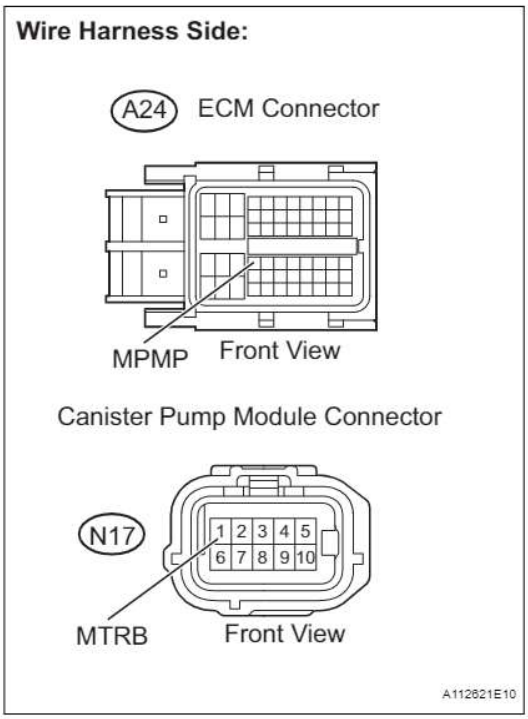

(a) Turn the ignition switch off.
(b) Disconnect the N17 canister pump module connector.
(c) Disconnect the A24 ECM connector.
(d) Measure the resistance between the MPMP terminal of the ECM connector and the MTRB terminal of the canister pump module connector.

Result

Test Result	Suspected Trouble Area	Proceed to
Below 1 Ω	ECM	A
10 kΩ or higher	Wire harness between ECM and canister pump module	B

(e) Reconnect the canister pump module connector.
(f) Reconnect the ECM connector.

A	Go to step 34
B	Go to step 31

25 INSPECT INTAKE MANIFOLD (EVAP PURGE PORT)

(a) Stop the engine.
(b) Disconnect the EVAP hose from the intake manifold.
(c) Start the engine.
(d) Use your finger to confirm that the port of the intake manifold has suction.

Result

Test Result	Suspected Trouble Area	Proceed to
Suction applied	EVAP hose between intake manifold and purge VSV	A
No suction	Intake manifold	B

(e) Reconnect the EVAP hose.

A	Go to step 32
B	Go to step 33

26	CORRECTLY REINSTALL OR REPLACE FUEL CAP

HINT:
- When reinstalling the fuel cap, tighten it until a few click sounds are heard.
- When replacing the fuel cap, use a fuel cap that meets OEM specifications.

NEXT	Go to step 36


27	REPLACE FUEL CAP

ES

HINT:
When installing the fuel cap, tighten it until a few click sounds are heard.

NEXT	Go to step 36

28	LOCATE EVAP LEAK PART

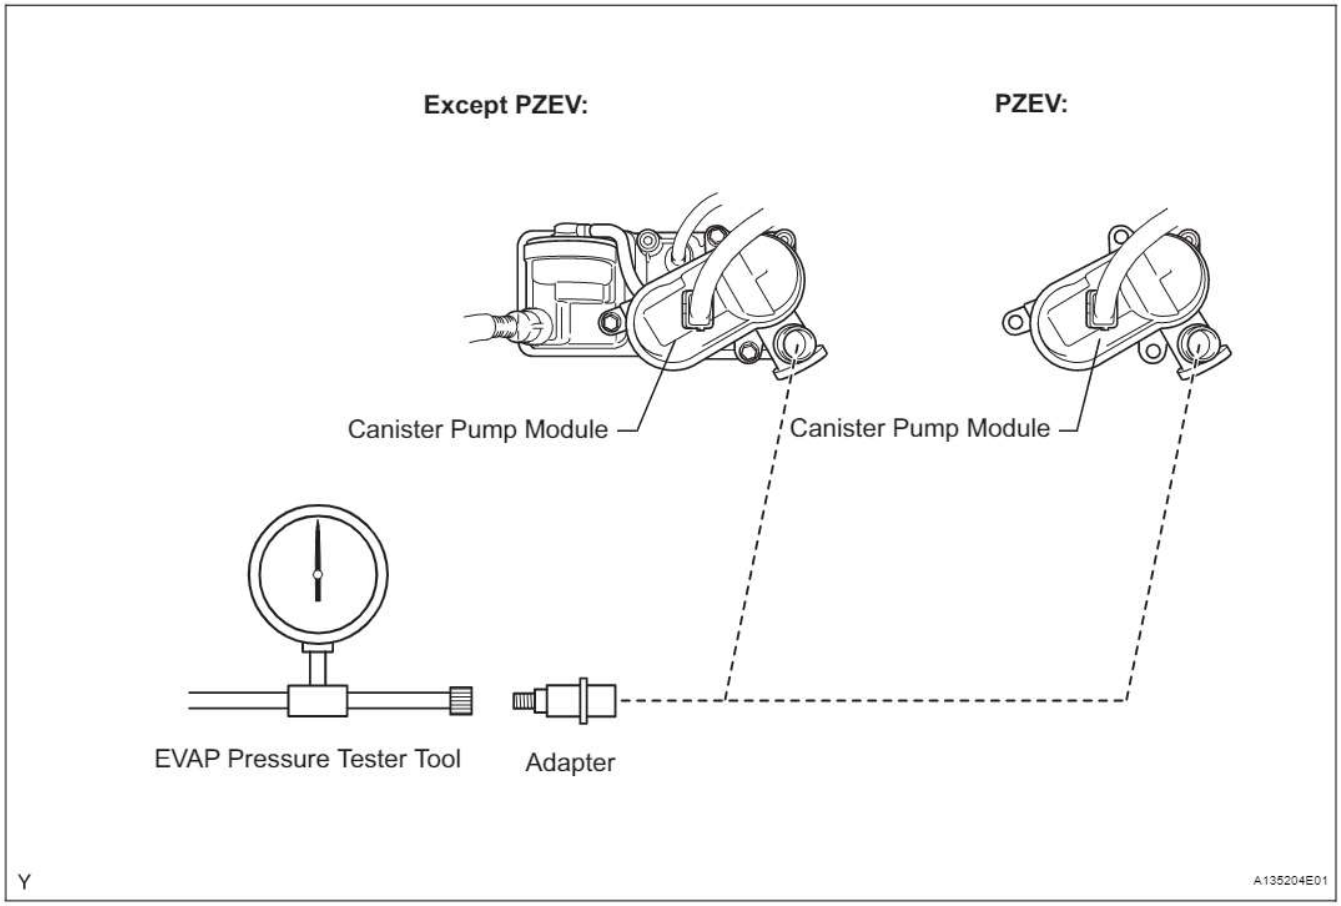

(a) Disconnect the vent hose.
(b) Connect the EVAP pressure tester tool to the canister pump module with the adapter.

(c) Pressurize the EVAP system to 3.2 to 3.7 kPa (24 to 28 mmHg).
(d) Apply soapy water to the piping and connecting parts of the EVAP system.
(e) Look for areas where bubbles appear. This indicates the leak point.
(f) Repair or replace the leak point.
HINT:
Disconnect the hose between the canister and the fuel tank from the canister. Block the canister side and conduct an inspection. In this way, the fuel tank can be excluded as an area suspected of causing fuel leaks.


ES

NEXT	Go to step 36

29	REPLACE CHARCOAL CANISTER ASSEMBLY

(a) Replace the canister assembly (See page EC-9).
NOTICE:
When replacing the canister, check the canister pump module interior and related pipes for water, fuel and other liquids. If liquids are present, check for disconnections and/or cracks in the following: 1) the pipe from the air inlet port to the canister pump module; 2) the canister filter; and 3) the fuel tank vent hose.


Except PZEV:

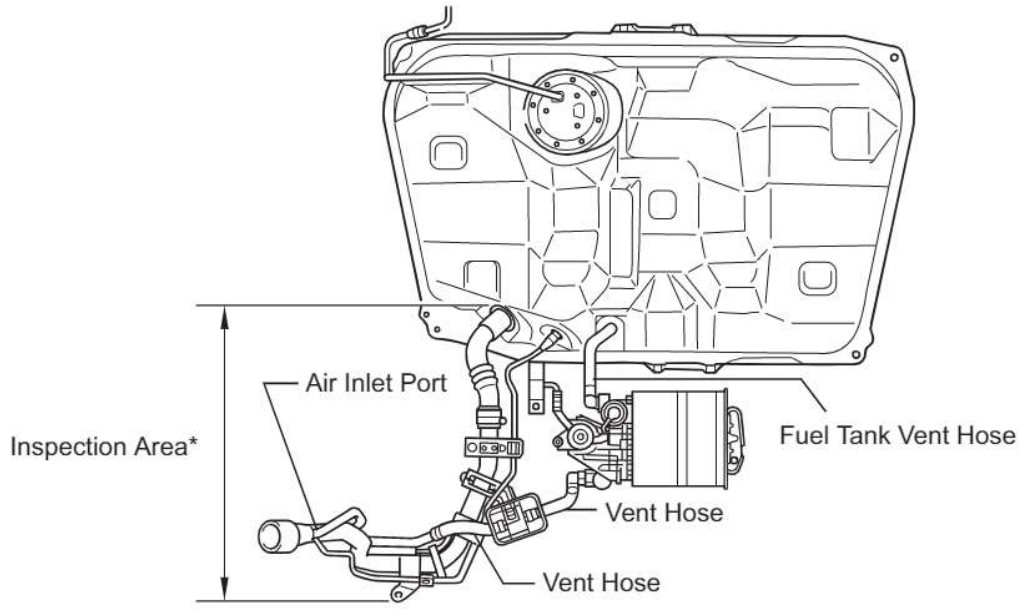

*: Check for disconnection and/or crack


N A132283E01

PZEV:

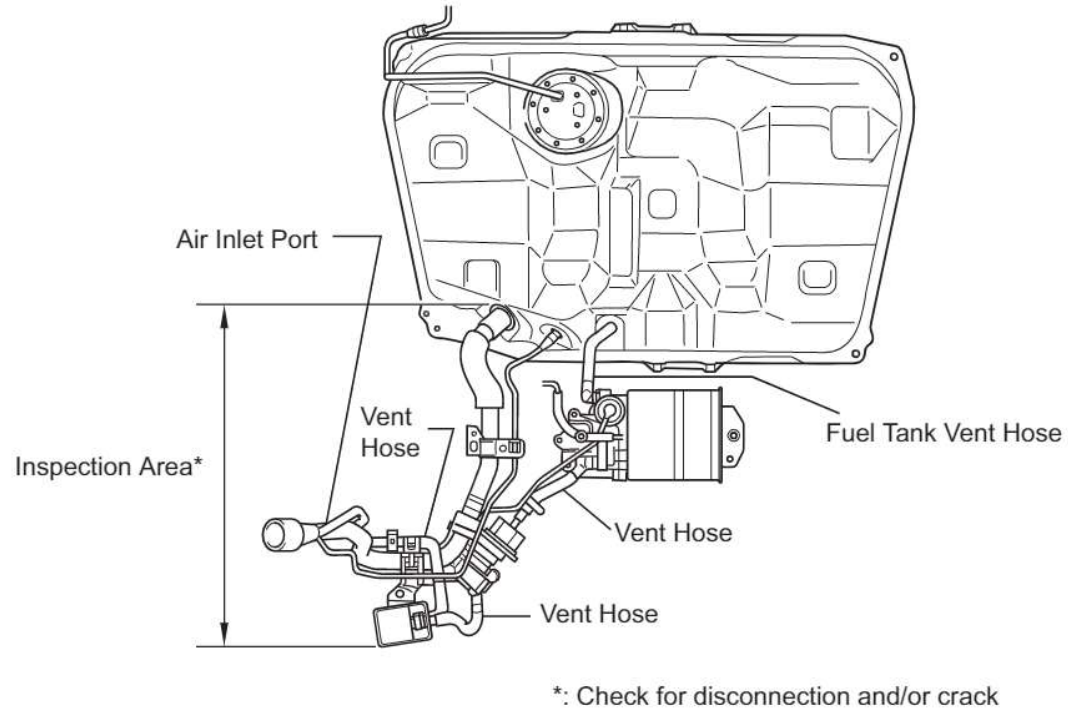

NEXT Go to step 36

30	REPLACE DUTY VACUUM SWITCHING VALVE (PURGE VSV)

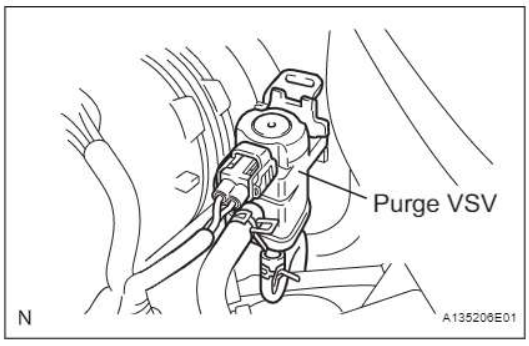

(a) Disconnect the connector and the hoses from the purge VSV.
(b) Remove the purge VSV.
(c) Install a new purge VSV.
(d) Reconnect the connector and hoses.

NEXT Go to step 36

31	REPAIR OR REPLACE HARNESS OR CONNECTOR

NEXT Go to step 36

32	REPLACE EVAP HOSE (INTAKE MANIFOLD - PURGE VSV)

NEXT Go to step 36

33	INSPECT INTAKE MANIFOLD (EVAP PURGE PORT)

(a) Check that the EVAP purge port of the intake manifold is not clogged. If necessary, replace the intake manifold.

NEXT → Go to step 36

34	REPLACE ECM

(a) Replace the ECM (See page ES-432).

NEXT → Go to step 36

35	REPAIR OR REPLACE PARTS AND COMPONENTS INDICATED BY OUTPUT DTCS

(a) Repair the malfunctioning areas indicated by the DTCs that had been confirmed when the vehicle was brought in.

NEXT → Go to step 36

36	PERFORM EVAP SYSTEM CHECK (AUTO OPERATION)

NOTICE:

- **The EVAP SYSTEM CHECK (AUTO OPERATION) consists of 5 steps performed automatically by the intelligent tester. It takes a maximum of approximately 18 minutes.**
- **Do not perform the EVAP SYSTEM CHECK when the fuel tank is more than 90% full because the cut-off valve may be closed, making the fuel tank leak check unavailable.**
- **Do not run the engine in this step.**
- **When the temperature of the fuel is 35°C (95°F) or more, a large amount of vapor forms and any check results become inaccurate. When performing an EVAP SYSTEM CHECK, keep the temperature below 35°C (95°F).**

(a) Clear the DTCs (See page ES-38).

(b) On the intelligent tester, select the following menu items: DIAGNOSIS / ENHANCED OBD II / SYSTEM CHECK / EVAP SYS CHECK / AUTO OPERATION.

(c) After the SYSTEM CHECK is completed, check for pending DTCs by selecting the following menu items: DIAGNOSIS / ENHANCED OBD II / DTC INFO / PENDING CODES.
HINT:
If no pending DTCs are found, the repair has been successfully completed.

NEXT

COMPLETED

CONFIRMATION DRIVING PATTERN

HINT:
After a repair, check Monitor Status by performing the Key-Off Monitor Confirmation and Purge Flow Monitor Confirmation described below.

1. KEY-OFF MONITOR CONFIRMATION

(a) Preconditions
The monitor will not run unless:
- The vehicle has been driven for 10 minutes or more (in a city area or on a freeway)
- The fuel tank is less than 90 % full
- The altitude is less than 8,000 ft (2,400 m)
- The Engine Coolant Temperature (ECT) is between 4.4°C and 35°C (40°F and 95°F)
- The Intake Air Temperature (IAT) is between 4.4°C and 35°C (40°F and 95°F)
- The vehicle remains stationary (the vehicle speed is 0 mph (0 km/h))

(b) Monitor Conditions
1. Allow the engine to idle for at least 5 minutes.
2. Turn the ignition switch off and wait for 6 hours (8 or 10.5 hours).
   HINT:
   Do not start the engine until checking MONITOR STATUS. If the engine is started, the steps described above must be repeated.

(c) Monitor Status
1. Connect the intelligent tester to the DLC3.
2. Turn the ignition switch to the ON position and turn the tester on.
3. Select the following menu items: DIAGNOSIS / ENHANCED OBD II / MONITOR STATUS.
4. Check the Monitor Status displayed on the tester.
   HINT:
   If INCMP is displayed, the monitor is not complete. Make sure that the preconditions have been met, and perform the Monitor Conditions again.

2. PURGE FLOW MONITOR CONFIRMATION (P0441)

HINT:
Perform this monitor confirmation after the Key-Off Monitor Confirmation shows COMPL (complete).

(a) Preconditions
The monitor will not run unless:
- The vehicle has been driven for 10 minutes or more (in a city area or on a freeway)
- The ECT is between 4.4°C and 35°C (40°F and 95°F)
- The IAT is between 4.4°C and 35°C (40°F and 95°F)

(b) Monitor Conditions
1. Release the pressure from the fuel tank by removing and reinstalling the fuel cap.
2. Warm the engine up until the ECT reaches more than 75°C (167°F).
3. Increase the engine speed to 3,000 rpm once.
4. Allow the engine to idle and turn A/C ON for 1 minute.

(c) Monitor Status
1. Turn the ignition switch off (if ON or the engine is running).
2. Connect the intelligent tester to the DLC3.
3. Turn the ignition switch to the ON position and turn the tester on.
4. Select the following menu items: DIAGNOSIS / ENHANCED OBD II / MONITOR STATUS.
5. Check the Monitor Status displayed on the tester.
   HINT:
   If INCMP is displayed, the monitor is not complete. Make sure that the preconditions have been met, and perform the Monitor Conditions again.

MONITOR RESULT


Refer to CHECKING MONITOR STATUS (See page ES-20).

ECM Power Source Circuit

DESCRIPTION

When the ignition switch is turned ON position, the battery voltage is applied to IGSW of the ECM. The output signal from the MREL terminal of the ECM causes a current to flow to the coil, closing the contacts of the engine room J/B (EFI relay) and supplying power to either terminal +B or +B2 of the ECM.


WIRING DIAGRAM

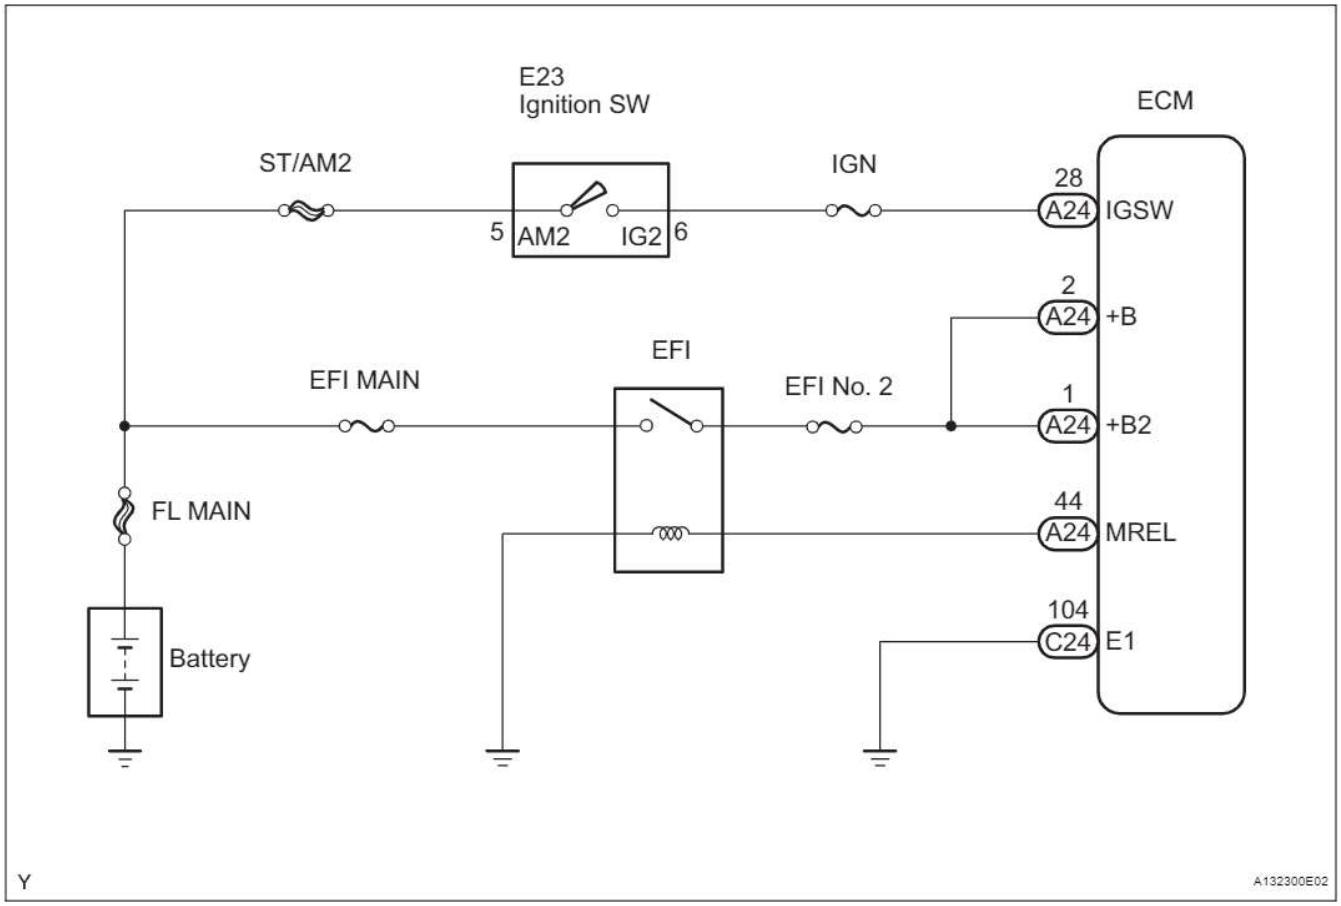

ES

INSPECTION PROCEDURE

1	CHECK HARNESS AND CONNECTOR (ECM - BODY GROUND)

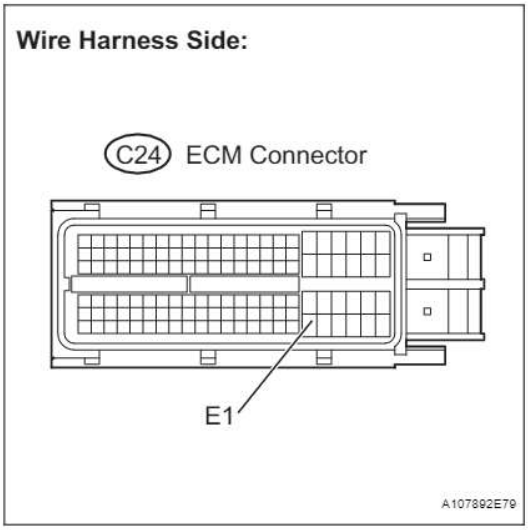

(a) Disconnect the C24 ECM connector.
(b) Measure the resistance.
Standard resistance


Tester Connection	Specified Condition
C24-104 (E1) - Body ground	Below 1 Ω

(c) Reconnect the ECM connector.

NG → REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

2	INSPECT ENGINE ROOM J/B (EFI RELAY VOLTAGE)

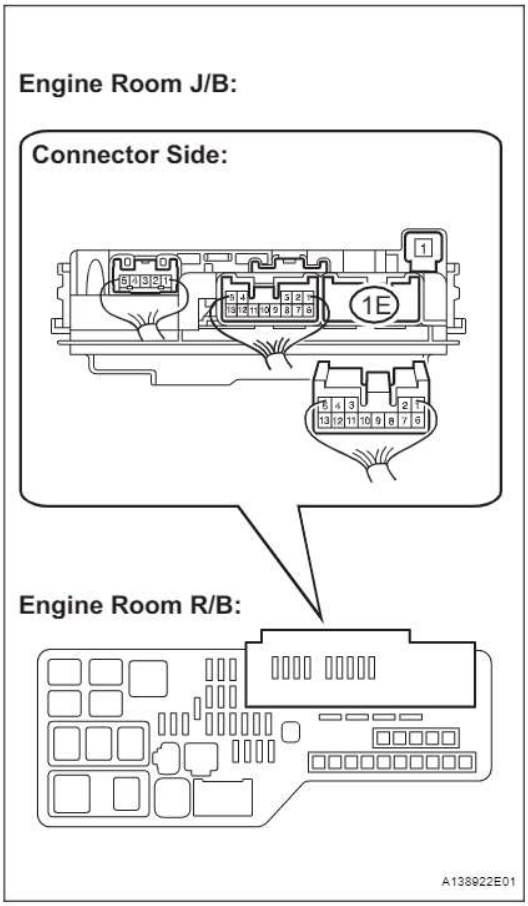

(a) Remove the engine room J/B from the engine room R/B.
(b) Disconnect the 1E engine room J/B connector.
(c) Turn the ignition switch to the ON position.
(d) Measure the voltage between the terminals.
Standard voltage


Tester Connection	Specified Condition
1E-12 - Body ground	9 to 14 V

(e) Reconnect the engine room J/B connector.
(f) Reinstall the engine room J/B.

OK → Go to step 4

NG

3	INSPECT FUSE (EFI MAIN FUSE)

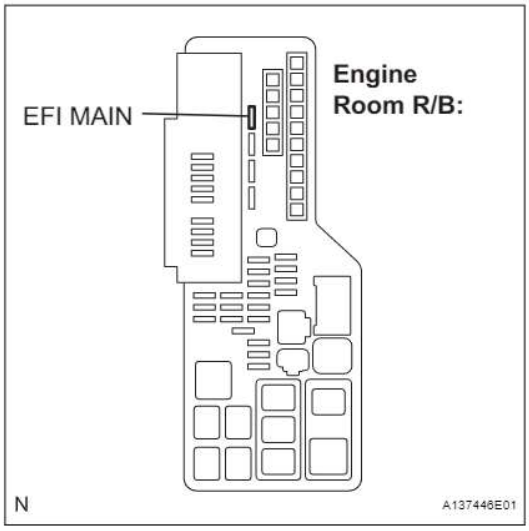

(a) Inspect the EFI MAIN fuse.
(1) Remove the EFI MAIN fuse from the engine room R/B.
(2) Measure the EFI MAIN fuse resistance.
Standard resistance:
Below 1 Ω
(3) Reinstall the EFI MAIN fuse.


NG → REPLACE FUSE (EFI MAIN FUSE)

ES

OK

CHECK AND REPAIR HARNESS AND CONNECTOR (BATTERY - EFI RELAY)

4	INSPECT ENGINE ROOM J/B (EFI RELAY)

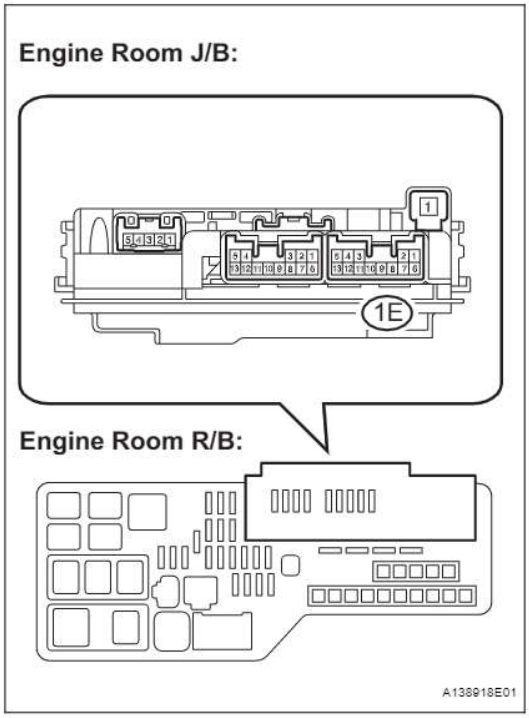

(a) Remove the engine room J/B from the engine room R/B.
(b) Inspect the EFI relay.
(1) Measure the EFI relay resistance.
Standard resistance


Tester Connection	Specified Condition
1E-6 - 1E-12	10 kΩ or higher
	Below 1 Ω (Apply battery voltage between terminals 1E-9 and 1E-11)

(c) Reinstall the engine room J/B.

NG → REPLACE ENGINE ROOM J/B

OK

5	INSPECT FUSE (EFI NO. 2 FUSE)

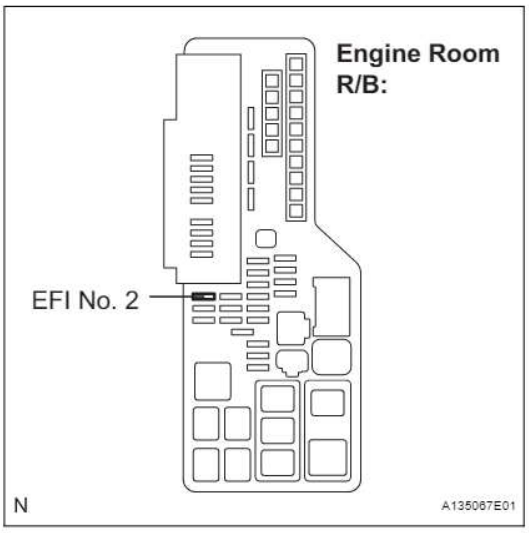


(a) Inspect the EFI No. 2 fuse.
(1) Remove the EFI No. 2 fuse from the engine room R/B.
(2) Measure the EFI No. 2 fuse resistance.
Standard resistance:
Below 1 Ω
(3) Reinstall the EFI No. 2 fuse.


NG → **REPLACE FUSE (EFI NO. 2 FUSE)**

OK

6	CHECK HARNESS AND CONNECTOR (EFI RELAY - ECM)

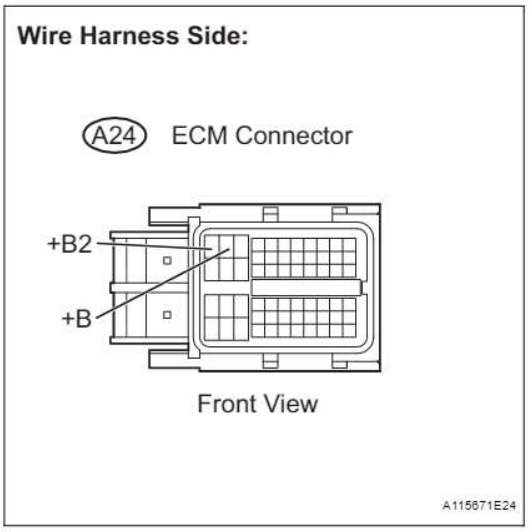

(a) Disconnect the A24 ECM connector.

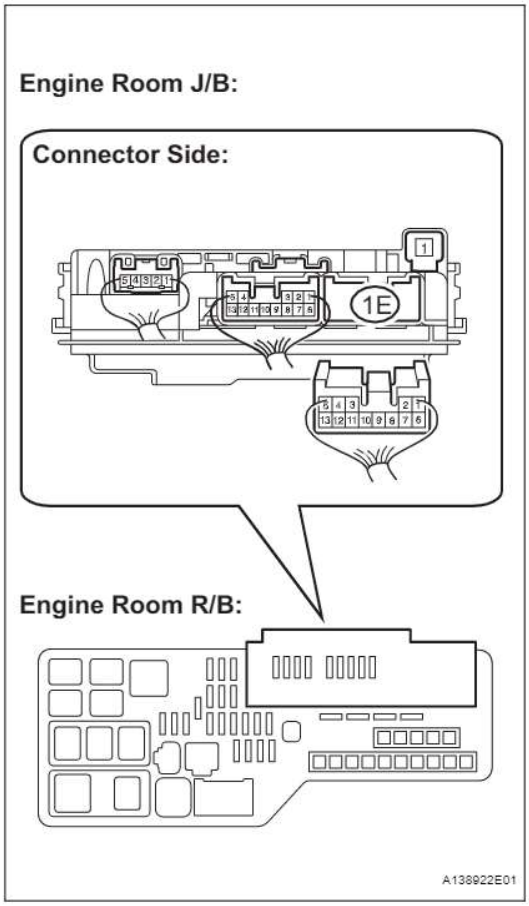

(b) Remove the engine room J/B from the engine room R/B.
(c) Disconnect the 1E engine room J/B connector.
(d) Measure the resistance between the terminals.

Standard resistance (Check for open)

Tester Connection	Specified Condition
A24-2 (+B) - 1E-6	Below 1 Ω
A24-1 (+B2) - 1E-6	Below 1 Ω

Standard resistance (Check for short)


Tester Connection	Specified Condition
A24-2 (+B) or 1E-6 - Body ground	10 kΩ or higher
A24-1 (+B2) or 1E-6 - Body ground	10 kΩ or higher

(e) Reconnect the ECM connector.
(f) Reconnect the engine room J/B connector.
(g) Reinstall the engine room J/B.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

7 INSPECT ECM (IGSW VOLTAGE)

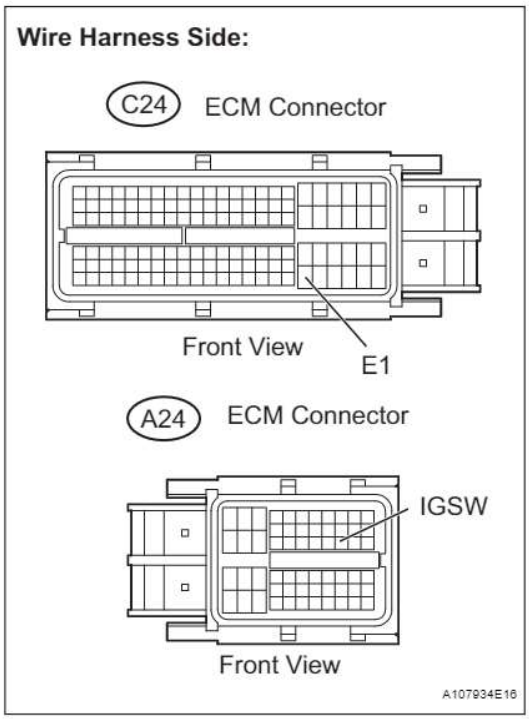

(a) Disconnect the A24 and C24 ECM connectors.
(b) Turn the ignition switch to the ON position.
(c) Measure the voltage between the terminals of the A24 and C24 ECM connectors.

Standard voltage


Tester Connection	Specified Condition
A24-28 (IGSW) - C24-104 (E1)	9 to 14 V

(d) Reconnect the ECM connectors.

OK → **Go to step 10**

NG

8	INSPECT FUSE (IGN FUSE)

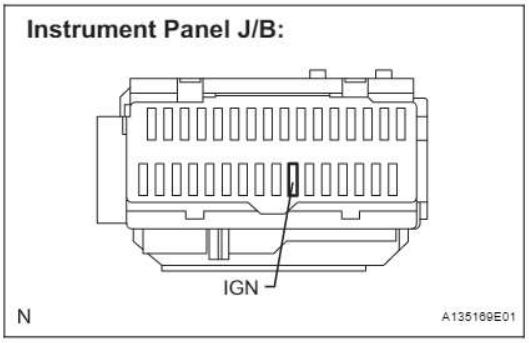


(a) Remove the IGN fuse from the instrument panel J/B.
(b) Measure the fuse resistance.
Standard resistance:
Below 1 Ω
(c) Reinstall the fuse.

NG → **REPLACE FUSE (IGN FUSE)**

ES

OK

9	INSPECT IGNITION SWITCH ASSEMBLY

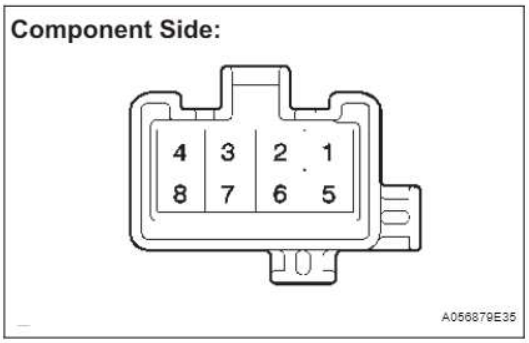

(a) Disconnect the E23 ignition switch connector.
(b) Measure the resistance between the terminals.
Standard resistance

Tester Connection	Ignition Switch Position	Specified Condition
All Terminals	LOCK	10 kΩ or higher
2 - 4	ACC	Below 1 Ω
1 - 2 - 4, 5 - 6	ON	
1 - 3 - 4, 5 - 6 - 7	START	


(c) Reconnect the ignition switch connector.

NG → **REPLACE IGNITION SWITCH ASSEMBLY**


OK

REPAIR OR REPLACE HARNESS OR CONNECTOR

10	CHECK HARNESS AND CONNECTOR (EFI RELAY - ECM, EFI RELAY - BODY GROUND)

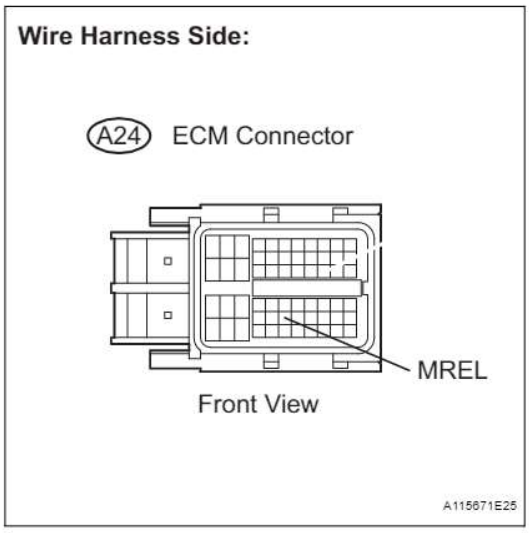

(a) Disconnect the A24 ECM connector.

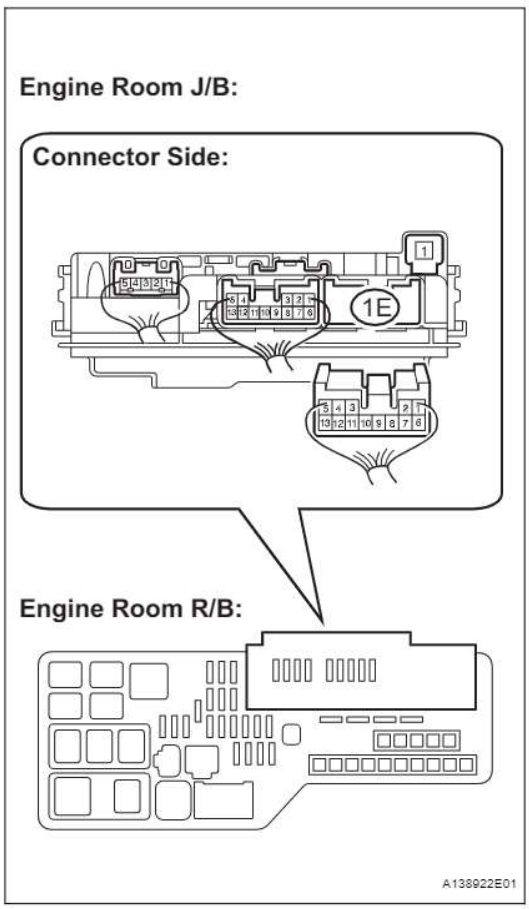

(b) Remove the engine room J/B from the engine room R/B.
(c) Disconnect the 1E engine room J/B connector.
(d) Measure the resistance between the terminals.

Standard resistance (Check for open)

Tester Connection	Specified Condition
A24-44 (MREL) - 1E-9	Below 1 Ω
1E-11 - Body ground	Below 1 Ω

Standard resistance (Check for short)

Tester Connection	Specified Condition
A24-44 (MREL) or 1E-9 - Body ground	10 kΩ or higher

(e) Reconnect the ECM connector.
(f) Reconnect the engine room J/B connector.
(g) Reinstall the engine room J/B.

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

REPLACE ECM