TABLE OF CONTENTS

1	**AUTO ACCESS SEAT**	Information regarding the AUTO ACCESS SEAT, including usage procedure
2	**Maintenance**	Checking fuses and replacing the battery of the wireless remote control
3	**When trouble arises**	Points to check when you think a malfunction has occurred
	Index	Alphabetical listing of information contained in this manual

This manual contains information about the AUTO ACCESS SEAT. Refer to the “Owner’s Manual” for other information regarding your vehicle.

1 AUTO ACCESS SEAT

1-1. AUTO ACCESS SEAT

AUTO ACCESS SEAT 6
Head restraint 9
Armrests 11
Footrest 13
Correct riding posture 14
Wireless remote control 16

1-2. Operating the AUTO ACCESS SEAT

Before operating the AUTO ACCESS SEAT 20
Moving the AUTO ACCESS SEAT outside the vehicle ... 26
Returning the AUTO ACCESS SEAT to the vehicle 30
Operating with the seat raise/lower switch 35

2 Maintenance

2-1. Maintenance

Checking and replacing fuses 38
Wireless remote control battery 40

3 When trouble arises

3-1. When you think a malfunction has occurred

AUTO ACCESS SEAT 44
If the AUTO ACCESS SEAT does not move while outside the vehicle 47
Wireless remote control 59


Index

Alphabetical index

Alphabetical index 62

Pictorial index

AUTO ACCESS SEAT

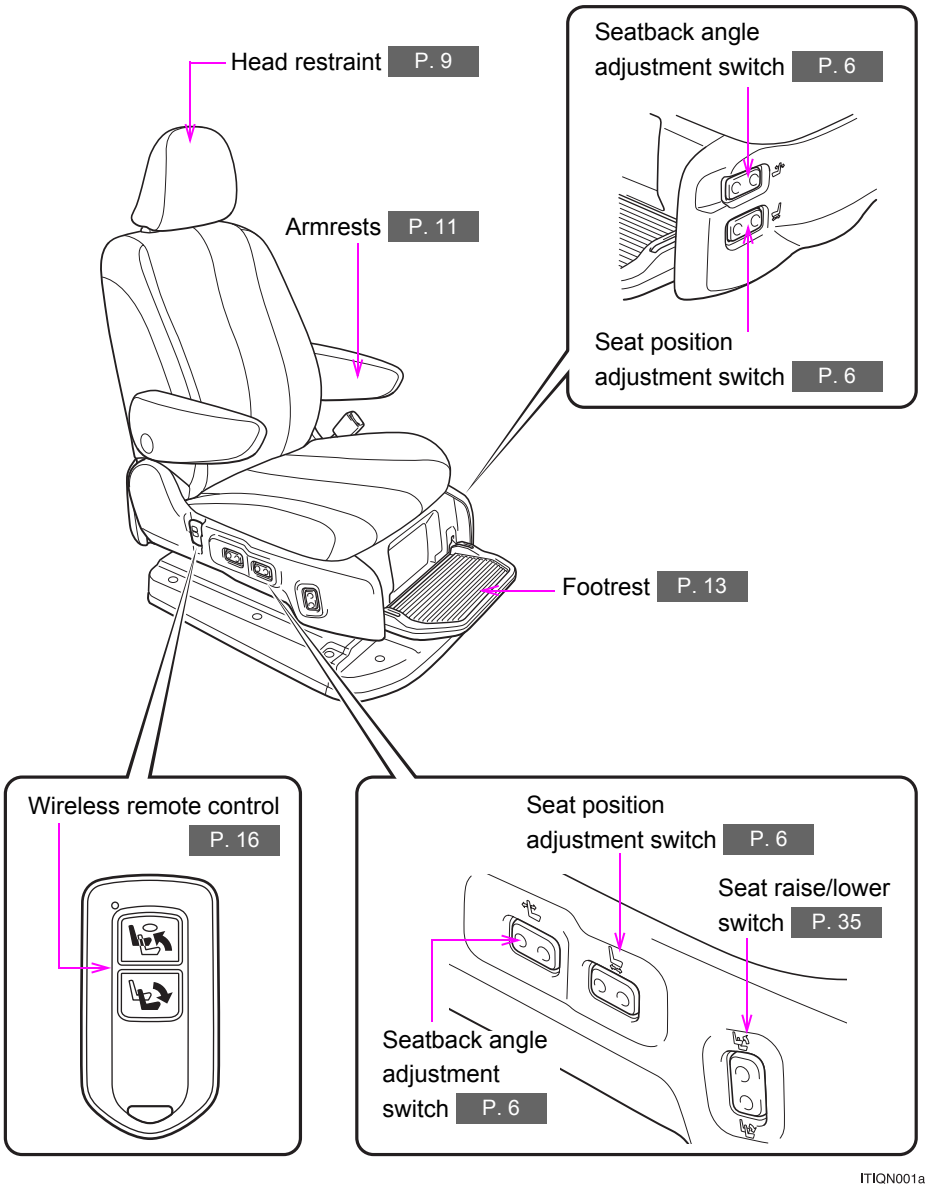

Symbols used throughout this manual

Cautions & Notices

⚠ CAUTION

This is a warning against anything which may cause injury to people if the warning is ignored. You are informed about what you must or must not do in order to reduce the risk of injury to yourself and others.


⚠ NOTICE

This is a warning against anything which may cause damage to the vehicle or its equipment if the warning is ignored. You are informed about what you must or must not do in order to avoid or reduce the risk of damage to your Toyota and its equipment.

Symbols used in illustrations

Safety symbol

The symbol of a circle with a slash through it means “Do not”, “Do not do this”, or “Do not let this happen”.




Arrows indicating operations

⇨ Indicates the action (pushing, turning, etc.) used to operate switches and other devices.

⇨ Indicates the outcome of an operation (e.g. a lid opens).

AUTO ACCESS SEAT

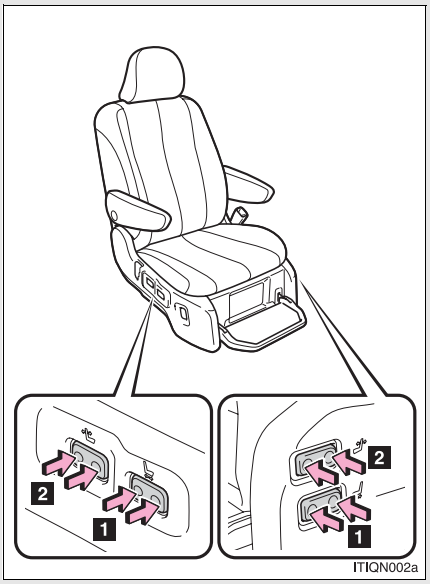

1 Seat position adjustment switch
2 Seatback angle adjustment switch

■ **Operating condition**

The seat position and seatback angle cannot be adjusted if the AUTO ACCESS SEAT is not stowed correctly inside the vehicle.

■ **Seat movement amount**

The AUTO ACCESS SEAT can be moved 3.1 in. (80 mm) forward and 1.2 in. (30 mm) backward from the starting position.

Disconnecting the battery

Do not disconnect the battery while operating the AUTO ACCESS SEAT. The AUTO ACCESS SEAT will become inoperable.
If the battery is disconnected during operation and the AUTO ACCESS SEAT becomes inoperable, reconnect the battery and refer to P. 47.

⚠ CAUTION

Wearing a seat belt

Read and follow the explanations and precautions under the “Seat belts” headings in Section 1-3 of the “Owner’s Manual”. Failing to do so may cause death or serious injury in the event of sudden braking, sudden swerving or an accident.

Child restraint lock function belt precaution

Read and follow the explanations and precautions under the “Seat belts” headings in Section 1-3 of the “Owner’s Manual”. Failing to do so may cause death or serious injury in the event of sudden braking, sudden swerving or an accident.

When installing a child restraint system to the AUTO ACCESS SEAT

Read and follow the explanations and precautions under the “Installing child restraints” headings in Section 1-7 of the “Owner’s Manual”. Failing to do so may cause death or serious injury in the event of sudden braking, sudden swerving or an accident.

CAUTION

■ Seatback angle adjustment

Do not recline the seat more than necessary when the vehicle is in motion to reduce the risk of sliding under the lap belt.
If the seat is too reclined, the lap belt may slide past the hips and apply restraint forces directly to the abdomen or your neck may contact the shoulder belt, increasing the risk of death or serious injury in the event of an accident.


NOTICE

■ To prevent seat damage

Release the switch once the adjustment operation has been completed.
If you continue to press the switch once the operation has been completed, a fault may occur.

Head restraint

Head restraint is provided for the AUTO ACCESS SEAT.

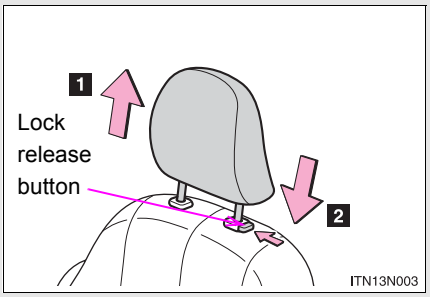


1 Up

Pull the head restraint up.

2 Down


Push the head restraint down while pressing the lock release button.

■ Adjusting the height of the head restraint




Make sure that the head restraint is adjusted so that the center of the head restraint is closest to the top of your ears.

■ Removing the head restraint



Pull the head restraint up while pressing the lock release button.

Installing the head restraint



Align the head restraint with the installation holes and push it down to the lock position.

Press and hold the lock release button when lowering the head restraint.

CAUTION


Head restraint precautions

Observe the following precautions regarding the head restraint.
Failure to do so may result in death or serious injury.

- Use the head restraint designed for AUTO ACCESS SEAT.
- Adjust the head restraint to the correct position at all times.
- After adjusting the head restraint, push down on it and make sure it is locked in position.
- Do not drive with the head restraint removed.

Armrests

Lower the armrests as far as they will go when rotating or raising/lowering the AUTO ACCESS SEAT.

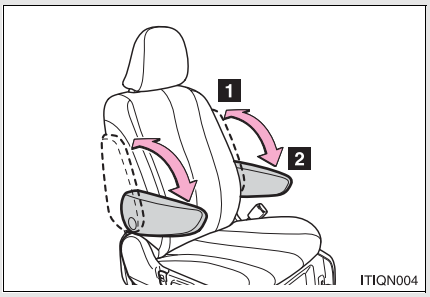


1 Raise
2 Lower

■ **Wearing the seat belt**

Wearing the seat belt is easier with the armrest raised.

CAUTION


When wearing the seat belt

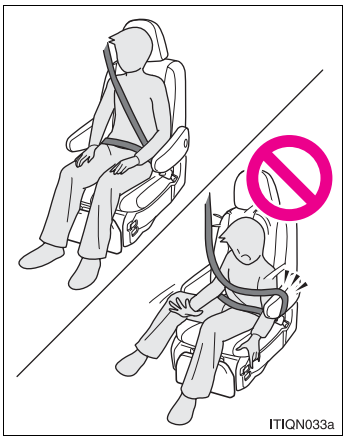

Wear the seat belt correctly, passing it underneath the armrest.
If the seat belt is caught on the armrest, it may not be fully effective, which could cause death or serious injury in the event of a sudden braking, sudden swerving or an accident.

Footrest

Lower the footrest as far as it will go when rotating or raising/lowering the AUTO ACCESS SEAT.

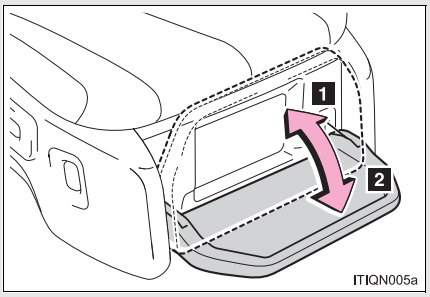

1 Raise
2 Lower


CAUTION

■ When operating the footrest

Operate the footrest by holding the front edge.
You may be injured if your fingers get caught in the rotating parts.

Correct riding posture

Maintain the correct posture while sitting in the seat, as follows:

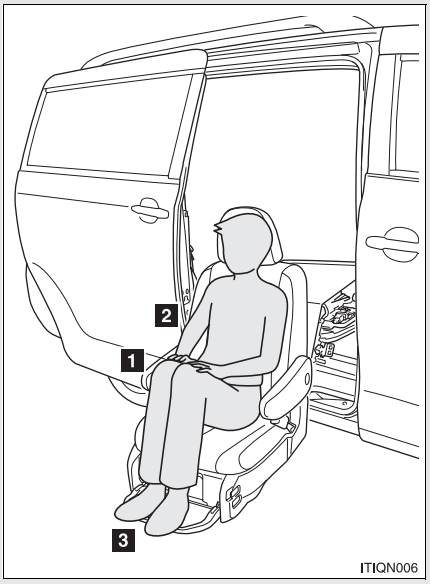

1. Sit while keeping both knees aligned and inside the AUTO ACCESS SEAT.
2. Lower the armrests and keep both arms inside the armrests and inside the AUTO ACCESS SEAT.
3. Lower the footrest and place both feet on the footrest.


   If you cannot place your feet on the footrest, have someone help you, so as not to get your feet caught between the AUTO ACCESS SEAT and the vehicle body.

CAUTION

■ When sitting in the seat

- When the seat is being used by a person who is unable to bend his/her knees or neck, or by a person that is unable to sit far back in the seat, be careful as their head, feet etc. may hit the vehicle body, and rotation of the AUTO ACCESS SEAT may become difficult while the seat is occupied.
- Do not stand on the footrest.
  Doing so may damage the footrest or cause you to fall from the footrest, which may cause an injury.

■ When operating

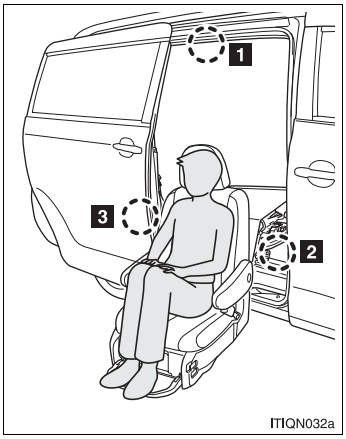

When operating the AUTO ACCESS SEAT, make sure that the occupant's head, arms and legs do not hit the door opening.


1 Collision between door opening and head

2 Caught between door opening and AUTO ACCESS SEAT

3 Collision between door opening and legs


Wireless remote control

The wireless remote control can be used to rotate and raise or lower the AUTO ACCESS SEAT.

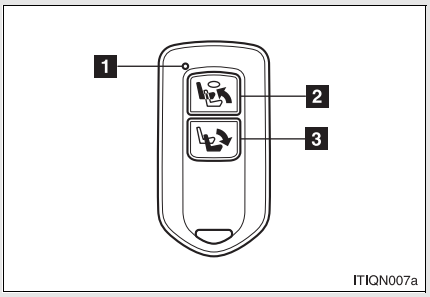

1 Indicator light
2 Seat raise switch
3 Seat lower switch

Effective range

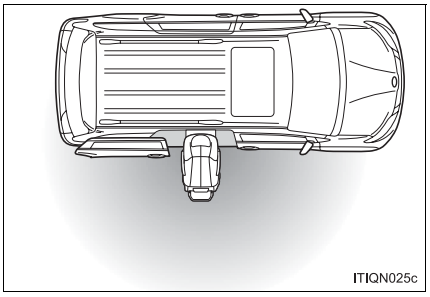

Approximately 3.3 ft. (1 m) from the AUTO ACCESS SEAT

■ **Operating conditions**

- The effective range of the wireless remote control changes in accordance with surroundings.
- Interference from other radio waves may cause the AUTO ACCESS SEAT to stop moving temporarily even when pressing the wireless remote control switches. In this event, do the following:
  - Stand in a different place and press the switch.
    Press the switch once again after moving. The AUTO ACCESS SEAT will not operate if you hold the switch down while changing position.
  - Operate the seat raise/lower switch (→P. 35)

■ **Battery**

- The lifespan of the battery is about 6 months, but this may change in accordance with usage.
- If the battery is discharged, the AUTO ACCESS SEAT may not operate even if the wireless remote control is operated or the indicator light will stop flashing. In these events, replace the battery with a new one.
  (→P. 40)

■ **When riding in an aircraft**

When bringing a wireless remote control onto an aircraft, make sure you do not press any buttons on the wireless remote control while inside the aircraft cabin. If you are carrying the wireless remote control in your bag etc., ensure that the buttons are not likely to be pressed accidentally. Pressing a button may cause the wireless remote control to emit radio waves that could interfere with the operation of the aircraft.

■ **Conditions affecting operation**

If you use the wireless remote control to operate the AUTO ACCESS SEAT at the same time as doing any of the following, the AUTO ACCESS SEAT may not operate properly:

- Operating the AUTO ACCESS SEAT using another wireless remote control
- Operating the AUTO ACCESS SEAT using the seat raise/lower switch
- Using the smart key system
- Unlocking and locking the doors using the wireless remote control

■ **When replacing either the transmitter or the receiver of the wireless remote control**

It is necessary to replace both the transmitter and the receiver. Contact your Toyota dealer.

■ **Certification for the wireless remote control**

U.S.A.

FCC ID: HYQ12BDF
FCC ID: HYQ13BDH

NOTE:
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING:
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Canada

NOTE:
Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

⚠ CAUTION

■ Wireless remote control precautions

Observe the following precautions to reduce the risk of injury.

- Operate the AUTO ACCESS SEAT from a position from which you can see the occupant of the seat.
- Make sure that the occupant's head, arms and legs will not get caught between the seat and the body of the vehicle.
- Steady the AUTO ACCESS SEAT and the occupant with your hand while operating.

⚠ NOTICE

■ To prevent wireless remote control damage


- Observe the following:
  - Do not expose the wireless remote control to high temperatures by placing it in direct sunlight.
  - Do not disassemble the wireless remote control.
  - Do not drop the wireless remote control, subject it to strong shocks or bend it.
  - Do not get the wireless remote control wet.
- Do not wipe the wireless remote control with thinner, gasoline or benzene. The surface of it may be damaged.
  When cleaning the wireless remote control, wipe it using a wrung cloth soaked in water or lukewarm water.
- Do not attach metallic or magnetic materials to the wireless remote control or place the wireless remote control close to such materials.
- Do not attach metallic window tinting or other metallic objects such as non-genuine antenna to the windows.
- Do not attach accessories to the wireless remote control. These could get caught in the AUTO ACCESS SEAT during operation.

Before operating the AUTO ACCESS SEAT

The AUTO ACCESS SEAT (right-hand second seat) can be rotated, raised and lowered electrically to help the seat occupant easily enter and exit the vehicle.
Have all operations carried out by an assistant.

STEP 1 Park the vehicle on a flat surface and leave the engine running.

STEP 2

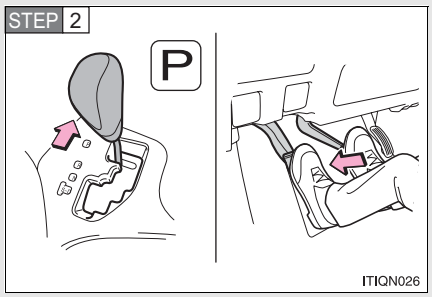


Shift the shift lever to P and set the parking brake.

STEP 3 Check that there are no people or items of luggage around the AUTO ACCESS SEAT, and that there are no people around the vehicle.

STEP 4 Open the right-hand sliding door fully.


STEP 5

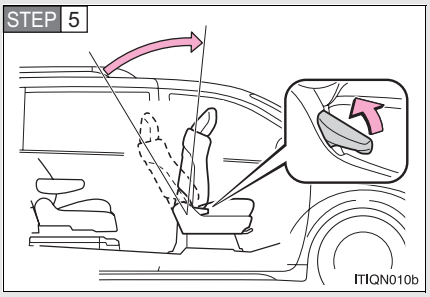

Fold the front passenger seat-back while pulling the seat-back angle lever.

STEP 6 Unfasten the seat belt on the AUTO ACCESS SEAT.

STEP 7

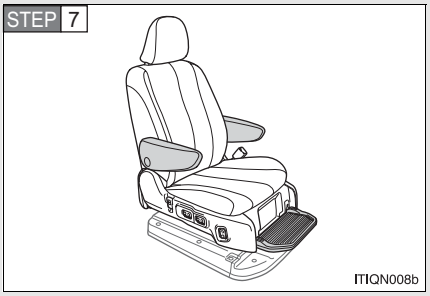

Adjust the armrest and foot restraint on the AUTO ACCESS SEAT to the down-most position.

Beep sounds

The beep makes the following sounds in response to operating procedures and conditions.

Beep	Operation/Condition
Once (normal operation)	When the wireless remote control switches or the seat raise/lower switch is pressed and the AUTO ACCESS SEAT operates.
	When the seat raise switch is pressed and the AUTO ACCESS SEAT has finished stowing.
Twice (malfunction)	When the seat lower switch is pressed while the right-hand sliding door is closed.
	When the seat lower switch is pressed while the seat belt of the AUTO ACCESS SEAT is still buckled.
	When the right-hand sliding door is shut before the AUTO ACCESS SEAT has been properly stowed.
	If the AUTO ACCESS SEAT hits an obstacle while rotating, or operation is otherwise obstructed.
Continuously	When the AUTO ACCESS SEAT is operated while the shift lever is not in P.


CAUTION

Before operating the AUTO ACCESS SEAT

When the seat is being used by a person who is unable to bend his/her knees or neck, or by a person that is unable to sit far back in the seat, be careful as their head, feet etc. may hit the vehicle body, and rotation of the AUTO ACCESS SEAT may become difficult while the seat is occupied.

CAUTION

When operating the AUTO ACCESS SEAT

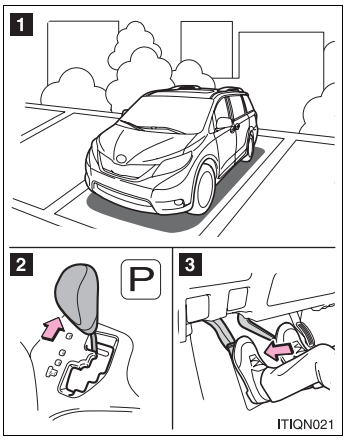


- Do not operate while parked on an incline or on uneven ground. The occupant may fall from the seat or from their wheelchair, or you may be hit by the wheelchair while putting it away, possibly causing an injury.

1 Park the vehicle on a flat surface.

2 Shift the shift lever to P.

3 Set the parking brake securely.




- Operate the AUTO ACCESS SEAT while being careful of the occupant's head, feet and hands.
  Injury may result if they hit the vehicle body.

- Check the surroundings for safety, making sure that there are no pedestrians, bicycles, etc.
  Failure to do so may result in an accident.
- Do not allow children to play in or operate the AUTO ACCESS SEAT, as it may be damaged.

CAUTION

When operating the AUTO ACCESS SEAT

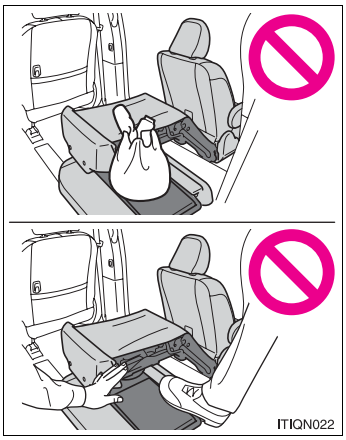


- Do not place luggage or hands and feet underneath or around the AUTO ACCESS SEAT.
  Hands and feet could get caught, possibly resulting in an injury.
- Make sure that the seat belt is unbuckled.
  There is a risk that the occupant of the AUTO ACCESS SEAT could be injured.
- Do not stand on the footrest.
  Doing so may damage the footrest, or cause the occupant to fall from the footrest, possibly causing injury.
- Make sure to use the armrests and that they are lowered as far as possible.
  If the armrests are not used, the occupants may lose stability and could fall from the seat, possibly causing an injury.

NOTICE

To prevent seat damage

- Before operating the AUTO ACCESS SEAT, make sure that there are no luggage items or other obstacles around the moving parts of the seat. The AUTO ACCESS SEAT may be damaged if it hits an obstacle.
- The load capacity of the AUTO ACCESS SEAT is 330 lb. (150 kg). Do not overload the seat.



- Before operating the AUTO ACCESS SEAT, make sure that the seat belt is unbuckled and that the seat belt is not tangled up with the seat. If the AUTO ACCESS SEAT is operated while the seat belt is tangled, the AUTO ACCESS SEAT may be damaged.

To prevent battery discharge

Use the AUTO ACCESS SEAT while the engine is running.
If the engine is started while the AUTO ACCESS SEAT is being used, the AUTO ACCESS SEAT may stop during operation, and the seat will need to be initialized for re-operation. (→P. 47)

Moving the AUTO ACCESS SEAT outside the vehicle

STEP 1 Park the vehicle on a flat surface and leave the engine running.

STEP 2 Shift the shift lever to P and set the parking brake.


STEP 3 Confirm the following:

- The occupant is sitting correctly in the AUTO ACCESS SEAT. (→P. 14)
- The seat belt is not caught up in the AUTO ACCESS SEAT.
- The occupant of the right-hand third seat is safe.
- The condition of the AUTO ACCESS SEAT (→P. 20)

STEP 4 Open the right-hand sliding door fully.


STEP 5 Fold the front passenger seatback while pulling the seatback angle lever. (→P. 20)

STEP 6

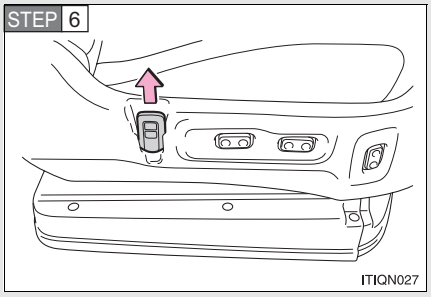


Remove the wireless remote control from the AUTO ACCESS SEAT.

STEP 7

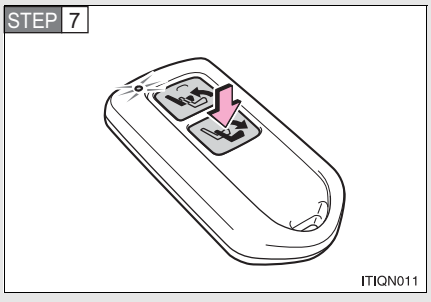


Press and hold the seat lower switch on the wireless remote control to rotate and lower the AUTO ACCESS SEAT.

Operation can also be carried out by the seat raise/lower switch. (→P. 35)

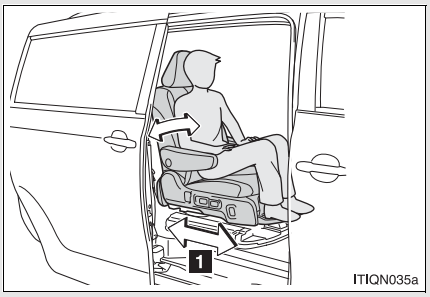


1 The beep will sound once, and the AUTO ACCESS SEAT will begin to move automatically.

The indicator light on the wireless remote control will flash.

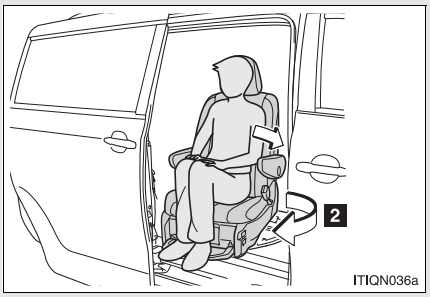

2 The AUTO ACCESS SEAT will rotate while the seatback reclines and while moving towards the front of the vehicle.

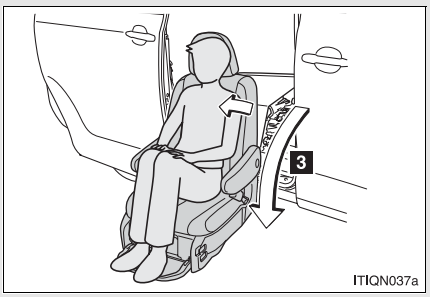

3 The AUTO ACCESS SEAT will slide out of the vehicle and will lower while the seatback raises.

Release the switch once the seat has lowered fully and has stopped automatically.

STEP 8 Return the wireless remote control to the AUTO ACCESS SEAT.

■ **Operating conditions**

Under the following conditions, the seat will not rotate or lower even if the seat lower switch is pressed.

- The right-hand sliding door is not opened completely.
- The seat belt is caught up in the AUTO ACCESS SEAT.
- The shift lever is not in P.

■ **Wireless remote control**

- The AUTO ACCESS SEAT will operate when the seat lower switch has been pressed and the beep has sounded once.
- The AUTO ACCESS SEAT will stop if the seat lower switch is released during operation.

■ **Jam protection function**

If the operation of the AUTO ACCESS SEAT is interrupted by collision with an obstacle etc., the beep will sound twice and the seat will retreat slightly and then stop. If this happens, make sure that the hands, feet etc. of the occupant will not hit the body of the vehicle, and operate the seat once again after removing the obstacle.

■ **Conditions which will halt operation**

If another wireless remote control or the seat raise/lower switch are operated while the AUTO ACCESS SEAT is being operated by wireless remote control, the AUTO ACCESS SEAT will stop operating.

⚠ CAUTION

■ Before moving the AUTO ACCESS SEAT outside the vehicle

- Check that the right-hand third seat occupant is safe.



- Do not try to close the right-hand sliding door while operating the AUTO ACCESS SEAT. Otherwise, the hands or feet of the occupant may hit the door, possibly causing injuries.

⚠ NOTICE

■ To prevent AUTO ACCESS SEAT damage

- Press and hold the wireless remote control switches, instead of pressing them repeatedly.
- Wait for approximately 1 second before changing to another switch.
- Do not leave the AUTO ACCESS SEAT outside the vehicle.
  The seat may deform, freeze or rust, especially if left out in the sun, rain or cold.

Returning the AUTO ACCESS SEAT to the vehicle

STEP 1 Park the vehicle on a flat surface and leave the engine running.

STEP 2 Shift the shift lever to P and set the parking brake.


STEP 3 Confirm the following:

- The right-hand sliding door is fully open.
- The occupant is sitting correctly in the AUTO ACCESS SEAT. (→P. 14)
- The occupant of the right-hand third seat is safe.
- The condition of the AUTO ACCESS SEAT (→P. 20)

STEP 4 Fold the front passenger seatback while pulling the seatback angle lever. (→P. 20)


STEP 5 Remove the wireless remote control from the AUTO ACCESS SEAT. (→P. 26)

STEP 6

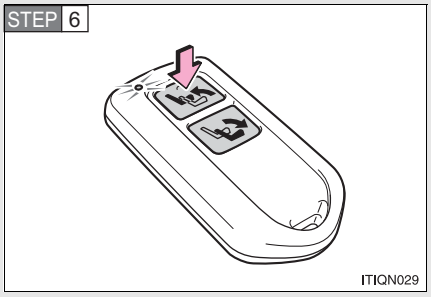


Press and hold the seat raise switch on the wireless remote control to rotate and raise the AUTO ACCESS SEAT.

Operation can also be carried out by pressing the seat raise/lower switch. (→P. 35)

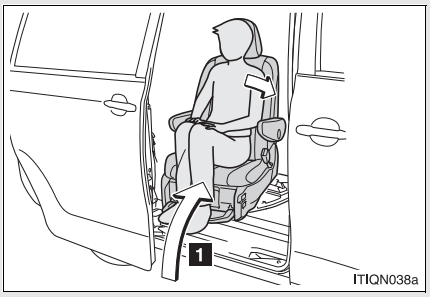

1 The beep will sound once, and the AUTO ACCESS SEAT will begin to move automatically while the seatback reclines.

The indicator light on the wireless remote control will flash.

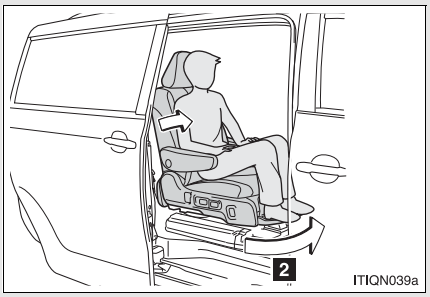

2 The AUTO ACCESS SEAT will rotate while the seatback raises and while moving towards the rear of the vehicle.

Once the seat has rotated fully, the beep will sound once and the seat will stop moving automatically. Release the switch at this time.

STEP 7 Return the wireless remote control to the AUTO ACCESS SEAT. (→P. 26)

STEP 8 Adjust the AUTO ACCESS SEAT as necessary (→P. 6), and buckle the seat belt before driving.

STEP 9 Close the right-hand sliding door.

■ **Wireless remote control**

- When the seat raise switch is pressed, the beep will sound once and the AUTO ACCESS SEAT will begin to operate. The seat will not operate if the switch is pressed repeatedly.
- The AUTO ACCESS SEAT will stop operating if the seat raise switch is released during operation.

■ **Jam protection function**

If the operation of the AUTO ACCESS SEAT is interrupted by collision with an obstacle etc., the beep will sound twice and the seat will retreat slightly and then stop. If this happens, make sure that the hands, feet etc. of the occupant will not hit the body of the vehicle, and operate the seat once again after removing the obstacle.

■ **Conditions which will halt operation**

If another wireless remote control or the seat raise/lower switch are operated while the AUTO ACCESS SEAT is being operated by wireless remote control, the AUTO ACCESS SEAT will stop operating.

■ **If the AUTO ACCESS SEAT has not been stowed properly**

The following operations cannot be carried out.

- Power sliding door function (right-hand sliding door only)
- Shifting
- Adjustment of the seat position and seatback angle of the AUTO ACCESS SEAT

⚠ CAUTION

■ **Before returning the AUTO ACCESS SEAT to the vehicle**

- Check that the right-hand third seat occupant is safe.
  Their feet etc. may get caught between the AUTO ACCESS SEAT and the vehicle body, possibly causing an injury.
- Make sure that the right-hand sliding door is fully open. Otherwise, the hands or feet of the occupant may hit the door when the AUTO ACCESS SEAT is operated, possibly causing an injury.

⚠ CAUTION

■ When the AUTO ACCESS SEAT has been returned to the vehicle



- Shake the AUTO ACCESS SEAT gently to check that the seat is stowed properly. If not stowed properly, the seat may move unexpectedly, and could cause injuries.
- When moving the front passenger seat backward or when tilting down the seatback, make sure that you do not hit the occupant of the AUTO ACCESS SEAT, as this may result in an injury.

NOTICE

To prevent AUTO ACCESS SEAT damage

- Press and hold the wireless remote control switches, instead of pressing them repeatedly.
- Wait for approximately 1 second before changing to another switch.
- Open the right-hand sliding door fully before returning the AUTO ACCESS SEAT inside the vehicle. The seat may hit the vehicle body, possibly causing damage.

To prevent battery discharge

Do not leave the right-hand sliding door open.

Operating with the seat raise/lower switch

If the battery of the wireless remote control has discharged or another malfunction has occurred, the seat raise/lower switch can be used to operate the AUTO ACCESS SEAT. (The AUTO ACCESS SEAT will operate in the same way as when operated using the wireless remote control).


STEP 1 Park the vehicle on a flat surface and leave the engine running.

STEP 2 Shift the shift lever to P and set the parking brake.

STEP 3 Open the right-hand sliding door fully.

STEP 4 Fold the front passenger seatback while pulling the seatback angle lever. (→P. 20)

STEP 5

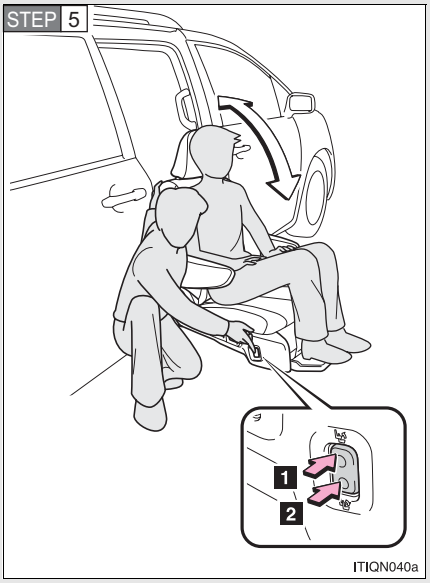

Press and hold the seat raise/lower switch.

1 Raise

2 Lower

The beep will sound once, and the AUTO ACCESS SEAT will operate.

The AUTO ACCESS SEAT will operate while the switch is being pressed. If the switch is released, the seat will stop in that position.

STEP 6 When the AUTO ACCESS SEAT stops automatically, release the switch.

When returning the AUTO ACCESS SEAT to the vehicle, release the switch after the seat has stopped automatically and the beep has sounded once.

■ Seat raise/lower switch

When the seat raise/lower switch is pressed, the beep will sound once and the AUTO ACCESS SEAT will begin to operate. The seat will not operate if the switch is pressed repeatedly.


⚠ NOTICE

■ To prevent AUTO ACCESS SEAT damage

- Press and hold the seat raise/lower switch, instead of pressing them repeatedly.
- Open the right-hand sliding door fully before returning the AUTO ACCESS SEAT inside the vehicle. The footrest may hit the vehicle body, possibly causing damage.


Front seats

Manual seat

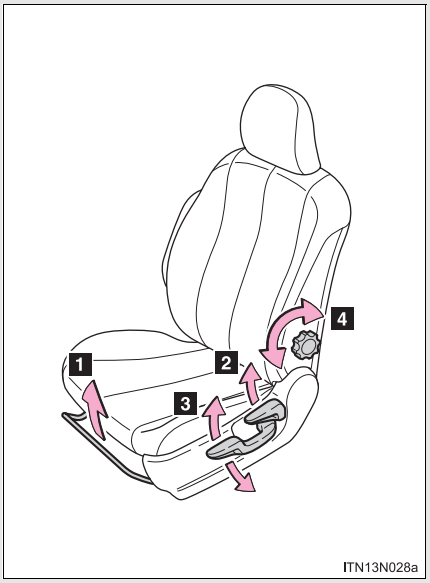

1. Seat position adjustment lever
2. Seatback angle adjustment lever
3. Vertical height adjustment lever (driver's side only)
4. Lumbar support adjustment knob (driver's side only)


Power seat

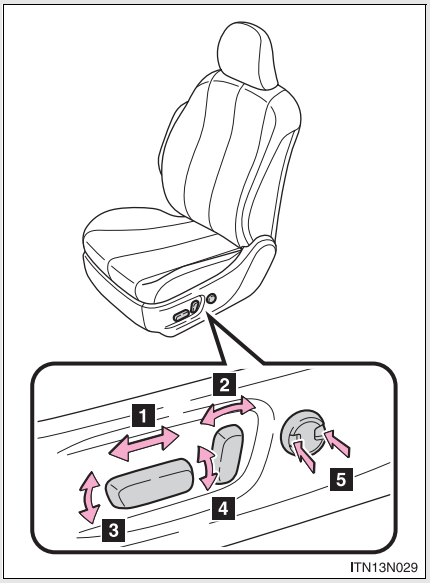

1 Seat position adjustment switch
2 Seatback angle adjustment switch
3 Seat cushion (front) angle adjustment switch (driver's side only)
4 Vertical height adjustment switch (driver's side only)
5 Lumbar support adjustment switch (driver's side only)

Power easy access system (vehicles with driving position memory)

When the driver enters and exits the vehicle, the driver's seat will automatically perform the following operations:

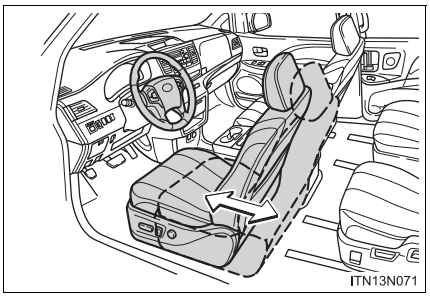


Exiting the vehicle: When all of the following actions have been performed, the seat will move backward (auto away function):

- The shift lever has been shifted to P
- Vehicles without a smart key system: The engine switch has been turned off.
  Vehicles with a smart key system: The "ENGINE START STOP" switch has been turned off.
- The driver seat belt has been unfastened

Entering the vehicle: When either of the following actions has been performed, the seat will move forward (auto return function):

- Vehicles without a smart key system: The engine switch has been turned to the “ACC” position.
  Vehicles with a smart key system: The “ENGINE START STOP” switch has been turned to ACCESSORY mode.
- The driver seat belt has been fastened

Active head restraints

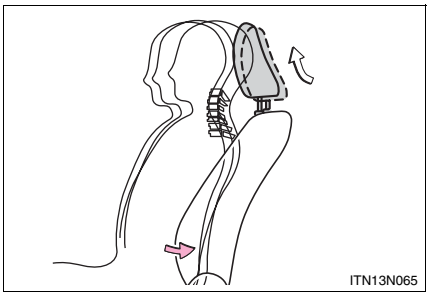


When the occupant’s lower back presses against the seatback during a rear-end collision, the head restraint moves slightly forward and upward to help reduce the risk of whiplash on the seat occupant.

The auto away function for exiting the driver seat (vehicles with driving position memory)

If the seat is already close to the rearmost position, the auto away function may not operate when the driver exits the vehicle.

Active head restraints

Even small forces applied to the seatback may cause the head restraint to move. When a locked head restraint is pushed up forcibly, the head restraint inner structure may appear. This does not indicate a problem.

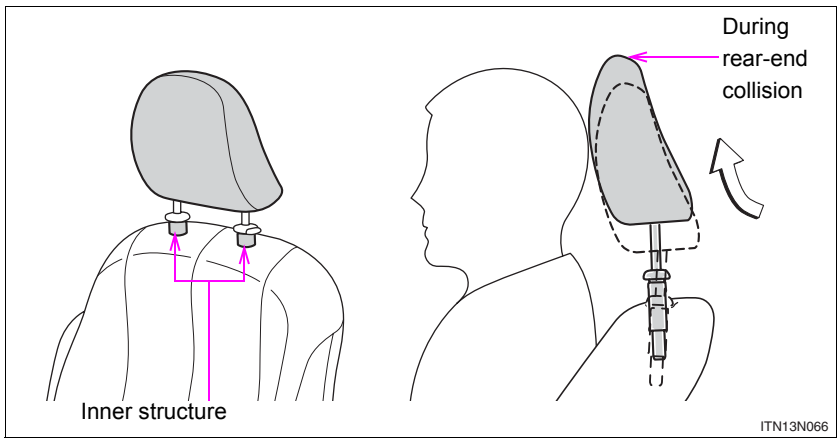


CAUTION

Seat adjustment

- To reduce the risk of sliding under the lap belt during a collision, do not recline the seat more than necessary.
  If the seat is reclined too far, the lap belt may slide past the hips and apply restraint forces directly to the abdomen or your neck may contact the shoulder belt, increasing the risk of death or serious injury in the event of an accident.
  Adjustments should not be made while driving as the seat may unexpectedly move and cause the driver to lose control of the vehicle.
- Manual seat: After adjusting the seat, make sure that the seat is locked in position.


Rear seats

Second seats (Tip-up seat)

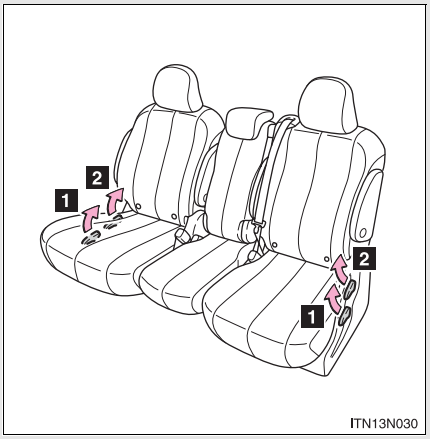

1 Seat position adjustment lever
2 Seatback angle adjustment lever

Second seats (Ottoman seat)

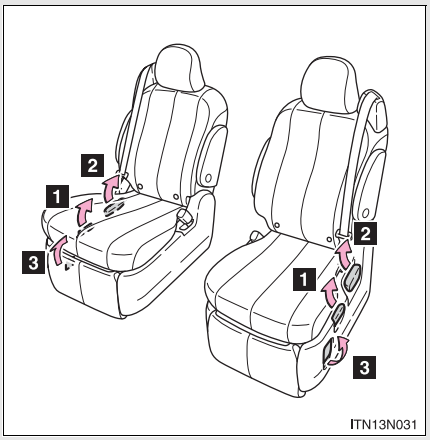


1 Seat position adjustment lever
2 Seatback angle adjustment lever
3 Ottoman angle adjustment lever

Second seats (AUTO ACCESS SEAT)


Refer to “AUTO ACCESS SEAT OWNER’S MANUAL”.

Third seats (manual seat)

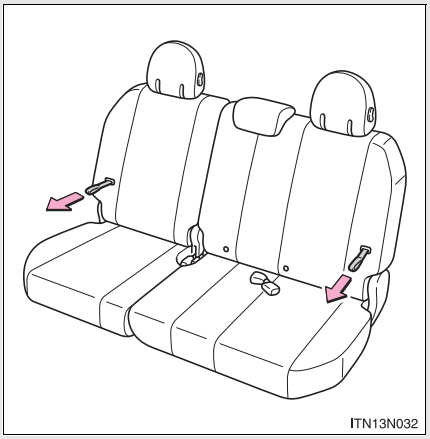

Seatback angle adjustment strap

Third seats (power seat)

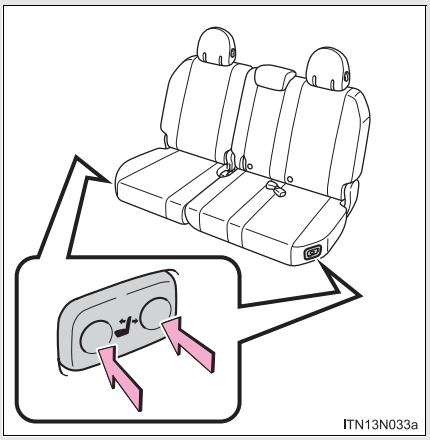


Seatback angle adjustment switch

Moving a second seat for third seat access


■ Getting in the vehicle

Tip-up seats

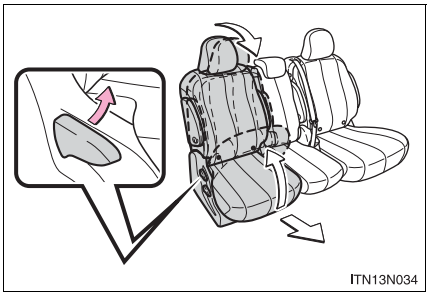

Pull the seatback angle adjustment lever and fold down the seatback. The cushion will tip up. The seat can slide forward.
Move the seat to the frontmost position.


Ottoman seats

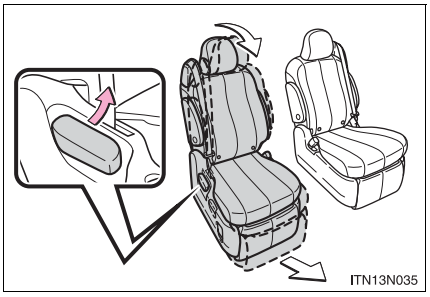

Pull the seatback angle adjustment lever and fold down the seatback. The seat can slide forward.
Move the seat to the frontmost position.

■ Getting out of the vehicle


Tip-up seats

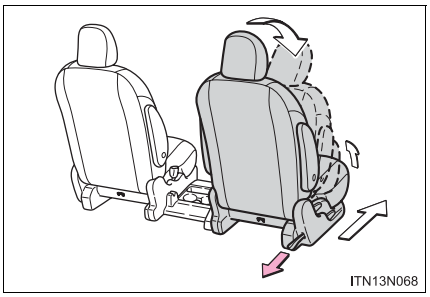

Pull the strap and fold down the seatback. The cushion will tip up. The seat can slide forward.
Move the seat to the frontmost position.

Make sure that no passenger is seated on the second seat before pulling the strap.

Ottoman seats

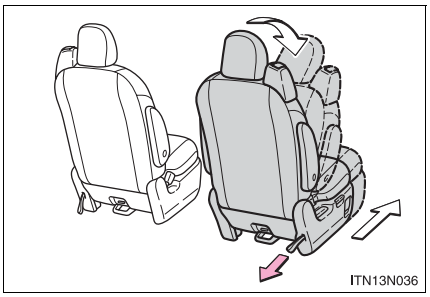

Pull the strap and fold down the seatback. The seat can slide forward.
Move the seat to the frontmost position.

Make sure that no passenger is seated on the second seat before pulling the strap.


■ After passengers have entered/exited the vehicle

Lift up the seatback and slide the seat backward until it locks.

Removing the second seats

■ Removing the second outside seats (Tip-up seats)


STEP 1

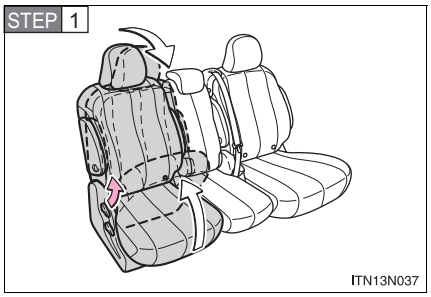

Pull the armrests up.
Pull the seatback adjustment lever and fold down the seatback. The cushion will tip up.


STEP 2 Slide the seat forward to a lock position.

STEP 3

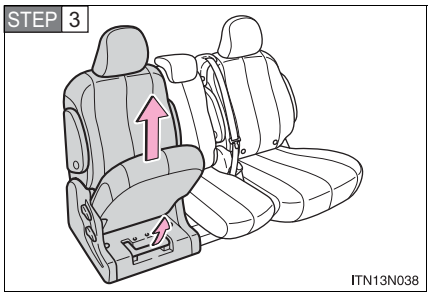


Pull the release lever under the cushion and simultaneously lift the seat to remove.

■ **Removing the second outside seats (Ottoman seats)**

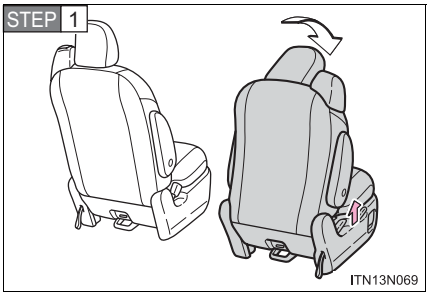


Pull the armrests up.
Pull the seatback adjustment lever and fold down the seatback.

STEP 2 Slide the seat to a forward lock position.

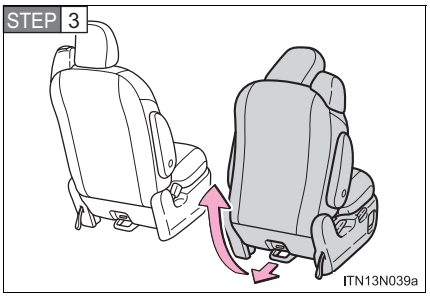


Pull the release lever behind the seatback straight back, then up. While moving the lever up, simultaneously lift the seat to remove.

■ Removing the second center seat (if equipped)

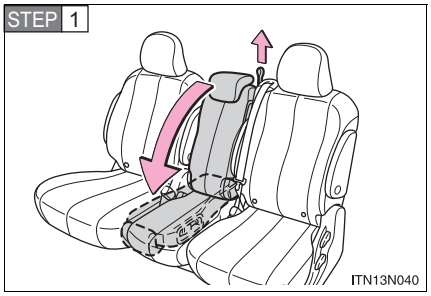


Pull the lock release strap and fold down the second center seatback.

Make sure that the head restraint is in the lowest position.

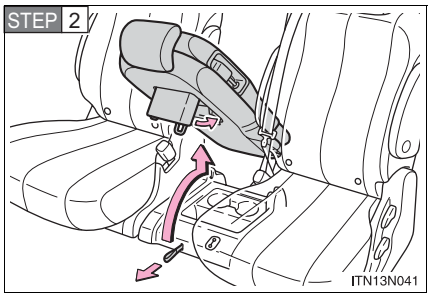

Pull the lock release strap under the seat to remove the seat.
Retract the cushion leg.

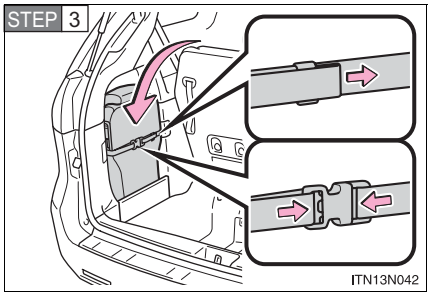

Stow the seat in the storage box of the luggage room (cushion side first).
Engage the stow latch buckle to hold the seat and tighten the latch strap.

Installing the second seats

■ Installing the second outside seats

STEP 1 Align the marking on the seat side cover to the marking on the rail cover.

Tip-up seat


ITN13N062a

Align the marking on the seat front cover to the rail.

Ottoman seat


ITN13N063


Align the marking on the seat back cover to the rail.

STEP 2 Lower the seat and engage the latches.


If you locked the seat latches unintentionally before installing securely, pull the release lever to unlock the latches.

Make sure the seat is locked in place by trying to shake the seatback and lift up the seat cushion.


■ Installing the second center seats (if equipped)

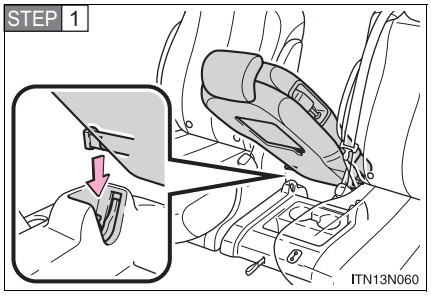

Engage the rear pins with the hooks.

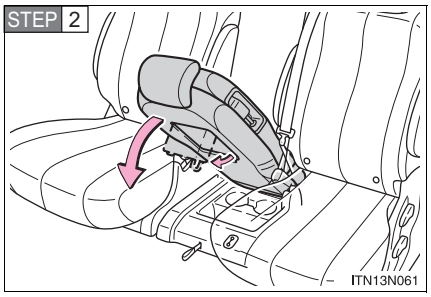

Unfold the cushion leg and push down on the seat to engage the front lock.

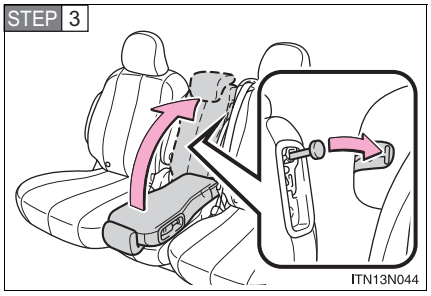


Unfold the seatback and lock it.

Make sure the seat is locked in place by trying to shake the seatback and lift up the seat cushion.

Folding down the third seats (manual seats)

■ Before folding the third seats


STEP 1

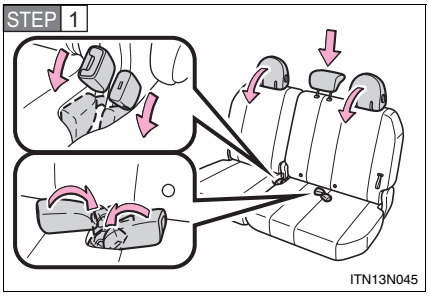

Fold the outside head restraints and lower the center head restraint to the lowest position, and stow the seat belt buckles.


STEP 2 Stow the center seat belt. (→P. 130)

■ Folding down the third seatbacks

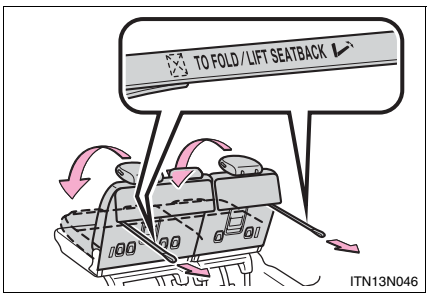

Pull the “TO FOLD/LIFT SEATBACK” strap and fold down the seatback.

■ Returning the third seatbacks

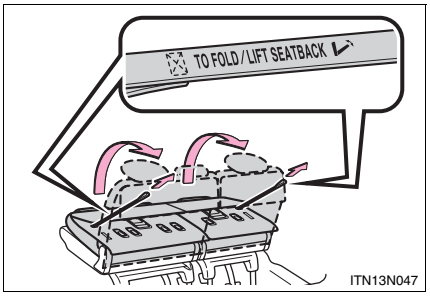


Pull the “TO FOLD/LIFT SEATBACK” strap, and raise the seatback and the outside head restraints.

Folding down the third seats (power seats)

You can operate the power third seats when the shift lever is in P.

■ Before folding the third seats


STEP 1

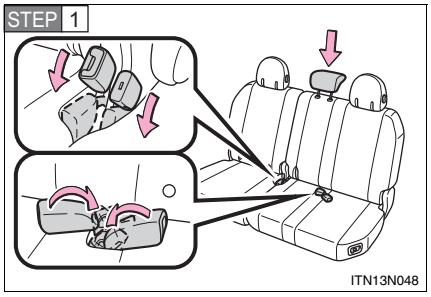

Lower the center head restraints to the lowest position and stow the seat belt buckles.

STEP 2 Stow the center seat belt. (→P. 130)

■ Folding down the third seatbacks

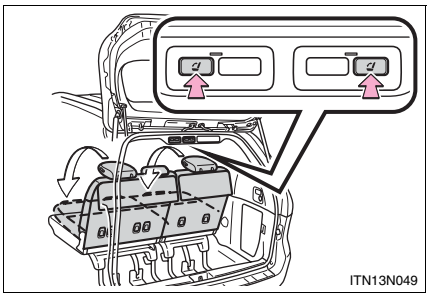

Press the folding/returning switch.

■ Returning the third seatbacks


Press the folding/returning switch, returning switch (→P. 114) or seatback angle adjustment switch (→P. 101).

Stowing the third seats (manual seats)

Before stowing or returning third seat, remove any items from the floor area to prevent interference with moving parts.

■ Before stowing the third seats

STEP 1

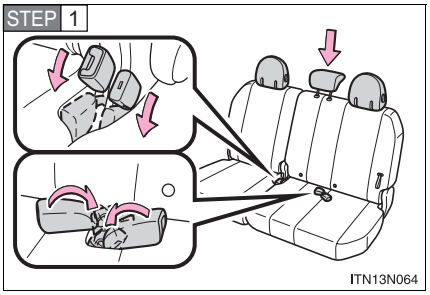


Lower the center head restraint to the lowest position, and stow the seat belt buckles.

STEP 2 Stow the center seat belt. (→P. 130)

■ Stowing the third seats


STEP 1

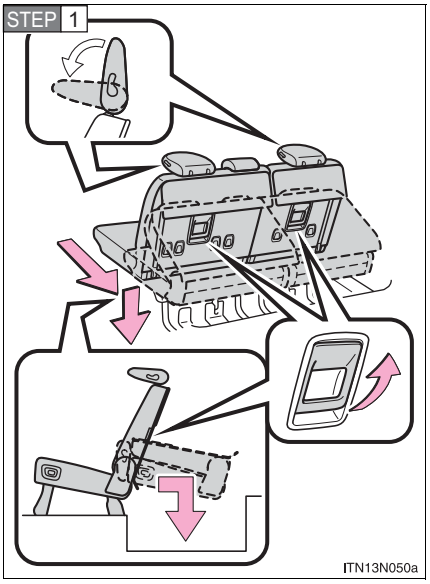

Pull the handle to move the seat rearward. Then push the seat down.

The outside head restraints are folded automatically.

STEP 2

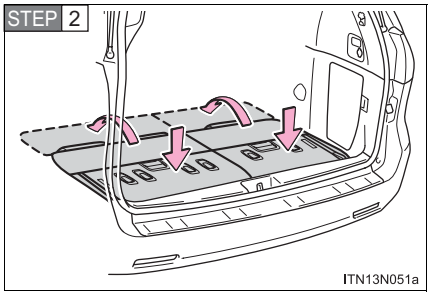


Push the seat against the floor and make sure it is locked securely.
Open the flaps.

■ Before returning the third seats

Be sure to move the second seats forward from the rearmost position, as they may interfere with the third seats returning operation.


■ Returning the third seats

STEP 1

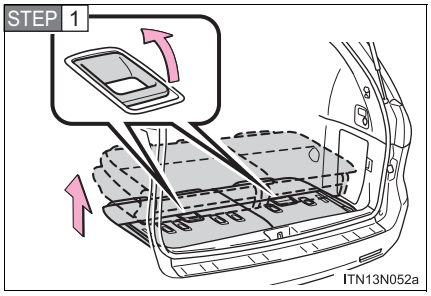

Return the flaps.
Pull the handle and lift up the seat rearward.

STEP 2

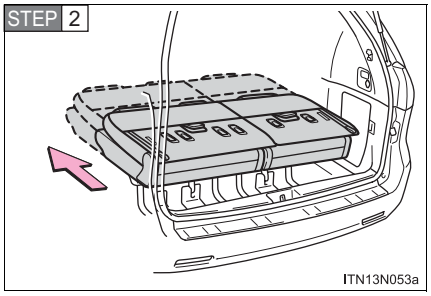

Push the seat forward and then engage the front leg locks.

Make sure the front and rear legs are locked securely.


STEP 3 Raise the seatback and the outside head restraints. (→P. 109)

Stowing the third seats (power seats)

You can operate the power third seats when the shift lever is in P. Before stowing or returning third seat, remove any items from the floor area to prevent interference with moving parts.

■ Before stowing the third seats

STEP 1

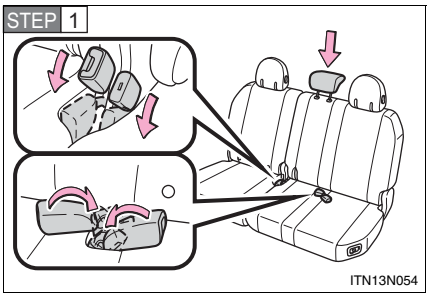


Lower the center head restraints to the lowest position and stow the seat belt buckles.

STEP 2 Stow the center seat belt. (→P. 130)

■ Stowing the third seats


STEP 1

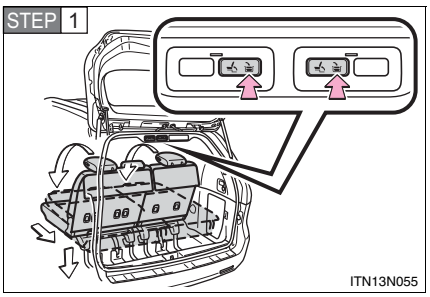

Press and hold the stowing switch.

A beep sounds twice to indicate the start of the operation. The beep sounds again twice when the operation is completed.

STEP 2

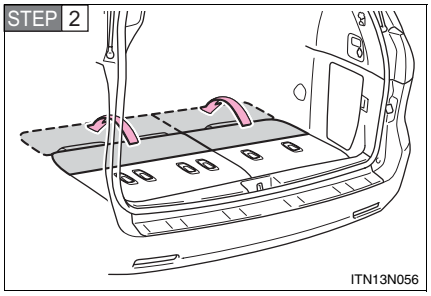


Open the flaps.

■ Before returning the third seats

Be sure to move the second seats forward from the rearmost position, as they may interfere with the third seats returning operation.

■ Returning the third seats

STEP 1

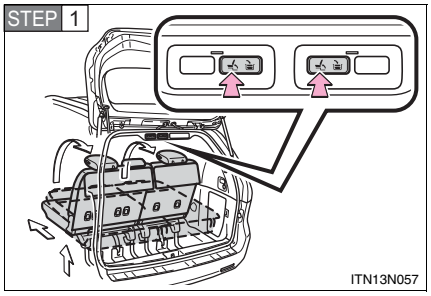

Return the flaps.
Press and hold the returning switch until the seat cushion is locked.

A beep sounds twice to indicate the start of the operation. The beep sounds again twice when the seats are locked in folded-down position. Make sure the front and rear legs are locked securely.

STEP 2 Raise the outside head restraints.

■ **Power third seat**

- If the indicator light above the switches flashes three times when the folding/returning switch is pressed, the folding operation will not start. Make sure the shift lever is in P.
- If any of the following conditions occur while the seat is operating, the seat operation will stop. The indicator light above the switches will flash three times and a beep will sound for about 10 seconds:
  - An object is caught between the seatback and seat cushion.
  - The stowing switch is released.
  - Other power third seat switch is pushed while operating the stowing switch.
  - The shift lever is moved from P when the engine switch is turned to the “ON” position (vehicles without a smart key system) or the “ENGINE START STOP” switch is in IGNITION ON mode (vehicles with a smart key system).


  If the engine is started during operating, the seat operation may also be stopped.

  To continue the folding operation, the seatback must be returned to its original position first.

■ **AUTO ACCESS SEAT (if equipped)**

The AUTO ACCESS SEAT cannot be removed.

■ **“3RD SEAT” warning light (vehicles with power third seat)**



The warning light comes on if the third seat operation is not yet complete when the engine switch is turned to the “ON” position (vehicles without a smart key system) or the “ENGINE START STOP” switch is in IGNITION ON mode (vehicles with a smart key system).

CAUTION

When folding the rear seatbacks down

Observe the following precautions. Failure to do so may result in death or serious injury.

- Do not fold the seatbacks down while driving.
- Stop the vehicle on level ground, set the parking brake and shift the shift lever to P.
- Do not allow anyone to sit on a folded seatback or in the luggage compartment while driving.
- Do not allow children to enter the luggage compartment.
- Be careful not to get any part of your body pinched by a seat.

Seat adjustment

To reduce the risk of sliding under the lap belt during a collision, do not recline the seat more than necessary.
If the seat is reclined too far, the lap belt may slide past the hips and apply restraint forces directly to the abdomen, or your neck may contact the shoulder belt, increasing the risk of death or serious injury in the event of an accident.
Adjustments should not be made while driving as the seat may unexpectedly move and cause the driver to lose control of the vehicle.

⚠ CAUTION

■ After returning the rear seatbacks or installing seats

Observe the following precautions. Failure to do so may result in death or serious injury.

- Make sure the seatback is securely locked by pushing it forward and rearward on the top.
- Check that the seat belts are not twisted or caught in the seatback.
- Make sure the seat is locked in place by trying to shake the seatback and lift up the seat cushion.

■ Removing the second seats

- Do not leave a seat in the vehicle if it has been disengaged from the floor.
- Do not sit on or place anything on a seat that has been removed from the vehicle.

■ Stowing the third seats

- Make sure that the seat path is clear before moving the seat. Otherwise, injury may result from contact with, or by being pinched by parts of the seat.
- Manual third seats: Do not sit on the third seat when it is in the stowed position with the seatback upright.
- Power third seats: Do not continue the stowing operation when the indicator above the stowing switch and returning switch comes on or flashes. An object or a person may be caught in the seat.
- Power third seats: During the stowing operation, to prevent the vehicle from moving, do not shift the shift lever out of P with the engine switch in the “ON” position (vehicles without a smart key system) or the “ENGINE START STOP” switch in IGNITION ON mode (vehicles with a smart key system).

CAUTION

When adjusting the seat position or the ottoman (vehicles with Ottoman seats)

Make sure to leave enough space around the feet so as not to get them caught.

When using the ottoman (vehicles with Ottoman seats)

- Do not sit on the ottoman. Seat belts may not be properly worn which may result in death or serious injury.
- Stow the ottoman when you get in and out of the vehicle or when the ottoman is not in use to avoid stumbling over it.

NOTICE

To prevent damage to the seat

- Avoid putting heavy loads on a folded seat that is being used as a temporary table.
- Do not sit on or put heavy loads on a second seat that has been removed from the vehicle. The metal tips of the seat leg may be damaged, preventing reinstallation of the seat.
- The second seats must be reinstalled in their original positions. If they are installed in the wrong position, the seat locks or bezels will be damaged.
- Make sure that the path the seat will move through is clear before stowing or returning the third seat.
- 8-passenger models: Be sure to raise the stowed second center seat above the outer trim, when removing from the storage box of the luggage room.

NOTICE

Stowing the seat belt

The seat belts and the buckles must be stowed before you fold down the rear seatbacks.

To prevent an ottoman malfunction (vehicles with Ottoman seats)

- Do not place any objects in the second passenger footwell that could prevent the operation of the ottoman.
- Do not place heavy luggage on the ottoman.
- Do not place anything under the ottoman when in use. There is a possibility that something may get caught and cause damage when stowing the ottoman.

Driving position memory*

Your preferred driving position (the position of the driver's seat and outside rear view mirrors) can be memorized and recalled with the touch of a button. It is also possible to set this function to activate automatically when the doors are unlocked.
Two different driving positions can be entered into memory.

■ Entering a position to memory

STEP 1 **Vehicles without a smart key system**


Turn the engine switch to the "ON" position.

Vehicles with a smart key system

Turn the "ENGINE START STOP" switch to IGNITION ON mode.

STEP 2 Adjust the driver's seat and outside rear view mirrors to the desired positions.

STEP 3

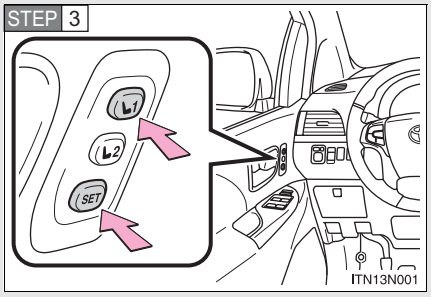

Press the "SET" button, then within 3 seconds press button "1" or "2" until the signal beeps.

If the selected button has already been preset, the previously recorded position will be overwritten.

*: If equipped

■ **Recalling the memorized position**

Check that the shift lever is in P.


STEP 1 **Vehicles without a smart key system**

Turn the engine switch to the “ON” position.

Vehicles with a smart key system

Turn the “ENGINE START STOP” switch to IGNITION ON mode.

STEP 2

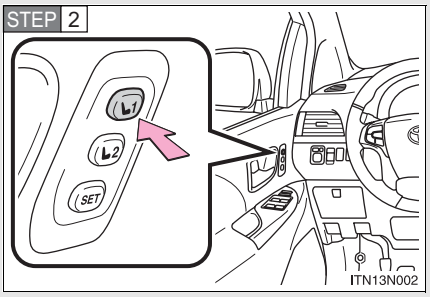

Press button “1” or “2” to recall the desired position.

Linking driving position memory with door unlock operation

Record your driving position to button “1” or “2” before performing the following:


Vehicles without a smart key system

Carry only the wireless remote control to which you want to link the driving position.

STEP 1 Unlock the vehicle with the wireless remote control to which you want to link the driving position.

STEP 2 Shift the shift lever to P and close the driver’s door. Turn the engine switch to the “ON” position.

STEP 3

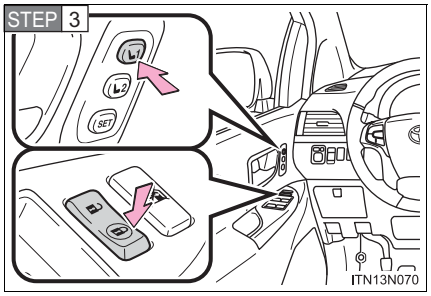

Press the desired button (“1” or “2”) to recall the position. Then, while keep pressing the button, press the driver’s door lock switches (either lock or unlock) until the signal beeps.


The driving position is recalled when the driver’s door is unlocked using the wireless remote control and the driver’s door is opened.

Vehicles with a smart key system

Carry only the electronic key to which you want to link the driving position. If 2 or more keys are in the vehicle, the driving position cannot be linked properly.

STEP 1 Shift the shift lever to P and close the driver's door. Turn the "ENGINE START STOP" switch to IGNITION ON mode.

STEP 2

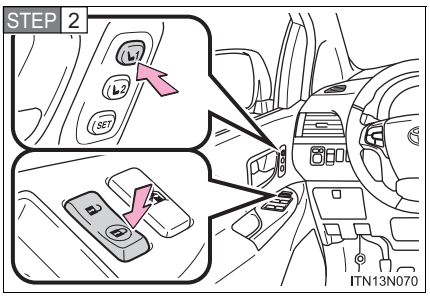

Press the desired button ("1" or "2") to recall the position. Then, while keep pressing the button, press the driver's door lock switches (either lock or unlock) until the signal beeps.

The driving position is recalled when the driver's door is unlocked using the wireless remote control and the driver's door is opened.

■ **Operating the driving position memory after turning the engine off**

Vehicles without a smart key system
Memorized positions can be activated up to 180 seconds after the driver's door is opened and another 60 seconds after it is closed again, even after turning the engine switch to the "LOCK" position.

Vehicles with a smart key system
Memorized positions can be activated up to 180 seconds after the driver's door is opened and another 60 seconds after it is closed again, even after turning the "ENGINE START STOP" switch off.

■ **Stopping seat position operation part-way through**

Perform any of the following operations.

- Press the "SET" button.
- Press button "1" or "2".
- Adjust the seat using the switches (only cancels seat position recall).

⚠ CAUTION


■ **Seat adjustment caution**

Take care during seat adjustment so that the seat does not strike the rear passenger or squeeze your body against the steering wheel.

Head restraints

Head restraints are provided for all seats.

Front and second outside seats

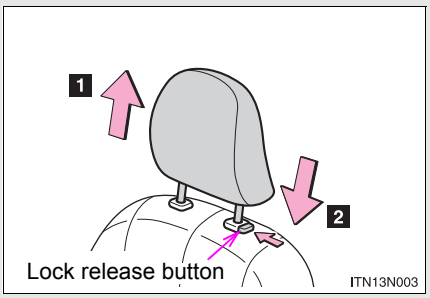


1 Up

Pull the head restraints up.

2 Down

Push the head restraint down while pressing the lock release button.

Second center* and third center seats

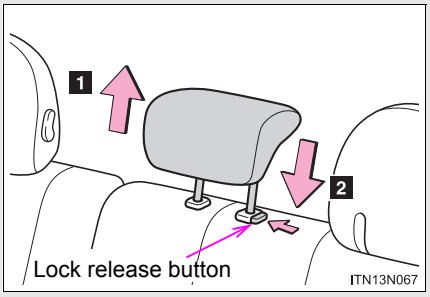

1 Up


Pull the head restraints up.

2 Down

Push the head restraint down while pressing the lock release button.

*: 8-passenger models only

Third outside seats

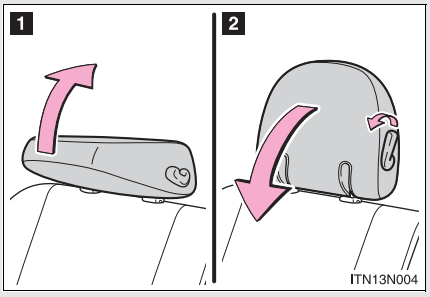


1 To use

Pull the head restraints up.

2 To fold

Push the head restraint down while pressing the lever downward.

■ **Adjusting the height of the head restraints**




Make sure that the head restraints are adjusted so that the center of the head restraint is closest to the top of your ears.

■ **Adjusting the center seat head restraints**

Always raise the head restraint one level from the stowed position when using.


■ **Removing the head restraints**



Pull the head restraint up while pressing the lock release button.

The head restraint of third outside seat can not be removed.

Installing the head restraints (front, second and third center seats)



Align the head restraint with the installation holes and push it down to the lock position.

Press and hold the lock release button when lowering the head restraint.

CAUTION

Head restraint precautions


Observe the following precautions regarding the head restraints. Failure to do so may result in death or serious injury.

- Use the head restraints designed for each respective seat.
- Adjust the head restraints to the correct position at all times.
- After adjusting the head restraints, push down on them and make sure they are locked in position.
- Do not drive with the head restraints removed.

Seat belts


Make sure that all occupants are wearing their seat belts before driving the vehicle.

■ Correct use of the seat belts

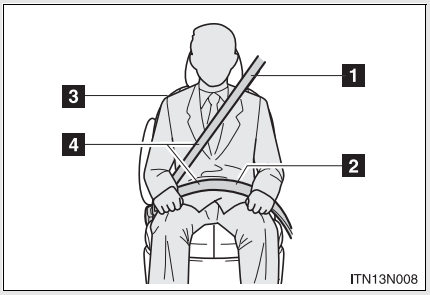


1. Extend the shoulder belt so that it comes fully over the shoulder, but does not come into contact with the neck or slide off the shoulder.
2. Position the lap belt as low as possible over the hips.
3. Adjust the position of the seatback. Sit up straight and well back in the seat.
4. Do not twist the seat belt.

■ Fastening and releasing the seat belt

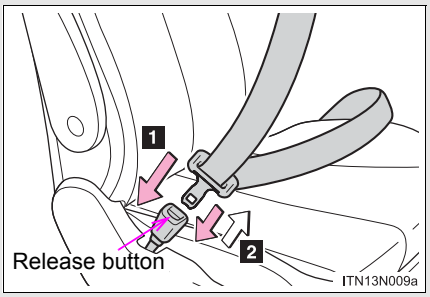

1. To fasten the seat belt, push the plate into the buckle until a click sound is heard.
2. To release the seat belt, press the release button.

■ Adjusting the seat belt shoulder anchor height (front and second outside Tip-up seats)

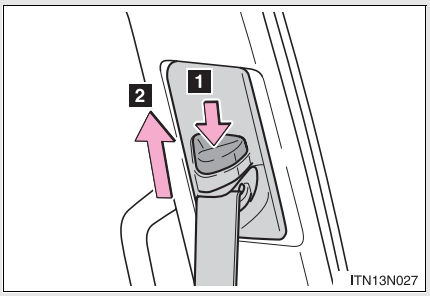


1 Push the seat belt shoulder anchor down while pressing the release button.

2 Push the seat belt shoulder anchor up.

Move the height adjuster up and down as needed until you hear a click.

Third center seat belt

The third center seat belt is a 3-point type restraint with 2 buckles. Both seat belt buckles must be correctly located and securely latched for proper operation.

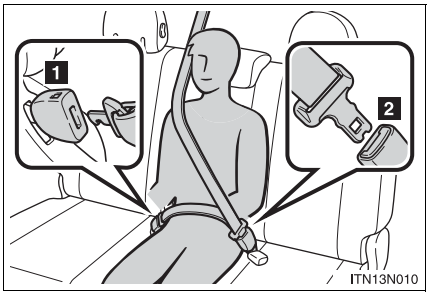


Make sure that the buckle 1 is securely latched for ready use of the center seat belt.

1 Matches tab “B” with the hooked end.

2 Matches tab “A” with the concave end.


■ Release method

The belt can be completely released when not required, such as when folding down the third seat.

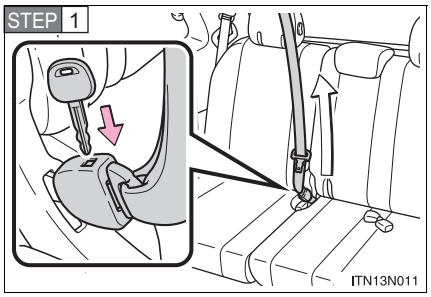


Insert the key or tab “A” into the hole on the center seat belt buckle to release the hooked tab “B” and allow the belt to retract.

Retract the belt slowly when releasing and stowing the seat belt.

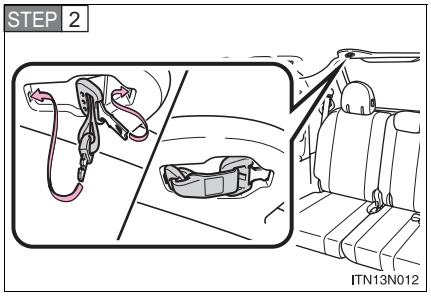

Stow the seat belt tabs in the cover set in the roof as shown.


■ Extracting the belt

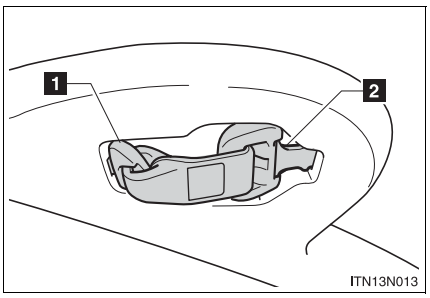

1 Pull tab “B” out and pull the belt out a little.

2 Pull tab “A” out.

Seat belt pretensioners (front seats)

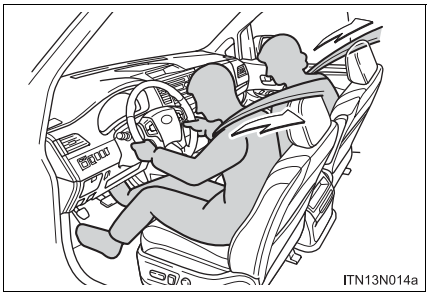

The pretensioner helps the seat belt to quickly restrain the occupant by retracting the seat belt when the vehicle is subjected to certain types of severe frontal collision.

The pretensioner does not activate in the event of a minor frontal impact, a side impact, a rear impact or a vehicle rollover.

Pre-collision seat belts (front seats of vehicles with pre-collision system)

If the pre-collision sensor detects that a collision is unavoidable, the pre-collision system will retract the seat belt, thus enhancing the effectiveness of the seat belt pretensioner in a crash.

The same will happen if the driver makes an emergency braking or loses control of the vehicle. (→P. 336)


■ Emergency locking retractor (ELR)

The retractor will lock the belt during a sudden stop or on impact. It may also lock if you lean forward too quickly. A slow, easy motion will allow the belt to extend so that you can move around fully.

■ Automatic locking retractor (ALR)

When a passenger's shoulder belt is completely extended and then retracted even slightly, the belt is locked in that position and cannot be extended. This feature is used to hold the child restraint system (CRS) firmly. To free the belt again, fully retract the belt and then pull the belt out once more. (→P. 194)

■ **Pregnant women**

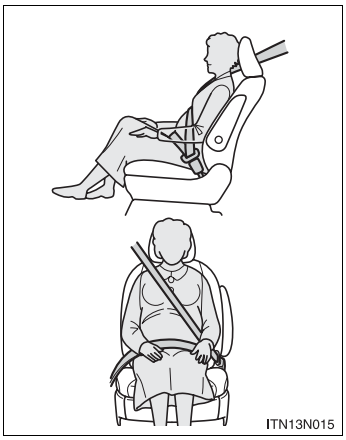

Obtain medical advice and wear the seat belt in the proper way. (→P. 128)

Women who are pregnant should position the lap belt as low as possible over the hips in the same manner as other occupants. Extend the shoulder belt completely over the shoulder and position the belt across the chest. Avoid belt contact over the rounding of the abdominal area.

If the seat belt is not worn properly, not only a pregnant woman, but also the fetus could suffer death or serious injury as a result of sudden braking or a collision.

■ **People suffering illness**

Obtain medical advice and wear the seat belt in the proper way. (→P. 128)

■ **Child seat belt usage**


The seat belts of your vehicle were principally designed for persons of adult size.

- Use a child restraint system appropriate for the child, until the child becomes large enough to properly wear the vehicle's seat belt. (→P. 189)
- When the child becomes large enough to properly wear the vehicle's seat belt, follow the instructions on P. 128 regarding seat belt usage.

■ **Replacing the belt after the pretensioner has been activated**

If the vehicle is involved in multiple collisions, the pretensioner will activate for the first collision, but will not activate for the second or subsequent collisions.

Seat belt extender



If your seat belts cannot be fastened securely because they are not long enough, a personalized seat belt extender is available from your Toyota dealer free of charge.

CAUTION

Observe the following precautions to reduce the risk of injury in the event of sudden braking, sudden swerving or an accident.
Failing to do so may cause death or severe injury.

Wearing a seat belt

- Ensure that all passengers wear a seat belt.
- Always wear a seat belt properly.
- Each seat belt should be used by one person only. Do not use a seat belt for more than one person at once, including children.
- Toyota recommends that children be seated in the rear seat and always use a seat belt and/or an appropriate child restraint system.
- To achieve a proper seating position, do not recline the seat more than necessary. The seat belt is most effective when the occupants are sitting up straight and well back in the seats.
- Do not wear the shoulder belt under your arm.
- Always wear your seat belt low and snug across your hips.
- Always wear the belt with the shoulder portion over the outside armrest and the lap portion under the outside armrest.

CAUTION

■ **When children are in the vehicle**

Do not allow children to play with the seat belt. If the seat belt becomes twisted around a child's neck, it may lead to choking or other serious injuries that could result in death.
If this occurs and the buckle cannot be unfastened, scissors should be used to cut the belt.

■ **Adjustable shoulder anchor**

Always make sure the shoulder belt is positioned across the center of your shoulder. The belt should be kept away from your neck, but not falling off your shoulder. Failure to do so could reduce the amount of protection in an accident and cause death or serious injuries in the event of a sudden stop, sudden swerve or accident. (→P. 129)

■ **Seat belt pretensioners**

- Do not place anything, such as a cushion, on the front passenger's seat. Doing so will disperse the passenger's weight, which prevents the sensor from detecting the passenger's weight properly. As a result, the seat belt pretensioner for the front passenger's seat may not activate in the event of a collision.
- If the pretensioner has activated, the SRS warning light will come on. In that case, the seat belt cannot be used again and must be replaced at your Toyota dealer.


CAUTION

■ Seat belt damage and wear

- Do not damage the seat belts by allowing the belt, plate, or buckle to be jammed in the door.
- Inspect the seat belt system periodically. Check for cuts, fraying, and loose parts. Do not use a damaged seat belt until it is replaced. Damaged seat belts cannot protect an occupant from death or serious injury.
- Ensure that the belt and tab are locked and the belt is not twisted. If the seat belt does not function correctly, immediately contact your Toyota dealer.
- Replace the seat assembly, including the belts, if your vehicle has been involved in a serious accident, even if there is no obvious damage.
- Do not attempt to install, remove, modify, disassemble or dispose of the seat belts. Have any necessary repairs carried out by your Toyota dealer. Inappropriate handling of the pretensioner may prevent it from operating properly resulting in death or serious injury.

CAUTION

When using the third center seat belt



Do not use the third center seat belt with either buckle released. Fastening only one of the buckles may result in death or serious injury in case of sudden braking or a collision.

Using a seat belt extender

- Do not wear the seat belt extender if you can fasten the seat belt without the extender.
- Do not use the seat belt extender when installing a child restraint system because the belt will not securely hold the child restraint system, increasing the risk of death or serious injury in the event of an accident.
- The personalized extender may not be safe on another vehicle, when used by another person, or at a different seating position other than the one originally intended.

NOTICE


When using a seat belt extender

When releasing the seat belt, press on the buckle release button on the extender, not on the seat belt.
This helps prevent damage to the vehicle interior and the extender itself.

Steering wheel


The steering wheel can be adjusted to a comfortable position.

STEP 1

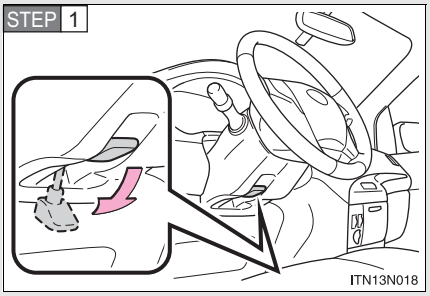

Hold the steering wheel and press the lever down.

STEP 2

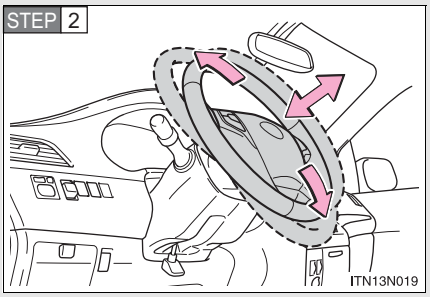

Adjust to the ideal position by moving the steering wheel horizontally and vertically.

After adjustment, pull the lever up to secure the steering wheel.

CAUTION

Caution while driving

Do not adjust the steering wheel while driving.
Doing so may cause the driver to mishandle the vehicle and cause an accident, resulting in death or serious injury.


After adjusting the steering wheel

Make sure that the steering wheel is securely locked.
Otherwise, the steering wheel may move suddenly, possibly causing an accident and resulting in death or serious injury.

Inside rear view mirror

Glare from the headlights of vehicles behind can be reduced by using the following functions.

Manual anti-glare inside rear view mirror

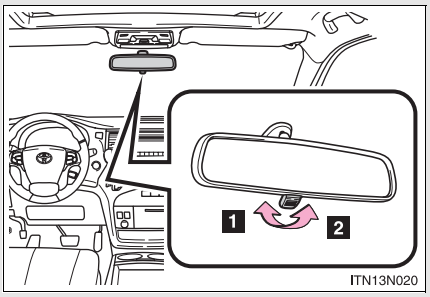


1 Normal position

2 Anti-glare position

Auto anti-glare inside rear view mirror

In automatic mode, sensors are used to detect the headlights of vehicles behind and the reflected light is automatically reduced.

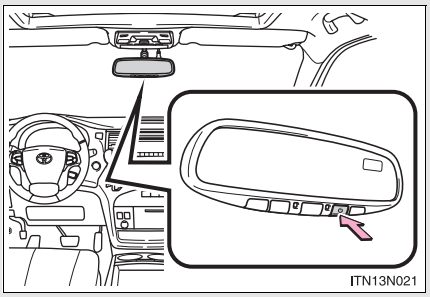

Turns automatic mode on/off

The indicator comes on when automatic mode is turned on.


Vehicles without a smart key system

The mirror will revert to the automatic mode each time the engine switch is turned to the “ON” position.

Vehicles with a smart key system


The mirror will revert to the automatic mode each time the “ENGINE START STOP” switch is turned to IGNITION ON mode.

Adjusting the height of rear view mirror

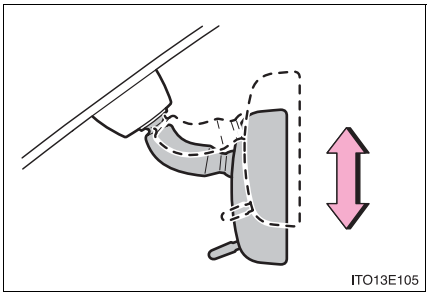

Adjust the height of the rear view mirror by moving it up and down.

To prevent sensor error (vehicles with auto anti-glare inside rear view mirror)



To ensure that the sensors operate properly, do not touch or cover them.


⚠ CAUTION

Caution while driving

Do not adjust the position of the mirror while driving.
Doing so may lead to mishandling of the vehicle and cause an accident, resulting in death or serious injury.


Outside rear view mirrors

Mirror angle can be adjusted using the switch.

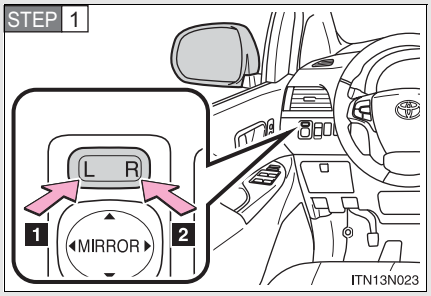

To select a mirror to adjust, press the switch.

1 Left
2 Right

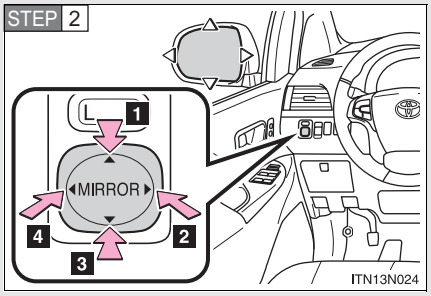


To adjust the mirror, press the switch.

1 Up
2 Right
3 Down
4 Left


Folding back the mirrors

Manual type

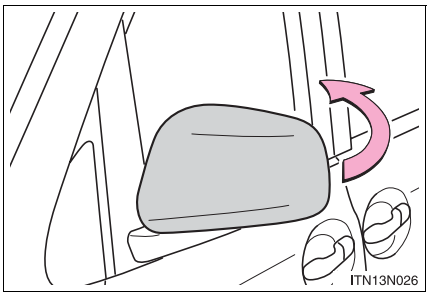

Push the mirror back in the direction of the vehicle's rear.

Power type

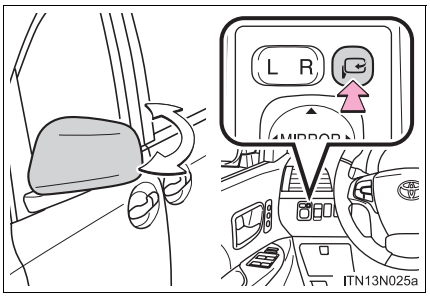

Press the switch to fold the mirrors.

Press it again to extend them to the original position.

■ **Mirror angle can be adjusted when**

Vehicles without a smart key system
The engine switch is in the “ACC” or “ON” position.

Vehicles with a smart key system
The “ENGINE START STOP” switch is in ACCESSORY or IGNITION ON mode.

■ **When the mirrors are fogged up (vehicles with outside rear view mirror defoggers)**

Turn on the mirror defoggers to defog the mirrors. (→P. 405)

■ **Automatic adjustment of the mirror angle (vehicles with driving position memory)**

A desired mirror face angle can be entered to memory and recalled automatically by the driving position memory. (→P. 120)

■ **Auto anti-glare function (vehicles with auto anti-glare inside rear view mirror)**

When the anti-glare inside rear view mirror is set to automatic mode, the outside rear view mirrors will activate in conjunction with the anti-glare inside rear view mirror to reduce reflected light. (→P. 138)

■ **Linked mirror function when reversing (if equipped)**

The outside rear view mirrors will automatically angle downwards when the vehicle is reversing in order to give a better view of the ground. However, this function will not operate when the mirror select switch is in the neutral position (between “L” and “R”).

⚠ CAUTION

■ When driving the vehicle

Observe the following precautions while driving.
Failing to do so may result in loss of control of the vehicle and cause an accident, resulting in death or serious injury.

- Do not adjust the mirrors while driving.
- Do not drive with the mirrors folded.
- Both the driver and passenger side mirrors must be extended and properly adjusted before driving.

■ When a mirror is moving

To avoid personal injury and mirror malfunction, be careful not to get your hand caught by the moving mirror.


■ When the mirror defoggers are operating (vehicles with outside rear view mirror defoggers)

Do not touch the rear view mirror surfaces, as they can become very hot and burn you.

Power windows

The power windows can be opened and closed using the switches.


Operating the switch moves the windows as follows:

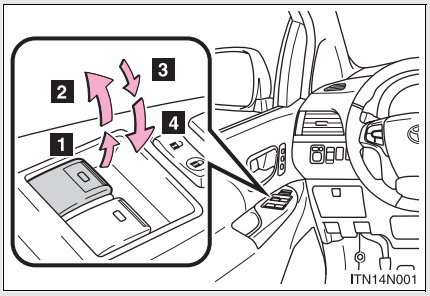

1 Closing
2 One-touch closing*
3 Opening
4 One-touch opening*

*: Pressing the switch in the opposite direction will stop window travel partway.

Window lock switch

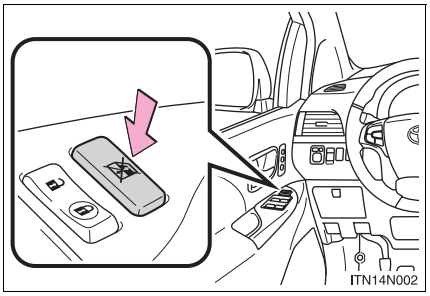

Press the switch down to lock the passenger window switches.

Use this switch to prevent children from accidentally opening or closing a passenger window.

■ **The power windows can be operated when**

Vehicles without a smart key system
The engine switch is in the “ON” position.

Vehicles with a smart key system
The “ENGINE START STOP” switch is in IGNITION ON mode.

■ **Operating the power windows after turning the engine off**

Vehicles without a smart key system
The power windows can be operated for approximately 45 seconds even after the engine switch is turned to the “ACC” or “LOCK” position. They cannot, however, be operated once either front door is opened.

Vehicles with a smart key system
The power windows can be operated for approximately 45 seconds even after the “ENGINE START STOP” switch is turned to ACCESSORY mode or turned off. They cannot, however, be operated once either front door is opened.

■ **Jam protection function**

If an object becomes caught between the window and the window frame, window travel is stopped and the window is opened slightly.

■ **When the power window does not close normally**

If the jam protection function is operating abnormally and a window cannot be closed, perform the following operations using the power window switch on the relevant door.

- After stopping the vehicle, the window can be closed by holding the power window switch in the one-touch closing position while the engine switch is turned to the “ON” position (vehicles without a smart key system) or the “ENGINE START STOP” switch is turned to IGNITION ON mode (vehicles with a smart key system).
- If the window still cannot be closed even by carrying out the operation explained above, initialize the function by performing the following procedure.

STEP 1 Hold the power window switch in the one-touch closing position. Continue holding the switch for a further 6 seconds after the window has closed.

STEP 2 Hold the power window switch in the one-touch opening position. Continue holding the switch for a further 2 seconds after the window has opened completely.

STEP 3 Hold the power window switch in the one-touch closing position once again. Continue holding the switch for a further 2 seconds after the window has closed.

If you release the switch while the window is moving, start again from the beginning. If the window continues to close but then re-open slightly even after performing the above procedure correctly, have the vehicle inspected by your Toyota dealer.

⚠ CAUTION

■ Closing the windows

Observe the following precautions.
Failing to do so may result in death or serious injury.

- Check to make sure that all passengers do not have any part of their body in a position where it could be caught when a window is being operated.
- Do not allow children to operate the power windows.
  Closing a power window on someone can cause serious injury, and in some instances, even death.


■ Jam protection function

- Never use any part of your body to intentionally activate the jam protection function.
- The jam protection function may not work if something gets caught just before the window fully closes.
- The jam protection function is disabled if the switch is pulled and held during one-touch closing operation.

Quarter windows


The quarter windows can be opened to bring in fresh outside air for additional ventilation.

Manual type

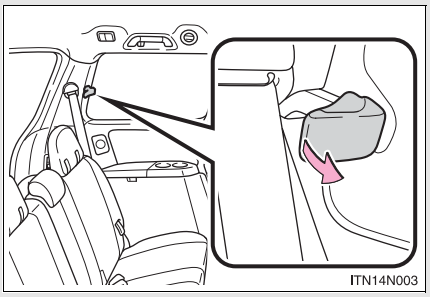

Pull the handle and swing the window fully out to open.

Power type

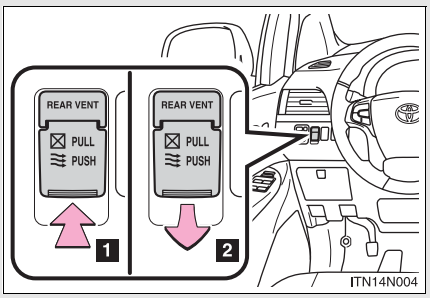

1 Opening

2 Closing

Both the left and right quarter windows move.

■ **The windows can be operated when (power type)**

Vehicles without a smart key system
The engine switch is in the “ON” position.

Vehicles with a smart key system
The “ENGINE START STOP” switch is in IGNITION ON mode.

■ **Operating the windows after turning the engine off (power type)**

Vehicles without a smart key system
The power type windows can be operated for approximately 45 seconds even after the engine switch is turned to the “ACC” or “LOCK” position. They cannot, however, be operated once either front door is opened.

Vehicles with a smart key system
The power type windows can be operated for approximately 45 seconds even after the “ENGINE START STOP” switch is turned to ACCESSORY mode or turned off. They cannot, however, be operated once either front door is opened.

⚠ CAUTION

■ **Closing the windows**


Observe the following precautions.
Failing to do so may result in death or serious injury.

- Check to make sure that all passengers do not have any part of their body in a position where it could be caught when a window is being operated.
- Do not allow children to operate the power windows.
  Closing a power window on someone can cause serious injury, and in some instances, even death.

Moon roof*

Use the overhead switches to open and close the moon roof.

■ Front moon roof

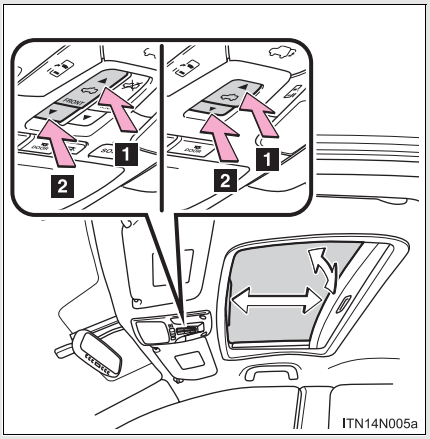

1 Opens the moon roof*


The moon roof will stop at the tilt up position once.
To tilt down, press the opposite side of the switch.
Press the switch again to open.

2 Closes the moon roof*

*: Lightly press either of the roof switches to stop the moon roof partway.

*: If equipped

■ Rear moon roof (if equipped)

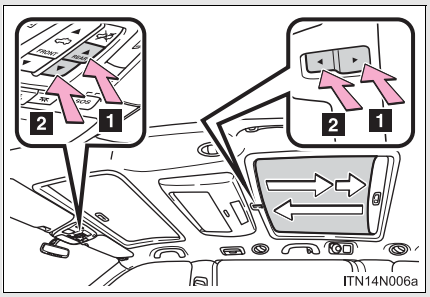


1 Opens the moon roof*

The moon roof stops just before it is opened fully. Press the switch again to open fully.

2 Closes the moon roof*

*: Lightly press either of the roof switches to stop the moon roof partway.

Canceling the rear moon roof operation (vehicles with the rear moon roof)

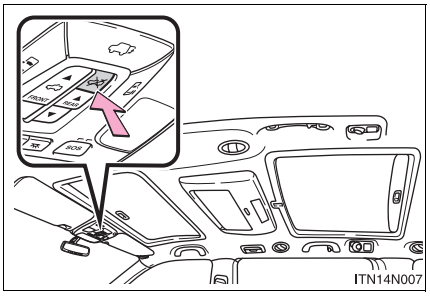

Press the switch to disable the rear moon roof operation from the rear seat.

Pressing the switch again will enable the operation again.

■ **The moon roof can be operated when**

Vehicles without a smart key system
The engine switch is in the “ON” position.

Vehicles with a smart key system
The “ENGINE START STOP” switch is in IGNITION ON mode.

■ **Operating the moon roof after turning the engine off**

Vehicles without a smart key system
The moon roof can be operated for approximately 45 seconds after the engine switch is turned to the “ACC” or “LOCK” position. It cannot, however, be operated once either front door is opened.

Vehicles with a smart key system
The moon roof can be operated for approximately 45 seconds after the “ENGINE START STOP” switch is turned to ACCESSORY mode or turned off. It cannot, however, be operated once either front door is opened.

■ **Jam protection function**

If an object is detected between the moon roof and the frame while the moon roof is closing, travel is stopped and the moon roof opens slightly.

■ **Sunshade**

The sunshade can be opened and closed manually. However, both front and rear sunshades open automatically when the moon roof is opened.

■ **When the moon roof does not close normally**

STEP 1 Stop the vehicle.

STEP 2 Press and hold the close switch.*
The moon roof will start moving after pausing for about 10 seconds. Continue to hold the switch.

STEP 3 Release the button when the moon roof stops moving.
Within 4 seconds, press and hold the close switch again. Continue to hold the switch as the moon roof opens and closes.

STEP 4 Release the close switch when the moon roof completely stops.

*: If the switch is released at the incorrect time, the procedure will have to be performed again from the beginning.

CAUTION

■ **Opening the moon roof**

Observe the following precautions.
Failing to do so may cause death or serious injury.

- Do not allow any passengers to put their hands or heads outside the vehicle while it is moving.
- Do not sit on top of the moon roof.

■ **Closing the moon roof**

Observe the following precautions.
Failing to do so may result in death or serious injury.

- Check to make sure that all passengers do not have any part of their bodies in a position where it could be caught when the moon roof is being operated.
- Do not allow children to operate the moon roof.
  Closing the moon roof on someone can cause death or serious injury.

■ **Jam protection function**

- Never use any part of your body intentionally to activate the jam protection function.
- The jam protection function may not work if something gets caught just before the moon roof fully closes.

Opening the fuel tank cap

Perform the following steps to open the fuel tank cap:

■ Before refueling the vehicle


Vehicles without a smart key system

Turn the engine switch off and ensure that all the doors and windows are closed.


Vehicles with a smart key system

Turn the “ENGINE START STOP” switch off and ensure that all the doors and windows are closed.

■ Opening the fuel tank cap

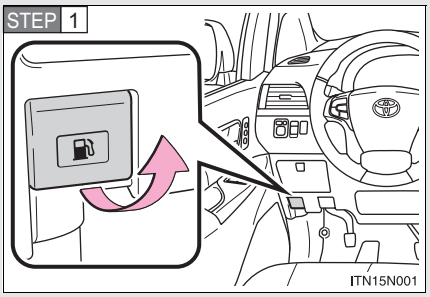


Pull up the opener to open the fuel filler door.

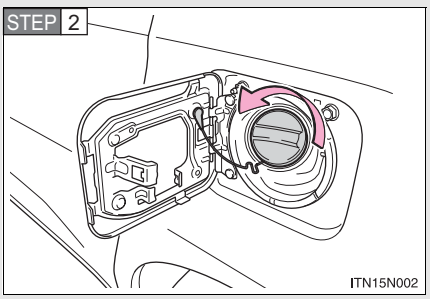


Turn the fuel tank cap slowly to open.

STEP 3

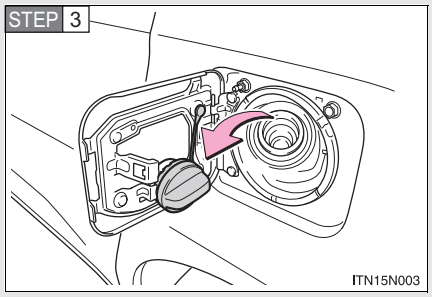

Hang the fuel tank cap on the back of the fuel filler door.

Closing the fuel tank cap

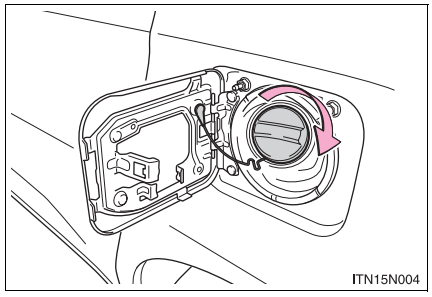

After refueling, turn the fuel tank cap until you hear a click. Once the cap is released, it will turn slightly in the opposite direction.

Fuel type

Use unleaded gasoline (Octane rating 87 [Research Octane Number 91] or higher)

Fuel tank capacity (reference)

20.9 gal. (79 L, 17.4 Imp.gal.)

⚠ CAUTION

■ When refueling the vehicle

Observe the following precautions while refueling the vehicle.
Failure to do so may result in death or serious injury.

- After exiting the vehicle and before opening the fuel door, touch an unpainted metal surface to discharge any static electricity. It is important to discharge static electricity before refueling because sparks resulting from static electricity can cause fuel vapors to ignite while refueling.
- Always hold the grips on the fuel tank cap and turn it slowly to remove it.
  A whooshing sound may be heard when the fuel tank cap is loosened. Wait until the sound cannot be heard before fully removing the cap.
  In hot weather, pressurized fuel may spray out of the filler neck and cause injury.
- Do not allow anyone that has not discharged static electricity from their body to come close to an open fuel tank.
- Do not inhale vaporized fuel.
  Fuel contains substances that are harmful if inhaled.
- Do not smoke while refueling the vehicle.
  Doing so may cause the fuel to ignite and cause a fire.
- Do not return to the vehicle or touch any person or object that is statically charged.
  This may cause static electricity to build up, resulting in a possible ignition hazard.

CAUTION

When refueling

Securely insert the fuel nozzle into the fuel filler neck. If fuel is added with the nozzle slightly lifted away from the fuel filler neck, the automatic shut off function may not operate, resulting in fuel overflowing from the tank.

When replacing the fuel cap

Do not use anything but a genuine Toyota fuel tank cap designed for your vehicle. Doing so may cause a fire or other incident which may result in death or serious injury.


NOTICE

Refueling

Do not spill fuel during refueling.
Doing so may damage the vehicle, such as causing the emission control systems to operate abnormally or damaging fuel system components or the vehicle's painted surface.

Engine immobilizer system*

The vehicle's keys have built-in transponder chips that prevent the engine from starting if a key has not been previously registered in the vehicle's on-board computer.
Never leave the keys inside the vehicle when you leave the vehicle.

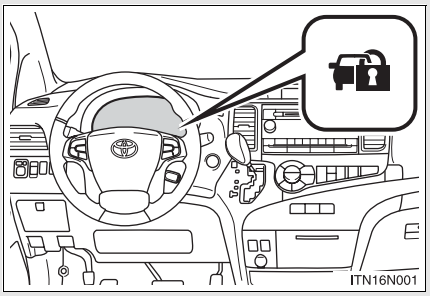

Vehicles without a smart key system

The indicator light flashes after the key has been removed from the engine switch to indicate that the system is operating.

The indicator light stops flashing after the registered key has been inserted into the engine switch to indicate that the system has been canceled.

Vehicles with a smart key system

The indicator light flashes after the "ENGINE START STOP" switch has been turned off to indicate that the system is operating.

The indicator light stops flashing after the "ENGINE START STOP" switch has been turned to ACCESSORY or IGNITION ON mode to indicate that the system has been canceled.

*: If equipped

■ **System maintenance**

The vehicle has a maintenance-free type engine immobilizer system.

■ **Conditions that may cause the system to malfunction**

- If the grip portion of the key is in contact with a metallic object
- If the key is in close proximity to or touching a key to the security system (key with a built-in transponder chip) of another vehicle

■ **Certifications for the engine immobilizer system**

U.S.A.
Vehicles without a smart key system
FCC ID: WRKRI-34BTY

Vehicles with a smart key system
FCC ID: NI4TMIMB-1

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Canada
This device complies with RSS-210 of Industry Canada. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

CAUTION

■ Certifications for the immobilizer system

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTICE

■ To ensure the system operates correctly

Do not modify or remove the system. If modified or removed, the proper operation of the system cannot be guaranteed.

Alarm*


The system sounds the alarm and flashes the lights when forced entry is detected.

■ Triggering of the alarm

The alarm is triggered in the following situations when the alarm is set:

- A locked door is unlocked or opened in any way other than using the entry function, wireless remote control or mechanical key. (The doors will lock again automatically.)
- The hood is opened.

■ Setting the alarm system

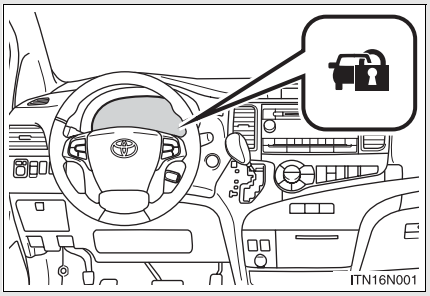

Close the doors and hood, and lock all doors. The system will be set automatically after 30 seconds.

The indicator light changes from being on to flashing when the system is set.

*: If equipped

■ **Deactivating or stopping the alarm**

Do one of the following to deactivate or stop the alarm:

- Unlock the doors.
- Vehicles without a smart key system: Turn the engine switch to the “ACC” or “ON” position, or start the engine.
  Vehicles with a smart key system: Turn the “ENGINE START STOP” switch to ACCESSORY or IGNITION ON mode, or start the engine.
  (The alarm will be deactivated or stopped after a few seconds.)

■ **System maintenance**

The vehicle has a maintenance-free type alarm system.

■ **Items to check before locking the vehicle**

To prevent unexpected triggering of the alarm and vehicle theft, make sure of the following:


- Nobody is in the vehicle.
- The windows and moon roof are closed before the alarm is set.
- No valuables or other personal items are left in the vehicle.

■ **Triggering of the alarm**

The alarm may be triggered in the following situations.
(Stopping the alarm deactivates the alarm system.)



● A person inside the vehicle opens a door or hood.



● The battery is recharged or replaced when the vehicle is locked.

■ **Alarm-operated door lock**

● When the alarm is operating, the doors are locked automatically to prevent intruders.


● Do not leave the key inside the vehicle when the alarm is operating, and make sure the key is not inside the vehicle when recharging or replacing the battery.

⚠ NOTICE

■ **To ensure the system operates correctly**

Do not modify or remove the system. If modified or removed, the proper operation of the system cannot be guaranteed.


Theft prevention labels (for U.S.A.)

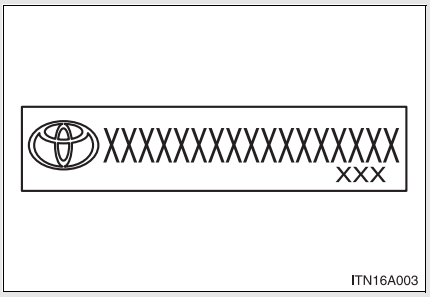

These labels are attached to the vehicle to reduce vehicle theft by facilitating the tracing and recovery of parts from stolen vehicles. Do not remove under penalty of law.

Correct driving posture

Drive with a good posture as follows:

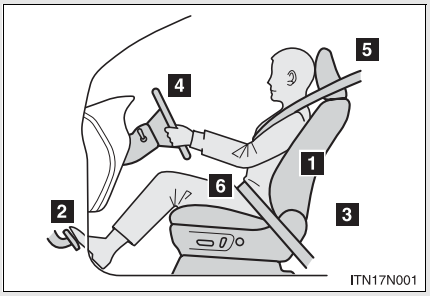

1. Sit upright and well back in the seat. (→P. 95)
2. Adjust the position of the seat forward or backward to ensure the pedals can be reached and easily depressed to the extent required. (→P.95)
3. Adjust the seatback so that the controls are easily operable. (→P.95)
4. Adjust the tilt and telescopic positions of the steering wheel downward so the airbag is facing your chest. (→P.137)
5. Lock the head restraint in place with the center of the head restraint closest to the top of your ears. (→P.125)
6. Wear the seat belt correctly. (→P.128)

⚠ CAUTION

■ While driving


- Do not adjust the position of the driver's seat.
  Doing so could cause the driver to lose control of the vehicle.
- Do not place a cushion between the driver or passenger and the seatback.
  A cushion may prevent correct posture from being achieved, and reduce the effectiveness of the seat belt and head restraint, increasing the risk of death or serious injury to the driver or passenger.
- Do not place anything under the front seats except for putting them in the auxiliary box.
  Objects placed under the front seats may become jammed in the seat tracks and stop the seat from locking in place. This may lead to an accident, resulting in death or serious injury. The adjustment mechanism may also be damaged.

■ Adjusting the seat position

- Take care when adjusting the seat position to ensure that other passengers are not injured by the moving seat.
- Do not put your hands under the seat or near the moving parts to avoid injury.
  Fingers or hands may become jammed in the seat mechanism.

SRS airbags

The SRS airbags inflate when the vehicle is subjected to certain types of severe impacts that may cause significant injury to the occupants. They work together with the seat belts to help reduce the risk of death or serious injury.

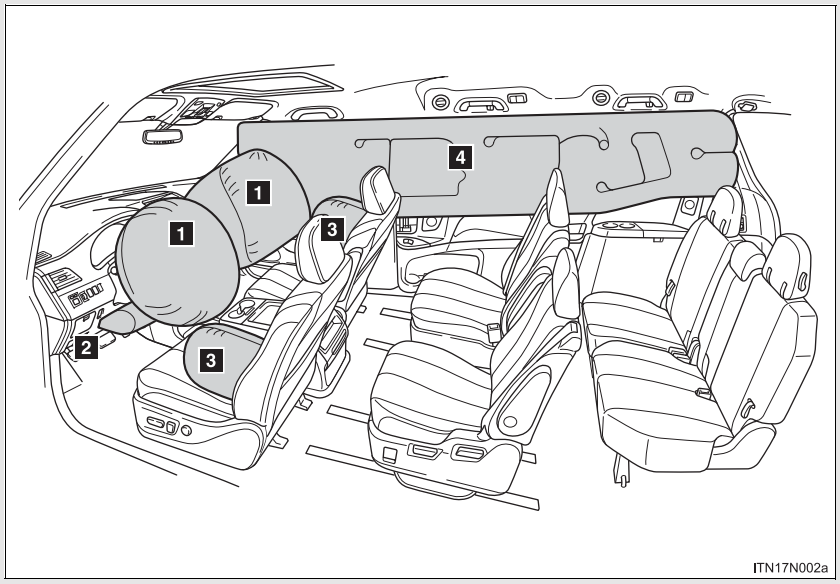

SRS front airbags

1 SRS driver airbag/front passenger airbag
Can help protect the head and chest of the driver and front passenger from impact with interior components.


2 SRS driver knee airbag
Can help provide driver protection.

SRS side and curtain shield airbags

3 SRS side airbags
Can help protect the torsos of the front seat occupants.

4 SRS curtain shield airbags
Can help protect primarily the heads of occupants in the outer seats.

Airbag system components

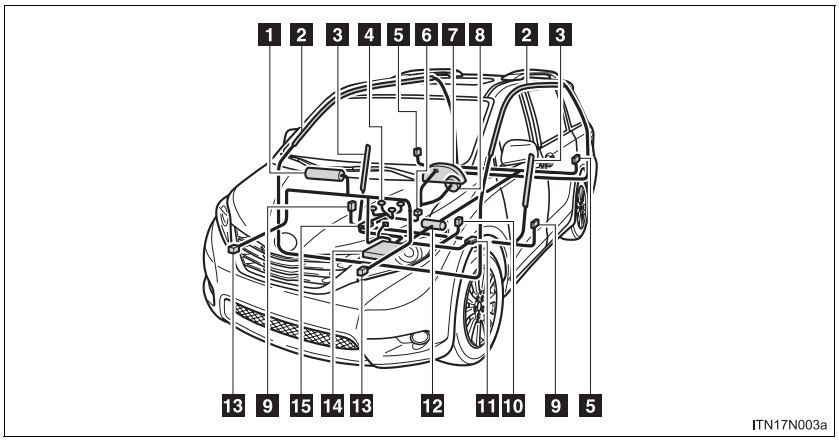

1 Front passenger airbag
2 Curtain shield airbags
3 Side airbags
4 Front passenger occupant classification system (ECU and sensors)
5 Curtain shield airbag sensors
6 Front passenger's seat belt buckle switch
7 SRS warning light
8 Driver airbag
9 Side and curtain shield airbag sensors
10 Driver's seat belt buckle switch
11 Driver's seat position sensor
12 Driver knee airbag
13 Front airbag sensors
14 Airbag sensor assembly
15 "AIR BAG ON" and "AIR BAG OFF" indicator lights

Your vehicle is equipped with ADVANCED AIRBAGS designed based on US motor vehicle safety standards (FMVSS208). The airbag system controls airbag deployment power for the driver and front passenger. The driver airbag system consists of the driver seat's position sensor etc. The front passenger's airbag system consists of the front passenger occupant classification sensor etc.

The main SRS airbag system components are shown above. The SRS airbag system is controlled by the airbag sensor assembly. The airbag sensor assembly consists of a safing sensor and an airbag sensor.

In certain types of severe frontal or side impacts, the SRS airbag system triggers the airbag inflators. A chemical reaction in the inflators quickly fills the airbags with non-toxic gas to help restrain the motion of the occupants.

■ **If the SRS airbags deploy (inflate)**

- Bruising and slight abrasions may result from contact with a deploying (inflating) SRS airbag.
- A loud noise and white powder will be emitted.
- Parts of the airbag module (steering wheel hub, airbag cover and inflator) as well as the front seats, and parts of the front and rear pillars and roof side rail, may be hot for several minutes. The airbag itself may also be hot.
- The windshield may crack.
- For Safety Connect subscribers, if the SRS airbags deploy or in the event of a severe rear-end collision, the system is designed to send an emergency call to the response center, notifying them of the vehicle's location (without needing to push the "SOS" button) and an agent will attempt to speak with the occupants to ascertain the level of emergency and assistance required. If the occupants are unable to communicate, the agent automatically treats the call as an emergency and helps to dispatch the necessary emergency services. (→P.622)

■ **SRS airbag deployment conditions (SRS front airbags)**

- The SRS front airbag will deploy in the event of an impact that exceeds the set threshold level (the level of force corresponding to an approximately 12 - 18 mph [20 - 30 km/h] frontal collision with a fixed wall that does not move or deform).

  However, this threshold velocity will be considerably higher if the vehicle strikes an object, such as a parked vehicle or sign pole, which can move or deform on impact, or if the vehicle is involved in an underride collision (e.g. a collision in which the front of the vehicle “underrides”, or goes under, the bed of a truck, etc.).

- It is possible that in some collisions where the forward deceleration of the vehicle is very close to the designed threshold level, the SRS front airbags and the seat belt pretensioners may not activate together.

- The SRS front airbags for the front passenger will not activate if there is no passenger sitting in the front passenger seat. However, the SRS front airbags for the front passenger may deploy if luggage is put in the seat, even if the seat is unoccupied. (→P. 183)


■ **SRS airbag deployment conditions (SRS side and curtain shield airbags)**

- The SRS side and curtain shield airbags will deploy in the event of an impact that exceeds the set threshold level (the level of force corresponding to the impact force produced by an approximately 3300 lb. [1500 kg] vehicle colliding with the vehicle cabin from a direction perpendicular to the vehicle orientation at an approximate speed of 12 - 18 mph [20 - 30 km/h]).

- The SRS curtain shield airbags may also deploy in the event of a severe frontal collision.

■ **Conditions under which the SRS airbags may deploy (inflate), other than a collision**


The SRS front airbags may also deploy if a serious impact occurs to the underside of your vehicle. Some examples are shown in the illustration.



- Hitting a curb, edge of pavement or hard surface
- Falling into or jumping over a deep hole
- Landing hard or falling

■ **Types of collisions that may not deploy the SRS front airbag (SRS front airbags)**


The SRS front airbags are generally not designed to inflate if the vehicle is involved in a side or rear collision, if it rolls over, or if it is involved in a low-speed frontal collision. But, whenever a collision of any type causes sufficient forward deceleration of the vehicle, deployment of the SRS front airbags may occur.



- Collision from the side
- Collision from the rear
- Vehicle rollover


■ **Types of collisions that may not deploy the SRS airbags (SRS side airbags and curtain shield airbags)**

The SRS side airbag and curtain shield airbag system may not activate if the vehicle is subjected to a collision from the side at certain angles, or a collision to the side of the vehicle body other than the passenger compartment.



- Collision from the side to the vehicle body other than the passenger compartment
- Collision from the side at an angle

The SRS side airbags and curtain shield airbags are generally not designed to inflate if the vehicle is involved in a frontal or rear collision, if it rolls over, or if it is involved in a low-speed side collision.




- Collision from the front*
- Collision from the rear
- Vehicle rollover

*: Depending on the conditions and type of accident, the curtain shield airbags may deploy (inflate) upon frontal impact.


■ **When to contact your Toyota dealer**

In the following cases, contact your Toyota dealer as soon as possible.


- Any of the SRS airbags have been inflated.




- The front of the vehicle is damaged or deformed, or was involved in an accident that was not severe enough to cause the SRS airbags to inflate.



- A portion of a door is damaged or deformed, or the vehicle was involved in an accident that was not severe enough to cause the SRS side airbags and curtain shield airbags to inflate.



- The pad section of the steering wheel, dashboard near the front passenger airbag cover or lower portion of the instrument panel is scratched, cracked, or otherwise damaged.



- The surface of the seats with the side airbag is scratched, cracked or otherwise damaged.
- The portion of the front pillars, rear pillars or roof side rail garnishes (padding) containing the curtain shield airbags inside is scratched, cracked or otherwise damaged.

⚠ CAUTION

■ SRS airbag precautions

Observe the following precautions regarding the airbags.
Failure to do so may cause death or serious injury.

- The driver and all passengers in the vehicle must wear their seat belts properly.
  The SRS airbags are supplemental devices to be used with the seat belts.
- The SRS driver airbag deploys with considerable force, and can cause death or serious injury especially if the driver is very close to the airbag. The National Highway Traffic Safety Administration (“NHTSA”) advises:


  Since the risk zone for the driver’s airbag is the first 2 - 3 in. (50 - 75 mm) of inflation, placing yourself 10 in. (250 mm) from your driver airbag provides you with a clear margin of safety. This distance is measured from the center of the steering wheel to your breastbone. If you sit less than 10 in. (250 mm) away now, you can change your driving position in several ways:

  • Move your seat to the rear as far as you can while still reaching the pedals comfortably.
  • Slightly recline the back of the seat.
    Although vehicle designs vary, many drivers can achieve the 10 in. (250 mm) distance, even with the driver seat all the way forward, simply by reclining the back of the seat somewhat. If reclining the back of your seat makes it hard to see the road, raise yourself using a firm, non-slippery cushion, or raise the seat if your vehicle has that feature.
  • If your steering wheel is adjustable, tilt it downward. This points the airbag toward your chest instead of your head and neck.

  The seat should be adjusted as recommended by NHTSA above, while still maintaining control of the foot pedals, steering wheel, and your view of the instrument panel controls.

CAUTION


SRS airbag precautions




- If the seat belt extender has been connected to the front seat belt buckles but the seat belt extender has not also been fastened to the latch plate of the seat belt, the SRS front airbag will judge that the driver and front passenger are wearing the seat belt even though the seat belt has not been connected. In this case, the SRS front airbags may not activate correctly in a collision, resulting in death or serious injury in the event of collision. Be sure to wear the seat belt with the seat belt extender.
- The SRS front passenger airbag also deploys with considerable force, and can cause death or serious injury especially if the front passenger is very close to the airbag. The front passenger seat should be as far from the airbag as possible with the seatback adjusted, so the front passenger sits upright.
- Improperly seated and/or restrained infants and children can be killed or seriously injured by a deploying airbag. An infant or child who is too small to use a seat belt should be properly secured using a child restraint system. Toyota strongly recommends that all infants and children be placed in the rear seats of the vehicle and properly restrained. The rear seats are safer for infants and children than the front passenger seat. (→P.189)

CAUTION

SRS airbag precautions




- Do not sit on the edge of the seat or lean against the dashboard.



- Do not allow a child to stand in front of the SRS front passenger airbag unit or sit on the knees of a front passenger.
- Do not allow the front seat occupants to hold items on their knees.




- Do not lean against the door, the roof side rail or the front, side and rear pillars.




- Do not allow anyone to kneel on the passenger seat toward the door or put their head or hands outside the vehicle.

CAUTION


SRS airbag precautions



- Do not attach anything to or lean anything against areas such as the dashboard or steering wheel pad and lower portion of the instrument panel.
  These items can become projectiles when SRS driver, front passenger and knee airbags deploy.



- Do not attach anything to areas such as the door, windshield glass, side door glass, front or side pillars, roof side rail or assist grip.
- Do not hang coat hangers or other hard objects on the coat hooks. All of these items could become projectiles and may cause death or serious injury, should the SRS curtain shield airbag deploy.



- Vehicles without a smart key system: Do not attach any heavy, sharp or hard objects such as keys and accessories to the key. The objects may restrict the SRS knee airbag inflation or be thrust into the driver's seat area by the force of the deploying airbag, thus causing a danger.

CAUTION

SRS airbag precautions

- If a vinyl cover is put on the area where the SRS knee airbag will deploy, be sure to remove it.
- Do not use seat accessories which cover the parts where the SRS side airbags inflate as they may interfere with inflation of the airbags. Such accessories may prevent the side airbags from activating correctly, disable the system or cause the side airbags to inflate accidentally, resulting in death or serious injury.
- Do not strike or apply significant levels of force to the area of the SRS airbag components.
  Doing so can cause the SRS airbags to malfunction.
- Do not touch any of the component parts immediately after the SRS airbags have deployed (inflated) as they may be hot.
- If breathing becomes difficult after the SRS airbag has deployed, open a door or window to allow fresh air in, or leave the vehicle if it is safe to do so. Wash off any residue as soon as possible to prevent skin irritation.
- If the areas where the SRS airbags are stored, such as the steering wheel pad and front and rear pillar garnishes, are damaged or cracked, have them replaced by your Toyota dealer.

CAUTION


Modification and disposal of SRS airbag system components

Do not dispose of your vehicle or perform any of the following modifications without consulting your Toyota dealer.
The SRS airbags may malfunction or deploy (inflate) accidentally, causing death or serious injury.

- Installation, removal, disassembly and repair of the SRS airbags.
- Repairs, modifications, removal or replacement of the steering wheel, instrument panel, dashboard, seats or seat upholstery, front, side and rear pillars or roof side rails.
- Repairs or modifications of the front fender, front bumper, or side of the occupant compartment.
- Installation of snow plows, winches, etc. to the front grille (bull bars, kangaroo bar etc.).
- Modifications to the vehicle's suspension system.
- Installation of electronic devices such as mobile two-way radios or CD players.
- Modifications to your vehicle for a person with a physical disability.

Front passenger occupant classification system

Your vehicle is equipped with a front passenger occupant classification system. This system detects the conditions of the front passenger seat and activates or deactivates the devices for the front passenger.

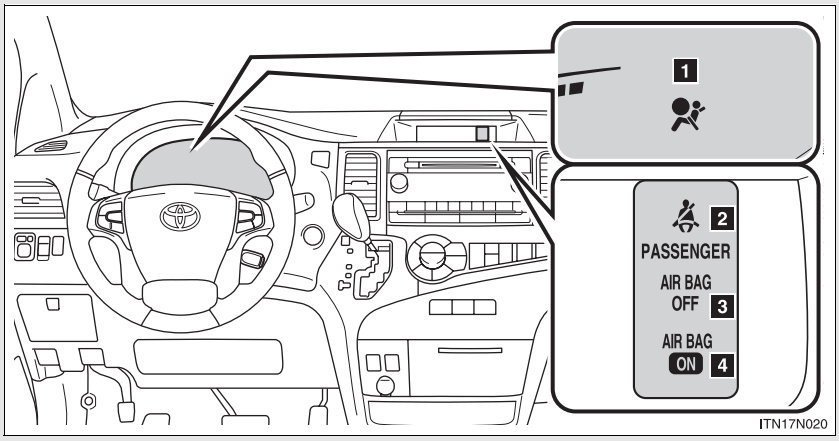

1 SRS warning light

2 Front passenger's seat belt reminder light

3 "AIR BAG OFF" indicator light

4 "AIR BAG ON" indicator light

Conditions and operation of the front passenger occupant classification system

■ Adult*1

Indicator/ warning light	“AIR BAG ON” and “AIR BAG OFF” indicator lights	“AIR BAG ON”
	SRS warning light	Off
	Front passenger’s seat belt reminder light	Flashing*2
Devices	Front passenger airbag	Activated
	Side airbag on the front passenger seat	
	Curtain shield airbag in the front passenger side	
	Front passenger’s seat belt pretensioner	

■ Child*3 or child restraint system*4

Indicator/ warning light	“AIR BAG ON” and “AIR BAG OFF” indicator lights	“AIR BAG OFF”*5
	SRS warning light	Off
	Front passenger’s seat belt reminder light	Flashing*2
Devices	Front passenger airbag	Deactivated
	Side airbag on the front passenger seat	Activated
	Curtain shield airbag in the front passenger side	
	Front passenger’s seat belt pretensioner	

■ **Unoccupied**

Indicator/ warning light	“AIR BAG ON” and “AIR BAG OFF” indicator lights	Not illuminated
	SRS warning light	Off
	Front passenger’s seat belt reminder light	
Devices	Front passenger airbag	Deactivated
	Side airbag on the front passenger seat	Activated
	Curtain shield airbag in the front passenger side	
	Front passenger’s seat belt pretensioner	Deactivated

■ **There is a malfunction in the system**

Indicator/ warning light	“AIR BAG ON” and “AIR BAG OFF” indicator lights	“AIR BAG OFF”
	SRS warning light	On
	Front passenger’s seat belt reminder light	Off
Devices	Front passenger airbag	Deactivated
	Side airbag on the front passenger seat	Activated
	Curtain shield airbag in the front passenger side	
	Front passenger’s seat belt pretensioner	

*1: The system judges a person of adult size as an adult. When a smaller adult sits in the front passenger seat, the system may recognize him/her as a child depending on his/her physique and posture.

*2: In the event the front passenger does not wear a seat belt.

*3: When a larger child who has outgrown a child restraint system sits in the front passenger seat, the system may recognize him/her as an adult depending on his/her physique or posture.

*4: Never install a rear-facing child restraint system on the front passenger seat. A forward-facing child restraint system should only be installed on the front passenger seat when it is unavoidable. (→P.190)

*5: In case the indicator light is not illuminated, consult this manual on how to install the child restraint system properly. (→P.194)

⚠ CAUTION

■ Front passenger occupant classification system precautions

Observe the following precautions regarding the front passenger occupant classification system.
Failure to do so may cause death or serious injury.

- Wear the seat belt properly.
- Make sure the front passenger's seat belt plate has not been left inserted into the buckle before someone sits in the front passenger seat.
- Make sure the "AIR BAG OFF" indicator light is not illuminated when using the seat belt extender for the front passenger seat. If the "AIR BAG OFF" indicator light is illuminated, disconnect the extender tongue from the seat belt buckle, then reconnect the seat belt. Reconnect the seat belt extender after making sure the "AIR BAG ON" indicator light is illuminated. If you use the seat belt extender while the "AIR BAG OFF" indicator light is illuminated, the SRS airbags for the passenger may not activate correctly, which could cause death or serious injury in the event of collision.
- Do not apply a heavy load to the front passenger seat or equipment (e.g. seatback pocket).
- Do not put weight on the front passenger seat by putting your hands or feet on the front passenger seat seatback from the rear passenger seat.
- Do not let a rear passenger lift the front passenger seat with their feet or press on the seatback with their legs.
- Do not put objects under the front passenger seat.

CAUTION

Front passenger occupant classification system precautions

- Do not recline the front passenger seatback so far that it touches a rear seat. This may cause the “AIR BAG OFF” indicator light to be illuminated, which indicates that the passenger’s airbags will not deploy in the event of a severe accident. If the seatback touches the rear seat, return the seatback to a position where it does not touch the rear seat. Keep the front passenger seatback as upright as possible when the vehicle is moving. Reclining the seatback excessively may lessen the effectiveness of the seat belt system.
- If an adult sits in the front passenger seat, the “AIR BAG ON” indicator light is illuminated. If the “AIR BAG OFF” indicator is illuminated, ask the passenger to sit up straight, well back in the seat, feet on the floor, and with the seat belt worn correctly. If the “AIR BAG OFF” indicator still remains illuminated, either ask the passenger to move to the rear seat, or if that is not possible, move the front passenger seat fully rearward.
- When it is unavoidable to install the forward-facing child restraint system on the front passenger seat, install the child restraint system on the front passenger seat in the proper order. (→P.194)
- Do not modify or remove the front seats.
- Do not kick the front passenger seat or subject it to severe impact. Otherwise, the SRS warning light may come on to indicate a malfunction of the detection system. In this case, contact your Toyota dealer immediately.
- Child restraint systems installed on the rear seat should not contact the front seatbacks.
- Do not use a seat accessory, such as a cushion or seat cover, that covers the seat cushion surface.
- Do not modify or replace the upholstery of the front seat.

Child restraint systems

A child restraint system for a small child or baby must itself be properly restrained on the seat with the lap portion of the lap/shoulder belt.

The laws of all 50 states of U.S.A. and Canada now require the use of child restraint systems.

Points to remember

Studies have shown that installing a child restraint system on a rear seat is much safer than installing one on the front passenger seat.

- Choose a child restraint system that suits your vehicle and is appropriate to the age and size of the child.
- For installation details, follow the instructions provided with the child restraint system.
  General installation instructions are provided in this manual.
  (→P.194)


Types of child restraints

Child restraint systems are classified into the following 3 types according to the age and size of the child:


Rear facing — Infant seat/convertible seat



Forward facing — Convertible seat

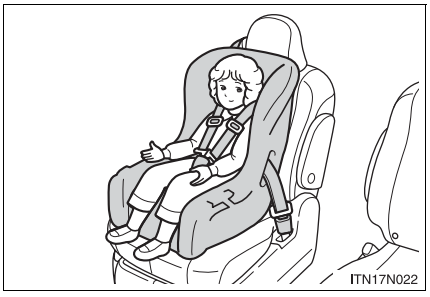

Booster seat

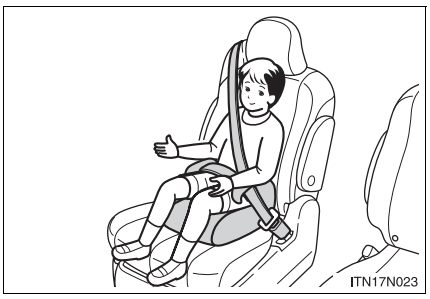

■ **Selecting an appropriate child restraint system**

- Use a child restraint system appropriate for the child until the child becomes large enough to properly wear the vehicle's seat belt.
- If the child is too large for a child restraint system, sit the child on a rear seat and use the vehicle's seat belt. (→P. 128)

⚠ CAUTION

■ **Child restraint precautions**

- For effective protection in automobile accidents and sudden stops, a child must be properly restrained, using a seat belt or child restraint system depending on the age and size of the child. Holding a child in your arms is not a substitute for a child restraint system. In an accident, the child can be crushed against the windshield, or between you and the vehicle's interior.
- Toyota strongly urges the use of a proper child restraint system that conforms to the size of the child, installed on the rear seat. According to accident statistics, the child is safer when properly restrained in the rear seat than in the front seat.
- Never install a rear-facing child restraint system on the front passenger seat even if the "AIR BAG OFF" indicator light is illuminated. In the event of an accident, the force of the rapid inflation of the front passenger airbag can cause death or serious injury to the child if the rear-facing child restraint system is installed on the front passenger seat.
- A forward-facing child restraint system may be installed on the front passenger seat only when it is unavoidable. A child restraint system that requires a top tether strap should not be used in the front passenger seat since there is no top tether strap anchor for the front passenger seat. Adjust the seatback as uprights as possible and always move the seat as far back as possible even if the "AIR BAG OFF" indicator light is illuminated, because the front passenger airbag could inflate with considerable speed and force. Otherwise, the child may be killed or seriously injured.

CAUTION

Child restraint precautions

- Do not use the seat belt extender when installing a child restraint system on the front or rear passenger seat. If installing a child restraint system with the seat belt extender connected to the seat belt, the seat belt will not securely hold the child restraint system, which could cause death or serious injury to the child or other passengers in the event of a sudden stop, sudden swerve or an accident.
- Do not allow the child to lean his/her head or any part of his/her body against the side door or the area of the seat, front and side pillars or roof side rail from which the SRS side airbags or curtain shield airbags deploy even if the child is seated in the child restraint system. It is dangerous if the SRS side airbags and curtain shield airbags inflate, and the impact could cause death or serious injury to the child.
- Make sure you have complied with all installation instructions provided by the child restraint manufacturer and that the system is properly secured. If it is not secured properly, it may cause death or serious injury to the child in the event of a sudden stop, sudden swerve or an accident.

⚠ CAUTION

■ When children are in the vehicle

Do not allow children to play with the seat belt. If the seat belt becomes twisted around a child's neck, it may lead to choking or other serious injuries that could result in death.
If this occurs and the buckle cannot be unfastened, scissors should be used to cut the belt.

■ When the child restraint system is not in use

- Keep the child restraint system properly secured on the seat even if it is not in use.
  Do not store the restraint unsecured in the passenger compartment.
- If it is necessary to detach the child restraint system, remove it from the vehicle or store it securely in the luggage compartment. This will prevent it from injuring passengers in the event of a sudden stop, sudden swerve or an accident.


Installing child restraints

Follow the child restraint system manufacturer's instructions. Firmly secure child restraints to the rear seats using the LATCH anchors or a seat belt. Attach the top tether strap when installing a child restraint.

The lap/shoulder belt can be used if your child restraint system is not compatible with the LATCH (Lower Anchors and Tethers for Children) system.

■ Using the LATCH anchors


Second seats (8-passenger models)

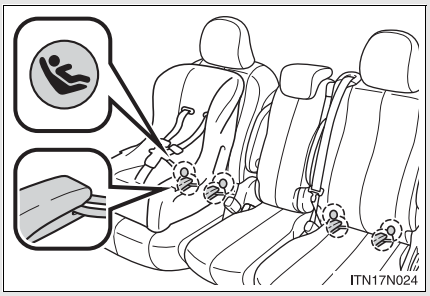

Child restraint LATCH anchors

LATCH anchors are provided for second outside seats. (Buttons displaying the location of the anchors are attached to the seats.)


Second seats (7-passenger models)

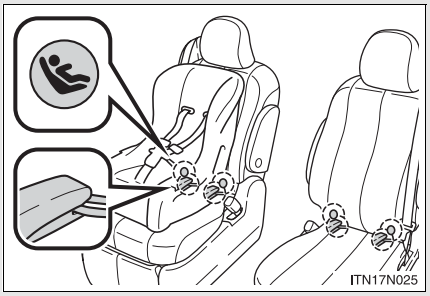

Child restraint LATCH anchors

LATCH anchors are provided for both second seats. (Buttons displaying the location of the anchors are attached to the seats.)


Third seats

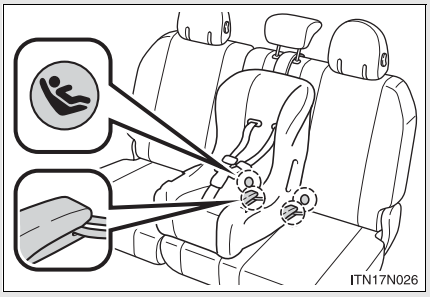

Child restraint LATCH anchors


LATCH anchors are provided for center seat. (Buttons displaying the location of the anchors are attached to the seats.)

■ **Using the seat belts**

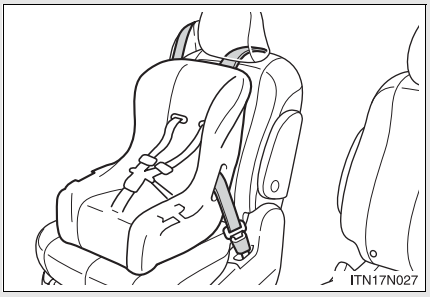


Seat belts equipped with a child restraint locking mechanism (ALR/ELR belts except driver's seat belt) (→P. 131)

■ **Using the top tether strap**

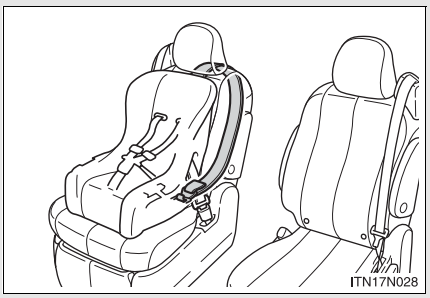


Anchor brackets (for top tether strap)

Second seats (8-passenger models)

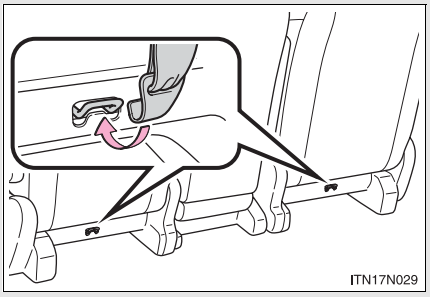


Anchor brackets are provided for second outside seats.

Second seats (7-passenger models)

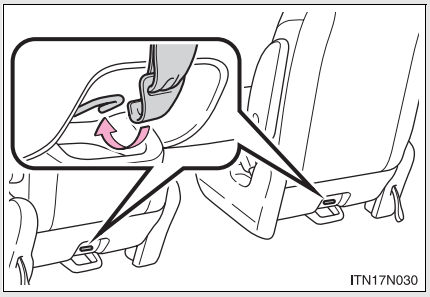

Anchor brackets are provided for both second seats.


Third seats

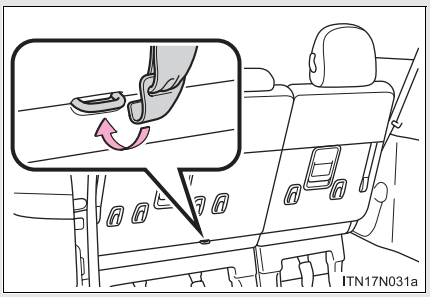

An anchor bracket is provided for center seat.

Installation with LATCH system (second seat)

STEP 1

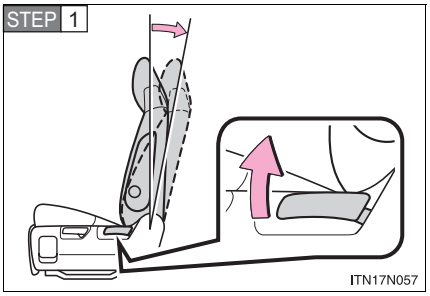

Fold the seatback while pulling the lever and move to the rear-most recline position.

STEP 2 Widen the gap between the seat cushion and seatback slightly.

Type A

STEP 3



Latch the buckles onto the LATCH anchors. If the child restraint has a top tether strap, the top tether strap should be latched onto the top tether strap anchor.

For owners in Canada:
The symbol on a child restraint system indicates the presence of a lower connector system.

Type B




Latch the hooks of the lower straps onto the LATCH anchors. If the child restraint has a top tether strap, the top tether strap should be latched onto the top tether strap anchor.

For owners in Canada:
The symbol on a child restraint system indicates the presence of a lower connector system.

Installation with LATCH system (third seat)

Manual seat

STEP 1

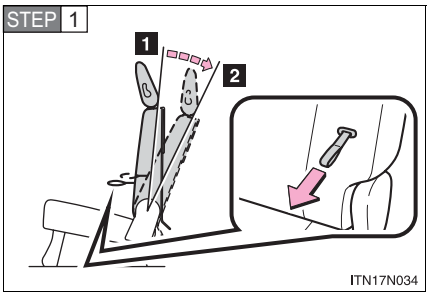


1 1st lock position

2 11th lock position

Fold the seatback while pulling the strap. Return the seatback and secure it at the 1st lock position (most upright position). Adjust the seatback to the 11th lock position.

Power seat


STEP 1

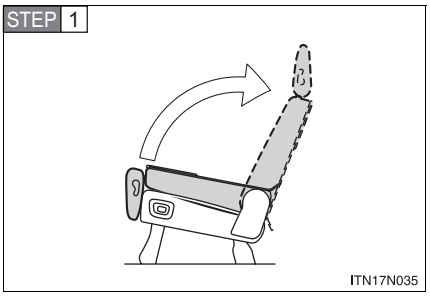

Fold down the seatback by pressing the folding/returning switch (→P.110). Raise the seatback by pressing the same switch, the returning switch (→P.114) or the seatback angle adjustment switch (→P.101). (The seatback will automatically stop.) Do not touch the switch while the seatback is moving, because the operation will stop.

STEP 2 Widen the gap between the seat cushion and seatback slightly.


Type A

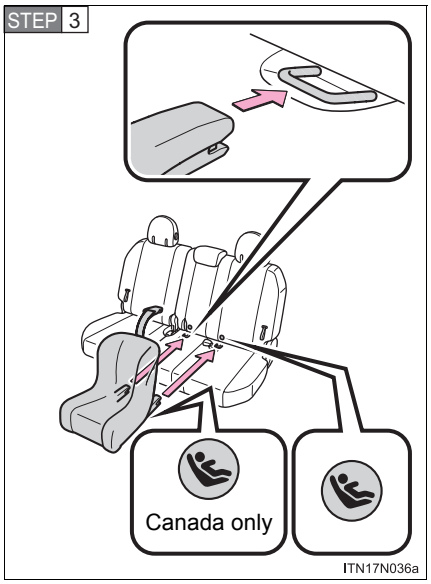

Latch the buckles onto the LATCH anchors. If the child restraint has a top tether strap, the top tether strap should be latched onto the top tether strap anchor.

For owners in Canada:
The symbol on a child restraint system indicates the presence of a lower connector system.

Type B

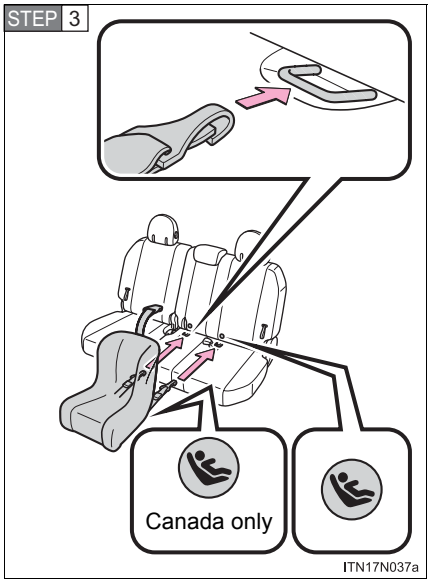


Latch the hooks of the lower straps onto the LATCH anchors. If the child restraint has a top tether strap, the top tether strap should be latched onto the top tether strap anchor.

For owners in Canada:
The symbol on a child restraint system indicates the presence of a lower connector system.

Installing child restraints using a seat belt (child restraint lock function belt)


■ Rear facing — Infant seat/convertible seat

STEP 1

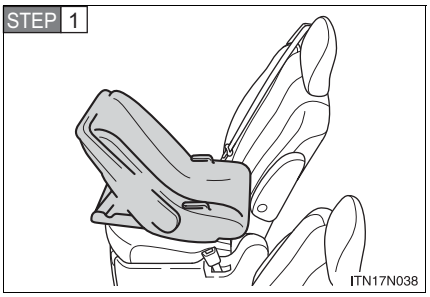


Place the child restraint system on the rear seat facing the rear of the vehicle.

STEP 2

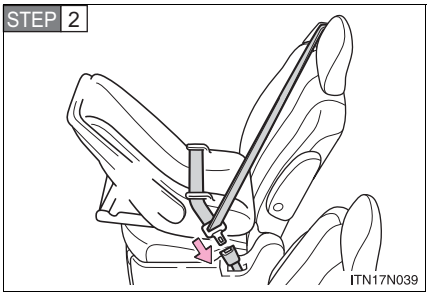


Run the seat belt through the child restraint system and insert the plate into the buckle. Make sure that the belt is not twisted.

STEP 3

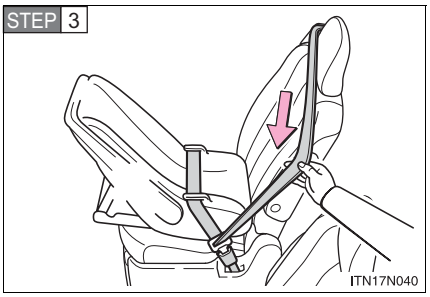


Fully extend the shoulder belt and allow it to retract to put it in lock mode. In lock mode, the belt cannot be extended.

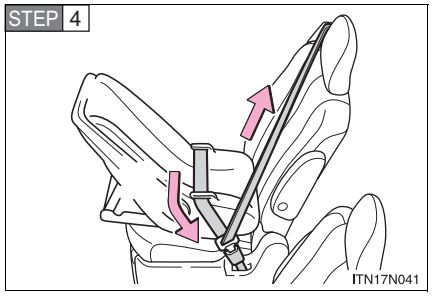


While pushing the child restraint system down into the rear seat, allow the shoulder belt to retract until the child seat is securely in place.

After the shoulder belt has retracted to a point where there is no slack in the belt, pull the belt to check that it cannot be extended.

■ Forward facing — Convertible seat

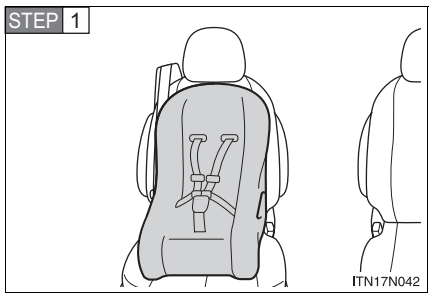


Place the child restraint system on the seat facing the front of the vehicle.

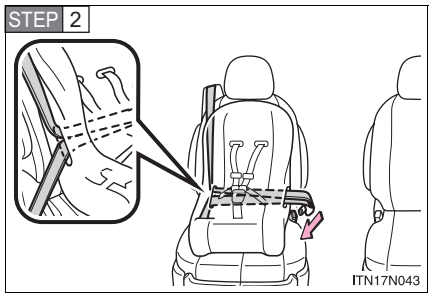


Run the seat belt through the child restraint system and insert the plate into the buckle. Make sure that the belt is not twisted.

STEP 3

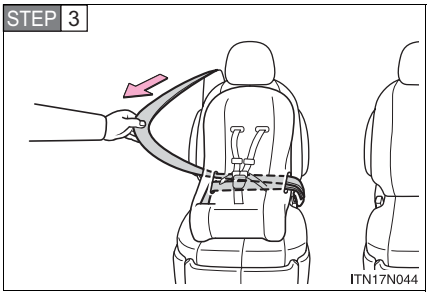

Fully extend the shoulder belt and allow it to retract to put it in lock mode. In lock mode, the belt cannot be extended.

STEP 4

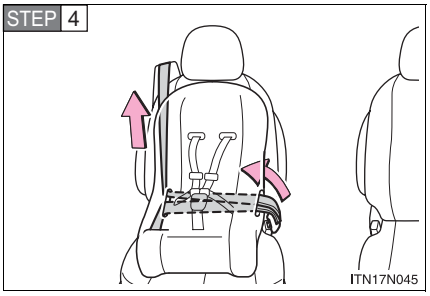


While pushing the child restraint system into the rear seat, allow the shoulder belt to retract until the child restraint system is securely in place.


After the shoulder belt has retracted to a point where there is no slack in the belt, pull the belt to check that it cannot be extended.

STEP 5 If the child restraint has a top tether strap, the top tether strap should be latched onto the top tether strap anchor.
(→P. 205, 206)

■ **Booster seat**

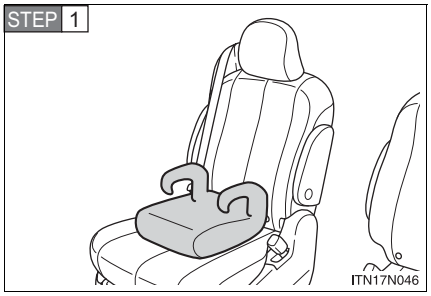


Place the child restraint system on the seat facing the front of the vehicle.

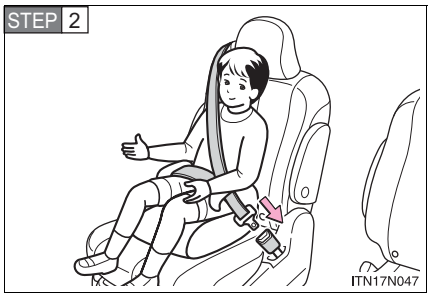

Sit the child in the child restraint system. Fit the seat belt to the child restraint system according to the manufacturer's instructions and insert the plate into the buckle. Make sure that the belt is not twisted.


Check that the shoulder belt is correctly positioned over the child's shoulder, and that the lap belt is as low as possible.
(→P. 128)

Removing a child restraint installed with a seat belt

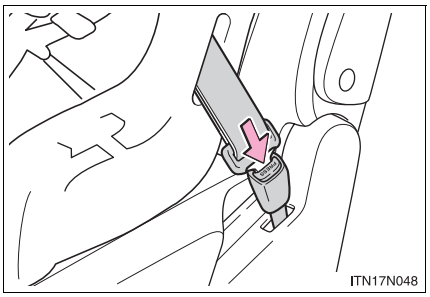


Push the buckle release button and fully retract the seat belt.

Child restraint systems with a top tether strap (second seat)

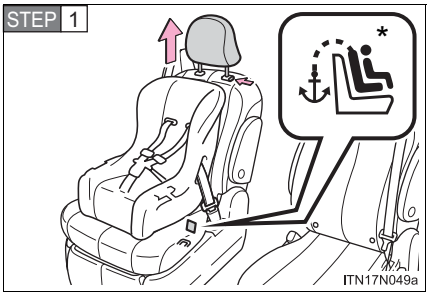


Secure the child restraint system using the seat belt or LATCH anchors, and adjust the head restraint to the uppermost position.

*: Ottoman seat only

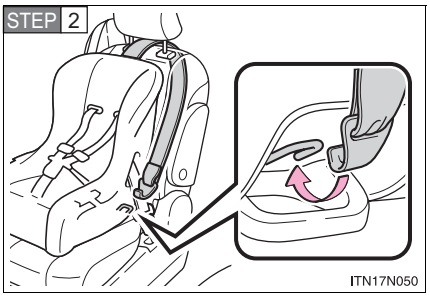


Latch the hook onto the anchor bracket and tighten the top tether strap.

Make sure the top tether strap is securely latched.

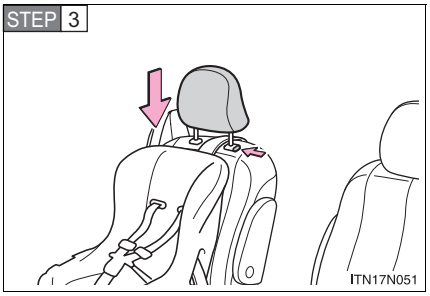


Adjust the head restraint to the downmost lock position.

Child restraint systems with a top tether strap (third seat)

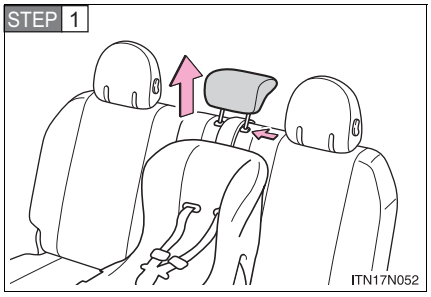


Secure the child restraint system using the seat belt or LATCH anchors. Adjust the head restraint to the uppermost position.

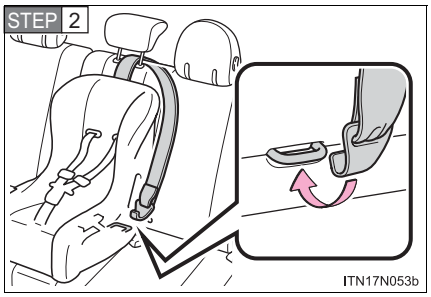

Latch the hook onto the anchor bracket and tighten the top tether strap.

Make sure the top tether strap is securely latched.

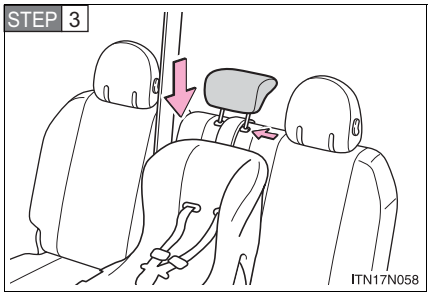

Adjust the head restraint to the downmost position.

Laws and regulations pertaining to anchorages

The LATCH system conforms to FMVSS225 or CMVSS210.2.
Child restraint systems conforming to FMVSS213 or CMVSS213 specifications can be used.
This vehicle is designed to conform to the SAE J1819.


⚠ CAUTION

■ When installing a booster seat


To prevent the belt from going into ALR lock mode, do not fully extend the shoulder belt. ALR mode causes the belt to tighten only which could cause injury or discomfort to the child. (→P. 131)

■ When installing a child restraint system

Follow the directions given in the child restraint system installation manual and fix the child restraint system securely in place.
If the child restraint system is not correctly fixed in place, the child or other passengers may be seriously injured or even killed in the event of sudden braking, sudden swerving or an accident.



- If the driver's seat interferes with the child restraint system and prevents it from being attached correctly, attach the child restraint system to the right-hand rear seat.
- Adjust the front passenger seat or second seats so that it does not interfere with the child restraint system.



- Only put a forward-facing child restraint system on the front seat when unavoidable. When installing a forward-facing child restraint system on the front passenger seat, move the seat as far back as possible even if "AIR BAG OFF" indicator light is illuminated. Failing to do so may result in death or serious injury if the airbags deploy (inflate).


CAUTION

When installing a child restraint system


- When installing a child restraint system on the third center seat, adjust both seatbacks at the same angle. Otherwise, the child restraint system cannot be securely restrained and this may cause death or serious injuries in the event of sudden braking, sudden swerving or an accident.
- When using the LATCH anchors for a child restraint system, move the seat as far back as possible (second seat only), with the seatback close to the child restraint system.
- When a booster seat is installed, always ensure that the shoulder belt is positioned across the center of the child's shoulder. The belt should be kept away from the child's neck, but not so that it could fall off the child's shoulder. Failing to do so may result in death or serious injury in the event of sudden braking, sudden swerving or an accident.
- Ensure that the belt and plate are securely locked and the seat belt is not twisted.
- Push and pull the child restraint system from side to side and forward to be sure it is secure.
- After securing a child restraint system, never adjust the seat.
- Follow all installation instructions provided by the child restraint system manufacturer.

CAUTION

When installing a child restraint system to the AUTO ACCESS SEAT (if equipped)



- Do not operate the AUTO ACCESS SEAT while a child restraint system is fixed to the seat by the child restraint lock function belt.
  If you force the seat operation, the seat, seat belt or child restraint system may be damaged, or may cause an injury.



- If a child restraint system is fixed to the AUTO ACCESS SEAT by the LATCH system, be careful that the child's head, hands and legs do not hit the body of the vehicle when operating the seat.
  Injuries may be caused.

Do not use a seat belt extender

If a seat belt extender is used when installing a child restraint system, the seat belt will not securely hold the child restraint system, which could cause death or serious injury to the child or other passengers in the event of sudden braking, sudden swerving or an accident.

To correctly attach a child restraint system to the anchors


When using the LATCH anchors, be sure that there are no foreign objects around the anchors and that the seat belt is not caught behind the child restraint. Make sure the child restraint system is securely attached, or it may cause death or serious injury to the child or other passengers in the event of a sudden braking, sudden swerving or an accident.

Checking and replacing fuses

If the AUTO ACCESS SEAT does not operate when the switches are pressed, a fuse may have blown. If this happens, check and replace the fuses as necessary.


Fuse layout and amperage rating

■ AUTO ACCESS SEAT

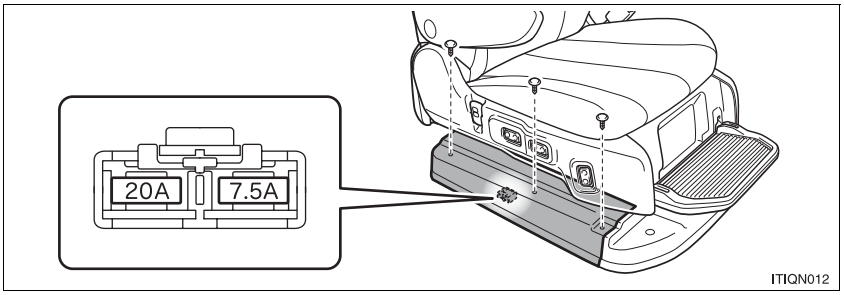

Ampere	Circuit
20 A, 7.5 A	AUTO ACCESS SEAT

■ Engine compartment

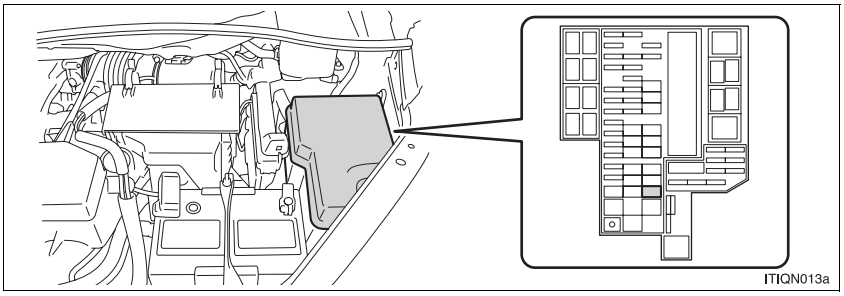

Fuse	Ampere	Circuit
A/A SEAT	30 A	AUTO ACCESS SEAT

■ **After a fuse is replaced**

Have the vehicle inspected by your Toyota dealer in the following situations.

- If the replaced fuse blows again.
- If the AUTO ACCESS SEAT does not operate.

⚠ CAUTION

■ **To prevent system breakdowns and vehicle fire**

Observe the following precautions.
Failing to do so may cause damage, and possibly a fire or injury.

- Never use a fuse of a higher amperage rating than indicated, or use any other object in place of a fuse.
- Always use a genuine Toyota fuse or equivalent.
  Never replace a fuse with a wire, even as a temporary fix.
  This can cause extensive damage or even fire.
- Do not modify fuses or the fuse box.

Wireless remote control battery


Replace the battery with a new one if it is discharged.

■ You will need the following items:

- Flathead screwdriver
- Lithium battery CR2032


■ Replacing the battery

STEP 1

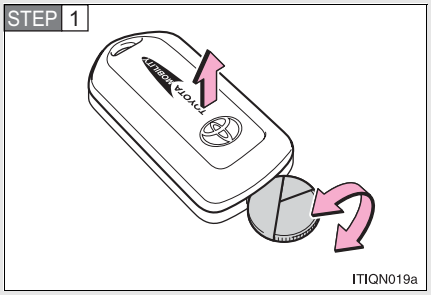


Remove the cover using a coin protected with tape etc.

STEP 2

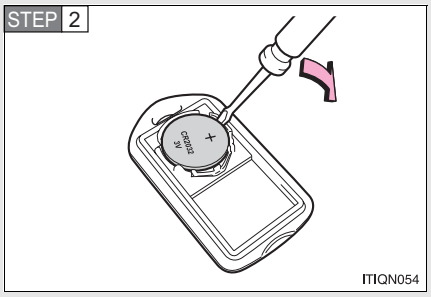

Remove the depleted battery using a flathead screwdriver.

STEP 3

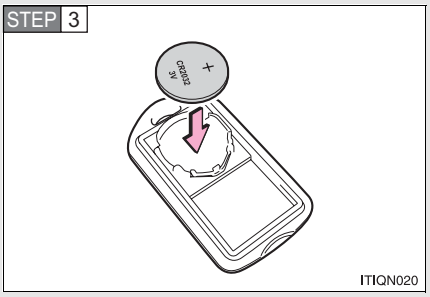

Insert a new battery with the "+" terminal facing up.

Securely replace the cover after replacing the battery.

■ If the wireless remote control battery is discharged

The wireless remote control will not function properly.

■ Use a CR2032 lithium battery

- Batteries can be purchased at your Toyota dealer, local electrical appliance shops or camera stores.
- Replace only with the same or equivalent type recommended by the Toyota dealer.
- Dispose of used batteries according to the local laws.

⚠ CAUTION

■ Removed battery and other parts

Keep away from children. These parts are small and if swallowed by a child, they can cause choking. Failure to do so could result in death or serious injury.


NOTICE

■ For normal operation after replacing the battery

Observe the following precautions to prevent accidents.

- Always work with dry hands.
  Moisture may cause the battery to rust.
- Do not touch or move any other components inside the wireless remote control.
- Do not bend either of the battery terminals.
- Take care not to lose the film and the other parts.
- Be careful not to adhere dust or oils to the inside of the module.
- Do not modify the battery case.

Gauges and meters

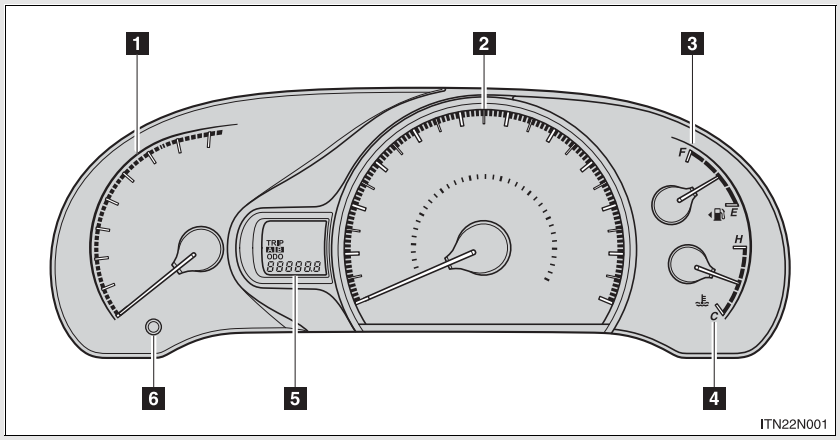

1 Tachometer

Displays the engine speed in revolutions per minute.

2 Speedometer

Displays the vehicle speed.

3 Fuel gauge

Displays the quantity of fuel remaining in the tank.

4 Engine coolant temperature gauge

Displays the engine coolant temperature.

5 Odometer and trip meter display

Odometer: Displays the total distance the vehicle has been driven.


Trip meter: Displays the distance the vehicle has been driven since the meter was last reset. Trip meters “A” and “B” can be used to record and display different distances independently.

6 Odometer/trip meter display change button

→P. 245

Changing the display

Pressing this button switches among odometer display, trip meter displays and Eco Driving Indicator Light setting screen.

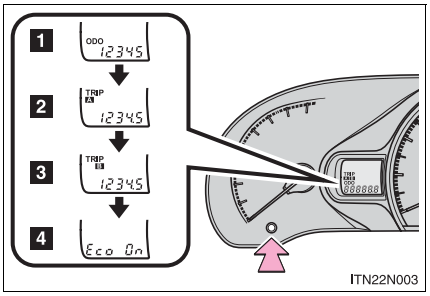


1 Odometer
2 Trip meter A*1
3 Trip meter B*1
4 Eco Driving Indicator Light setting screen*2

*1: Pressing and holding the button will reset the trip meter.

*2: Pressing and holding the button will activate or deactivate Eco Driving Indicator Light.

Instrument panel light control

The brightness of the instrument panel lights can be adjusted by turning the knob.

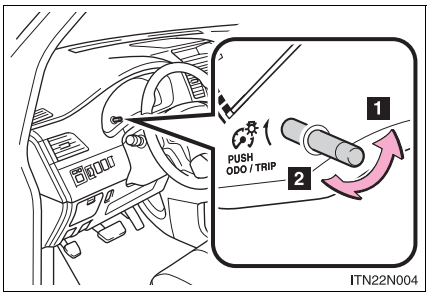

1 Darker
2 Brighter

■ **The meters and display illuminate when (Optitron type meters)**

Vehicles without a smart key system:
The engine switch is in the “ON” position.

Vehicles with a smart key system:
The “ENGINE START STOP” switch is in IGNITION ON mode.

⚠ NOTICE


■ **To prevent damage to the engine and its components**

- Do not let the indicator needle of the tachometer enter the red zone, which indicates the maximum engine speed.
- The engine may be overheating if the engine coolant temperature gauge is in the red zone (H). In this case, immediately stop the vehicle in a safe place, and check the engine after it has cooled completely. (→P. 775)

Indicators and warning lights


The indicator and warning lights on the instrument cluster and center panel inform the driver of the status of the vehicle's various systems.

■ Instrument cluster

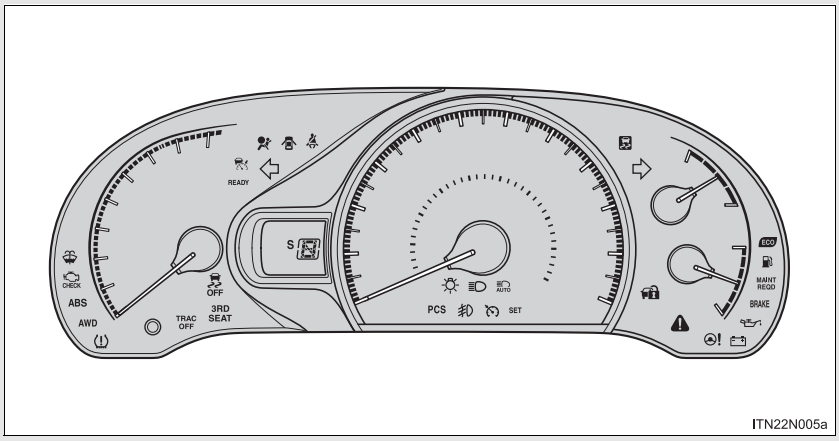

ITN22N005a

■ Center display

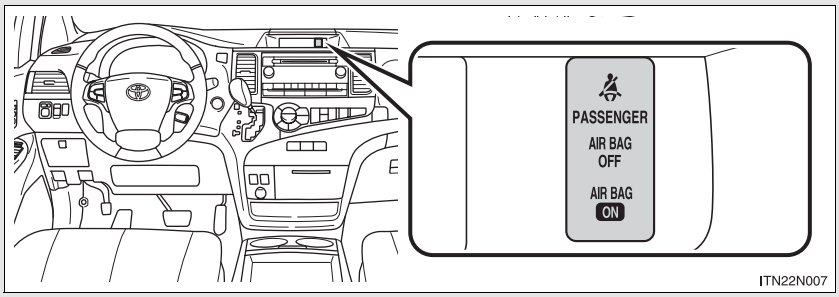

ITN22N007

■ Indicators

The indicators inform the driver of the operating state of the vehicle's various systems.



Turn signal indicator (→P. 241)



Headlight high beam indicator (→P. 268)



(U.S.A.)

Headlight indicator (→P. 266)



(Canada)

Tail light indicator (→P. 266)



(if equipped)

Fog light indicator (→P. 280)



(if equipped)

Automatic High Beam indicator (→P. 273)



(if equipped)

Cruise control indicator (→P. 293, 298)



(if equipped)

Cruise control "SET" indicator (→P. 293, 298)



(if equipped)

Radar cruise control indicator (→P. 298)



(if equipped)

Radar cruise "READY" indicator (→P. 298)



SRS airbag on-off indicator (→P. 183)



(if equipped)

Security indicator (→P. 159, 162)

*1, 2  Slip indicator (→P. 328, 333)

 Shift position indicators (→P. 238)

*1  VSC OFF indicator (→P. 329)

*1  (if equipped) Eco Driving Indicator Light (→P. 264)

*1  “TRAC OFF” indicator (→P. 329)

*1, 3  (if equipped) “PCS” warning (→P. 336)


*1: These lights turn on when the “ENGINE START STOP” switch is turned to IGNITION ON mode (vehicles with a smart key system) or the engine switch is turned to the “ON” position (vehicles without a smart key system) to indicate that a system check is being performed. They will turn off after the engine is started, or after a few seconds. There may be a malfunction in a system if a light does not come on, or if the lights do not turn off. Have the vehicle inspected by your Toyota dealer.

*2: The light flashes to indicate that the system is operating.

*3: The light flashes faster than usual to indicate that the system is operating.

■ Warning lights

Warning lights inform the driver of malfunctions in any of the vehicle's systems. (→P. 729)

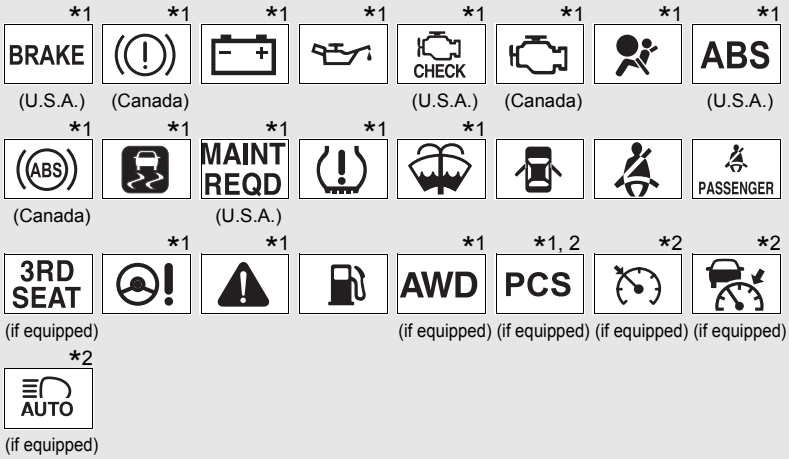

*1: These lights turn on when the "ENGINE START STOP" switch is turned to IGNITION ON mode (vehicles with a smart key system) or the engine switch is turned to the "ON" position (vehicles without a smart key system) to indicate that a system check is being performed. They will turn off after the engine is started, or after a few seconds. There may be a malfunction in a system if a light does not come on, or if the lights do not turn off. Have the vehicle inspected by your Toyota dealer for details.

*2: The light flashes to indicate a malfunction.


CAUTION

If a safety system warning light does not come on

Should a safety system light such as the ABS or SRS airbag warning light not come on when you start the engine, this could mean that these systems are not available to help protect you in an accident, which could result in death or serious injury. Have the vehicle inspected by your Toyota dealer immediately if this occurs.

Multi-information display*

The multi-information display presents the driver with a variety of driving-related data, including the clock and current outside temperature. The display varies depending on its specification.

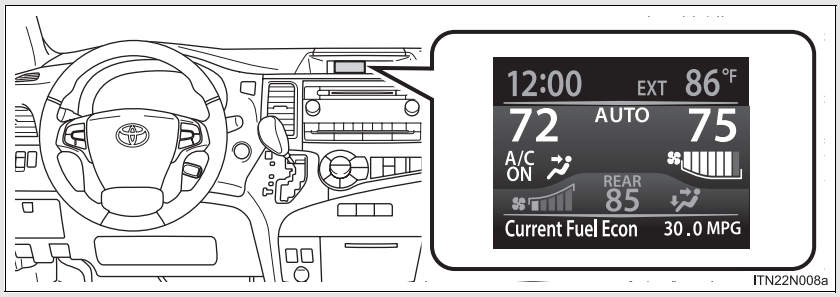

● Clock (→P. 256)

Indicates and sets the time.

● Outside temperature display

Indicates the outside temperature.
The temperature range that can be displayed is from -40°F (-40°C) to 122°F (50°C).

● Air conditioning system display (→P. 388)

Automatically displayed when the air conditioning is turned on.

● Rear view monitor (→P. 321)

Automatically displayed when the shift lever is moved into R.

● Trip information (→P. 253)

Displays driving range, fuel consumption and other cruising-related information.

● Intuitive parking assist display (if equipped) (→P. 314)


*: If equipped

● Warning messages (→P. 744)

Automatically displayed when a malfunction occurs in one of the vehicle's systems.

● Customizable features setting display (→P. 820)

Switching the display

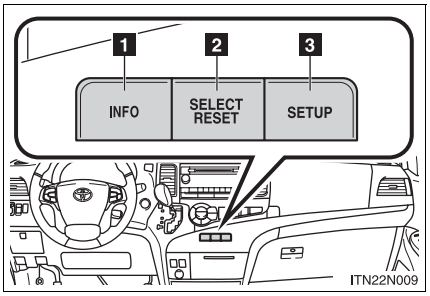

1 "INFO" button
2 "SELECT RESET" button
3 "SETUP" button

Display items

Display items can be switched by pressing the "INFO" button.
The display varies depending on its specification.


■ Average Fuel Economy



Displays the average fuel consumption since the function was reset.


- The function can be reset by pressing and holding the "SELECT RESET" button when the average fuel economy is displayed.
- Use the displayed average fuel consumption as a reference.

■ Current Fuel Economy



Displays the current rate of fuel consumption.


■ Distance to Empty



Displays the estimated maximum distance that can be driven with the quantity of fuel remaining.

- This distance is computed based on your average fuel consumption. As a result, the actual distance that can be driven may differ from that displayed.
- When only a small amount of fuel is added to the tank, the display may not be updated.
  When refueling, turn the “ENGINE START STOP” switch off (vehicles with a smart key system) or the engine switch is turned to the “OFF” position (vehicles without a smart key system). If the vehicle is refueled without turning the “ENGINE START STOP” switch off (vehicles with a smart key system) or the engine switch is turned to the “OFF” position (vehicles without a smart key system), the display may not be updated.


■ Average Speed



Displays the average vehicle speed since the engine was started or since the function was reset.

The function can be reset by pressing and holding the “SELECT RESET” button when the average speed is displayed.

■ Trip Timer



Displays the elapsed time since the timer was reset.

The timer only functions when the engine is running. The timer can be started and paused by pressing the “SELECT RESET” button, and reset by pressing and holding the “SELECT RESET” button when the trip timer is displayed.

Set up display


■ Before setting

STEP 1 Press the “SETUP” button while the vehicle is stopped.

The “Custom Settings” screen is displayed on the multi-information display.


If left idle for approximately 20 seconds, the display will revert to the previous screen.

STEP 2

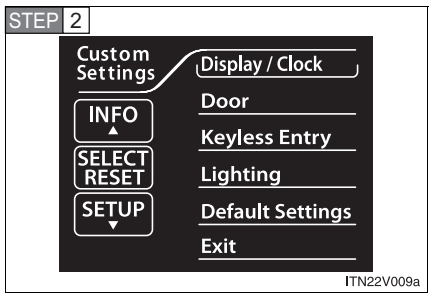

Select “Display / Clock” by pressing the “INFO” or “SETUP” button, and press the “SELECT RESET” button.

If you select “Exit” and press “SELECT RESET”, the display will revert to the previous screen.

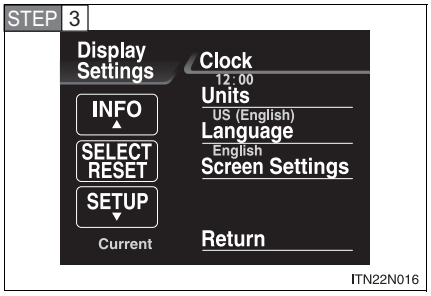


Select the desired item by pressing the “INFO” or “SETUP” button.

Press the “SELECT RESET” button to enter the setting mode.

The current setting is indicated by yellow text.

■ Setting the clock

STEP 1 Select “Clock” on the “Display Settings” screen, and press the “SELECT RESET” button.

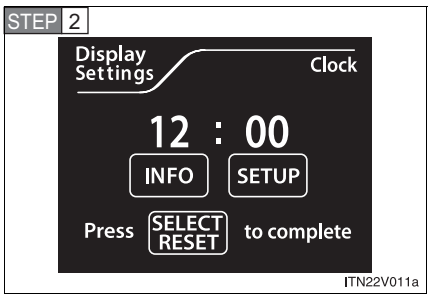


Press the “INFO” button to adjust the hours and the “SETUP” button to adjust the minutes.

Press the “SELECT RESET” button to set the clock.

■ Selecting the units

STEP 1 Select “Units” on the “Display Settings” screen, and press the “SELECT RESET” button.

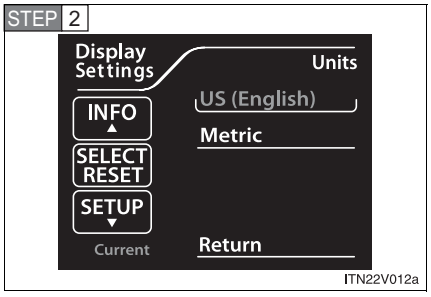

Select the units you want to read by pressing the “INFO” or “SETUP” button.


Press the “SELECT RESET” button to set the units.

The current setting is indicated by yellow text.

■ Selecting the language

STEP 1 Select “Language” on the “Display Settings” screen, and press the “SELECT RESET” button.

STEP 2



ITN22V013a

Select the language you want to read by pressing the “INFO” or “SETUP” button.

Press the “SELECT RESET” button to set the language.


The current setting is indicated by yellow text.

To shortcut directly to the “Language” screen from the initial “Custom Settings” screen, press and hold the “SETUP” button for 5 seconds.

■ Setting up the information display

STEP 1 Select “Screen Settings” on the “Display Settings” screen, and press the “SELECT RESET” button.

STEP 2




ITN22V017a


For vehicles without a navigation system, select “Climate / Info” by pressing the “INFO” or “SETUP” button.

Press the “SELECT RESET” button to enter the adjustment mode.

● Setting the brightness

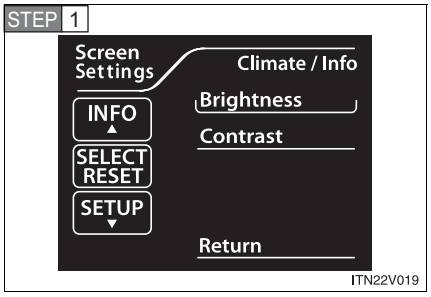

Select “Brightness” on the “Screen Settings” screen, and press the “SELECT RESET” button.

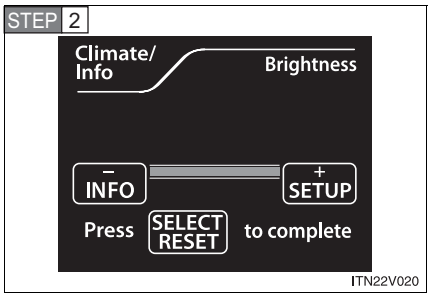


Press the “INFO” or “SETUP” button to adjust the brightness.

+: Brighter
-: Darker

Press the “SELECT RESET” button to exit the screen.


● Setting the contrast

STEP 1



Select “Contrast” on the “Screen Settings” screen, and press the “SELECT RESET” button.

STEP 2



Press the “INFO” or “SETUP” button to adjust the contrast.


+: Strengthen
-: Weaken

Press the “SELECT RESET” button to exit the screen.

■ **Setting up the rear view monitor display (if equipped with the rear view monitor system)**

STEP 1 Select “Screen Settings” on the “Display Settings” screen, and press the “SELECT RESET” button.


STEP 2




Select “Back Monitor” by pressing the “INFO” or “SETUP” button.

Press the “SELECT RESET” button to enter the adjustment mode.

● Setting the brightness

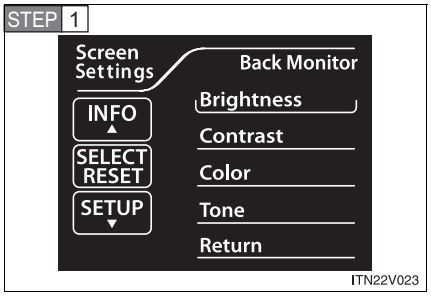

Select “Brightness” on the “Screen Settings” screen, and press the “SELECT RESET” button.

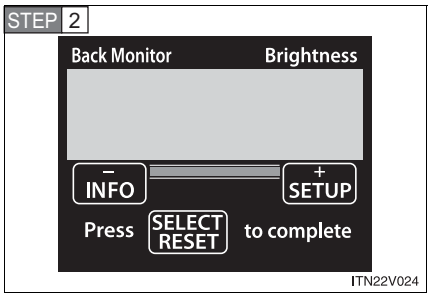


Press the “INFO” or “SETUP” button to adjust the brightness.


+: Brighter
-: Darker

Press the “SELECT RESET” button to the exit screen.

● Setting the contrast

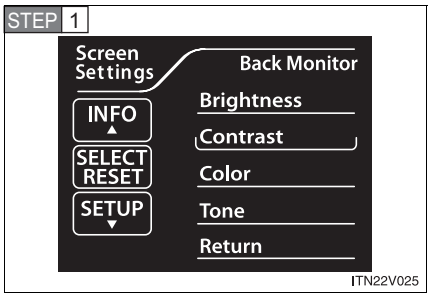

Select “Contrast” on the “Screen Settings” screen, and press the “SELECT RESET” button.

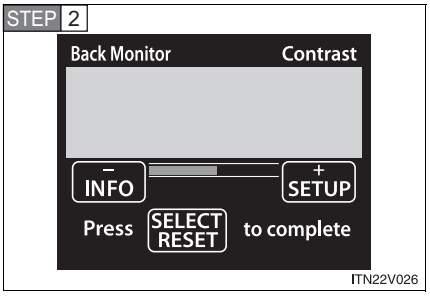


Press the “INFO” or “SETUP” button to adjust the contrast.


+: Strengthen
-: Weaken

Press the “SELECT RESET” button to exit the screen.

● Setting the color

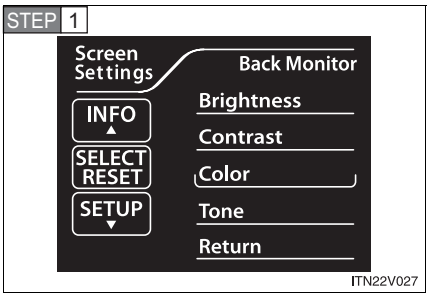

Select “Color” on the “Screen Settings” screen, and press the “SELECT RESET” button.

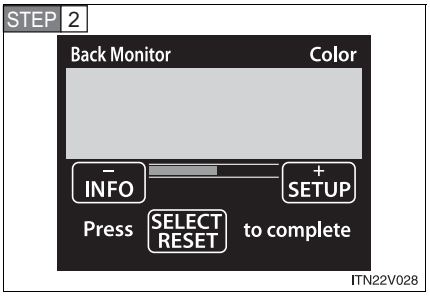


Press the “INFO” or “SETUP” button to adjust the color.


+: Green
-: Red

Press the “SELECT RESET” button to exit the screen.

● Setting the tone

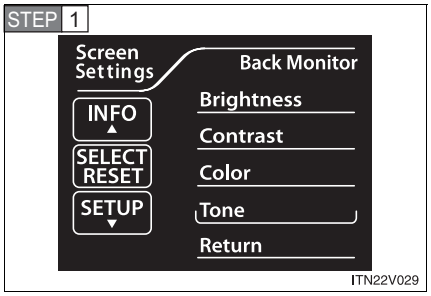

Select “Tone” on the “Screen Settings” screen, and press the “SELECT RESET” button.

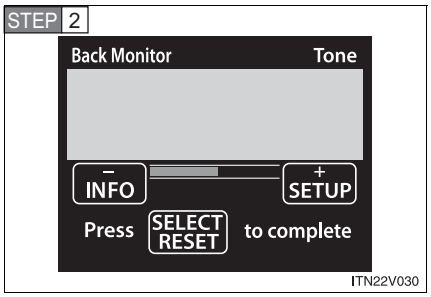

Press the “INFO” or “SETUP” button to adjust the tone.


+: Brighter
-: Darker

Press the “SELECT RESET” button to exit the screen.

■ **Returning to the previous screen**


Select “Return” on the “Screen Settings” screen, and press the “SELECT RESET” button.

■ **If the vehicle is moved while settings are being changed on the multi-information display**



If the vehicle speed exceeds approximately 3 mph (5 km/h) while the settings are being changed, “Please Stop Vehicle to Change Settings” will be displayed on the multi-information display, and setting mode will exit after several seconds. If the “SETUP” button is pressed at a speed in excess of 3 mph (5 km/h), only some of the settings can be changed. To change the other settings, press the “SETUP” button after bringing the vehicle to a complete stop.

Eco Driving Indicator

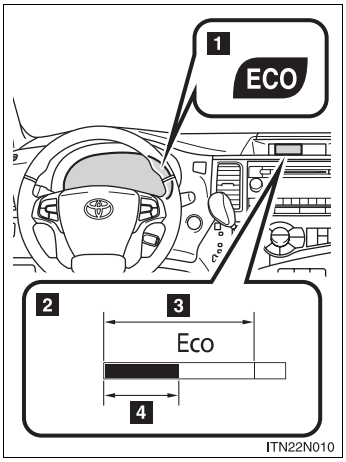

1 Eco Driving Indicator Light

During Eco-friendly acceleration (Eco driving), Eco Driving Indicator Light will turn on.

2 Eco Driving Indicator Zone Display*

Suggests Zone of Eco driving with current Eco driving ratio based on acceleration.

*: The display varies depending on its specification.

3 Zone of Eco driving

4 Eco driving ratio based on acceleration

If the vehicle exceeds Zone of Eco driving, the right side of Eco Driving Indicator Zone Display will blink and Eco Driving Indicator Light will turn off.

Eco Driving Indicator will operate in the following conditions:

- The shift lever is in D.
- Vehicle speed is below approximately 80mph (130 km/h).

■ **System check display**

Vehicles without a smart key system

After switching the engine switch to the “ON” position, “SIENNA” is displayed while system operation is checked. When the system check is complete, the normal screen will return.

Vehicles with a smart key system

After switching the “ENGINE START STOP” switch to IGNITION ON mode, “SIENNA” is displayed while system operation is checked. When the system check is complete, the normal screen will return.

■ **When “--”, “E” or “F” is displayed on the outside temperature display**

The system may be malfunctioning. Take your vehicle to your Toyota dealer.

■ **Outside temperature display**

In the following situations, the correct outside temperature may not be displayed, or the display may take longer than normal to change.

- When stopped, or driving at low speeds (less than 12 mph [20 km/h])
- When the outside temperature has changed suddenly (at the entrance/exit of a garage, tunnel, etc.)

⚠ NOTICE

■ **The multi-information display at low temperatures**


Allow the interior of the vehicle to warm up before using the liquid crystal information display. At extremely low temperatures, the information display monitor may respond slowly, and display changes may be delayed.

Headlight switch


The headlights can be operated manually or automatically.

Turning the end of the lever turns on the lights as follows:
The illustration is intended as an example.

Type A

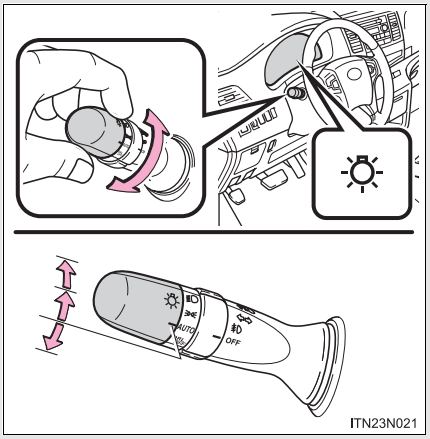

Type B

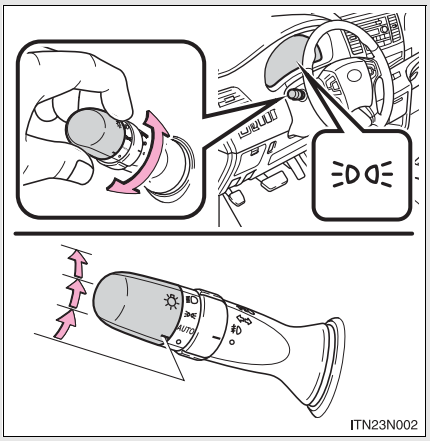



The side marker, parking, tail, license plate, daytime running lights (if equipped) and instrument panel lights turn on.



The headlights and all lights listed above turn on.

AUTO (if equipped)

The headlights, side marker, parking lights, daytime running lights and so on turn on and off automatically (when the engine switch is in the “ON” position [vehicles without a smart key system] or the “ENGINE START STOP” switch is in IGNITION ON mode [vehicles with a smart key system]).

DRL (if equipped)


The daytime running light system is on.

DRL OFF (if equipped)

The daytime running light system is off.

O	Off.
(if equipped)	Vehicles with the daytime running light system: The daytime running light system is on.
OFF	Off.
(if equipped)	Vehicles with the daytime running light system: The daytime running light system is on.

Turning on the high beam headlights

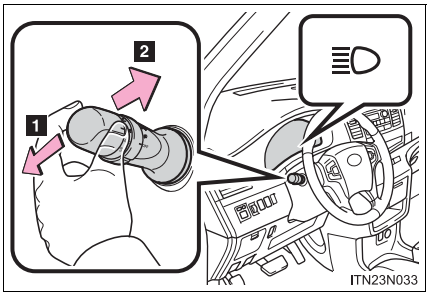

1 With the headlights on, push the lever away from you to turn on the high beams.

When the light switch is in AUTO position, the Automatic High Beam system will be activated. (→P. 273)


Pull the lever toward you to the center position to turn the high beams off.

2 Pull the lever toward you and release it to flash the high beams once.

You can flash the high beams with the headlights on or off.

Manual headlight leveling dial (vehicles with discharge headlights)

The level of the headlight aim can be adjusted according to the number of passengers and the loading condition of the vehicle.

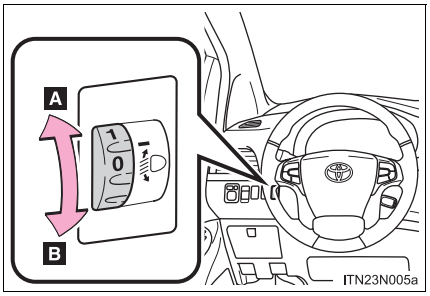

A Raises the level of the headlights

B Lowers the level of the headlights


Guide to dial settings

Occupancy and luggage load conditions		Dial position	
Occupants	Luggage load	2WD models	AWD models
Driver	None	0	0
Driver and front passenger	None	0	0
Driver, front passenger and all passengers in the second seat	None	0.5	0.5
All seats occupied	None	2	2
All seats occupied	Full luggage loading	4	3.5
Driver	Full luggage loading	1.5	1.5

■ **Daytime running light system (if equipped)**

- To make your vehicle more visible to other drivers, the headlights turn on automatically (at a reduced intensity) whenever the engine is started and the parking brake is released. Daytime running lights are not designed for use at night.
  For the U.S.A.: Daytime running lights can be turned off by operating the headlight switch.
- Compared to turning on the headlights, the daytime running light system offers greater durability and consumes less electricity, so it can help improve fuel economy.

■ **Headlight control sensor (if equipped)**



The sensor may not function properly if an object is placed on the sensor, or anything that blocks the sensor is affixed to the windshield.

Doing so interferes with the sensor detecting the level of ambient light and may cause the automatic headlight system to malfunction.

■ Automatic light off system

Vehicles without a smart key system

- When the headlights are on: The headlights and tail lights turn off 30 seconds after a door is opened and closed if the engine switch is turned to the “ACC” or “LOCK” position. (The lights turn off immediately if on the key is pressed after all the doors are locked.)
- When only the tail lights are on: The tail lights turn off automatically if the engine switch is turned to the “ACC” or “LOCK” position and the driver’s door is opened.

To turn the lights on again, turn the engine switch to the “ON” position, or turn the light switch off once and then back to the or .

Vehicles with a smart key system

- When the headlights are on: The headlights and tail lights turn off 30 seconds after a door is opened and closed if the “ENGINE START STOP” switch is turned to ACCESSORY mode or turned off. (The lights turn off immediately if on the key is pressed after all the doors are locked.)
- When only the tail lights are on: The tail lights turn off automatically if the “ENGINE START STOP” switch is turned to ACCESSORY mode or turned off and the driver’s door is opened.

To turn the lights on again, turn the “ENGINE START STOP” switch to IGNITION ON mode, or turn the light switch off and then back to or .

■ **Customization that can be configured at Toyota dealer or by the multi-information display**

Settings (e.g. light sensor sensitivity) can be changed.
(Customizable features →P. 815)

⚠ NOTICE


■ **To prevent battery discharge**

Do not leave the lights on longer than necessary when the engine is not running.

Automatic High Beam*

The Automatic High Beam uses an in-vehicle camera sensor to assess the brightness of streetlights, the lights of oncoming and preceding vehicles, etc., and automatically turns high beam on or off as necessary.

■ Activating the Automatic High Beam system

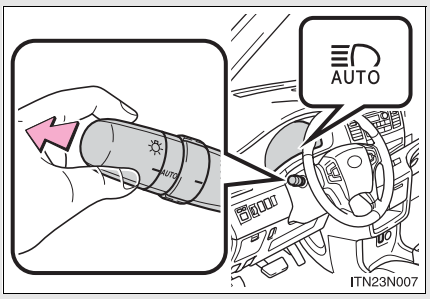


Push the lever away from you with the headlight switch in the **AUTO** position when the "ENGINE START STOP" switch is in IGNITION ON mode (vehicles with a smart key system) or the engine switch is in the "ON" position (vehicles without a smart key system).

The Automatic High Beam indicator will come on when the headlights are turned on automatically to indicate that the system is active.

*: If equipped


■ Turning the high beam on/off manually

Switching to low beam

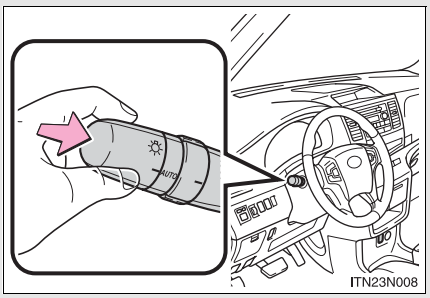

Pull the lever to the original position.

Switching to high beam

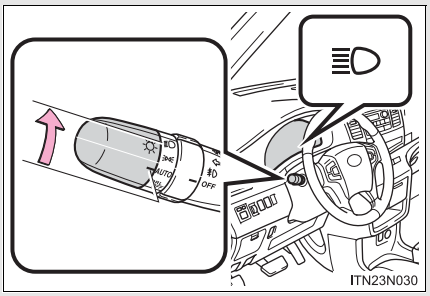

Turn the light switch to the position.

High beam automatic turning on or off conditions

When all of the following conditions are fulfilled, high beam will be automatically turned on (after approximately 1 second):

- Vehicle speed is above approximately 20 mph (32 km/h).
- The area ahead of the vehicle is dark.
- There are no oncoming or preceding vehicles with headlights or tail lights turned on.

If any of the following conditions are fulfilled, high beam will be automatically turned off:

- Vehicle speed drops below approximately 20 mph (32 km/h).
- The area ahead of the vehicle is not dark.
- Oncoming or preceding vehicles have headlights or tail lights turned on.

■ **Limitations of the Automatic High Beam**

Do not rely on the Automatic High Beam. Always drive safely, taking care to observe your surroundings and turning high beam on or off manually if necessary.

■ **Camera sensor detection information**

- High beam may not be automatically turned off in the following situations:
  - When oncoming vehicles suddenly appear from a curve.
  - When the vehicle is cut in front of by another.
- High beam may be turned off if an oncoming vehicle that is using fog lights without using the headlights is detected.
- Houselights, streetlights, red traffic signals, and illuminated billboards or signs may cause the high beam to turn off.
- The following factors may affect the amount of time taken to turn high beam on or off:
  - The brightness of headlights, fog lights, and tail lights of oncoming and preceding vehicles
  - Road conditions (wetness, ice, snow etc.)
  - The number of passengers and amount of baggage
- High beam may be turned on or off when unexpected by the driver.

● In the situations below, the system may not be able to correctly detect the surrounding brightness levels, and may flash or expose nearby pedestrians to the high beam. Therefore, you should consider turning the high beam on or off manually rather than relying on the Automatic High Beam system.

- In bad weather (rain, snow, fog, sandstorms etc.)
- The windshield is obscured by fog, mist, ice, dirt etc.
- The windshield is cracked or damaged.
- The inside rear view mirror or camera sensor is deformed or dirty.
- Surrounding brightness levels are equal to those of headlights, tail lights or fog lights.
- Vehicles ahead have headlights that are either switched off, dirty, are changing color, or are not aimed properly.
- When driving through an area of intermittently changing brightness and darkness
- When frequently and repeatedly driving ascending/descending roads, or roads with rough, bumpy or uneven surfaces (such as stone-paved roads, gravel tracks etc.)
- When frequently and repeatedly taking curves or driving on a winding road
- There is a highly reflective object ahead of the vehicle, such as a sign or a mirror.
- The vehicle's headlights are damaged or dirty.
- The vehicle is lifting or tilting, due to a flat tire, a trailer being towed etc.
- The Automatic High Beam indicator is flashing.
- The high beam and low beam are repeatedly being switched between in an abnormal manner.
- The driver believes that the high beam may be causing problems or distress to other drivers or pedestrians nearby.

■ **If the Automatic High Beam indicator flashes...**

It may indicate a malfunction in the system. Contact your Toyota dealer.

■ **Customization that can be configured at Toyota dealer or by the multi-information display**

The Automatic High Beam can be turned off.
(Customizable features →P. 815)

■ **Temporary lowering sensor sensitivity**


The sensitivity of the sensor can be temporarily lowered.

To lower the sensitivity, push and hold ⏻ on the inside rear view mirror for 15 to 20 seconds, and release. The indicator light on the inside rear view mirror will flash to indicate that the sensitivity has been lowered.

Vehicles without a smart key system:
When the engine switch is turned to the “LOCK” position, the sensitivity will be returned to its normal level.
Vehicles with a smart key system:
When the “ENGINE START STOP” switch is turned off, the sensitivity will be returned to its normal level.

NOTICE

Camera sensor



Observe the following to ensure that the Automatic High Beam functions correctly.

- Do not touch the camera sensor.
- Do not subject the inside rear view mirror or the camera sensor to a strong impact.
- Do not disassemble the camera sensor.
- Do not spill liquid onto the inside rear view mirror or the camera sensor.
- Do not apply window tinting or stickers to the camera sensor or the area of windshield near the camera sensor.
- Do not place items on the dashboard. There is a possibility that the camera sensor will mistake items reflected in the windshield for streetlights, the headlights of other vehicles, etc.
- Do not install a parking tag or any other accessories near or around the inside rear view mirror and the camera sensor.
- Do not overload the vehicle.
- Do not modify the vehicle.
- Do not replace windshield with a non-genuine windshield.
  Contact your Toyota dealer.


Headlight leveling

When the vehicle is loaded, headlight level should be adjusted to appropriate dial setting. (→P. 269)

Fog light switch*

The fog lights secure excellent visibility in difficult driving conditions, such as in rain and fog.

Type A

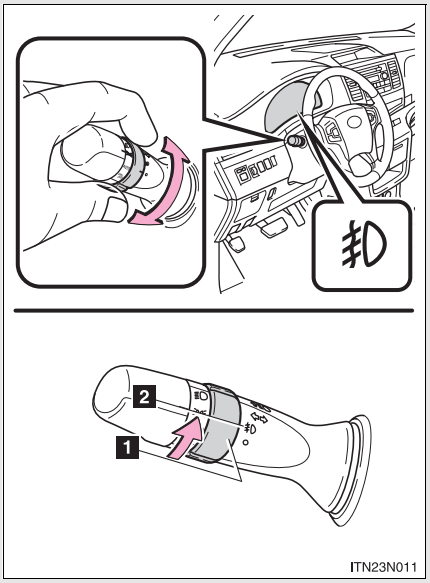


1 O Turns the front fog lights off

2 Turns the front fog lights on

*: If equipped

Type B

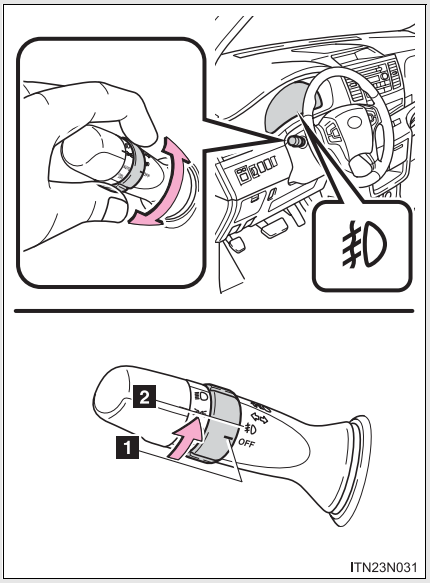

1 OFF Turns the front fog lights off

2 Turns the front fog lights on


■ **Fog lights can be used when**

The headlights are on in low beam.

Intermittent windshield wipers with interval adjuster

The wiper operation is selected by moving the lever as follows. When intermittent windshield wiper operation is selected, the wiper interval can be also adjusted.

Type A

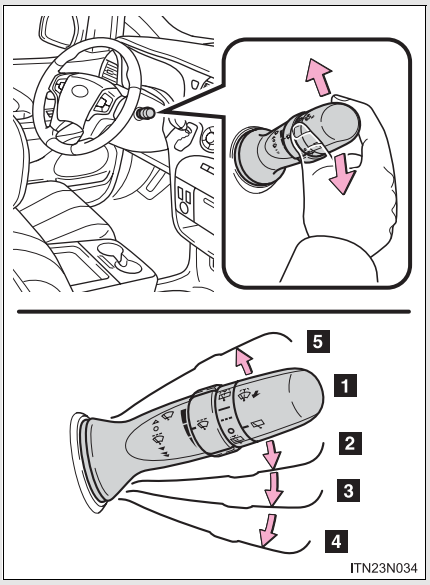


1 Off

2 Intermittent windshield wiper operation

3 Low speed windshield wiper operation


4 High speed windshield wiper operation

5 Temporary operation

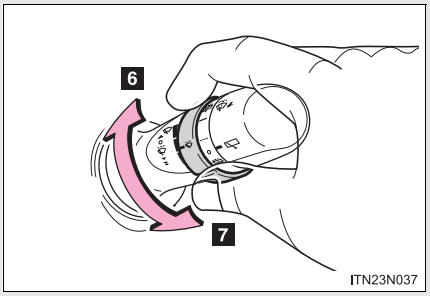

6 Increases the intermittent windshield wiper frequency


7 Decreases the intermittent windshield wiper frequency

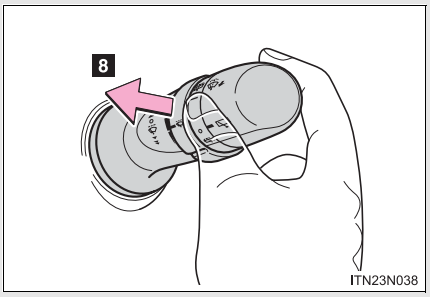

8 Washer/wiper dual operation

The wipers will automatically operate a couple of times after the washer squirts.

Type B

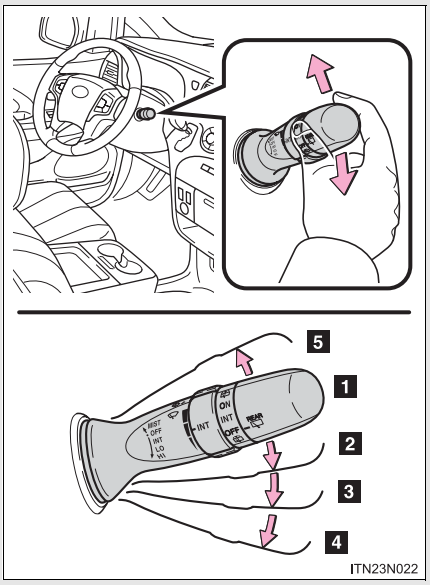


1 **OFF** Off

2 **INT** Intermittent windshield wiper operation

3 **LO** Low speed windshield wiper operation


4 **HI** High speed windshield wiper operation

5 **MIST** Temporary operation

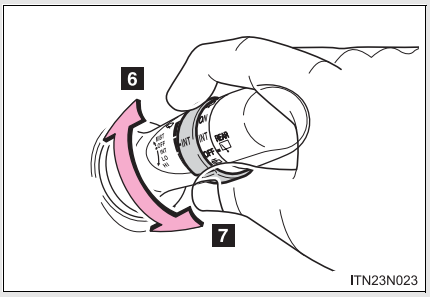

6 Increases the intermittent windshield wiper frequency

7 Decreases the intermittent windshield wiper frequency

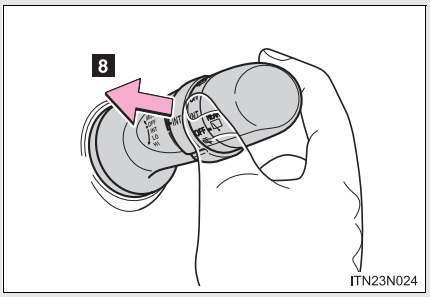

8 Washer/wiper dual operation


The wipers will automatically operate a couple of times after the washer squirts.

Rain-sensing windshield wipers (if equipped)

When “AUTO” is selected, the wipers will operate automatically when the sensor detects falling rain. The system automatically adjusts wiper timing in accordance with rain volume.

When “AUTO” is selected, the sensor sensitivity can be adjusted as follows by turning the switch ring:

Type A

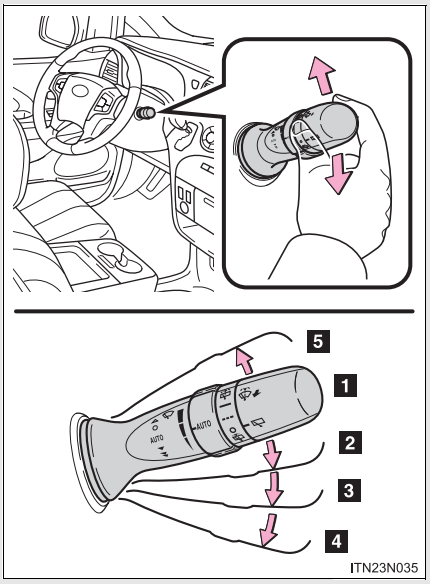


1 Off

2 AUTO Rain-sensing wiper operation (“AUTO”)

3 Low speed wiper operation


4 High speed wiper operation

5 Temporary operation

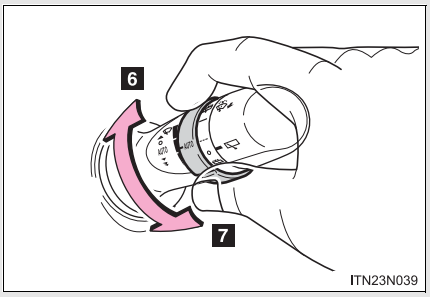

6 Increases the sensitivity


7 Decreases the sensitivity

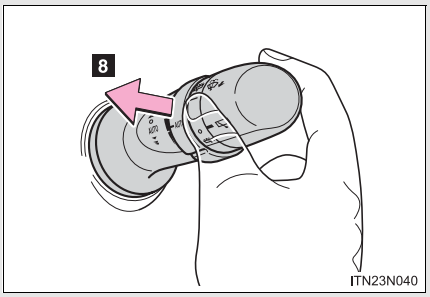

8 Washer/wiper dual operation

The wipers will automatically operate a couple of times after the washer squirts.

Type B

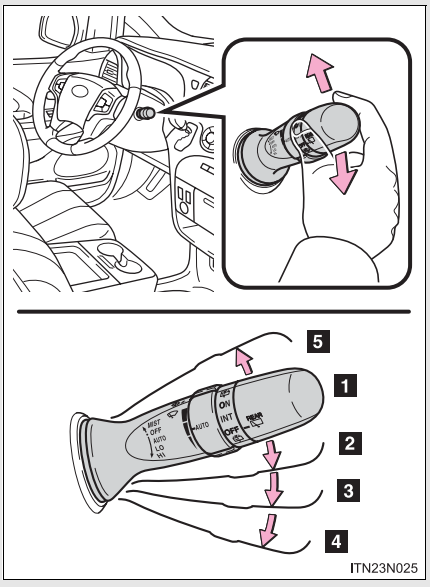


1 **OFF** Off

2 **AUTO** Rain-sensing wiper operation (“AUTO”)

3 **LO** Low speed wiper operation


4 **HI** High speed wiper operation

5 **MIST** Temporary operation

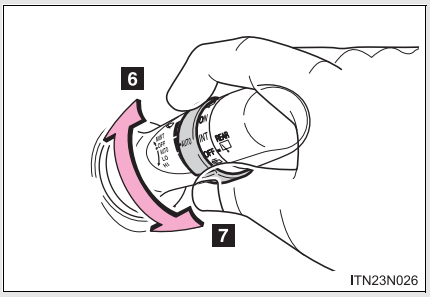

6 Increases the sensitivity

7 Decreases the sensitivity

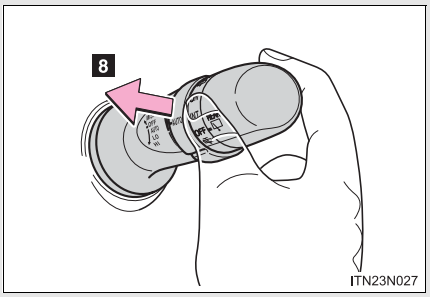

8 Washer/wiper dual operation


The wipers will automatically operate a couple of times after the washer squirts.

■ **The windshield wipers and washer can be operated when**

Vehicles without a smart key system:
The engine switch is in the “ON” position.

Vehicles with a smart key system:
The “ENGINE START STOP” switch is in IGNITION ON mode.

■ **Raindrop sensor (vehicles with rain-sensing windshield wipers)**



- The raindrop sensor judges the amount of raindrops.
- If the wiper switch is turned to “AUTO” position while the “ENGINE START STOP” switch is in IGNITION ON mode, the wiper will operate once to show that “AUTO” mode is activated.
- If the temperature of the raindrop sensor is 185°F (85°C) or higher, or 14°F (-10°C) or lower, automatic operation may not occur. In this case, operate the wipers in any mode other than “AUTO”.

■ **If no windshield washer fluid sprays**

Check that the washer nozzles are not blocked if there is washer fluid in the windshield washer fluid reservoir.

⚠ CAUTION

■ Caution regarding the use of windshield wipers in “AUTO” mode

The windshield wipers may operate unexpectedly if the sensor is touched or the windshield is subject to vibration in “AUTO” mode. Take care that your fingers etc. do not become caught in the windshield wipers.

⚠ NOTICE

■ When the windshield is dry

Do not use the wipers, as they may damage the windshield.

■ When the washer fluid tank is empty

Do not operate the switch continually as the washer fluid pump may overheat.


■ When a nozzle becomes blocked

In this case, contact your Toyota dealer.
Do not try to clear it with a pin or other object. The nozzle will be damaged.

Rear window wiper and washer

The wiper operation is selected by moving the lever as follows:

Type A

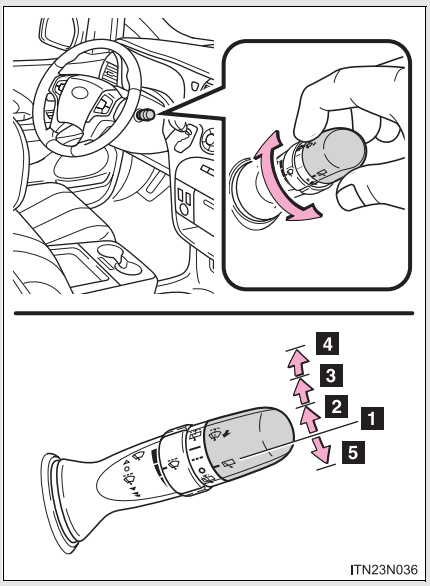

1 Off


2 Intermittent window wiper operation

3 Normal window wiper operation

4 Washer/wiper dual operation

5 Washer/wiper dual operation

Type B

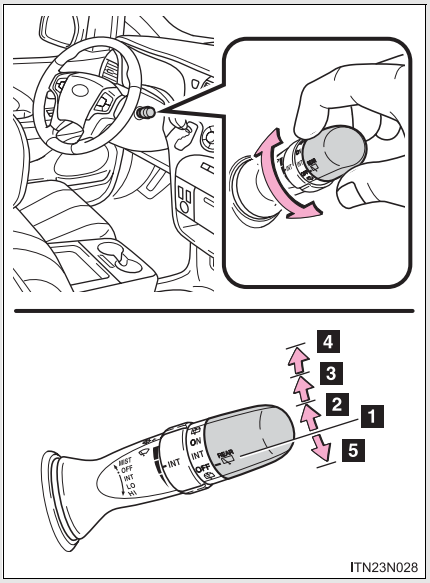

1 OFF Off

2 INT Intermittent window wiper operation

3 ON Normal window wiper operation

4 Washer/wiper dual operation

5 Washer/wiper dual operation

■ **The rear window wiper and washer can be operated when**

Vehicles without a smart key system:
The engine switch is in the “ON” position.

Vehicles with a smart key system:
The “ENGINE START STOP” switch is in IGNITION ON mode.

■ **If no windshield washer fluid sprays**

Check that the washer nozzles are not blocked if there is washer fluid in the windshield washer fluid reservoir.

NOTICE

When the rear window is dry


Do not use the wiper, as it may damage the rear window.

When the washer fluid tank is empty

Do not operate the switch continually as the washer fluid pump may overheat.


Cruise control*

Use cruise control to maintain a set speed without depressing the accelerator pedal.

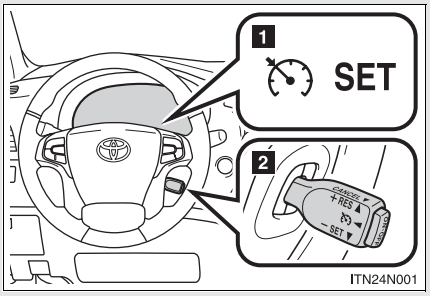

1 Indicators
2 Cruise control switch


■ Setting the vehicle speed

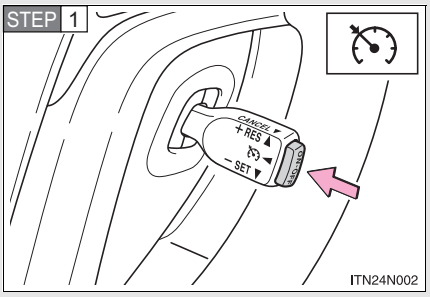

Press the “ON-OFF” button to activate the cruise control.

Cruise control indicator will come on.

Press the button again to deactivate the cruise control.

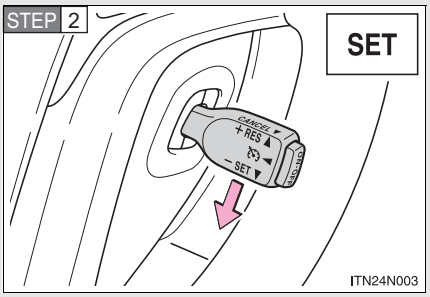


Accelerate or decelerate the vehicle to the desired speed, and push the lever down to set the speed.

“SET” indicator will come on. The vehicle speed at the moment the lever is released becomes the set speed.

*: If equipped

■ **Adjusting the set speed**

To change the set speed, operate the lever until the desired set speed is obtained.

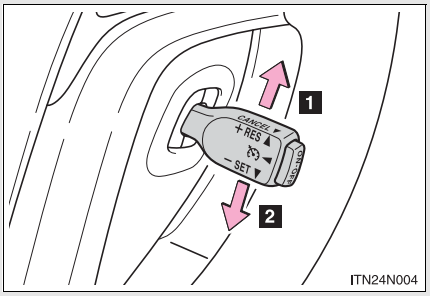

1 Increases the speed

2 Decreases the speed


Fine adjustment: Momentarily move the lever in the desired direction.

Large adjustment: Hold the lever in the desired direction.

The set speed will be increased or decreased as follows:

Fine adjustment: By approximately 1 mph (1.6 km/h) each time the lever is operated.
Large adjustment: The set speed can be increased or decreased continually until the lever is released.

■ Canceling and resuming the constant speed control

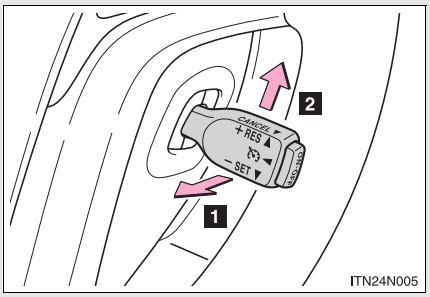

1 Pulling the lever toward you cancels the constant speed control.

The speed setting is also canceled when the brakes are applied.

2 Pushing the lever up resumes the constant speed control.

Resuming is available when the vehicle speed is more than approximately 25 mph (40 km/h).

■ **Cruise control can be set when**

- The shift lever is in D or more than range 4 of S has been selected.
- Vehicle speed is above approximately 25 mph (40 km/h).

■ **Accelerating after setting the vehicle speed**

- The vehicle can be accelerated normally. After acceleration, the set speed resumes.
- Even without canceling the cruise control, the set speed can be increased by first accelerating the vehicle to the desired speed and then pushing the lever down to set the new speed.

■ **Automatic cruise control cancelation**

Cruise control will stop maintaining the vehicle speed in any of the following situations.

- Actual vehicle speed falls more than approximately 10 mph (16 km/h) below the preset vehicle speed.
  At this time, the memorized set speed is not retained.
- Actual vehicle speed is below approximately 25 mph (40 km/h).
- Enhanced VSC is activated.

■ **If the cruise control indicator light flashes**

Press the “ON-OFF” button once to deactivate the system, and then press the button again to reactivate the system.
If the cruise control speed cannot be set or if the cruise control cancels immediately after being activated, there may be a malfunction in the cruise control system. Have the vehicle inspected by your Toyota dealer.

CAUTION

■ **To avoid operating the cruise control by mistake**

Switch the cruise control off using the “ON-OFF” button when not in use.


■ **Situations unsuitable for cruise control**

Do not use cruise control in any of the following situations.
Doing so may result in loss of control and could cause an accident resulting in death or serious injury.

- In heavy traffic
- On roads with sharp bends
- On winding roads
- On slippery roads, such as those covered with rain, ice or snow
- On steep hills
  Vehicle speed may exceed the set speed when driving down a steep hill.
- When your vehicle is towing a trailer or during emergency towing

Dynamic radar cruise control*


Dynamic radar cruise control supplements conventional cruise control with a vehicle-to-vehicle distance control. In vehicle-to-vehicle distance control mode, the vehicle automatically accelerates or decelerates in order to maintain a set following distance from vehicles ahead.

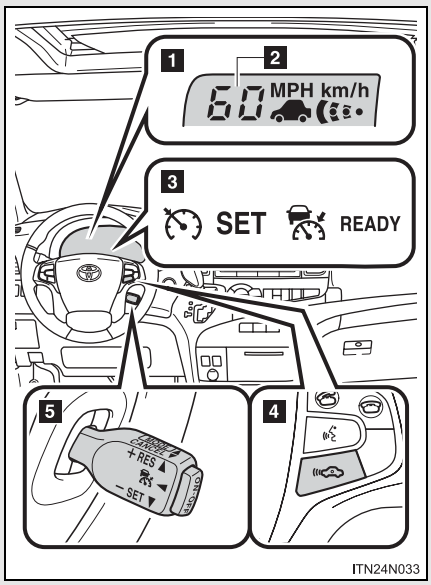

1 Display
2 Set speed
3 Indicators
4 Vehicle-to-vehicle distance button
5 Cruise control switch

*: If equipped


■ Setting the vehicle speed (vehicle-to-vehicle distance control mode)

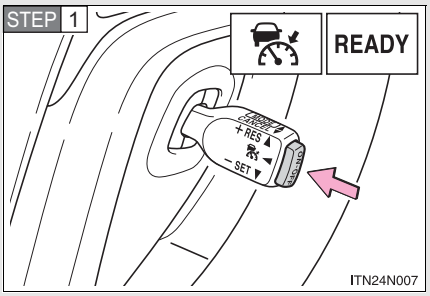

Press the “ON-OFF” button to activate the cruise control.

Dynamic radar cruise control indicator will come on.

Press the button again to deactivate the cruise control.

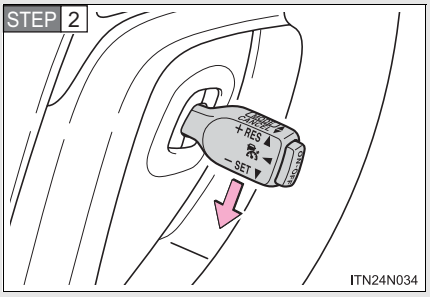


Accelerate or decelerate to the desired speed and push the lever down to set the speed.

The vehicle speed at the moment the lever is released becomes the set speed.

■ Adjusting the set speed

To change the set speed, operate the lever until the desired set speed is displayed.

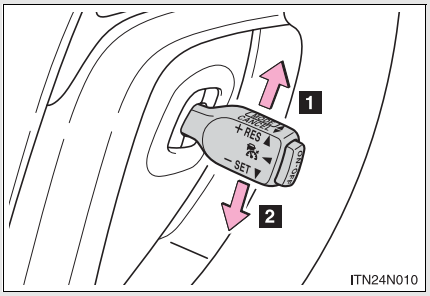

1 Increases the speed

2 Decreases the speed

Fine adjustment: Momentarily move the lever in the desired direction.

Large adjustment: Hold the lever in the desired direction.

In the vehicle-to-vehicle distance control mode, the set speed will be increased or decreased as follows:


- When the set speed is shown in “MPH”
  Fine adjustment: By approximately 1 mph (1.6 km/h) each time the lever is operated
  Large adjustment: By approximately 5 mph (8 km/h) for each 0.75 seconds the lever is held
- When the set speed is shown in “km/h”
  Fine adjustment: By approximately 0.6 mph (1 km/h) each time the lever is operated
  Large adjustment: By approximately 3.1 mph (5 km/h) for each 0.75 seconds the lever is held

In the constant speed control mode (→P. 305), the set speed will be increased or decreased as follows:

Fine adjustment: By approximately 1 mph (1.6 km/h) each time the lever is operated

Large adjustment: The set speed can be increased or decreased continually until the lever is released.

■ Changing the vehicle-to-vehicle distance

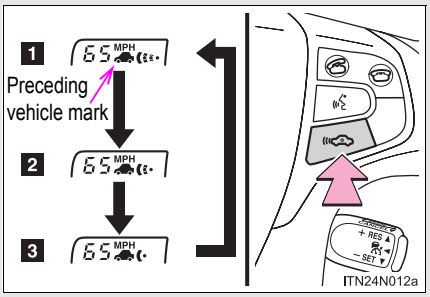

Pressing the button changes the vehicle-to-vehicle distance as follows:

1 Long
2 Medium
3 Short

Vehicles without a smart key system:
The vehicle-to-vehicle distance is set automatically to long mode when the engine switch is turned to the “ON” position.

Vehicles with a smart key system:
The vehicle-to-vehicle distance is set automatically to long mode when the “ENGINE START STOP” switch is turned to IGNITION ON mode.


If a vehicle is running ahead of you, the preceding vehicle mark will be also displayed.

■ Vehicle-to-vehicle distance settings

Select a distance from the table below. Note that the distances shown correspond to a vehicle speed of 50 mph (80 km/h). Vehicle-to-vehicle distance increases/decreases in accordance with vehicle speed.

Distance options	Vehicle-to-vehicle distance
Long	Approximately 160 ft. (50 m)
Medium	Approximately 130 ft. (40 m)
Short	Approximately 100 ft. (30 m)

■ Canceling and resuming the speed control

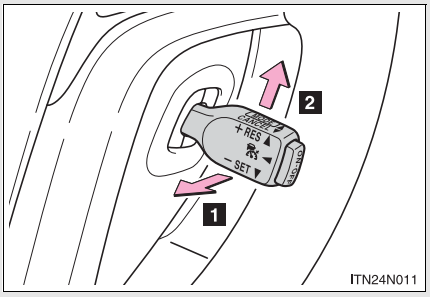

1 Pulling the lever toward you cancels the constant speed control.

The speed setting is also canceled when the brakes are applied.


2 Pushing the lever up resumes the cruise control and returns vehicle speed to the set speed.

Resuming is available when the vehicle speed is more than approximately 25 mph (40 km/h).

Driving in vehicle-to-vehicle distance control mode

This mode employs a radar sensor to detect the presence of vehicles up to approximately 400 ft. (120 m) ahead, determines the current vehicle-to-vehicle following distance, and operates to maintain a suitable following distance from the vehicle ahead.

Note that vehicle-to-vehicle distance will close in when traveling on long downhill slopes.

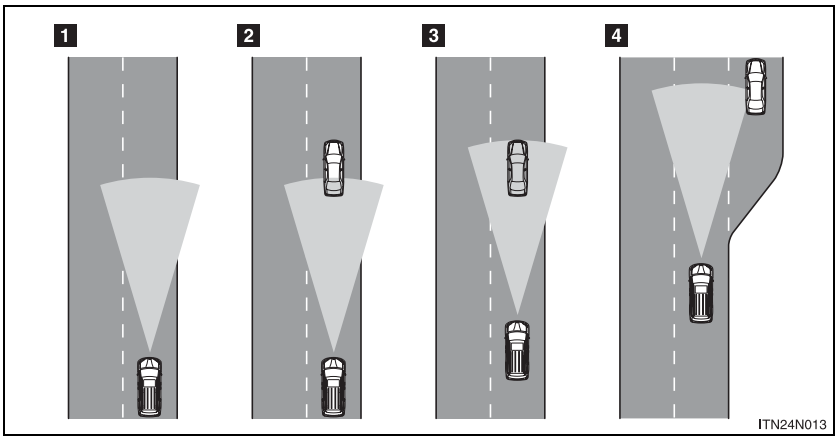

1 Example of constant speed cruising

When there are no vehicles ahead

The vehicle travels at the speed set by the driver. The desired vehicle-to-vehicle distance can also be set by operating the vehicle-to-vehicle distance control.

2 Example of deceleration cruising

When the vehicle ahead is driving slower than the set speed

When a vehicle is detected running ahead of you, the system automatically decelerates your vehicle. When a greater reduction in vehicle speed is necessary, the system applies the brakes. A warning tone warns you when the system cannot decelerate sufficiently to prevent your vehicle from closing in on the vehicle ahead.

3 Example of follow-up cruising

When following a vehicle driving slower than the set speed

The system continues follow-up cruising while adjusting for changes in the speed of the vehicle ahead in order to maintain the vehicle-to-vehicle distance set by the driver.

4 Example of acceleration

When there are no longer any vehicles ahead driving slower than the set speed

The system accelerates until the set speed is reached. The system then returns to constant speed cruising.

Approach warning

When your vehicle is too close to a vehicle ahead, and sufficient automatic deceleration via the cruise control is not possible, the display will flash and the buzzer will sound to alert the driver. An example of this would be if another driver cuts in front of you while you are following a vehicle. Apply the brakes to ensure an appropriate vehicle-to-vehicle distance.


Warnings may not occur when

In the following instances, there is a possibility that the warnings will not occur:

- When the speed of the vehicle ahead matches or exceeds your vehicle speed
- When the vehicle ahead is traveling at an extremely slow speed
- Immediately after the cruise control speed was set
- At the instant the accelerator is applied

Selecting conventional constant speed control mode

Constant speed control mode differs from vehicle-to-vehicle distance control mode. When constant speed control mode is selected, your vehicle will maintain a set speed regardless of whether or not there are other vehicles in the lane ahead.

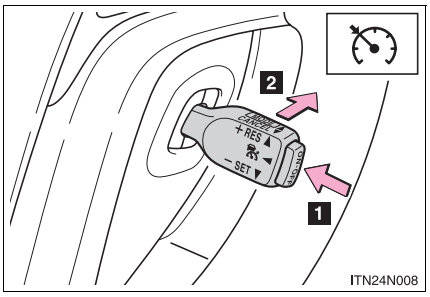

1 Press the “ON-OFF” button to activate the cruise control.

Dynamic radar cruise control indicator will come on.

Press the button again to deactivate the cruise control.

2 Switch to constant speed control mode.
(Push the lever forward and hold for approximately one second)

Constant speed control mode indicator will come on.

When in constant speed control mode, to return to vehicle-to-vehicle distance control mode, push the lever forward again and hold for approximately 1 second.

After the desired speed has been set, it is not possible to return to vehicle-to-vehicle distance control mode.

Vehicles without a smart key system:
If the engine switch is turned off and then turned to the “ON” position again, the vehicle will automatically return to vehicle-to-vehicle distance control mode.

Vehicles with a smart key system:
If the “ENGINE START STOP” switch is turned off and then turned to IGNITION ON mode again, the vehicle will automatically return to vehicle-to-vehicle distance control mode.

Adjusting the speed setting:
→P. 300

Canceling and resuming the speed setting: →P. 302

■ **Dynamic radar cruise control can be set when**

- The shift lever is in the D or more than range 4 of S has been selected.
- Vehicle speed is above approximately 30 mph (50 km/h).

■ **Accelerating after setting the vehicle speed**

The vehicle can accelerate normally. After acceleration, the set speed resumes.
However, during vehicle-to-vehicle distance control mode, the vehicle speed may decrease below the set speed in order to maintain the distance to the vehicle ahead.

■ **Automatic cancelation of vehicle-to-vehicle distance control**

Vehicle-to-vehicle distance control driving is automatically canceled in the following situations:

- Actual vehicle speed falls below approximately 25 mph (40 km/h).
- Enhanced VSC is activated.
- The sensor cannot operate correctly because it is covered in some way.
- The windshield wipers are operating at high speed (when the wiper switch is set to the “AUTO” mode or the high speed wiper operation position).

If vehicle-to-vehicle distance control driving is automatically canceled for any other reason, there may be a malfunction in the system. Contact your Toyota dealer.


■ **Automatic cancelation of constant speed control**

The cruise control will stop maintaining the vehicle speed in the following situations.

- Actual vehicle speed is more than approximately 10 mph (16 km/h) below the set vehicle speed.
  At this time, the memorized set speed is not retained.
- Vehicle speed falls below approximately 25 mph (40 km/h).
- Enhanced VSC is activated.

■ **Radar sensor and grille cover**

Always keep the sensor and grille cover clean to ensure that the vehicle-to-vehicle distance control operates properly. (Some obstructions, such as snow, ice and plastic objects, cannot be detected by the obstruction sensor.) Dynamic radar cruise control is canceled if an obstruction is detected.



1 Grille cover

2 Radar sensor

■ **Warning lights for dynamic radar cruise control**

Warning light is used to indicate a system malfunction or to inform the driver of the need for caution while driving. (→P. 729)

Certification

U.S.A.

FCC ID: HYQDNMWR005

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Radiofrequency radiation exposure Information:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance of 20 cm between the radiator (antenna) and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Canada

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

CAUTION

Before using dynamic radar cruise control

Do not overly rely on vehicle-to-vehicle distance control.
Be aware of the set speed. If automatic deceleration/acceleration is not appropriate, adjust the vehicle speed, as well as the distance between your vehicle and vehicles ahead by applying the brakes, etc.

Caution regarding the driving assist systems

Observe the following precautions.
Failure to do so may cause an accident resulting in death or serious injury.

- Assisting the driver to measure following distance
  The dynamic radar cruise control is only intended to help the driver in determining the following distance between the driver's own vehicle and a designated vehicle travelling ahead. It is not a mechanism that allows careless or inattentive driving, and it is not a system that can assist the driver in low-visibility conditions. It is still necessary for driver to pay close attention to the vehicle's surroundings.
- Assist the driver to judge proper following distance
  The dynamic radar cruise control determines whether the following distance between the driver's own vehicle and a designated vehicle travelling ahead is appropriate or not. It is not capable of making any other type of judgement. Therefore, it is absolutely necessary for the driver to remain vigilant and to determine whether or not there is possibility of danger in any given situation.
- Assisting the driver to operate the vehicle
  The dynamic radar cruise control has no capability to prevent or avoid a collision with a vehicle travelling ahead. Therefore, if there is ever any danger, the driver must take immediate and direct control of the vehicle and act appropriately in order to ensure the safety of all involved.

To avoid inadvertent cruise control activation

Switch the cruise control off using the "ON-OFF" button when not in use.

CAUTION

■ **Situations unsuitable for dynamic radar cruise control**

Do not use dynamic radar cruise control in any of the following situations. Doing so may result in inappropriate speed control and could cause an accident resulting in death or serious injury.

- In heavy traffic
- On roads with sharp bends
- On winding roads
- On slippery roads, such as those covered with rain, ice or snow
- On steep downhills, or where there are sudden changes between sharp up and down gradients
  Vehicle speed may exceed the set speed when driving down a steep hill.
- At entrances to expressways
- When weather conditions are bad enough that they may prevent the sensors from functioning correctly (fog, snow, sandstorm, heavy rain, etc.)
- When an approach warning buzzer is heard often
- When your vehicle is towing a trailer or during emergency towing

CAUTION

When the sensor may not be correctly detecting the vehicle ahead

Apply the brakes as necessary when any of the following types of vehicles are in front of you.
As the sensor may not be able to correctly detect these types of vehicles, the approach warning (→P. 304) will not be activated, and a fatal or serious accident may result.

- Vehicles that cut in suddenly
- Vehicles traveling at low speeds
- Vehicles that are not moving
- Vehicles with small rear ends (trailers with no load on board etc.)
- Motorcycles traveling in the same lane

Conditions under which the vehicle-to-vehicle distance control may not function correctly

Apply the brakes as necessary in the following conditions as the radar sensor may not be able to correctly detect vehicles ahead, and a fatal or serious accident may result:

- When water or snow thrown up by the surrounding vehicles hinders the functioning of the sensor
- When your vehicle is pointing upwards (caused by a heavy load in the luggage compartment, etc.)
- When the road curves or when the lanes are narrow
- When steering wheel operation or your position in the lane is unstable
- When the vehicle ahead of you decelerates suddenly

CAUTION

Handling the radar sensor


Observe the following to ensure the cruise control system can function effectively:
Otherwise, the system may not function correctly and could result in an accident.

- Keep the sensor and grille cover clean at all times.
  Clean the sensor and grille cover with a soft cloth so you do not mark or damage them.
- Do not subject the sensor or surrounding area to a strong impact.
  If the sensor moves even slightly off position, the system may malfunction. If the sensor or surrounding area is subject to a strong impact, always have the area inspected and adjusted by a Toyota dealer.
- Do not disassemble the sensor.
- Do not attach accessories or stickers to the sensor, grille cover or surrounding area.
- Do not modify or paint the sensor and grille cover.
- Do not replace them with non-genuine parts.

Intuitive parking assist*


The distance from your vehicle to nearby obstacles when parallel parking or maneuvering into a garage is measured by the sensors and communicated via the multi-information display, the touch screen and a buzzer. Always check the surrounding area when using this system.

■ Types of sensors

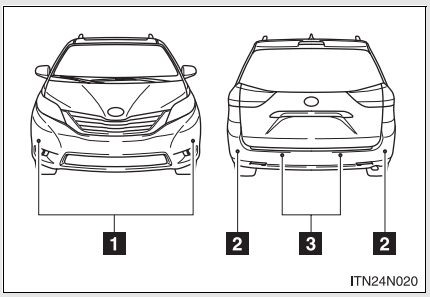

1 Front corner sensors (if equipped)
2 Rear corner sensors
3 Rear center sensors

■ Intuitive parking assist switch

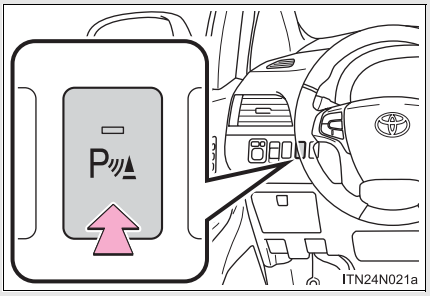

Turns the intuitive parking assist on/off


When on, the indicator light comes on and the buzzer sounds to inform the driver that the system is operational.

*: If equipped


Display

When the sensors detect an obstacle, a graphic is shown on the multi information display or touch screen depending on the position and distance to the obstacle.

Multi-information display

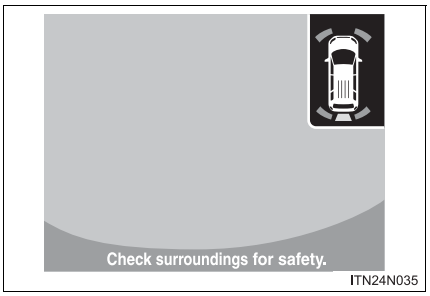

Touch screen (with navigation system)*

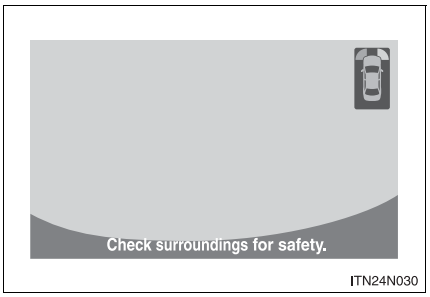


*: Depending on the type of navigation system.

The distance display and buzzer

When a sensor detects an obstacle, the direction of and the approximate distance to the obstacle are displayed and the buzzer sounds.

Corner sensor operation and distance to an obstacle

The system operates when the vehicle approaches within the following distances to an obstacle. The indicator flashes and the buzzer sounds when the system is operating.

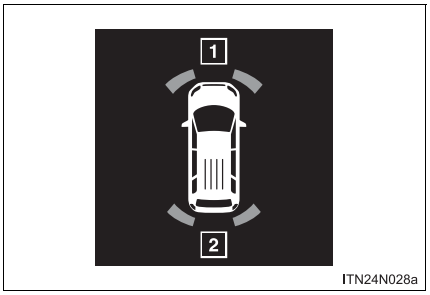

1 Front (if equipped)


Approximate distance to obstacle	Indicator and buzzer / Color
2.0 to 1.2 ft. (60 to 37.5 cm)	Intermittent / yellow
1.2 to 0.8 ft. (37.5 to 25 cm)	Fast intermittent / yellow
0.8 ft. (25 cm) or less	Continuous / red

2 Rear

Approximate distance to obstacle	Indicator and buzzer / Color
2.8 to 1.2 ft. (85 to 37.5 cm)	Intermittent / yellow
1.2 to 0.8 ft. (37.5 to 25 cm)	Fast intermittent / yellow
0.8 ft. (25 cm) or less	Continuous / red


Back sensor operation and distance to an obstacle

The system operates when the vehicle approaches within the following distances to an obstacle. The indicator flashes and the buzzer sounds when the system is operating.

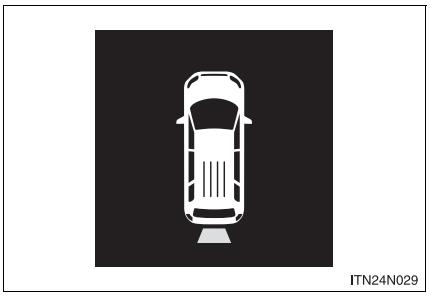

Approximate distance to obstacle	Indicator and buzzer / Color
5.9 to 2.8 ft. (180 to 85 cm)	Slow intermittent / yellow
2.8 to 1.5 ft. (85 to 45 cm)	Intermittent / yellow
1.5 to 1.1 ft. (45 to 35 cm)	Fast intermittent / yellow
1.1 ft. (35 cm) or less	Continuous / red

Detection range of the sensors

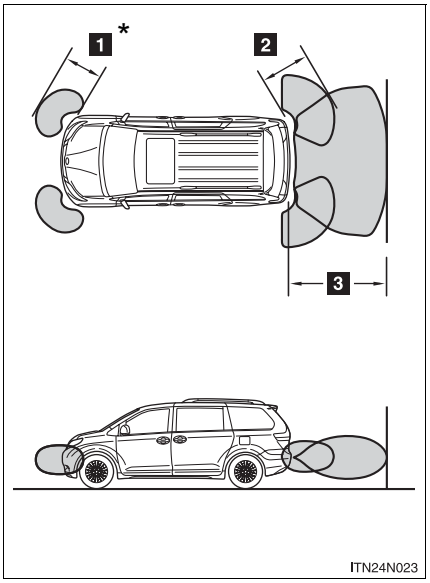

1 Approximately 2.0 ft. (60 cm)
2 Approximately 2.8 ft. (85 cm)
3 Approximately 5.9 ft. (180 cm)

The diagram shows the detection range of the sensors. Note that the sensors cannot detect obstacles that are extremely close to the vehicle.

The range of the sensors may change depending on the shape of the object etc.

*: if equipped

■ Intuitive parking assist can be operated when

Vehicles without a smart key system: The engine switch is in the “ON” position.

Vehicles with a smart key system: The “ENGINE START STOP” switch is in IGNITION ON mode.

● Front corner sensors:

- The shift lever is not in P.
- The vehicle speed is approximately 6 mph (10 km/h) or less.

● Rear corner and back sensors:

The shift lever is in R.

■ **Sensor detection information**

● Certain vehicle conditions and the surrounding environment may affect the ability of the sensor to correctly detect obstacles. Particular instances where this may occur are listed below.

- There is dirt, snow or ice on the sensor.
- The sensor is frozen.
- The sensor is covered in any way.
- The vehicle is leaning considerably to one side.
- On an extremely bumpy road, on an incline, on gravel, or on grass
- The vicinity of the vehicle is noisy due to vehicle horns, motorcycle engines, air brakes of large vehicles, or other loud noises producing ultrasonic waves.
- There is another vehicle equipped with parking assist sensors in the vicinity.
- A sensor is coated with a sheet of spray or heavy rain.
- The vehicle is equipped with a fender pole or radio antenna.
- A bumper or sensor receives a strong impact.
- The vehicle is approaching a tall or right-angled curb.
- In harsh sunlight or intense cold weather

In addition to the examples above, there are instances in which, because of their shapes, signs and other objects may be judged by the sensor to be closer than they are.

● The shape of the obstacle may prevent the sensor from detecting it. Pay particular attention to the following obstacles:

- Wires, fences, ropes etc.
- Cotton, snow and other materials that absorb sound waves
- Sharply-angled objects
- Low obstacles
- Tall obstacles with upper sections projecting outwards in the direction of your vehicle

■ **If the display flashes and a message is displayed**

→P. 744

■ **Certification (Canada only)**

This ISM device complies with Canadian ICES-001.

■ **When there is a malfunction**

In the following cases, have the vehicle inspected by your Toyota dealer.

- If the bumper is damaged.
- If the intuitive parking assist indicator light remains on without a beep sounds.

CAUTION

■ **Caution when using the Intuitive parking assist-sensor**

Observe the following precautions.
Failure to do so may result in the vehicle being unable to be driven safely and possibly cause an accident.

- Do not use the sensor at speeds in excess of 6 mph (10 km/h).
- Do not attach any accessories within the sensor range.


NOTICE

■ **Notes when washing the vehicle**

Do not apply intensive bursts of water or steam to the sensor area.
Doing so may result in the sensor malfunctioning.

Rear view monitor system*

The rear view monitor system assists the driver by displaying an image of the area behind the vehicle while reversing. The image is displayed in reverse on the screen. This reversed image is a similar image to the one on the inside rear view mirror.

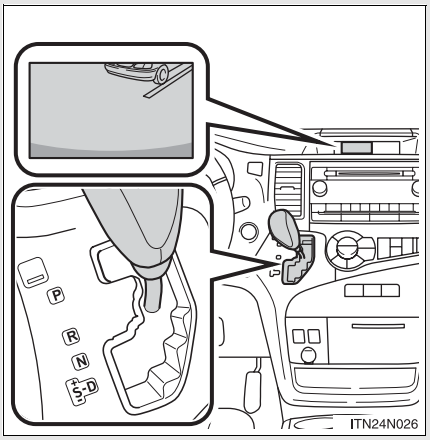



The rear view image is displayed when the shift lever is in the R position.

If the shift lever is shifted out of R, the screen returns to the previous one.

*: If equipped

Displayed area






The area covered by the camera is limited. Objects that are close to either corner of the bumper or under the bumper cannot be seen on the screen.

The area displayed on the screen may vary depending on vehicle orientation or road conditions.


Rear view monitor system camera



In the following cases, it may be difficult to see the images on the screen, even when the system is functioning correctly.

- The vehicle is in a dark area, such as at night.
- The temperature near the lens is extremely high or low.
- Water droplets are on the camera lens or humidity is high, such as when it rains.
- Foreign matter, such as snow and mud, adheres to the camera lens.
- The sun or headlights are shining directly into the camera lens.
- When the camera is used under fluorescent lights, sodium lights, mercury lights etc., the lights and the illuminated areas may appear to flicker.
- If the lens is scratched.


Smear effect




If a bright light, such as sunlight reflected off the vehicle body, is picked up by the camera, a smear effect* characteristic to the camera may occur.

*: Smear effect – A phenomenon that occurs when a bright light is picked up by the camera; when transmitted by the camera, the light source appears to have a vertical streak above and below it.


Driving precautions

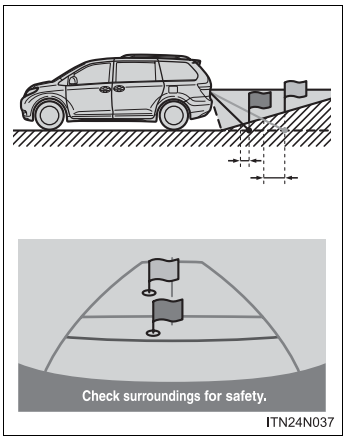

When the grade behind the vehicle slopes up sharply, objects appear to be farther away than they actually are.

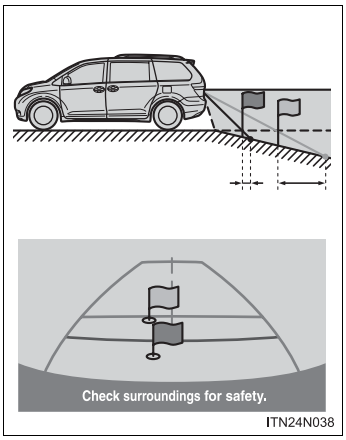

When the grade behind the vehicle slopes down sharply, objects appear to be closer than they actually are.



When any part of the vehicle sags due to the number of passengers or the distribution of the load, there is a margin of error between the guide lines on the screen and the actual distance/course on the road.

■ **Setting the rear view monitor system displays**

Vehicles with navigation system
→“NAVIGATION SYSTEM OWNER’S MANUAL”

Vehicles without navigation system
→P. 259

CAUTION

When using the rear view monitor system

Observe the following precautions to avoid an accident that could result in death or serious injuries:

- Never depend solely on the monitor system when reversing.
- Always check visually and with the mirrors to confirm your intended path is clear.
- Depicted distances between objects and flat surfaces differ from actual distances.
- Do not use the system if the back door is open.

Conditions which may affect the rear view monitor system

- If the back of the vehicle has been hit, the camera's position and mounting angle may have changed. Have the vehicle inspected by your Toyota dealer.
- Rapid temperature changes, such as when hot water is poured on the vehicle in cold weather, may cause the system to function abnormally.
- If the camera lens is dirty, it cannot transmit a clear image. Rinse with water and wipe with a soft cloth. If the camera lens is extremely dirty, wash with a mild cleanser and rinse.
- The displayed image may be darker and moving images may be slightly distorted when the system is cold.
- When washing the vehicle, do not apply intensive bursts of water to the camera or camera area. Doing so may result in the camera malfunction.
- Do not scrub the lens strongly or polish the lens using stiff brushes or abrasive cleansers. Doing so could scratch the lens and affect the image.
- Do not allow organic solvent, car wax, window cleaner or glass coat to adhere to the camera. If this happens, wipe it off as soon as possible.

Driving assist systems

To help enhance driving safety and performance, the following systems operate automatically in response to various driving situations. Be aware, however, that these systems are supplementary and should not be relied upon too heavily when operating the vehicle.

ABS (Anti-lock Brake System)

Helps to prevent wheel lock when the brakes are applied suddenly, or if the brakes are applied while driving on a slippery road surface

Brake assist

Generates an increased level of braking force after the brake pedal is depressed, when the system detects a panic stop situation

VSC (Vehicle Stability Control)

Helps the driver to control skidding when swerving suddenly or turning on slippery road surfaces

Enhanced VSC (Enhanced Vehicle Stability Control)

Provides cooperative control of the ABS, TRAC, VSC and EPS.
Helps to maintain directional stability when swerving on slippery road surfaces by controlling steering performance.

TRAC (Traction Control)

Helps to maintain drive power and prevent the drive wheels from spinning when starting the vehicle or accelerating on slippery roads

Hill-start assist control (if equipped)

→P. 333

EPS (Electric Power Steering)

Employs an electric motor to reduce the amount of effort needed to turn the steering wheel

■ **Active Torque Control 4WD (AWD models only)**

Automatically switches from front-wheel drive to AWD (All-Wheel Drive) according to driving conditions, helping to ensure reliable handling and stability. Examples of conditions where the system will switch to AWD are when cornering, going uphill, starting off or accelerating, and when the road surface is slippery due to snow or rain etc.


■ **VDIM (Vehicle Dynamics Integrated Management) (if equipped)**

Provides integrated control of the ABS, brake assist, TRAC, VSC, hill-start assist control, and EPS systems
Helps to maintain vehicle stability when swerving on slippery road surfaces by controlling the brakes and engine output

■ **PCS (Pre-Collision System) (if equipped)**

→P. 336

When the Enhanced VSC/TRAC systems are operating

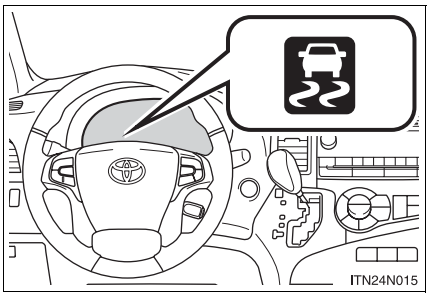


If the vehicle is in danger of slipping or if any of the drive wheels spins, the slip indicator light flashes to indicate that the Enhanced VSC/TRAC systems are operating.

A buzzer (intermittent) sounds to indicate that VSC is operating.

Disabling TRAC and VSC system

If the vehicle gets stuck in fresh snow or mud, TRAC and VSC may reduce power from the engine to the wheels. You may need to turn the system off to enable you to rock the vehicle in order to free it.

■ Turning off the TRAC system only

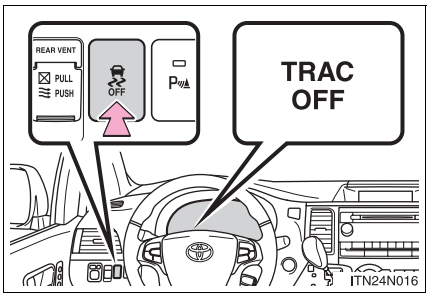


To turn the TRAC system off, quickly press and release the button.

The “TRAC OFF” indicator light will come on.

Push the button again to turn the system back on.

■ Turning off both TRAC and VSC systems

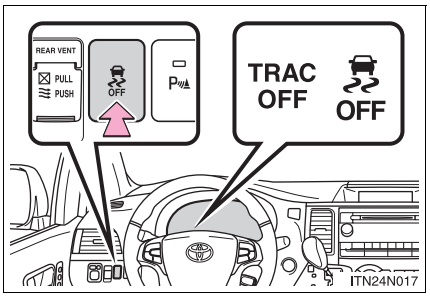

To turn the TRAC and VSC systems off, press and hold the button for more than 3 seconds while the vehicle is stopped.

The “TRAC OFF” indicator light and VSC OFF indicator light will come on.

Press the button again to turn the systems back on.

■ **When the “TRAC OFF” indicator light comes on even if the VSC OFF switch has not been pressed**

TRAC and hill-start assist control cannot be operated. Contact your Toyota dealer.

■ **Sounds and vibrations caused by ABS, brake assist, Enhanced VSC and TRAC**

- A sound may be heard from the engine compartment when the engine is started or just after the vehicle begins to move. This sound does not indicate that a malfunction has occurred in any of these systems.
- Any of the following conditions may occur when the above systems are operating. None of these indicates that a malfunction has occurred.
  - Vibrations may be felt through the vehicle body and steering.
  - A motor sound may be heard after the vehicle comes to a stop.
  - The brake pedal may pulsate slightly after ABS is activated.
  - The brake pedal may move down slightly after ABS is activated.

■ **EPS operation sound**

When the steering wheel is operated, a motor sound (whirring sound) may be heard. This does not indicate a malfunction.

■ **Reactivation of the TRAC and VSC systems after turning off the engine**

Turning off the engine after turning off the TRAC and VSC systems will automatically reactivate them.

■ **Reactivation of the TRAC system linked to vehicle speed**

When only the TRAC system is turned off, the TRAC system will turn on when vehicle speed increases. However, when both TRAC and VSC systems are turned off, the systems will not turn on even when vehicle speed increases.

Reduced effectiveness of the EPS system

The effectiveness of the EPS system is reduced to prevent the system from overheating when there is frequent steering input over an extended period of time. The steering wheel may feel heavy as a result. Should this occur, refrain from excessive steering input or stop the vehicle and turn the engine off. The EPS system should return to normal within 10 minutes.

CAUTION

ABS does not operate effectively when

- Tires with inadequate gripping ability are used (such as excessively worn tires on a snow covered road).
- The vehicle hydroplanes while driving at high speed on wet or slick roads.

Stopping distance when ABS is operating may exceed that of normal conditions

The ABS is not designed to shorten the vehicle's stopping distance. Always maintain a safe distance from the vehicle in front of you in the following situations.

- When driving on dirt, gravel or snow-covered roads
- When driving with tire chains
- When driving over bumps in the road
- When driving over roads with potholes or roads with uneven surfaces

TRAC may not operate effectively when

Directional control and power may not be achievable while driving on slippery road surfaces, even if the TRAC system is operating.
Do not drive the vehicle in conditions where stability and power may be lost.

CAUTION

■ **When Enhanced VSC is activated**

The slip indicator light flashes and a warning buzzer sounds. Always drive carefully. Reckless driving may cause an accident. Exercise particular care when the indicator light flashes and a buzzer sounds.

■ **When TRAC and VSC systems are turned off**

Be especially careful and drive at a speed appropriate to the road conditions. As these are the systems to ensure vehicle stability and driving force, do not turn the TRAC and VSC systems off unless necessary.

■ **Replacing tires**

Make sure that all tires are of the specified size and of the same brand, tread pattern and total load capacity. In addition, make sure that the tires are inflated to the recommended tire pressure level.

The ABS and Enhanced VSC systems will not function correctly if different tires are installed on the vehicle.

Contact your Toyota dealer for further information when replacing tires or wheels.

■ **Handling of tires and suspension**


Using tires with any kind of problem or modifying the suspension will affect the driving assist systems, and may cause the system to malfunction.

■ **Active Torque Control 4WD system**

- The AWD system of this vehicle is intended to ensure driving stability on normal roads. It is not designed for use in demanding situations such as rally driving.
- Take care when driving on slippery road surfaces.

Hill-start assist control*

Hill-start assist control helps to prevent the vehicle from rolling backwards when starting on an incline or slippery slope.

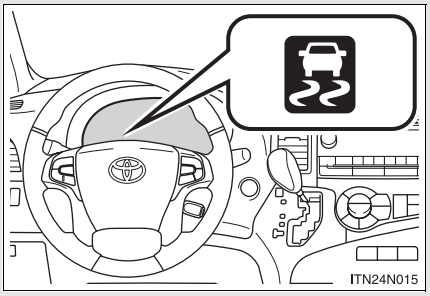

To engage hill-start assist control, further depress the brake pedal when the vehicle is stopped completely.

A buzzer will sound once to indicate that the system is activated. The slip indicator will also start flashing.

*: If equipped

■ **Hill-start assist control can be operated when**

- The shift lever is in a position other than P.
- The parking brake is not applied.
- The accelerator pedal is not depressed.

■ **Hill-start assist control**

- While hill-start assist control is operating, the brakes remain automatically applied after the driver releases the brake pedal. The stop lights and the high mounted stoplight turn on.
- Hill-start assist control operates for about 2 seconds after the brake pedal is released.
- If the slip indicator does not flash and the buzzer does not sound when the brake pedal is further depressed, slightly reduce the pressure on the brake pedal (do not allow the vehicle to roll backward) and then firmly depress it again. If the system still does not operate, check if the operating conditions explained above have been met.

■ **Hill-start assist control buzzer**

- When hill-start assist control is activated, the buzzer will sound once.
- In the following situations, hill-start assist control will be canceled and the buzzer will sound twice.
  - No attempt is made to drive the vehicle within approximately 2 seconds of releasing the brake pedal.
  - The shift lever is moved to P.
  - The parking brake is applied.
  - The brake pedal is depressed again.
  - The brake pedal has been depressed for more than approximately 3 minutes.

■ **If the slip indicator comes on...**

It may indicate a malfunction in the system. Contact your Toyota dealer.

CAUTION

■ **Hill-start assist control**

- Do not overly rely on hill-start assist control. Hill-start assist control may not operate effectively on extremely steep inclines or roads covered in ice.
- Unlike the parking brake, hill-start assist control is not intended to hold the vehicle stationary for an extended period of time. Do not attempt to use hill-start assist control to hold the vehicle on an incline for an extended period of time, as doing so may lead to an accident.

PCS (Pre-Collision System)*

When the radar sensor detects that a frontal collision is highly likely or even unavoidable, the systems such as the brakes and seat belts are automatically engaged to lessen impact to occupants as well as vehicle damage.

■ **Pre-collision seat belts (front seat belts only)**

If the pre-collision sensor detects that a collision is unavoidable, the pre-collision system will retract the seat belt before the collision occurs. The same will happen if the driver makes an emergency braking or loses control of the vehicle. (→P. 131)
However, when the VSC system is disabled, the system will not operate in the event of skidding.

■ **Pre-collision brake assist**


When there is a high possibility of a frontal collision, the system applies greater braking force in relation to how strongly the brake pedal is depressed.

■ **Pre-collision braking**

When there is a high possibility of a frontal collision, the system warns the driver using a warning light and buzzer. If the system determines that a collision is unavoidable, the brakes are automatically applied to reduce the collision speed. Pre-collision braking can be disabled using the pre-collision braking off switch.

*: If equipped

Disabling pre-collision braking

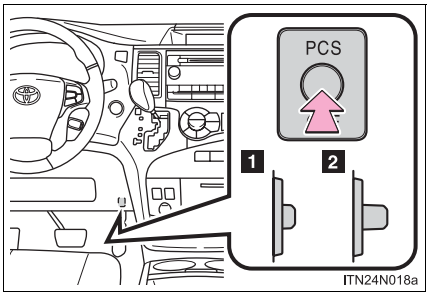


1 Pre-collision braking disabled

2 Pre-collision braking enabled

The “PCS” warning light flashes when pre-collision braking is disabled.

Radar sensor

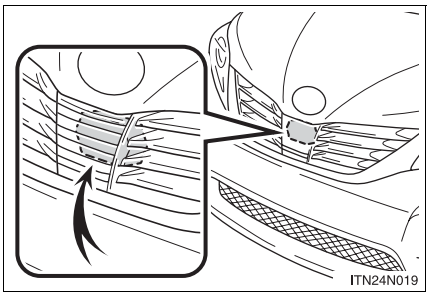

The radar sensor detects vehicles or other obstacles on or near the road ahead and determines whether a collision is imminent based on the position, speed, and heading of the obstacles.

■ **The pre-collision system is operational when**

● Pre-collision seat belts (type A):

- Vehicle speed is greater than about 4 mph (5 km/h).
- The speed at which your vehicle is approaching the obstacle or oncoming vehicle is greater than about 19 mph (30 km/h).
- The front occupants are wearing a seat belt.

● Pre-collision seat belts (type B):

- Vehicle speed greater than about 19 mph (30 km/h).
- The system detects sudden braking or skidding.
- The front occupants are wearing a seat belt.

● Pre-collision brake assist:

- Vehicle speed is greater than about 19 mph (30 km/h).
- The speed at which your vehicle is approaching the obstacle or the vehicle running ahead of you is greater than about 19 mph (30 km/h).
- The brake pedal is depressed.

● Pre-collision braking:

- The pre-collision braking off switch is not pressed.
- Vehicle speed is greater than about 10 mph (15 km/h).
- The speed at which your vehicle is approaching the obstacle or the vehicle running ahead of you is greater than about 10 mph (15 km/h).

■ **Conditions that may trigger the system even if there is no possibility of a collision**

- When there is an object by the roadside at the entrance to a curve
- When passing an oncoming vehicle on a curve
- When driving over a narrow iron bridge
- When there is a metal object on the road surface
- When driving on an uneven road surface
- When passing an oncoming vehicle on a left-turn
- When your vehicle rapidly closes on the vehicle in front
- When a grade separation/interchange, sign, billboard, or other structure appears to be directly in the vehicle's line of travel
- When climbing a steep hill causes an overhead billboard or other metallic structure to appear directly in the vehicle's line of travel
- When there is an overhead bridge, sign or billboard ahead
- When there are excessive changes in the vehicle height (when it tilts forwards or backwards)
- When there is an abnormality in the radar sensor
- When an overhead metal object can be seen at the top of an uphill road
- When passing through an electronic toll collection gate (only in countries with electronic toll collection)

When the system is activated in the situations described above, there is also a possibility that the seat belts will retract quickly and the brakes will be applied with a force greater than normal. When the seat belt is locked in the restricted position, stop the vehicle in a safe place, release the seat belt and refasten it.

■ **Obstacles not detected**

The sensor cannot detect plastic obstacles such as traffic cones. There may also be occasions when the radar sensor cannot detect pedestrians, animals, bicycles, motorcycles, trees, or snowdrifts.

■ **When there is a malfunction in the system**

Warning lights will turn on or flash. (→P. 729)

■ **Certification**

U.S.A.

FCC ID: HYQDNMWR005

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Radiofrequency radiation exposure Information:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance of 20 cm between the radiator (antenna) and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Canada

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

CAUTION

■ **Limitations of the pre-collision system**

Do not overly rely on the pre-collision system. Always drive safely, taking care to observe your surroundings and checking for any obstacles or other road hazards.

■ **Cautions regarding the assist contents of the system**

By means of alarms and brake control, the pre-collision system is intended to assist the driver in avoiding collisions through the process of LOOK-JUDGE-ACT.
There are limits to the degree of assistance the system can provide, so please keep in mind the following important points.

- Assisting the driver in watching the road
  The pre-collision system is only able to detect obstacles directly in front of the vehicle, and only within a limited range. It is not a mechanism that allows careless or inattentive driving, and it is not a system that can assist the driver in low-visibility conditions. It is still necessary for the driver to pay close attention to the vehicle's surroundings.
- Assisting the driver in making correct judgment
  When attempting to estimate the likelihood of a collision, the only data available to the pre-collision system is that from obstacles it has detected directly in front of the vehicle. Therefore, it is absolutely necessary for the driver to remain vigilant and to determine whether or not there is a possibility of collision in any given situation.
- Assisting the driver in taking action
  The pre-collision system's braking assist feature is designed to help reduce the severity of a collision, and so only acts when the system has judged that a collision is unavoidable. This system by itself is not capable of automatically avoiding a collision or bringing the vehicle to a stop safety. For this reason, when encountering a dangerous situation the driver must take direct and immediate action in order to ensure the safety of all involved.

CAUTION

Handling the radar sensor

Observe the following to ensure the pre-collision system can function effectively:

- Keep the sensor and front grille clean at all times.
  Clean the sensor and front grille with a soft cloth so you do not mark or damage them.
- Do not subject the sensor or surrounding area to a strong impact.
  If the sensor moves even slightly off position, the system may malfunction. If the sensor or surrounding area is subject to a strong impact, always have the area inspected and adjusted by your Toyota dealer.
- Do not disassemble the sensor.
- Do not attach accessories or stickers to the sensor, grille or surrounding area.
- Do not modify or paint the sensor and grille cover.

Cargo and luggage

Take notice of the following information about storage precautions, cargo capacity and load:

- Stow cargo and luggage in the luggage compartment whenever possible.
- Be sure all items are secured in place.
- To maintain vehicle balance while driving, position luggage evenly within the luggage compartment.
- For better fuel economy, do not carry unnecessary weight.

Capacity and distribution

Cargo capacity depends on the total weight of the occupants.

(Cargo capacity) = (Total load capacity) - (Total weight of occupants)

Steps for Determining Correct Load Limit —

(1) Locate the statement “The combined weight of occupants and cargo should never exceed XXX kg or XXX lbs.” on your vehicle’s placard.

(2) Determine the combined weight of the driver and passengers that will be riding in your vehicle.

(3) Subtract the combined weight of the driver and passengers from XXX kg or XXX lbs.


(4) The resulting figure equals the available amount of cargo and luggage load capacity.

For example, if the “XXX” amount equals 1400 lbs. and there will be five 150 lb passengers in your vehicle, the amount of available cargo and luggage load capacity is 650 lbs. (1400 - 750 (5 × 150) = 650 lbs.)

(5) Determine the combined weight of luggage and cargo being loaded on the vehicle. That weight may not safely exceed the available cargo and luggage load capacity calculated in Step 4.

(6) If your vehicle will be towing a trailer, load from your trailer will be transferred to your vehicle. Consult this manual to determine how this reduces the available cargo and luggage load capacity of your vehicle. (→P. 784)

Example based on your vehicle

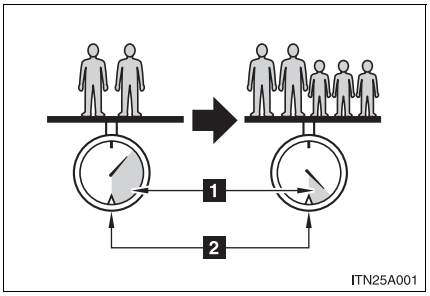

1 Cargo capacity
2 Total load capacity

When 2 people with the combined weight of 366 lb. (166 kg) are riding in your vehicle, which has a total load capacity of 1660 lb. (750 kg)*, the available amount of cargo and luggage load capacity will be as follows:

1660 lb. - 366 lb. = 1294 lb. (750 kg - 166 kg = 584 kg)

In this condition, if 3 more passengers with the combined weight of 388 lb. (176 kg) get on, the available cargo and luggage load will be reduced as follows:


1294 lb. - 388 lb. = 906 lb. (584 kg - 176 kg = 408 kg)

*: The capacity weight varies depending on the vehicle model. (→P. 784)

As shown in the example above, if the number of occupants increases, the cargo and luggage load will be reduced by an amount that equals the increased weight due to the additional occupants. In other words, if an increase in the number of occupants causes an excess of the total load capacity (combined weight of occupants plus cargo and luggage load), you must reduce the cargo and luggage on your vehicle.


Roof luggage carrier (if equipped)

■ Roof luggage carrier components

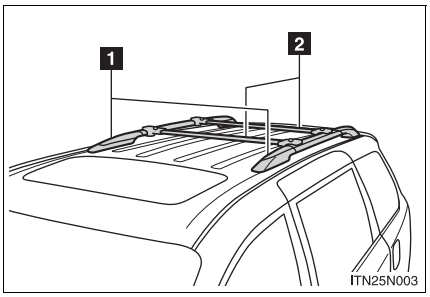


1 Roof rails
2 Cross rails

■ Adjusting the position of cross rails

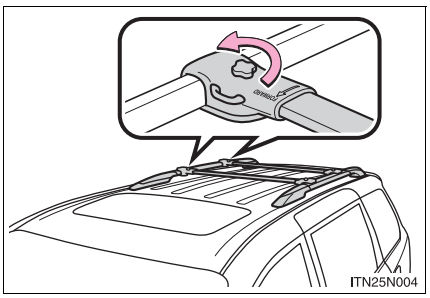


Turn the knobs counterclockwise to release the cross rails.

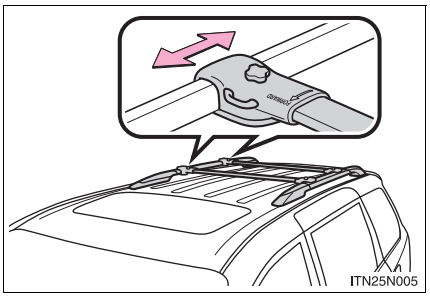

Slide the cross rails to the appropriate position for loading luggage and turn the knobs clockwise to tighten the cross rails securely.

Seating configuration variation

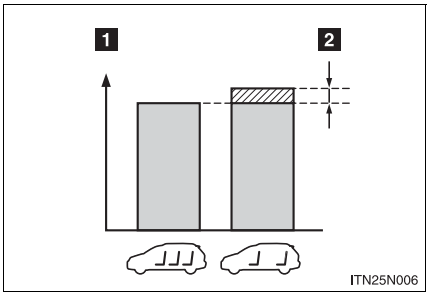

1 Cargo capacity
2 Weight of the removed second seat

If removing the second seats, it is possible to load extra cargo equal to the weight of the removed seats.

(Cargo capacity) = (Total load capacity) - (Total weight of occupants) + (Weight of the removed second seats)

Second seats weight:

7-passenger models

Tip-up seat, fabric: 45 lb. (21 kg)
Tip-up seat, leather: 47 lb. (22 kg)
Ottoman seat: 83 lb. (37 kg)

8-passenger models

Right side, fabric: 45 lb. (21 kg)
Right side, leather: 47 lb. (22 kg)
Left side, fabric: 80 lb. (36 kg)
Left side, leather: 83 lb. (37 kg)

CAUTION

■ **Things that must not be carried in the luggage compartment**

The following things may cause a fire if loaded in the luggage compartment:

- Receptacles containing gasoline
- Aerosol cans

■ **Storage precautions**

Observe the following precautions.
Failing to do so may result in death or serious injury.

- Stow cargo and luggage in the luggage compartment whenever possible.
- Do not stack anything in the luggage compartment higher than the seatbacks. Such items may be thrown about and possibly injure people in the vehicle in the event of sudden braking or in an accident.
- Do not place cargo or luggage in or on the following locations as the item may get under the brake or accelerator pedal and prevent the pedals from being depressed properly, block the driver's vision, or hit the driver or passengers, causing an accident.
  - Driver's feet
  - Front passenger or rear seats (when stacking items)
  - Instrument panel
  - Dashboard
  - Auxiliary box or tray that has no lid

⚠ CAUTION

■ **Storage precautions**

- Secure all items in the occupant compartment, as they may shift and injure someone during sudden braking, sudden swerving or an accident.
- When you fold down the rear seats, long items should not be place directly behind the front seats.
- Never allow anyone to ride in the luggage compartment. It is not designed for passengers. They should ride in their seats with their seat belts properly fastened. Otherwise, they are much more likely to suffer death or serious bodily injury, in the event of sudden braking, sudden swerving or an accident.

■ **Capacity and distribution**

- Do not exceed the maximum axle weight rating or the total vehicle weight rating.
- Even if the total load of occupant's weight and the cargo load is less than the total load capacity, do not apply the load unevenly.
  Improper loading may cause deterioration of steering or braking control which may cause death or serious injury.

■ **Cross rail adjustment**

Make sure the cross rails are locked securely by pushing forward and rearward them.
Failure to do so may cause an unexpected accident.

CAUTION

■ **When loading cargo**

Observe the following precautions:

- Place the cargo so that its weight is distributed evenly between the front and rear axles.
- If loading long or wide cargo, never exceed the vehicle overall length or width. (→P. 784)
- Before driving, make sure the cargo is securely fastened on the roof luggage carrier.
- Loading cargo on the roof luggage carrier will make the center of gravity of the vehicle higher. Avoid high speeds, sudden starts, sharp turns, sudden braking or abrupt maneuvers, otherwise it may result in loss of control or vehicle rollover due to failure to operate this vehicle correctly and result in death or serious injury.
- If driving for a long distance, on rough roads, or at high speeds, stop the vehicle now and then during the trip to make sure the cargo remains in its place.
- Do not exceed 150 lb. (68 kg) cargo weight on the roof luggage carrier.

NOTICE

■ **When loading cargo (vehicles with moon roof)**

Be careful not to scratch the surface of the moon roof.

Vehicle load limits

Vehicle load limits include total load capacity, seating capacity, TWR (Trailer Weight Rating) and cargo capacity.

■ **Total load capacity: (→P. 784)**

Total load capacity means the combined weight of occupants, cargo and luggage.

■ **Seating capacity: 7 or 8 occupants (Front 2, Rear 5 or 6)**

Seating capacity means the maximum number of occupants whose estimated average weight is 150 lb. (68 kg) per person.

■ **TWR (Trailer Weight Rating): 3500 lb. (1588 kg)**

TWR means the maximum gross trailer weight (trailer weight plus its cargo weight) that your vehicle is able to tow.

■ **Cargo capacity**

Cargo capacity may increase or decrease depending on the weight and the number of occupants.

■ **Total load capacity and seating capacity**

These details are also described on the tire and loading information label. (→P. 683)

⚠ CAUTION

■ **Overloading the vehicle**

Observe the total load capacity when you load the vehicle. (→P. 784) Otherwise, it may not only cause damage to the tires, but also degrade steering and braking ability, resulting in an accident.

Winter driving tips

Carry out the necessary preparations and inspections before driving the vehicle in winter. Always drive the vehicle in a manner appropriate to the prevailing weather conditions.

Pre-winter preparations

- Use fluids that are appropriate to the prevailing outside temperatures.
  - Engine oil
  - Engine coolant
  - Washer fluid
- Have a service technician inspect the level and specific gravity of battery electrolyte.
- Have the vehicle fitted with four snow tires or purchase a set of tire chains for the front tires.

  Ensure that all tires are the same size and brand, and that chains match the size of the tires.

Before driving the vehicle

Perform the following according to the driving conditions:

- Do not try to forcibly open a window or move a wiper that is frozen. Pour warm water over the frozen area to melt the ice. Wipe away the water immediately to prevent it from freezing.
- To ensure proper operation of the climate control system fan, remove any snow that has accumulated on the air inlet vents in front of the windshield.
- Remove any ice that has accumulated on the vehicle chassis.
- Periodically check for and remove any excess ice or snow that may have accumulated in the wheel well or on the brakes.

■ **When driving the vehicle**

Accelerate the vehicle slowly and drive at a reduced speed suitable to road conditions.

■ **When parking the vehicle**

Park the vehicle and move the shift lever to P without setting the parking brake. The parking brake may freeze up, preventing it from being released. If necessary, block the wheels to prevent inadvertent sliding or creeping.

Selecting tire chains

Use the tire chains of correct size and type.

Use SAE Class “S” type radial tire chains, with the exception of radial cable chains or V-bar type chains.

Regulations on the use of tire chains

Regulations regarding the use of tire chains vary depending on location and type of road. Always check local regulations before installing chains.

■ **Tire chain installation**

Observe the following precautions when installing and removing chains.

- Install and remove tire chains in a safe location.
- Install tire chains on the front tires only. Do not install tire chains on the rear tires.
- Install tire chains on front tires as tightly as possible. Retighten chains after driving 1/4 - 1/2 mile (0.5 - 1.0 km).
- Install tire chains following the instructions provided with the tire chains.

⚠ CAUTION

■ **Driving with snow tires**

Observe the following precautions to reduce the risk of accidents.
Failing to do so may result in a loss of vehicle control and cause death or serious injury.

- Use tires of the size specified.
- Maintain the recommended level of air pressure.
- Do not drive in excess of 75 mph (120 km/h), regardless of the type of snow tires being used.
- Use snow tires on all, not just some wheels.

⚠ CAUTION

■ Driving with tire chains

Observe the following precautions to reduce the risk of accidents.
Failing to do so may result in the vehicle being unable to be driven safely, and may cause death or serious injury.

- Do not drive in excess of the speed limit specified for the tire chains being used or 30 mph (50 km/h), whichever is lower.
- Avoid driving on bumpy road surfaces or over potholes.
- Avoid sudden turns and braking, as use of chains may adversely affect vehicle handling.
- Slow down sufficiently before entering a curve to ensure that vehicle control is maintained.

⚠ NOTICE

■ Repairing or replacing snow tires

Request repairs of or replacement of snow tires from Toyota dealers or legitimate tire retailers.
This is because the removal and attachment of snow tires affects the operation of the tire pressure warning valves and transmitters.

■ Fitting tire chains

The tire pressure warning valves and transmitters may not function correctly when tire chains are fitted.

Trailer towing (with towing package)

Your vehicle is designed primarily as a passenger-and-load-carrying vehicle. Towing a trailer can have an adverse impact on handling, performance, braking, durability, and fuel consumption. For your safety and the safety of others, you must not overload your vehicle or trailer. You must also ensure that you are using appropriate towing equipment, that the towing equipment has been installed correctly and used properly, and that you employ the requisite driving habits.

Vehicle-trailer stability and braking performance are affected by trailer stability, brake performance and setting, trailer brakes, the hitch and hitch systems (if equipped).


To tow a trailer safely, use extreme care and drive the vehicle in accordance with your trailer's characteristics and operating conditions.

Toyota warranties do not apply to damage or malfunction caused by towing a trailer for commercial purposes.

Contact your Toyota dealer for further information about additional requirements such as a towing kit, etc.


Towing related terms

■ GCWR (Gross Combination Weight Rating)

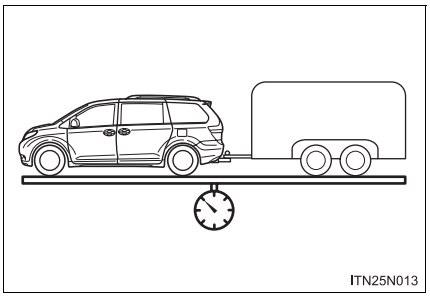


The maximum allowable gross combination weight. The gross combination weight is the sum of the total vehicle weight (including the occupants, cargo and any optional equipment installed on the vehicle) and the weight of the trailer being towed (including the cargo in the trailer).

■ GVWR (Gross Vehicle Weight Rating)

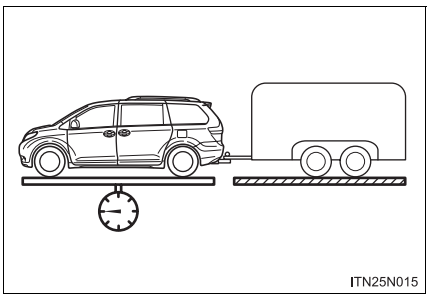


The maximum allowable gross vehicle weight. The gross vehicle weight is the total weight of the vehicle. When towing a trailer, it is the sum of the vehicle weight (including the occupants, cargo and any optional equipment installed on the vehicle) and the tongue weight.

■ GAWR (Gross Axle Weight Rating)

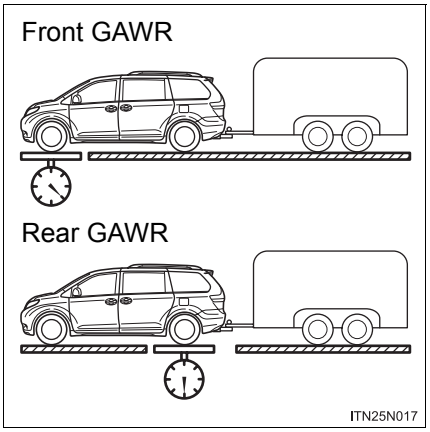

The maximum allowable gross axle weight. The gross axle weight is the load placed on each axle (front and rear).

■ TWR (Trailer Weight Rating)

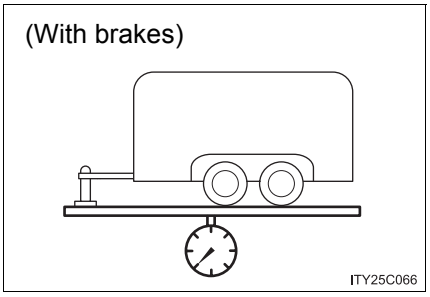


The maximum allowable gross trailer weight. The gross trailer weight is the sum of the trailer weight and the weight of the cargo in the trailer.

TWR is calculated assuming base vehicle with one driver, one front passenger, towing package (if available), hitch and hitch systems (if required).

Additional optional equipment, passengers and cargo in the vehicle will reduce the trailer weight rating so as not to exceed GCWR, GVWR and GAWR.


If the gross trailer weight exceeds 3000 lb. (1360 kg), it is recommended to use a trailer with 2 or more axles.

■ Unbraked TWR (Unbraked Trailer Weight Rating)

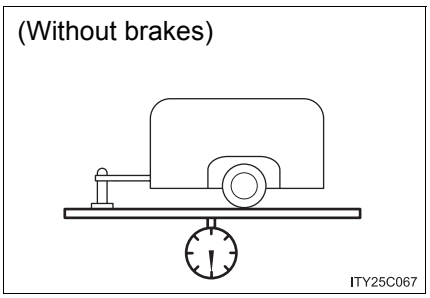

The trailer weight rating for towing a trailer without a trailer service brake system.

■ Tongue Weight

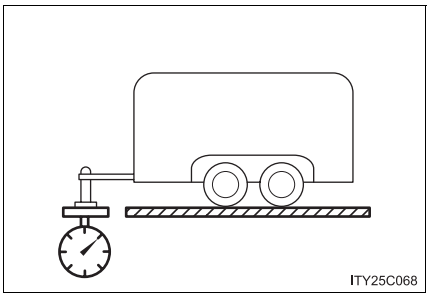


The load placed on the trailer hitch ball. (→P. 362)

Weight limits

- The gross trailer weight must never exceed 3500 lb. (1588 kg).
- The gross combination weight must never exceed the GCWR described below.

  2WD models: 8900 lb. (4037 kg)

  AWD models: 8990 lb. (4078 kg)

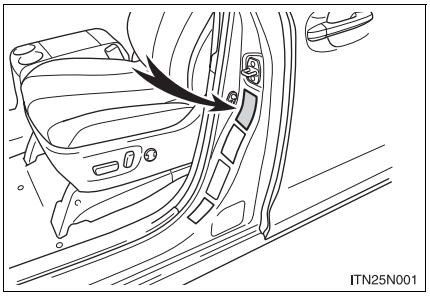

- The gross vehicle weight must never exceed the GVWR indicated on the Certification Label.
- The gross axle weight on each axle must never exceed the GAWR indicated on the Certification Label.
- If the gross trailer weight is over the unbraked TWR, trailer service brakes are required.
- If the gross trailer weight is over 2000 lbs. (907 kg), a sway control device with sufficient capacity is required.

GCWR, TWR and Unbraked TWR

Confirm that the gross trailer weight, gross combination weight, gross vehicle weight, gross axle weight and tongue weight are all within the limits.

■ **GCWR***

2WD models: 8900 lb. (4037 kg)

AWD models: 8990 lb. (4078 kg)

■ **TWR***

3500 lb. (1588 kg)

■ **Unbraked TWR***


1650 lb. (750 kg)

*: These models meet the tow-vehicle trailering requirement of SAE International per SAE J2807.

Trailer Tongue Weight

- A recommended tongue weight varies in accordance with the types of trailers or towing as described below.
- To ensure the recommended values shown below, the trailer must be loaded by referring to the following instructions.
  - Tongue Weight

    The gross trailer weight should be distributed so that the tongue weight is 9 to 11 %.
    (Tongue weight / Gross trailer weight × 100 = 9 to 11 %)

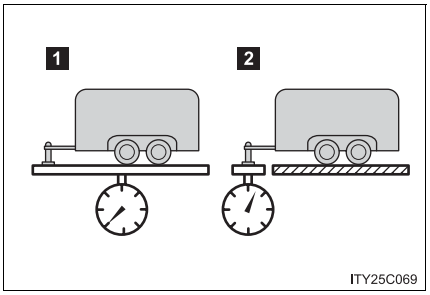

1 Gross trailer weight
2 Tongue weight

If using a weight distributing hitch when towing, return the front axle to the same weight as before the trailer connection.

If front axle weight cannot be measured directly, measure the front fender height above the front axle before connection. Adjust weight distributing hitch torque until front fender is returned to the same height as before connection.

The gross trailer weight, gross axle weight and tongue weight can be measured with platform scales found at a highway weighing station, building supply company, trucking company, junk yard, etc.


Hitch

Trailer hitch assemblies have different weight capacities. Toyota recommends the use of Toyota hitch/bracket for your vehicle. For details, contact your Toyota dealer.

- If you wish to install a trailer hitch, contact your Toyota dealer.
- Use only a hitch that conforms to the gross trailer weight requirement of your vehicle.
- Follow the directions supplied by the hitch manufacturer.
- Lubricate the hitch ball with a light coating of grease.
- Remove the trailer hitch whenever you are not towing a trailer. After removing the hitch, seal any mounting hole in the vehicle body to prevent entry of any substances into the vehicle.

Selecting trailer ball

Use the correct trailer ball for your application.

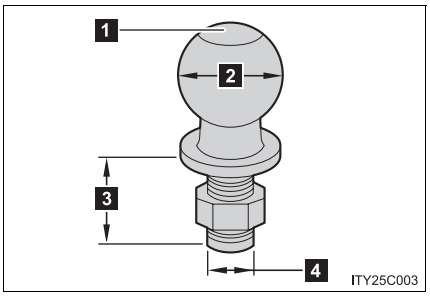

1 Trailer ball load rating

Matches or exceeds the gross trailer weight rating of the trailer.

2 Ball diameter

Matches the size of the trailer coupler. Most couplers are stamped with the required trailer ball size.

Trailer class	Typical trailer ball size
IV	2 5/16 in.
II and III	2 in.
I	1 7/8 in.


3 Shank length

Protrudes beyond the bottom of the lock washer and nut at least 2 threads.

4 Shank diameter

Matches the ball mount hole diameter size.

Positions for towing hitch receiver

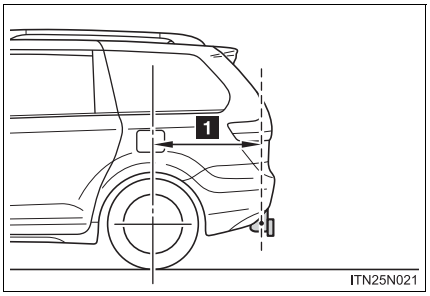

1 Hitch receiver pin hole position: 37.3 in. (949.8 mm)

Connecting trailer lights

Please consult your dealer when installing trailer lights, as incorrect installation may cause damage to the vehicle's lights. Please take care to comply with your state's laws when installing trailer lights.

Trailer towing tips

Your vehicle will handle differently when towing a trailer. Help to avoid an accident, death or serious injury, keep the following in mind when towing:

- Speed limits for towing a trailer vary by state or province. Do not exceed the posted towing speed limit.
- Toyota recommends that the vehicle-trailer speed limit is 65 mph (104 km/h) on a flat, straight, dry road. Do not exceed this limit, the posted towing speed limit or the speed limit for your trailer as set forth in your trailer owner's manual, whichever is lowest. Instability of the towing vehicle-trailer combination (trailer sway) increases as speed increases. Exceeding speed limits may cause loss of control.
- Before starting out, check the trailer lights, tires and the vehicle-trailer connections. Recheck after driving a short distance.
- Practice turning, stopping and reversing with the trailer attached in an area away from traffic until you become accustomed to the feel of the vehicle-trailer combination.

- Reversing with a trailer attached is difficult and requires practice.
  Grip the bottom of the steering wheel and move your hand to the left to move the trailer to the left. Move your hand to the right to move the trailer to the right. (This is generally opposite to reversing without a trailer attached.) Avoid sharp or prolonged turning. Have someone guide you when reversing to reduce the risk of an accident.
- As stopping distance is increased when towing a trailer, vehicle-to-vehicle distance should be increased. For each 10 mph (16 km/h) of speed, allow at least one vehicle and trailer length.
- Avoid sudden braking as you may skid, resulting in the trailer jackknifing and a loss of vehicle control. This is especially true on wet or slippery surfaces.
- Avoid jerky starts or sudden acceleration.
- Avoid jerky steering and sharp turns, and slow down before making a turn.
- Note that when making a turn, the trailer wheels will be closer than the vehicle wheels to the inside of the turn. Compensate by making a wider than normal turning radius.
- Slow down before making a turn, in crosswinds, on wet or slippery surfaces, etc.
  Increasing vehicle speed can destabilize the trailer.

- Take care when passing other vehicles. Passing requires considerable distance. After passing a vehicle, do not forget the length of your trailer, and be sure you have plenty of room before changing lanes.
- To maintain engine braking efficiency and charging system performance when using engine braking, do not put the transmission in D.
  Transmission shift range position must be in 4 in the S mode.
- Instability happens more frequently when descending steep or long downhill grades. Before descending, slow down and downshift. Do not make sudden downshifts while descending steep or long downhill grades.
- Avoid holding the brake pedal down too long or applying the brakes too frequently. This could cause the brakes to overheat and result in reduced braking efficiency.
- Due to the added load of the trailer, your vehicle's engine may overheat on hot days (at temperatures over 85°F [30°C]) when driving up a long or steep grade. If the Engine coolant temperature gauge overheating, immediately turn off the air conditioning (if in use), pull your vehicle off the road and stop in a safe spot.
  (→P. 775)

● Always place wheel blocks under both the vehicle's and the trailer's wheels when parking. Apply the parking brake firmly, and put the transmission in P. Avoid parking on a slope, but if unavoidable, do so only after performing the following:

STEP 1 Apply the brakes and keep them applied.

STEP 2 Have someone place wheel blocks under both the vehicle's and trailer's wheels.

STEP 3 When the wheel blocks are in place, release the brakes slowly until the blocks absorb the load.

STEP 4 Apply the parking brake firmly.

STEP 5 Shift into P and turn off the engine.

● When restarting after parking on a slope:


STEP 1 With the transmission in P, start the engine. Be sure to keep the brake pedal pressed.

STEP 2 Shift into a forward gear. If reversing, shift into R.


STEP 3 Release the parking brake and brake pedal, and slowly pull or back away from the wheel blocks. Stop and apply the brakes.

STEP 4 Have someone retrieve the blocks.

Matching trailer ball height to trailer coupler height



No matter which class of tow hitch applies, for a safe trailer hookup, the trailer ball setup on must be proper height for the coupler on the trailer.



1 Coupler

2 Trailer ball

Before towing

Check that the following conditions are met:

- Ensure that your vehicle's tires are properly inflated. (→P. 794)
- Trailer tires are inflated according to the trailer manufacturer's recommendation.
- All trailer lights work as required by law.
- All lights work each time you connect them.
- The trailer ball is set at the proper height for the coupler on the trailer.
- The vehicle remains level when a loaded or unloaded trailer is hitched. Do not drive if the vehicle is not level, and check for improper tongue weight, overloading, worn suspension, or other possible causes.
- The trailer cargo is securely loaded.
- The rear view mirrors conform to all applicable federal, state/provincial or local regulations. If they do not, install rear view mirrors appropriate for towing purposes.

■ **Break-in schedule**

If your vehicle is new or equipped with any new power train components (such as an engine, transmission, differential or wheel bearing), Toyota recommends that you do not tow a trailer until the vehicle has been driven for over 500 miles (800 km).
After the vehicle has been driven for over 500 miles (800 km), you can start towing. However, for the next 500 miles (800 km), drive the vehicle at a speed of less than 50 mph (80 km/h) when towing a trailer, and avoid full throttle acceleration.

■ **Maintenance**

- If you tow a trailer, your vehicle will require more frequent maintenance due to the additional load. (See “Scheduled Maintenance Guide” or “Owner’s Manual Supplement”.)
- Retighten the fixing bolts of the towing ball and bracket after approximately 600 miles (1000 km) of trailer towing.

If trailer sway occurs

One or more factors (crosswinds, passing vehicles, rough roads, etc.) can adversely affect handling of your vehicle and trailer, causing instability.

● If trailer swaying occurs:

- Firmly grip the steering wheel. Steer straight ahead.
  Do not try to control trailer swaying by turning the steering wheel.
- Begin releasing the accelerator pedal immediately but very gradually to reduce speed.
  Do not increase speed. Do not apply vehicle brakes.

If you make no extreme correction with the steering or brakes, your vehicle and trailer should stabilize.

● After the trailer swaying has stopped:

- Stop in a safe place. Get all occupants out of the vehicle.
- Check the tires of the vehicle and the trailer.
- Check the load in the trailer.
  Make sure the load has not shifted.
  Make sure the tongue weight is appropriate, if possible.
- Check the load in the vehicle.
  Make sure the vehicle is not overloaded after occupants get in.

If you cannot find any problems, the speed at which trailer swaying occurred is beyond the limit of your particular vehicle-trailer combination.
Drive at a lower speed to prevent instability. Remember that swaying of the towing vehicle-trailer increases as speed increases.

CAUTION

Trailer towing precautions

To tow a trailer safely, use extreme care and drive the vehicle in accordance with the trailer's characteristics and operating conditions. Failure to do so could cause an accident resulting in death or serious injury. Vehicle stability and braking performance are affected by trailer stability, brake setting and performance, and the hitch. Your vehicle will handle differently when towing a trailer.

To avoid accident or injury

- Do not exceed the TWR, unbraked TWR, GCWR, GVWR or GAWR.
- If the gross trailer weight is over 2000 lb. (907 kg), a sway control device with sufficient capacity is required.
- Adjust the tongue weight within the appropriate range. Place heavier loads as close to the trailer axle as possible.
- Do not exceed 65 mph (104 km/h), the posted towing speed limit or the speed limit for your trailer as set forth in your trailer owner's manual, whichever is lowest. Slow down sufficiently before making a turn, in cross-winds, on wet or slippery surface, etc. to help avoid an accident. If you experience a vehicle-trailer instability from reducing a certain speed, slow down and make sure you keep your vehicle speed under the speed of which you experience the instability.
- Do not make jerky, abrupt or sharp turns.
- Do not apply the brakes suddenly as you may skid, resulting in jackknifing and loss of vehicle control. This is especially true on wet or slippery surfaces.
- Do not exceed the trailer hitch assembly weight, gross vehicle weight, gross axle weight and trailer tongue weight capacities.

CAUTION

■ **To avoid accident or injury**

- Do not use cruise control when towing.
- Slow down and downshift before descending steep or long downhill grades. Do not make sudden downshifts while descending steep or long downhill grades.
- Vehicle-trailer instability is more likely on steep long downhills. Before descending steep or long downhill grades, slow down and downshift. Do not make sudden downshifts when descending steep or long downhill grades. Avoid holding the brake pedal down too long or applying the brakes too frequently. This could cause the brakes to overheat and result in reduced braking efficiency.
- Do not tow a trailer when the compact spare tire is installed on your vehicle.

■ **Hitch**

Trailer hitch assemblies have different weight capacities established by the hitch manufacturer. Even though the vehicle may be physically capable of towing a higher weight, the operator must determine the maximum weight rating of the particular hitch assembly and never exceed the maximum weight rating specified for the trailer-hitch. Exceeding the maximum weight rating set by the trailer-hitch manufacturer can cause an accident resulting in death or serious personal injuries.

CAUTION

When towing a trailer

Toyota recommends trailers with brakes that conform to any applicable federal and state/provincial regulations.

- If the gross trailer weight exceeds unbraked TWR, trailer brakes are required. Toyota recommends trailers with brakes that conform to all applicable federal and state/provincial regulations.
- Never tap into your vehicle's hydraulic system, as this will lower the vehicle's braking effectiveness.
- Never tow a trailer without using a safety chain securely attached to both the trailer and the vehicle. If damage occurs to the coupling unit or hitch ball, there is danger of the trailer wandering into another lane.

NOTICE

When installing a trailer hitch

Use only the position recommended by your Toyota dealer. Do not install the trailer hitch on the bumper; this may cause body damage.

Do not directly splice trailer lights


Do not directly splice trailer lights. Directly splicing trailer lights may damage your vehicle's electrical system and cause a malfunction.

Dinghy towing

Your vehicle is not designed to be dinghy towed (with 4 wheels on the ground) behind a motor home.


⚠ NOTICE

■ To avoid serious damage to your vehicle




Do not tow your vehicle with four wheels on the ground.

■ To prevent causing serious damage to the transaxle and Active Torque Control 4WD system (AWD models)



2WD models: Never tow this vehicle from the rear with the front wheels on the ground. This may cause serious damage to the transaxle.



AWD models: Never tow this vehicle with any of the wheels on the ground. This may cause serious damage to the transaxle and Active Torque Control 4WD system.

AUTO ACCESS SEAT

If you suspect that the AUTO ACCESS SEAT is malfunctioning, try the correction procedures listed in the table below.
If the seat still does not operate even after trying the procedures, it is likely that the seat is malfunctioning. Do not use the AUTO ACCESS SEAT, and have the seat inspected by your Toyota dealer immediately.

■ **If the AUTO ACCESS SEAT does not move after being moved outside the vehicle**
→P. 47

■ **If you think the wireless remote control is malfunctioning**
→P. 59

If the AUTO ACCESS SEAT does not move

Reason	Correction procedure
The seat belt of the AUTO ACCESS SEAT is buckled.	Unbuckle the seat belt and try operating the AUTO ACCESS SEAT again.
The right-hand sliding door is not opened fully.	Open the right-hand sliding door fully.
The shift lever is in a position other than P.	Shift the shift lever to P.

Reason	Correction procedure
The engine is not running.	Start the engine. If the AUTO ACCESS SEAT is operated while the engine is stopped and the vehicle battery is low, the AUTO ACCESS SEAT may stop during operation.
The switch is being pressed repeatedly.	Push and hold the switch.
The fuse has blown.	Check if the fuse has blown and replace it as necessary.
The vehicle battery has been removed while the AUTO ACCESS SEAT was operating.	Reconnect the battery and refer to P. 47.

If the right-hand sliding door will not close and the beep sounds twice

Reason	Correction procedure
The AUTO ACCESS SEAT has not been locked in place after being stowed.	Press and hold the seat raise switch on the wireless remote control or the raise side of the seat raise/lower switch, and confirm that the AUTO ACCESS SEAT stops automatically and the beep sounds once. Then, try closing the sliding door again.

If the AUTO ACCESS SEAT retreats a little and then stops

Reason	Correction procedure
The AUTO ACCESS SEAT has hit an obstacle, or operation has been otherwise obstructed.	Remove the obstacle and try operating the AUTO ACCESS SEAT again.

If the shift lever cannot be moved from P

Reason	Correction procedure
The AUTO ACCESS SEAT has not been locked in place after being stowed.	Press and hold the seat raise switch on the wireless remote control or the raise side of the seat raise/lower switch, and confirm that the AUTO ACCESS SEAT stops automatically and the beep sounds once. Then, try shifting the shift lever again.

If the seat position or the seatback angle of the AUTO ACCESS SEAT cannot be adjusted

Reason	Correction procedure
An attempt has been made to adjust the AUTO ACCESS SEAT while it is raising, lowering or rotating, or while it is outside the vehicle.	Press and hold the seat raise switch on the wireless remote control or the raise side of the seat raise/lower switch, and confirm that the AUTO ACCESS SEAT stops automatically and the beep sounds once. Then, try adjusting the seat again.

If the AUTO ACCESS SEAT does not move while outside the vehicle

If the AUTO ACCESS SEAT does not move even when the switches are pressed, check and replace the fuses as necessary. (→P. 38)
If the AUTO ACCESS SEAT still does not move even after the fuses have been checked and replaced, have the seat inspected by your Toyota dealer.

If the AUTO ACCESS SEAT stops moving while raising, lowering or rotating, or while it is outside the vehicle, you will not be able to close the right-hand sliding door. Use the techniques outlined here to stow the seat inside the vehicle. If the AUTO ACCESS SEAT is occupied, move the occupant to a safe place before conducting the operation.

Initializing the seat position information


If the AUTO ACCESS SEAT does not move, first initialize the seat position information.

STEP 1 Shift the shift lever to P.

STEP 2 Open the right-hand sliding door fully.

STEP 3 Unbuckle the seat belt if it is buckled.

STEP 4

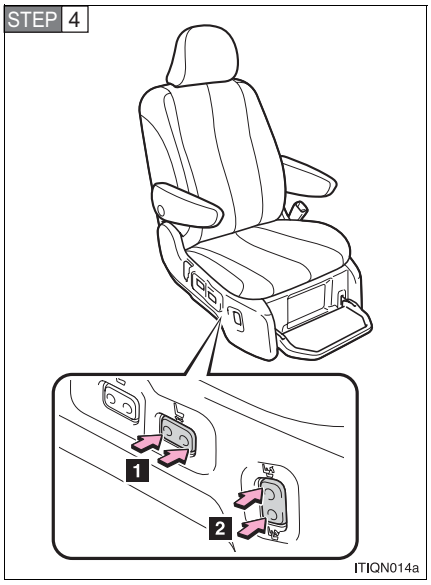

Press and hold the seat position adjustment switch on the right-hand side of the seat in either the front or back direction and, at the same time as press and hold the seat raise/lower switch in either the raise or lower direction for approximately 10 seconds, until the beep sounds.

1 Seat position adjustment switch

2 Seat raise/lower switch

STEP 5 Within 10 seconds after the beep from STEP 4 has sounded (until the next beep starts to sound), press the seat position adjustment switch (1) either forward or back 4 times, and then press the raise or lower side of the seat raise/lower switch (2) 4 times.

The beep sounds twice when initialization of the seat position information has been completed. Conduct the procedures explained in the following “If the AUTO ACCESS SEAT moves when a switch is pressed” section.

If the AUTO ACCESS SEAT moves when a switch is pressed


- Initialize the seat position information before conducting the operations listed here.
- The movements of the seat while conducting these operations will be different from normal.
- If the seat resets while the operations from STEP 4 to STEP 9 are being carried out, a long beep will sound, and the seat's movements will return to normal.

STEP 1 Adjust the head restraint to the downmost position. (→P. 9)


STEP 2 Fold the footrest up. (→P. 13)

STEP 3 Fold the front passenger seatback while pulling the seatback angle lever. (→P. 20)

STEP 4

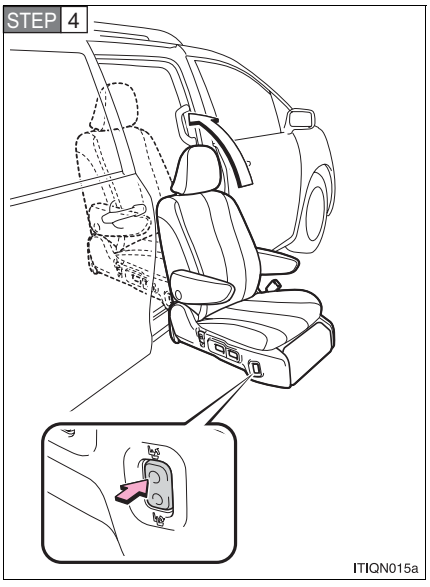


Press and hold the raise side of the seat raise/lower switch while the AUTO ACCESS SEAT raises, a short beep sounds, the seat slides further into the vehicle and a short beep sounds again.

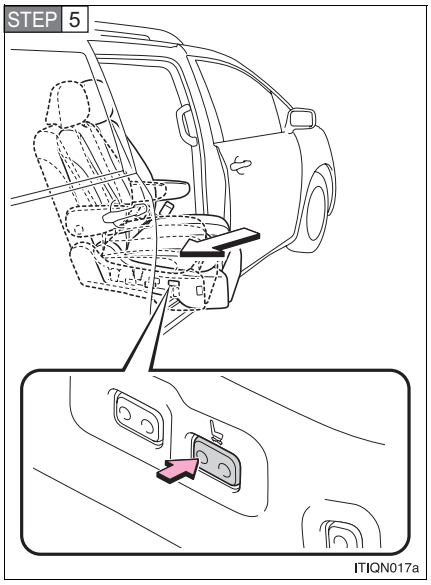

Press the rear side of the seat position adjustment switch on the right-hand side of the seat, and slide the AUTO ACCESS SEAT toward the rear of the vehicle by 2 in. (5 cm).


If the rear side of the seat position adjustment switch is pressed and held while the lower side of the seat raise/lower switch is being pressed, the AUTO ACCESS SEAT will slide towards the front of the vehicle.

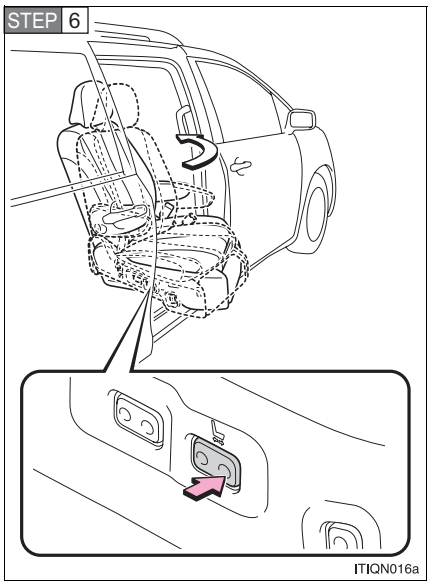

Press the forward side of the seat position adjustment switch on the right-hand side of the seat, and rotate the AUTO ACCESS SEAT toward the inside of the vehicle until the beep sounds.

If the forward side of the seat position adjustment switch is pressed and held while the lower side of the seat raise/lower switch is being pressed, the AUTO ACCESS SEAT will rotate to the outside of the vehicle.


STEP 7

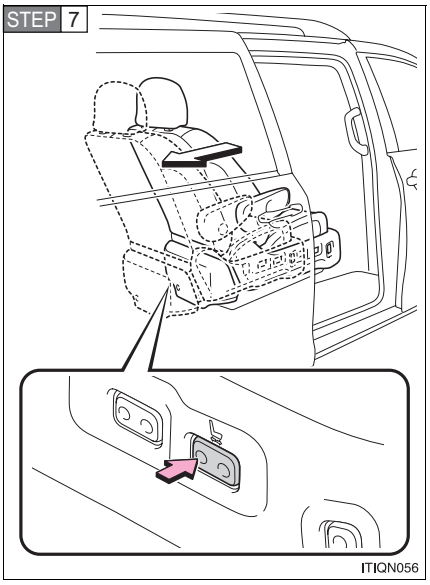

Press the rear side of the seat position adjustment switch on the right-hand side of the seat, and slide the AUTO ACCESS SEAT toward the rear of the vehicle until the beep sounds.


If the rear side of the seat position adjustment switch is pressed and held while the lower side of the seat raise/lower switch is being pressed, the AUTO ACCESS SEAT will slide towards the front of the vehicle.

STEP 8

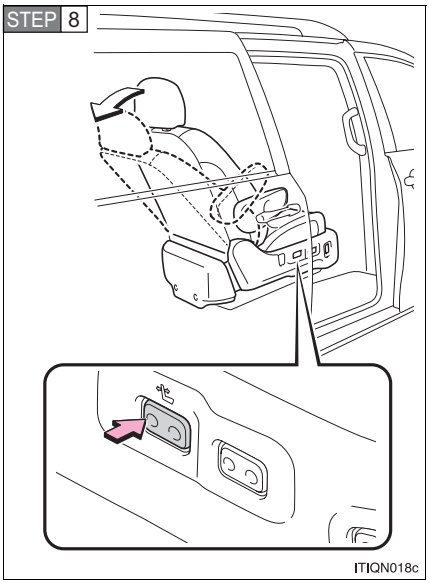

Press and hold the rear side of the seatback angle adjustment switch on the right-hand side of the seat until the seatback automatically stops moving.

If the seatback does not move, proceed to STEP 9.

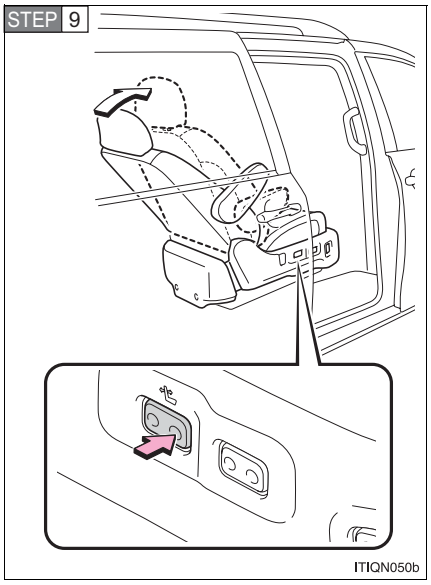

Press and hold the front side of the seatback angle adjustment switch on the right-hand side of the seat until a long beep sounds.

If the AUTO ACCESS SEAT does not move even when a switch is pressed


Before conducting this procedure, conduct the procedures explained in the “Initializing the seat position information” and “If the AUTO ACCESS SEAT moves when a switch is pressed” sections.
If the AUTO ACCESS SEAT still does not return to the vehicle, the following procedure can be used to return the AUTO ACCESS SEAT to the vehicle.

STEP 1 Adjust the head restraint to the downmost position. (→P. 9)

STEP 2 Fold the footrest up. (→P. 13)


STEP 3 Fold the front passenger seatback while pulling the seatback angle lever. (→P. 20)

STEP 4

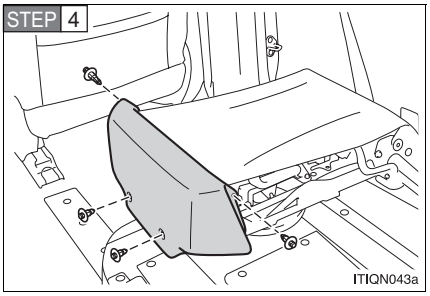


Remove the 4 clips and remove the unit cover. (→P. 57)

STEP 5

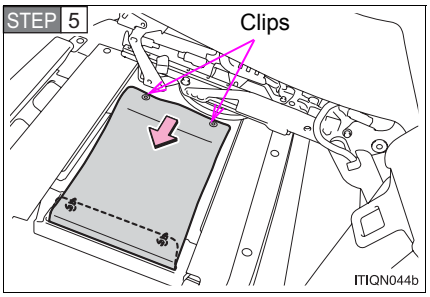

Remove the clips from the unit, and roll back the cover. (→P. 57)

STEP 6

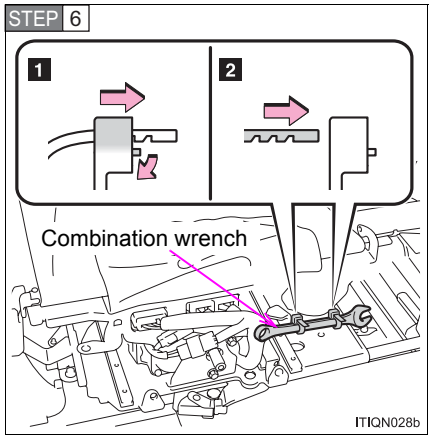


Take out the combination wrench.

1 Removal


2 Replacement

STEP 7

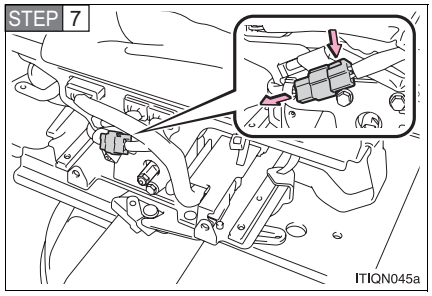


Remove the connector.

STEP 8

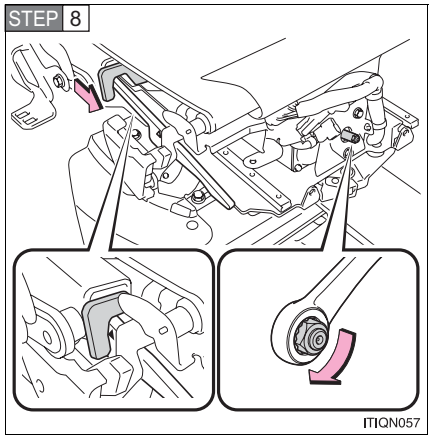


Turn the bolt with yellow marking using the combination wrench, and move the AUTO ACCESS SEAT until the marks are aligned as shown in the illustration.

STEP 9

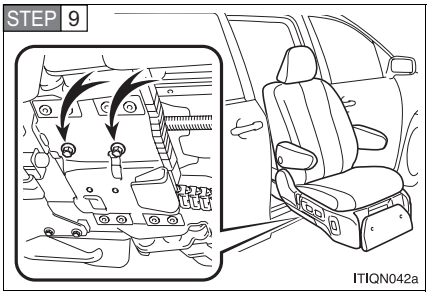


Use the combination wrench to remove the 2 bolts on the underside of the AUTO ACCESS SEAT.

STEP 10

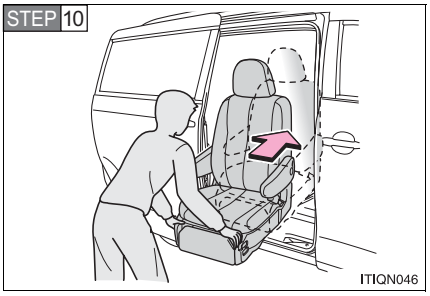


Slide the AUTO ACCESS SEAT into the vehicle.

STEP 11

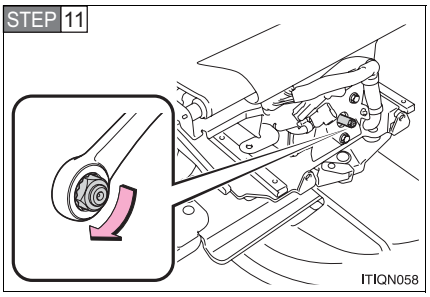


Turn the bolt with yellow marking using the combination wrench, and move the AUTO ACCESS SEAT until the bolt can no longer be turned.

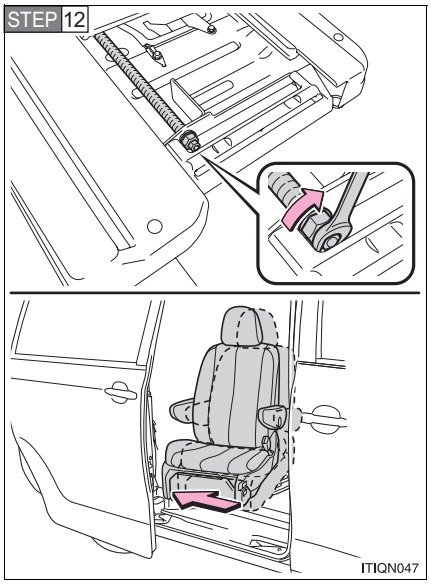


Turn the bolt with yellow marking clockwise using the combination wrench, and slide the seat until the marks are aligned as shown in the illustration.

If you are unable to slide the seat until the marks are aligned because the right edge of the seat cushion interferes with the sliding door, carry out STEP 13 and STEP 14 and slide the seat until the marks are aligned as shown in the illustration.

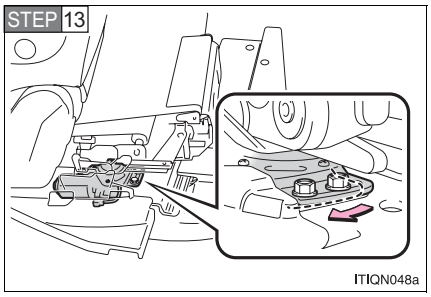

Use the combination wrench to loosen the two bolts, then slide the motor out of the way and disconnect it from the gear.

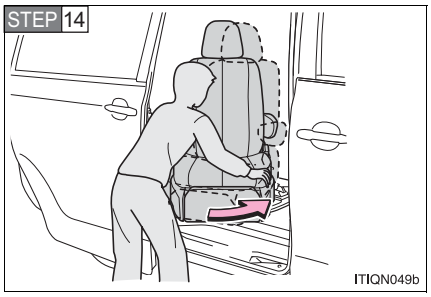

Rotate the seat into a position which does not cause the left edge of the seat cushion to make contact with the vehicle body.

STEP 15 Turn the power sliding door main switch off and close the right-hand sliding door manually.

Have the seat inspected by your Toyota dealer immediately.


The power sliding door will not operate if the AUTO ACCESS SEAT has been stowed inside the vehicle manually.

For information regarding the power sliding door, refer to the “Owner’s Manual”.

If the AUTO ACCESS SEAT does not move and the beep does not sound even when the switch is pressed

Contact your Toyota dealer.

■ Removing and installing the unit cover clip



1 To remove

Press the core of the clip and remove the clip.

2 To install

Push up the center portion, insert the clip and press the core of the clip.

■ Alarm sound

If an attempt is made to close the right-hand sliding door while stowing the AUTO ACCESS SEAT inside the vehicle, beep will sound.

■ When the AUTO ACCESS SEAT has been stowed manually

The shift lever cannot be shifted from P. Shift the shift lever while pressing the shift lock override button. The vehicle can be driven even though the beep will continue to sound. For details, refer to the “Owner’s Manual”.

CAUTION

■ When stowing the AUTO ACCESS SEAT manually

Do not put your feet or hands into the AUTO ACCESS SEAT stowage space. Your feet or hands may be caught in the movable parts of the AUTO ACCESS SEAT, which could cause injuries.

■ When the AUTO ACCESS SEAT has been stowed manually

- The seat is not locked and therefore could move during driving. Do not sit in the AUTO ACCESS SEAT until repairs have been completed.
- Make sure the combination wrench is securely in place in its storage location to reduce the possibility of personal injury in the event of a sudden braking, sudden swerving or an accident.

NOTICE

■ To prevent loss of components

Put any removed components into a bag, and be careful not to lose them.

Wireless remote control

If you suspect that the wireless remote control is malfunctioning, try the correction procedures listed in the table below.
If the seat still does not operate even after trying the procedures, it is likely that the wireless remote control is malfunctioning. Use the seat raise/lower switch to operate the AUTO ACCESS SEAT (→P. 35), and have the wireless remote control inspected by your Toyota dealer immediately.

If the AUTO ACCESS SEAT does not move

Reason	Correction procedure
The wireless remote control is too far away from the vehicle.	Move to within approximately 3.3 ft. (1 m) of the AUTO ACCESS SEAT and operate the wireless remote control.
Electromagnetic waves in the surrounding area may cause the wireless remote control to stop operating.	Change your standing position.
	Operate the seat using the seat raise/lower switch.
The battery of the wireless remote control is discharged.	Replace the battery. (→P. 40)
The switch is being pressed repeatedly.	Push and hold the switch.
The temperature of the surrounding area may cause the wireless remote control to stop operating.	Operate the seat using the seat raise/lower switch.

If the indicator light stops flashing even when the wireless remote control switches are pressed

Reason	Correction procedure
The battery of the wireless remote control is discharged.	Replace the battery. (→P. 40)

If the indicator light is illuminated or flashing even though the wireless remote control switches are not being pressed

Reason	Correction procedure
The wireless remote control may be malfunctioning.	Contact your Toyota dealer.

Audio system type*

With navigation system


Owners of models equipped with a navigation system should refer to the “NAVIGATION SYSTEM OWNER’S MANUAL”.

Without navigation system

Type A and B: CD player with AM/FM radio


Type C: CD player with changer and AM/FM radio.

Type A

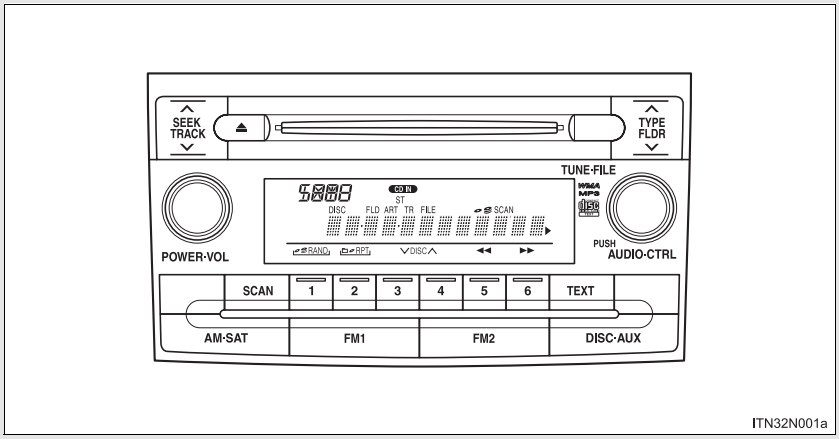


*: If equipped

Type B

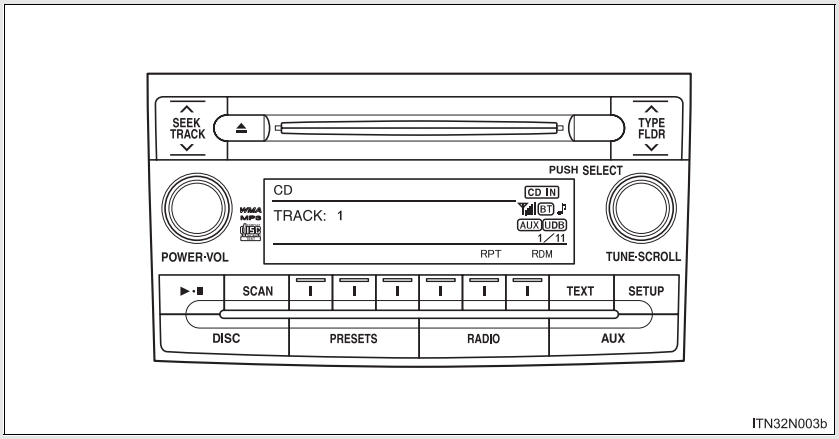

ITN32N003b

Type C

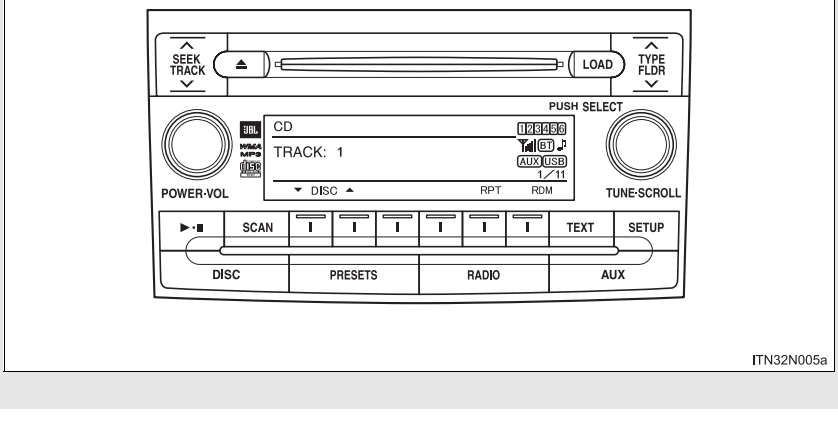

ITN32N005a

Title	Page
Using the radio	P. 412
Using the CD player	P. 422
Playing back MP3 and WMA discs	P. 431
Operating an iPod	P. 442
Operating a USB memory	P. 449
Optimal use of the audio system	P. 457
Using the AUX port	P. 462
Using the steering switches	P. 463

Language settings (type B and C)

The language used for all voice guidance, voice recognition and messages may be changed.

STEP 1 Press SETUP .

STEP 2 Press  that corresponds to “MORE”.

STEP 3 Press  that corresponds to “LANG”.

STEP 4 Press  that corresponds to the desired language.

For vehicles sold in the U.S.A.

“ENG” (English) or “ESP” (Spanish)

For vehicles sold in the Canada

“ENG” (English) or “FRAN” (French)

Using cellular phones

Interference may be heard through the audio system's speakers if a cellular phone is being used inside or close to the vehicle while the audio system is operating.

CAUTION

For vehicles sold in the U.S.A.

- Part 15 of the FCC Rules

  FCC Warning:
  Any unauthorized changes or modifications to this equipment will void the user's authority to operate this device.

  This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- Laser products

  - Do not take this unit apart or attempt to make any changes yourself.
    This is an intricate unit that uses a laser pickup to retrieve information from the surface of compact discs. The laser is carefully shielded so that its rays remain inside the cabinet. Therefore, never try to disassemble the player or alter any of its parts since you may be exposed to laser rays and dangerous voltages.
  - This product utilizes a laser.
    Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.
    The use of optical instruments with this product will increase eye hazard.

NOTICE


To prevent battery discharge

Do not leave the audio system on longer than necessary with the engine off.


To avoid damaging the audio system

Take care not to spill drinks or other fluids over the audio system.

Type A

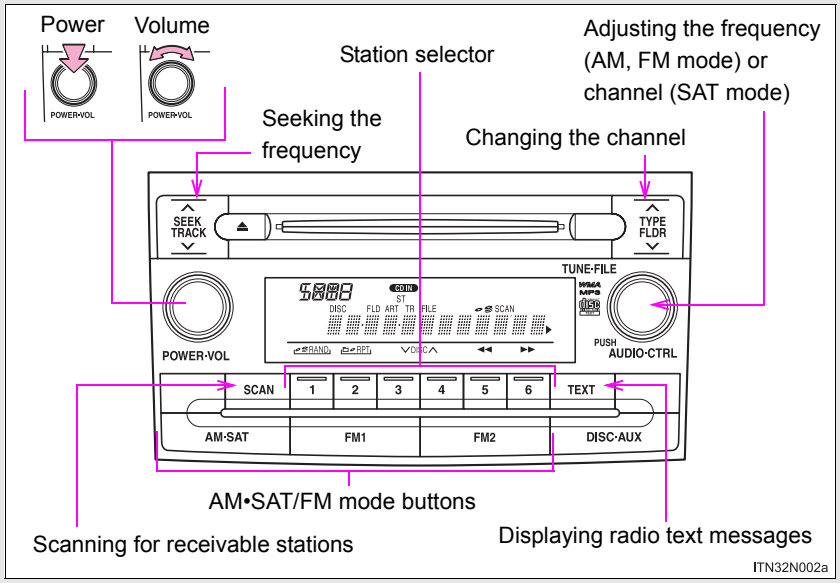
Power
Volume
Station selector
Adjusting the frequency (AM, FM mode) or channel (SAT mode)
Seeking the frequency
Changing the channel
SEEK TRACK
TYPE FLDR
TUNE·FILE
POWER·VOL
PUSH AUDIO·CTRL
SCAN
1
2
3
4
5
6
TEXT
AM·SAT
FM1
FM2
DISC·AUX
AM•SAT/FM mode buttons
Scanning for receivable stations
Displaying radio text messages
ITN32N002a

Type B and C

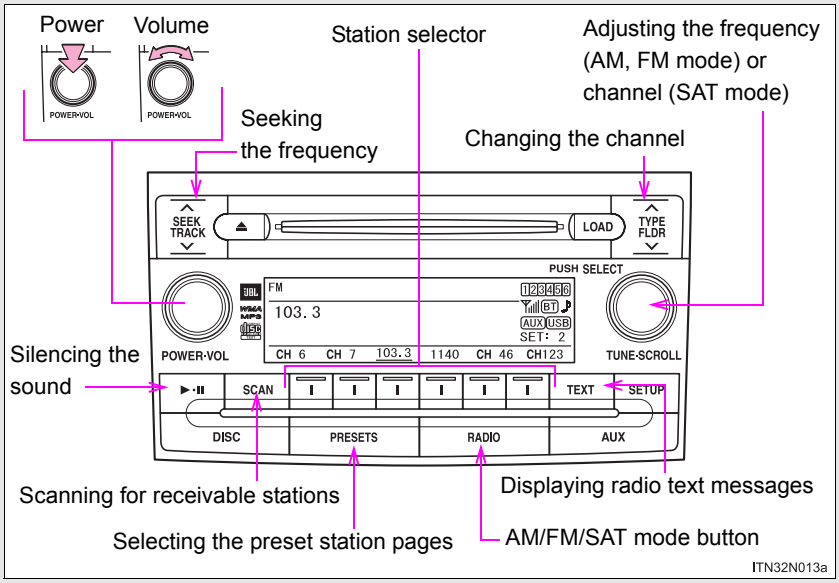
Power
Volume
Station selector
Adjusting the frequency (AM, FM mode) or channel (SAT mode)
Seeking the frequency
Changing the channel
SEEK TRACK
LOAD
TYPE FLDR
PUSH SELECT
FM
103. 3
SET: 2
CH 6
CH 7
103.3
1140
CH 46
CH123
POWER·VOL
TUNE·SCROLL
Silencing the sound
SCAN
TEXT
SETUP
DISC
PRESETS
RADIO
AUX
Scanning for receivable stations
Displaying radio text messages
Selecting the preset station pages
AM/FM/SAT mode button
ITN32N013a

Setting station presets (excluding XM® Satellite Radio)

STEP 1 Search for desired stations by turning 

or 

or pressing "∧" or "∨" on 

.

STEP 2 Press and hold the button (from 

to 

or one of 

) until you hear a beep.

Type B and C:

Each time 

is pressed, station pages are changed. There are 6 sets of 6 presets. There is a total of 36 presets.

Scanning radio stations (excluding XM® Satellite Radio)

■ Scanning the preset radio stations

STEP 1 Press and hold SCAN until you hear a beep.

Preset stations will be played for 5 seconds each.

STEP 2 When the desired station is reached, press SCAN once again.

■ Scanning all radio stations within range

STEP 1 Press SCAN.

All stations with reception will be played for 5 seconds each.

STEP 2 When the desired station is reached, press SCAN once again.

■ Displaying radio text messages (for type B and C, FM mode only)

When a new radio text message is received, “MSG” is shown on the display. To display the message, press TEXT.

If the text continues past the end of the display, “▶” is displayed.

Press and hold TEXT until you hear a beep.

Text messages are not displayed while driving.

XM® Satellite Radio (if equipped)

■ Receiving XM® Satellite Radio

STEP 1 Press AM·SAT or RADIO .

The display changes as follows each time the button is pressed.

Type A

AM → SAT1 → SAT2 → SAT3

Type B and C

AM → FM → SAT

STEP 2 Turn 

or 

to select a desired channel in all the categories or press "∧" or "∨" on SEEK TRACK to select the desired channel in the current category.

■ Setting XM® Satellite Radio channel presets

Select the desired channel. Press and hold a button (from 1 to 6 or one of I) until you hear a beep.

Type B and C:

Each time PRESETS is pressed, station pages are changed. There is a total of 6 sets of 6 presets.

■ Changing the channel category

Press “∧” or “∨” on 

.

■ Scanning XM® Satellite Radio channels

● Scanning channels in the current category

STEP 1 Press SCAN .

STEP 2 When the desired channel is reached, press the button again.

● Scanning preset channels

STEP 1 Press and hold SCAN until you hear a beep.

STEP 2 When the desired channel is reached, press the button again.

■ Displaying text information

Press TEXT .

Each time TEXT is pressed, the display changes in the following order:

Type A

Channel name → Title (song/program title) → Name (artist name/ feature) → Channel number.

Type B and C

Title (song/ program title) → Title (song/program title)/Name (artist name/ feature).

Silencing the sound (type B and C)

Press  .

Press the button again to turn the system back on.

■ **When the battery is disconnected (type A only)**

All preset stations are erased.

■ **Radio antenna type**

- Detachable antenna (type A and B)
  To remove a detachable antenna, carefully turn it counterclockwise.
- Wire antenna (type C)
  The radio antenna is mounted inside the rear quarter window.

■ **Reception sensitivity**

- Type B and C — Cargo loaded on the roof luggage carrier, especially metal objects, may adversely affect the reception of XM® Satellite Radio.
- Maintaining perfect radio reception at all times is difficult due to the continually changing position of the antenna, differences in signal strength and surrounding objects, such as trains, transmitters, etc.
- Type C — The radio antenna is mounted inside the rear quarter window. To maintain clear radio reception, do not attach metallic window tinting or other metallic objects to the antenna wire mounted inside the rear quarter window.

■ **Receiving XM® Satellite Radio**

An XM® Satellite Radio is a tuner designed exclusively to receive broadcasts provided under a separate subscription. Availability is limited to the 48 contiguous states and 10 Canadian provinces.

- XM® subscriptions
  For detailed information about XM® Satellite Radio or to subscribe:
  U.S.A.–
  Visit on the web at www.xmradio.com or call 1-800-967-2346.
  Canada–
  Visit on the web at www.xmradio.ca or call 1-877-209-0079.
- Radio ID
  You will need the radio ID when activating XM® service or reporting a problem. Select “CH000” using 

or 

, and the receiver’s 8-character ID number will appear.
- Satellite tuner
  The tuner supports only Audio Services (Music and Talk) and the accompanying Text Information of XM® Satellite Radio.

■ **If the satellite radio does not operate normally**

If a problem occurs with the XM® tuner, a message will appear on the display. Refer to the table below to identify the problem, and take the suggested corrective action.

ANTENNA or CHECK ANTENNA	The XM® antenna is not connected. Check whether the XM® antenna cable is attached securely.
	There is a short-circuit in the antenna or the surrounding antenna cable. See a Toyota certified dealer.
UPDATING or CHANNEL NOT AUTHORIZED	You have not subscribed to XM® Satellite Radio. The radio is being updated with the latest encryption code. Contact XM® Satellite Radio for subscription information. When a contract is canceled, you can choose “CH000” and all free-to-air channels.
	The premium channel you selected is not authorized. Wait for about 2 seconds until the radio returns to the previous channel or “CH001”. If it does not change automatically, select another channel. If you want to listen to the premium channel, contact XM® Satellite Radio.
NO SIGNAL	The XM® signal is too weak at the current location. Wait until your vehicle reaches a location with a stronger signal.
LOADING	The unit is acquiring audio or program information. Wait until the unit has received the information.
OFF AIR or CHANNEL OFF AIR	The channel you selected is not broadcasting any programming. Select another channel.

-----	There is no song/program title or artist name/feature associated with the channel at that time. No action needed.
--- or CHANNEL NOT AVAILABLE	The channel you selected is no longer available. Wait for about 2 seconds until the radio returns to the previous channel or “CH001”. If it does not change automatically, select another channel.

Contact the XM® Listener Care Center at 1-800-967-2346 (U.S.A.) or 1-877-209-0079 (Canada).


■ **Certifications for the radio tuner**

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.


If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by trying one or more of the following:

- Reorienting or relocating the receiving antenna.
- Increasing the separation between the equipment and receiver.
- Connecting the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consulting the dealer or an experienced radio/TV technician for help.

Type A

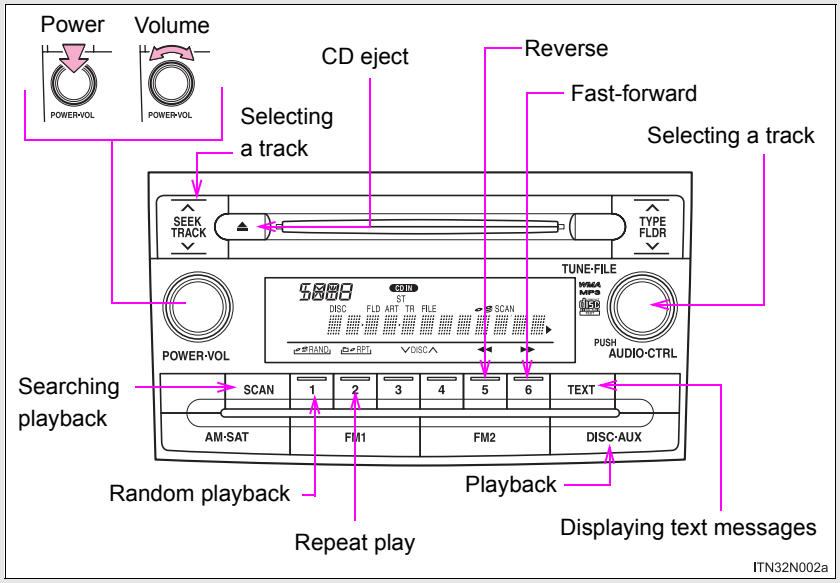
Power
Volume
CD eject
Reverse
Fast-forward
Selecting a track
Selecting a track
SEEK TRACK
TYPE FLDR
TUNE·FILE
POWER·VOL
PUSH AUDIO·CTRL
Searching playback
SCAN
1
2
3
4
5
6
TEXT
AM·SAT
FM1
FM2
DISC·AUX
Random playback
Repeat play
Playback
Displaying text messages
ITN32N002a

Type B and C

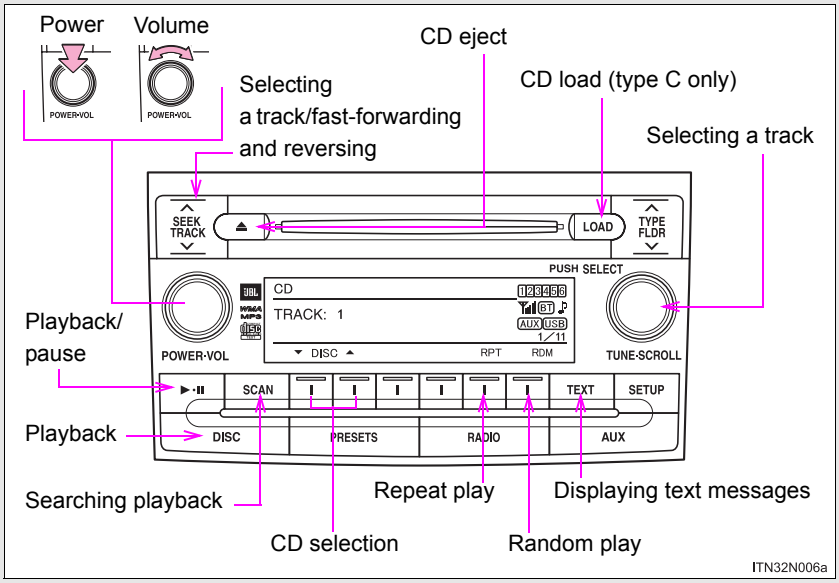

Loading CDs

■ Loading a CD (type A and B)

Insert a CD.

■ Loading a CD (type C)

STEP 1 Press (LOAD) .

STEP 2 Insert a CD when the indicator on the slot turns from amber to green.

■ **Loading multiple CDs (type C only)**

STEP 1 Press and hold (LOAD) until you hear a beep.

STEP 2 Insert a CD when the indicator on the slot turns from amber to green.

The indicator on the slot turns to amber when the CD is inserted.

STEP 3 Insert the next CD when the indicator on the slot turns from amber to green again.

Repeat the procedure for the remaining CDs.

To cancel the operation, press (LOAD). If you do not insert a CD within 15 seconds, loading will be canceled automatically.

Ejecting CDs

■ **Ejecting a CD (type A and B)**

Press (⏏) and remove the CD.

■ **Ejecting a CD (type C)**

STEP 1 To select the CD to be ejected, press [1] that corresponds to "DISC ▲" or "▼ DISC".

The selected CD number is shown on the display.

STEP 2 Press (⏏) and remove the CD.

■ **Ejecting all CDs (type C only)**

Press and hold (⏏) until you hear a beep, then remove the CDs.

Selecting a track

Turn 

or 

or press "∧" or "∨" on 

to select the desired track.

Fast forwarding and rewinding tracks

Type A

Press 

or 

.

Type B and C

Press and hold "∧" or "∨" on 

.

Scanning tracks

STEP 1 Press 

.

The first 10 seconds of each track will be played.

To cancel, press 

again.

STEP 2 Press 

again when the desired track is reached.

Selecting a CD (type C only)

■ Selecting a CD to play

Press [I] that corresponds to “DISC ▲” or “▼ DISC”.

■ Scanning loaded CDs

STEP 1 Press and hold [SCAN] until you hear a beep.

The first 10 seconds of the first track on each CD will be played.

To cancel, press [SCAN] again.

STEP 2 Press [SCAN] again when the desired CD is reached.

Playing and pausing tracks (type B and C)

Press [▶II] .

Random playback

■ Current CD

Press [1] or [I] that corresponds to “RDM”.

Songs are played in random order.

To cancel, press the button again.

■ All CDs (type C only)

Press [I] that corresponds to “RDM” twice.

Tracks on all loaded CDs are played in random order.

To cancel, press the button again.

Repeat play

■ Repeating a track

Press [2] or [1] that corresponds to “RPT”.

To cancel, press the button again.

■ Repeating all of the tracks on a CD (type C only)

Press [1] that corresponds to “RPT” twice.

To cancel, press the button again.

Switching the display

Press [TEXT].

Each time [TEXT] is pressed, the display changes in the following order:

Type A

Track no./Elapsed time → CD title → Track name.

Type B and C

Track title → Track name/Artist name → Track name/Elapsed time.

■ Display (type A only)

Up to 12 characters can be displayed at a time.

If there are 13 characters or more, pressing and holding [TEXT] for 1 second or more will display the remaining characters.
A maximum of 24 characters can be displayed.

If [TEXT] is pressed for 1 second or more again or has not been pressed for 6 seconds or more, the display will return to the first 12 characters.

Depending on the contents recorded, the characters may not be displayed properly or may not be displayed at all.

■ **Error messages**

"CD CHECK": This indicates a problem either with the CD or inside the player. The CD may be dirty, damaged or inserted up-side down.

"WAIT" or "PLEASE WAIT": Operation has stopped due to a high temperature inside the player. Wait for a while and then press DISC·AUX or DISC. Contact your Toyota dealer if the CD still cannot be played back.

■ **Discs that can be used**

Discs with the marks shown below can be used.
Playback may not be possible depending on recording format or disc features, or due to scratches, dirt or deterioration.



CDs with copy-protect features may not play correctly.

■ **CD player protection feature**

To protect the internal components, playback is automatically stopped when a problem is detected.

■ **If CDs are left inside the CD player or in the ejected position for extended periods**

CDs may be damaged and may not play properly.

■ **Lens cleaners**


Do not use lens cleaners. Doing so may damage the CD player.

NOTICE


CDs and adapters that cannot be used

Do not use the following types of CDs, 3 in. (8 cm) CD adapters or Dual Disc.


Doing so may damage the player and/or the CD insert/eject function.




- CDs that have a diameter that is not 4.7 in. (12 cm).



- Low-quality and deformed CDs.



- CDs with a transparent or translucent recording area.




- CDs that have tape, stickers or CD-R labels attached to them, or that have the label peeled off.

NOTICE

Player precautions

Failure to follow the precautions below may result in damage to the CDs or the player itself.


- Do not insert anything other than CDs into the CD slot.
- Do not apply oil to the CD player.
- Store CDs away from direct sunlight.
- Never try to disassemble any part of the player.




- Do not insert more than one CD at a time.

Playing MP3 and WMA discs

Type A

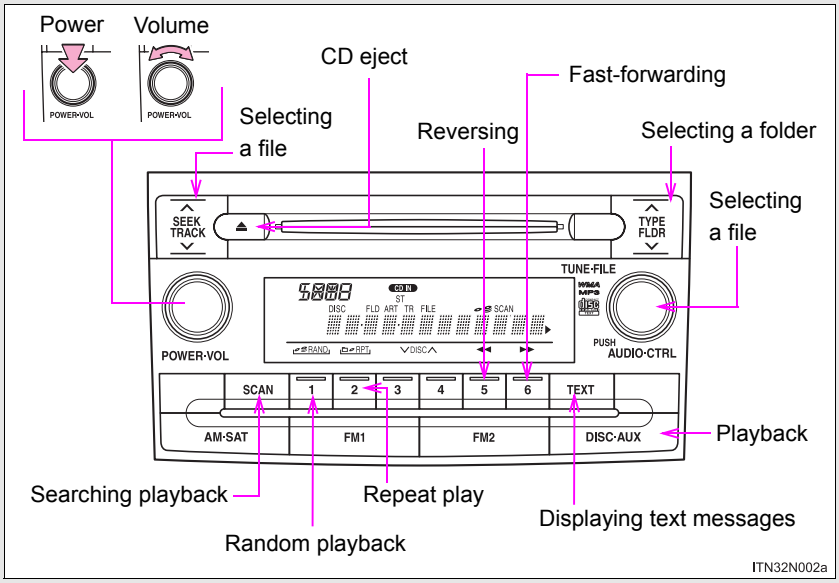

Type B and C

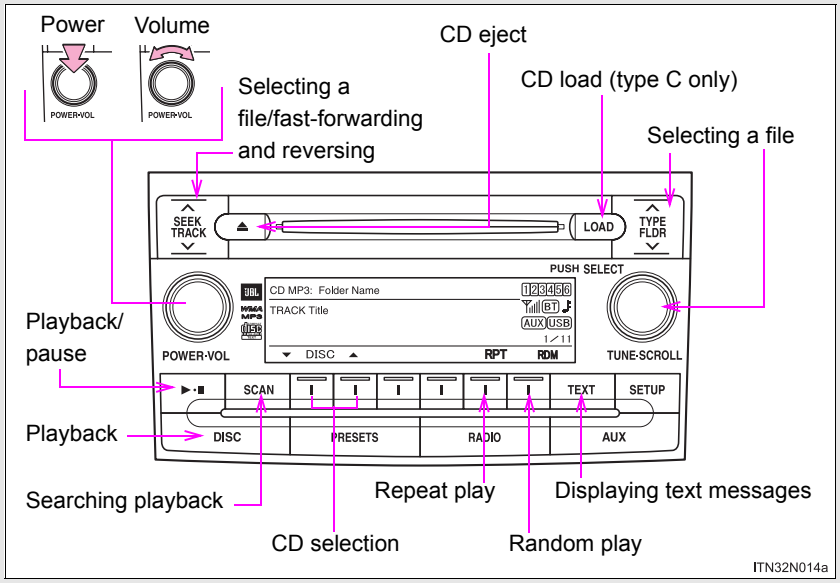

Loading and ejecting MP3 and WMA discs

→P. 422

Selecting MP3 and WMA discs (type C only)

→P. 422

Selecting and scanning a folder

■ Selecting folders one at a time

Press “∧” or “∨” on 

to select the desired folder.

■ Scanning the first file of all the folders

STEP 1 Press and hold 

until you hear a beep.

The first 10 seconds of the first file in each folder will be played.

STEP 2 When the desired folder is reached, press 

again.

■ Returning to the first folder

Press and hold “∨” on 

until you hear a beep.

Selecting and scanning files

■ Selecting one file at a time

Turn the 

or 

dial or press “∧” or “∨” on 

to select the desired file.

■ Selecting the desired file by cueing the files in the folder

STEP 1 Press SCAN .

STEP 2 When the desired file is reached, press SCAN once again.

Fast forwarding and reversing files

Type A

Press [5] or [6].

Type B and C

Press and hold "∧" or "∨" on 

.

Playing and pausing files (type B and C)

Press  .

Random playback

■ **Playing files from a particular folder in random order**

Press [1] or [I] that corresponds to "RDM".

To cancel, press the button again.

■ **Playing all of the files on a disc in random order**

Press and hold [1] or [I] that corresponds to "RDM" until you hear a beep.

To cancel, press the button again.

Repeat play

■ Repeating a file

Press [2] or [1] that corresponds to “RPT”.

To cancel, press the button again.

■ Repeating all of the files in a folder

Type A

Press and hold [2] until you hear a beep.

To cancel, press the button again.

Type B and C

Press [1] that corresponds to “RPT” twice.

To cancel, press the button again.

■ Repeating all of the files in a disc (type C only)

Press [1] that corresponds to “RPT” three times.

To cancel, press the button again.

Switching the display

Press [TEXT] .

Each time [TEXT] is pressed, the display changes in the following order:

Type A

Folder no./File no./Elapsed time → Folder name → File name → Album title (MP3 only) → Track title → Artist name.

Type B and C

Track title → Track title/Artist name → Track title/Album name → Track title/Elapsed time.

■ **Display (type A only)**

→P. 427

■ **Error messages**

"CD CHECK": This indicates a problem either with the CD or inside the player. The CD may be dirty, damaged or inserted up-side down.

"WAIT" or "PLEASE WAIT": Operation has stopped due to a high temperature inside the player. Wait for a while and then press DISC·AUX or DISC. Contact your Toyota dealer if the CD still cannot be played back.

■ **Discs that can be used**

→P. 428

■ **CD player protection feature**

→P. 428

■ **If CDs are left inside the CD player or in the ejected position for extended periods**

→P. 428

■ **Lens cleaners**

→P. 428

■ **MP3 and WMA files**

MP3 (MPEG Audio LAYER3) is a standard audio compression format.

Files can be compressed to approximately 1/10 of their original size by using MP3 compression.

WMA (Windows Media Audio) is a Microsoft audio compression format.

This format compresses audio data to a size smaller than that of the MP3 format.

There is a limit to the MP3 and WMA file standards and to the media/formats recorded by them that can be used.

● MP3 file compatibility

- Compatible standards
  MP3 (MPEG1 LAYER3, MPEG2 LSF LAYER3)
- Compatible sampling frequencies
  MPEG1 LAYER3: 32, 44.1, 48 (kHz)
  MPEG2 LSF LAYER3: 16, 22.05, 24 (kHz)
- Compatible bit rates
  MPEG1 LAYER3: 64, 80, 96, 112, 128, 160, 192, 224, 256, 320 (kbps)
- MPEG2 LSF LAYER3: 64, 80, 96, 112, 128, 144, 160 (kbps)
  * Compatible with VBR
- Compatible channel modes: stereo, joint stereo, dual channel and monaural

● WMA file compatibility

- Compatible standards
  WMA Ver. 7, 8, 9
- Compatible sampling frequencies
  32, 44.1, 48 (kHz)
- Compatible bit rates
  Ver. 7, 8: CBR 48, 64, 80, 96, 128, 160, 192 (kbps)
  Ver. 9: CBR 48, 64, 80, 96, 128, 160, 192, 256, 320 (kbps)
  * Only compatible with 2-channel playback

● Compatible media

Media that can be used for MP3 and WMA playback are CD-Rs and CD-RWs.

Playback in some instances may not be possible, depending on the status of the CD-R or CD-RW. Playback may not be possible or the audio may jump if the disc is scratched or marked with fingerprints.

● Compatible disc formats

The following disc formats can be used.

- Disc formats: CD-ROM Mode 1 and Mode 2
  CD-ROM XA Mode 2, Form 1 and Form 2
- File formats: ISO9660 Level 1, Level 2, (Romeo, Joliet)
  MP3 and WMA files written in any format other than those listed above may not play correctly, and their file names and folder names may not be displayed correctly.

Items related to standards and limitations are as follows.

- Maximum directory hierarchy: 8 levels
- Maximum length of folder names/file names: 32 characters
- Maximum number of folders: 192 (including the root)
- Maximum number of files per disc: 255

● File names

The only files that can be recognized as MP3/WMA and played are those with the extension .mp3 or .wma.

● Multi-sessions

As the audio system is compatible with multi-sessions, it is possible to play discs that contain MP3 and WMA files. However, only the first session can be played.

● ID3 and WMA tags

ID3 tags can be added to MP3 files, making it possible to record the track title and artist name, etc.

The system is compatible with ID3 Ver. 1.0, 1.1, and Ver. 2.2, 2.3 ID3 tags. (The number of characters is based on ID3 Ver. 1.0 and 1.1.)

WMA tags can be added to WMA files, making it possible to record the track title and artist name in the same way as with ID3 tags.

● MP3 and WMA playback

When a disc containing MP3 or WMA files is inserted, all files on the disc are first checked. Once the file check is finished, the first MP3 or WMA file is played. To make the file check finish more quickly, we recommend you do not write in any files other than MP3 or WMA files or create any unnecessary folders.

If the discs contain a mixture of music data and MP3 or WMA format data, only music data can be played.

● Extensions

If the file extensions .mp3 and .wma are used for files other than MP3 and WMA files, they will be mistakenly recognized and played as MP3 and WMA files. This may result in large amounts of interference and damage to the speakers.

● Playback

- To play MP3 file with steady sound quality, we recommend a fixed bit rate of 128 kbps and a sampling frequency of 44.1 kHz.
- CD-R or CD-RW playback may not be possible in some instances, depending on the characteristics of the disc.
- There is a wide variety of freeware and other encoding software for MP3 and WMA files on the market, and depending on the status of the encoding and the file format, poor sound quality or noise at the start of playback may result. In some cases, playback may not be possible at all.
- When files other than MP3 or WMA files are recorded on a disc, it may take more time to recognize the disc and in some cases, playback may not be possible at all.
- Microsoft, Windows, and Windows Media are the registered trademarks of Microsoft Corporation in the U.S. and other countries.


⚠ NOTICE

■ **CDs and adapters that cannot be used (→P. 429)**
■ **Player precautions (→P. 430)**

Operating an iPod*

Connecting an iPod enables you to enjoy music from the vehicle speakers.

■ Connecting an iPod

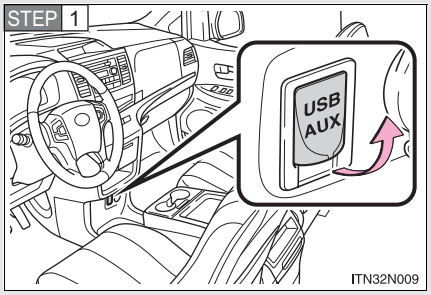


Open the cover and connect an iPod using an iPod cable.

Turn on the power of the iPod if it is not turned on.

STEP 2 Press AUX.

■ Control panel

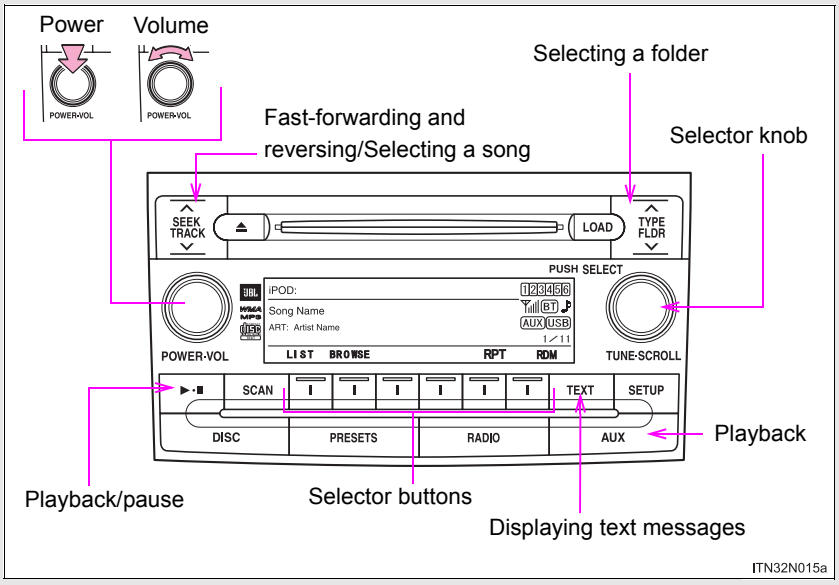

*: If equipped

Selecting a play mode

STEP 1 Press [I] that corresponds to “BROWSE” to select iPod menu mode.

STEP 2 Press [I] that corresponds to the desired play mode.

■ Play mode list

Play mode	First selection	Second selection	Third selection	Fourth selection
PLIST	Playlists select	Songs select	-	-
ARTIST	Artists select	Albums select	Songs select	-
ALBUM	Albums select	Songs select	-	-
GENRE	Genre select	Artists select	Albums select	Songs select
SONGS	Songs select	-	-	-
PODCST	Albums select	Songs select	Albums select	Songs select
COMPSR	Composers select	Albums select	Songs select	-
BOOK	Songs select	-	-	-

Depending on the model, the name of your iPod may be displayed at the top of list.

■ **Selecting a list**

STEP 1 Turn  to display the first selection list.

STEP 2 Press  to select the desired item.

Pressing  that corresponds to “MORE” changes to the second selection list.

STEP 3 Repeat the same procedure to select the desired song name.

To return to the previous selection list, press  that corresponds to “  ”.

Selecting songs from a song list

STEP 1 Press  that corresponds to “LIST”.

The current playlist is displayed.

STEP 2 Turning  to select the desired song.

Press  returns the screen from list display to the previous screen.

Selecting songs

Turn  or press “∧” or “∨” on  to select the desired song.

Playing and pausing songs

Press the  .

Fast-forwarding and rewinding songs

Press and hold “∧” or “∨” on  .

Shuffle playback

■ **Playing songs from one playlist or album in random order**

Press  that corresponds to “RDM”.

To cancel, press the button twice.

■ **Playing songs from all the playlists or albums in random order**

Press  that corresponds to “RDM” twice.

To cancel, press the button again.

Repeat play

Press  that corresponds to “RPT”.

To cancel, press the button again.

Even when the repeat play option has not been selected, playback will automatically continue from the first song in the current play list once the last song has ended.

Switching the display

Press TEXT .

Each time the button is pressed, the display changes in the following order: Track title → Track title/Artist name → Track title/Album name → Track title/Elapsed

---

About iPod

- Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards.
- iPod is a trademark of Apple Inc., registered in the U.S. and other countries.

iPod functions

- When an iPod is connected and the audio source is changed to iPod mode, the iPod will resume play from the same point in which it was last used.
- Depending on the iPod that is connected to the system, certain functions may not be available. Disconnecting the device and reconnecting it once again may resolve some malfunctions.

iPod problems

To resolve most problems encountered when using your iPod, disconnect your iPod from the vehicle iPod connection and reset it.
For instructions on how to reset your iPod, refer to your iPod Owner's Manual.

Error messages

"iPod ERROR": This indicates a problem in the iPod, inside the USB ECU in the vehicle or the connection between them.

"NO SONGS": This indicates that there is no music data in the iPod.

"UPDATE YOUR iPod": This indicates that the version of the iPod is not compatible.

■ **Compatible models**

Model	Generation	Software version
iPod	5th generation	Ver. 1.2.0 or higher
iPod nano	1st generation	Ver. 1.3.0 or higher
	2nd generation	Ver. 1.1.2 or higher
	3rd generation	Ver. 1.0.0 or higher
iPod touch	1st generation	Ver. 1.1.0 or higher
iPod classic	1st generation	Ver. 1.0.0 or higher

Depending on differences between models or software version etc., some models listed above might be incompatible with this system.
iPod 4th generation and earlier models are not compatible with this system.
iPhone, iPod mini, iPod shuffle and iPod photo are not compatible with this system.

Items related to standards and limitations are as follows:

- Maximum number of lists in device: 9999
- Maximum number of songs in device: 65535
- Maximum number of songs per list: 65535

CAUTION

While driving

Do not connect iPod or operate the controls on the iPod.

NOTICE


To prevent damage to iPod

- Do not leave iPod in the vehicle. The temperature inside the vehicle may become high, resulting in damage to the player.
- Do not push down on or apply unnecessary pressure to the iPod while it is connected as this may damage the iPod or its terminal.
- Do not insert foreign objects into the port as this may damage the iPod or its terminal.

Operating a USB memory*

Connecting a USB memory enables you to enjoy music from the vehicle speakers.

■ Connecting a USB memory

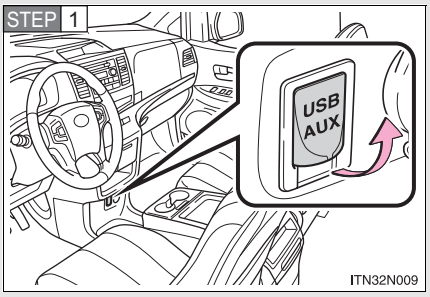


Open the cover and connect a USB memory.

Turn on the power of the USB memory if it is not turned on.

STEP 2 Press 

.

■ Control panel

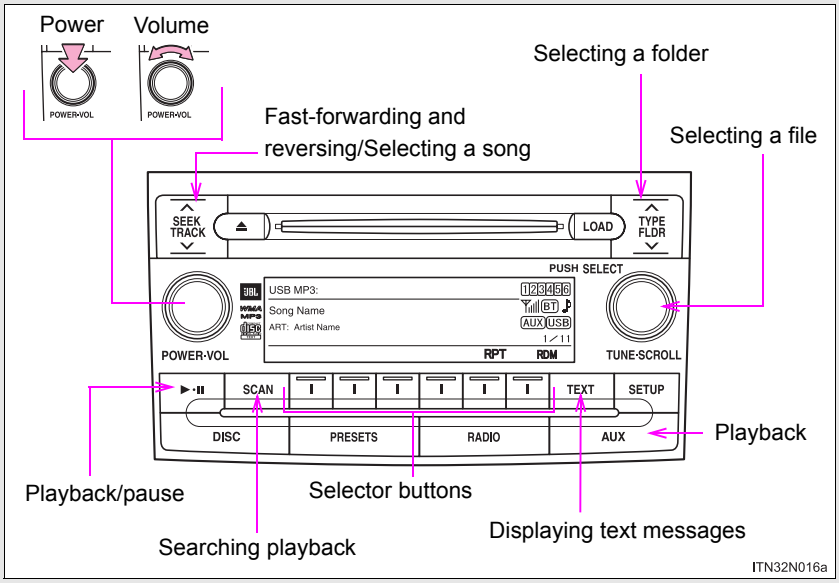

*: If equipped

Selecting and scanning a folder

■ Selecting a folder

Press "∧" or "∨" on 

to select the desired folder.

■ Returning to the first file of the first folder

Press and hold "∨" on 

until you hear a beep.

■ Scanning the first file of all the folders

STEP 1 Press and hold 

until you hear a beep.

The first 10 seconds of the first file in each folder will be played.

STEP 2 When the desired folder is reached, press 

again.

Selecting and scanning files

■ Selecting a file

Turn 

or press "∧" or "∨" on 

to select the desired file.

■ Scanning the files in a folder

STEP 1 Press SCAN .

The first 10 seconds of each file will be played.

To cancel, press SCAN again.

STEP 2 When the desired file is reached, press SCAN again.

Playing and pausing files

Press  .

Fast-forwarding and rewinding files

Press and hold "∧" or "∨" on 

.

Random playback

■ Playing files from a folder in random order

Press  that corresponds to “RDM”.

To cancel, press the button twice.

■ Playing all the files from a USB memory in random order

Press  that corresponds to “RDM” twice.

To cancel, press the button again.

Repeat play

■ Repeating a file

Press  that corresponds to “RPT”.

To cancel, press the button twice.

■ Repeating all the files in a folder

Press  that corresponds to “RPT” twice.

To cancel, press the button again.

Switching the display

Press  .

Each time the button is pressed, the display changes in the following order: Track title → Track title/Artist name → Track title/Album name → Track title/Elapsed time

■ **USB memory functions**

Depending on the USB memory that is connected to the system, certain functions may not be available. Disconnecting the device and reconnecting it once again may resolve some malfunctions.

■ **Error messages**

"USB ERROR": This indicates a problem in the USB memory or its connection.

"NO SUPPORT": This indicates that no MP3/WMA files are included in the USB memory player.

■ **USB memory**

● Compatible devices

USB memory that can be used for MP3 and WMA playback

Depending on the type of USB device, playback may not be possible.

● Compatible device formats

The following device formats can be used:

• USB communication formats: USB2.0 FS (12mbps)
• File formats: FAT16/32 (Windows)
• Correspondence class: Mass storage class

MP3 and WMA files written in any format other than those listed above may not play correctly, and their file names and folder names may not be displayed correctly.

Items related to standards and limitations are as follows:

- Maximum directory hierarchy: 8 levels
- Maximum number of folders in a device: 999 (including the root)
- Maximum number of files in a device: 65025
- Maximum number of files per folder: 255

● MP3 and WMA files

MP3 (MPEG Audio LAYER 3) is a standard audio compression format.

Files can be compressed to approximately 1/10 of their original size using MP3 compression.

WMA (Windows Media Audio) is a Microsoft audio compression format.

This format compresses audio data to a size smaller than that of the MP3 format.

There is a limit to the MP3 and WMA file standards that can be used and to the media/formats on which the files are recorded.

● MP3 file compatibility

- Compatible standards
  MP3 (MPEG1 AUDIO LAYERII, III, MPEG2 AUDIO LAYERII, III, MPEG2.5)
- Compatible sampling frequencies
  MPEG1 AUDIO LAYERII, III: 32, 44.1, 48 (kHz)
  MPEG2 AUDIO LAYERII, III: 16, 22.05, 24 (kHz)
  MPEG2.5: 8, 11.025, 12 (kHz)
- Compatible bit rates (compatible with VBR)
  MPEG1 AUDIO LAYERII, III: 32-320 (kbps)
  MPEG2 AUDIO LAYERII, III: 32-160 (kbps)
  MPEG2.5: 32-160 (kbps)
- Compatible channel modes: stereo, joint stereo, dual channel and monaural

● WMA file compatibility

- Compatible standards
  WMA Ver. 9
- Compatible sampling frequencies
  HIGH PROFILE 32, 44.1, 48 (kHz)
- Compatible bit rates
  HIGH PROFILE 32-320 (kbps, VBR)

● File names

The only files that can be recognized as MP3/WMA and played are those with the extension .mp3 or .wma.

● ID3 and WMA tags

ID3 tags can be added to MP3 files, making it possible to record the track title, artist name, etc.

The system is compatible with ID3 Ver. 1.0, 1.1, and Ver. 2.2, 2.3, 2.4 ID3 tags. (The number of characters is based on ID3 Ver. 1.0 and 1.1.)

WMA tags can be added to WMA files, making it possible to record the track title and artist name in the same way as with ID3 tags.

● MP3 and WMA playback

When a device containing MP3 or WMA files is connected, all files in the USB memory device are checked. Once the file check is finished, the first MP3 or WMA file is played. To make the file check finish more quickly, we recommend that you do not include any files other than MP3 or WMA files or create any unnecessary folders.

● Extensions

If the file extensions .mp3 and .wma are used for files other than MP3 and WMA files, they will be mistakenly recognized and played as MP3 and WMA files. This may result in large amounts of interference and damage to the speakers.

● Playback

- To play MP3 files with steady sound quality, we recommend a fixed bit rate of at least 128 kbps and a sampling frequency of 44.1 kHz.
- There is a wide variety of freeware and other encoding software for MP3 and WMA files on the market, and depending on the status of the encoding and the file format, poor sound quality or noise at the start of playback may result. In some cases, playback may not be possible at all.
- Microsoft, Windows, and Windows Media are registered trademarks of Microsoft Corporation in the U.S.A. and other countries.

CAUTION

While driving


Do not connect USB memory or operate the controls on the USB memory.

NOTICE


To prevent damage to USB memory

- Do not leave USB memory in the vehicle. The temperature inside the vehicle may become high, resulting in damage to the player.
- Do not push down on or apply unnecessary pressure to the USB memory while it is connected as this may damage the USB memory or its terminal.
- Do not insert foreign objects into the port as this may damage the USB memory or its terminal.

Type A

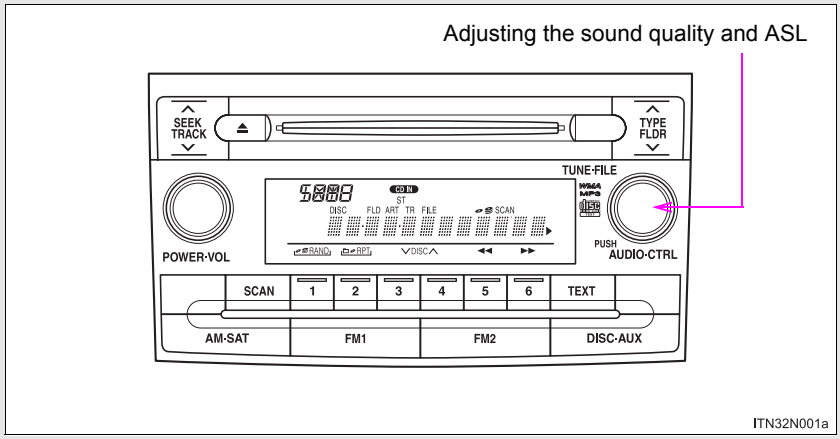

Type B and C

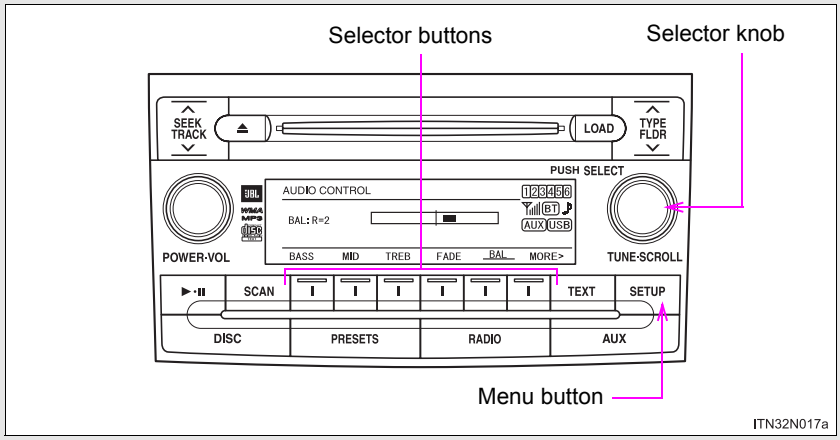

Using the audio control function

■ Changing sound quality modes

Type A

Pressing 

selects the mode in the following order.

"BAS" → "TRE" → "FAD" → "BAL" → "ASL"

Type B and C

STEP 1 Press 

.

STEP 2 Press  that corresponds to the desired mode.
"BASS", "MID" (type C only), "TREB", "FADE", or "BAL"

■ Adjusting sound quality

Turning 

or 

adjusts the level.

Sound quality mode	Mode displayed	Level	Turn to the left	Turn to the right
Low-pitched tones*1	BAS	-5 to 5	Low	High
Mid-pitched tones*1	MID*2	-5 to 5		
High-pitched tones*1	TRE	-5 to 5		
Front/rear volume balance	FAD	F7 to R7	Shifts to rear	Shifts to front
Left/right volume balance	BAL	L7 to R7	Shifts to left	Shifts to right

*1:The sound quality level is adjusted individually in each audio mode.

*2:Type C only

■ Adjusting the Automatic Sound Levelizer (ASL)

Type A

When “ASL” is selected, turning 

to the right changes the “ASL” level in the order of “LOW”, “MID” and “HIGH”.

Turning 

to the left turns “ASL” off.

ASL automatically adjusts the volume and tone quality according to vehicle speed.

Type B and C

STEP 1 Press 

.

STEP 2 Press  that corresponds to “MORE”.

STEP 3 Press  that corresponds to “ASL”.

STEP 4 Press  that corresponds to the desired mode.

Type B: “LOW”, “MID”, “HIGH”, or “OFF”
Type C: “ON” or “OFF”

ASL automatically adjusts the volume and tone quality according to vehicle speed.

■ **Setting the number of preset pages (type B and C)**

The number of preset pages desired can be set from 1 to 6. The initial setting is 6 pages.

STEP 1 Press SETUP .

STEP 2 Press [ ] that corresponds to “MORE”.

STEP 3 Press [ ] that corresponds to “PRESET”.

STEP 4 Press [ ] that corresponds to the desired number of preset pages.

■ **Language settings (type B and C)**

→P. 409

■ **Trademark owned by SRS Labs, Inc. (type A and B)**

The audio systems utilize SRS FOCUS™ and SRS TruBass® audio enhancement technologies, under license from SRS Labs, Inc., in all mode except AM radio mode.


FOCUS, TruBass, SRS and symbols are trademarks of SRS Labs, Inc.

FOCUS and TruBass technologies are incorporated under license from SRS Labs, Inc.

Using the AUX port

This port can be used to connect a portable audio device and listen to it using the vehicle's speakers.

STEP 1

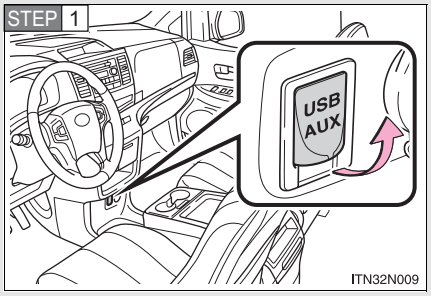

Open the cover and connect the portable audio device.

STEP 2 Press 

or 

.

■ **Operating portable audio devices connected to the audio system**


The volume can be adjusted using the vehicle's audio controls. All other adjustments must be made on the portable audio device itself.

■ **When using a portable audio device connected to the power outlet**

Noise may occur during playback. Use the power source of the portable audio device.

Using the steering switches*

Some audio features can be controlled using the switches on the steering wheel.

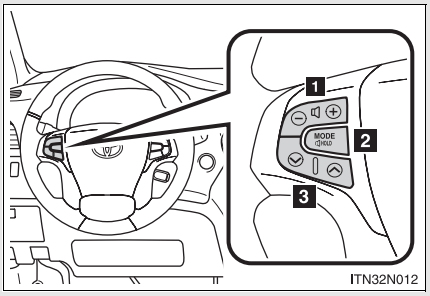

1 Volume

2 Power on, select audio source

3 Radio mode: Selects a radio station

CD mode: Selects a track, file (MP3 and WMA) and disc

Bluetooth® audio mode: Selects a track and album

iPod mode: Selects a song

USB memory mode: Selects a file and folder

RSE mode: Selects track/file and chapter

*: If equipped

Turning on the power

Press  when the audio system is turned off.

The audio system can be turned off by holding the switch down until you hear a beep.

Changing the audio source

Press  when the audio system is turned on. The audio source changes as follows each time the button is pressed. If a mode cannot be used, it will be skipped.

Type A:

FM (1, 2) → CD player → AUX → AM → SAT (1, 2, 3)

Type B and C:

FM → SAT → CD player (type B) or CD changer (type C) → RSE* → Bluetooth® audio → AUX → iPod or USB memory → AM

*: If equipped

Adjusting the volume

Press “+” on  to increase the volume and “-” to decrease the volume.

Hold down the button to continue increasing or decreasing the volume.

Selecting a radio station

STEP 1 Press MODE to select the radio mode.

STEP 2 Press "∧" or "∨" on  to select a radio station.

To scan for receivable stations, press and hold the switch until you hear a beep.

Selecting a track/file or song

STEP 1 Press MODE to select CD, RSE, Bluetooth® audio, iPod or USB memory mode.

STEP 2 Press "∧" or "∨" on  to select the desired track/file or song.

Selecting an album

STEP 1 Press MODE to select Bluetooth® audio mode.

STEP 2 Press and hold "∧" or "∨" on  until you hear a beep.

Selecting a folder

STEP 1 Press MODE to select USB memory mode.

STEP 2 Press and hold "∧" or "∨" on  until you hear a beep.

Selecting a disc in the CD changer (type C only)

STEP 1 Press MODE to select the CD mode.

STEP 2 Press and hold "∧" or "∨" on  until you hear a beep.

Selecting a track/file or chapter (vehicles with rear seat entertainment system)

STEP 1 Press MODE to select the RSE mode.

STEP 2 Press "∧" or "∨" on  to select the desired track/file or chapter.

Canceling automatic selection of a radio station

Press  again.

CAUTION

To reduce the risk of an accident


Exercise care when operating the audio switches on the steering wheel.

Detachable pole antenna*

The antenna can be removed.

■ Removing the antenna


STEP 1

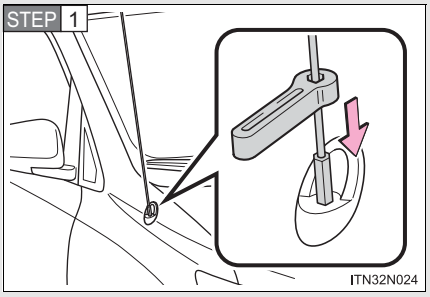

Place the included wrench around the antenna.

When not in use, the wrench is stored in glove box.


STEP 2

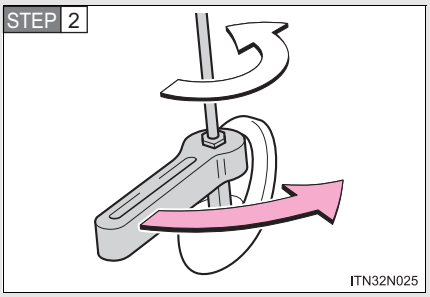


Loosen the antenna with the wrench and remove it.

*: If equipped

■ Installing the antenna

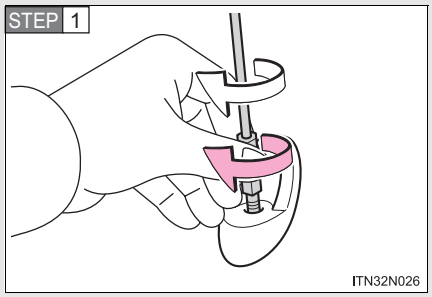

Tighten the antenna by one hand until it will not turn any more.

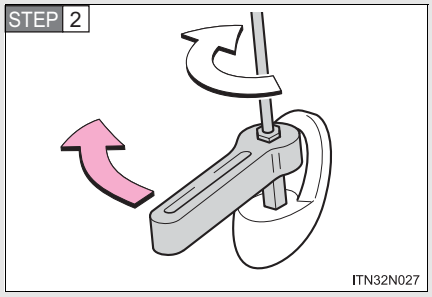

Using the wrench, tighten the antenna an additional 1/8th turn (20 to 45 degrees) to secure it in place.

After tightening the antenna, remove the wrench.

■ About the wrench

After using the included wrench, store it in the glove box for safekeeping.

NOTICE

To avoid damaging the antenna

Remove the antenna in the following situations.

- When using an automatic carwash.
- When the antenna will touch the ceiling of a garage, etc.
- When covering the vehicle with a car cover.

Removing the antenna

- For normal driving, make sure the antenna is installed.
- When removing the antenna to use an automatic carwash, etc., be careful not to lose the antenna. Also, make sure to reinstall the antenna before driving the vehicle.

Using the wrench

- When installing or removing the antenna, use the included wrench.
- Be careful not to scratch or damage the vehicle body with the wrench.
- Do not over-tighten the antenna.
  Over-tightening may damage the antenna.
- Do not use any tools other than the included wrench to install or remove the antenna.
  Otherwise damage may result on the antenna's finish.

Bluetooth® audio system*

The Bluetooth® audio system enables you to enjoy music played on a portable digital audio player (portable player) from the vehicle speakers via wireless communication.

This audio system supports Bluetooth®, a wireless data system capable of playing portable audio music without cables. If your portable player does not support Bluetooth®, the Bluetooth® audio system will not function.

Vehicles with a navigation system

Owners of models equipped with a navigation system should refer to the “NAVIGATION SYSTEM OWNER’S MANUAL”.

Vehicles without a navigation system

Title	Page
Using the Bluetooth® audio system	P. 474
Operating a Bluetooth® enabled portable player	P. 480
Setting up a Bluetooth® enabled portable player	P. 482
Bluetooth® audio system setup	P. 487

*: If equipped

■ **Conditions under which the system will not operate**

- If using a portable player that does not support Bluetooth®
- If the portable player is switched off
- If the portable player is not connected
- If the portable player's battery is low
- If the portable player is behind the seat or in the glove box or console box
- If metal is covering or touching the portable player

■ **When transferring ownership of the vehicle**

Be sure to initialize the system to prevent personal data from being improperly accessed. (→P. 557)

■ **About Bluetooth®**



Bluetooth is a registered trademark of Bluetooth SIG. Inc.

■ **Compatible models**

- Bluetooth® specifications:
  Ver. 1.2, or higher (Recommended: Ver. 2.0+EDR or higher)
- Following Profiles:
  - A2DP (Advanced Audio Distribution Profile) Ver. 1.0 or higher
  - AVRCP (Audio/Video Remote Control Profile) Ver. 1.0 or higher (Ver. 1.3 or higher recommended)

Portable players must correspond to the above specifications in order to be connected to the Bluetooth® audio system. However, please note that some functions may be limited depending on the type of portable player.

■ **Certification for the Bluetooth® audio system**

FCC ID: AJDK025
IC ID: 775E-K025
MADE IN THAILAND

This device complies with Part 15 of the FCC Rules and RSS-Gen of IC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

CAUTION

FCC WARNING

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Radio Frequency Radiation Exposure. This equipment complies with FCC/IC radiation exposure limits set forth for uncontrolled equipment and meets the FCC radio frequency (RF) Exposure Guidelines in Supplement C to OET65 and RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated with at least 7.9 in. (20 cm) and more between the radiator and person's body (excluding extremities: hands, wrists, feet and ankles).

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

While driving

Do not connect portable players or operate the controls.


NOTICE

To prevent damage to portable players

Do not leave portable players in the vehicle. The temperature inside the vehicle may become high, resulting in damage to the player.

Using the Bluetooth® audio system

■ Audio unit

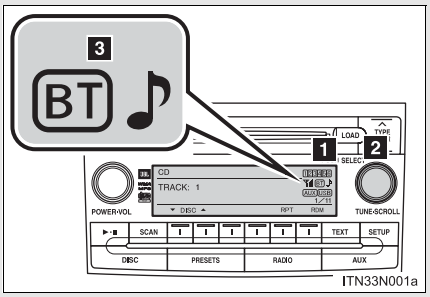

1 Display
A message, name, number, etc. is displayed.


Lower-case characters and special characters cannot be displayed.

2 Selects items such as menu and number
Turn: Selects an item
Press: Inputs the selected item

3 Bluetooth® connection condition

If “BT” is not displayed, the Bluetooth® audio system cannot be used.

■ Microphone

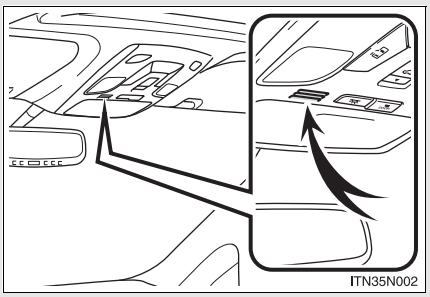

Operating the system using voice commands

By following voice guidance instructions output from the speaker, voice commands enable to the operation of the Bluetooth® audio system without the need to check the display or operate 

.

■ Operation procedure when using voice commands

Press the talk switch and follow voice guidance instructions.

■ Auxiliary commands when using voice commands

The following auxiliary commands can be used when operating the system using a voice command:

Cancel: Exits the Bluetooth® audio system
Repeat: Repeats the previous voice guidance instruction
Go back: Returns to the previous procedure
Help: Reads aloud the function summary if a help comment is registered for the selected function

Using the Bluetooth® audio system for the first time

Before using the Bluetooth® audio system, it is necessary to register a Bluetooth® enabled portable player in the system. Follow the procedure below to register (pair) a portable player:

STEP 1 Press 

until “BT AUDIO” is displayed.

STEP 2 Press  that corresponds to “SETUP”.

The introductory guidance and portable player name registration instructions are heard.

STEP 3 Select “Pair Audio Player (Pair Audio)” using a voice command or 

.

STEP 4 Register a portable player name by either of the following methods:

a. Select “Record Name” using 

, and say the name to be registered.

b. Press the talk switch and say the name to be registered.

A voice guidance instruction to confirm the input is heard.

STEP 5 Select “Confirm” using a voice command or 

.

A passkey is displayed and heard, and a voice guidance instruction for inputting the passkey into the portable player is heard.

STEP 6 Input the passkey into the portable player.

Refer to the manual that comes with the portable player for the operation of the portable player.

Guidance for registration completion is heard.

If the portable player has a Bluetooth® phone, the phone can be registered at the same time. (→P. 537)

Menu list of the Bluetooth® audio system

■ Normal operation

First menu	Second menu	Third menu	Operation detail
“Setup”	“BT•A Setup”	“Pair Audio Player”	Registering a portable player
		“Select Audio Player”	Selecting a portable player to be used
		“Change Name”	Changing the registered name of a portable player
		“List Audio Players”	Listing the registered portable players
		“Set Passkey”	Changing the passkey
		“Delete Audio”	Deleting a registered portable player
	“System Setup”*	“Guidance Volume”	Setting voice guidance volume
		“Device Name”	Displaying the Bluetooth® device address and name
		“Initialize”	Initializing the system

“BT•A Setup” can be canceled by pressing the on-hook switch or saying the voice command, “Cancel”.

*: Selection of system set-up is possible only by the operation of the steering wheel switch.

■ **When using a voice command**

For numbers, say a combination of single digits from zero to nine.

Say the command correctly and clearly.

■ **Situations in which the system may not recognize your voice**

- When driving on rough roads
- When driving at high speeds
- When air is blowing out of the vents onto the microphone
- When the air conditioning fan emits a loud noise

■ **Operations that cannot be performed while driving**


- Operating the system with 

- Registering a portable player to the system

■ **Changing the passkey**

→P. 485

Operating a Bluetooth® enabled portable player

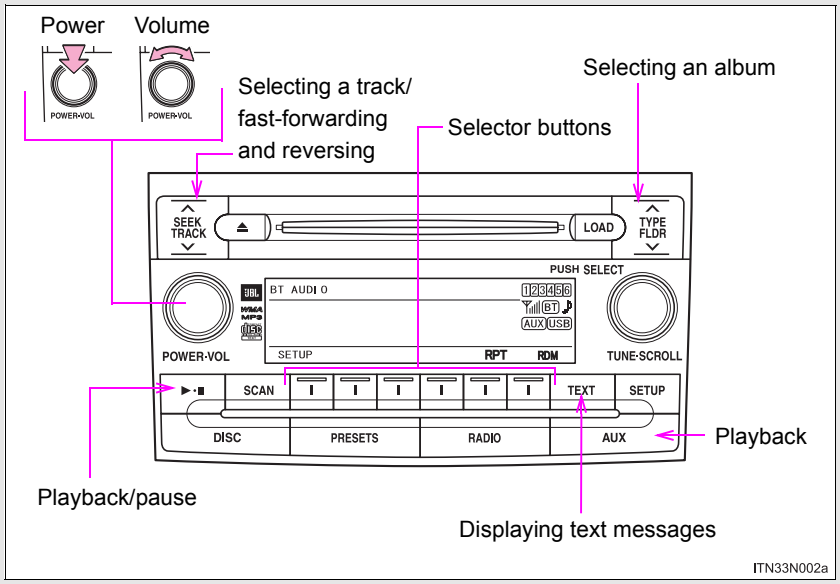

Selecting an album

Press “∧” or “∨” on 

.

Selecting tracks

Press “∧” or “∨” on 

to select the desired track.

Playing and pausing tracks

Press  .

Fast-forwarding and rewinding tracks

Press and hold "∧" or "∨" on  .

Switching the display

Press  .

Each time the button is pressed, the display changes in the following order: Track title → Track title/Artist name → Track title/Album name → Track title/Elapsed time

Using the steering wheel audio switches

→P. 463


■ **Bluetooth® audio system functions**

Depending on the portable player that is connected to the system, certain functions may not be available.

Setting up a Bluetooth® enabled portable player

Registering a portable player in the Bluetooth® audio system allows the system to function. The following functions can be used for registered portable players:

■ Functions and operation procedures

STEP 1 Press 

until “BT AUDIO” is displayed.

STEP 2 Press  that corresponds to “SETUP”

STEP 3 Select one of the following functions using a voice command or 

.

- Registering a portable player
  “Pair Audio Player”
- Selecting a portable player to be used
  “Select Audio Player”
- Changing the registered name
  “Change Name”
- Listing the registered portable players
  “List Audio Players”
- Changing the passkey
  “Set Passkey”
- Deleting a registered portable player
  “Delete Audio Player”

Registering a portable player

Select “Pair Audio Player” using a voice command or 

, and perform the procedure for registering a portable player. (→P. 476)

Selecting a portable player to be used

STEP 1 Select “Select Audio Player” using a voice command or 

.

STEP 2 Select the portable player to be used by either of the following methods, and select “Confirm” by using a voice command or 

:

a. Press the talk switch and say the name of the desired portable player.

b. Press the talk switch and say “List Audio Players”. When the name of the desired portable player is read aloud, press the talk switch.

STEP 3 Press the talk switch and say “From Car” or “From Audio”, and select “Confirm” by using a voice command or 

.

Vehicles without a smart key system

When the portable player is on standby for the connection, it will be automatically connected whenever the engine switch is in either “ACC” or “ON” position.
If a portable player that has already been paired is selected, it is necessary to select “From Car” or “From audio” setting.

Vehicles with a smart key system

When the portable player is on standby for the connection, it will be automatically connected whenever the “ENGINE START STOP” switch is in either ACCESSORY or IGNITION ON position.
If a portable player that has already been paired is selected, it is necessary to select “From Car” or “From audio” setting.

Changing the registered name of a portable player

STEP 1 Select “Change Name” using a voice command or 

.

STEP 2 Select the name of the portable player to be changed by either of the following methods, and select “Confirm” using a voice command or 

:

a. Press the talk switch and say the name of the desired portable player.
b. Press the talk switch and say “List Audio Players”. When the name of the desired portable player is read aloud, press the talk switch.

STEP 3 Press the talk switch or select “Record Name” using 

, and say the new name.

STEP 4 Select “Confirm” using a voice command or 

.

Listing the registered portable players

Select “List Audio Players” using a voice command or 

. The list of registered portable players will be read aloud.
When listing is complete, the system returns to “BT•A Setup”.

Pressing the talk switch while the name of a portable player is being read aloud selects the portable player, and the following functions will become available:

- Selecting a portable player: “Select Audio Player”
- Changing a registered name: “Change Name”
- Deleting a portable player: “Delete Audio Player”

Changing the passkey

STEP 1 Select “Set Passkey” using a voice command or 

.

STEP 2 Press the talk switch, say a 4 to 8-digit number, and select “Confirm” using a voice command or 

.

STEP 3 When the entire number to be registered as a passkey has been input, press 

again.

If the number to be registered has 8 digits, pressing of the knob is not necessary.

Deleting a registered portable player

STEP 1 Select “Delete Audio Player” using a voice command or 

.

STEP 2 Select the portable player to be deleted by either of the following methods and select “Confirm” using a voice command or 

:

a. Press the talk switch and say the name of the desired portable player.

b. Press the talk switch and say “List Audio Players”. When the name of the desired portable player is read aloud, press the talk switch.

If the portable player to be deleted is paired as a Bluetooth® phone, the registration of the mobile phone can be deleted at the same time. A voice guidance instruction to delete a mobile phone is heard.

STEP 3 Select “Confirm” by using a voice command or 

.

■ **The number of portable players that can be registered**

Up to 2 portable players can be registered in the system.


Bluetooth® audio system setup

■ **System setup items and operation procedures**

→P. 553

Rear seat entertainment system features*

The rear seat entertainment system is designed to allow the rear passengers to enjoy audio and DVD video separately from the front audio system.

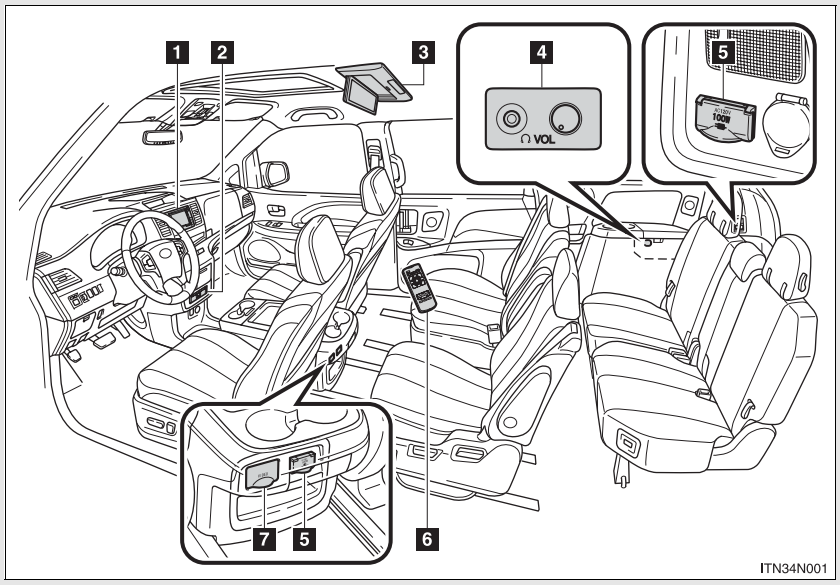


1 Front audio system
2 DVD player
3 Display
4 Headphone volume control dials and headphone jacks
5 Power outlets
6 Rear seat entertainment system controller
7 A/V input port

*: If equipped


Opening and closing the display

■ Opening and closing the display

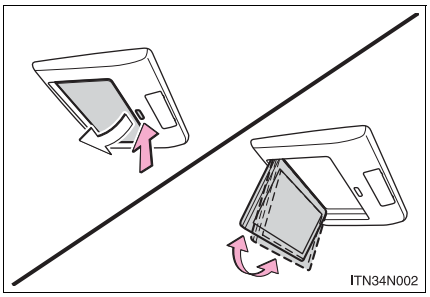

Press the lock release button to open the display.

Pull the display down to an easily viewable angle (at 100° or 120°).

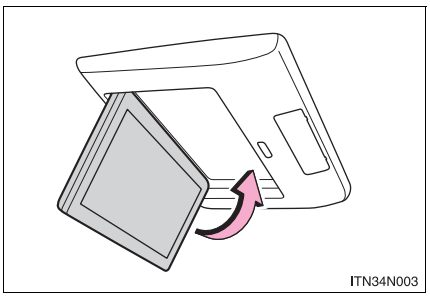

To close the display, push the display up until a click is heard.

The illumination of the screen is automatically turned off when the display is closed. However, the rear seat entertainment system is not turned off. (The sound is not turned off.)

■ Caution display




This screen appears for a few seconds when the rear display is opened.

Vehicles without navigation system only: Press ENT while this screen is displayed to change the language. (The screen will be displayed for approximately 4 seconds.)


Loading a disc

STEP 1

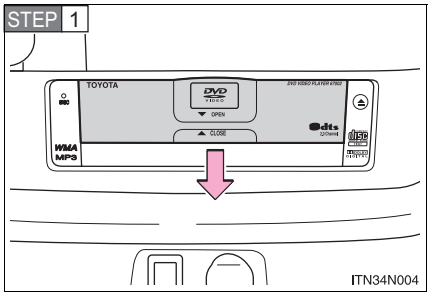

Open the cover.

STEP 2

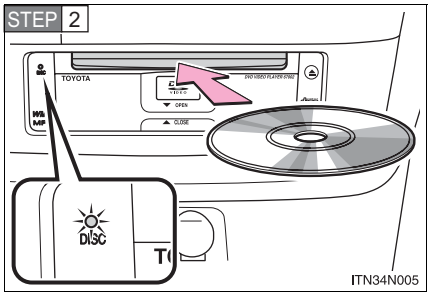

Insert the disc into the slot with the label side up.

The “DISC” indicator light turns on while the disc is loaded.


The player will play the track or chapter, and will repeat it after it reaches the end.

STEP 3 Close the cover.

Ejecting a disc

STEP 1 Open the cover.

STEP 2

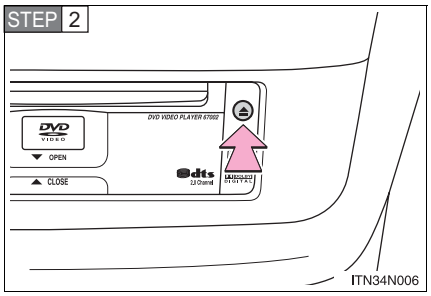


Press ⏏ and remove the disc.

STEP 3 Close the cover.

Turning the rear seat entertainment system power on/off

■ Operating from the front audio system

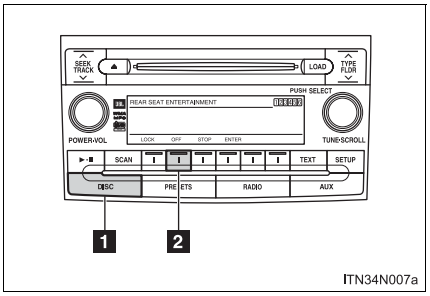


ITN34N007a

1 Selecting either the front audio system or DVD player audio for the speakers

2 Press ⏻ that corresponds to “OFF”, to turn off the rear seat entertainment system.

Press ⏻ that corresponds to “ON”, to turn on the rear seat entertainment system.

■ Operating from the remote controller

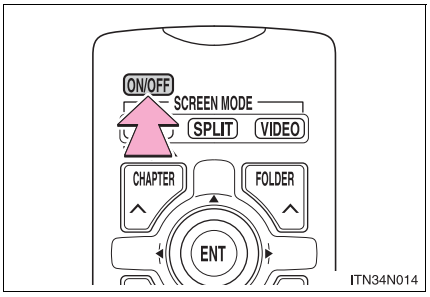

ITN34N014

Press ON/OFF to control the rear seat entertainment screen.


Setting the rear seat entertainment system lock

Vehicles with a navigation system

Owners of models equipped with a navigation system should refer to the “NAVIGATION SYSTEM OWNER’S MANUAL”.

Vehicles without a navigation system

Front audio system

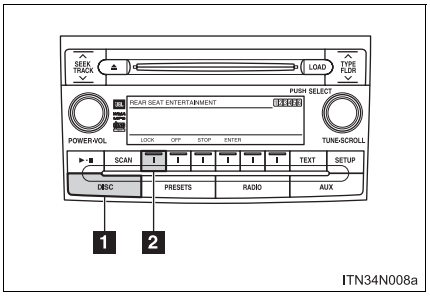


ITN34N008a

1 Selecting either the front audio system or DVD player audio for the speakers

2 Selecting “LOCK” or “UNLOCK” for the rear seat entertainment system

The rear seat entertainment system lock remains on, even when the engine switch is turned off.


DVD player display

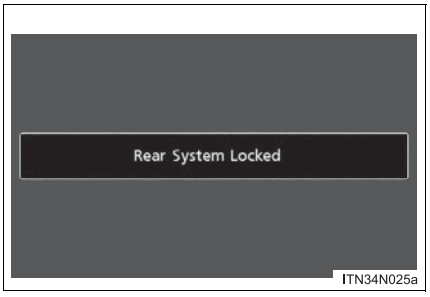

ITN34N025a

Adjusting and turning off the screen

■ Adjusting the screen

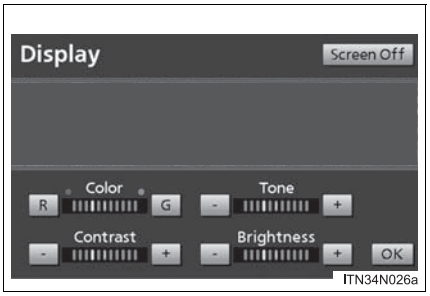


Press DISPLAY on the remote controller.

Select the brightness, contrast, tone or color, and make adjustments. Press ENT to input it.

	"-" or "Red"	"+" or "Green"
"Brightness"	Darkens	Brightens
"Contrast"	Weakens the contrast	Strengthens the contrast
"Tone" (if displayed)	Weakens the tone	Strengthens the tone
"Color" (if displayed)	Strengthens the red color	Strengthens the green color

■ Turning off the screen

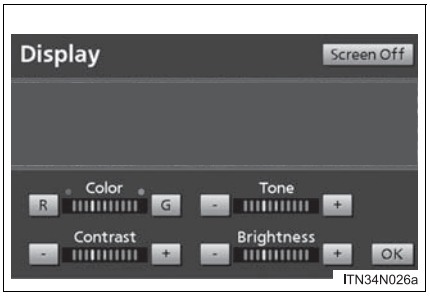


Press DISPLAY on the remote controller.

Press the "Screen off" displayed on the screen.

Press DVD, SPLIT, VIDEO or DISPLAY to turn on the screen.

Headphone jacks

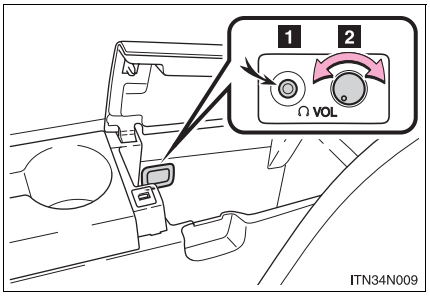

1 To use the headphones, connect them to the jack.

2 To adjust the volume

Turn the knob clockwise to increase the volume.

Turn the knob counterclockwise to decrease the volume.

The rear seat entertainment system can be used when

Vehicles without a smart key system
The engine switch is in the “ACC” or “ON” position.

Vehicles with a smart key system
The “ENGINE START STOP” switch is in the ACCESSORY or IGNITION ON mode.

Discs that can be used

Discs with the marks shown below can be used.
Playback may not be possible depending on recording format or disc features, or due to scratches, dirt or deterioration.

When ⃠ appears on the screen

It indicates that the selected switch is inoperable.


■ **Headphone audio during split screen display**

Audio from the left-hand screen will be played through the left headphone, and audio from the right-hand screen will be played through the right headphone.


■ **Error messages**

Message	Cause	Correction Procedures
No disc found	There is no disc in the DVD player	Insert a disc
Check disc	• The disc is dirty or damaged • The disc is inserted upside down	• Clean the disc • Insert the disc correctly
DVD error	• There is a malfunction within the system • Operation is stopped due to a high temperature inside the player	• Eject the disc and allow the player to cool down • If the malfunction still exists, take the vehicle to your Toyota dealer
No music files found	This indicates that no playable data is included in the disc	Eject the disc
Region code error	The DVD has an incompatible DVD region code	Insert a DVD with a compatible region code

■ **Before using the remote controller (for new vehicle owners)**




Remove the cover.



Remove the insulating sheet.

■ **When the remote controller batteries are fully depleted**



Remove the depleted batteries and install new 2 AA batteries.

■ **If the remote controller batteries are discharged**

The following symptoms may occur.

- The rear seat entertainment system control will not function properly.
- The operational range is reduced.

■ **When using AA batteries**

Batteries can be purchased at your Toyota dealer, electric appliance shops, or camera stores.

Replace only with the same or equivalent type recommended by a Toyota dealer.

Dispose of used batteries according to the local laws.

■ **Headphones**

With some headphones generally available on the market, it may be difficult to receive signals properly. Toyota recommends the use of Toyota genuine wireless headphones.

Please contact your Toyota dealer for further details.

■ **Volume**

- Adjust the volume when you connect the headphones to the jack. Loud volume from headphones may cause hearing loss or damage.
- Conversational speech on some DVDs is recorded at a low volume to emphasize the impact of sound effects. If you adjust the volume assuming that the conversations represent the maximum volume level that the DVD will play, you may be startled by louder sound effects or when you change to a different audio source. Be sure to adjust the volume with this in mind.

CAUTION

While driving

Do not use headphones.
Doing so may cause an accident, resulting in death or serious injury.

When the rear seat entertainment system is not used

Keep the display closed.
In the event of an accident or sudden braking, the opened display may hit an occupant's body, resulting in injury.

To prevent accidents and electric shock

Do not disassemble or modify the remote controller.

When the remote controller is not used

Stow the remote controller.
Injuries may result in the event of an accident or sudden braking.

Removed battery and other parts

Keep away from children. These parts are small and if swallowed by a child they can cause choking. Failure to do so could result in death or serious injury.

NOTICE


For normal operation after replacing the battery

Observe the following precautions to prevent accidents.

- Always work with dry hands.
  Moisture may cause the battery to rust.
- Do not touch or move any other components inside the remote controller.
- Do not bend either of the battery terminals.


Using the DVD player (DVD video)

■ Remote controller

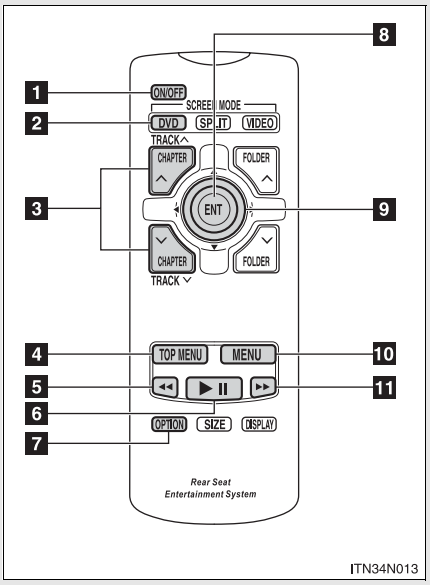


1. Turning on or off the rear entertainment screen
2. Turning on the DVD mode
3. Selecting a chapter
4. Turning on the title selection screen
5. Reversing a disc
6. Playing/pausing a disc
7. Turning on or off the operation switches (icon) on the display
8. Inputting the selected switch (icon)
9. Selecting a switch (icon)
10. Turning on the menu screen
11. Fast forwarding a disc

■ Display (Page 1)

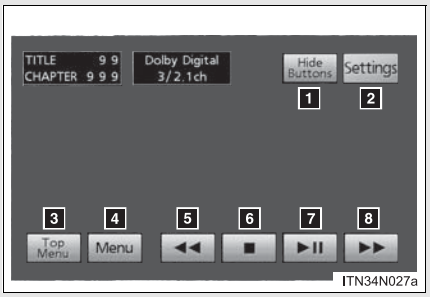

1. Turning off the operation switches (icon) on the display
2. Displaying page 2
3. Turning on the title selection screen for the disc
4. Turning on the menu screen for the disc
5. Reversing a disc
6. Stopping a disc
7. Pausing the disc/canceling the pause
8. Fast forwarding a disc


■ Display (Page 2)

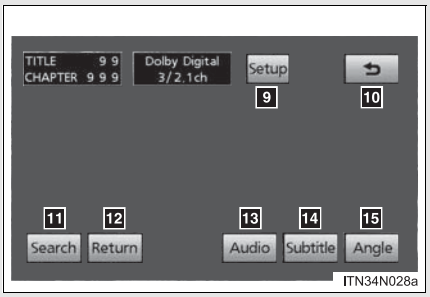

ITN34N028a

9 Displaying the initial setting screen
10 Displaying page 1
11 Search for a title
12 Returning to the previous screen
13 Changing the audio language
14 Changing the subtitle language
15 Changing the angle

■ Front audio system

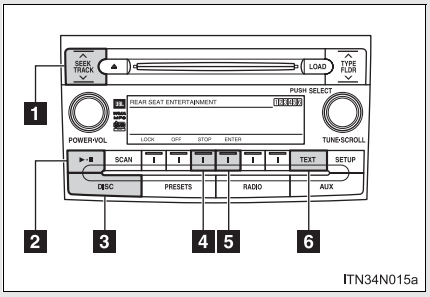

ITN34N015a

1 Press: Selecting a chapter
Press and hold: Fast-forwarding/reversing a disc
2 Playing/pausing a disc
3 Selecting the DVD mode
4 Stopping/playing a disc
5 Starting a disc
6 Displaying the elapsed time

NOTICE

■ Cleaning the display

Wipe the display with a dry soft cloth.
If the screen is wiped with a rough cloth, the surface of the screen may be scratched.

NOTICE

■ **To prevent damage to the remote controller**

- Keep the remote control away from direct sunlight, temperature heat and high humidity.
- Do not drop or knock the remote controller against hard objects.
- Do not sit on or place heavy objects on the remote controller.

■ **DVD player**

Never try to disassemble or oil any part of the DVD player. Do not insert anything other than a disc into the slot.

Turning on or off the operation switches

Press OPTION to turn on the operation switches.

Press OPTION once again or select Hide Buttons to turn off the operation switches.

Turning on the title selection screen

Press TOP MENU or select Top Menu to turn on the title selection screen.

For the operation of the title selection screen, see the separate manual for the DVD disc.

Turning on the menu screen

Press MENU or select Menu to turn on the menu screen. For the operation of the menu screen, see the separate manual for the DVD disc.

Slow playback

Press ▶II or select ▶II to pause video and then press ▶▶ or select ▶▶. Video is played slowly when you press ▶▶ or select ▶▶ by pressing and holding ENT.


Returning to the previous screen

Select Return to return to the previous screen. For the operation of the menu screen, see the separate manual for the DVD disc.

Searching for a title

STEP 1 Select Search on the control icon screen.

STEP 2

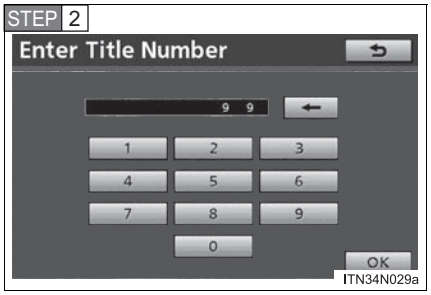

Input the desired title number and then select OK.


: deletes the last input number

: returns to the previous screen

Changing the subtitle language

STEP 1 Select Subtitle on the control icon screen.

STEP 2

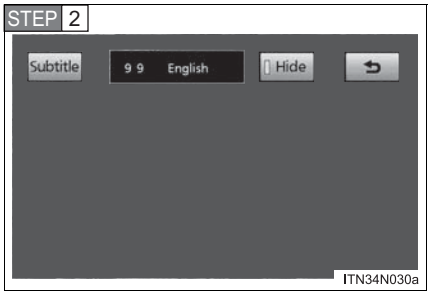

Select Subtitle to display the subtitle language screen.


Each time you press ENT, the next available language is selected.

: returns to the previous screen

Changing the audio language

STEP 1 Select Audio on the control icon screen.

STEP 2

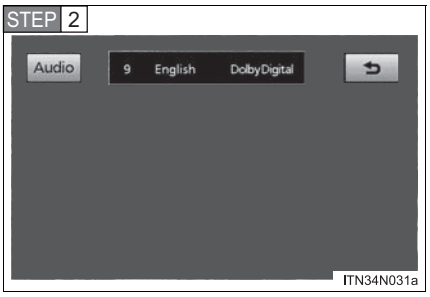

Select Audio to display the audio language screen.


Each time you press ENT, the next available language is selected.

: returns to the previous screen

Changing the angle

STEP 1 Select Angle on the control icon screen.

STEP 2

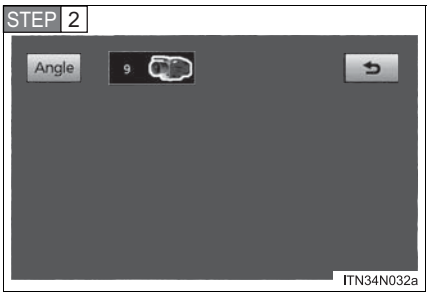

Select Angle to display the screen to change the angle.

Each time you press ENT, the next available angle is selected.

: returns to the previous screen

■ **DVD player and DVD video discs**

This DVD player is compatible NTSC color TV formats. DVD video discs conforming to other formats such as PAL or SECAM cannot be used.

■ **Region codes**

Some DVD video discs have a region code indicating where you can use them. If the DVD video disc is not labeled “ALL” or “1”, you cannot use it in this DVD player. If you attempt to play an inappropriate DVD video disc in this player, “Region code error” appears on the screen. Even if the DVD video disc does not have a region code, in some cases you cannot use it.

■ **Marks shown on DVD video discs**

NTSC	Indicates NTSC format of color TV.
	Indicates the number of audio tracks.
	Indicates the number of language subtitles.
	Indicates the number of angles.
	Indicates the screen to be selected. Wide screen: 16:9 Standard: 4:3
	Indicates regions in which this video disc can be played. ALL: all countries Number: region code

■ **DVD video disc glossary**

- DVD video discs: Digital Versatile Discs that hold world's standard video. DVD video discs have adopted "MPEG2", one of the world standards of digital compression technologies. The picture data is compressed by 1/40 on average and stored. Variable rate encoded technology has been adopted in which the volume of data assigned to the picture is changed depending on the picture format. Audio data is stored using PCM and Dolby digital, which enables higher quality of sound. Furthermore, multi-angle and multi-language features will also help you enjoy the more advanced technology of DVD video.
- Viewer restrictions: This feature limits what can be viewed in conformity with the level of restrictions of the country. The level of restrictions varies depending on the DVD video disc. Some DVD video discs cannot be played at all, or violent scenes are skipped or replaced with other scenes.
  - Level 1: DVD video discs for children can be played.
  - Level 2 - 7: DVD video discs for children and G-rated movies can be played.
  - Level 8: All types of DVD video discs can be played.


- Multi-angle feature: Allows you to enjoy the same scene at different angles.
- Multi-language feature: Allows you to select the language of the subtitles and audio.
- Region codes: Region codes are provided on DVD players and DVD discs. If the DVD video disc does not have the same region code as the DVD player, you cannot play the disc on the DVD player.
- Audio: This DVD player can play liner PCM, Dolby digital, dts and MPEG audio format DVD. Other decoded type cannot be played.
- Title and chapter: Video and audio programs stored on DVD video discs are divided into sections by title and chapter.
- Title: The largest unit of the video and audio programs stored on DVD video discs. Usually, one piece of a movie, one album, or one audio program is assigned as a title.
- Chapter: A unit smaller than a title. A title comprises multiple chapters.

■ **Audio**

Manufactured under licence from Dolby Laboratories. “Dolby” and the double-D symbol are trademarks of Dolby Laboratories.
Manufactured under license under U.S. Patent #’s: 5,451,942; 5,956,674; 5,974,380; 5,978,762; 6,487,535 & other U.S. and worldwide patents issued & pending. DTS is a registered trademark and the DTS logos, Symbol and DTS 2.0 Channel are trademarks of DTS, Inc. ©1996-2008 DTS, Inc. All Rights Reserved.


Using the DVD player (video CD)

■ Remote controller

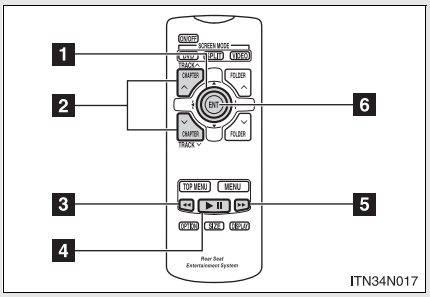


1 Selecting a switch (icon)
2 Selecting a chapter
3 Reversing a disc
4 Playing/pausing a disc
5 Fast forwarding a disc
6 Inputting the selected switch (icon)

■ Display (page 1)

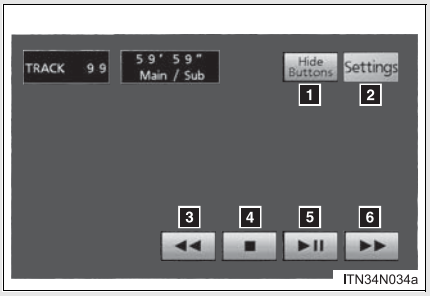

1 Turning off the menu screen
2 Displaying page 1
3 Reversing a disc
4 Stopping a disc
5 Pausing the disc/canceling the pause
6 Fast forwarding a disc

■ Display (page 2)

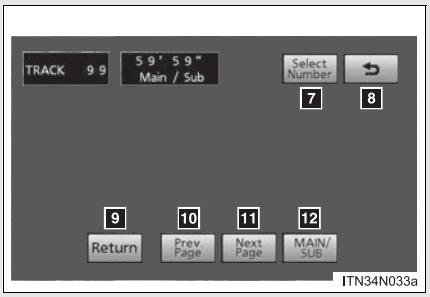

7 Selecting a disc menu number

8 Displaying page 2


9 Turning on the disc menu

10 Returning to the previous page screen (with the disc menu displayed)

11 Proceeding to the next page screen (with the disc menu displayed)

12 Changing to a multiplex transmission

■ Front audio system

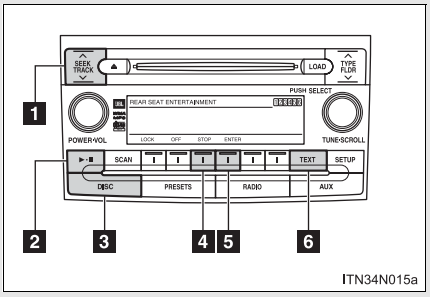

1 Press: Selecting a chapter
Press and hold: Fast-forwarding/reversing a disc

2 Playing/pausing a disc

3 Selecting the DVD mode

4 Stopping/playing a disc

5 Starting a disc


6 Displaying the elapsed time

Selecting a desired screen

■ Selecting a menu number

STEP 1 Select Select Number on the control icon screen.

STEP 2

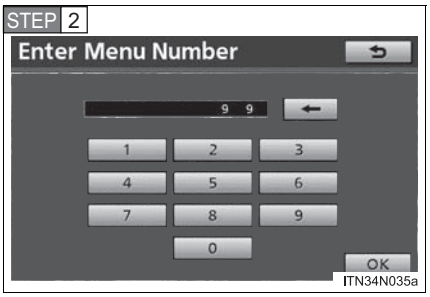

Input the desired menu number and select OK.

: deletes the last input number

: returns to the previous screen

■ Searching manually

Select Prev. Page or Next Page on the screen, or press CHAPTER or CHAPTER until the desired screen appears.

Changing the sound-multiplex mode


Select MAIN/SUB on the control icon screen. The mode cycles through each time the ENT is pressed.

"Main" → "Sub" → "Main/Sub"

Slow playback

Press ▶II or select ▶II to pause video and then press ▶▶ or select ▶▶. Video is played slowly when you press ▶▶ or select ▶▶ by pressing and holding ENT.


Using the DVD player (audio CD/CD text)

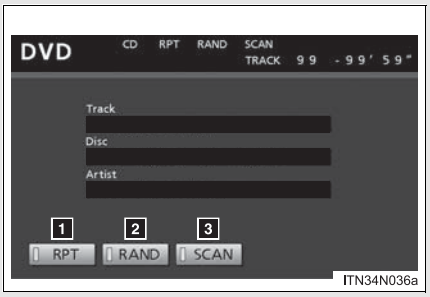

Press DVD to display the control screen.

1 Repeat play
2 Random playback
3 Search playback

Front audio system

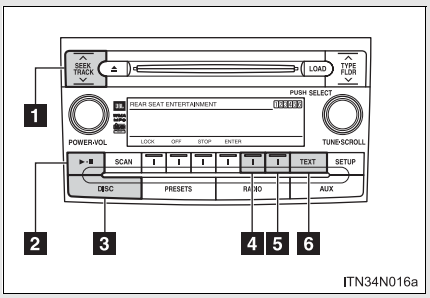


1 Press: Selecting a chapter
Press and hold: Fast-forwarding/reversing a disc
2 Playing/pausing a disc
3 Selecting the DVD mode
4 Repeat play (→P. 427)
5 Random playback (→P. 426)
6 Displaying the elapsed time

Canceling random, repeat and scan play

Select RPT, RAND or SCAN again.

Using the DVD player (WMA/MP3 discs)


■ Using the control screen

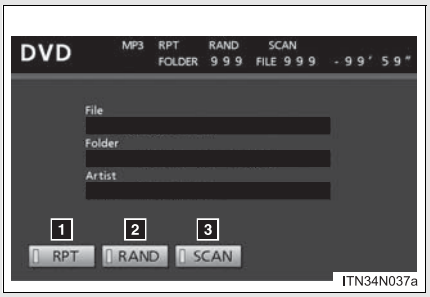

Press DVD to display the control screen.

1 Repeat play
2 Random playback
3 Search playback

■ Front audio system

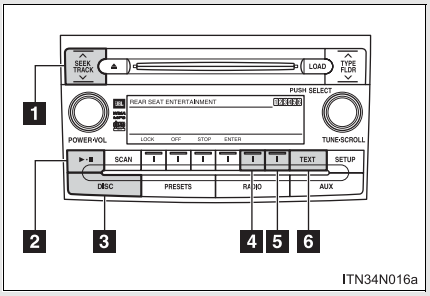

1 Press: Selecting a chapter
Press and hold: Fast-forwarding/reversing a disc
2 Playing/pausing a disc
3 Selecting the DVD mode
4 Repeat play (→P. 436)
5 Random playback (→P. 435)
6 Displaying the elapsed time

Repeat play

■ Repeating a file

Select RPT .

■ Repeating all of the files in a folder

Select RPT , and press and hold ENT .

Random playback

■ Playing files from a particular folder in random order

Select RAND .

■ Playing all of the files on a disc in random order

Select RAND , and press and hold ENT .

Search playback

■ Selecting the desired file by cueing the files in the folder

Select SCAN .

The player will scan all the files in the folder. Each file will be played for 10 seconds.

■ Selecting the desired file by cueing the folders on the disc


Select SCAN , and press and hold ENT .

The player will scan all the folders on the disc. The first file in each folder will be played for 10 seconds.

■ Canceling random, repeat and play back

Select RPT , RAND or SCAN again.

Using the video mode

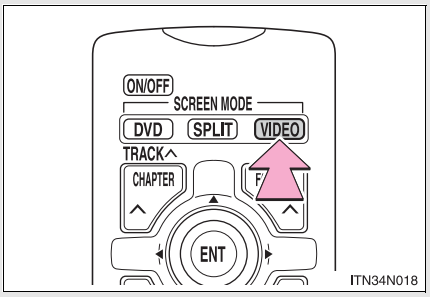


Press VIDEO to select the video mode.

Before switching to the video mode, connect the audio device to the A/V input port.

Using the port

Type A

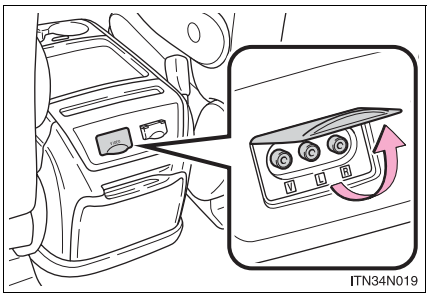

Open the cover.


The A/V input port is composed of 3 input ports.

Yellow: Image input port

White: Left channel audio input port

Red: Right channel audio input port

Type B

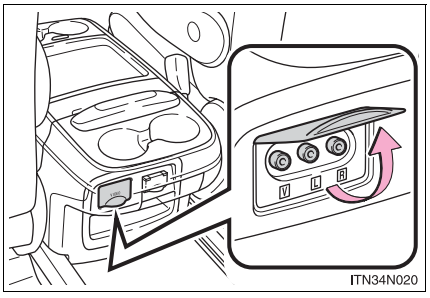

■ **A/V input port**

The rear seat entertainment system plays video and sound when an audio-video device is connected to the A/V input port. For details, refer to the manufacturer's instructions.

■ **Power outlet**


The power outlet is used to connect the audio device. (→P. 594)

⚠ NOTICE

■ **When the A/V input port is not in use**

Keep the A/V input port cover closed.
Inserting anything other than an appropriate plug may cause electrical failure or short circuit.

Changing the DVD initial setting

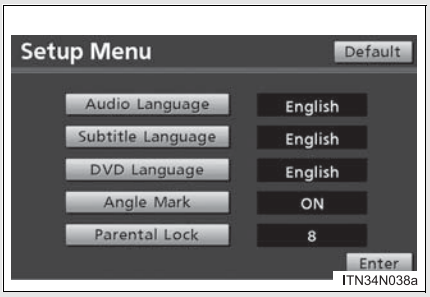


Select Setup to display the initial setting screen.

The following initialization can be changed here.

- Audio language
- Subtitle language
- DVD language
- Angle mark
- Parental lock

Changing the audio language

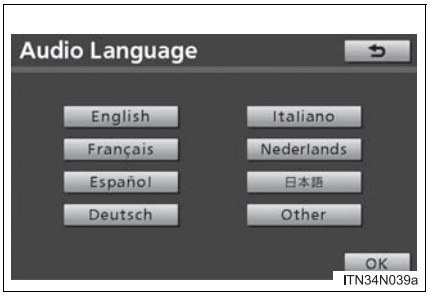

Select “Audio Language”.

Select the language you want to hear, and press ENT to input it.

: returns to the previous screen



Select “Others” if you cannot find the language you want to hear. Enter the appropriate 4-digit language code. (→P. 526)


Input the desired audio language code and the select OK .

: deletes the last input number

: returns to the previous screen

If a code that is not in the list is entered, “Incorrect Code” will appear on the screen.


Changing the subtitle language

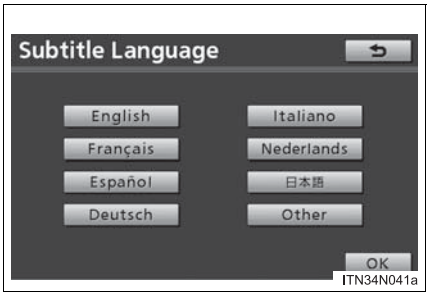

Select “Subtitle Language”.

Select the language you want to read, and press ENT to input it.

: returns to the previous screen

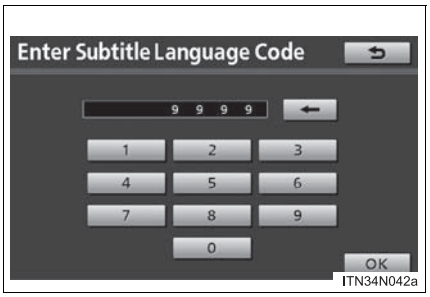

Select “Others” if you cannot find the language you want to read. Enter the appropriate 4-digit language code. (→P. 526)


Input the desired subtitle language code and the select OK .

: deletes the last input number

: returns to the previous screen

If a code that is not in the list is entered, “Incorrect Code” will appear on the screen.


Changing the DVD language

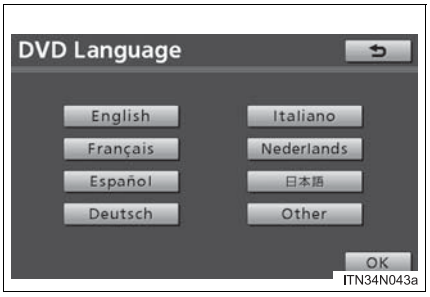

Select “DVD Language”.

Select the language you want to read, and press ENT to input it.

: returns to the previous screen

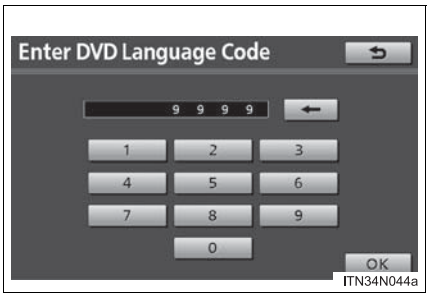

Select “Others” if you cannot find the language you want to read. Enter the appropriate 4-digit language code. (→P. 526)

Input the desired DVD language code and the select OK .

: deletes the last input number

: returns to the previous screen

If a code that is not in the list is entered, “Incorrect Code” will appear on the screen.

Turning on or off the angle mark


The angle mark can be turned on for discs that are multi-angle compatible.

Each time you press 

when “Angle Mark” is selected, the angle mark turns on or off alternately.

Setting viewer restriction levels

Setting a password allows the viewer restriction to be effective.

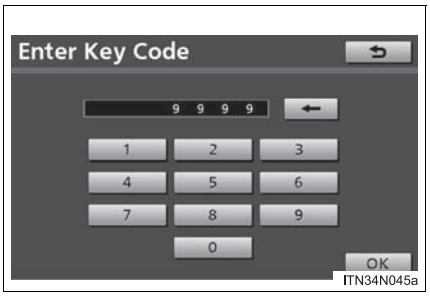


Input the desired personal code and select OK .

: deletes the last input number

: returns to the previous screen

The setting cannot be changed unless the password is entered.

When you forget the password, initialize the password. (→P. 525)

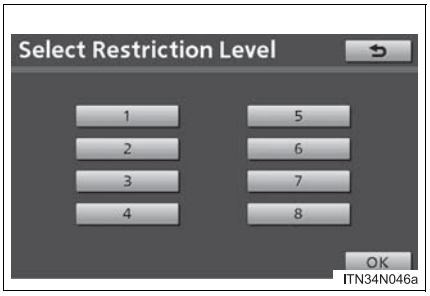


Select a restriction level (1-8), and press ENT . The smaller the level number, the stricter the age limit.

: returns to the previous screen

Setting the display mode

■ Display size

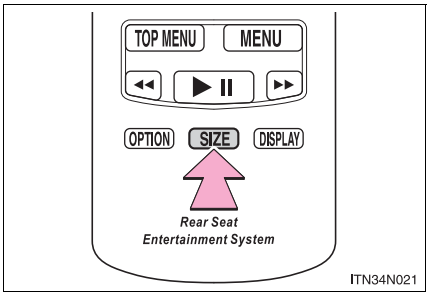

Single screen mode:

Pressing SIZE changes the display modes sequentially as follows:


Normal → Wide → Super wide → Ultra wide → Ultra zoom

Split screen mode:

Pressing SIZE changes the display mode sequentially as follows:

Normal/Normal → Wide/Normal → Wide/Wide → Normal/Wide

■ Display type

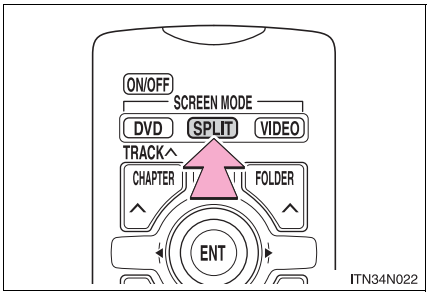

Pressing SPLIT changes the display type sequentially as follows:

left side - DVD, right side - VIDEO → left side - VIDEO, right side - DVD

Press DVD or VIDEO to display either screen with single screen mode.

■ **Returning to the previous screen**

Select  and press 

.

■ **To initialize the password**

Press ◀ on the remote controller or unit ten times when the screen to enter the personal code is displayed.

■ **When changing the display size**

- When using this product, you can select from various display modes. The picture quality can be affected if you select any mode different from the original. (Example: viewing original normal picture [4:3] on a wide display mode [16:9] may distort the picture image)
- Video may appear grainy when viewed in Superwide, Ultrawide and Ultrazoom mode.
- Please note that using this system for the purpose of commercial or public viewing may result in infringement of rights of the copyright owner and/or author of that program/picture/software under copyright protection laws.

■ **Language code list**

Code	Language
0514	English
0618	French
0405	German
0920	Italian
0519	Spanish
2608	Chinese
1412	Dutch
1620	Portuguese
1922	Swedish
1821	Russian
1115	Korean
0512	Greek
0101	Afar
0102	Abkhazian
0106	Afrikaans
0113	Amharic
0118	Arabic
0119	Assamese
0125	Aymara
0126	Azerbaijani
0201	Bashkir
0205	Byelorussian
0207	Bulgarian

Code	Language
0208	Bihari
0209	Bislama
0214	Bengali
0215	Tibetan
0218	Breton
0301	Catalan
0315	Corsican
0319	Czech
0325	Welsh
0401	Danish
0426	Bhutani
0515	Esperanto
0520	Estonian
0521	Basque
0601	Persian
0609	Finnish
0610	Fiji
0615	Faroese
0625	Frisian
0701	Irish
0704	Scots-Gaelic
0712	Galician
0714	Guarani

Code	Language
0721	Gujarati
0801	Hausa
0809	Hindi
0818	Croatian
0821	Hungarian
0825	Armenian
0901	Interlingua
0905	Interlingue
0911	Inupiak
0914	Indonesian
0919	Icelandic
0923	Hebrew
1001	Japanese
1009	Yiddish
1023	Javanese
1101	Georgian
1111	Kazakh
1112	Greenlandic
1113	Cambodian
1114	Kannada
1119	Kashmiri
1121	Kurdish
1125	Kirghiz
1201	Latin
1214	Lingala
1215	Laothian
1220	Lithuanian
1222	Latvian
1307	Malagasy
1309	Maori

Code	Language
1311	Macedonian
1312	Malayalam
1314	Mongolian
1315	Moldavian
1318	Marathi
1319	Malay
1320	Maltese
1325	Burmese
1401	Nauru
1405	Nepali
1415	Norwegian
1503	Occitan
1513	(Afan) Oromo
1518	Oriya
1601	Punjabi
1612	Polish
1619	Pashto, Pushto
1721	Quechua
1813	Rhaeto-Romance
1814	Kirundi
1815	Romanian
1823	Kinyarwanda
1901	Sanskrit
1904	Sindhi
1907	Sangho
1908	Serbo-Croatian
1909	Sinhalese
1911	Slovak
1912	Slovenian
1913	Samoan

Code	Language
1914	Shona
1915	Somali
1917	Albanian
1918	Serbian
1919	Siswati
1920	Sesotho
1921	Sundanese
1923	Swahili
2001	Tamil
2005	Telugu
2007	Tajik
2008	Thai
2009	Tigrinya
2011	Turkmen
2012	Tagalog

Code	Language
2014	Setswana
2015	Tonga
2018	Turkish
2019	Tsonga
2020	Tatar
2023	Twi
2111	Ukrainian
2118	Urdu
2126	Uzbek
2209	Vietnamese
2215	Volapük
2315	Wolof
2408	Xhosa
2515	Yoruba
2621	Zulu

Hands-free phone system (for cellular phone) features*

The hands-free system is a function that allows you to use your cellular phone without touching it.

This system supports Bluetooth®, which allows you to make or receive calls without using cables to connect a cellular phone to the system, and without operating the cellular phone.

With navigation system

Owners of models equipped with a navigation system should refer to the “NAVIGATION SYSTEM OWNER’S MANUAL”.

Without navigation system

■ Hands-free system quick guide

STEP 1 Setting a cellular phone. (→P. 534)

STEP 2 Adding an entry to the phonebook (Up to 20 names can be stored). (→P. 558)

STEP 3 Dialing by inputting a name. (→P. 544)

*: If equipped

Title	Page
Using the hands-free phone system ■ Operating the system using a voice command ■ Using the hands-free phone system for the first time ■ Menu list of the hands-free phone system	P. 534
Making a phone call ■ Dialing by inputting a number ■ Dialing by inputting a name ■ Speed dialing ■ When receiving a phone call ■ Transferring a call ■ Using the call history memory	P. 543
Setting a cellular phone ■ Registering a cellular phone ■ Selecting the cellular phone to be used ■ Changing a registered name ■ Listing the registered cellular phone ■ Deleting a cellular phone ■ Changing the passkey ■ Turning the hands-free phone automatic connection on/off	P. 548
Security and system setup ■ Setting or changing the PIN ■ Locking or unlocking the phone book ■ Setting voice guidance volume ■ Initialization	P. 553
Using the phone book ■ Adding a new phone number ■ Setting speed dials ■ Changing a registered name ■ Deleting registered data ■ Deleting speed dials ■ Listing the registered data	P. 558

■ **Conditions under which the system will not operate**

- If using a mobile phone that does not support Bluetooth®
- If the mobile phone is switched off
- If you are outside service range
- If the mobile phone is not connected
- If the mobile phone's battery is low
- If the mobile phone is behind the seat or in the glove box or console box
- If metal is covering or touching the phone

■ **When using the hands-free system**

- The audio system and voice guidance are muted when making a call.
- If both parties speak at the same time, it may be difficult to hear.
- If the incoming call volume is overly loud, an echo may be heard.
- Try to face toward the microphone as much as possible when speaking.
- In the following circumstances, it may be difficult to hear the other party:
  - When driving on unpaved roads
  - When driving at high speeds
  - When a window is open
  - When the air conditioning is blowing directly on the microphone
  - When the air conditioning is set to high

■ **When transferring ownership of the vehicle**

Be sure to initialize the system to prevent personal data from being improperly accessed.

About Bluetooth®



Bluetooth is a registered trademark of Bluetooth SIG. Inc.

Compatible models

Compatible with HFP (Hands Free Profile) Ver. 1.5 and OPP (Object Push Profile) Ver. 1.1.
If your cellular phone does not support HFP, you cannot enter the Bluetooth® phone. If your cellular phone supports OPP alone, you cannot use the Bluetooth® phone.

Certification for the hands-free phone system

FCC ID: AJDK025
IC ID: 775E-K025
MADE IN THAILAND

This device complies with Part 15 of the FCC Rules and RSS-Gen of IC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

⚠ CAUTION

■ FCC WARNING

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Radio Frequency Radiation Exposure. This equipment complies with FCC/IC radiation exposure limits set forth for uncontrolled equipment and meets the FCC radio frequency (RF) Exposure Guidelines in Supplement C to OET65 and RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated with at least 7.9 in. (20 cm) and more between the radiator and person's body (excluding extremities: hands, wrists, feet and ankles).

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

■ Caution while driving

Do not use a cellular phone, or connect the Bluetooth® phone.


⚠ NOTICE

■ To prevent damage to a cellular phone

Do not leave a cellular phone in the vehicle. The temperature inside may become high resulting in damage to the phone.

Using the hands-free phone system (for cellular phone)*

■ Audio unit

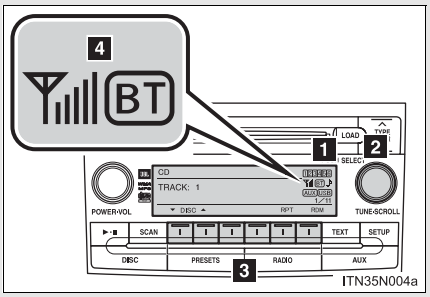

1 Displays such items as messages, name, and phone number

Lower-case characters and special characters, such as an umlaut, cannot be displayed.

2 Selects items such as menu or number

Turn: Selects an item

Press: Inputs the selected item


3 Selects speed dials

4 Bluetooth® connection condition and reception level

If “BT” is not displayed, the hands-free phone system cannot be used.

*: If equipped

■ Steering wheel telephone switches

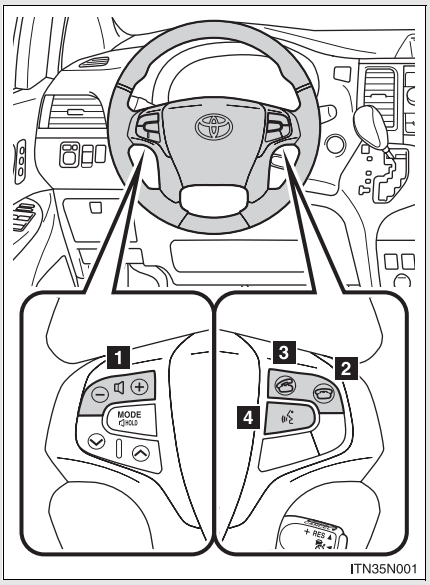

1 Volume


The voice guidance volume cannot be adjusted using this button.

2 Hands-free phone system off/ends a call/refuses a call

3 Hands-free phone system on/starts a call

4 Press: Voice command system on
Press and hold: Voice command system off

■ Microphone

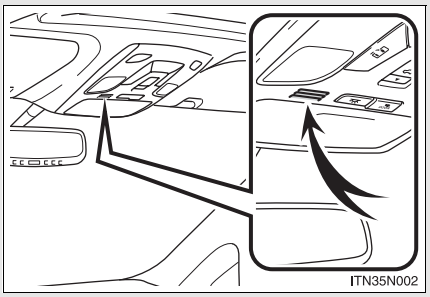

Operating the system using a voice command

By following voice guidance instructions output from the speaker, voice commands can be given to allow for operation of the hands-free phone system without checking the display or operating 

.

■ Operation procedure when using a voice command

Press the talk switch and follow voice guidance instructions.

■ Auxiliary commands when using a voice command

The following auxiliary commands can be used when operating the system using a voice command:

Cancel: Exits the hands-free phone system
Repeat: Repeats the previous voice guidance instruction
Go back: Returns to the previous procedure
Help: Reads aloud the function summary if a help comment is registered for the selected function

Using the hands-free phone system for the first time

Before using the hands-free phone system, it is necessary to register a cellular phone in the system. The phone registration mode will be entered automatically when starting the system with no cellular phone registered. Follow the procedure below to register a cellular phone:

STEP 1 Press off-hook switch or talk switch.

The introductory guidance and phone name registration instructions are heard.

STEP 2 Select “Pair Phone” using a voice command or 

.

STEP 3 Register a phone name by either of the following methods.

a. Select “Record Name” using 

, and say a name to be registered.

b. Press the talk switch and say a name to be registered.

A voice guidance instruction to confirm the input is heard.

STEP 4 Select “Confirm” using a voice command or 

.

Registration to the hands-free phone system only

STEP 5 Select “Phone Only” using a voice command or 

.

Registration to the hands-free phone system and Bluetooth® audio system at the same time

STEP 5 Select “Internal Audio (Int, Audio)” using a voice command or 

.

STEP 6 Select “Confirm” by using a voice command or 

.

A passkey is displayed and heard, and a voice guidance instruction for inputting the passkey into the cellular phone is heard.

STEP 7 Input the passkey into the cellular phone.

Refer to the manual that comes with the cellular phone for the operation of the phone.

Guidance for registration completion is heard.

Menu list of the hands-free phone system

■ Normal operation

First menu	Second menu	Third menu	Operation detail
“Callback”	-	-	Dialing a number stored in the incoming call history memory
“Redial”	-	-	Dialing a number stored in the outgoing call history memory
“Dial by number”	-	-	Dialing by inputting a number
“Dial by name”	-	-	Dialing by inputting a name registered in the phone book
“Phone-book”	“Add Entry”	-	Adding a new number
	“Change Name”	-	Changing a name in the phone book
	“Delete Entry”	-	Deleting the phone book data
	“Delete Speed Dial (Del Spd Dial)”	-	Deleting a registered speed dial
	“List Names”	-	Listing the phone book data
	“Set Speed Dial (Speed Dial)”	-	Registering a speed dial

First menu	Second menu	Third menu	Operation detail
“Setup”	“Security”	“Set PIN”	Setting a PIN code
		“Phonebook Lock”	Locking the phone book
		“Phonebook Unlock”	Unlocking the phone book
	“Phone Setup”	“Pair Phone”	Registering the cellular phone to be used
		“Change Name”	Changing a registered name of a cellular phone
		“Delete Phone”	Deleting a registered cellular phone
		“List Phones”	Listing the registered cellular phones
		“Select Phone”	Selecting a cellular phone to be used
		“Set Passkey”	Changing the passkey
		“Hands-free power”	Setting the hands-free power on/off
	“System Setup”	“Guidance Volume”	Setting voice guidance volume
		“Device Name”	Displaying device information
		“Initialize”	Initialization

■ Using a short cut key

First menu	Second menu	Operation detail
“Dial XXX (name)”	-	Dialing a number registered in the phone book
“Dial XXX (number)”	-	Dialing the input numbers
“Phone book add entry”	-	Adding a new number
“Phone book change name”	-	Changing the name of a phone number in the phone book
“Phone book delete entry”	-	Deleting phone book data
“Phone book set speed dial”	-	Registering a speed dial
“Phone book delete speed dial”	-	Deleting a speed dial
“Phonebook”	“Phonebook Unlock”	Unlocking the phone book
	“Phonebook Lock”	Locking the phone book
“Phone book list names”	-	Listing the phone book data

■ **Automatic adjustment of volume**

When vehicle speed is 50 mph (80 km/h) or more, the volume automatically increases. The volume returns to the previous volume setting when vehicle speed drops to 43 mph (70 km/h) or less.

■ **When using a voice command**

- For numbers, say a combination of single digits from zero to nine, # (pound), ∗ (star), and + (plus).
- Say a command correctly and clearly.

■ **The system may not recognize your voice in the following situations:**

- When driving on a rough road
- When driving at high speeds
- When air is blowing out of the vents onto the microphone
- When the air conditioning fan emits a loud noise

■ **The following cannot be performed while driving:**

- Operating the system with 

- Registering a cellular phone to the system

■ **Changing the passkey**

→P. 552

Making a phone call

■ **Making a phone call**

- Dialing by inputting a number
  “Dial by number”
- Dialing by inputting a name
  “Dial by name”
- Speed dialing
- Dialing a number stored in the outgoing history memory
  “Redial”
- Dialing a number stored in the incoming history memory
  “Call back”

■ **Receiving a phone call**

- Answering the phone
- Refusing the call

■ **Transferring a call**

■ **Using the call history memory**

- Dialing
- Storing data in the phone book
- Deleting

Dialing by inputting a number

STEP 1 Press the talk switch and say “Dial by number”.

STEP 2 Press the talk switch and say the phone number.

STEP 3 Dial by one of the following methods:

a. Press the off- hook switch.

b. Press the talk switch and say “Dial”.

c. Select “Dial” using 

.

Dialing by inputting a name

STEP 1 Press the talk switch and say “Dial by name”.

STEP 2 Select a registered name to be input by either of the following methods:

a. Press the talk switch and say a registered name.

b. Press the talk switch and say “List names”. Press the talk switch while the desired name is being read aloud.

STEP 3 Dial by one of the following methods:

a. Press the off-hook switch.

b. Press the talk switch and say “Dial”.

c. Select “Dial” using 

.

Speed dialing

STEP 1 Press the off-hook switch.

STEP 2 Press the preset button in which the desired number is registered.

STEP 3 Press the off-hook switch.

When receiving a phone call

Answering the phone

Press the off-hook switch.

Refusing the call

Press the on-hook switch.

Transferring a call

A call can be transferred between the cellular phone and system while dialing or receiving a call, or during a call. Use one of the following methods:

a. Operate the cellular phone.

Refer to the manual that comes with the cellular phone for the operation of the phone.

b. Press the off-hook switch*1.

c. Press the talk switch and say “Call Transfer”*2.

*1: This operation can be performed only when transferring a call from the cellular phone to the system during a call.

*2: While the vehicle is in motion, a call cannot be transferred from the system to the cellular phone.

Using the call history memory

Follow the procedure below to use a number stored in the call history memory:

STEP 1 Press the talk switch and say “Redial” (when using a number stored in the outgoing call history memory) or “Call back” (when using a number stored in the incoming call history memory).

STEP 2 Select the number by either of the following methods:

a. Say “Previous” or “Go back” until the desired number is displayed.

b. Select the desired number using 

.

The following operations can be performed:

Dialing: Press the off-hook switch or select “Dial” using a voice command or 

.

Storing the number in the phone book: Select “Store” using a voice command or 

.

Deleting: Select “Delete” using a voice command or 

.

■ **Call history**

Up to 5 phone numbers can be stored in each of the outgoing and incoming call history memories.

■ **When talking on the phone**

- Do not talk simultaneously with the other party.
- Keep the volume of the received voice down. Otherwise, voice echo will increase.

Setting a cellular phone

Registering a cellular phone in the hands-free phone system allows the system to function. The following functions can be used for registered cellular phones:

■ Functions and operation procedures

To enter the menu for each function, follow the steps below using a voice command or 

:

- Registering a cellular phone
  1. “Setup” → 2. “Phone Setup” → 3. “Pair Phone”
- Selecting the cellular phone to be used
  1. “Setup” → 2. “Phone Setup” → 3. “Select Phone”
- Changing a registered name
  1. “Setup” → 2. “Phone Setup” → 3. “Change Name”
- Listing the registered cellular phones
  1. “Setup” → 2. “Phone Setup” → 3. “List Phones”
- Deleting a cellular phone
  1. “Setup” → 2. “Phone Setup” → 3. “Delete Phone”
- Changing the passkey
  1. “Setup” → 2. “Phone Setup” → 3. “Set Passkey”
- Turning the hands-free phone automatic connection on/off
  1. “Setup” → 2. “Phone Setup” → 3. “Hands-free power”

Registering a cellular phone

Select “Pair Phone” using a voice command or 

, and do the procedure for registering a cellular phone. (→P. 537)

Selecting the cellular phone to be used

STEP 1 Select “Select Phone” using a voice command or 

.

Pattern A

STEP 2 Select the cellular phone to be used by either of the following methods, and select “Confirm” using a voice command or 

:

a. Press the talk switch and say the desired phone name.

b. Press the talk switch and say “List phones”. While the name of the desired cellular phone is being read aloud, press the talk switch.

Pattern B

STEP 2 Select the cellular phone to be used using 

.

Changing a registered name

STEP 1 Select “Change Name” using a voice command or 

.

STEP 2 Select the name of the cellular phone to be changed by one of the following methods:

a. Press the talk switch and say the desired phone name, and select “Confirm” using a voice command or 

.

b. Press the talk switch and say “List phones”. While the desired phone name is being read aloud, press the talk switch.

c. Select the desired phone name using 

.

STEP 3 Press the talk switch or select “Record Name” using 

, and say a new name.

STEP 4 Select “Confirm” using a voice command or 

.

Listing the registered cellular phones

Selecting “List Phones” using a voice command or 

causes the list of registered cellular phones to be read aloud.
When listing is complete, the system returns to “Phone Setup”.

Pressing the talk switch while the name of a cellular phone is being read selects the cellular phone, and the following functions will be available:

- Selecting a cellular phone: “Select Phone”
- Changing a registered name: “Change Name”
- Deleting a cellular phone: “Delete Phone”

Deleting a cellular phone

STEP 1 Select “Delete Phone” using a voice command or 

.

STEP 2 Select the cellular phone to be deleted by either of the following methods and select “Confirm” using a voice command or 

:

a. Press the talk switch and say the name of the desired cellular phone.
b. Press the talk switch and say “List phones”. While the name of the desired cellular phone is being read aloud, press the talk switch.

Changing the passkey

STEP 1 Select “Set Passkey” using a voice command or 

.

STEP 2 Press the talk switch, say a 4 to 8-digit number, and select “Confirm” using a voice command or 

.

The number should be input 1 digit at a time.

STEP 3 When the entire number to be registered as a passkey has been input, press 

once again.

■ Turning on the automatic connection

Select “Hands-free Power” using a voice command or 

.

Select “Turn on” using a voice command or 

.

■ The number of cellular phones that can be registered

Up to 6 cellular phones can be registered in the system.

Security and system setup

To enter the menu of each setting, follow the steps below:

■ Security setting items and operation procedure

- Setting or changing the PIN (Personal Identification Number)
  1. “Setup” → 2. “Security” → 3. “Set PIN”
- Locking the phone book
  1. “Setup” → 2. “Security” → 3. “Phonebook Lock”
- Unlocking the phone book
  1. “Setup” → 2. “Security” → 3. “Phonebook Unlock”

■ System setup items and operation procedure

- Setting voice guidance volume
  1. “Setup” → 2. “System Setup” → 3. “Guidance Volume”
- Displaying the Bluetooth® device address and name
  1. “Setup” → 2. “System Setup” → 3. “Device Name”
- Initialization
  1. “Setup” → 2. “System Setup” → 3. “Initialize”



can only be used for system setup operation.

Setting or changing the PIN

■ Setting a PIN

STEP 1 Select “Set PIN” using a voice command or 

.

STEP 2 Enter a PIN using a voice command or 

.

When using 

, input the code 1 digit at a time.

■ Changing the PIN

STEP 1 Select “Set PIN” using a voice command or 

.

STEP 2 Enter the registered PIN using a voice command or 

.

STEP 3 Enter a new PIN using a voice command or 

.

When using 

, input the code 1 digit at a time.

Locking or unlocking the phone book

STEP 1 Select “Phonebook Lock (Phbk Lock)” or “Phonebook unlock (Phbk Unlock)” using a voice command or 

.

STEP 2 Input the PIN by either of the following methods and select “Confirm” using a voice command or 

:

a. Press the talk switch and say the registered PIN.

b. Input a registered PIN using 

.

Setting voice guidance volume

STEP 1 Select “Guidance Volume” using 

.

STEP 2 Change the voice guidance volume.

To decrease the volume: Turn 

counterclockwise.

To increase the volume: Turn 

clockwise.

Displaying the Bluetooth® device address and name

STEP 1 Select “Device Name” using 

.

STEP 2 Turn 

to display the Bluetooth® device address and name.

STEP 3 Select “Go Back” using 

to return to “System Setup”.

Initialization

STEP 1 Select “Initialize” and then “Confirm” using 

.

STEP 2 Select “Confirm” using 

.

■ **Initialization**

- The following data in the system can be initialized:
  - Phone book
  - Outgoing and incoming call history
  - Speed dials
  - Registered cellular phone data
  - Security code
- Once the initialization has been completed, the data cannot be restored to its original state.

■ **When the phone book is locked**

The following functions cannot be used:

- Dialing by inputting a name
- Speed dialing
- Dialing a number stored in the call history memory
- Using the phone book

Using the phone book

To enter the menu of each setting, follow the steps below:

- Adding a new phone number
  1. “Phonebook” → 2. “Add Entry”
- Setting speed dial
  1. “Phonebook” → 2. “Set Speed Dial (Speed Dial)”
- Changing a registered name
  1. “Phonebook” → 2. “Change Name”
- Deleting registered data
  1. “Phonebook” → 2. “Delete Entry”
- Deleting speed dial
  1. “Phonebook” → 2. “Delete Speed Dial (Del Spd Dial)”
- Listing the registered data
  1. “Phonebook” → 2. “List Names”

Adding a new phone number

The following methods can be used to add a new phone number:

- Inputting a phone number using a voice command
- Transferring data from the cellular phone
- Inputting a phone number using 

- Selecting a phone number from outgoing or incoming call history

■ Adding procedure

STEP 1 Select “Add Entry” using a voice command or 

.

STEP 2 Use one of the following methods to input a phone number:

Inputting a phone number using a voice command

STEP2-1: Select “By Voice” using a voice command or 

.

STEP2-2: Press the talk switch, say the desired number, and select “Confirm” using a voice command.

Transferring data from the cellular phone

STEP2-1: Select “By Phone” and then “Confirm” using a voice command or 

.

STEP2-2: Transfer the data from the cellular phone.

Refer to the manual that comes with the cellular phone for the details of transferring data.

STEP2-3: Select the data to be registered by either of the following methods:

a. Say “Previous” or “Next” until the desired data is displayed, and select “Confirm” using a voice command.

b. Select the desired data using 

.

Inputting a phone number using 

STEP2-1: Select “Manual Input” using 

.

STEP2-2: Input a phone number using 

, and press 

once again.

Input the phone number 1 digit at a time.

Selecting a phone number from outgoing or incoming call history

STEP2-1: Select “Call History” using a voice command or 

.

STEP2-2: Select “Outgoing” or “Incoming” using a voice command or 

.

STEP2-3: Select the data to be registered by either of the following methods:

a. Say “Previous” or “Go back” until the desired data is displayed, and select “Confirm” using a voice command.

b. Select the desired data using 

.

STEP 3 Select the name to be registered by either of the following methods, and select “Confirm” using a voice command or 

:

a. Press the talk switch and say the desired name.

b. Select “Record Name” using 

, and say the desired name.

STEP 4 Select “Confirm” using a voice command or 

.

In STEP 4, selecting “Set Speed Dial (Speed Dial)” instead of “Confirm” registers the newly added phone number as a speed dial.

Setting speed dials

STEP 1 Select “Set Speed Dial (Speed Dial)” using a voice command or 

.

STEP 2 Select the data to be registered as a speed dial by one of the following methods:

a. Press the talk switch, say desired name, and select “Confirm” using a voice command or 

.

b. Press the talk switch, and say “List names”. While the desired name is being read aloud, press the talk switch, and select “Confirm” using a voice command or 

.

c. Select the desired data using 

.

STEP 3 Select the desired preset button, and register the data into speed dial by either of the following methods:

a. Press the desired preset button, and select “Confirm” using a voice command or 

.

b. Press and hold the desired preset button.

Changing a registered name

STEP 1 Select “Change Name” using a voice command or 

.

STEP 2 Select the name to be changed by one of the following methods.

a. Press the talk switch, say desired name, and select “Confirm” using a voice command or 

.

b. Press the talk switch, and say “List names”. While the desired name is being read aloud, press the talk switch, and select “Confirm” using a voice command or 

.

c. Select the desired name using 

.

STEP 3 Press the talk switch or select “Record Name” using 

, and say a new name.

STEP 4 Select “Confirm” using a voice command or 

.

Deleting registered data

STEP 1 Select “Delete Entry” using a voice command or 

.

STEP 2 Select the data to be deleted by either of the following methods, and select “Confirm” using a voice command or 

:

a. Press the talk switch, and say the name of the desired phone number to be deleted.

b. Press the talk switch, say “List Names”. While the name of the desired phone number is being read aloud, press the talk switch.

c. Select the desired data using 

.

Deleting speed dials

STEP 1 Select “Delete Speed Dial (Del Spd Dial)” using a voice command or 

.

STEP 2 Press the preset button in which the desired speed dial is registered, and select “Confirm” using a voice command or 

.

Listing the registered data

Selecting “List names” using a voice command causes a list of the registered data to be read aloud.


When listing is complete, the system returns to “Phonebook”.
Pressing the talk switch while the desired data is being read aloud selects the data, and the following functions will be available.

- Dialing: “Dial”
- Changing a registered name: “Change Name”
- Deleting an entry: “Delete Entry”
- Setting a speed dial: “Set Speed Dial (Speed Dial)”

Limitation of number of digits

A phone number that exceeds 24 digits cannot be registered.


Interior lights list

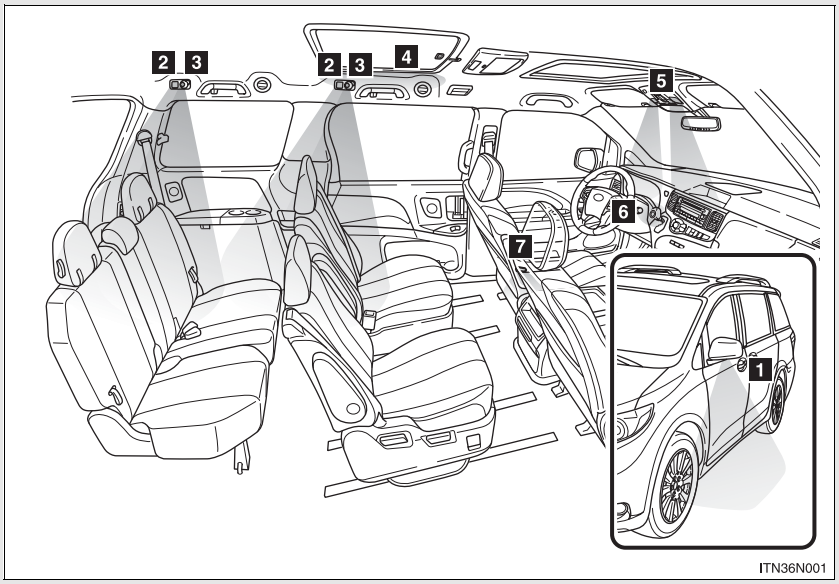

1 Outer foot lights (if equipped)
2 Rear interior light
3 Rear personal/interior lights (→P. 569)
4 Rear ceiling lights (if equipped) (→P. 570)
5 Front personal/interior lights (→P. 568)
6 Engine switch light (if equipped)
7 Front door courtesy lights (if equipped)

Personal/interior light main switch (vehicles with overhead console)

Type A

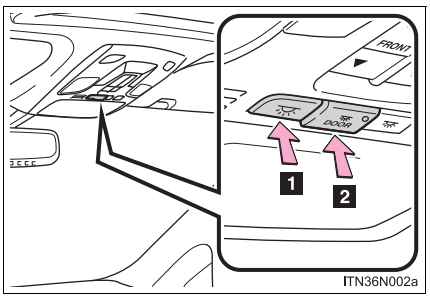

1 On


Push ☼ to activate the interior lights.

The personal/interior lights cannot be individually turned off with this switch.

2 Door position


When door mode is active it will be indicated by a green light on the button. In door mode, interior lights will turn on when a door is opened. The personal/interior lights cannot be individually turned off with this switch.

Type B

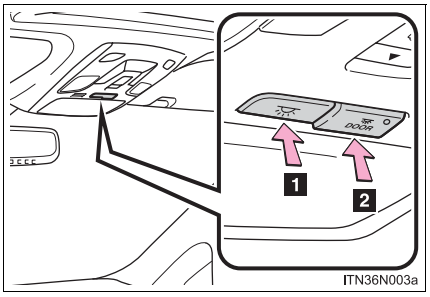


Personal/interior lights (vehicles with overhead console)

Front type A

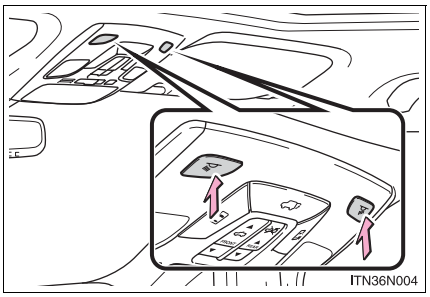


On/off

Front type B

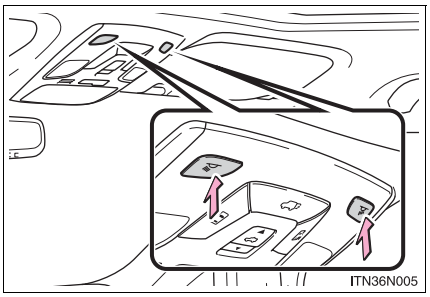

Rear

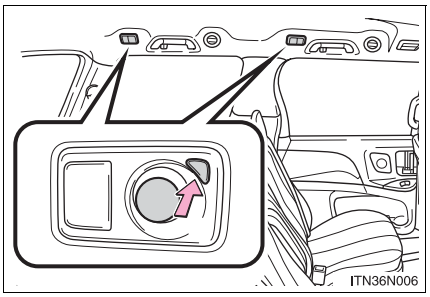


On/off

Rear personal/interior lights turn on when the personal/interior main switch is in door position.

Personal/interior lights can also be turned on/off from each individual light. When an individual light is activated it must be turned off at its location. It will not turn off immediately once the doors are closed. To conserve your battery any interior lights left on will turn off 20 minutes after engine off. These lights will come back on with engine on.


Personal lights (vehicles without overhead console)

Front

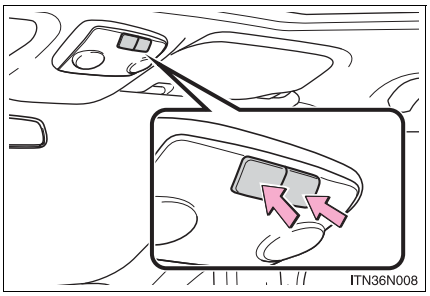


On/off

Rear

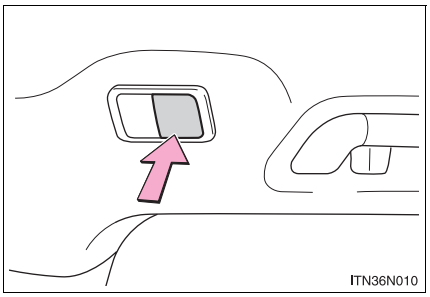


On/off

Rear ceiling lights (if equipped)

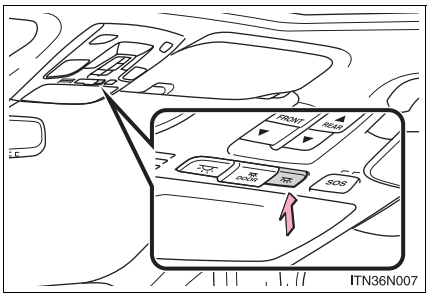

On/off

■ **Adjusting the rear personal/interior lights angle**



Push the edge of the light lens.

■ **Illuminated entry system (if equipped)**

Vehicles without a smart key system
The lights automatically turn on/off according to the engine switch position, whether the doors are locked/ unlocked, and whether the doors are open/ closed.

Vehicles with a smart key system
The lights automatically turn on/off according to “ENGINE START STOP” switch mode, the presence of the electronic key, whether the doors are locked/unlocked, and whether the doors are open/closed.

■ **To prevent battery discharge**

If the lights remain on when a door is not fully closed and the personal/interior light main switch is in door position, the lights will go off automatically after 30 seconds.

■ **Customization that can be configured at Toyota dealer**


Settings (e.g. the time elapsed before lights turn off) can be changed.
(Customizable features →P. 815)

⚠ NOTICE

■ **Rear ceiling lights (if equipped)**

Do not hang anything on the gap between the ceiling light cover and the ceiling or pull the ceiling light cover strongly.
Doing so may cause damage.

List of storage features

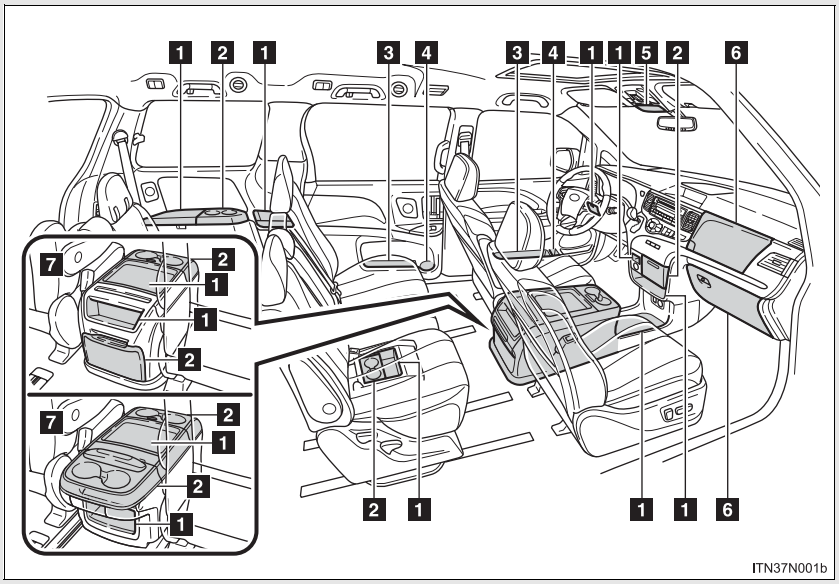

1 Auxiliary boxes
2 Cup holders
3 Door pockets
4 Bottle holders
5 Overhead console (if equipped)
6 Glove boxes
7 Console box (if equipped)

CAUTION


■ **Items that should not be left in the storage spaces**

Do not leave glasses, lighters or spray cans in the storage spaces, as this may cause the following when cabin temperature becomes high:

- Glasses may be deformed by heat or cracked if they come into contact with other stored items.
- Lighters or spray cans may explode. If they come into contact with other stored items, the lighter may catch fire or the spray can may release gas, causing a fire hazard.

Glove boxes


Upper glove box

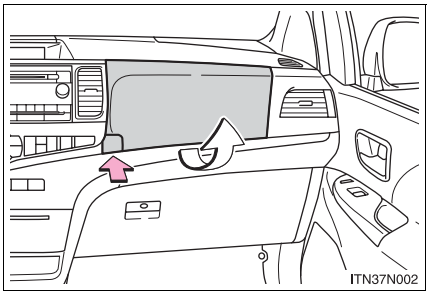

Push the button.


Lower glove box

The lower glove box can be opened by pulling the lever and can be locked and unlocked by using the master key (vehicles without a smart key) or the mechanical key (vehicles with a smart key system).

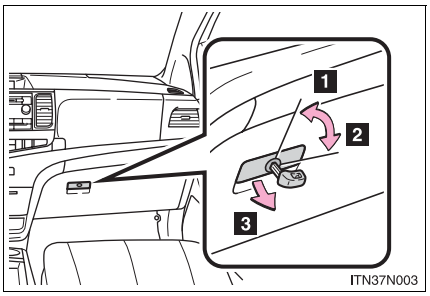

1 Unlock
2 Lock
3 Open

■ Removing the separate tray (upper glove box)



Pull out the separate tray.

⚠ CAUTION


■ Caution while driving

Keep the glove box closed when not in use. In the event of sudden braking or sudden swerving, an accident may occur due to an occupant being struck by the open glove box or the items stored inside.

Console box (if equipped)


■ Using the console box

Type A

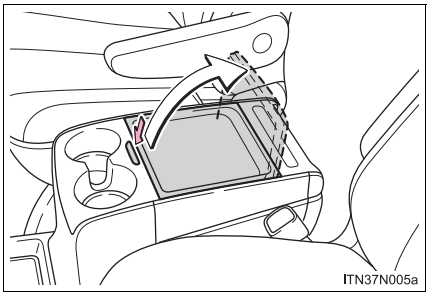

Press the tab.


Type B

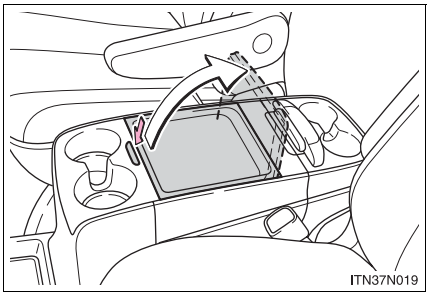

Press the tab.


■ **Sliding the console box (type B)**

From front



Press the tab and slide the console box.

From rear



Pull up the lever and slide the console box.

■ **Console box light**

The console box light turns on when the headlight switch is on.

⚠ CAUTION


■ Caution while driving

Keep the console box closed when not in use. In the event of sudden braking or sudden swerving, an accident may occur due to an occupant being struck by the open console box or the items stored inside.

■ Console box adjustment precaution (type B)

- Do not adjust the position of the console box while the vehicle is moving. This may cause the driver to mishandle the vehicle and may lead to an accident that results in death or serious injury.
- Be careful not to get hands or feet pinched between the console box and the rear sliding console or rear seat.
- Be careful not to allow the console box to hit any passenger while adjusting its position.
- After adjusting the console box, make sure it is securely locked in position.

Overhead console (if equipped)

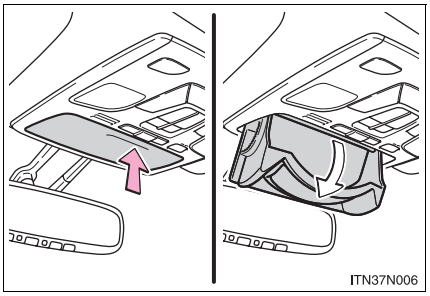

Push the lid.

The overhead console is useful for temporarily storing small items.

CAUTION

While driving


Do not leave the overhead console open.
Items may fall out and cause injury.

Maximum storage weight

Do not place any object heavier than 0.4 lb. (200 g) in it. The console may be opened and cause injury.


Cup holders

Front

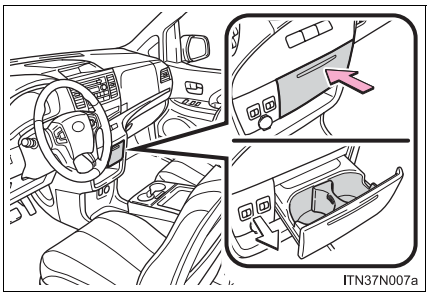


Press in and release the front cup holder.

Console box (if equipped)

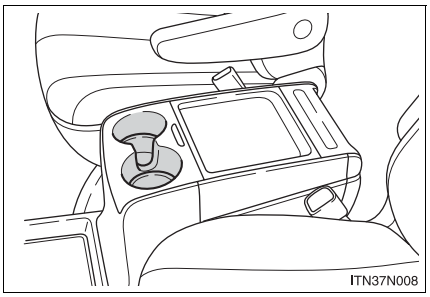


Console box type A (if equipped)

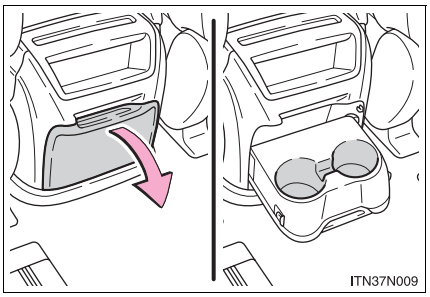


Pull the lid down.

Console box type B (if equipped)

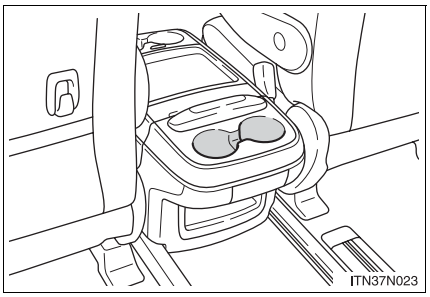


Second center seat (if equipped)

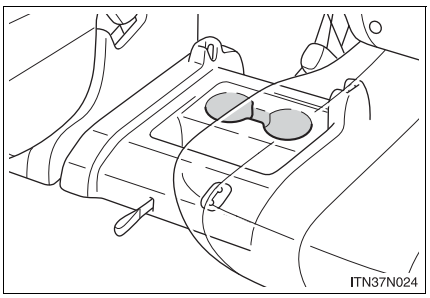


Removing the second center seat. (→P. 106)

Rear

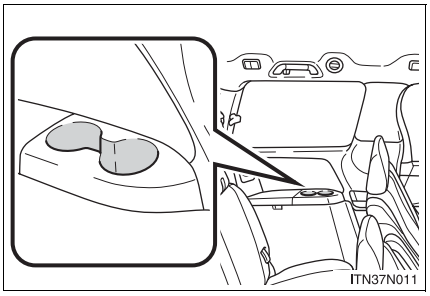

■ **Removing the separator (front)**



Pull the separator up.

The separator may be removed for cleaning.

■ **Cup holder light (console box type A and B)**

The cup holder light turns on when the headlight switch is on.

⚠ CAUTION

■ **Items unsuitable for the cup holder**


Do not place anything other than cups or aluminum cans in the cup holders. Other items may be thrown out of the holders in the event of an accident or sudden braking and cause injury. If possible, cover hot drinks to prevent burns.

■ **When not in use (front and console box type A)**


Keep the cup holders closed. In the event of sudden braking or sudden swerving, an accident may occur due to an occupant being struck by the open cup holders or the items stored inside.

Bottle holders

Type A

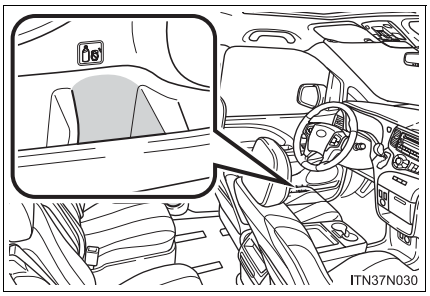

Type B

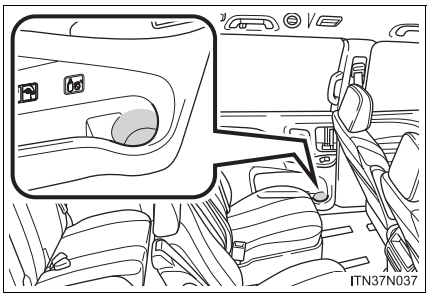

CAUTION

Items unsuitable for the bottle holder

Do not place anything other than a bottle in the bottle holders.
Other items may be thrown out of the holders in the event of an accident or sudden braking and cause injury.

NOTICE


When stowing a bottle

Put the cap on before stowing a bottle. Do not place open bottles in the bottle holders. The contents may spill.


Type B: Make sure items in the sliding door bottle holder will not interfere with the motion of the door before operating the door. Items that protrude from the bottle holder may prevent door opening or damage the vehicle.

Door pockets

Type A

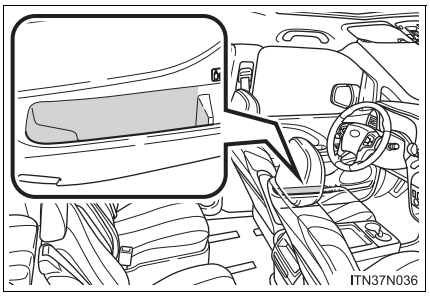


Type B

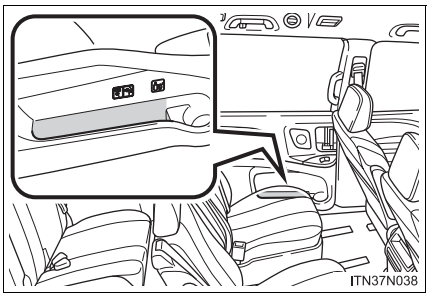

⚠ NOTICE


■ Door pockets (type B)



Make sure magazines are not bent or protruding from the sliding door pockets. Do not insert anything too big so that the shape of the sliding door pockets is distorted. Such objects may obstruct the opening/closing of the sliding doors, damage the sliding door pockets or the vehicle body, and may result in a malfunction.


Auxiliary boxes

Type A

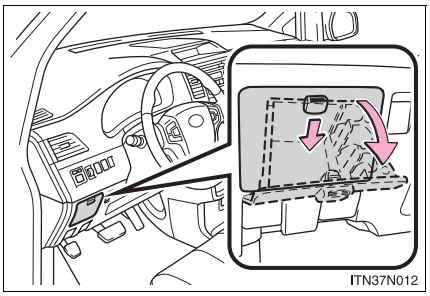


Push down the knob.


Type B (if equipped)

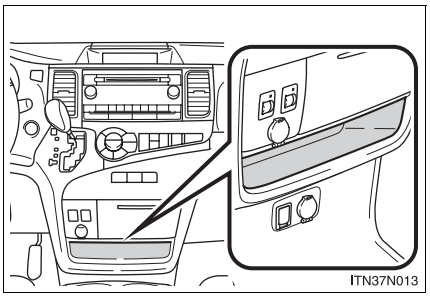


Type C

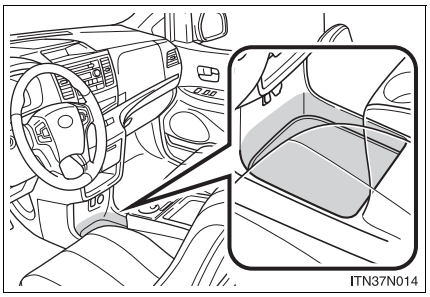


Type D (if equipped)

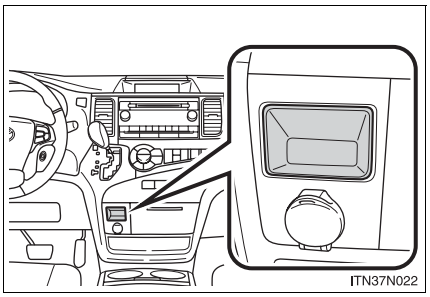

Type E (if equipped)

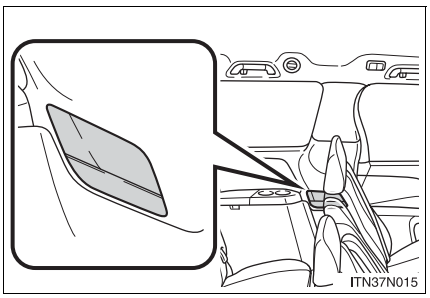


Type F

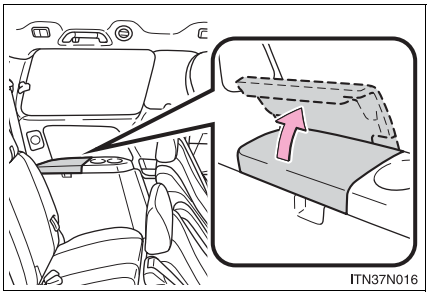


Lift the lid.

Type G

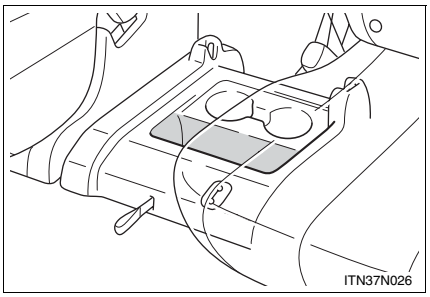


Removing the second center seat. (→P. 106)


Type H (if equipped)

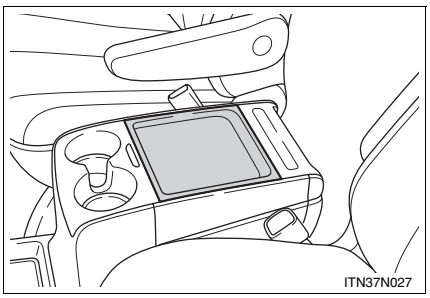


Type I (if equipped)

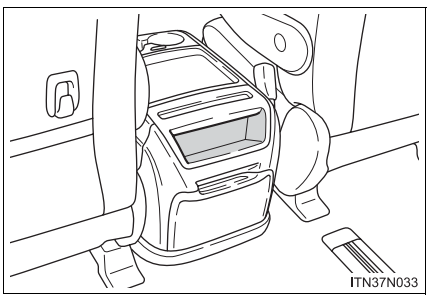


Type J (if equipped)

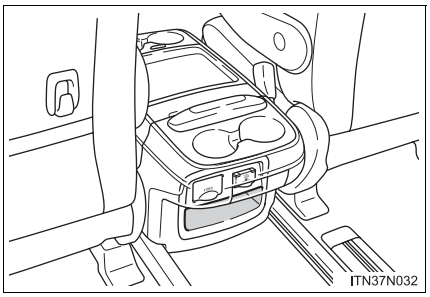

Type K (if equipped)

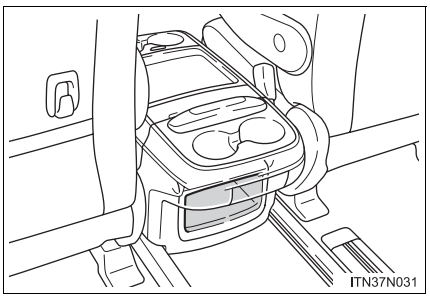

■ **Coin holder (type A)**




Nickels, quarters and dimes can be stored separately.

CAUTION

■ **Caution while driving (type A and F)**

Keep the auxiliary boxes closed.
Injuries may result in the event of an accident or sudden braking.

Sun visors

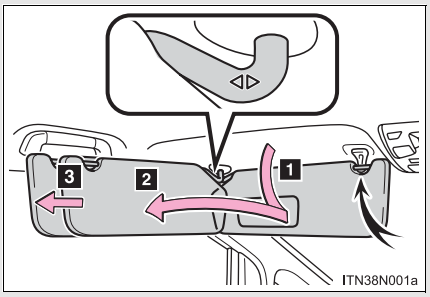


1 To set the visor in the forward position, flip it down.

2 To set the visor in the side position, flip down, unhook, and swing it to the side.

3 To use the side extender, place the visor in the side position, then slide it backward.

Vanity mirrors

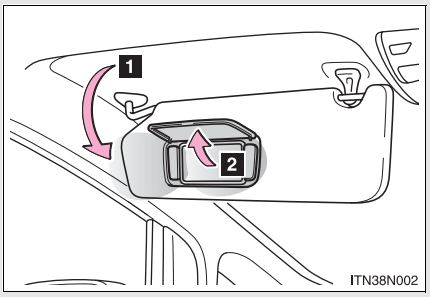

1 Flip down.

2 Open the cover.


The light turns on when the cover is opened.

⚠ NOTICE

■ To prevent battery discharge

Do not leave the vanity lights on for extended periods while the engine is off.

Clock*

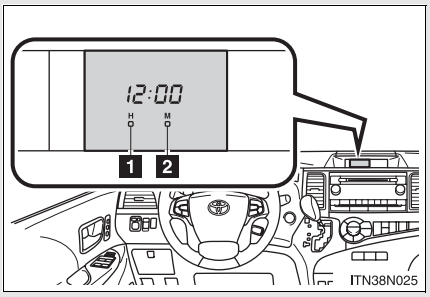

1 Adjusts the hours.
2 Adjusts the minutes.

The clock is displayed when

Vehicles without a smart key system
The engine switch is in the “ACC” or “ON” position.

Vehicles with a smart key system
The “ENGINE START STOP” switch is in ACCESSORY or IGNITION ON mode.

When disconnecting and reconnecting battery terminals


The time display will automatically be set to 1:00.

*: If equipped

Conversation mirror*


The conversation mirror can provide the driver and the front passenger with a view of the rear seat area without the need to turn around.

STEP 1

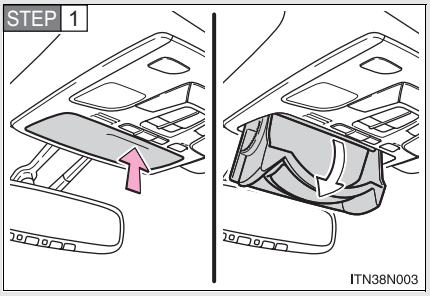

Push the lid and allow the lid to open.

STEP 2

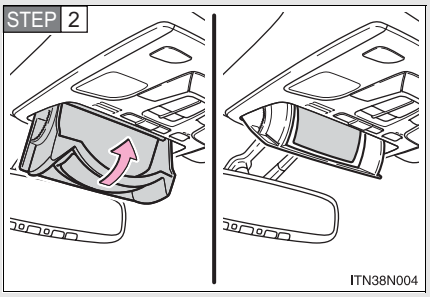

Push the lid. To first locked position.

*: If equipped


Power outlets

The power outlet can be used for the following components:


12 V: Accessories that run on less than 10 A
120 V AC: Accessories that use less than 100 W

■ 12 V


Center panel type A

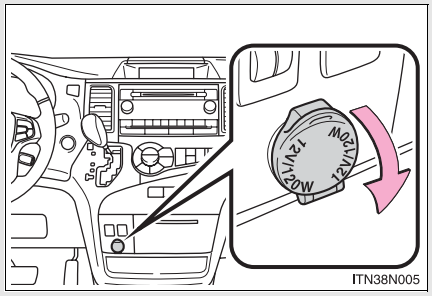

Center panel type B

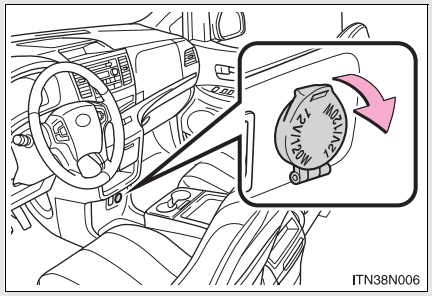


Luggage compartment

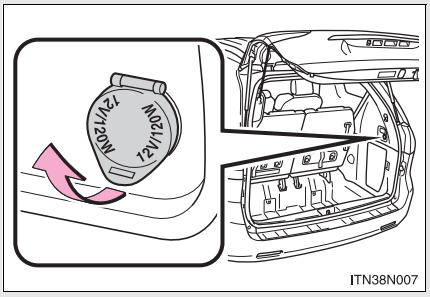


■ 120 V AC (if equipped)


Power outlet socket console box type A

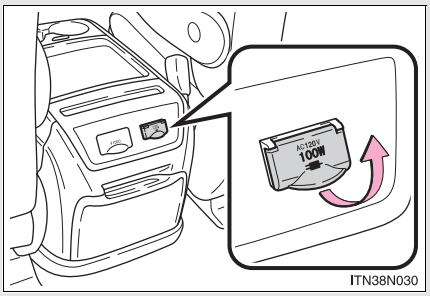

Power outlet socket console box type B

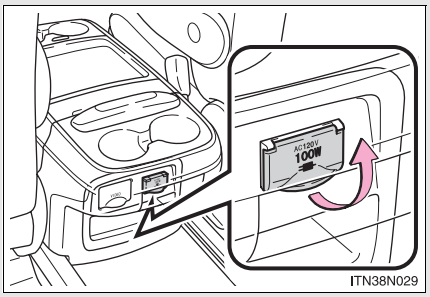

Power outlet socket luggage compartment

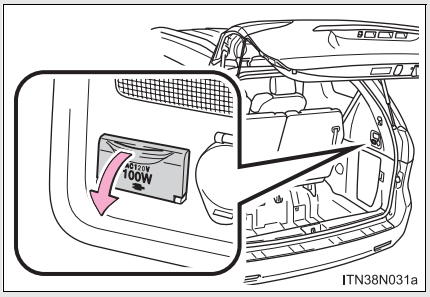

■ **The power outlet can be used when**

Vehicles without a smart key system

12 V: The engine switch is in the “ACC” or “ON” position.

120 V AC: The engine switch is in the “ON” position.

Vehicles with a smart key system

12 V: The “ENGINE START STOP” switch is in ACCESSORY or IGNITION ON mode.

120 V AC: The “ENGINE START STOP” switch is in IGNITION ON mode.

NOTICE

To avoid damaging the power outlet

Close the power outlet lid when the power outlet is not in use.
Foreign objects or liquids that enter the power outlet may cause a short circuit.

To prevent blown fuse

12 V
Do not use an accessory that uses more than 12 V 10 A.

120 V AC
Do not use a 120 V AC appliance that requires more than 100 W.

If a 120 V AC appliance that consumes more than 100 W is used, the protection circuit may cut the power supply.

To prevent battery discharge


Do not use the power outlet longer than necessary when the engine is not running.

Appliances that may not operate properly (120 V AC)

The following 120 V AC appliances may not operate properly even if their power consumption is under 100 W:

- Appliances with high initial peak wattage
- Measuring devices that process precise data
- Other appliances that require an extremely stable power supply

Seat heaters*

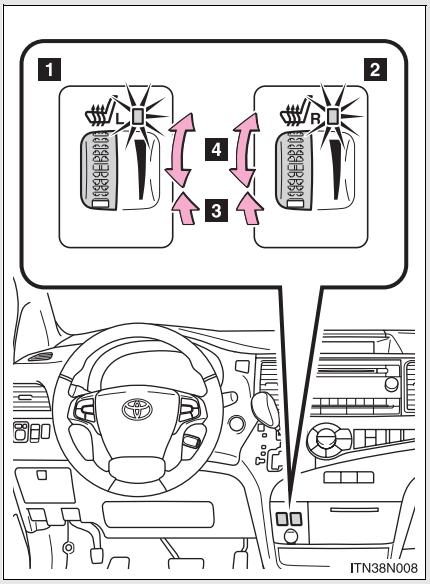

1 For driver's seat

2 For front passenger's seat

3 On

The indicator light comes on.

4 Adjusts the seat temperature

The further you move the dial upward, the warmer the seat becomes.

■ **The seat heaters can be used when**

Vehicles without a smart key system
The engine switch is in the "ON" position.

Vehicles with a smart key system
The "ENGINE START STOP" switch is in IGNITION ON mode.

■ **When not in use**

Move the dial fully downward. The indicator light turns off.

*: If equipped

⚠ CAUTION

■ Burns

- Use caution when seating the following persons in a seat with the seat heater on to avoid the possibility of burns:
  - Babies, small children, the elderly, the sick and the physically challenged
  - Persons with sensitive skin
  - Persons who are fatigued
  - Persons who have taken alcohol or drugs that induce sleep (sleeping drugs, cold remedies, etc.)
- Do not cover the seat with anything when using the seat heater.
  Using the seat heater with a blanket or cushion increases the temperature of the seat and may lead to overheating.
- Do not use the seat heater more than necessary. Doing so may cause minor burns or overheating.

⚠ NOTICE

■ To prevent seat heater damage


Do not put heavy objects that have an uneven surface on the seat and do not stick sharp objects (needles, nails, etc.) into the seat.

■ To prevent battery discharge

Turn the seat heaters off when the engine is not running.


Armrests

Front seat

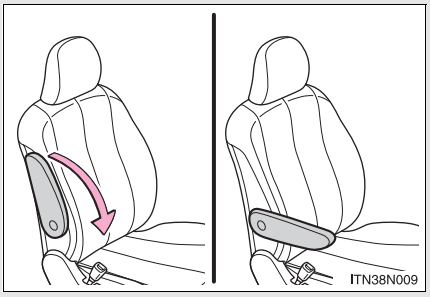


Pull the armrest down for use.

Second seat (if equipped)

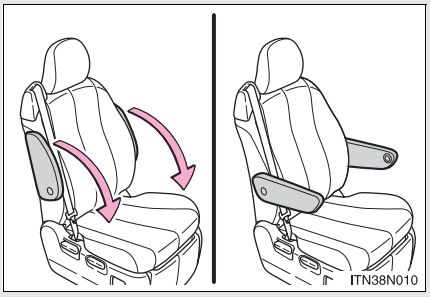

Pull the armrest down for use.

■ **Adjusting the armrests (if equipped)**



Push the armrest down while pressing the button.


⚠ NOTICE

■ **To prevent damage to the armrest**

Do not place too much strain on the armrest.

Rear side sunshades*

Rear door window

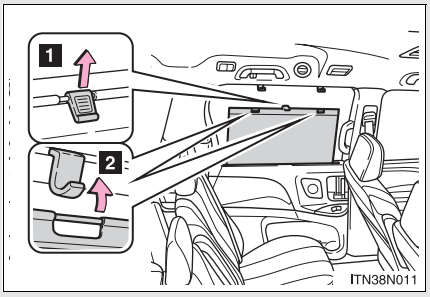


1 Pull the tab up.

2 Secure the sunshade using the hooks.

To retract the sunshade, pull the tab up slightly to unhook the sunshade, and lower the sunshade slowly.

Rear quarter window

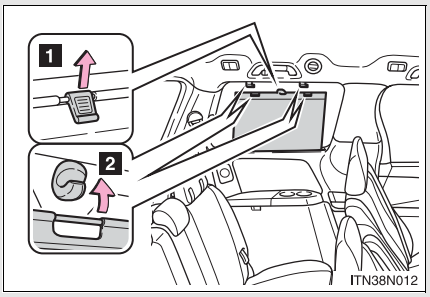

1 Pull the tab up.

2 Secure the sunshade using the hooks.

To retract the sunshade, pull the tab up slightly to unhook the sunshade, and lower the sunshade slowly.

⚠ NOTICE

■ To ensure normal operation of the sunshade

Observe the following precautions.


- Do not place anything where it may hinder the opening/closing of the sunshade.
- Do not place anything on the sunshade.

*: If equipped


Grocery bag hooks

The hooks are designed to hang things like a grocery bag.


Type A (front seatback) (if equipped)

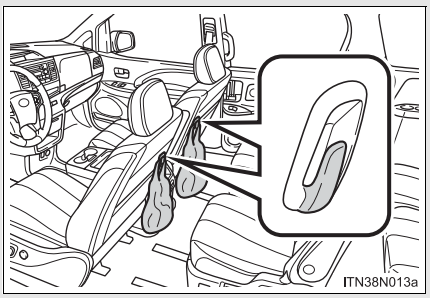

Type B (third seatback)

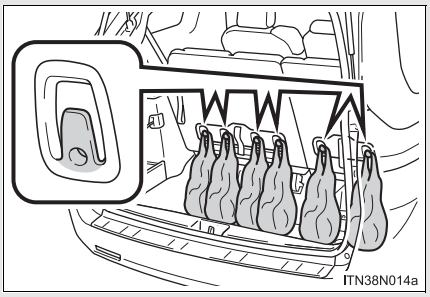


Type C (luggage compartment)

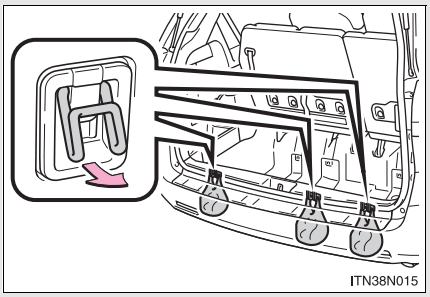

Pull the hook up.

Type D (luggage compartment)

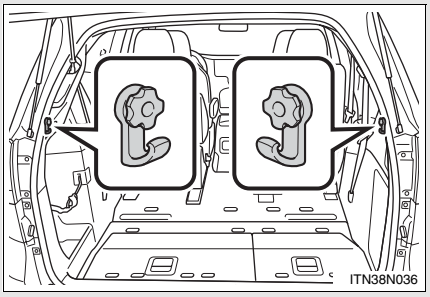

CAUTION

■ **When not in use (type C)**

Keep the grocery bag hook stowed.
Injuries may result in the event of sudden braking, sudden swerving or an accident.


NOTICE

■ **Grocery bag hook weight capacity (type A and B)**

Do not hang any object heavier than 8.8 lb. (4 kg) on the grocery bag hook.

Floor mat

Use only floor mats designed specifically for vehicles of the same model and model year as your vehicle. Fix them securely in place onto the carpet.

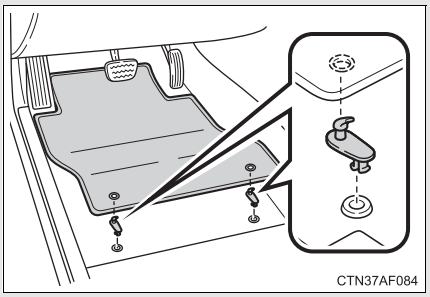

Fix the floor mat in place using the retaining hooks (clips) provided.

The shape of the retaining hooks (clips) and the fixing procedure of the floor mat for your vehicle may differ from those shown in the illustration. For details, refer to the floor mat retention clip installation instructions supplied with the clips.

⚠ CAUTION


Observe the following precautions.
Failure to do so may cause the driver's floor mat to slip, possibly interfering with the pedals while driving. An unexpectedly high speed may result or it may become difficult to stop the vehicle, leading to a serious accident.

■ When installing the driver's floor mat

- Do not use floor mats designed for other models or different model year vehicles, even if they are Toyota Genuine floor mats.
- Only use floor mats designed for the driver's seat.
- Always install the floor mat securely using the retaining hooks (clips) provided.
- Do not use two or more floor mats on top of each other.
- Do not place the floor mat bottom-side up or upside-down.


CAUTION

■ Before driving



- Check that the floor mat is securely fixed in the correct place with all the provided retaining hooks (clips). Be especially careful to perform this check after cleaning the floor.
- With the engine stopped and the shift lever in P, fully depress each pedal to the floor to make sure it does not interfere with the floor mat.


■ Cargo hooks

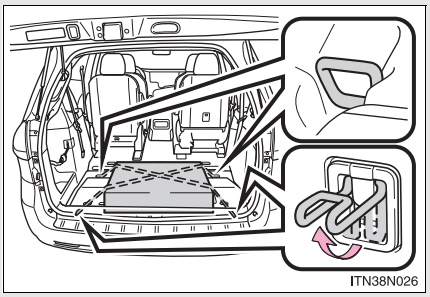


Cargo hooks are provided for securing loose items.

■ Cargo net hooks


Pattern 1

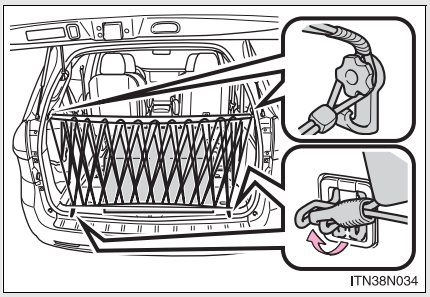

Pattern 2

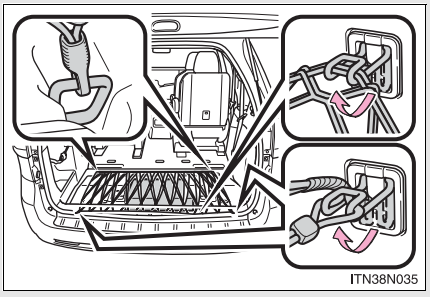

■ Storage box (if equipped)

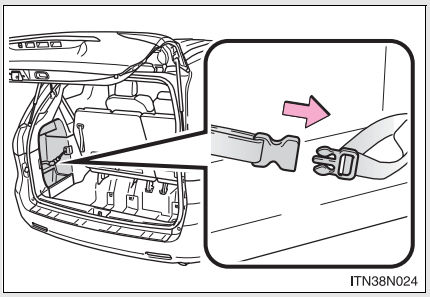

Engage the latch buckle.

⚠ CAUTION

■ When the cargo hooks are not in use

To avoid injury, always return the cargo hooks to their positions when they are not in use.

⚠ NOTICE

■ To prevent damage to the cargo net hooks

Avoid hanging things other than a cargo net on them.


Garage door opener*

The garage door opener can be programmed to operate garage doors, gates, entry doors, door locks, home lighting systems, security systems, and other devices.

The garage door opener (HomeLink® Universal Transceiver) is manufactured under license from HomeLink®.

Programming the HomeLink® (for U.S.A. owners)


The HomeLink® compatible transceiver in your vehicle has 3 buttons which can be programmed to operate 3 different devices. Refer to the programming method below appropriate for the device.

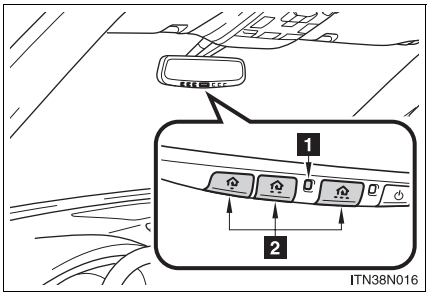

1 Indicator light
2 Buttons


*: If equipped

■ Programming the HomeLink®

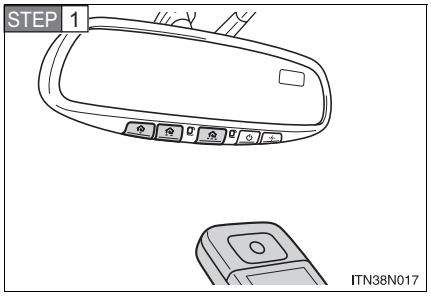

Point the remote control for the device 1 to 3 in. (25 to 75 mm) from the HomeLink® control buttons.


Keep the indicator light on the HomeLink® in view while programming.

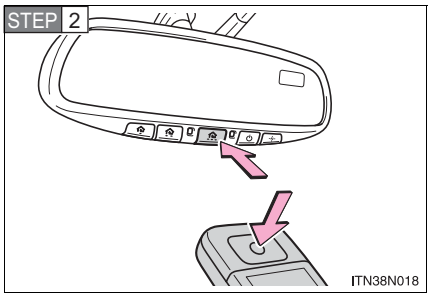

Press and hold one of the HomeLink® buttons and the transmitter button. When the HomeLink® indicator light changes from a slow to a rapid flash, you can release both buttons.

If the HomeLink® indicator light comes on but does not flash, or flashes rapidly for 2 seconds and remains lit, the HomeLink® button is already programmed. Use the other buttons or follow the “Reprogramming a HomeLink® button” instructions. (→P. 614)

STEP 3

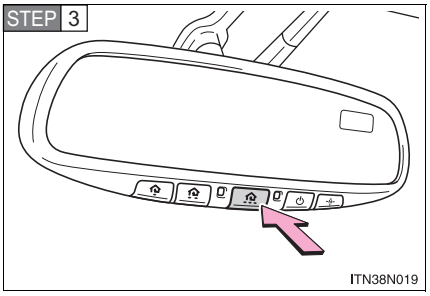

Test the operation of the HomeLink® by pressing the newly programmed button.

If programming a garage door opener, check to see if the garage door opens and closes. If the garage door does not operate, see if your garage transmitter is of the Rolling Code type. Press and hold the programmed HomeLink® button. The garage door has the rolling code feature if the indicator light (on the HomeLink®) flashes rapidly for 2 seconds and then remains lit. If your transmitter is the Rolling Code type, proceed to the heading “Programming a rolling code system”.

STEP 4 Repeat the steps above to program another device for each of the remaining HomeLink® buttons.

■ **Programming a Rolling Code system (for U.S.A. owners)**

If your device is Rolling Code equipped, follow the steps under the heading “Programming the HomeLink®” before proceeding with the steps listed below.

STEP 1 Locate the training button on the ceiling mounted garage door opener motor. The exact location and color of the button may vary by brand of garage door opener.

Refer to the operation manual supplied with the garage door opener for the location of the training button.

STEP 2 Press the training button.

Following this step, you have 30 seconds in which to initiate step 3 below.

STEP 3 Press and hold the vehicle’s programmed HomeLink® button for 2 seconds and release it. Repeat this step once again. The garage door may open.

If the garage door opens, the programming process is complete. If the door does not open, press and release the button a third time. This third press and release will complete the programming process by opening the garage door.

The ceiling mounted garage door opener motor should now recognize the HomeLink® transceiver and operate the garage door.

STEP 4 Repeat the steps above to program another rolling code system for any of the remaining HomeLink® buttons.

■ **Programming an entry gate (for U.S.A. owners)/Programming all devices in the Canadian market**

STEP 1 Place your transmitter 1 to 3 in. (25 to 75 mm) away from the surface of the HomeLink®.

Keep the indicator light on the HomeLink® in view while programming.

STEP 2 Press and hold the selected HomeLink® button.

STEP 3 Repeatedly press and release (cycle) the device's remote control button for two seconds each until step 4 is complete.

STEP 4 When the indicator light on the HomeLink® compatible transceiver starts to flashing rapidly, release the buttons.

STEP 5 Test the operation of the HomeLink® by pressing the newly programmed button. Check to see if the gate/device operates correctly.

STEP 6 Repeat the steps above to program another device for each of the remaining HomeLink® buttons.

■ **Programming other devices**

To program other devices such as home security systems, home door locks or lighting, contact your authorized Toyota dealer for assistance.

■ **Reprogramming a button**

The individual HomeLink® buttons cannot be erased but can be reprogrammed. To reprogram a button, follow the programming instructions.

Operating the HomeLink®


Press the appropriate HomeLink® button. The HomeLink® indicator light on the HomeLink® transceiver should turn on.

The HomeLink® continues to send a signal for up to 20 seconds as long as the button is pressed.

Reprogramming a HomeLink® button

Press and hold the desired HomeLink® button. After 20 seconds, the HomeLink® indicator light will start flashing slowly. Keep pressing the HomeLink® button and press and hold the transmitter button until the HomeLink® indicator light changes from a slow to a rapid flash. Release the buttons.

Erasing the entire HomeLink® memory (all three programs)

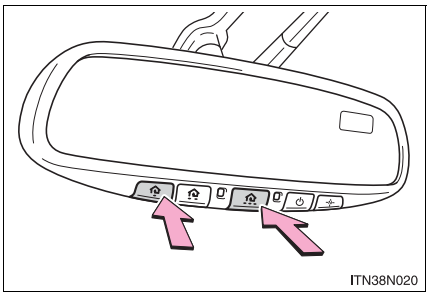

Press and hold down the 2 outside buttons for 10 seconds until the indicator light flashes.

If you sell your vehicle, be sure to erase the programs stored in the HomeLink® memory.

■ **Before programming**

- Install a new battery in the transmitter.
- The battery side of the transmitter must be pointed away from the HomeLink® button.

■ **Certification for the garage door opener**

For vehicles sold in the U.S.A.
FCC ID: NZLWZLHL4

NOTE:
This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING:
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For vehicles sold in Canada
NOTE:
Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

■ **For additional programming assistance with your HomeLink® Universal Transceiver**

Visit on the web at www.homelink.com or call 1-800-355-3515.

CAUTION

When programming a garage door or other remote control device

The garage door may operate, so ensure people and objects are out of danger to prevent potential harm.


Conforming to federal safety standards

Do not use the HomeLink® Compatible Transceiver with any garage door opener or device that lacks safety stop and reverse features as required by federal safety standards.
This includes any garage door that cannot detect an obstruction object. A door or device without these features increases the risk of death or serious injury.

Compass*

The compass on the trip information display indicates the direction in which the vehicle is heading.

■ Operation

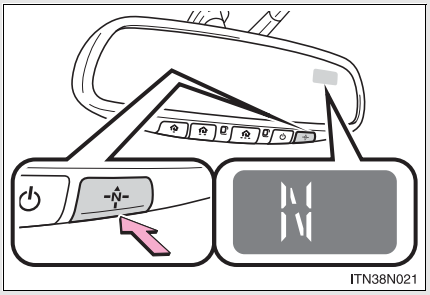


To turn the compass on or off, press the switch.

■ Displays and directions

Display	Direction
N	North
NE	Northeast
E	East
SE	Southeast
S	South
SW	Southwest
W	West
NW	Northwest

*: If equipped

Calibrating the compass

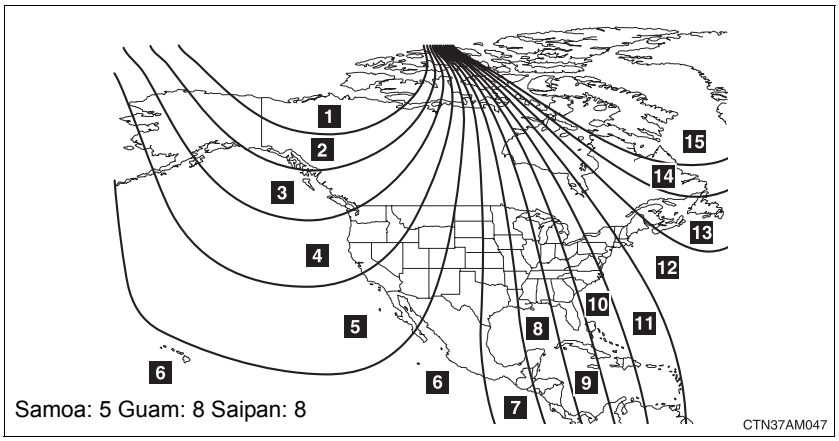


The direction display deviates from the true direction determined by the earth's magnetic field. The amount of deviation varies according to the geographic position of the vehicle.

If you cross over a map boundary shown in illustration, the compass will deviate.
To obtain higher precision or perfect calibration, refer to the following.

■ **Deviation calibration**

STEP 1 Stop the vehicle where it is safe to drive in a circle.

STEP 2

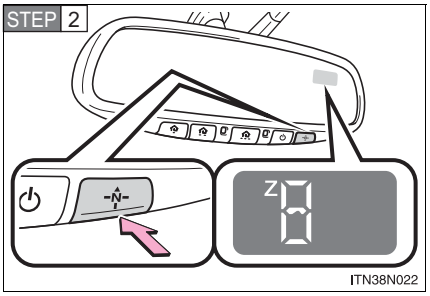


Press and hold the switch.

A number (1 to 15) appears on the compass display.

STEP 3 Referring to the map above, press the switch to select the number of the zone you are in.

If the direction is displayed several seconds after adjustment, the calibration is complete.

■ **Circling calibration**

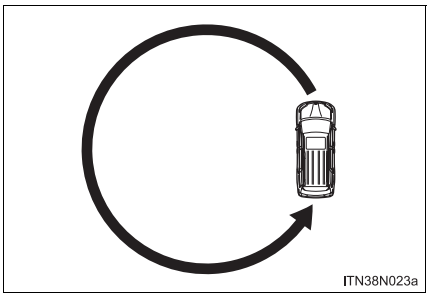

When “C” appears on the display, drive the vehicle at 5 mph (8 km/h) or less in a circle until a direction is displayed.

If there is not enough space to drive in a circle, drive around the block until the direction is displayed.

■ **Conditions unfavorable to correct operation**

The compass may not show the correct direction in the following conditions:

- The vehicle is stopped immediately after turning.
- The vehicle is on an inclined surface.
- The vehicle is in a place where the earth's magnetic field is subject to interference by artificial magnetic fields (underground car park/parking lot, under a steel tower, between buildings, roof car park/parking lot, near an intersection, near a large vehicle, etc.).
- The vehicle has become magnetized.
  (There is a magnet or metal object near the trip information display.)
- The battery has been disconnected.
- A door is open.

CAUTION

■ **While driving the vehicle**

Do not adjust the display. Be sure to adjust the display only when the vehicle is stopped.

■ **When doing the circling calibration**

Be sure to secure a wide space, and watch out for people and vehicles in the neighborhood. Do not violate any local traffic rules while performing circling calibration.

NOTICE

To avoid a compass malfunctions

Do not place magnets or any metal objects near the roof of the vehicle. Doing this may cause a malfunction of the compass sensor.

To ensure normal operation of the compass

- Do not perform circling calibration of the compass in a place where the earth's magnetic field is subject to interference by artificial magnetic fields.
- During calibration, do not operate electric systems (moon roof, power windows, etc.) as they may interfere with the calibration.


Safety Connect*

Safety Connect is a subscription-based telematics service that uses Global Positioning System (GPS) data and embedded cellular technology to provide safety and security features to subscribers. Safety Connect is supported by Toyota's designated response center, which operates 24 hours per day, 7 days per week.

Safety Connect service is available by subscription on select, telematics hardware-equipped vehicles.

By using the Safety Connect service, you are agreeing to be bound by the Telematics Subscription Service Agreement and its Terms and Conditions, as in effect and amended from time to time, a current copy of which is available at Toyota.com. All use of the Safety Connect service is subject to such then-applicable Terms and Conditions.

■ System components

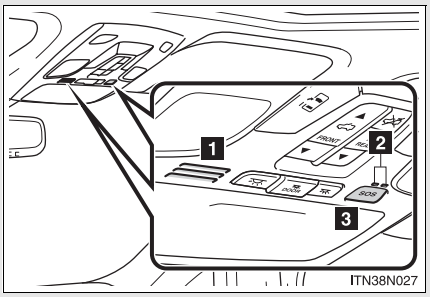

1 Microphone
2 LED light indicators
3 "SOS" button

*: If equipped

■ **Services**

Subscribers have the following Safety Connect services available:

- Automatic Collision Notification*
  Helps drivers receive necessary response from emergency service providers. (→P. 625)

  *: U.S. Patent No. 7,508,298 B2
- Stolen Vehicle Location
  Helps drivers in the event of vehicle theft. (→P. 626)
- Emergency Assistance Button (SOS)
  Connects drivers to response-center support. (→P. 626)
- Roadside Assistance
  Provides drivers various on-road assistance. (→P. 626)

■ **Subscription**

After you have signed the Telematics Subscription Service Agreement and are enrolled, you can begin receiving services.
A variety of subscription terms is available for purchase. Contact your Toyota dealer, call 1-800-331-4331, or push the “SOS” button in your vehicle for further subscription details.

■ **Safety Connect Services Information**

- Phone calls using the vehicles Bluetooth® technology will not be possible during Safety Connect.
- Safety Connect is available beginning Fall 2009 on select Toyota models. Contact with the Safety Connect response center is dependent upon the telematics device being in operative condition, cellular connection availability, and GPS satellite signal reception, which can limit the ability to reach the response center or receive emergency service support. Enrollment and Telematics Subscription Service Agreement required. A variety of subscription terms is available; charges vary by subscription term selected.
- Automatic Collision Notification, Emergency Assistance, Stolen Vehicle Location, and Enhanced Roadside Assistance will function in the United States, including Hawaii and Alaska, and in Canada. No Safety Connect services will function outside of the United States in countries other than Canada.
- Safety Connect services are not subject to section 255 of the Telecommunications Act and the device is not TTY compatible.

■ **Languages**

The Safety Connect response center will offer support in multiple languages. The Safety Connect system will offer voice prompts in English and Spanish. Please indicate your language of choice when enrolling.

■ **When contacting the response center**

You may be unable to contact the response center if the network is busy.

Safety Connect LED light Indicators

When the engine switch is turned to the “ON” position (vehicles without a smart key system) or the “ENGINE START STOP” switch is turned to IGNITION ON mode (vehicles with a smart key system), the red indicator light comes on for 2 seconds then turns off. Afterward, the green indicator light comes on, indicating that the service is active.
The following indicator light patterns indicate specific system usage conditions:

- Green indicator light on = Active service
- Green indicator light flashing = Safety Connect call in process
- Red indicator light (except at vehicle start-up) = System malfunction (contact your Toyota dealer)
- No indicator light (off) = Safety Connect service not active

Safety Connect services

Automatic Collision Notification

In case of either airbag deployment or severe rear-end collision, the system is designed to automatically call the response center. The responding agent receives the vehicle’s location and attempts to speak with the vehicle occupants to assess the level of emergency. If the occupants are unable to communicate, the agent automatically treats the call as an emergency, contacts the nearest emergency services provider to describe the situation, and requests that assistance be sent to the location.

Stolen Vehicle Location

If your vehicle is stolen, Safety Connect can work with local authorities to assist them in locating and recovering the vehicle. After filing a police report, call the Safety Connect response center at 1-800-331-4331 and follow the prompts for Safety Connect to initiate this service.

In addition to assisting law enforcement with recovery of a stolen vehicle, Safety-Connect-equipped vehicle location data may, under certain circumstances, be shared with third parties to locate your vehicle. Further information is available at Toyota.com.

Emergency Assistance Button (“SOS”)

In the event of an emergency on the road, push the “SOS” button to reach the Safety Connect response center. The answering agent will determine your vehicle’s location, assess the emergency, and dispatch the necessary assistance required.

If you accidentally press the “SOS” button, tell the response-center agent that you are not experiencing an emergency.

Roadside Assistance

Subscribers can press the “SOS” button to reach a Safety Connect response-center agent, who can help with a wide range of needs, such as: towing, flat tire, fuel delivery, etc. For a description of the Roadside Assistance services and their limitations, please see the Safety Connect Terms and Conditions, which are available at Toyota.com.

Safety information for Safety Connect

Important! Read this information before using Safety Connect.

Exposure to radio frequency signals

The Safety Connect system installed in your vehicle is a low-power radio transmitter and receiver. It receives and also sends out radio frequency (RF) signals.

In August 1996, the Federal Communications Commission (FCC) adopted RF exposure guidelines with safety levels for mobile wireless phones. Those guidelines are consistent with the safety standards previously set by the following U.S. and international standards bodies.

- ANSI (American National Standards Institute) C95.1 [1992]
- NCRP (National Council on Radiation Protection and Measurement) Report 86 [1986]
- ICNIRP (International Commission on Non-Ionizing Radiation Protection) [1996]

Those standards were based on comprehensive and periodic evaluations of the relevant scientific literature. Over 120 scientists, engineers, and physicians from universities, and government health agencies and industries reviewed the available body of research to develop the ANSI Standard (C95.1).

The design of Safety Connect complies with the FCC guidelines in addition to those standards.

■ **Certification for Safety Connect**

FCC ID: O9EGTM1
FCC ID: O6Y-CDMRF101

NOTE:
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference,
and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING:
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Cleaning and protecting the vehicle exterior

Perform the following to protect the vehicle and maintain it in prime condition:

- Working from top to bottom, liberally apply water to the vehicle body, wheel wells and underside of the vehicle to remove any dirt and dust.
- Wash the vehicle body using a sponge or soft cloth, such as a chamois.
- For hard-to-remove marks, use car wash soap and rinse thoroughly with water.
- Wipe away any water.
- Wax the vehicle when the waterproof coating deteriorates.

  If water does not bead on a clean surface, apply wax when the vehicle body is cool.

Automatic car washes

- Before washing the vehicle:
  - Fold the mirrors.
  - Turn off the power back door system. (if equipped)
  - Turn off the power sliding door system. (if equipped)
    Make sure to re-install the antenna and extend the mirrors before driving.
- Brushes used in automatic car washes may scratch the vehicle surface and harm your vehicle's paint.

■ **High pressure car washes**

- Do not allow the nozzles of the car wash to come within close proximity of the windows.
- Before using car wash, check that the fuel filler door on your vehicle is closed properly.

■ **Aluminum wheels**

- Remove any dirt immediately by using a neutral detergent. Do not use hard brushes or abrasive cleaners. Do not use strong or harsh chemical cleaners.
  Use the same mild detergent and wax as used on the paint.
- Do not use detergent on the wheels when they are hot, for example after driving for long distance in the hot weather.
- Wash detergent from the wheels immediately after use.

■ **Bumpers and side moldings**

Do not scrub with abrasive cleaners.

■ **Notes for vehicles with a smart key system (if equipped)**


- If the door handle becomes wet while the electronic key is within the effective range, the door may lock and unlock repeatedly. Place the key in a position 6 ft. (2 m) or more separate from the vehicle while the vehicle is being washed. (Take care to ensure that the key is not stolen.)
- If the electronic key is inside the vehicle and a door handle becomes wet during a car wash, a message may be shown on the multi-information display and a buzzer will sound outside the vehicle. To turn off the alarm, lock all the doors.

CAUTION

■ **When washing the vehicle**

Do not apply water to the inside of the engine compartment. Doing so may cause the electrical components etc. to catch fire.

■ **When cleaning the windshield (vehicles with rain-sensing windshield wiper)**



Set the wiper switch to off.
If the wiper switch is in “AUTO”, the wipers may operate unexpectedly in the following situations, and may result in hands being caught or other serious injuries and cause damage to the wiper blades.

- When the upper part of the windshield where the raindrop sensor is located is touched by hand
- When a wet rag or similar is held close to the raindrop sensor
- If something bumps against the windshield
- If you directly touch the raindrop sensor body or if something bumps into the raindrop sensor

■ **Precautions regarding the exhaust pipe**

Exhaust gasses cause the exhaust pipe to become quite hot.

When washing the vehicle, be careful not to touch the pipe until it has cooled sufficiently, as touching a hot exhaust pipe can cause burns.

NOTICE

■ To prevent paint deterioration and corrosion on the body and components (aluminum wheels etc.)

- Wash the vehicle immediately in the following cases:
  - After driving near the sea coast
  - After driving on salted roads
  - If coal tar or tree sap is present on the paint surface
  - If you see dead insects, insect droppings or bird droppings on the paint
  - After driving in an area contaminated with soot, oily smoke, mine dust, iron powder or chemical substances
  - If the vehicle becomes heavily soiled in dust or mud
  - If liquids such as benzene and gasoline are spilled on the paint surface
- If the paint is chipped or scratched, have it repaired immediately.
- To prevent the wheels from corroding, remove any dirt and store in a place with low humidity when storing wheels.

NOTICE

■ **Cleaning the exterior lights**

- Wash carefully. Do not use organic substances or scrub with a hard brush. This may damage the surface of the lights.
- Do not apply wax on the surfaces of the lights. Wax may cause damage to the lenses.

■ **Detachable antenna installation and removal precautions**

- Before driving, ensure that the antenna is installed.
- When the antenna is removed, such as before entering an automatic car wash, make sure to store it in a suitable place so as not to lose it. Also, before driving, make sure to reinstall the antenna in its original position.

■ **When using an automatic car wash (vehicles with rain-sensing windshield wipers)**

Set the wiper switch to the off position. If the wiper switch is in “AUTO”, the wipers may operate and the wiper blades may be damaged.

Cleaning and protecting the vehicle interior

The following procedures will help protect your vehicle's interior and keep it in top condition:

Protecting the vehicle interior

Remove dirt and dust using a vacuum cleaner. Wipe dirty surfaces with a cloth dampened with lukewarm water.

Cleaning the leather areas

- Remove dirt and dust using a vacuum cleaner.
- Wipe off any excess dirt and dust with a soft cloth dampened with diluted detergent.

  Use a diluted water solution of approximately 5 % neutral wool detergent.
- Wring out any excess water from the cloth and thoroughly wipe off all remaining traces of detergent.
- Wipe the surface with a dry, soft cloth to remove any remaining moisture. Allow the leather to dry in a shaded and ventilated area.

Cleaning the synthetic leather areas

- Remove loose dirt using a vacuum cleaner.
- Apply a mild soap solution to the synthetic leather using a sponge or soft cloth.
- Allow the solution to soak in for a few minutes. Remove the dirt and wipe off the solution with a clean, damp cloth.

■ **Caring for leather areas**

Toyota recommends cleaning the interior of the vehicle at least twice a year to maintain the quality of the vehicle's interior.

■ **Shampooing the carpets**

There are several commercial foaming-type cleaners available. Use a sponge or brush to apply the foam. Rub in overlapping circles. Do not use water. Wipe dirty surfaces and let them dry. Excellent results are obtained by keeping the carpet as dry as possible.

■ **Seat belts**

Clean with mild soap and lukewarm water using a cloth or sponge. Also check the belts periodically for excessive wear, fraying or cuts.

⚠ CAUTION

■ **Water in the vehicle**

- Do not splash or spill liquid in the vehicle.
  Doing so may cause electrical components etc. to malfunction or catch fire.
- Do not get any of the SRS components or wiring in the vehicle interior wet. (→P. 170)

  An electrical malfunction may cause the airbags to deploy or not function properly, resulting in death or serious injury.

■ **Cleaning the interior (especially instrument panel)**

Do not use polish wax or polish cleaner. The instrument panel may reflect off the windshield, obstructing the driver's view and leading to an accident, resulting in death or serious injury.

NOTICE

Cleaning detergents

- Do not use the following types of detergent, as they may discolor the vehicle interior or cause streaks or damage to painted surfaces:
  - Non-seat portions: Organic substances such as benzene or gasoline, alkaline or acidic solutions, dye, and bleach
  - Seats: Alkaline or acidic solutions, such as thinner, benzene, and alcohol
- Do not use polish wax or polish cleaner. The instrument panel's or other interior part's painted surface may be damaged.

Preventing damage to leather surfaces

Observe the following precautions to avoid damage to and deterioration of leather surfaces.

- Remove any dust or dirt from leather surfaces immediately.
- Do not expose the vehicle to direct sunlight for extended periods of time. Park the vehicle in the shade, especially during summer.
- Do not place items made of vinyl, plastic, or containing wax on the upholstery, as they may stick to the leather surface if the vehicle interior heats up significantly.

NOTICE

Water on the floor

Do not wash the vehicle floor with water.
Vehicle systems such as the audio system may be damaged if water comes into contact with electrical components such as the audio system above or under the floor of the vehicle. Water may also cause the body to rust.

Cleaning the inside of the rear window and the rear quarter windows

- Do not use glass cleaner to clean the rear window and the rear quarter windows, as this may cause damage to the rear window defogger heater wires or print type antenna (if equipped). Use a cloth dampened with luke-warm water to gently wipe the windows clean. Wipe the windows in strokes running parallel to the heater wires or print type antenna (if equipped).
- Be careful not to scratch or damage the heater wires or print type antenna (if equipped).

Maintenance requirements

To ensure safe and economical driving, day-to-day care and regular maintenance are essential. It is the owner's responsibility to perform regular checks. Toyota recommends performing the following maintenance:

General maintenance

General maintenance should be performed on a daily basis. This can be done by yourself or by a Toyota dealer.

Scheduled maintenance

Scheduled maintenance should be performed at specified intervals according to the maintenance schedule.

For details about maintenance items and schedules, refer to the "Scheduled Maintenance Guide" or "Owner's Manual Supplement".

Do-it-yourself maintenance

You can perform some maintenance procedures by yourself. Please be aware that do-it-yourself maintenance may affect warranty coverage.

The use of Toyota Repair Manuals is recommended.

For details about warranty coverage, see the separate "Owner's Warranty Information Booklet" or "Owner's Manual Supplement".

Repair and replacement

It is recommended that genuine Toyota parts be used for repairs to ensure performance of each system. If non-Toyota parts are used in replacement or if a repair shop other than a Toyota dealer performs repairs, confirm the warranty coverage.

■ **Allow inspection and repairs to be performed by a Toyota dealer**

- Toyota technicians are well-trained specialists and are kept up to date with the latest service information. They are well informed about the operations of all systems on your vehicle.
- Keep a copy of the repair order. It proves that the maintenance that has been performed is under warranty coverage. If any problem should arise while your vehicle is under warranty, your Toyota dealer will promptly take care of it.

■ **Reset the maintenance data (U.S.A. only)**

After the required maintenance is preformed according to the maintenance schedule, please reset the maintenance data.
To reset the data, follow the procedures described below:

STEP 1 **Vehicles without a smart key system**

Switch the display to the trip meter A (→P. 244) and then turn the engine switch off.

Vehicles with a smart key system

Switch the display to the trip meter A (→P. 244) and then turn the “ENGINE START STOP” switch off.

STEP 2 **Vehicles without a smart key system**

While pressing the trip meter reset button (→P. 244), turn the engine switch to the “ON” position.

Vehicles with a smart key system

While pressing the trip meter reset button (→P. 244), turn the “ENGINE START STOP” switch to IGNITION ON mode.

STEP 3 **Vehicles without a multi-information display**

Continue to press and hold the button until the trip meter A displays “000000”.

Vehicles with a multi-information display

Continue to press and hold the button until “COMPLETE” appears on the multi-information display.

CAUTION

■ **If your vehicle is not properly maintained**

Improper maintenance could result in serious damage to the vehicle and possible serious injury or death.

■ **Handling of the battery**

- Engine exhaust, some of its constituents, and a wide variety of automobile components contain or emit chemicals known to the State of California to cause cancer and birth defects and other reproductive harm. Work in a well ventilated area.
- Oils, fuels and fluids contained in vehicles as well as waste produced by component wear contain or emit chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Avoid exposure and wash any affected area immediately.
- Battery posts, terminals and related accessories contain lead and lead compounds which are known to cause brain damage. Wash your hands after handling. (→P. 667)

General maintenance

Listed below are the general maintenance items that should be performed at the intervals specified in the "Owner's Warranty Information Booklet" or "Owner's Manual Supplement/Scheduled Maintenance Guide". It is recommended that any problem you notice should be brought to the attention of your Toyota dealer or qualified service shop for advice.

Engine compartment

Items	Check points
Battery	Check the indicator and connections. (→P. 667)
Brake fluid	Is the brake fluid at the correct level? (→P. 665)
Engine coolant	Is the engine coolant at the correct level? (→P. 662)
Engine oil	Is the engine oil at the correct level? (→P. 657)
Exhaust system	There should not be any fumes or strange sounds.
Radiator/condenser	The radiator and condenser should be free from foreign objects. (→P. 664)
Washer fluid	Is there sufficient washer fluid? (→P. 671)

Vehicle interior

Items	Check points
Accelerator pedal	• The accelerator pedal should move smoothly (without uneven pedal effort or catching).
Automatic transaxle “Park” mechanism	• When parked on a slope with the shift lever in P, is the vehicle securely stopped?
Brake pedal	• Does the brake pedal move smoothly? • Does the brake pedal have appropriate clearance from the floor? • Does the brake pedal have the correct amount of free play?
Brakes	• The vehicle should not pull to one side when the brakes are applied. • The brakes should work effectively. • The brake pedal should not feel spongy. • The brake pedal should not get too close to the floor when the brakes are applied.
Head restraints	• Do the head restraints move smoothly and lock securely?

Items	Check points
Indicators/buzzers	• Do the indicators and buzzers function properly?
Lights	• Do all the lights come on? • Are the headlights aimed correctly?
Parking brake	• Does the parking brake lever or pedal move smoothly? • When parked on a slope with the parking brake on, is the vehicle securely stopped?
Seat belts	• Do the seat belts operate smoothly? • The seat belts should not be damaged.
Seats	• Do the seat controls operate properly?
Steering wheel	• Does the steering wheel rotate smoothly? • Does the steering wheel have the correct amount of free play? • There should not be any strange sounds coming from the steering wheel.

Vehicle exterior

Items	Check points
Doors	• Do the doors operate smoothly?
Engine hood	• Does the engine hood lock system work properly?
Fluid leaks	• There should not be any signs of fluid leakage after the vehicle has been parked.
Tires	• Is the tire inflation pressure correct? • The tires should not be damaged or excessively worn. • Have the tires been rotated according to the maintenance schedule? • The wheel nuts should not be loose.

CAUTION

■ If the engine is running

Turn the engine off and ensure that there is adequate ventilation before performing maintenance checks.

Emission inspection and maintenance (I/M) programs

Some states have vehicle emission inspection programs which include OBD (On Board Diagnostics) checks. The OBD system monitors the operation of the emission control system.

■ **If the malfunction indicator lamp comes on**

The OBD system determines that a problem exists somewhere in the emission control system. Your vehicle may not pass the I/M test and may need to be repaired. Contact your Toyota dealer to service the vehicle.

■ **Your vehicle may not pass the I/M test in the following situations:**

● When the battery is disconnected or discharged

Readiness codes that are set during ordinary driving are erased.
Also, depending on your driving habits, the readiness codes may not be completely set.

● When the fuel tank cap is loose

The malfunction indicator lamp comes on indicating a temporary malfunction and your vehicle may not pass the I/M test.

■ **When the malfunction indicator lamp still remains on after several driving trips**

The error code in the OBD system will not be cleared unless the vehicle is driven 40 or more times.

■ **If your vehicle does not pass the I/M test**

Contact your Toyota dealer to prepare the vehicle for re-testing.

Do-it-yourself service precautions

If you perform maintenance yourself, be sure to follow the correct procedures as given in these sections.

Items	Parts and tools
Battery condition (→P. 667)	• Warm water • Baking soda • Grease • Conventional wrench (for terminal clamp bolts)
Brake fluid level (→P. 665)	• FMVSS No.116 DOT 3 or SAE J1703 brake fluid • Rag or paper towel • Funnel (used only for adding brake fluid)
Engine coolant level (→P. 662)	• “Toyota Super Long Life Coolant” or similar high quality ethylene glycol based non-silicate, non-amine, non-nitrite and non-borate coolant with long-life hybrid organic acid technology. For the U.S.A.: “Toyota Super Long Life Coolant” is pre-mixed with 50 % coolant and 50 % deionized water. For Canada: “Toyota Super Long Life Coolant” is pre-mixed with 55 % coolant and 45 % deionized water. • Funnel (used only for adding engine coolant)

Items	Parts and tools
Engine oil level (→P. 657)	• “Toyota Genuine Motor Oil” or equivalent • Rag or paper towel • Funnel (used only for adding engine oil)
Fuses (→P. 696)	• Fuse with same amperage rating as original
Light bulbs (→P. 709)	• Bulb with same number and wattage rating as original • Phillips-head screwdriver • Flathead screwdriver • Wrench
Radiator and condenser (→P. 664)	—
Tire inflation pressure (→P. 683)	• Tire pressure gauge • Compressed air source
Washer fluid (→P. 671)	• Water or washer fluid containing antifreeze (for winter use) • Funnel (used only for adding water or washer fluid)

⚠ CAUTION

The engine compartment contains many mechanisms and fluids that may move suddenly, become hot, or become electrically energized. To avoid death or serious injury, observe the following precautions:

■ When working on the engine compartment:

- Keep hands, clothing and tools away from the moving fan and engine drive belt.
- Be careful not to touch the engine, radiator, exhaust manifold, etc. right after driving as they may be hot. Oil and other fluids may also be hot.
- Do not leave anything that may burn easily, such as paper and rags, in the engine compartment.
- Do not smoke, cause sparks or expose an open flame to fuel or the battery. Fuel and battery fumes are flammable.
- Be extremely cautious when working on the battery. It contains poisonous and corrosive sulfuric acid.

■ When working near the electric cooling fans or radiator grille

Vehicles without a smart key system: Be sure the engine switch is off. With the engine switch in the “ON” position, the electric cooling fans may automatically start to run if the air conditioning is on and/or the coolant temperature is high. (→P. 664)

Vehicles with a smart key system: Be sure the “ENGINE START STOP” switch is off. With the “ENGINE START STOP” switch in IGNITION ON mode, the electric cooling fans may automatically start to run if the air conditioning is on and/or the coolant temperature is high. (→P. 664)

CAUTION

■ Safety glasses

Wear safety glasses to prevent flying or falling material, fluid spray, etc. from getting in your eyes.

NOTICE


■ If you remove the air cleaner filter

Driving with the air cleaner filter removed may cause excessive engine wear due to dirt in the air. Also a backfire could cause a fire in the engine compartment.

Hood

Release the lock from the inside of the vehicle to open the hood.


STEP 1

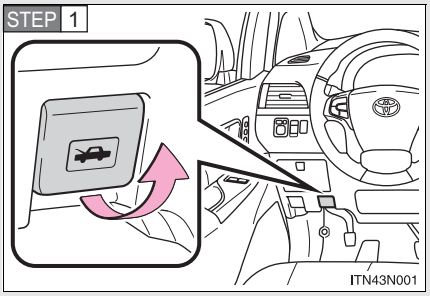

Pull the hood release lever.


The hood will pop up slightly.

STEP 2

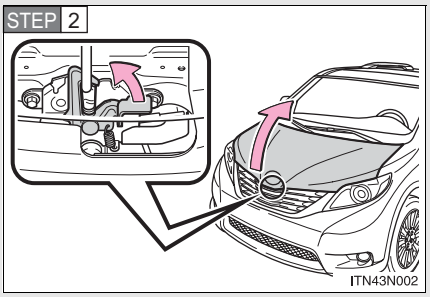

Pull up the auxiliary catch lever and lift the hood.

STEP 3

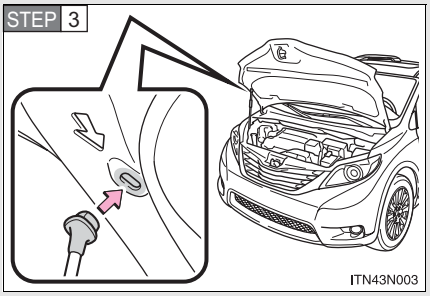

Hold the hood open by inserting the supporting rod into the slot.

CAUTION

Pre-driving check

Check that the hood is fully closed and locked.
If the hood is not locked properly, it may open while the vehicle is in motion and cause an accident, which may result in death or serious injury.

After installing the support rod into the slot

Make sure the rod supports the hood securely from falling down on to your head or body.

NOTICE


When closing the hood

Be sure to return the support rod to its clip before closing the hood. Closing the hood with the support rod up could cause the hood to bend.

Positioning a floor jack


When raising your vehicle with a floor jack, position the jack correctly. Improper placement may damage your vehicle or cause injury.

■ Front

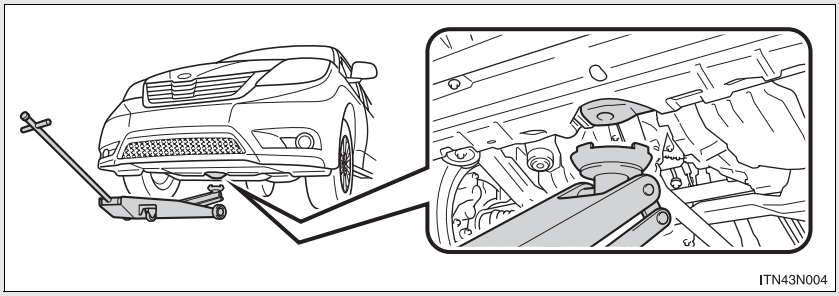


■ Rear

2WD models

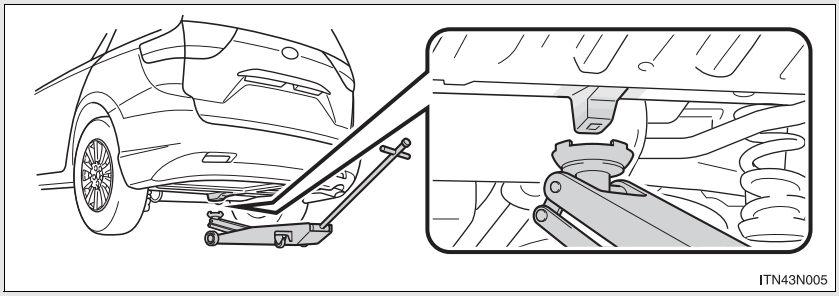


AWD models

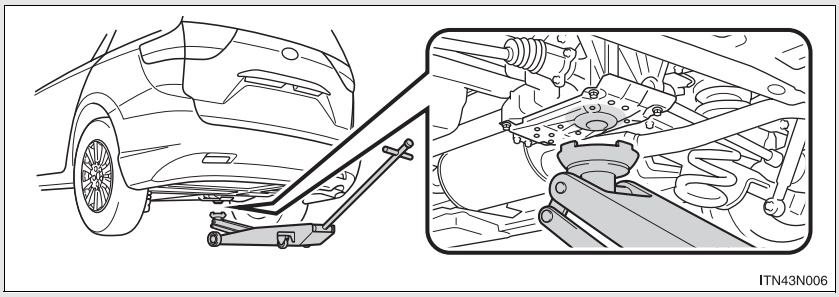

CAUTION

When raising your vehicle


Make sure to observe the following precautions to reduce the possibility of death or serious injury:



- Lift up the vehicle using a floor jack such as the one shown in the illustration.
- When using a floor jack, follow the instructions of the manual provided with the jack.
- Do not use the jack that was supplied with your vehicle.
- Do not put any part of your body underneath the vehicle when it is supported only by the floor jack.
- Always use floor jack and/or automotive jack stands on a solid, flat level surface.
- Do not start the engine while the vehicle is supported by the floor jack.
- Stop the vehicle on level, firm ground, firmly set the parking brake and shift the shift lever to P.
- Make sure to set the floor jack properly at the jack point.
  Raising the vehicle with an improperly positioned floor jack will damage the vehicle and may cause the vehicle to fall off the floor jack.
- Do not raise the vehicle while someone is in the vehicle.
- When raising the vehicle, do not place any objects on top of or underneath the floor jack.


Engine compartment

1AR-FE engine

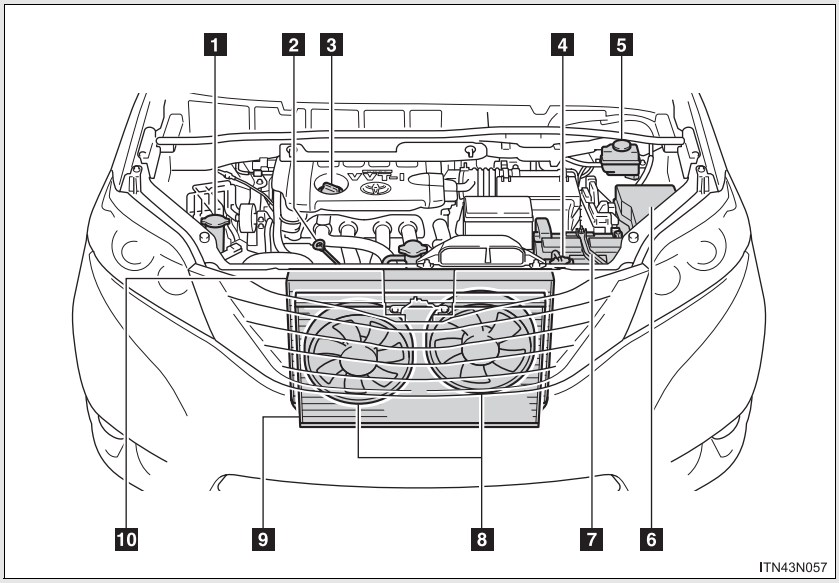

1 Washer fluid tank (→P. 671)
2 Engine oil level dipstick (→P. 657)
3 Engine oil filler cap (→P. 659)
4 Engine coolant reservoir (→P. 662)
5 Brake fluid reservoir (→P. 665)
6 Fuse box (→P. 696)
7 Battery (→P. 667)
8 Electric cooling fans
9 Condenser (→P. 664)
10 Radiator (→P. 664)

2GR-FE engine

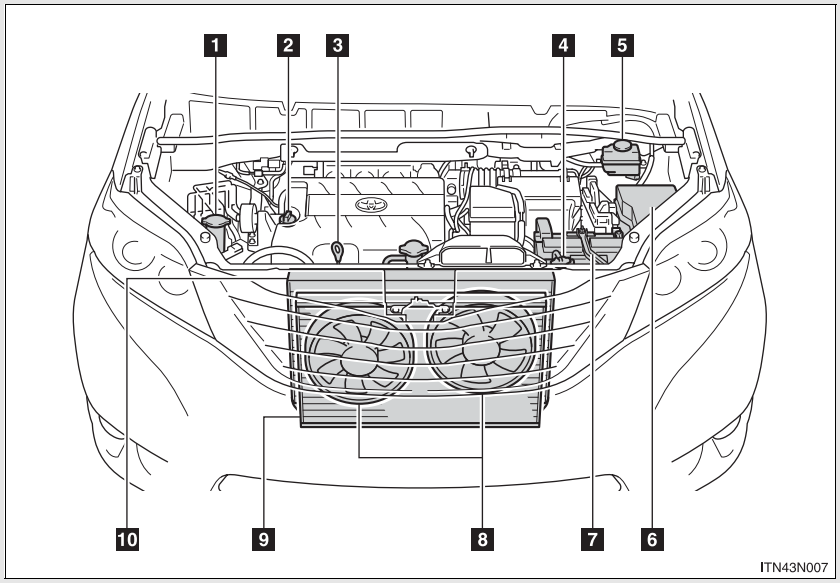

1 Washer fluid tank (→P. 671)
2 Engine oil filler cap (→P. 659)
3 Engine oil level dipstick (→P. 657)
4 Engine coolant reservoir (→P. 662)
5 Brake fluid reservoir (→P. 665)
6 Fuse box (→P. 696)
7 Battery (→P. 667)
8 Electric cooling fans
9 Condenser (→P. 664)
10 Radiator (→P. 664)


Engine oil

With the engine at operating temperature and turned off, check the oil level on the dipstick.

■ Checking the engine oil

STEP 1 Park the vehicle on level ground. After warming up the engine and turning it off, wait more than five minutes for the oil to drain back into the bottom of the engine.

STEP 2

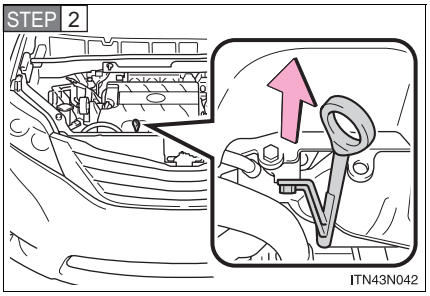

Holding a rag under the end, pull the dipstick out.


STEP 3 Wipe the dipstick clean.

STEP 4 Reinsert the dipstick fully.

STEP 5 Holding a rag under the end, pull the dipstick out and check the oil level.


STEP 6 Wipe the dipstick and reinsert it fully.

1AR-FE engine

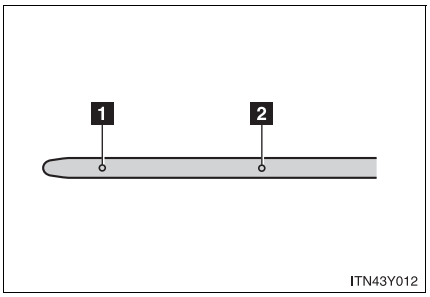


1 Low
2 Full

2GR-FE engine

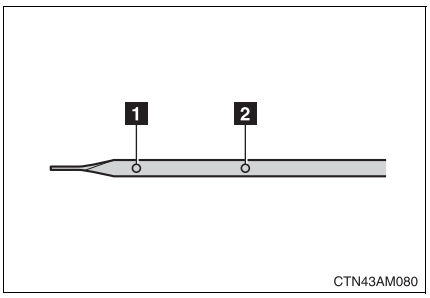

■ Adding engine oil

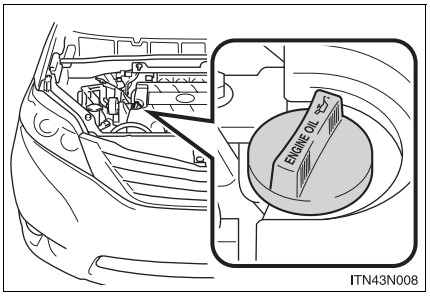

If the oil level is below or near the low level mark, add engine oil of the same type as that already in the engine.

Make sure to check the oil type and prepare the items needed before adding oil.

Engine oil selection	→P. 788
Oil quantity (Low→Full)	1.6 qt. (1.5 L, 1.3 Imp.qt.)
Items	Clean funnel

STEP 1 Remove the oil filler cap by turning it counterclockwise.

STEP 2 Add engine oil slowly, checking the dipstick.

STEP 3 Install the oil filler cap by turning it clockwise.

■ **Engine oil consumption**

- The amount of engine oil consumed depends on the oil viscosity, the quality of the oil and the way the vehicle is driven.
- More oil is consumed under driving conditions such as high speeds and frequent acceleration and deceleration.
- A new engine consumes more oil.
- When judging the amount of oil consumption, keep in mind that the oil may have become diluted, making it difficult to judge the true level accurately.
- Oil consumption: Max. 1.1 qt./600 miles, 0.9 Imp.qt./600 miles (1.0 L per 1000 km)
- If your vehicle consumes more than 1.1 qt. (1.0 L, 0.9 Imp.qt.) every 600 miles (1000 km), contact your Toyota dealer.

CAUTION

■ Used engine oil

- Used engine oil contains potentially harmful contaminants which may cause skin disorders such as inflammation and skin cancer, so care should be taken to avoid prolonged and repeated contact. To remove used engine oil from your skin, wash thoroughly with soap and water.
- Dispose of used oil and filters only in a safe and acceptable manner. Do not dispose of used oil and filters in household trash, in sewers or onto the ground. Call your Toyota dealer, service station or auto parts store for information concerning recycling or disposal.
- Do not leave used engine oil within the reach of children.

NOTICE

■ To prevent serious engine damage


Check the oil level on a regular basis.

■ When replacing the engine oil

- Be careful not to spill engine oil on the vehicle components.
- Avoid overfilling, or the engine could be damaged.
- Check the oil level on the dipstick every time you refill the vehicle.
- Be sure the engine oil filler cap is properly tightened.

Engine coolant

The coolant level is satisfactory if it is between the “FULL” and “LOW” lines on the reservoir when the engine is cold.

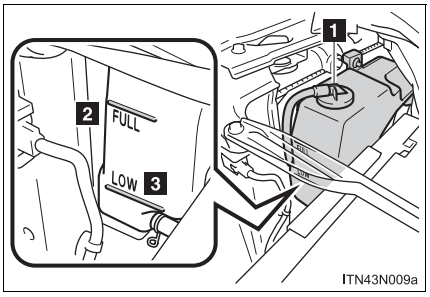

1 Reservoir cap
2 “FULL”
3 “LOW”

If the level is on or below the “LOW” line, add coolant up to the “FULL” line.

Coolant selection

Only use “Toyota Super Long Life Coolant” or similar high quality ethylene glycol based non-silicate, non-amine, non-nitrite, and non-borate coolant with long-life hybrid organic acid technology.

U.S.A.: “Toyota Super Long Life Coolant” is a mixture of 50 % coolant and 50 % deionized water.
(Minimum temperature: -31°F [-35°C])

Canada: “Toyota Super Long Life Coolant” is a mixture of 55 % coolant and 45 % deionized water.
(Minimum temperature: -44°F [-42°C])

For more details about engine coolant, contact your Toyota dealer.

If the coolant level drops within a short time of replenishing

Visually check the radiator, hoses, engine coolant reservoir caps drain cock and water pump.
If you cannot find a leak, have your Toyota dealer test the cap and check for leaks in the cooling system.

CAUTION

When the engine is hot

Do not remove the engine coolant reservoir cap.
The cooling system may be under pressure and may spray hot coolant if the cap is removed, causing serious injuries, such as burns.

NOTICE

When adding coolant

Coolant is neither plain water nor straight antifreeze. The correct mixture of water and antifreeze must be used to provide proper lubrication, corrosion protection and cooling. Be sure to read the antifreeze or coolant label.

If you spill coolant

Be sure to wash it off with water to prevent it from damaging parts or paint.

Radiator and condenser

Check the radiator and condenser and clear away any foreign objects.
If either of the above parts is extremely dirty or you are not sure of their condition, have your vehicle inspected by your Toyota dealer.

⚠ CAUTION

■ When the engine is hot


Do not touch the radiator or condenser as they may be hot and cause serious injuries, such as burns.

■ When the electric cooling fan is operating

Do not touch the engine compartment.
Vehicles without a smart key system: With the engine switch in the “ON” position, the electric cooling fans may automatically start to run if the air conditioning is on and/or the coolant temperature is high. Be sure the engine switch is in the “LOCK” position when working near the electric cooling fan or radiator grille.
Vehicles with a smart key system: With the “ENGINE START STOP” switch in IGNITION ON mode, the electric cooling fans may automatically start to run if the air conditioning is on and/or the coolant temperature is high. Be sure the “ENGINE START STOP” switch is OFF when working near the electric cooling fans or radiator grille.

Brake fluid

■ Checking fluid level

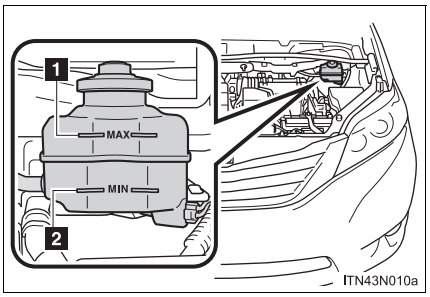


The brake fluid level should be between the “MAX” and “MIN” lines on the tank.

1 “MAX”

2 “MIN”

■ Adding fluid

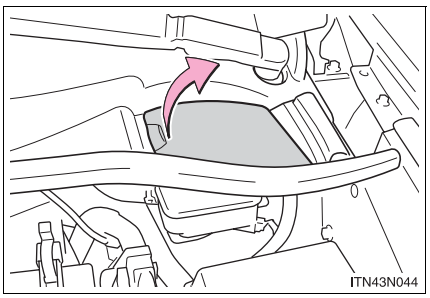

Lift the cover off.

Make sure to check the fluid type and prepare the necessary item.

Fluid type	FMVSS No.116 DOT 3 or SAE J1703 brake fluid
Item	Clean funnel

Brake fluid can absorb moisture from the air

Excess moisture in the brake fluid can cause a dangerous loss of braking efficiency. Use only newly opened brake fluid.

CAUTION

When filling the reservoir

Take care as brake fluid can harm your hands and eyes and damage painted surfaces.
If fluid gets on your hands or in your eyes, flush the affected area with clean water immediately.

If you still experience discomfort, see a doctor.

NOTICE

If the fluid level is low or high


It is normal for the brake fluid level to go down slightly as the brake pads wear out or when the fluid level in the accumulator is high.
If the reservoir needs frequent refilling, there may be a serious problem.

Battery

Check the battery as follows:

■ Battery exterior

Make sure that the battery terminals are not corroded and that there are no loose connections, cracks, or loose clamps.

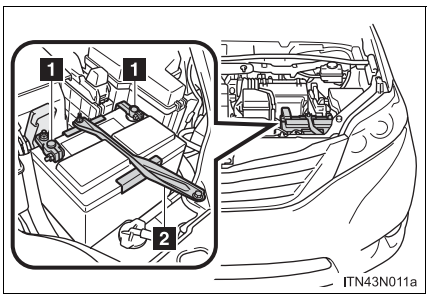

1 Terminals
2 Hold-down clamp

■ Before recharging

When recharging, the battery produces hydrogen gas which is flammable and explosive. Therefore, observe the following before recharging:

- If recharging with the battery installed on the vehicle, be sure to disconnect the ground cable.
- Make sure the power switch on the charger is off when connecting and disconnecting the charger cables to the battery.

■ **After recharging/reconnecting the battery (vehicles with a smart key system)**

- Unlocking the doors using the smart key system may not be possible immediately after reconnecting the battery. If this happens, use the wireless remote control or the mechanical key to lock/unlock the doors.
- Start the engine with the “ENGINE START STOP” switch in ACCESSORY mode. The engine may not start with the “ENGINE START STOP” switch turned OFF. However, the engine will operate normally from the second attempt.
- The “ENGINE START STOP” switch mode is recorded by the vehicle. If the battery is reconnected, the vehicle will return the “ENGINE START STOP” switch mode to the status it was in before the battery was disconnected. Make sure to turn off the power before disconnecting the battery. Take extra care when connecting the battery if the “ENGINE START STOP” switch mode prior to discharge is unknown.

If the system will not start even after multiple attempts, contact your Toyota dealer.

■ **Disconnecting the battery (vehicles with an AUTO ACCESS SEAT)**

Do not disconnect the battery while operating the AUTO ACCESS SEAT. The AUTO ACCESS SEAT will become inoperable.
For details, refer to “AUTO ACCESS SEAT OWNER’S MANUAL”.

CAUTION

■ **Chemicals in the battery**

Batteries contain poisonous and corrosive sulfuric acid and may produce hydrogen gas which is flammable and explosive. To reduce the risk of death or serious injury, take the following precautions while working on or near the battery:

- Do not cause sparks by touching the battery terminals with tools.
- Do not smoke or light a match near the battery.
- Avoid contact with eyes, skin and clothes.
- Never inhale or swallow electrolyte.
- Wear protective safety glasses when working near the battery.
- Keep children away from the battery.

■ **Where to safely charge the battery**

Always charge the battery in an open area. Do not charge the battery in a garage or closed room where there is insufficient ventilation.

CAUTION

■ How to recharge the battery

Only perform a slow charge (5 A or less). The battery may explode if charged at a quicker rate.

■ Emergency measures regarding electrolyte


- If electrolyte gets in your eyes
  Flush your eyes with clean water for at least 15 minutes and get immediate medical attention. If possible, continue to apply water with a sponge or cloth while traveling to the nearest medical facility.
- If electrolyte gets on your skin
  Wash the affected area thoroughly. If you feel pain or burning, get medical attention immediately.
- If electrolyte gets on your clothes
  It can soak through clothing on to your skin. Immediately take off the clothing and follow the procedure above if necessary.
- If you accidentally swallow electrolyte
  Drink a large quantity of water or milk. Get emergency medical attention immediately.

NOTICE

■ When recharging the battery

Never recharge the battery while the engine is running. Also, be sure all accessories are turned off.

Washer fluid

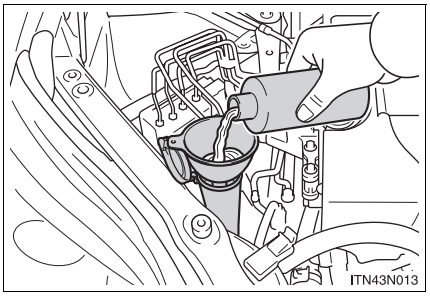

If any washer does not work or the low washer fluid warning light comes on, the washer tank may be empty. Add washer fluid.

⚠ CAUTION

When refilling washer fluid

Do not refill washer fluid when the engine is hot or running, as washer fluid contains alcohol and may catch fire if spilled on the engine etc.

⚠ NOTICE

Do not use any fluid other than washer fluid


Do not use soapy water or engine antifreeze instead of washer fluid.
Doing so may cause streaking on the vehicle's painted surfaces.

Diluting washer fluid

Dilute washer fluid with water as necessary.
Refer to the freezing temperatures listed on the washer fluid tank.

Replace or rotate tires in accordance with maintenance schedules and treadwear.

■ Checking tires

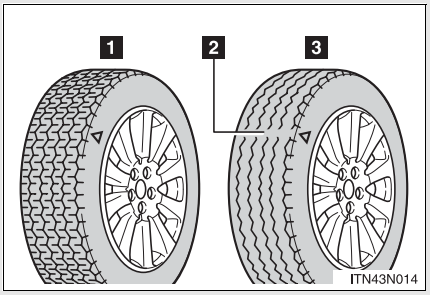

1 New tread

2 Treadwear indicator


3 Worn tread

The location of treadwear indicators is shown by the "TWI" or "△" marks, etc., molded on the sidewall of each tire.

Vehicles with compact spare tire: check spare tire condition and pressure if not rotated.

■ **Tire rotation**

Vehicles with a spare tire of a different wheel type from the installed tires

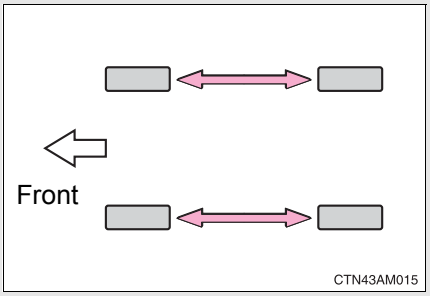

Rotate the tires in the order shown.

To equalize tire wear and extend tire life, Toyota recommends that tire rotation is carried out at the same interval as tire inspection.

■ **Tire pressure warning system**

Your vehicle is equipped with a tire pressure warning system that uses tire pressure warning valves and transmitters to detect low tire inflation pressure before serious problems arise.
(→P. 733)

Vehicles with compact spare tire: The compact spare tire is not equipped with the tire pressure warning valve and transmitters.

Installing tire pressure warning valves and transmitters

When replacing tires or wheels, tire pressure warning valves and transmitters must also be installed.

When new tire pressure warning valves and transmitters are installed, new ID codes must be registered in the tire pressure warning computer and the tire pressure warning system must be initialized. Have tire pressure warning valve and transmitter ID codes registered by your Toyota dealer. (→P. 676)

Initializing the tire pressure warning system

When the tire size is changed, the tire pressure warning system must be initialized.

When the tire pressure warning system is initialized, the current tire inflation pressure is set as the benchmark pressure.

■ How to initialize the tire pressure warning system

STEP 1 Park the vehicle in a safe place and turn the engine switch (vehicles without a smart key system) or the “ENGINE START STOP” switch (vehicles with a smart key system) off.


Initialization cannot be performed while the vehicle is moving.

STEP 2 Adjust the tire inflation pressure to the specified cold tire inflation pressure level. (→P. 794)

Make sure to adjust the tire pressure to the specified cold tire inflation pressure level. The tire pressure warning system will operate based on this pressure level.

STEP 3 Turn the engine switch to the “ON” position (vehicles without a smart key system) or “ENGINE START STOP” switch to IGNITION ON mode (vehicles with a smart key system).

STEP 4

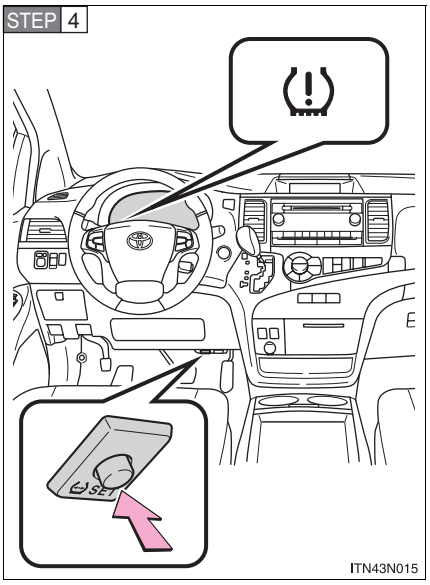

Press and hold the tire pressure warning reset switch until the tire pressure warning light blinks slowly 3 times.

STEP 5 Vehicles without a smart key system: Wait for a few minutes with the engine switch in the “ON” position and then turn the engine switch to the “ACC” or “LOCK” position.
Vehicles with a smart key system: Wait for a few minutes with the “ENGINE START STOP” switch in IGNITION ON mode and then turn the “ENGINE START STOP” switch off.

Registering ID codes

The tire pressure warning valve and transmitter is equipped with a unique ID code. When replacing a tire pressure warning valve and transmitter, it is necessary to register the ID code. Have the ID code registered by your Toyota dealer.

When to replace your vehicle's tires

Tires should be replaced if:

- You have tire damage such as cuts, splits, cracks deep enough to expose the fabric, and bulges indicating internal damage
- A tire goes flat repeatedly or cannot be properly repaired due to the size or location of a cut or other damage

If you are not sure, consult with your Toyota dealer.

Replacing tires and wheels

If the ID code of the tire pressure warning valve and transmitter is not registered, the tire pressure warning system will not work properly. After driving for about 20 minutes, the tire pressure warning light blinks for 1 minute and stays on to indicate a system malfunction.

■ **Tire life**


Any tire over 6 years old must be checked by a qualified technician even if it has seldom or never been used or damage is not obvious.

■ **Routine tire inflation pressure checks**

The tire pressure warning system does not replace routine tire inflation pressure checks. Make sure to check tire inflation pressure as part of your routine of daily vehicle checks.

■ **Maximum load of tire**

Check that the number given by dividing the maximum load by 1.10 of the replacement tire is greater than 1/2 of the Gross Axle Weight Ratings (GAWR) of either the front axle or the rear axle, whichever is greater.



For the GAWR, see the Certification Label. For the maximum load of the tire, see the load limit at maximum cold tire inflation pressure mentioned on the sidewall of the tire. (→P. 801)

Tire types

1 Summer tires

Summer tires are high-speed performance tires best suited to highway driving under dry conditions. Since summer tires do not have the same traction performance as snow tires, summer tires are inadequate for driving on snow-covered or icy roads. For driving on snow-covered roads or icy roads, the use of snow tires is recommended. When installing snow tires, be sure to replace all four tires.

2 All season tires

All season tires are designed to provide better traction in snow and to be adequate for driving in most winter conditions, as well as for use year round. All season tires, however, do not have adequate traction performance compared with snow tires in heavy or loose snow. Also, all season tires fall short in acceleration and handling performance compared with summer tires in highway driving.

3 Snow tires

For driving on snow-covered roads or icy roads, we recommend using snow tires. If you need snow tires, select tires of the same size, construction and load capacity as the originally installed tires. Since your vehicle has radial tires as original equipment, make sure your snow tires also have radial construction. Do not install studded tires without first checking local regulations for possible restriction. Snow tires should be installed on all wheels. (→P. 352)

■ **Initializing the tire pressure warning system**

Initialize the system with the tire inflation pressure adjusted to the specified level.

■ **If the tread on snow tires wears down below 0.16 in. (4 mm)**

The effectiveness of the tires as snow tires is lost.

■ **If you press the tire pressure warning reset switch accidentally**

If initialization is performed, adjust the tire inflation pressure to the specified level and initialize the tire pressure warning system again.

■ **When the initialization of the tire pressure warning system has failed**

Initialization can be completed in a few minutes. However, in the following cases, the settings has not been recorded and the system will not operate properly. If repeated attempts to record tire inflation pressure settings are unsuccessful, have the vehicle inspected by your Toyota dealer.

- When operating the tire pressure warning reset switch, the tire pressure warning light does not blink 3 times.
- After driving for a certain period of time since the initialization has been completed, the warning light comes on after blinking for 1 minute.

■ **Tire pressure warning system certification**

FCC ID:GQ4-45T

FCC ID:GQ4-32T

FCC ID:GQ4-37R

For vehicles sold in the U.S.A.

NOTE:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For vehicles sold in Canada

NOTE:

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

CAUTION

When inspecting or replacing tires

Observe the following precautions to prevent accidents. Failure to do so may cause damage to parts of the drive train, as well as dangerous handling characteristics, which may lead to an accident resulting in death or serious injury.

- Do not mix tires of different makes, models or tread patterns. Also, do not mix tires of remarkably different treadwear.
- Do not use tire sizes other than those recommended by Toyota.
- Do not mix differently constructed tires (radial, bias-belted or bias-ply tires).
- Do not mix summer, all season and snow tires.
- Do not use tires that have been used on another vehicle. Do not use tires if you do not know how they were used previously.
- Do not tow if your vehicle has a compact spare tire installed.

When initializing the tire pressure warning system

Do not operate the tire pressure warning reset switch without first adjusting the tire inflation pressure to the specified level. Otherwise, the tire pressure warning light may not come on even if the tire inflation pressure is low, or it may come on when the tire inflation pressure is actually normal.

NOTICE

Repairing or replacing tires, wheels, tire pressure warning valves, transmitters and tire valve caps

- When removing or fitting the wheels, tires or the tire pressure warning valves and transmitters, contact your Toyota dealer as the tire pressure warning valves and transmitters may be damaged if not handled correctly.
- When replacing tire valve caps, do not use tire valve caps other than those specified. The cap may become stuck.

To avoid damage to the tire pressure warning valves and transmitters

When a tire is repaired with liquid sealants, the tire pressure warning valve and transmitter may not operate properly. If a liquid sealant is used, contact your Toyota dealer or other qualified service shop as soon as possible. Make sure to replace the tire pressure warning valve and transmitter when replacing the tire. (→P. 674)

Driving on rough roads

Take particular care when driving on roads with loose surfaces or potholes.
These conditions may cause losses in tire inflation pressure, reducing the cushioning ability of the tires. In addition, driving on rough roads may cause damage to the tires themselves, as well as the vehicle's wheels and body.


If tire inflation pressure of each tire becomes low while driving

Do not continue driving, or your tires and/or wheels may be ruined.

Tire inflation pressure


■ Tire inflation pressure

The recommended cold tire inflation pressure and tire size are displayed on the tire and loading information label. (→P. 794)

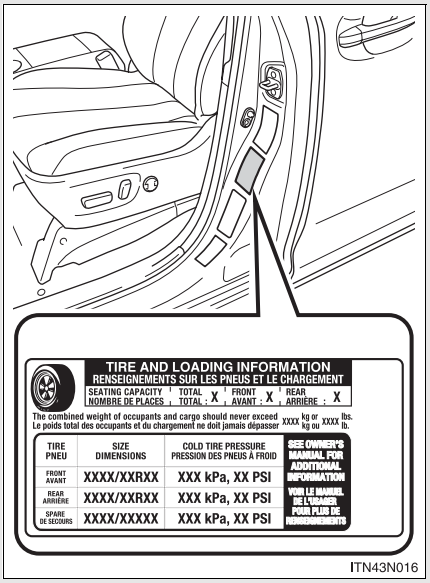

ITN43N016

■ **Inspection and adjustment procedure**

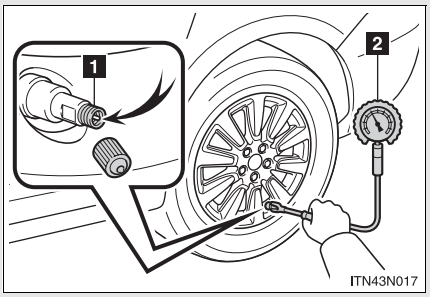

1 Tire valve
2 Tire pressure gauge

STEP 1 Remove the tire valve cap.

STEP 2 Press the tip of the tire pressure gauge onto the tire valve.

STEP 3 Read the pressure using the gauge gradations.

STEP 4 If the tire inflation pressure is not at the recommended levels, adjust the pressure.
If you add too much air, press the center of the valve to deflate.

STEP 5 After completing the tire inflation pressure measurement and adjustment, apply soapy water to the valve and check for leakage.

STEP 6 Put the tire valve cap back on.

■ **Tire inflation pressure check interval**

You should check tire inflation pressure every two weeks, or at least once a month.
Do not forget to check the spare.

■ **Effects of incorrect tire inflation pressure**

Driving with incorrect tire inflation pressure may result in the following:

- Reduced fuel efficiency
- Reduced driving comfort and tire life
- Reduced safety
- Damage to the drive train

If a tire needs frequent refilling, have it checked by your Toyota dealer.

■ **Instructions for checking tire inflation pressure**

When checking tire inflation pressure, observe the following:

- Check only when the tires are cold.
  If your vehicle has been parked for at least 3 hours or has not been driven for more than 1 mile or 1.5 km, you will get an accurate cold tire inflation pressure reading.
- Always use a tire pressure gauge.
  The appearance of the tire can be misleading. In addition, tire inflation pressure that is even just a few pounds off can affect ride quality and handling.
- Do not reduce tire inflation pressure after driving. It is normal for tire inflation pressure to be higher after driving.
- Never exceed the vehicle capacity weight.
  Passengers and luggage weight should be placed so that the vehicle is balanced.

CAUTION

Proper inflation is critical to save tire performance

Keep your tires properly inflated.
Otherwise, the following conditions may occur and result in an accident causing death or serious injury.

- Excessive wear
- Uneven wear
- Poor handling
- Possibility of blowouts resulting from overheated tires
- Poor sealing of the tire bead
- Wheel deformation and/or tire separation
- A greater possibility of tire damage from road hazards

NOTICE

When inspecting and adjusting tire inflation pressure

Be sure to put the tire valve caps back on.
Without the valve caps, dirt or moisture could get into the valve and cause air leakage, which could result in an accident. If the caps are lost, replace them as soon as possible.

Wheels

If a wheel is bent, cracked or heavily corroded, it should be replaced.
Otherwise, the tire may separate from the wheel or cause a loss of handling control.

Wheel selection

When replacing wheels, care should be taken to ensure that they are equivalent to those removed in load capacity, diameter, rim width and inset*.
Replacement wheels are available at your Toyota dealer.

*: Conventionally referred to as “offset”.

Toyota does not recommend using the following:

- Wheels of different sizes or types
- Used wheels
- Bent wheels that have been straightened

Aluminum wheel precautions

- Use only Toyota wheel nuts and wrenches designed for use with your aluminum wheels.
- When rotating, repairing or changing your tires, check that the wheel nuts are still tight after driving 1000 miles (1600 km).
- Be careful not to damage the aluminum wheels when using tire chains.
- Use only Toyota genuine balance weights or equivalent and use a plastic or rubber hammer when balancing your wheels.

■ **When replacing wheels**

The wheels of your vehicle are equipped with tire pressure warning valves and transmitters that allow the tire pressure warning system to provide advanced warning in the event of a loss in tire inflation pressure. Whenever wheels are replaced, tire pressure warning valves and transmitters must be installed. (→P. 674)


CAUTION

■ **When replacing wheels**

- Do not use wheels that are a different size from those recommended in the Owner's Manual, as this may result in a loss of handling control.
- Never use an inner tube in a leaking wheel which is designed for a tubeless tire. Doing so may result in an accident, causing death or serious injury.

CAUTION

When installing the wheel nuts



- Be sure to install the wheel nuts with the tapered ends facing inward. Installing the nuts with the tapered ends facing outward can cause the wheel to break and eventually cause the wheel to come off while driving, which could lead to an accident resulting in death or serious injury.
- Never use oil or grease on the wheel bolts or wheel nuts.
  Oil and grease may cause the wheel nuts to be excessively tightened, leading to bolt or disc wheel damage. In addition, the oil or grease can cause the wheel nuts to loosen and the wheel may fall off, causing an accident and resulting in death or serious injury. Remove any oil or grease from the wheel bolts or wheel nuts.

NOTICE

Replacing tire pressure warning valves and transmitters

- Because tire repair or replacement may affect the tire pressure warning valves and transmitters, make sure to have tires serviced by your Toyota dealer or other qualified service shop. In addition, make sure to purchase your tire pressure warning valves and transmitters at your Toyota dealer.
- Ensure that only genuine Toyota wheels are used on your vehicle.
  Tire pressure warning valves and transmitters may not work properly with non-genuine wheels.


Air conditioning filter

The air conditioning filter must be cleaned or changed regularly to maintain air conditioning efficiency.

■ Removal method


STEP 1 Turn the engine switch (vehicles without a smart key system) or “ENGINE START STOP” switch (vehicles with a smart key system) off.

STEP 2

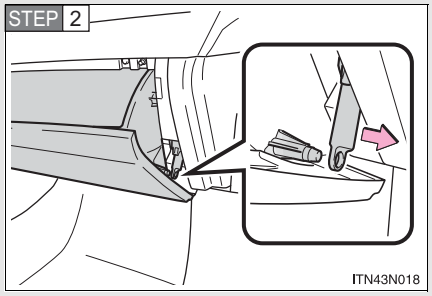


Open the glove box. Slide off the damper.

STEP 3

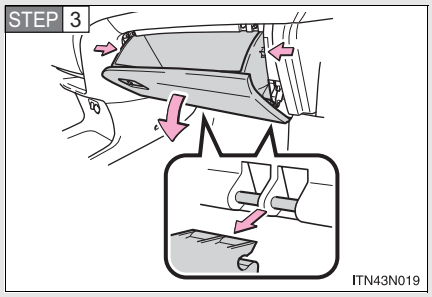


Push in each side of the glove box to disconnect the claws.

STEP 4

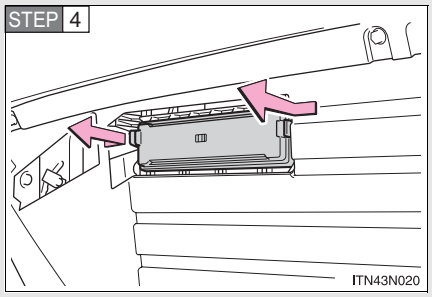

Remove the filter cover.


STEP 5

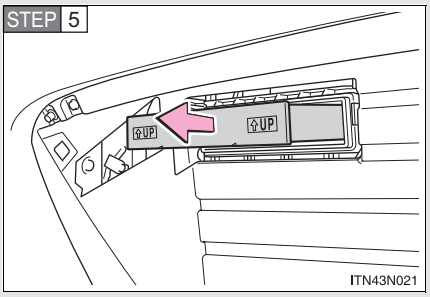

Remove the filter.

The "↑UP" marks shown on the filter should be pointing up.

■ Cleaning method

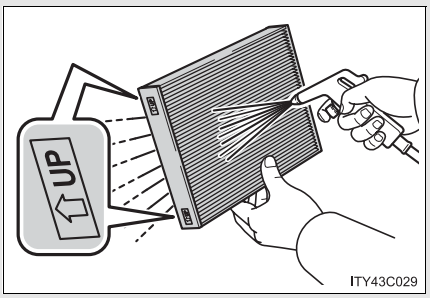

If the filter is dirty, clean by blowing compressed air through the filter from the underside.

Hold the air gun 2 in. (5 cm) from the filter and blow for approximately 2 minutes at 72 psi (500 kPa, 5.0 kgf/cm^2 or bar).

If an air gun is not available, have the filter cleaned by your Toyota dealer.

■ **Checking interval**

Inspect, clean and replace the air conditioning filter according to the maintenance schedule. In dusty areas or areas with heavy traffic flow, more frequent cleaning or early replacement may be required. (For scheduled maintenance information, please refer to the “Scheduled Maintenance Guide” or “Owner’s Manual Supplement”.)

■ **If air flow from the vents decreases dramatically**

The filter may be clogged. Check the filter and replace it if necessary.

⚠ NOTICE

■ **To prevent damage to the system**

- When using the air conditioning system, make sure that a filter is always installed.
- When cleaning the filter, do not clean with water.

Wireless remote control/electronic key battery


Replace the battery with a new one if it is discharged.

■ You will need the following items:

- Flathead screwdriver
- Lithium battery CR2032


■ Replacing the battery (vehicles without a smart key system)

STEP 1

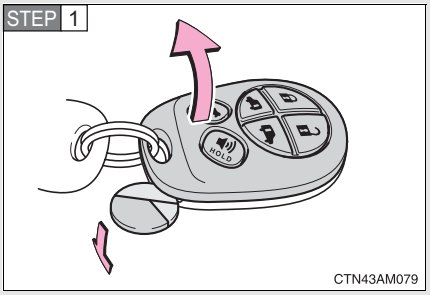

Remove the cover using a coin protected with tape etc.

STEP 2

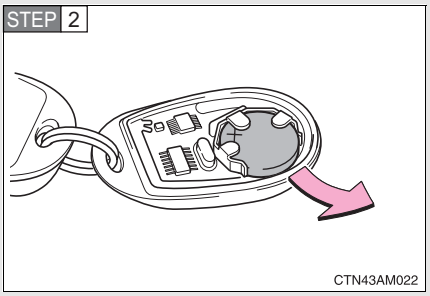


Remove the discharged transmitter battery.

Insert a new battery with the "+" terminal facing up.


■ Replacing the battery (vehicles with a smart key system)

STEP 1

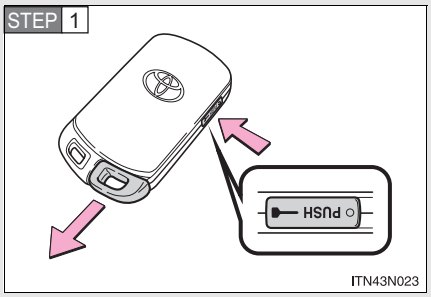

Take out the mechanical key.


STEP 2

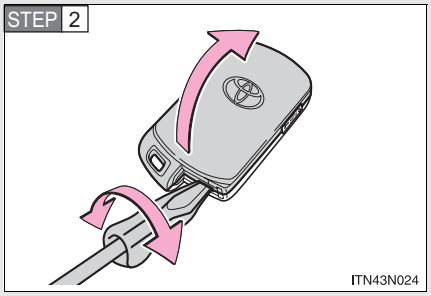

Remove the cover.

To prevent damage to the key, cover the tip of the screwdriver with a rag.

STEP 3

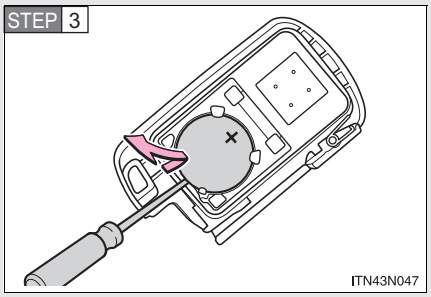

Remove the depleted battery.

Insert a new battery with the “+” terminal facing up.

■ **Use a CR2032 lithium battery**

- Batteries can be purchased at your Toyota dealer, local electrical appliance shops or camera stores.
- Replace only with the same or equivalent type recommended by the manufacturer.
- Dispose of used batteries according to local laws.

■ **If the key battery is depleted**

The following symptoms may occur.

- The smart key system (if equipped) and wireless remote control will not function properly.
- The operational range will be reduced.

CAUTION

■ **Removed battery and other parts**

Keep away from children. These parts are small and if swallowed by a child, they can cause choking. Failure to do so could result in death or serious injury.

NOTICE

■ **For normal operation after replacing the battery**

Observe the following precautions to prevent accidents.

- Always work with dry hands.
  Moisture may cause the battery to rust.
- Do not touch or move any other components inside the remote control.
- Do not bend either of the battery terminals.

Checking and replacing fuses

If any of the electrical components do not operate, a fuse may have blown. If this happens, check and replace the fuses as necessary.

STEP 1 **Vehicles without a smart key system**


Turn the engine switch off.

Vehicles with a smart key system

Turn the “ENGINE START STOP” switch OFF.


STEP 2 Open the fuse box cover.

Engine compartment

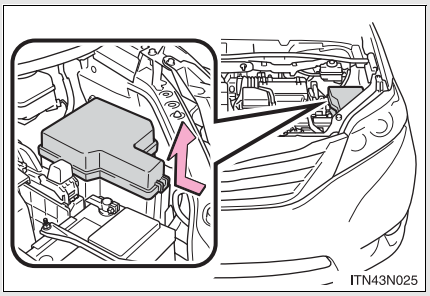

Push the tab in and lift the lid off.


Driver’s side instrument panel

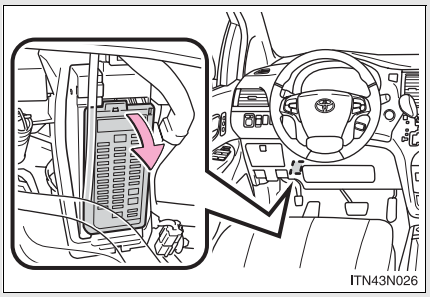

Remove the lid.

STEP 3 After a system failure, see “Fuse layout and amperage ratings” (→P. 699) for details about which fuse to check.

STEP 4

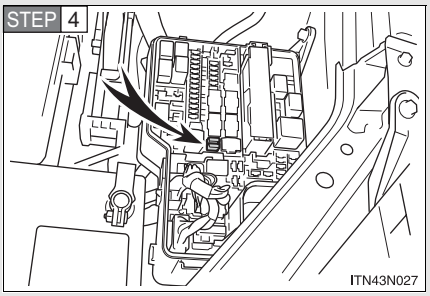


Take out the pullout tool.

Only type A fuses can be removed using the pullout tool.

STEP 5 Check if the fuse has blown.

Type A

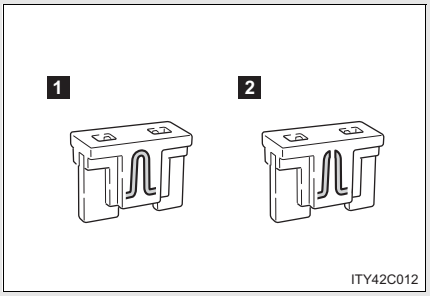


1 Normal fuse

2 Blown fuse

Replace the blown fuse with a new fuse of an appropriate amperage rating. The amperage rating can be found on the fuse box lid.

Type B

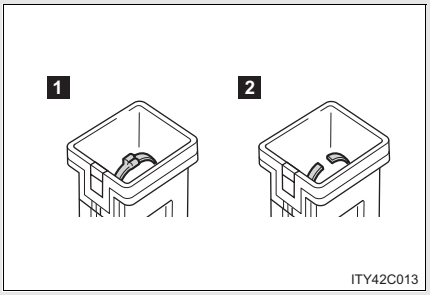


1 Normal fuse

2 Blown fuse

Replace the blown fuse with a new fuse of an appropriate amperage rating. The amperage rating can be found on the fuse box lid.


Type C

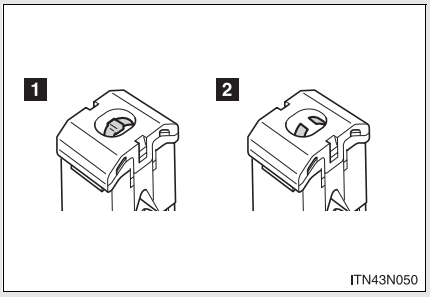

1 Normal fuse
2 Blown fuse

Contact your Toyota dealer.


Type D

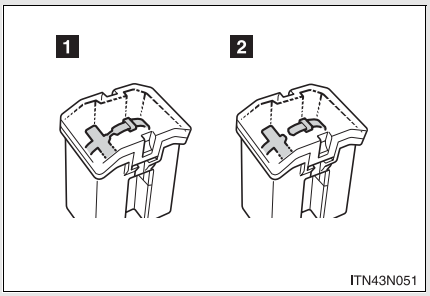

1 Normal fuse
2 Blown fuse

Contact your Toyota dealer.

Type E

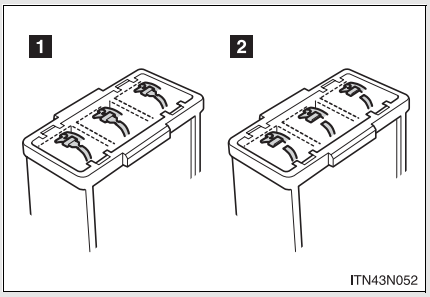


1 Normal fuse
2 Blown fuse

Contact your Toyota dealer.

Fuse layout and amperage ratings

■ Engine compartment

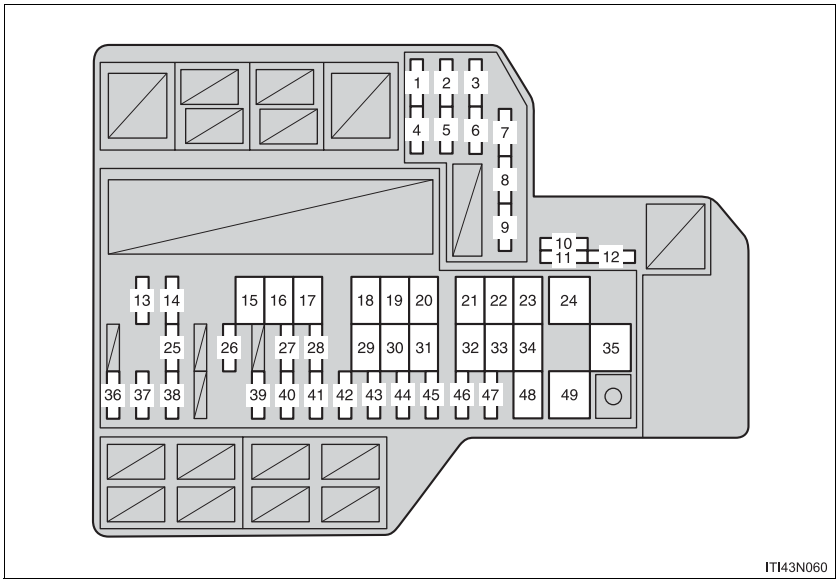

Fuse		Ampere	Circuit
1	H-LP LVL*1	7.5 A	Headlight leveling system
2	DSS1	7.5 A	PCS (Pre-collision system), dynamic radar cruise control system
3	ST NO.2	7.5 A	Starting system, multiport fuel injection system/sequential multiport fuel injection system
4	H-LP LH*1	20 A	Left-hand headlight (low beam)
5	H-LP RH*1	20 A	Right-hand headlight (low beam)

Fuse		Ampere	Circuit
6	ECT	7.5 A	Multiport fuel injection system/ sequential multiport fuel injection system, automatic transaxle
7	EFI NO.2	10 A	Multiport fuel injection system/ sequential multiport fuel injection system
8	H-LP RH HI	10 A	Right-hand headlight (high beam)
9	H-LP LH HI	10 A	Left-hand headlight (high beam)
10	SPARE	10 A	Spare-fuse
11	SPARE	15 A	Spare-fuse
12	SPARE	20 A	Spare-fuse
13	MG CLT	7.5 A	A/C magnetic clutch
14	INV	20 A	Inverter
15	PTC HTR NO.1*2	50 A	PTC heater
16	PTC HTR NO.2*2	30 A	PTC heater
17	PTC HTR NO.3*2	30 A	PTC heater
18	A/C RR	40 A	Rear air conditioning system
19	PBD	30 A	Power back door
20	FOLD SEAT*3	30 A	Power third seat
21	HTR	50 A	Air conditioning system
22	PSB*3	30 A	Pre-collision seat belt
23	A/A SEAT	30 A	AUTO ACCESS SEAT


Fuse		Ampere	Circuit
24	FAN	60 A	Electric cooling fans
25	HAZ	15 A	Turn signal lights, gauges and meters
26	RSE	15 A	Rear seat entertainment system
27	MIRROR*3	10 A	Outside rear view mirror control, outside rear view mirror heaters
28	AMP	30 A	Audio system
29	VSC NO.2	30 A	Vehicle dynamics integrated management, ABS, vehicle stability control
30	ST	30 A	Starting system
31	P/I	40 A	Horn, left-hand headlight (low beam), right-hand headlight (low beam)
32	H-LP MAIN*1	40 A	Discharge headlight
	SPARE*4	30 A	Spare-fuse
33	AM2*5	30 A	“ST NO.2”, “GAUGE NO.2” and “IG2” fuses
34	VSC NO.1	50 A	Vehicle dynamics integrated management, ABS, vehicle stability control

Fuse		Ampere	Circuit
35	ALT	140 A	Charging system, horn, left-hand headlight (low beam), right-hand headlight (low beam), fog light, outside rear view mirror heaters, rear window defoggers, windshield wiper de-icer
36	RAD NO.1	15 A	Audio system
37	DOME	7.5 A	Vanity lights, personal/interior lights, personal lights, engine switch light, rear ceiling lights, door courtesy lights, luggage compartment light, gauges and meters, clock
38	ECU-B	10 A	Main body ECU, smart key system, wireless remote control, power back door, power sliding door, rear view monitor, multi information display, power window, outside rear view mirror control, steering angle sensor, auto-anti glare inside rear view mirror, AUTO ACCESS SEAT remote control, front passenger occupant classification system
39	ETCS	10 A	Multiport fuel injection system/ sequential multiport fuel injection system
40	A/F	20 A	Multiport fuel injection system/ sequential multiport fuel injection system
41	STRG LOCK*6	20 A	Steering lock system
42	ALT-S	7.5 A	Charging system

Fuse		Ampere	Circuit
43	INJ	25 A	Multiport fuel injection system/ sequential multiport fuel injection system, “IG NO.2” and “IG2” fuses
44	ECU-B NO.2	7.5 A	Air conditioning system
45	AM2 NO.2*6	7.5 A	Multiplex communication system, starting system
46	EFI NO.1	25 A	Multiport fuel injection system/ sequential multiport fuel injection system, “ECT” and “EFI NO.2” fuses
47	SMART*6	5 A	Smart key system
48	DRL	30 A	Daytime running light system, “H-LP LH (HI)” and “H-LP RH (HI)” fuses
49	EPS	60 A	Electric power steering

*1: Vehicles with discharge headlights only
*2: Vehicles with a 1AR-FE engine only
*3: Vehicles with a 2GR-FE engine only
*4: Vehicles without discharge headlights only
*5: Vehicles without a smart key system only
*6: Vehicles with a smart key system only

■ Under the driver's side instrument panel

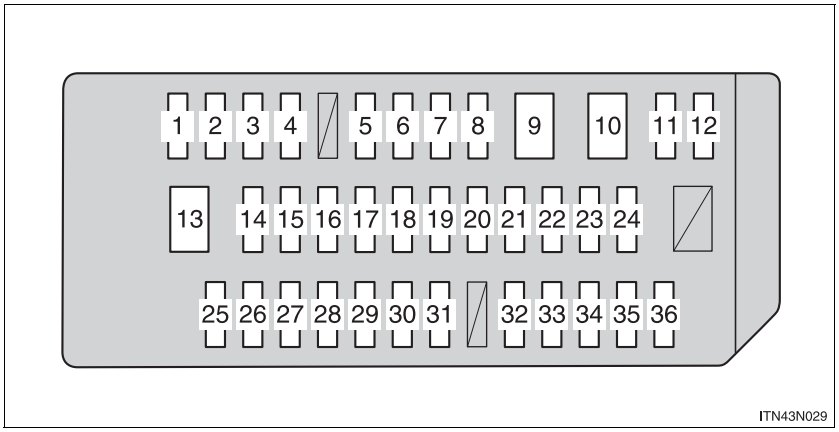

Fuse		Ampere	Circuit
1	P/OUTLET	15 A	Power outlets
2	RAD NO.2	7.5 A	Audio system, navigation system, rear seat entertainment system
3	ECU-ACC	10 A	Main body ECU, clock, shift lock system, power rear view mirror control, multiplex communication system
4	CIG	15 A	Power outlets
5	GAUGE NO.1	10 A	Emergency flashers, back up lights, navigation system, multi information display, automatic transaxle, multiport fuel injection system/sequential multiport fuel injection system, charging system

Fuse		Ampere	Circuit
6	ECU-IG NO.1	10 A	Multiplex communication system, stop lights, navigation system, vehicle stability control system, Active Torque Control 4WD, intuitive parking assist, auto anti-glare inside rear view mirror, pre-collision seat belt, outside rear view mirror, seat heater, TPMS, yaw rate & G sensor, steering angle sensor, AUTO ACCESS SEAT, main body ECU
7	P/W RL	20 A	Rear power windows (left-side)
8	D/L	15 A	Power door lock system
9	P/SEAT FR	30 A	Power front seat (right-side)
10	S/ROOF	30 A	Moon roof
11	P/W RR	20 A	Rear power windows (right-side)
12	P/W FR	20 A	Front power windows (right-side)
13	P/SEAT FL	30 A	Power front seat (left-side), driving position memory system
14	STOP	10 A	Stop lights, ABS, vehicle stability control system, rear combination light, high mounted stop light, automatic transaxle, shift lock system, multiplex communication system, power third seat switch, multiport fuel injection system/sequential multiport fuel injection system, trailer lights (stop lights)
15	P/W FL	20 A	Front power windows (left-side)

Fuse		Ampere	Circuit
16	PSD LH	25 A	Power sliding door (left-side)
17	4WD	7.5 A	Active Torque Control 4WD
18	AM1	10 A	Starting system
19	GAUGE NO.2	7.5 A	Gauges and meters, multi information display
20	IG2	7.5 A	Automatic transaxle, multiport fuel injection system/sequential multiport fuel injection system, SRS airbag system, front passenger occupant classification system, steering lock system, smart key system, starting system, fuel pump
21	PANEL	10 A	Air conditioning system, navigation system, front passenger's seat belt reminder light, audio system, steering switch, intuitive parking assist switch, personal/interior light main switch, shift lever light, headlight levering switch, power door lock main switch, clock, power quarter window switch, seat heater switch, emergency flashers, rear window defogger switch, vehicle stability control off switch, console box light, power slide switch light

Fuse		Ampere	Circuit
22	TAIL	10 A	Tail lights, trailer lights (tail lights), license plate light, rear combination lights
23	WIP ECU	7.5 A	Windshield wiper and rear window wiper
24	P/VENT	15 A	Power quarter windows
25	AFS	10 A	Automatic High Beam
26	WIP	30 A	Windshield wiper
27	WASHER	20 A	Windshield washer
28	WIP RR	20 A	Rear window wiper
29	WASHER RR	15 A	Rear window washer
30	HTR-IG	10 A	Air conditioning system
31	SHIFT LOCK	7.5 A	Shift lock system, multiport fuel injection system/sequential multi-port fuel injection system
32	ECU-IG NO.2	10 A	Pre-collision system, pre-collision seat belt, dynamic radar cruise control, electric power steering, rain-sensing windshield wipers, driving position memory system, power sliding door, power third seat, power back door, multiplex communication system
33	PSD RH	25 A	Power sliding door (right-side)
34	OBD	7.5 A	On-board diagnosis system
35	S-HTR FL	15 A	Seat heater (left-side)
36	S-HTR FR	15 A	Seat heater (right-side)

■ **After a fuse is replaced**

- If the lights do not turn on even after the fuse has been replaced, a bulb may need replacement. (→P. 709)
- If the replaced fuse blows again, have the vehicle inspected by your Toyota dealer.

■ **If there is an overload in the circuit**

The fuses are designed to blow, protecting the wiring harness from damage.

■ **When replacing light bulbs**

Toyota recommends that you use genuine Toyota products designed for this vehicle. Because certain bulbs are connected to circuits designed to prevent overload, non-genuine parts or parts not designed for this vehicle may be unusable.

⚠ CAUTION

■ **To prevent system breakdowns and vehicle fire**

Observe the following precautions.
Failing to do so may cause damage, and possibly a fire or injury.

- Never use a fuse of a higher amperage rating than that indicated, or use any other object in place of a fuse.
- Always use a genuine Toyota fuse or equivalent.
  Never replace a fuse with a wire, even as a temporary fix.
  This can cause extensive damage or even fire.
- Do not modify the fuses or fuse boxes.

⚠ NOTICE

■ **Before replacing fuses**

Have the cause of electrical overload determined and repaired by your Toyota dealer as soon as possible.

Light bulbs

You may replace the following bulbs by yourself. The difficulty level of replacement varies depending on the bulb. If necessary bulb replacement seems difficult to perform, contact your Toyota dealer.

For more information about replacing other light bulbs, contact your Toyota dealer.


■ Preparing for light bulb replacement

Check the wattage of the light bulb to be replaced. (→P. 796)


■ Turning off the power back door main switch

→P. 84

■ Front bulb locations

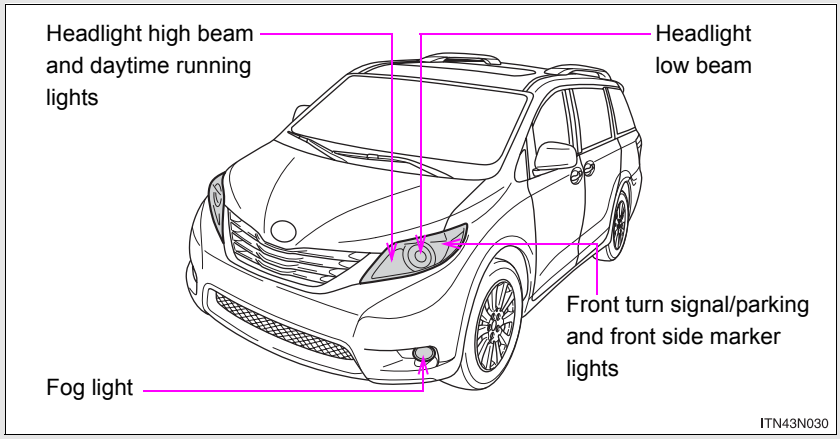

■ Rear bulb locations

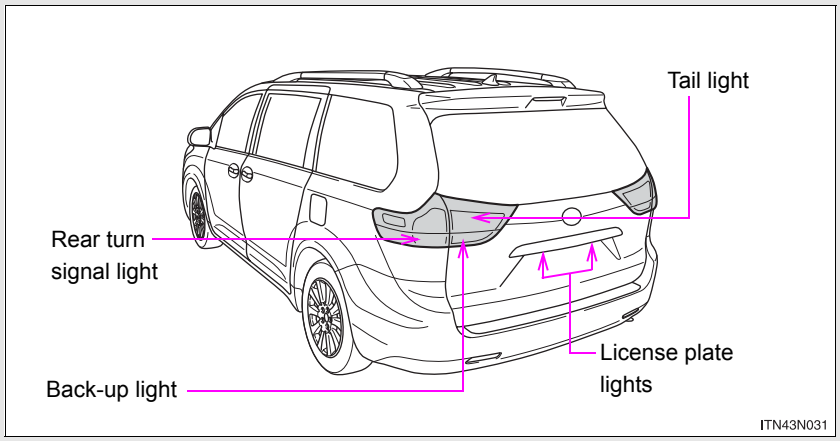


Replacing light bulbs

■ Headlight low beams (halogen bulb)

STEP 1 For left side only:


Open the fuse box cover. (→P. 696)

STEP 2

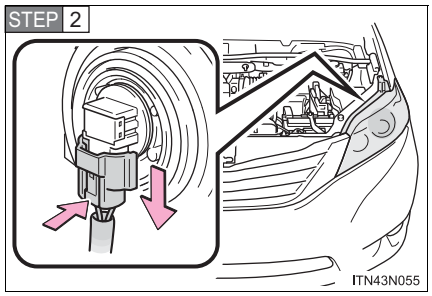

Unplug the connector while pushing the lock release.

STEP 3

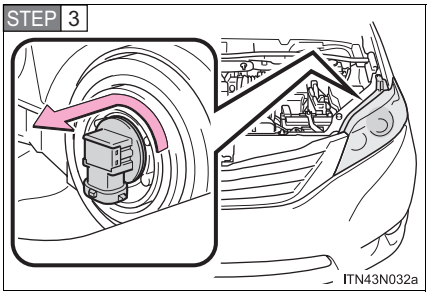


Turn the bulb base counterclockwise.

■ Headlight high beams and daytime running lights


STEP 1 For left side only:
Open the fuse box cover. (→P. 696)

STEP 2

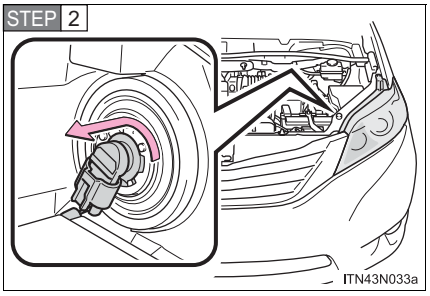


Turn the bulb base counterclockwise.

STEP 3

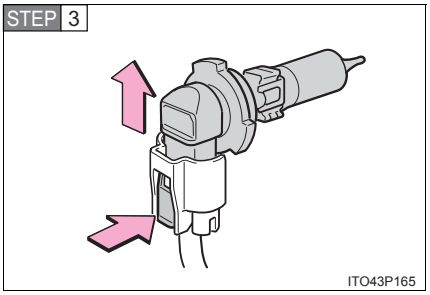


Unplug the connector while pushing the lock release.


■ Front fog lights (if equipped)

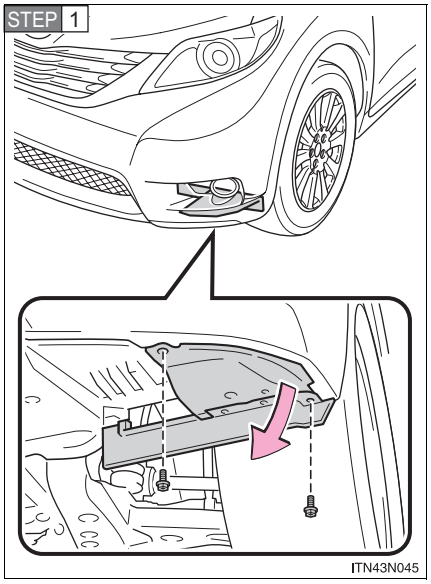

Remove the engine under cover bolt and pull down the engine under cover.

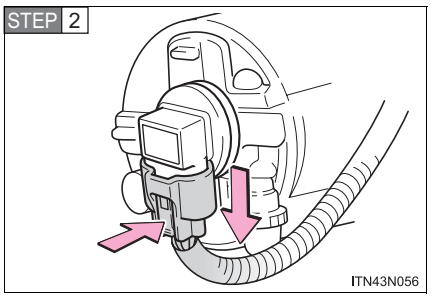

Unplug the connector while pushing the lock release.

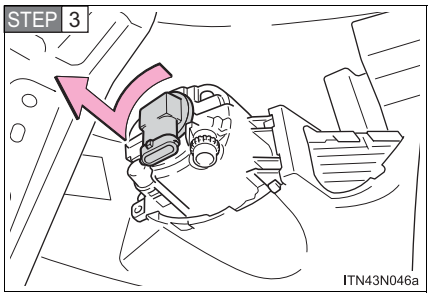


Turn the bulb base counterclockwise.

■ **Front turn signal/parking and front side marker lights**

STEP 1 For left side only:
Open the fuse box cover. (→P. 696)

Vehicles without discharge headlights


STEP 2

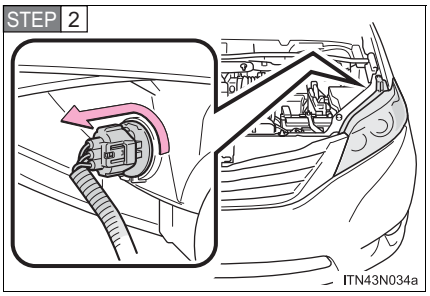


Turn the bulb base counterclockwise.

Vehicles with discharge headlights

STEP 2

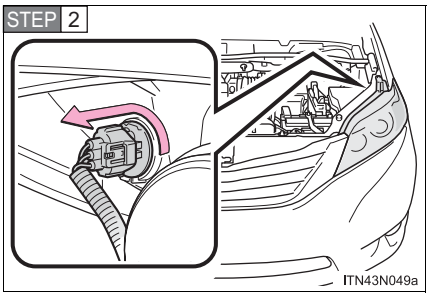


STEP 3

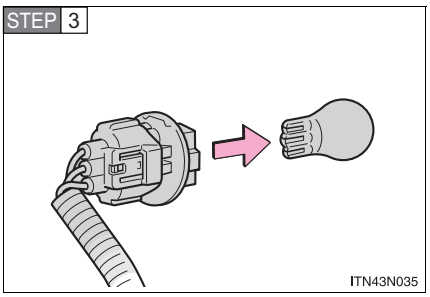


Remove the light bulb.


■ Rear turn signal lights

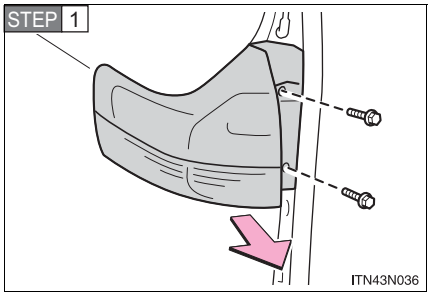

Remove the securing bolts and remove the unit.

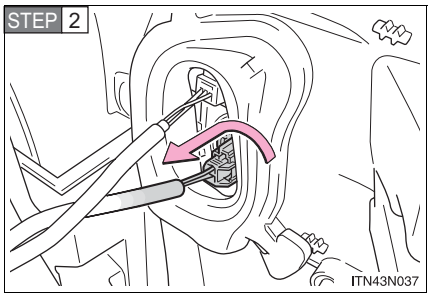


Turn the bulb base counterclockwise.

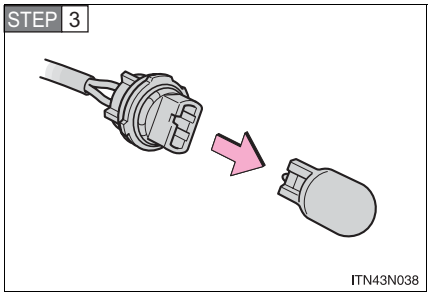


Remove the light bulb.

■ Tail and back-up lights

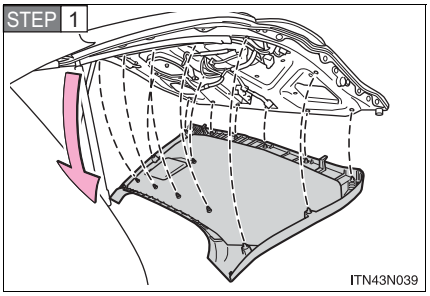


Remove the back door trim board.

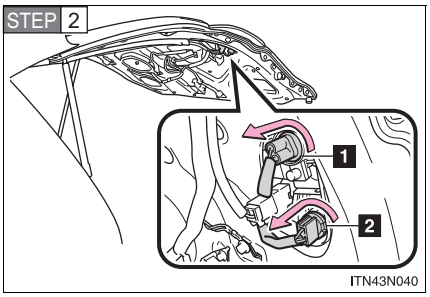

Turn the bulb base counterclockwise.

1 Tail light
2 Back-up light

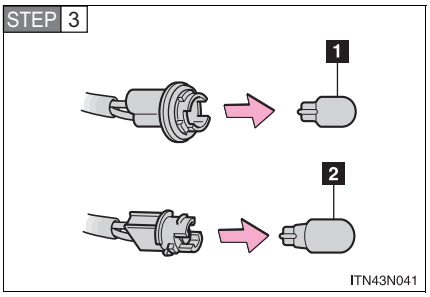


Remove the light bulb.

1 Tail light
2 Back-up light


■ License plate lights

STEP 1

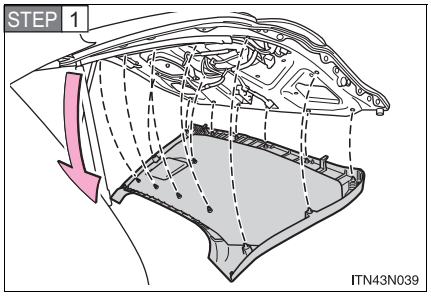


Remove the back door trim board.

STEP 2

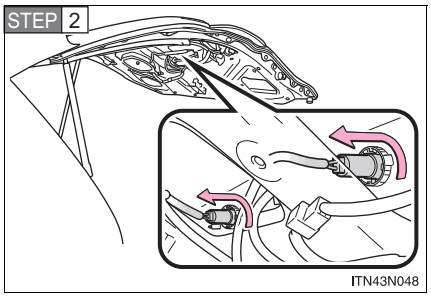

Turn the bulb base counterclockwise.

STEP 3

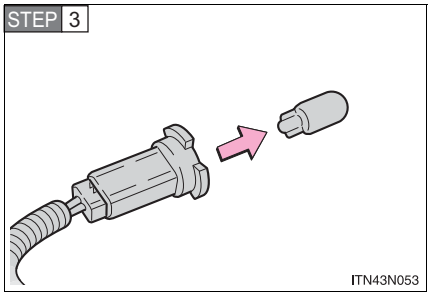

Remove the light bulb.

■ **Lights other than the above**

If any of the lights listed below has burnt out, have it replaced by your Toyota dealer.

- Headlight low beams (discharge bulbs)
- High mounted stoplight
- Stop/tail and rear side marker lights
- Outer foot lights (if equipped)

■ **Discharge headlights (if equipped)**

If voltage to the discharge bulbs is insufficient, the bulbs may not come on, or may go out temporarily. The discharge bulbs will come on when normal power is restored.

■ **LED lights**

The stop/tail and rear side marker lights and high mounted stoplight consists of a number of LEDs. If any of the LEDs burn out, take your vehicle to your Toyota dealer to have the light replaced.

■ **Condensation build-up on the inside of the lens**

Contact your Toyota dealer for more information in the following situations. Temporary condensation build-up on the inside of the headlight lens does not indicate a malfunction.

- Large drops of water have built up on the inside of the lens.
- Water has built up inside the headlight.


■ **When replacing light bulbs**

→P. 708

CAUTION

■ Replacing light bulbs

- Turn off the lights. Do not attempt to replace the bulb immediately after turning off the lights.
  The bulbs become very hot and may cause burns.
- Do not touch the glass portion of the light bulb with bare hands. Hold the bulb by the plastic or metal portion.
  If the bulb is scratched or dropped it may blow out or crack.
- Fully install light bulbs and any parts used to secure them. Failure to do so may result in heat damage, fire, or water entering the headlight unit. This may damage the headlights or cause condensation to build up on the lens.

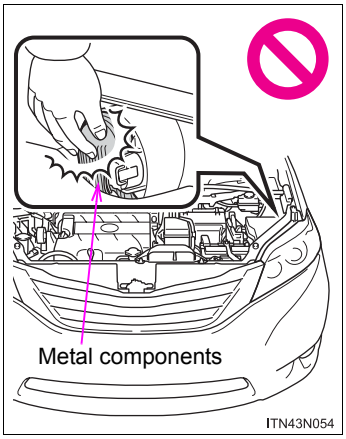

- Vehicles with discharge headlights:
  While the low beam headlights are turned on, and for a short time after they have been turned off, metal components at the rear of the headlight assembly will be extremely hot. To prevent burns, do not touch these metal components until you are certain they have cooled down.

CAUTION

■ Discharge headlights (if equipped)

- Contact your Toyota dealer before replacing discharge headlights (including light bulbs).
- Do not touch the discharge headlight's high voltage socket when the headlights are turned on.
  An extremely high voltage of 30000 V will be discharged and could result in serious injury or death by electric shock.
- Do not attempt to take apart or repair the low beam headlight bulbs, connectors, power supply circuits, or related components.
  Doing so could result in electric shock and serious injury or death.

■ To prevent damage or fire

Make sure bulbs are fully seated and locked.


NOTICE

■ When installing the back door trim

To prevent damage, be careful not to pinch any of the wire harnesses or connectors with the back door trim.

Emergency flashers

Use the emergency flashers if the vehicle malfunctions or is involved in an accident.

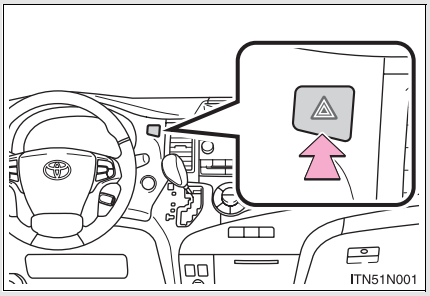

Press the switch to flash all the turn signal lights. To turn them off, press the switch once again.

⚠ NOTICE

■ To prevent battery discharge

Do not leave the emergency flashers on longer than necessary when the engine is not running.

If your vehicle needs to be towed

If towing is necessary, we recommend having your vehicle towed by your Toyota dealer or a commercial towing service, using a wheel-lift type truck or flat bed truck.
Use a safety chain system for all towing, and abide by all state/provincial and local laws.
2WD models: If towing your vehicle with a wheel-lift type truck from the front, the vehicle's rear wheels and axles must be in good conditions. (→P. 724, 726)
If they are damaged, use a towing dolly or flat bed truck.


AWD models: If towing your vehicle with a wheel-lift type truck, use a towing dolly. (→P. 724, 726)

Before towing

The following may indicate a problem with your transaxle. Contact your Toyota dealer before towing.

- The engine is running but the vehicle will not move.
- The vehicle makes an abnormal sound.


Towing with a sling-type truck

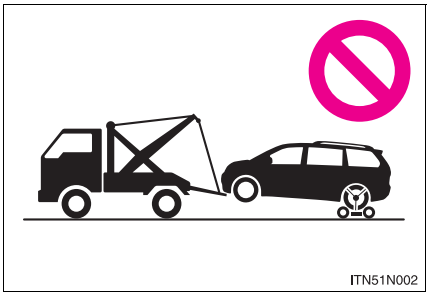

Do not tow with a sling type truck to prevent body damage.


Towing with a wheel-lift type truck

From the front (2WD models)

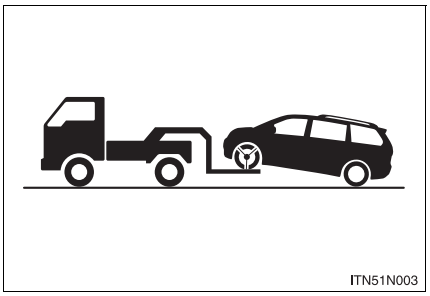


Release the parking brake.

From the front (AWD models)

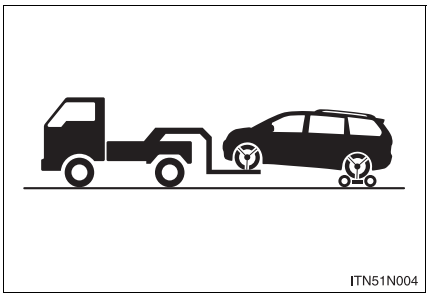


Use a towing dolly under the rear wheels.

From the rear

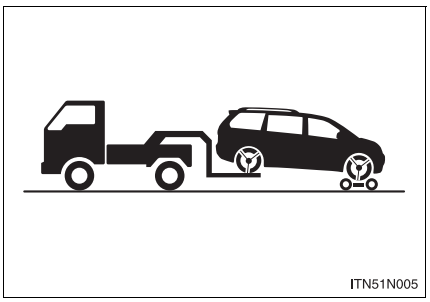

Use a towing dolly under the front wheels.

Using a flatbed truck

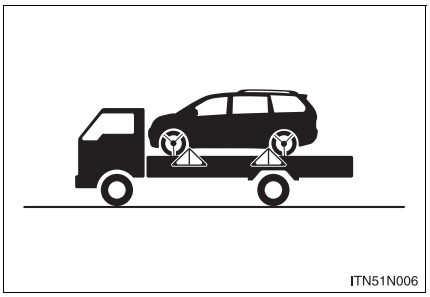

If you use chains or cables to tie down your vehicle, the angles shaded in black must be 45°.


Do not overly tighten the tie downs or the vehicle may be damaged.

NOTICE


To prevent body damage when towing with a sling-type truck

Do not tow with a sling-type truck, either from the front or rear.

To prevent causing serious damage to the transaxle and Active Torque Control 4WD system (AWD models) when towing using a wheel-lift type truck



2WD models: Never tow this vehicle from the rear with the front wheels on the ground. This may cause serious damage to the transaxle. If towing from the rear, use a towing dolly.



AWD models: Never tow this vehicle with any of the wheels on the ground. This may cause serious damage to the transaxle and Active Torque Control 4WD system. Use a towing dolly.

To prevent damaging the vehicle when towing using a wheel-lift type truck

When raising the vehicle, ensure adequate ground clearance for towing at the opposite end of the raised vehicle. Without adequate clearance, the vehicle could be damaged while being towed.

Recreational towing (behind motor home, etc.)

Never dinghy tow your vehicle to prevent causing serious damage to the Active Torque Control 4WD system (AWD models) and transaxle. (→P. 376)

If you think something is wrong

If you notice any of the following symptoms, your vehicle probably needs adjustment or repair. Contact your Toyota dealer as soon as possible.

Visible symptoms

- Fluid leaks under the vehicle
  (Water dripping from the air conditioning after use is normal.)
- Flat-looking tires or uneven tire wear
- Engine coolant temperature gauge needle continually points higher than normal

Audible symptoms

- Changes in exhaust sound
- Excessive tire squeal when cornering
- Strange noises related to the suspension system
- Pinging or other noises related to the engine

Operational symptoms

- Engine missing, stumbling or running rough
- Appreciable loss of power
- Vehicle pulls heavily to one side when braking
- Vehicle pulls heavily to one side when driving on a level road
- Loss of brake effectiveness, spongy feeling, pedal almost touches the floor

Fuel pump shut off system

To minimize the risk of fuel leakage when the engine stalls or when an airbag inflates upon collision, the fuel pump shut off system stops the supply of fuel to the engine.

Follow the procedure below to restart the engine after the system is activated.

Vehicles without a smart key system

STEP 1 Turn the engine switch to the “ACC” or “LOCK” position.

STEP 2 Restart the engine.

Vehicles with a smart key system

STEP 1 Turn the “ENGINE START STOP” switch to ACCESSORY mode or turn it off.

STEP 2 Restart the engine.

⚠ NOTICE

■ Before starting the engine

Inspect the ground under the vehicle.
If you find that fuel has leaked onto the ground, the fuel system has been damaged and is in need of repair. Do not restart the engine.

If a warning light turns on or a warning buzzer sounds...

Calmly perform the following actions if any of the warning lights comes on or flashes. If a light comes on or flashes, but then goes off, this does not necessarily indicate a malfunction in the system. However, if this continues to occur, have the vehicle inspected by your Toyota dealer.

Stop the vehicle immediately. Continuing to drive the vehicle may be dangerous.

The following warning indicates a possible problem in the brake system. Immediately stop the vehicle in a safe place and contact your Toyota dealer.

Warning light	Warning light/Details
BRAKE (U.S.A.) (Canada)	**Brake system warning light (warning buzzer)*** • Low brake fluid • Malfunction in the brake system This light also comes on when the parking brake is not released. If the light turns off after the parking brake is fully released, the system is operating normally.

*: Parking brake engaged warning buzzer: A buzzer will sound if the vehicle is driven at a speed of approximately 3 mph (5 km/h) or more.

Stop the vehicle immediately.

The following warnings indicate the possibility of damage to the vehicle that may lead to an accident. Immediately stop the vehicle in a safe place and contact your Toyota dealer.

Warning light	Warning light/Details
	**Charging system warning light** Indicates a malfunction in the vehicle's charging system
	**Low engine oil pressure warning light** Indicates that the engine oil pressure is too low

Have the vehicle inspected immediately.

Failure to investigate the cause of the following warnings may lead to the system operating abnormally and possibly cause an accident. Have the vehicle inspected by your Toyota dealer immediately.

Warning light	Warning light/Details
 (U.S.A.)  (Canada)	**Malfunction indicator lamp** Indicates a malfunction in: • The electronic engine control system; • The electronic throttle control system; or • The electronic automatic transaxle control system
	**SRS warning light** Indicates a malfunction in: • The SRS airbag system; • The front passenger occupant classification system; or • The seat belt pretensioner system

Warning light	Warning light/Details
ABS (U.S.A.) (ABS) (Canada)	**“ABS” warning light** Indicates a malfunction in: • The ABS; or • The brake assist system
	Electric power steering system warning light Indicates a malfunction in the EPS (Electric Power Steering) system
PCS (comes on or flashes)	**Pre-collision system warning light (if equipped)** Indicates a malfunction in the pre-collision system The warning light will operate as follows, even when the system is not malfunctioning: • The light will flash quickly when the system is operating. (→P. 336) • The light will turn on when the pre-collision braking is disabled. (→P. 337) • The light will turn on when the system cannot temporarily be used.
	Slip indicator light Indicates a malfunction in: • Enhanced VSC • TRAC The indicator will blink when the system listed above is operational. (→P. 328)

Warning light	Warning light/Details
 (Flashes)	**Automatic High Beam indicator light (if equipped)** Indicates a malfunction in the Automatic High Beam system (→P. 273)
 (Flashes)	**Cruise control indicator light (if equipped)** Indicates a malfunction in the cruise control system (→P. 293, 298)
 (Flashes)	**Radar cruise control indicator light (if equipped)** Indicates a malfunction in the Dynamic radar cruise control system (→P. 298)

Follow the correction procedures.

After taking the specified steps to correct the suspected problem, check that the warning light turns off.

Warning light	Warning light/Details	Correction procedure
	**Open door warning light (warning buzzer)***1 Indicates that a door is not fully closed.	Check that all the doors are closed.
	**Low fuel level warning light** Indicates remaining fuel is approximately 3.0 gal. (11.4 L, 2.5 Imp.gal.) or less	Refuel the vehicle.
	**Driver's seat belt reminder light (warning buzzer)***2 Warns the driver to fasten his/her seat belt.	Fasten the seat belt.
 (on the center panel)	**Front passenger's seat belt reminder light (warning buzzer)***2 Warns the front passenger to fasten his or her seat belt.	Fasten the seat belt.
	**Master warning light** A buzzer sounds and the warning light comes on and flashes to indicate that the master warning system has detected a malfunction.	→P. 744

Warning light	Warning light/Details	Correction procedure
	**Tire pressure warning light**	
	When the light comes on: Low tire inflation pressure such as • Natural causes (→P. 738) • Flat tire (→P. 745, 747)	Adjust the tire inflation pressure to the specified level. The light will turn off after a few minutes. In case the light does not turn off even if the tire inflation pressure is adjusted, have the system checked by your Toyota dealer.
	When the light comes on after blinking for 1 minute: Malfunction in the tire pressure warning system (→P. 740)	Have the system checked by your Toyota dealer.
	**Low windshield washer fluid warning light** Low level of washer fluid	Fill the tank.

Warning light	Warning light/Details	Correction procedure
MAINT REQD (U.S.A.)	**Maintenance required reminder light** Indicates that maintenance is requires according to the driven distance on the maintenance schedule.*3	
	Illuminates for about 3 seconds and then flashes for about 15 seconds approximately 4500 miles (7200 km) after the maintenance data has been reset.	If necessary, perform maintenance.
	Comes on and remains on if the distance driven exceeds 5000 miles (8000 km) after the maintenance data has been reset. (The indicator will not work property unless the maintenance data has been reset.)	Perform the necessary maintenance. Please reset the maintenance is performed. (→P. 640)
3RD SEAT	**Third seat warning light (if equipped)** Indicates that the third seat operation is not yet complete.	Complete the third seat operation.

Warning light	Warning light/Details	Correction procedure
AWD (AWD models)	**Active Torque Control 4WD system warning light**	
	When the light blinks: The system has been overloaded and front-wheel drive has been automatically engaged.	Drop your speed or stop the vehicle until the light stops blinking. (Do not stop the engine.)
	When the light comes on: Malfunction in the Active Torque Control 4WD system.	Have the system checked by your Toyota dealer.

*1:Open door warning buzzer:

A buzzer will sound if the vehicle reaches a speed of 3 mph (5 km/h) with any door open.

*2:Driver's and front passenger's seat belt warning buzzers:

The driver's and front passenger's seat belt warning buzzers sound to alert the driver and front passenger that his or her seat belt is not fastened. The buzzer sounds intermittently for 10 seconds after the vehicle has reached a speed of 12 mph (20 km/h). Then, if the seat belt is still unfastened, the buzzer will sound at a different tone for 20 more seconds.

*3:Refer to the separate "Scheduled Maintenance Guide" or "Owner's Manual Supplement" for the maintenance interval applicable to your vehicle.

■ **SRS warning light**

This warning light system monitors the airbag sensor assembly, front airbag sensors, side and curtain shield airbag sensors, curtain shield airbag sensors, driver's seat position sensor, driver's seat belt buckle switch, front passenger occupant classification system (ECU and sensors), "AIR BAG ON" indicator light, "AIR BAG OFF" indicator light, front passenger's seat belt buckle switch, seat belt pretensioner assemblies, inflators, interconnecting wiring and power sources. (→P. 168)

■ **Front passenger detection sensor and passenger seat belt reminder**

- If luggage is placed on the front passenger seat, the front passenger detection sensor may cause the warning light to flash even if a passenger is not sitting in the seat.
- If a cushion is placed on the seat, the sensor may not detect a passenger, and the warning light may not operate properly.

■ **Electric power steering system warning light**

When the voltage is low drops, the electric power steering system warning light may come on.

■ **If the malfunction indicator lamp comes on while driving**

First check the following:

- Is the fuel tank empty?
  If it is, fill the fuel tank immediately.
- Is the fuel tank cap loose?
  If it is, tighten it securely.

The malfunction indicator lamp will go off after taking several driving trips.
If the malfunction indicator lamp does not go off even after several trips, contact your Toyota dealer as soon as possible.

■ **When the tire pressure warning light comes on**

Check the tire inflation pressure and adjust to the appropriate level. Pushing the tire pressure warning reset switch will not turn off the tire pressure warning light.

■ **The tire pressure warning light may come on due to natural causes**

The tire pressure warning light may come on due to natural causes such as natural air leaks and tire inflation pressure changes caused by temperature. In this case, adjusting the tire inflation pressure will turn off the warning light (after a few minutes).

■ **When a tire is replaced with a spare tire (vehicles with compact spare tire)**

The compact spare tire is not equipped with a tire pressure warning valve and transmitter. If a tire goes flat, the tire pressure warning light will not turn off even though the flat tire has been replaced with the spare tire. Replace the spare tire with the repaired tire and adjust the tire inflation pressure. The tire pressure warning light will go off after a few minutes.

If the tire pressure warning system is inoperative

The tire pressure warning system will be disabled in the following conditions:
(When the condition becomes normal, the system will work properly.)

- If tires not equipped with tire pressure warning valves and transmitters are used.
- If the ID code on the tire pressure warning valves and transmitters is not registered in the tire pressure warning computer.

The tire pressure warning system may be disabled in the following conditions:
(When the condition becomes normal, the system will work properly.)

- If electronic devices or facilities using similar radio wave frequencies are nearby.
- If a radio set at similar frequencies is in use in the vehicle.
- If there is a lot of snow or ice on the vehicle, in particular around the wheels or wheel housings.
- If non-genuine Toyota wheels are used. (Even if you use Toyota wheels, the tire pressure warning system may not work properly with some types of tires.)
- If tire chains are used.

■ **If the tire pressure warning light frequently comes on after blinking for 1 minute**

Vehicles without a smart key system

If the tire pressure warning light frequently comes on after blinking 1 minute when the engine switch is turned to the “ON” position, have it checked by your Toyota dealer.

Vehicles with a smart key system

If the tire pressure warning light frequently comes on after blinking 1 minute when the “ENGINE START STOP” switch is turned to IGNITION ON mode, have it checked by your Toyota dealer.

■ **Customization that can be configured at Toyota dealer**

The vehicle speed linked seat belt reminder buzzer can be disabled. (Customizable features →P. 815) However, Toyota recommends that the seat belt reminder buzzer be operational to alert the driver and front passenger when seat belts are not fastened.

CAUTION

When the electric power steering system warning light comes on

The steering wheel may become extremely heavy.
If the steering wheel becomes heavier than usual when operating, hold firmly and operate using more force than usual.

If the tire pressure warning light comes on

Be sure to observe the following precautions. Failure to do so could cause loss of vehicle control and result in death or serious injury.

- Vehicles with standard tires:
  - Stop your vehicle in a safe place as soon as possible. Adjust the tire inflation pressure immediately.
  - If the tire pressure warning light comes on even after tire inflation pressure adjustment, it is probable that you have a flat tire. Check the tires. If a tire is flat, change it with the spare tire and have the flat tire repaired by the nearest Toyota dealer.
  - Avoid abrupt maneuvering and braking. If the vehicle tires deteriorate, you could lose control of the steering wheel or the brakes.
- Vehicles with run-flat tires:
  - Decelerate to the lowest appropriate speed as soon as possible. Do not drive over 55 mph (90 km/h).
  - Check and adjust the tire inflation pressure immediately.
  - If the tire pressure warning light comes on even after tire inflation pressure adjustment, it is probable that you have a flat tire. Have the tire replaced by the nearest Toyota dealer.
  - Avoid abrupt maneuvering and braking. If the vehicle tires deteriorate, you could lose control of the steering wheel or the brakes.

CAUTION

If a blowout or sudden air leakage should occur

The tire pressure warning system may not activate immediately.

Maintenance of the tires

Each tire, including the spare (if provided), should be checked monthly when cold and inflated to the inflation pressure recommended by the vehicle manufacturer on the vehicle placard or tire inflation pressure label (tire and load information label). (If your vehicle has tires of a different size than the size indicated on the vehicle placard or tire inflation pressure label [tire and load information label], you should determine the proper tire inflation pressure for those tires.)

As an added safety feature, your vehicle has been equipped with a tire pressure monitoring system (TPMS-tire pressure warning system) that illuminates a low tire pressure telltale (tire pressure warning light) when one or more of your tires is significantly under-inflated. Accordingly, when the low tire pressure telltale (tire pressure warning light) illuminates, you should stop and check your tires as soon as possible, and inflate them to the proper pressure. Driving on a significantly under-inflated tire causes the tire to overheat and can lead to tire failure. Under-inflation also reduces fuel efficiency and tire tread life, and may affect the vehicle's handling and stopping ability.

Please note that the TPMS (tire pressure warning system) is not a substitute for proper tire maintenance, and it is the driver's responsibility to maintain correct tire pressure, even if under-inflation has not reached the level to trigger illumination of the TPMS low tire pressure telltale (tire pressure warning light).

CAUTION

Your vehicle has also been equipped with a TPMS (tire pressure warning system) malfunction indicator to indicate when the system is not operating properly. The TPMS (tire pressure warning system) malfunction indicator is combined with the low tire pressure telltale (tire pressure warning light). When the system detects a malfunction, the telltale will flash for approximately one minute and then remain continuously illuminated. This sequence will continue upon subsequent vehicle start-ups as long as the malfunction exists. When the malfunction indicator is illuminated, the system may not be able to detect or signal low tire pressure as intended.

TPMS (tire pressure warning system) malfunctions may occur for a variety of reasons, including the installation of replacement or alternate tires or wheels on the vehicle that prevent the TPMS (tire pressure warning system) from functioning properly. Always check the TPMS (tire pressure warning system) malfunction telltale after replacing one or more tires or wheels on your vehicle to ensure that the replacement or alternate tires and wheels allow the TPMS (tire pressure warning system) to continue to function properly.


NOTICE

Precaution when installing a different tire

When a tire of a different specification or maker is installed, the tire pressure warning system may not operate properly.

If a warning message is displayed*

The multi-information display shows warnings of system malfunctions or incorrectly performed operations. When a message is shown, perform corrections as indicated in the message.

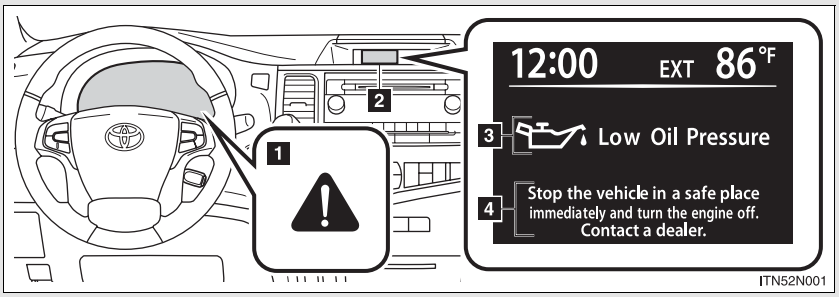

1 Master warning light

The master warning light comes on or flashes when a message is being shown on the multi-information display.

2 Multi-information display

3 Warning message

4 Correction procedure

■ Warning buzzer

A buzzer may sound when a warning message is shown on the multi-information display.

■ If the warning message is shown again after its correction procedure has been performed

Contact your Toyota dealer as soon as possible.


*: If equipped

If you have a flat tire (vehicles with run-flat tires)

You can continue driving a vehicle with run-flat tires even if any tire goes flat.

In this case, slow down and drive with extra caution.

■ Run-flat tires (A “RFT” or “DSST” mark is molded on the sidewall)

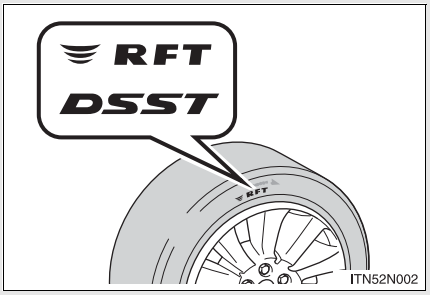

Take your vehicle to the nearest Toyota dealer or authorized tire dealer as soon as possible if any tire goes flat.

The vehicle can be driven for a maximum of 100 miles (160 km) at a speed below 55 mph (90 km/h) after the tire pressure warning light comes on. (→P. 733)

■ In some condition (such as at high temperatures)

You cannot continue driving for up to 100 miles (160 km).

■ For the detailed information on run-flat tires

See the tire warranty booklet.

NOTICE

When replacing the tires

When removing or fitting the wheels, tires or the tire pressure warning valve and transmitter, contact your Toyota dealer as the tire pressure warning valve and transmitter may be damaged if not handled correctly.

When driving over bumps

If a vehicle has a flat tire, the vehicle height will be lower than usual. Ensure that nothing strikes the bottom of the vehicle.

To avoid damaging the tire pressure warning valves and transmitters

Do not use liquid sealants on flat tires.


If you have a flat tire (vehicles with standard tires)

Remove the flat tire and replace it with the spare tire provided.


Before jacking up the vehicle

- Stop the vehicle on a hard, flat surface.
- Set the parking brake.
- Shift the shift lever to P.
- Stop the engine.
- Turn on the emergency flashers.


Location of the spare tire, jack and tools

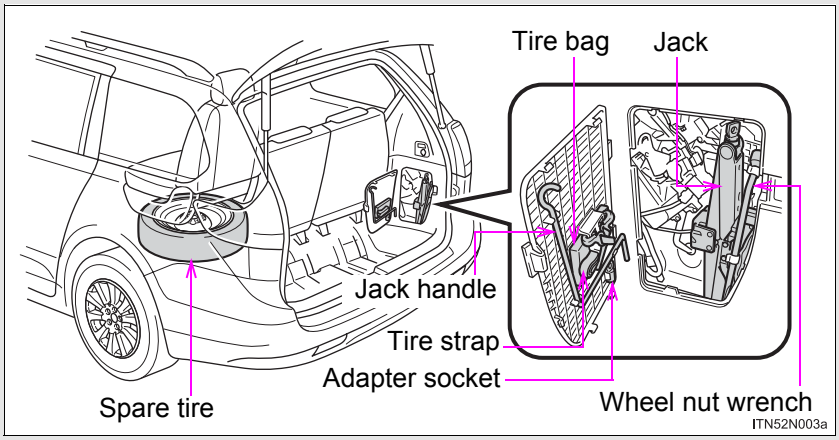


Taking out the jack and tools

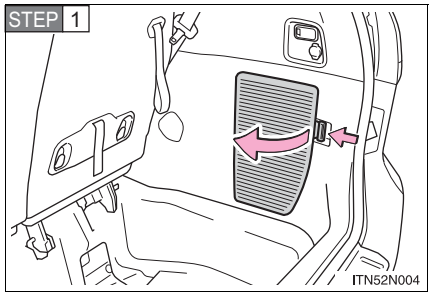

Remove the cover.

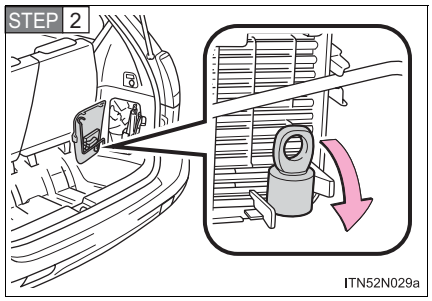


Remove the adapter socket.

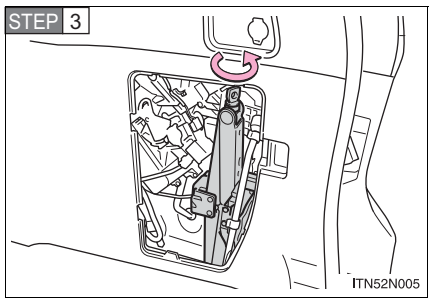

Remove the jack.

STEP 4

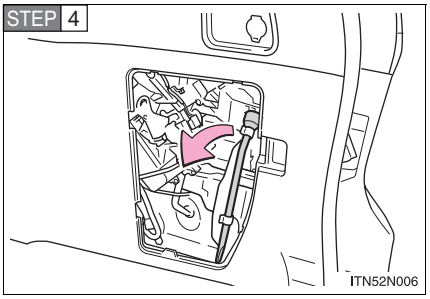


Remove the wheel nut wrench.


Taking out the spare tire

STEP 1 Slide the front passenger's seat to the frontmost lock position and the right side second seat to the rearmost lock position so they will not interfere with the jack handle.

STEP 2

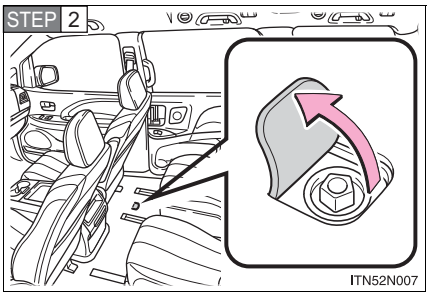


Open the right side sliding door and you will find the flap on the floor. Pull back the flap to find the spare tire clamp bolt.

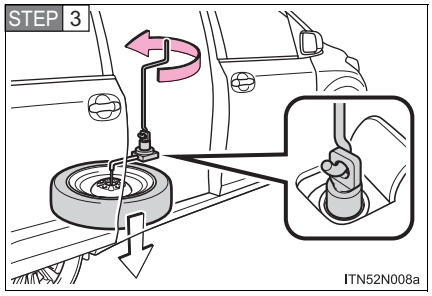

Attach the adapter socket over the spare tire clamp bolt.

Connect the jack handle and the adapter socket. Turn the jack handle.


The tire will be lowered completely to the ground.

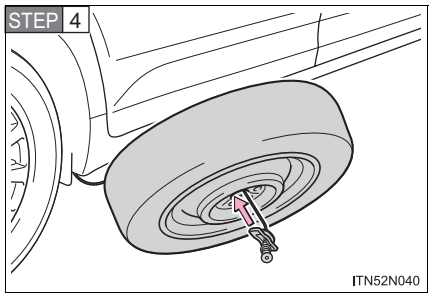

Take the spare tire out from underneath the vehicle and remove the holding bracket.

Replacing a flat tire


STEP 1

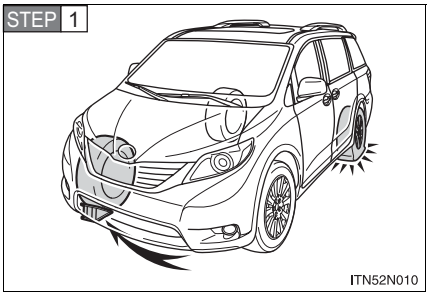

Chock the tires.


Flat tire		Wheel chock positions
Front	Left-hand side	Behind the rear right-hand side tire
	Right-hand side	Behind the rear left-hand side tire
Rear	Left-hand side	In front of the front right-hand side tire
	Right-hand side	In front of the front left-hand side tire

STEP 2

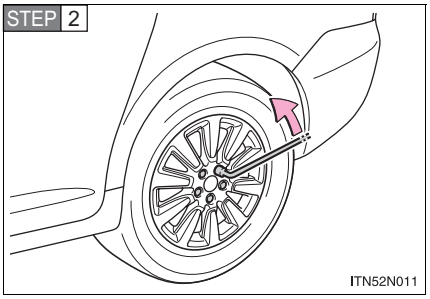


Slightly loosen the wheel nuts (one turn).

STEP 3

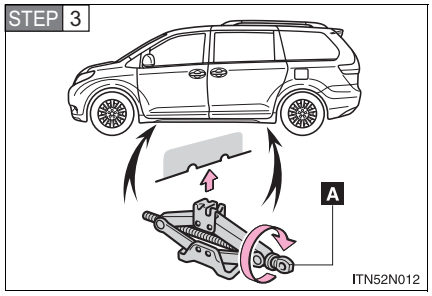


Turn the tire jack portion “A” by hand until the notch of the jack is in contact with the jack point.

STEP 4

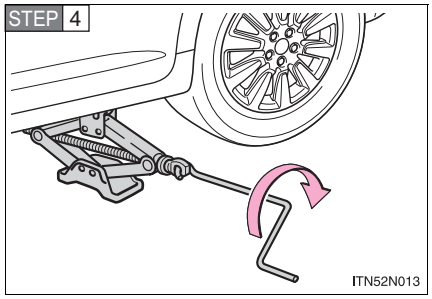

Raise the vehicle until the tire is slightly raised off the ground.


STEP 5

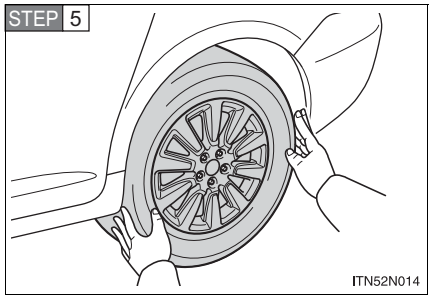

Remove all the wheel nuts and the tire.


When resting the tire on the ground, place the tire so that the wheel design faces up to avoid scratching the wheel surface.

Installing the spare tire

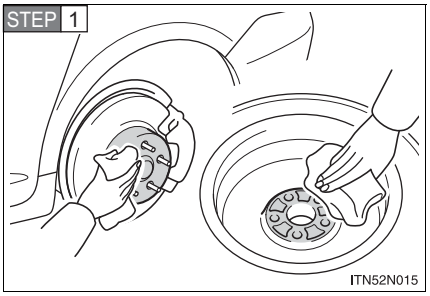


Remove any dirt or foreign matter from the wheel contact surface.

If foreign matter is on the wheel contact surface, the wheel nuts may loosen while the vehicle is in motion, causing the tire to come off.

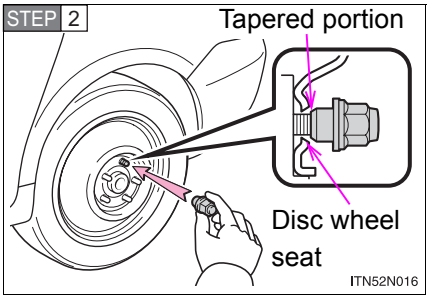


Install the tire and loosely tighten each wheel nut by hand by approximately the same amount.

Tighten the wheel nuts until the tapered portion comes into loose contact with the disc wheel seat.

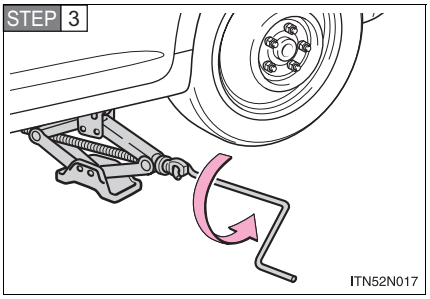

Lower the vehicle.

STEP 4

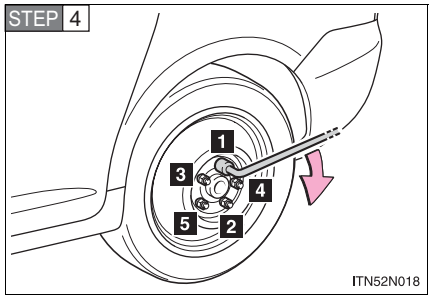

Firmly tighten each wheel nut two or three times in the order shown in the illustration.


Tightening torque:

76 ft•lbf (103 N•m, 10.5 kgf•m)

STEP 5 Stow the flat tire, tire jack and all tools.


Stowing the flat tire

STEP 1

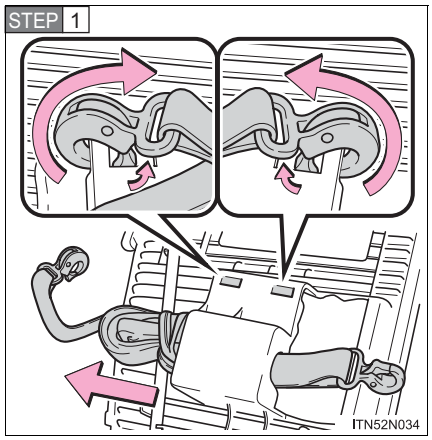


Remove clasps and strap.


STEP 2

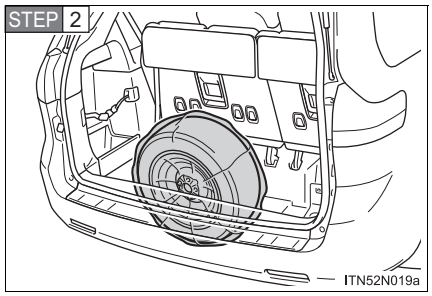


Place tire standing up in rear tub, after putting the tire in the tire bag.

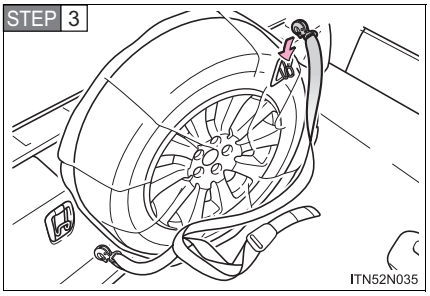

Clip clasp to outboard hook.

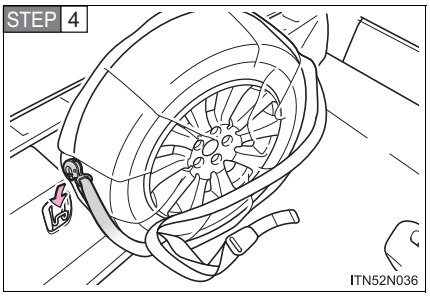

Clip other clasp to center or opposite hook location.

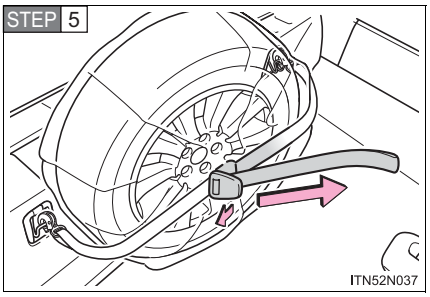


Pull strap to tighten and secure tire.

■ **The compact spare tire**

- The compact spare tire is identified by the label “TEMPORARY USE ONLY” on the tire sidewall.
  Use the compact spare tire temporarily, and only in an emergency.
- Make sure to check the tire inflation pressure of the compact spare tire. (→P. 794)

■ **Jack point guide**



The jack point guides are located on the side of rocker moulding. They indicate the jack point positions.

■ **After completing the tire change**

The tire pressure warning system must be reset. (→P. 674)

■ **When using the compact spare tire**

As the compact spare tire is not equipped with a tire pressure warning valve and transmitter, low inflation pressure of the spare tire will not be indicated by the tire pressure warning system. Also, if you replace the compact spare tire after the tire pressure warning light comes on, the light remains on.

■ **If you have a flat front tire on a road covered with snow or ice**

Install the compact spare tire on one of the rear wheels of the vehicle. Perform the following steps and fit tire chains to the front tires:

STEP 1 Replace a rear tire with the compact spare tire.

STEP 2 Replace the flat front tire with the tire removed from the rear of the vehicle.

STEP 3 Fit tire chains to the front tires.

CAUTION

■ **When using the compact spare tire**

- Remember that the compact spare tire provided is specifically designed for use with your vehicle. Do not use your compact spare tire on another vehicle.
- Do not use more than one compact spare tire simultaneously.
- Replace the compact spare tire with a standard tire as soon as possible.
- Avoid sudden acceleration, deceleration and braking, as well as sharp cornering.

■ **When storing the compact spare tire**

Be careful not to catch fingers or other body parts between the compact spare tire and the body of the vehicle.

■ **When the compact spare tire is attached**

The vehicle speed may not be correctly detected, and the following systems may not operate correctly:

- ABS & Brake assist
- Enhanced VSC
- TRAC
- Dynamic radar cruise control (if equipped)
- Cruise control (if equipped)
- PCS (if equipped)
- Navigation system (if equipped)

Also, not only can the following system not be utilized fully, but it may even negatively affect the drive-train components:

- AWD system (if equipped)

CAUTION

Speed limit when using the compact spare tire

Do not drive at speeds in excess of 50 mph (80 km/h) when a compact spare tire is installed on the vehicle.

The compact spare tire is not designed for driving at high speeds. Failure to observe this precaution may lead to an accident causing death or serious injury.

Using the tire jack

Improper use of the tire jack may cause the vehicle to suddenly fall off the jack, leading to death or serious injury.

- Do not use the tire jack for any purpose other than replacing tires or installing and removing tire chains.
- Only use the tire jack that comes with this vehicle for replacing a flat tire. Do not use it on other vehicles, and do not use other tire jacks for replacing tires on this vehicle.
- Always check that the tire jack is securely set to the jack point.
- Do not put any part of your body under the vehicle while it is supported by the jack.
- Do not start or run the engine while your vehicle is supported by the jack.
- Do not raise the vehicle while someone is inside.
- When raising the vehicle, do not put an object on or under the jack.
- Do not raise the vehicle to a height greater than that required to replace the tire.
- Use a jack stand if it is necessary to get under the vehicle.

Take particular care when lowering the vehicle to ensure that no one working on or near the vehicle may be injured.

CAUTION

Replacing a flat tire

- Observe the following precautions.
  Failure to do so may result in serious injury:
  - Do not touch the disc wheels or the area around the brakes immediately after the vehicle has been driven.
    After the vehicle has been driven the disc wheels and the area around the brakes will be extremely hot. Touching these areas with hands, feet or other body parts while changing a tire, etc. may result in burns.
  - Remove the spare tire before jacking up the vehicle. If the spare tire is removed after jacking up the vehicle, the tire carrier and the spare tire may interfere with the jack and cause a serious accident.
- Failure to follow these precautions could cause the wheel nuts to loosen and the tire to fall off, resulting on death or serious injury.
  - Have the wheel nuts tightened with a torque wrench to 76 ft•lbf (103 N•m, 10.5 kgf•m) as soon as possible after changing wheels.
  - When installing a tire, only use wheel nuts that have been specifically designed for that wheel.
  - If there are any cracks or deformations in the bolt screws, nut threads or bolt holes of the wheel, have the vehicle inspected by your Toyota dealer.
  - When installing the wheel nuts, be sure to install them with the tapered end facing inward. (→P. 689)

CAUTION

Replacing a flat tire for vehicles with power sliding door and/or power back door

In cases such as when replacing tires, make sure to turn off the power sliding door main switch (→P. 70) and/or the power back door main switch (→P. 84). Failure to do so may cause the sliding door and/or the back door to operate unintentionally if the power sliding door switch and/or the power back door switch is accidentally touched, resulting in hands and fingers being caught and injured.

When stowing the flat tire

- Make sure the third seats are in their original position.
- Secure it using a tire strap. Otherwise, the flat tire may fly out in case of sudden braking or an accident, resulting in death or serious injury.

NOTICE

When loosening or tightening the spare tire clamp bolt

Do not use an impact wrench. Use the adapter socket and jack handle.

Do not drive the vehicle with a flat tire

Do not continue driving with a flat tire.
Driving even a short distance with a flat tire can damage the tire and the wheel beyond repair.

Be careful when driving over bumps with the compact spare tire installed on the vehicle

The vehicle becomes lower when driving with the compact spare tire compared to when driving with standard tires. Be careful when driving over uneven road surfaces.

NOTICE

Driving with tire chains and the compact spare tire

Do not fit tire chains to the compact spare tire.
Tire chains may damage the vehicle body and adversely affect driving performance.

When replacing the tires

When removing or fitting the wheels, tires or the tire pressure warning valve and transmitter, contact your Toyota dealer as the tire pressure warning valve and transmitter may be damaged if not handled correctly.

To avoid damage to the tire pressure warning valves and transmitters

When a tire is repaired with liquid sealants, the tire pressure warning valve and transmitter may not operate properly. If a liquid sealant is used, contact your Toyota dealer or other qualified service shop as soon as possible. Make sure to replace the tire pressure warning valve and transmitter when replacing the tire. (→P. 674)

After taking out or stowing the spare tire

Make sure to secure the tire carrier by tightening the clamp bolt to prevent the holding bracket from hitting the under body of the vehicle during driving.

Using the tire carrier

- As the tire carrier is designed for use with the compact spare tire, it cannot be used with standard tires.
- If the spare tire is flat, do not use the tire carrier, as the tire may not be held securely.

If the engine will not start

If the engine will not start even though correct starting procedures are being followed (→P. 226, 229), consider each of the following points:

■ **The engine will not start even though the starter motor operates normally.**

One of the following may be the cause of the problem:

- There may not be sufficient fuel in the vehicle's tank.
  Refuel the vehicle.
- The engine may be flooded.
  Try to restart the engine again following correct starting procedures. (→P. 226, 229)
- There may be a malfunction in the engine immobilizer system (if equipped). (→P. 159)

■ **The starter motor turns over slowly, the interior lights and headlights are dim, or the horn does not sound or sounds at a low volume.**

One of the following may be the cause of the problem:

- The battery may be discharged. (→P. 770)
- The battery terminal connections may be loose or corroded.

■ **The starter motor does not turn over.**

The engine starting system may be malfunctioning due to an electrical problem such as an open circuit or a blown fuse. However, an interim measure is available to start the engine.

■ **The starter motor does not turn over, the interior lights and headlights do not turn on, or the horn does not sound.**

One of the following may be the cause of the problem:

- One or both of the battery terminals may be disconnected.
- The battery may be discharged. (→P. 770)
- There may be a malfunction in the steering lock system (vehicle with a smart key system).

Contact your Toyota dealer if the problem cannot be repaired, or if repair procedures are unknown.

Emergency start function (vehicles with a smart key system)

When the engine does not start, the following steps can be used as an interim measure to start the engine if the “ENGINE START STOP” switch is functioning normally:

STEP 1 Set the parking brake.

STEP 2 Shift the shift lever to P.

STEP 3 Turn the “ENGINE START STOP” switch to ACCESSORY mode.

STEP 4 Press and hold the “ENGINE START STOP” switch for about 15 seconds while depressing the brake pedal firmly.

Even if the engine can be started using the above steps, the system may be malfunctioning. Have the vehicle inspected by your Toyota dealer.

If the shift lever cannot be shifted from P

If the shift lever cannot be shifted with your foot on the brake pedal, there may be a problem with the shift lock system (a system to prevent accidental operation of the shift lever). Have the vehicle inspected by your Toyota dealer immediately.

The following steps may be used as an emergency measure to ensure that the shift lever can be shifted:


STEP 1 Set the parking brake.

STEP 2 Vehicles without a smart key system: Turn the engine switch to the “ACC” position.

Vehicles with a smart key system: Turn the “ENGINE START STOP” switch to ACCESSORY mode.


STEP 3 Depress the brake pedal.

STEP 4

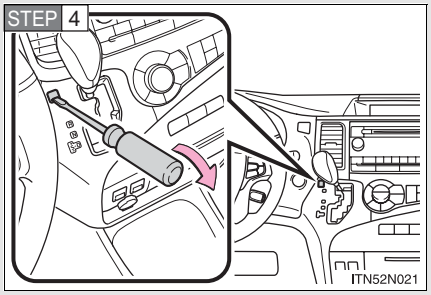

Pry the cover up with a flat-head screwdriver or equivalent tool.

STEP 5

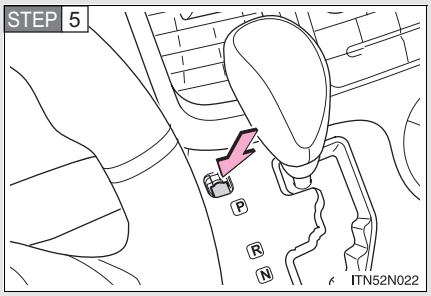

Press the shift lock override button.

The shift lever can be shifted while the button is pressed.

■ **If the beep sounds continuously when the shift lever is shifted from P (vehicles with an AUTO ACCESS SEAT)**

The AUTO ACCESS SEAT may not be locked in place.
For details, refer to “AUTO ACCESS SEAT OWNER’S MANUAL”.


If you lose your keys

New genuine keys can be made by your Toyota dealer. For vehicles with the smart key system, bring the other key and the key number stamped on the key number plate. For vehicles without the smart key system, bring a master key and the key number stamped on the key number plate.

If the electronic key does not operate properly*

For vehicles with a smart key system: If communication between the electronic key and vehicle is interrupted (→P. 36) or the electronic key cannot be used because the battery is depleted, the smart key system and wireless remote control cannot be used. In such cases, the doors can be opened or the engine can be started by following the procedure below.

Locking and unlocking the doors and key linked functions

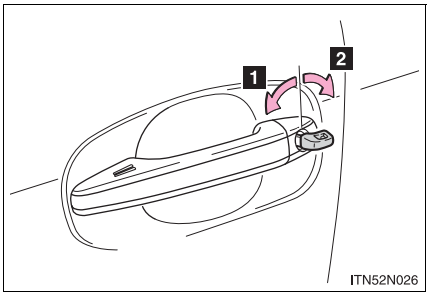

Using the mechanical key (→P. 33) in order to perform the following operations.

1 Locks all doors

2 Unlocks all doors


Turning the key rearward unlocks the driver's door. Turning the key once again within 3 seconds unlocks the other doors.

*: If equipped

Changing “ENGINE START STOP” switch modes and starting the engine

STEP 1 Shift the shift lever to P and apply the brakes.

STEP 2

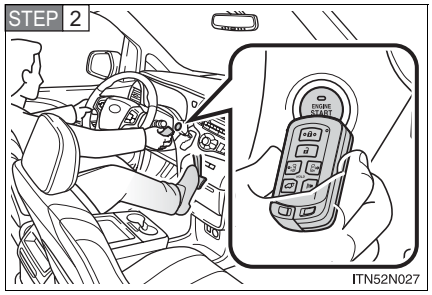

Touch the Toyota emblem side of the electronic key to the “ENGINE START STOP” switch.

An alarm will sound to indicate that the start function cannot detect the electronic key that is touched to the “ENGINE START STOP” switch if any of the doors is opened and closed while the key is touched to the switch.

STEP 3 To change “ENGINE START STOP” switch modes: Within 10 seconds of the buzzer sounding, release the brake pedal and press the “ENGINE START STOP” switch. Modes can be changed each time the switch is pressed. (→P. 231)

To start the engine: Press the “ENGINE START STOP” switch within 10 seconds after the buzzer sounds, keeping the brake pedal depressed.

In the event that the “ENGINE START STOP” switch cannot be operated, contact your Toyota dealer.

■ **Stopping the engine**

Shift the shift lever to P and press the “ENGINE START STOP” switch as you normally do when stopping the engine.

■ **Replacing the key battery**

As this above procedure is a temporary measure, it is recommended that the electronic key battery be replaced immediately when the battery depletes. (→P. 693)

■ **Alarm (if equipped)**


Using the mechanical key to lock the doors will not set the alarm system.
If a door is unlocked using the mechanical key when the alarm system is set, the alarm may be triggered. (→P. 162)

If the battery is discharged

The following procedures may be used to start the engine if the vehicle's battery is discharged.
You can call your Toyota dealer or qualified repair shop.

If you have a set of jumper (or booster) cables and a second vehicle with a 12-volt battery, you can jump start your vehicle by following the steps below.


STEP 1 Open the hood. (→P. 651)
Vehicles with a 2GR-FE engine only: Remove the engine cover.

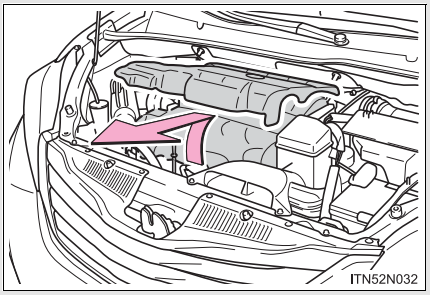


Lift the edge of the cover to fixed pins, and then pull the cover towards you to remove.

STEP 2 Connect the jumper cables according to the following procedures:

1AR-FE engine

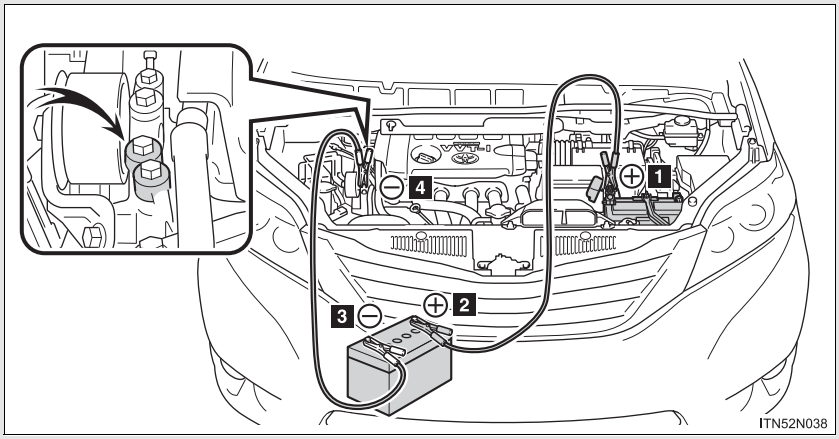

2GR-FE engine

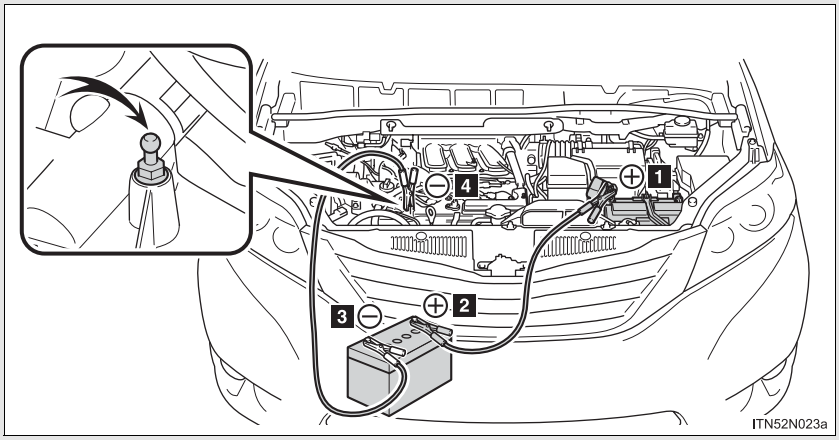

1 Positive (+) battery terminal on your vehicle

2 Positive (+) battery terminal on the second vehicle

3 Negative (-) battery terminal on the second vehicle

4 Connect the clamp at the other end of the negative cable to a solid, stationary, unpainted metallic point away from the battery and any moving parts, as shown in the illustration.

STEP 3 Start the engine of the second vehicle. Increase the engine speed slightly and maintain at that level for approximately 5 minutes to recharge the battery of your vehicle.

STEP 4 Vehicles with a smart key system only: Open and close any of the doors of your vehicle with the “ENGINE START STOP” switch off.

STEP 5 Maintain the engine speed of the second vehicle and start the engine of your vehicle by turning the engine switch to the “ON” position (vehicles without a smart key system) or turning the “ENGINE START STOP” switch to IGNITION ON mode (vehicles with a smart key system).

STEP 6 Once the vehicle’s engine has started, remove the jumper cables in the exact reverse order from which they were connected.

STEP 7 Vehicles with a 2GR-FE engine only: To install the engine cover, conduct the removal procedure in reverse. After installing, check that the fixed pins are inserted securely.

Once the engine starts, have the vehicle inspected at your Toyota dealer as soon as possible.

■ **Starting the engine when the battery is discharged**

The engine cannot be started by push-starting.

■ **To prevent battery discharge**

- Turn off the headlights and the audio system while the engine is off.
- Turn off any unnecessary electrical components when the vehicle is running at a low speed for an extended period, such as in heavy traffic.

■ **When the battery is removed or discharged**

- The power sliding door (if equipped) must be initialized. (→P. 67)
- The power back door (if equipped) must be initialized. (→P. 82)
- The moon roof (if equipped) must be initialized. (→P. 150)

■ **Charging the battery**

The electricity stored in the battery will discharge gradually even when the vehicle is not in use, due to natural discharge and the draining effects of certain electrical appliances. If the vehicle is left for a long time, the battery may discharge, and the engine may be unable to start. (The battery recharges automatically during driving.)

⚠ CAUTION

■ **Avoiding battery fires or explosions**

Observe the following precautions to prevent accidentally igniting the flammable gas that may be emitted from the battery:

- Make sure the jumper cable is connected to the correct terminal and that it is not unintentionally in contact with any other than the intended terminal.
- Do not allow the + and - clamps of the jumper cables to come into contact with each other.
- Do not smoke, use matches, cigarette lighters or allow open flame near the battery.

CAUTION

Battery precautions

The battery contains poisonous and corrosive acidic electrolyte, while related parts contain lead and lead compounds. Observe the following precautions when handling the battery:

- When working with the battery, always wear safety glasses and take care not to allow any battery fluids (acid) to come into contact with skin, clothing or the vehicle body.
- Do not lean over the battery.
- In the event that battery fluid comes into contact with the skin or eyes, immediately wash the affected area with water and seek medical attention. Place a wet sponge or cloth over the affected area until medical attention can be received.
- Always wash your hands after handling the battery support, terminals, and other battery-related parts.
- Do not allow children near the battery.

NOTICE

When handling jumper cables

When connecting the jumper cables, ensure that they do not become entangled in the cooling fans or belt.

To prevent damage to the engine cover

- When removing the cover, make sure that you pull the cover towards you after lifting the front edge to remove the fixed pins.
- When installing the cover, do not force the cover or subject it to strong shocks.

If your vehicle overheats

If your engine overheats:

STEP 1 Stop the vehicle in a safe place and turn off the air conditioning system.

STEP 2 Check to see if steam is coming out from under the hood.

If you see steam:

Stop the engine. Carefully lift the hood after the steam subsides and then restart the engine.

If you do not see steam:

Leave the engine running and carefully lift the hood.

STEP 3 Check to see if the cooling fans are operating.


If the fans are operating:

Wait until the temperature of the engine (shown on the instrument cluster) begins to fall and then stop the engine.


If the fans are not operating:

Stop the engine immediately and call your Toyota dealer.

STEP 4

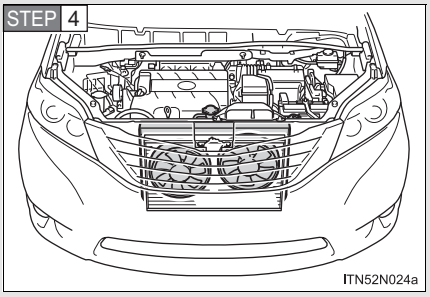

After the engine has cooled down sufficiently, check the engine coolant level and inspect the radiator core (radiator) for any leaks.

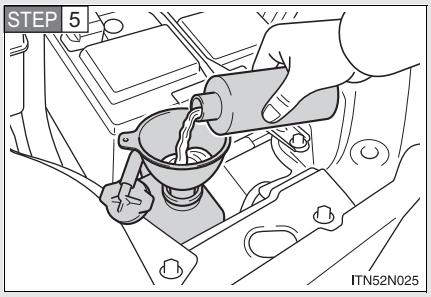

Add engine coolant if necessary.

Water can be used in an emergency if engine coolant is unavailable. (→P. 790)

Have the vehicle inspected at the nearest Toyota dealer as soon as possible.

■ **Overheating**

If you observe the following, your vehicle may be overheating:

- The engine coolant temperature gauge enters the red zone or a loss of power is experienced.
- Steam comes out from under the hood.

CAUTION

■ To prevent an accident or injury when inspecting under the hood of your vehicle

- If steam is seen coming from under the hood, do not open the hood until the steam has subsided. The engine compartment may be very hot, causing serious injuries such as burns.
- Keep hands and clothing away from the fans and drive belt while the engine is running.
- Do not loosen the coolant reservoir cap while the engine and radiator are hot.
  Serious injury, such as burns, may result from hot coolant and steam released under pressure.

NOTICE

■ When adding engine coolant

Wait until the engine has cooled down before adding engine coolant.
When adding coolant, do so slowly. Adding cool coolant to a hot engine too quickly can cause damage to the engine.

If the vehicle becomes stuck

Carry out the following procedures if the tires spin or the vehicle becomes stuck in mud, dirt, or snow.

STEP 1 Stop the engine. Set the parking brake and shift the shift lever to P.

STEP 2 Remove the mud, snow, or sand from around the stuck tire.

STEP 3 Place wood, stones or some other material under the tires to help provide traction.

STEP 4 Restart the engine.

STEP 5 Shift the shift lever to the D or R position and carefully apply the accelerator to free the vehicle.

Turn off TRAC and Enhanced VSC if these functions are hampering your attempts to free the vehicle. (→P. 329)

⚠ CAUTION

■ When attempting to free a stuck vehicle

If you choose to push the vehicle back and forth to free it, make sure the surrounding area is clear to avoid striking other vehicles, objects or people. The vehicle may also lunge forward or lunge back suddenly as it becomes free. Use extreme caution.

■ When shifting the shift lever

Be careful not to shift the shift lever with the accelerator pedal depressed. This may lead to unexpected rapid acceleration of the vehicle that may cause an accident resulting in death or serious injury.

NOTICE

To avoid damaging the transaxle and other components

- Avoid spinning the wheels and pressing the accelerator pedal more than necessary.
- If the vehicle remains stuck even after these procedures are performed, the vehicle may require towing to be freed.

If your vehicle has to be stopped in an emergency

Only in an emergency, such as if it becomes impossible to stop the vehicle in the normal way, stop the vehicle using the following procedure:

STEP 1 Steadily step on the brake pedal with both feet and firmly depress it.

Do not pump the brake pedal repeatedly as this will increase the effort required to slow the vehicle.

STEP 2 Shift the shift lever to N.

If the shift lever is shifted to N


STEP 3 After slowing down, stop the vehicle in a safe place by the road.

STEP 4 Stop the engine.

If the shift lever cannot be shifted to N


STEP 3 Keep depressing the brake pedal with both feet to reduce vehicle speed as much as possible.

STEP 4

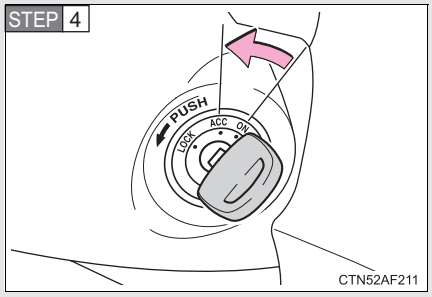

Vehicles without a smart key system: Stop the engine by turning the engine switch to the “ACC” position.

STEP 4

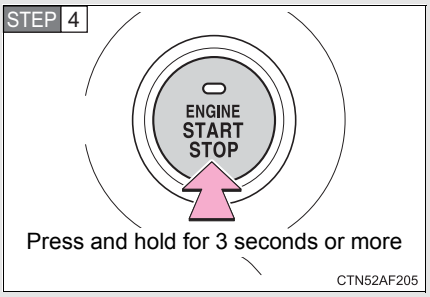

Vehicles with a smart key system: Stop the engine by pressing and holding the “ENGINE START STOP” switch for 3 consecutive seconds or more.

STEP 5 Stop the vehicle in a safe place by the road.

CAUTION

■ If the engine has to be turned off while driving

- Power assist for the brakes and steering wheel will be lost, making the brake pedal harder to depress and the steering wheel heavier to turn. Decelerate as much as possible before turning off the engine.
- Vehicles without a smart key system: Never attempt to remove the key, as doing so will lock the steering wheel.

Dimensions and weights

Overall length			200.2 in. (5085 mm)
Overall width			78.1 in. (1985 mm)
Overall height*1	2WD models	ASL30L-PFTEKA, ASL30L-PRTEKA*2	69.5 in. (1765 mm)
		GSL30L-PRTSKA*2	68.7 in. (1745 mm)
		Others	68.9 in. (1750 mm)
	AWD models		69.5 in. (1765 mm)
Wheelbase			119.3 in. (3030 mm)
Tread		Front	67.7 in. (1720 mm)
		Rear	67.7 in. (1720 mm)
Vehicle capacity weight (Occupants + luggage)		ASL30L-PFTEKA*2	1255 lb. (570 kg)
		ASL30L-PRTEKA*2	1345 lb. (610 kg)
		GSL30L-PFTDKA*2	1380 lb. (625 kg)
		GSL30L-PFTEKA*2	1235 lb. (560 kg)
		GSL30L-PFTQKA*2	1145 lb. (520 kg)
		GSL30L-PRTEKA*2	1355 lb. (615 kg)
		GSL30L-PRTSKA*2	1280 lb. (580 kg)
		GSL30L-PRTQKA*2	1245 lb. (565 kg)
		GSL35L-PFTDKA*2	1270 lb. (575 kg)
		GSL35L-PFTEKA*2	1215 lb. (550 kg)
		GSL35L-PFTQKA*2	1115 lb. (505 kg)


Trailer Weight Rating (TWR) (Trailer weight + cargo weight) (with towing package)	Without brake	1650 lb. (750 kg)
	With brake	3500 lb. (1588 kg)

*1: Unladen vehicle
*2: The model code is indicated on the Certification Label. For details, see “Vehicle identification” below.


Vehicle identification

■ Vehicle identification number

The vehicle identification number (VIN) is the legal identifier for your vehicle. This is the primary identification number for your Toyota. It is used in registering the ownership of your vehicle.

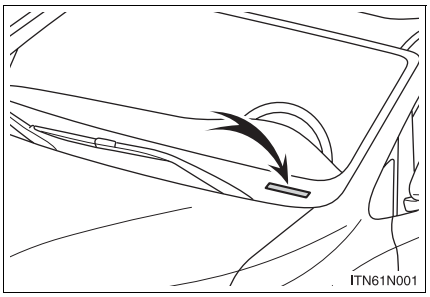

This number is stamped on the top left of the instrument panel.

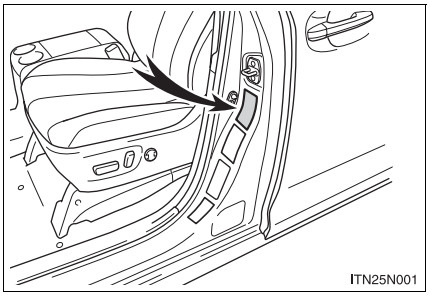


This number is also on the Certification Label on the driver’s side center pillar.


■ Engine number

The engine number is stamped on the engine block as shown.

1AR-FE engine

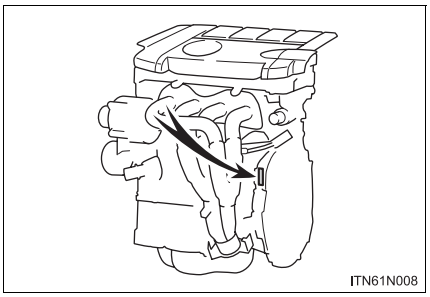

2GR-FE engine

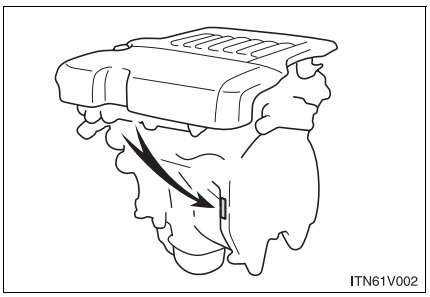

Engine

Model	1AR-FE, 2GR-FE
Type 1AR-FE engine 2GR-FE engine	 4-cylinder in line, 4-cycle, gasoline 6-cylinder V type, 4-cycle, gasoline
Bore and stroke 1AR-FE engine 2GR-FE engine	 3.54 × 4.13 in. (90.0 × 105.0 mm) 3.70 × 3.27 in. (94.0 × 83.0 mm)
Displacement 1AR-FE engine 2GR-FE engine	 163.1 cu.in. (2672 cm^3) 210.9 cu.in. (3456 cm^3)
Drive belt tension	Automatic adjustment
Valve clearance	

Fuel

Fuel type	Unleaded gasoline only
Octane rating	87 (Research Octane Number 91) or higher
Fuel tank capacity (Reference)	20.9 gal. (79 L, 17.4 Imp.gal.)

Lubrication system

Oil capacity (Drain and refill — reference*)	
1AR-FE engine	Without filter: 4.2 qt. (4.0 L, 3.5 Imp.qt.) With filter: 4.6 qt. (4.4 L, 3.9 Imp.qt.)
2GR-FE engine	Without filter: 6.0 qt. (5.7 L, 5.0 Imp.qt.) With filter: 6.4 qt. (6.1 L, 5.4 Imp.qt.)


*: The engine oil capacity is a reference quantity to be used when changing the engine oil. Warm up and turn off the engine, wait more than 5 minutes, and check the oil level on the dipstick.

■ Engine oil selection

“Toyota Genuine Motor Oil” is used in your Toyota vehicle. Use Toyota approved “Toyota Genuine Motor Oil” or equivalent to satisfy the following grade and viscosity.

Oil grade: ILSAC multigrade engine oil

Recommended viscosity: SAE 0W-20

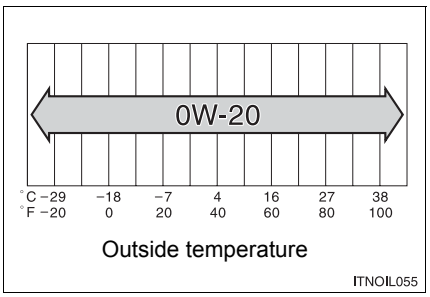

SAE 0W-20 is the best choice for good fuel economy and good starting in cold weather.

If SAE 0W-20 is not available, SAE 5W-20 oil may be used. However, it must be replaced with SAE 0W-20 at the next oil change.

Oil viscosity (0W-20 is explained here as an example):

- The 0W in 0W-20 indicates the characteristic of the oil which allows cold startability. Oils with a lower value before the W allow for easier starting of the engine in cold weather.
- The 20 in 0W-20 indicates the viscosity characteristic of the oil when the oil is at high temperature. An oil with a higher viscosity (one with a higher value) may be better suited if the vehicle is operated at high speeds, or under extreme load conditions.

How to read oil container label:

The ILSAC (International Lubricant Standardization and Approval Committee) Certification Mark is added to some oil containers to help you select the oil you should use.



Cooling system

Capacity 1AR-FE engine 2GR-FE engine	9.2 qt. (8.7 L, 7.7 Imp.qt.) **Without towing package** 11.0 qt. (10.4 L, 9.2 Imp.qt.) **With towing package** 11.7 qt. (11.1 L, 9.8 Imp.qt.)
Coolant type	Use either of the following. • “Toyota Super Long Life Coolant” • A similar high-quality ethylene glycol-based non-silicate, non-amine, non-nitrite, and non-borate coolant with long-life hybrid organic acid technology Do not use plain water alone.

Ignition system

Spark plug Make DENSO 1AR-FE engine 2GR-FE engine Gap	 SK16HR11 FK20HR11 0.043 in. (1.1 mm)

⚠ NOTICE

■ Iridium-tipped spark plugs

Use only iridium-tipped spark plugs. Do not adjust spark plug gap.

Electrical system

Battery Open voltage* at 68°F (20°C):	 12.6 — 12.8 V Fully charged 12.2 — 12.4 V Half charged 11.8 — 12.0 V Discharged (*: Voltage checked 20 minutes after the engine and all the lights turned off)
Charging rates	5 A max.

Automatic transaxle

Fluid capacity* 2WD models AWD models	 6.9 qt. (6.5 L, 5.7 Imp.qt.) 7.1 qt. (6.7 L, 5.9 Imp.qt.)
Fluid type	Toyota Genuine ATF WS

*: The fluid capacity is a reference quantity. If replacement is necessary, contact your Toyota dealer.

⚠ NOTICE

■ Transmission fluid type

Using transmission fluid other than “Toyota Genuine ATF WS” may cause deterioration in shift quality, locking up of your transmission accompanied by vibration and, ultimately, damage to the vehicle’s transmission.

Transfer (AWD models)

Oil capacity	0.85 qt. (0.80 L, 0.70 Imp.qt.)
Oil type and viscosity	Toyota Genuine Differential Gear Oil LT SAE 75W-85 GL-5 or equivalent

Your Toyota vehicle is filled with “Toyota Genuine Differential Gear Oil” at the factory. Use Toyota approved “Toyota Genuine Differential Gear Oil” or an equivalent oil of matching quality to satisfy the above specification. Please contact your Toyota dealer for further details.

Rear differential (AWD models)

Oil capacity	0.53 qt. (0.50 L, 0.44 Imp.qt.)
Oil type and viscosity	Toyota Genuine Differential Gear Oil LT SAE 75W-85 GL-5 or equivalent

Your Toyota vehicle is filled with “Toyota Genuine Differential Gear Oil” at the factory. Use Toyota approved “Toyota Genuine Differential Gear Oil” or an equivalent oil of matching quality to satisfy the above specification. Please contact your Toyota dealer for further details.

Brakes

Pedal clearance*1	2.99 in. (76 mm)
Pedal free play	0.04 — 0.24 in. (1 — 6 mm)
Brake pad wear limit	0.04 in. (1.0 mm)
Parking brake lining wear limit	0.04 in. (1.0 mm)
Parking brake pedal travel*2	3 — 6 clicks
Fluid type	SAE J1703 or FMVSS No.116 DOT 3

*1: Minimum pedal clearance when depressed with a force of 110 lbf (490 N, 50 kgf) while the engine is running

*2: Parking brake pedal travel when depressed with a force of 67.4 lbf (300 N, 30.6 kgf)

Steering

Free play	Less than 1.2 in. (30 mm)

Tires and wheels

17-inch tires

Tire size	P235/60R17 100T, T155/80R17 101M (spare)
Tire inflation pressure (Recommended cold tire inflation pressure)	Front: 35 psi (240 kPa, 2.4 kgf/cm^2 or bar) Rear: 35 psi (240 kPa, 2.4 kgf/cm^2 or bar) Spare: 60 psi (420 kPa, 4.2 kgf/cm^2 or bar)
Wheel size	17 x 7J, 17 x 4T (spare)
Wheel nut torque	76 ft•lbf (103 N•m, 10.5 kgf•m)

18-inch tires

Tire size	P235/55R18 99V, P235/55RF18 99T, T155/80R17 101M (spare)
Tire inflation pressure (Recommended cold tire inflation pressure)	Front: 35 psi (240 kPa, 2.4 kgf/cm^2 or bar) Rear: 35 psi (240 kPa, 2.4 kgf/cm^2 or bar) Vehicles without run-flat tires: Spare: 60 psi (420 kPa, 4.2 kgf/cm^2 or bar)
Wheel size	18 x 7J, 17 x 4T (spare)
Wheel nut torque	76 ft•lbf (103 N•m, 10.5 kgf•m)

19-inch tires

Tire size	P235/50R19 99V, T155/80R17 101M (spare)
Tire inflation pressure (Recommended cold tire inflation pressure)	Front: 36 psi (250 kPa, 2.5 kgf/cm^2 or bar) Rear: 36 psi (250 kPa, 2.5 kgf/cm^2 or bar) Spare:60 psi (420 kPa, 4.2 kgf/cm^2 or bar)
Wheel size	19 x 7J, 17 x 4T (spare)
Wheel nut torque	76 ft•lbf (103 N•m, 10.5 kgf•m)

Light bulbs

	Light Bulbs	Bulb No.	W	Type
Exterior	Headlights (low beam) Discharge bulbs Halogen bulbs	 — —	 35 55	 A B
	Headlights (high beam)	9005	60	C
	Front fog lights	—	55	B
	Front turn signal/parking/side marker lights	3457NAK	28/8	E
	Rear turn signal lights	WY21W	21	E
	Tail lights	W5W	5	D
	Back-up lights	921	16	D
	License plate lights	W5W	5	D
	Outer foot lights	W6W	6	D
Interior	Front personal/interior lights	W5W	5	D
	Rear personal/interior lights	W5W	5	D
	Luggage compartment light	—	5	F
	Vanity lights	—	2.8	F
	Front door courtesy lights	—	5	D

A: D4S discharge bulbs
B: H11 halogen bulbs
C: HB3 halogen bulbs
D: Wedge base bulbs (clear)
E: Wedge base bulbs (amber)
F: Double end bulbs

Fuel information

You must only use unleaded gasoline in your vehicle.
Select octane rating 87 (Research Octane Number 91) or higher. Use of unleaded gasoline with an octane rating lower than 87 may result in engine knocking. Persistent knocking can lead to engine damage.

At minimum, the gasoline you use should meet the specifications of ASTM D4814 in the U.S.A. and CGSB3.5-M93 in Canada.

Fuel tank opening for unleaded gasoline

To help prevent incorrect fueling, your Toyota has a fuel tank opening that only accommodates the special nozzle on unleaded fuel pumps.

Gasoline quality

In very few cases, driveability problems may be caused by the brand of gasoline you are using. If driveability problems persist, try changing the brand of gasoline. If this does not correct the problem, consult your Toyota dealer.

Gasoline quality standards

- Automotive manufacturers in the U.S.A., the Europe and Japan have developed a specification for fuel quality called World-Wide Fuel Charter (WWFC), which is expected to be applied worldwide.
- The WWFC consists of four categories that are based on required emission levels. In the U.S., category 4 has been adopted.
- The WWFC improves air quality by lowering emissions in vehicle fleets, and improves customer satisfaction through better performance.

■ **Recommendation of the use of gasoline containing detergent additives**


- Toyota recommends the use of gasoline that contains detergent additives to avoid build-up of engine deposits.
- All gasoline sold in the U.S.A. contains detergent additives to clean and/or keep clean intake systems.

■ **Recommendation of the use of cleaner burning gasoline**

Cleaner burning gasoline, including reformulated gasoline that contains oxygenates such as ethanol or MTBE (Methyl Tertiary Butyl Ether) is available in many areas.

Toyota recommends the use of cleaner burning gasoline and appropriately blended reformulated gasoline. These types of gasoline provide excellent vehicle performance, reduce vehicle emissions and improve air quality.

■ **Non-recommendation of the use of blended gasoline**

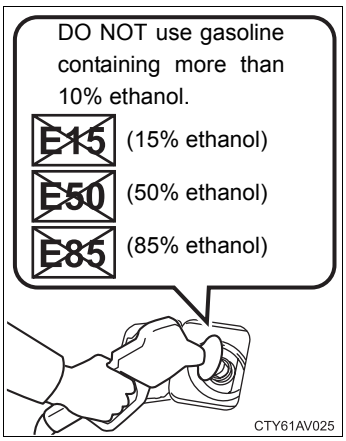

- Use only gasoline containing a maximum of 10% ethanol.
  DO NOT use any flex-fuel or gasoline that could contain more than 10% ethanol, including from any pump labeled E15, E30, E50, E85 (which are only some examples of fuel containing more than 10% ethanol).
- If you use gasohol in your vehicle, be sure that it has an octane rating no lower than 87.
- Toyota does not recommend the use of gasoline containing methanol.

■ **Non-recommendation of the use of gasoline containing MMT**

Some gasoline contains an octane enhancing additive called MMT (Methyl-cyclopentadienyl Manganese Tricarbonyl).

Toyota does not recommend the use of gasoline that contains MMT. If fuel containing MMT is used, your emission control system may be adversely affected.

The malfunction indicator lamp on the instrument panel may come on. If this happens, contact your Toyota dealer for service.

■ **If your engine knocks**

- Consult your Toyota dealer.
- You may occasionally notice light knocking for a short time while accelerating or driving uphill. This is normal and there is no need for concern.

NOTICE

Notice on fuel quality

- Do not use improper fuels. If improper fuels are used, the engine will be damaged.
- Do not use leaded gasoline.
  Leaded gasoline can cause damage to your vehicle's catalytic converters causing the emission control system to malfunction.
- Do not use gasohol other than that stated here.
  Other gasohol may cause fuel system damage or vehicle performance problems.
- Using unleaded gasoline with an octane number or rating lower than the level previously stated will cause persistent heavy knocking.
  At worst, this will lead to engine damage.

Fuel-related poor driveability

If poor driveability is encountered after using a different type of fuel (poor hot starting, vaporization, engine knocking, etc.), discontinue the use of that type of fuel.


When refueling with gasohol

Take care not to spill gasohol. It can damage your vehicle's paint.


Tire information

Typical tire symbols

Run-flat tire or standard tire

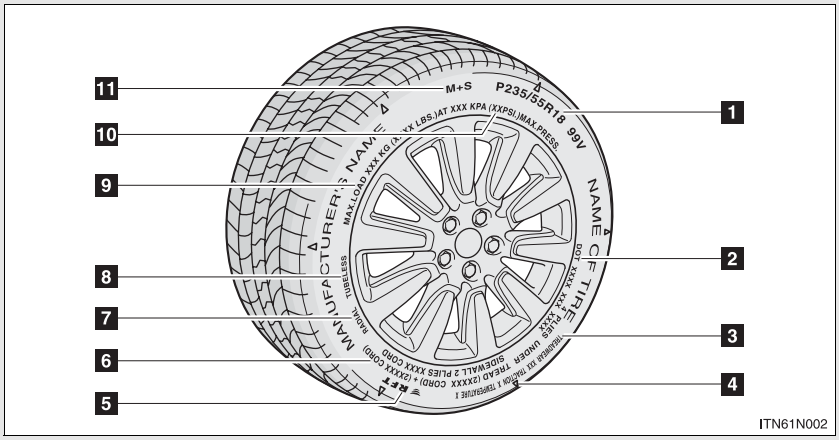

Compact spare tire

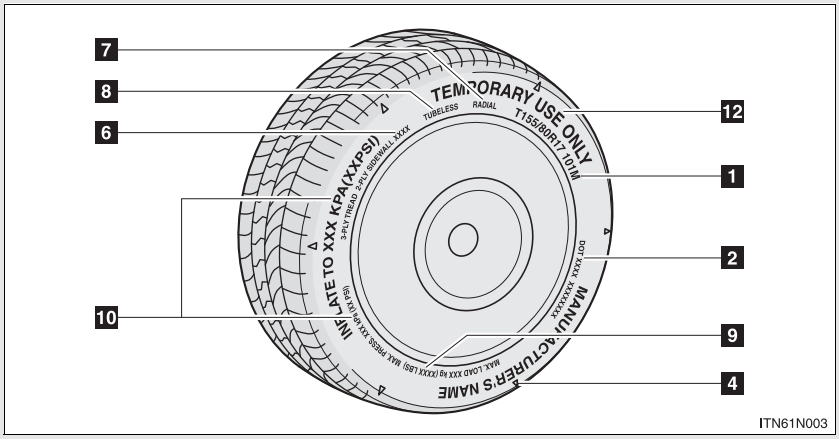

1 Tire size (→P. 804)

2 DOT and Tire Identification Number (TIN) (→P. 803)

3 Uniform tire quality grading

For details, see “Uniform Tire Quality Grading” that follows.

4 Location of treadwear indicators (→P. 672)

5 Run-flat tire (RFT) or standard tire (→P. 745)

This vehicle can be equipped with either run-flat tires (RFT) or standard tires. An “RFT” or “DSST” mark is molded on the sidewall of the run-flat tire.

6 Tire ply composition and materials

Plies are layers of rubber-coated parallel cords. Cords are the strands which form the plies in a tire.

7 Radial tires or bias-ply tires

A radial tire has “RADIAL” on the sidewall. A tire not marked “RADIAL” is a bias-ply tire.

8 TUBELESS or TUBE TYPE

A tubeless tire does not have a tube and air is directly put into the tire. A tube type tire has a tube inside the tire and the tube maintains the air pressure.

9 Load limit at maximum cold tire inflation pressure (→P. 677)

10 Maximum cold tire inflation pressure (→P. 794)

This means the pressure to which a tire may be inflated.


11 Summer tires or all season tires (→P. 678)

An all season tire has “M+S” on the sidewall. A tire not marked “M+S” is a summer tire.

12 “TEMPORARY USE ONLY” (→P. 754)

A compact spare tire is identified by the phrase “TEMPORARY USE ONLY” molded on its sidewall. This tire is designed for temporary emergency use only.

Typical DOT and Tire Identification Number (TIN)

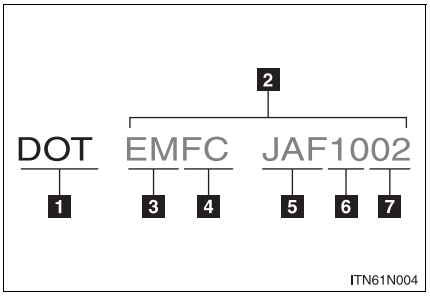

1 DOT symbol*

2 Tire Identification Number (TIN)

3 Tire manufacturer's identification mark

4 Tire size code

5 Manufacturer's optional tire type code (3 or 4 letters)

6 Manufacturing week


7 Manufacturing year

*: The DOT symbol certifies that the tire conforms to applicable Federal Motor Vehicle Safety Standards.


Tire size

■ Typical tire size information

The illustration indicates typical tire size.

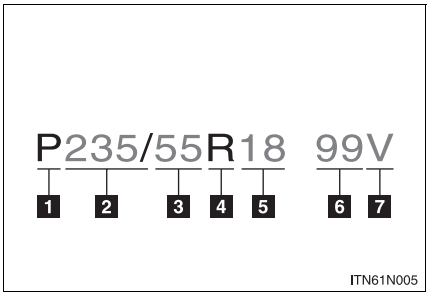


1 Tire use
(P = Passenger car,
T = Temporary use)
2 Section width (millimeters)
3 Aspect ratio
(tire height to section width)
4 Tire construction code
(R = Radial, D = Diagonal)
5 Wheel diameter (inches)
6 Load index (2 or 3 digits)
7 Speed symbol
(alphabet with one letter)

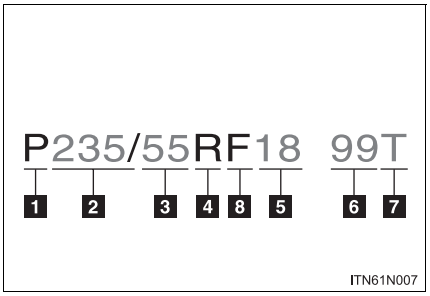


8 Run-flat tire code

■ Tire dimensions

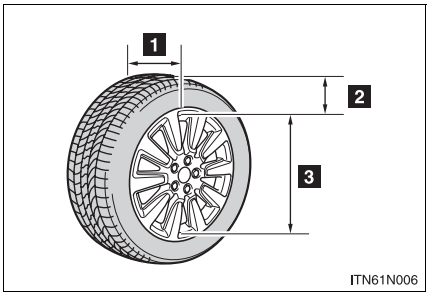

1 Section width
2 Tire height
3 Wheel diameter

Tire section names

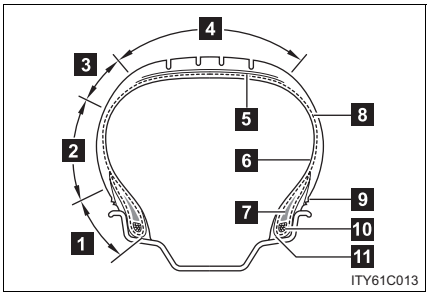

1 Bead
2 Sidewall
3 Shoulder
4 Tread
5 Belt
6 Inner liner
7 Reinforcing rubber
8 Carcass
9 Rim lines
10 Bead wires
11 Chafer

Uniform Tire Quality Grading

This information has been prepared in accordance with regulations issued by the National Highway Traffic Safety Administration of the U.S. Department of Transportation.
It provides the purchasers and/or prospective purchasers of Toyota vehicles with information on uniform tire quality grading.

Your Toyota dealer will help answer any questions you may have as you read this information.

DOT quality grades

All passenger vehicle tires must conform to Federal Safety Requirements in addition to these grades. Quality grades can be found where applicable on the tire sidewall between tread shoulder and maximum section width.

For example: Treadwear 200 Traction AA Temperature A

■ **Treadwear**

The treadwear grade is a comparative rating based on the wear rate of the tire when tested under controlled conditions on a specified government test course.

For example, a tire graded 150 would wear one and a half (1-1/2) times as well on the government course as a tire graded 100.
The relative performance of tires depends upon the actual conditions of their use, performance may differ significantly from the norm due to variations in driving habits, service practices and differences in road characteristics and climate.

■ **Traction AA, A, B, C**

The traction grades, from highest to lowest, are AA, A, B and C, and they represent the tire's ability to stop on wet pavement as measured under controlled conditions on specified government test surfaces of asphalt and concrete.

A tire marked C may have poor traction performance.

Warning: The traction grade assigned to this tire is based on braking (straight ahead) traction tests and does not include cornering (turning) traction.

Temperature A, B, C

The temperature grades are A (the highest), B, and C, representing the tire's resistance to the generation of heat and its ability to dissipate heat when tested under controlled conditions on a specified indoor laboratory test wheel.

Sustained high temperature can cause the material of the tire to degenerate and reduce tire life, and excessive temperature can lead to sudden tire failure.

The grade C corresponds to a level of performance which all passenger car tires must meet under the Federal Motor Vehicle Safety Standard No. 109.

Grades B and A represent higher levels of performance on the laboratory test wheel than the minimum required by law.

Warning: The temperature grades of a tire assume that it is properly inflated and not overloaded.
Excessive speed, underinflation, or excessive loading, either separately or in combination, can cause heat buildup and possible tire failure.

Glossary of tire terminology

Tire related term	Meaning
Cold tire inflation pressure	Tire pressure when the vehicle has been parked for three hours or more, or has not been driven more than 1 mile or 1.5 km under that condition
Maximum inflation pressure	The maximum cold inflated pressure to which a tire may be inflated, shown on the sidewall of the tire
Recommended inflation pressure	Cold tire inflation pressure recommended by a manufacturer
Accessory weight	The combined weight (in excess of those standard items which may be replaced) of automatic transmission, power steering, power brakes, power windows, power seats, radio and heater, to the extent that these items are available as factory-installed equipment (whether installed or not)
Curb weight	The weight of a motor vehicle with standard equipment, including the maximum capacity of fuel, oil and coolant, and if so equipped, air conditioning and additional weight optional engine
Maximum loaded vehicle weight	The sum of: (a) Curb weight (b) Accessory weight (c) Vehicle capacity weight (d) Production options weight

Tire related term	Meaning
Normal occupant weight	150 lb. (68 kg) times the number of occupants specified in the second column of Table 1* that follows
Occupant distribution	Distribution of occupants in a vehicle as specified in the third column of Table 1* below
Production options weight	The combined weight of installed regular production options weighing over 5 lb. (2.3 kg) in excess of the standard items which they replace, not previously considered in curb weight or accessory weight, including heavy duty brakes, ride levelers, roof rack, heavy duty battery, and special trim
Rim	A metal support for a tire or a tire and tube assembly upon which the tire beads are seated
Rim diameter (Wheel diameter)	Nominal diameter of the bead seat
Rim size designation	Rim diameter and width
Rim type designation	The industry manufacturer's designation for a rim by style or code
Rim width	Nominal distance between rim flanges
Vehicle capacity weight (Total load capacity)	The rated cargo and luggage load plus 150 lb. (68 kg) times the vehicle's designated seating capacity
Vehicle maximum load on the tire	The load on an individual tire that is determined by distributing to each axle its share of the maximum loaded vehicle weight, and dividing by two

Tire related term	Meaning
Vehicle normal load on the tire	The load on an individual tire that is determined by distributing to each axle its share of curb weight, accessory weight, and normal occupant weight (distributed in accordance with Table 1* below), and dividing by two
Weather side	The surface area of the rim not covered by the inflated tire
Bead	The part of the tire that is made of steel wires, wrapped or reinforced by ply cords and that is shaped to fit the rim
Bead separation	A breakdown of the bond between components in the bead
Bias ply tire	A pneumatic tire in which the ply cords that extend to the beads are laid at alternate angles substantially less than 90 degrees to the centerline of the tread
Carcass	The tire structure, except tread and sidewall rubber which, when inflated, bears the load
Chunking	The breaking away of pieces of the tread or sidewall
Cord	The strands forming the plies in the tire
Cord separation	The parting of cords from adjacent rubber compounds
Cracking	Any parting within the tread, sidewall, or innerliner of the tire extending to cord material

Tire related term	Meaning
CT	A pneumatic tire with an inverted flange tire and rim system in which the rim is designed with rim flanges pointed radially inward and the tire is designed to fit on the underside of the rim in a manner that encloses the rim flanges inside the air cavity of the tire
Extra load tire	A tire designed to operate at higher loads and at higher inflation pressures than the corresponding standard tire
Groove	The space between two adjacent tread ribs
Innerliner	The layer(s) forming the inside surface of a tubeless tire that contains the inflating medium within the tire
Innerliner separation	The parting of the innerliner from cord material in the carcass
Intended outboard sidewall	(a) The sidewall that contains a whitewall, bears white lettering, or bears manufacturer, brand, and/or model name molding that is higher or deeper than the same molding on the other sidewall of the tire, or (b) The outward facing sidewall of an asymmetrical tire that has a particular side that must always face outward when mounted on a vehicle
Light truck (LT) tire	A tire designated by its manufacturer as primarily intended for use on lightweight trucks or multipurpose passenger vehicles
Load rating	The maximum load that a tire is rated to carry for a given inflation pressure
Maximum load rating	The load rating for a tire at the maximum permissible inflation pressure for that tire

Tire related term	Meaning
Maximum permissible inflation pressure	The maximum cold inflation pressure to which a tire may be inflated
Measuring rim	The rim on which a tire is fitted for physical dimension requirements
Open splice	Any parting at any junction of tread, sidewall, or innerliner that extends to cord material
Outer diameter	The overall diameter of an inflated new tire
Overall width	The linear distance between the exteriors of the sidewalls of an inflated tire, including elevations due to labeling, decorations, or protective bands or ribs
Passenger car tire	A tire intended for use on passenger cars, multipurpose passenger vehicles, and trucks, that have a gross vehicle weight rating (GVWR) of 10,000 lb. or less
Ply	A layer of rubber-coated parallel cords
Ply separation	A parting of rubber compound between adjacent plies
Pneumatic tire	A mechanical device made of rubber, chemicals, fabric and steel or other materials, that, when mounted on an automotive wheel, provides the traction and contains the gas or fluid that sustains the load
Radial ply tire	A pneumatic tire in which the ply cords that extend to the beads are laid at substantially 90 degrees to the centerline of the tread

Tire related term	Meaning
Reinforced tire	A tire designed to operate at higher loads and at higher inflation pressures than the corresponding standard tire
Section width	The linear distance between the exteriors of the sidewalls of an inflated tire, excluding elevations due to labeling, decoration, or protective bands
Sidewall	That portion of a tire between the tread and bead
Sidewall separation	The parting of the rubber compound from the cord material in the sidewall
Snow tire	A tire that attains a traction index equal to or greater than 110, compared to the ASTM E-1136 Standard Reference Test Tire, when using the snow traction test as described in ASTM F-1805-00, Standard Test Method for Single Wheel Driving Traction in a Straight Line on Snow-and Ice-Covered Surfaces, and which is marked with an Alpine Symbol ( ) on at least one sidewall
Test rim	The rim on which a tire is fitted for testing, and may be any rim listed as appropriate for use with that tire
Tread	That portion of a tire that comes into contact with the road
Tread rib	A tread section running circumferentially around a tire
Tread separation	Pulling away of the tread from the tire carcass

Tire related term	Meaning
Treadwear indicators (TWI)	The projections within the principal grooves designed to give a visual indication of the degrees of wear of the tread
Wheel-holding fixture	The fixture used to hold the wheel and tire assembly securely during testing

*: Table 1 — Occupant loading and distribution for vehicle normal load for various designated seating capacities

Designated seating capacity, Number of occupants	Vehicle normal load, Number of occupants	Occupant distribution in a normally loaded vehicle
2 through 4	2	2 in front
5 through 10	3	2 in front, 1 in second seat
11 through 15	5	2 in front, 1 in second seat, 1 in third seat, 1 in fourth seat
16 through 20	7	2 in front, 2 in second seat, 2 in third seat, 1 in fourth seat

Customizable features

Your vehicle includes a variety of electronic features that can be personalized to suit your preferences. Programming these preferences requires specialized equipment and may be performed by your Toyota dealer.

Some function settings are changed simultaneously with other functions being customized. Contact your Toyota dealer for further details.

Item	Function	Default setting	Customized setting
Smart key system and wireless remote control (→P. 36, 53)	Unlocking operation*	Drivers door unlocked in one step, all doors unlocked in two steps	All doors unlocked in one step
	Automatic door lock function to be activated if door is not opened after being unlocked*	On	Off
	Time elapsed before automatic door lock function is activated if door is not opened after being unlocked*	60 seconds	30 seconds
			120 seconds
	Operation signal* (Emergency flashers)	On	Off
	Operation signal (Buzzer)	On	Off
	Open door warning function (when locking the vehicle)	On	Off

Item	Function	Default setting	Customized setting
Wireless remote control (→P. 53)	Wireless remote control	On	Off
	Operation signal (Buzzer volume)	Level 7	Level 1 to 6
			Off
	Panic function	On	Off
	Power sliding door operation	On	Off
		Press and hold	Press twice
			One short press
	Power back door operation	On	Off
		Press and hold	Press twice
			One short press
Smart key system (→P. 36)	Smart key system	On	Off
	Number of permissible times of continuous smart lock	Twice	Unlimited

Item	Function	Default setting	Customized setting
Door lock (→P. 60)	Unlocking using a key	Drivers door unlocked in one step, all doors unlocked in two steps	All doors unlocked in one step
	Speed-detecting automatic door lock function*	Off	On
	Opening drivers door unlocks all doors*	Off	On
	Shifting gears to P unlocks all doors*	On	Off
	Shifting gears to position other than P locks all doors*	On	Off


Item	Function	Default setting	Customized setting
Power sliding door (if equipped) (→P. 67)	Operation signal (buzzer)	Off	On
	Opening and closing operation	One short push	Push and hold
Automatic light control system (→P. 266)	Time elapsed before headlights automatically turn off after doors are closed*	30 seconds	0 second
			60 seconds
			90 seconds
	Daytime running light system (U.S.A. only)	On	Off
	Light sensor sensitivity	Level 3	Level 1 to 5
	Automatic High Beam (if equipped)*	On	Off
Alarm system (→P. 162)	Time elapsed before the alarm is set	14 seconds	30 seconds
Multi-information display (→P. 252)	Language selection*	English	French
			Spanish

Item	Function	Default setting	Customized setting
Illumination (→P. 566)	Time elapsed before lights turn off	15 seconds	7.5 seconds
			30 seconds
	Operation when the doors are unlocked	On	Off
	Operation after the engine switch is turned to the “LOCK” position	On	Off
	Rear ceiling light	On	Off
	Outer foot lights	On	Off
Intuitive parking assist (→P. 314)	Buzzer volume	Max.	Min. to Max.
Seat belt reminder (→P. 733)	Vehicle speed linked seat belt reminder buzzer	On	Off

*: For vehicles with the multi-information display, the setting can be changed by operating the multi-information display. (→P. 820)

Customizing the features by using the multi-information display

STEP 1

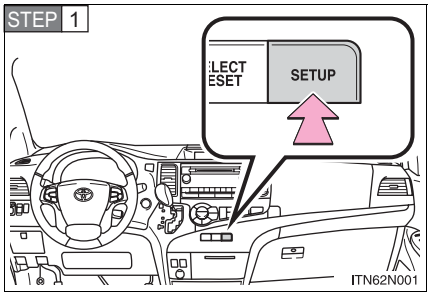


Press the “SETUP” button while the vehicle is stopped.

The “Custom Settings” screen is displayed on the multi-information display.

If left idle for approximately 20 seconds, the display will return to the previous screen.


STEP 2

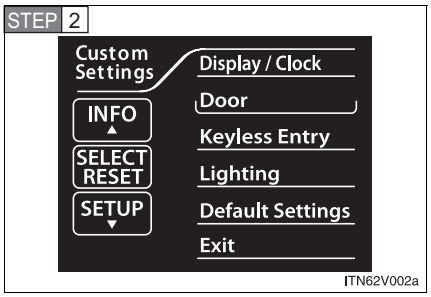

Select the setting you wish to change by pressing the “INFO” or “SETUP” button, then press the “SELECT RESET” button to select.

If you select “Exit” and press the “SELECT RESET” button, the display will return to the previous screen.

STEP 3

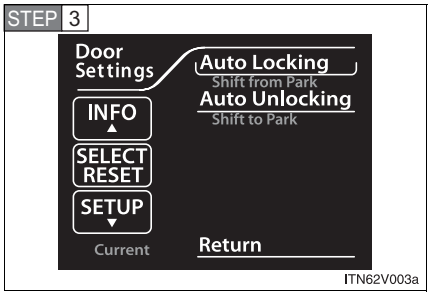


Select the setting you wish to change by pressing the “INFO” or “SETUP” button, and press the “SELECT RESET” button.

The illustration assumes that “Door” was chosen in STEP 2.

The current setting is indicated by yellow text.

If you select “Return” and press the “SELECT RESET” button, the display will return to the “Custom Settings” screen.

STEP 4



Choose a desired setting by pressing the “INFO” or “SETUP” button, then press the “SELECT RESET” button to select.

If any settings are changed, the display will revert to the previous screen.


The illustration assumes that “Auto Locking” was chosen in STEP 3.

The current setting is indicated by yellow text.

If you select “Return” and press the “SELECT RESET” button, the display will revert to the previous screen.

■ Restoring default settings


STEP 1

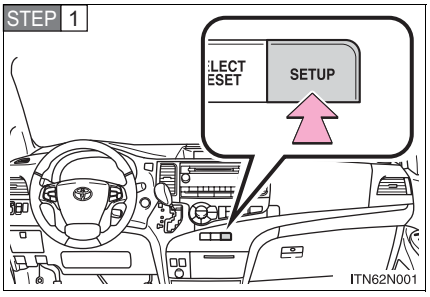

Press the “SETUP” button while the vehicle is stopped.


The “Custom Settings” screen is displayed on the multi-information display.

If left idle for approximately 20 seconds, the display will revert to the previous screen.

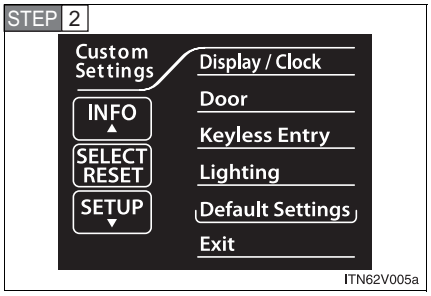

Select “Default Settings” by pressing the “INFO” or “SETUP” button, and press the “SELECT RESET” button.

If you select “Exit” and press the “SELECT RESET” button, the display will revert to the previous screen.

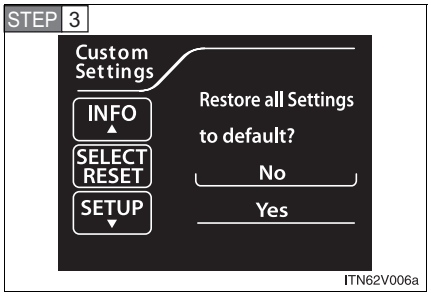

Select “Yes” by pressing the “INFO” or “SETUP” button, and press the “SELECT RESET” button.

“Default Settings Restored” is displayed, and the default settings are restored.

If you select “No” and press the “SELECT RESET” button, the display will revert to the “Custom Settings” screen without restoring the default settings.

■ **If the vehicle is moved while settings are being changed on the multi-information display**

→P. 263

Items to initialize

The following items must be initialized for normal system operation after such cases as the battery being reconnected, or maintenance being performed on the vehicle.

Item	When to initialize	Reference
Power sliding door (if equipped)	After reconnecting or changing the battery	P. 74
Power back door (if equipped)	After reconnecting or changing the battery	P. 87
Maintenance data (U.S.A. only)	After the maintenance is performed	P. 640
Tire pressure warning system	When changing the tire size	P. 674

Reporting safety defects for U.S. owners

If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration (NHTSA) in addition to notifying Toyota Motor Sales, U.S.A., Inc. (Toll-free: 1-800-331-4331).

If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer, or Toyota Motor Sales, U.S.A., Inc.


To contact NHTSA, you may call the Vehicle Safety Hotline toll-free at 1-888-327-4236 (TTY: 1-800-424-9153); go to *http://www.safercar.gov* ; or write to: Administrator, NHTSA, 1200 New Jersey Ave, S.E., Washington, DC 20590. You can also obtain other information about motor vehicle safety from *http://www.safercar.gov*.

Seat belt instructions for Canadian owners (in French)

The following is a French explanation of seat belt instructions extracted from the seat belt section in this manual.

See the seat belt section for more detailed seat belt instructions in English.

Utilisation correcte des ceintures de sécurité

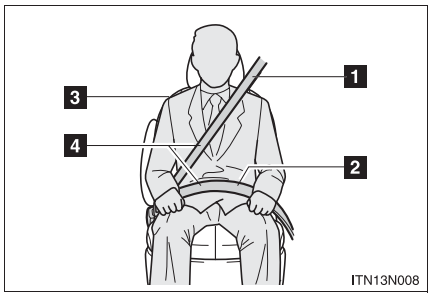

1 Déroulez la sangle diagonale de telle sorte qu'elle passe bien sur l'épaule, sans pour autant être en contact avec votre cou ou glisser de votre épaule.


2 Placez la sangle abdominale le plus bas possible sur les hanches.

3 Réglez la position du dossier de siège. Asseyez-vous le dos le plus droit possible et calez-vous bien dans le siège.

4 Ne vrillez pas la ceinture de sécurité.

ATTENTION

Lorsque vous utilisez la ceinture de sécurité centrale de la troisième rangée de sièges



N’utilisez pas la ceinture de sécurité centrale de la troisième rangée de sièges si l’une des boucles est retirée. Fixer une seule boucle pourrait occasionner des blessures graves, voire mortelles, en cas de freinage brusque ou de collision.

Entretien et soin

Ceintures de sécurité

Nettoyez avec un chiffon ou une éponge humectée d'eau savonneuse tiède. Profitez de l'occasion pour vérifier régulièrement que les ceintures ne sont pas effilochées, entaillées, ou ne paraissent pas exagérément usées.


ATTENTION

Détérioration et usure des ceintures de sécurité

Inspectez les ceintures de sécurité périodiquement. Contrôlez qu'elles ne sont pas entaillées, effilochées, et que leurs ancrages ne sont pas desserrés. N'utilisez pas une ceinture de sécurité défectueuse avant qu'elle ne soit remplacée. Une ceinture de sécurité défectueuse n'apporte aucune garantie de protection de l'occupant en cas d'accident.

SRS airbag instructions for Canadian owners (in French)

The following is a French explanation of SRS airbag instructions extracted from the SRS airbag section in this manual.
See the SRS airbag section for more detailed SRS airbag instructions in English.

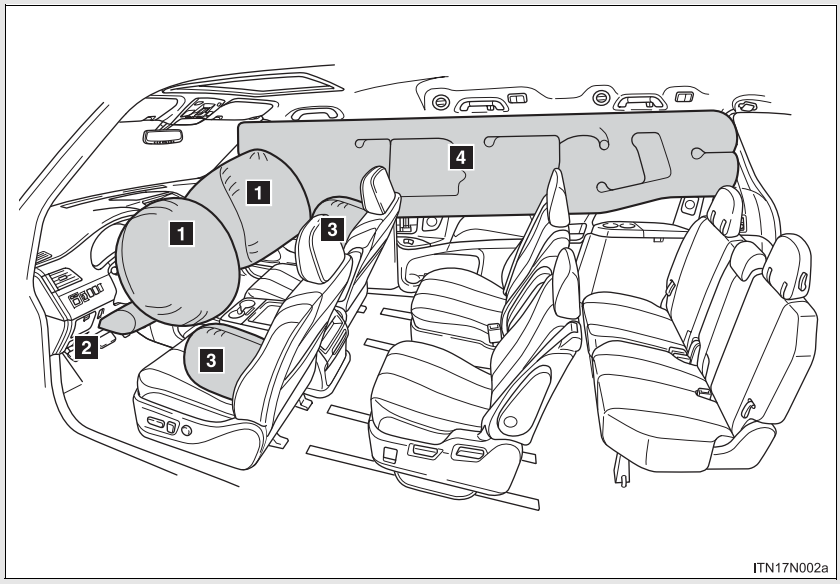

Coussins gonflables avant SRS

1 Coussin gonflable SRS du conducteur/du passager avant
Peut aider à protéger la tête et la poitrine du conducteur et du passager avant contre les impacts avec des composants intérieurs.


2 Coussins gonflables SRS de protection des genoux du conducteur
Peuvent aider à protéger le conducteur.

Coussins gonflables SRS latéraux et coussins gonflables en rideau

3 Coussins gonflables SRS latéraux
Peuvent aider à protéger le torse des occupants des sièges avant.

4 Coussins gonflables SRS en rideau
Peuvent aider à protéger principalement la tête des occupants des sièges latéraux.

Composants du système de coussins gonflables

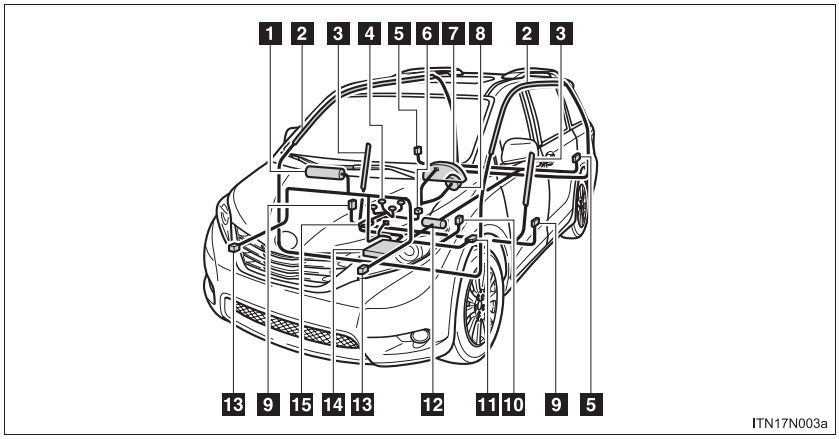

1 Coussin gonflable du passager avant
2 Coussins gonflables en rideau
3 Coussins gonflables latéraux
4 Système de classification de l'occupant du siège du passager avant (ECU et capteurs)
5 Capteurs du coussin gonflable en rideau
6 Contacteur de boucle de ceinture de sécurité du passager avant
7 Lampe témoin SRS
8 Coussin gonflable du conducteur
9 Capteurs des coussins gonflables latéraux et en rideau
10 Contacteur de boucle de ceinture de sécurité du conducteur
11 Capteur de position de siège du conducteur
12 Coussin gonflable de protection des genoux du conducteur
13 Capteurs de coussin gonflable avant
14 Module de capteur de coussin gonflable
15 Lampes témoins "AIR BAG ON" et "AIR BAG OFF"

Votre véhicule est équipé de COUSSINS GONFLABLES ÉVOLUÉS dont la conception s'appuie sur les normes de sécurité des véhicules à moteur américains (FMVSS208). Le système de coussins gonflables contrôle la puissance de déploiement des coussins du conducteur et du passager avant. Le système de coussin gonflable du conducteur est constitué du capteur de position du siège du conducteur, etc. Le système de coussin gonflable du passager avant est constitué du capteur de classification de l'occupant du siège du passager avant, etc.

Les composants principaux du système de coussins gonflables SRS sont illustrés ci-dessus. Le système de coussins gonflables SRS est contrôlé par le module de capteur de coussin gonflable. Le module de capteur de coussin gonflable est constitué d'un capteur de sûreté et d'un capteur de coussin gonflable.

Lors de certains types de collision frontale ou latérale violente, le système de coussins gonflables SRS déclenche les gonfleurs des coussins. Une réaction chimique se produit dans les gonfleurs et les coussins gonflables se remplissent rapidement d'un gaz non toxique pour empêcher tout mouvement des occupants.

⚠ ATTENTION

■ Précautions relatives aux coussins gonflables SRS

Observez les précautions suivantes en ce qui concerne les coussins gonflables.
Les négliger pourrait occasionner des blessures graves, voire mortelles.

- Le conducteur et tous les passagers du véhicule doivent porter leur ceinture de sécurité de la manière appropriée.
  Les coussins gonflables SRS sont des dispositifs supplémentaires qui doivent être utilisés de concert avec les ceintures de sécurité.
- Le coussin gonflable SRS du conducteur se déploie avec une force considérable et peut occasionner des blessures graves, voire mortelles, notamment lorsque le conducteur se trouve très près du coussin gonflable. La National Highway Traffic Safety Administration (“NHTSA”), aux États-Unis, donne les recommandations suivantes:


  La zone à risque d’un coussin gonflable côté conducteur couvre 2 à 3 in. (50 à 75 mm) de la zone de déploiement du coussin gonflable. Pour assurer une marge de sécurité suffisante, restez à 10 in. (250 mm) du coussin gonflable. Cette distance est mesurée depuis le centre du volant jusqu’à votre sternum. Si vous vous tenez à moins de 10 in. (250 mm), vous pouvez changer votre position de conduite de plusieurs manières:

  - Reculez votre siège à la position maximale vous permettant d’atteindre encore aisément les pédales.
  - Inclinez légèrement le dossier du siège.
    Même si les véhicules sont conçus différemment, la plupart des conducteurs peuvent maintenir une distance de 10 in. (250 mm), même si le siège se trouve complètement vers l’avant, simplement en inclinant un peu le dossier du siège vers l’arrière. Si la visibilité avant est moindre après avoir incliné le dossier du siège, utilisez un coussin ferme et non glissant pour être assis plus haut ou relevez l’assise du siège si cette option est disponible sur votre véhicule.
  - Si votre volant est réglable en hauteur, inclinez-le vers le bas. Cela vous permet d’orienter le coussin gonflable vers votre buste plutôt que vers la tête et le cou.

  Le siège doit être réglé de la manière recommandée ci-dessus par la NHTSA, tout en gardant le contrôle des pédales et du volant, et la vue sur les commandes et les instruments.

ATTENTION

■ Précautions relatives aux coussins gonflables SRS



- Si la rallonge de ceinture de sécurité a été reliée à la boucle des ceintures de sécurité des sièges avant sans avoir été attachée à la plaque de blocage des ceintures de sécurité, le coussin gonflable SRS avant considérera que le conducteur et le passager avant portent tout de même leur ceinture même si elles ne sont pas attachées. Les coussins gonflables SRS avant peuvent alors ne pas s'activer correctement lors d'une collision, ce qui représente un risque de blessures graves, voire mortelles. Bouclez toujours votre ceinture de sécurité lorsque vous utilisez la rallonge.

- Le coussin gonflable SRS du passager avant se déploie également avec une force considérable et peut occasionner des blessures graves, voire mortelles, notamment lorsque le passager avant se trouve très près du coussin gonflable. Le siège du passager avant doit se trouver le plus loin possible du coussin gonflable et le dossier doit être réglé de manière à ce que le passager avant soit assis bien droit.


ATTENTION

Précautions relatives aux coussins gonflables SRS


- Le déploiement d'un coussin gonflable risque d'infliger des blessures graves, voire mortelles, aux bébés et aux enfants mal assis et/ou mal attachés. Un bébé ou un enfant trop petit pour utiliser une ceinture de sécurité doit être correctement retenu à l'aide d'un dispositif de retenue pour enfants. Toyota recommande vivement d'installer et d'attacher correctement les bébés et les enfants sur les sièges arrière du véhicule à l'aide d'un système de retenue adapté. Les sièges arrière sont plus sécuritaires pour les bébés et les enfants que le siège du passager avant.
- N'installez jamais un dispositif de retenue pour enfants de type dos à la route sur le siège du passager avant, même si la lampe témoin "AIR BAG OFF" est allumée. En cas d'accident, la force et la vitesse de déploiement du coussin gonflable du passager avant sont telles qu'elles pourraient infliger à l'enfant des blessures graves, voire mortelles, si le dispositif de retenue pour enfants du type dos à la route était installé sur le siège du passager avant.

⚠ ATTENTION

■ Précautions relatives aux coussins gonflables SRS




● Ne vous asseyez pas sur le bord du siège et ne vous appuyez pas sur le tableau de bord.




● Ne laissez pas un enfant se tenir face au coussin gonflable SRS du passager avant ou s'asseoir sur les genoux d'un passager avant.

● Ne laissez pas les occupants du siège avant tenir des objets sur leurs genoux.




● Ne vous appuyez pas sur la portière ou sur le longeron du toit, ni sur les montants avant, latéraux ou arrière.




● Ne laissez personne s'agenouiller face à la portière sur le siège du passager ou sortir la tête ou les mains à l'extérieur du véhicule.

⚠ ATTENTION


■ Précautions relatives aux coussins gonflables SRS



- Ne fixez et n'appuyez rien sur des zones telles que le tableau de bord, le tampon de volant ou encore la partie inférieure du bloc d'instrumentation.
  Ces objets peuvent se transformer en projectiles lorsque les coussins gonflables SRS du conducteur, du passager avant ou de protection des genoux se déploient.



- Ne fixez rien sur les portières, le pare-brise, les glaces latérales, les montants avant et latéraux, le longeron du toit ou la poignée de maintien.
- N'accrochez pas de cintres ni d'autres objets rigides sur les crochets porte-vêtements. Tous ces objets pourraient se transformer en projectiles et vous occasionner des blessures graves, voire mortelles, en cas de déploiement du coussin gonflable SRS en rideau.



- Véhicules non dotés du système Smart key: N'accrochez pas d'objets lourds, aiguisés ou durs, par exemple des clés ou des accessoires, à la clé. Ces objets pourraient empêcher le déploiement du coussin SRS de protection des genoux ou être projetés dangereusement sur le siège du conducteur par la force du déploiement, et donc vous mettre en danger.

⚠ ATTENTION

■ Précautions relatives aux coussins gonflables SRS

- Si un recouvrement de vinyle est placé sur la zone de déploiement du coussin SRS de protection des genoux, veillez à le retirer.
- N'utilisez pas d'accessoires recouvrant les parties du siège où les coussins gonflables SRS latéraux se déploient, car ceux-ci pourraient nuire au déploiement de ces coussins. De tels accessoires peuvent empêcher les coussins gonflables latéraux de se déployer correctement, rendre le système inopérant ou provoquer accidentellement le déploiement des coussins gonflables latéraux, avec pour conséquence possible des blessures graves, voire mortelles.
- Ne frappez pas et n'appliquez pas une pression importante à l'emplacement des composants de coussins gonflables SRS.
  Vous risquez de provoquer un mauvais fonctionnement des coussins gonflables SRS.
- Ne touchez à aucun composant des coussins gonflables SRS immédiatement après leur déploiement (gonflage), car ils pourraient être chauds.
- Si vous avez de la difficulté à respirer après le déploiement d'un coussin gonflable SRS, ouvrez une portière ou une glace pour laisser entrer l'air, ou quittez le véhicule si vous pouvez le faire en toute sécurité. Dès que possible, nettoyez tous les résidus afin d'éviter les irritations cutanées.
- Si les emplacements de stockage des coussins gonflables SRS, notamment le tampon de volant et les garnitures des montants avant et arrière, sont endommagés ou fissurés, faites-les remplacer par votre concessionnaire Toyota.

ATTENTION

Modification et mise au rebut des composants du système de coussins gonflables SRS

Ne mettez pas le véhicule à la casse et n'effectuez aucune des modifications suivantes sans d'abord consulter votre concessionnaire Toyota.
Les coussins gonflables SRS pourraient fonctionner de manière incorrecte ou se déployer (gonfler) accidentellement, ce qui serait susceptible d'occasionner des blessures graves, voire mortelles.

- Installation, retrait, démontage et réparation des coussins gonflables SRS.
- Réparations, modifications, retrait ou remplacement du volant, du bloc d'instrumentation, du tableau de bord, des sièges ou du capitonnage des sièges, des montants avant, latéraux ou arrière et des longerons du toit.
- Réparations ou modifications de l'aile ou du pare-choc avant, ou du côté de l'habitacle.
- Installation de lames de déneigement, de treuils, etc. sur la calandre avant (barre safari, barre kangourou, etc.).
- Modifications au système de suspension du véhicule.
- Installation d'appareils électroniques tels qu'un émetteur-récepteur radio ou un lecteur de CD.
- Modifications à votre véhicule pour une personne aux capacités physiques réduites.



Abbreviation/Acronym list

ABBREVIATIONS	MEANING
2WD	2 Wheel Drive
A/C	Air Conditioning
ABS	Anti-lock Brake System
ACC	Accessory
AI-SHIFT	Artificial Intelligence Shift control
ALR	Automatic Locking Retractor
AVG	Average
AWD	All Wheel Drive
CRS	Child Restraint System
ECO	Economy/Ecology
ECU	Electronic Control Unit
EDR	Event Data Recorder
ELR	Emergency Locking Retractor
EPS	Electric Power Steering
E/M	English/U.S. customary system/Metric
GAWR	Gross Axle Weight Rating
GCWR	Gross Combination Weight Rating
GVWR	Gross Vehicle Weight Rating

ABBREVIATIONS	MEANING
I/M	Emission inspection and maintenance
LATCH	Lower Anchors and Tethers for Children
LED	Light Emitting Diode
MAX	Maximum
MIN	Minimum
MMT	Methylcyclopentadienyl Manganese Tricarbonyl
M + S	Mud and Snow
MTBE	Methyl Tertiary Butyl Ether
OBD	On Board Diagnostics
PCS	Pre-Collision System
RFT	Run-Flat Tire
SRS	Supplemental Restraint System
TIN	Tire Identification Number
TPMS	Tire Pressure Warning System
TRAC	Traction Control
VAR	Variation
VDIM	Vehicle Dynamics Integrated Management
VIN	Vehicle Identification Number
VSC	Vehicle Stability Control

Alphabetical index

A
Armrests 11
AUTO ACCESS SEAT 6

B
Battery
Disconnecting 7
Beep sounds 22
Before operating the seat 20

C
Child safety
Installing child restraint system 7
Seat belt precautions 12
Correct riding posture 14

E
Emergency, in case of
If the seat does not move while outside the vehicle 47

F
Footrest 13
Fuses 38

H
Head restraint 9

I
If the seat does not move while outside the vehicle 47
Installing child restraint system 7

J
Jam protection function 28, 32

M
Maintenance
Checking and replacing fuses 38
Wireless remote control battery 40
Moving the seat outside the vehicle 26

O
Operating with the seat raise/lower switch 35

R
Replacing the fuses 38
Returning the seat to the vehicle 30

S
Seat position adjustment switch 6
Seatback angle adjustment switch 6
Seats
Adjustment 6
Armrests 11
Footrest 13
Head restraint 9


W
When trouble arises
AUTO ACCESS SEAT 44
If the seat does not move while outside the vehicle 47
Wireless remote control 59
When you think a malfunction has occurred
AUTO ACCESS SEAT 44
If the seat does not move while outside the vehicle 47
Wireless remote control 59
Wireless remote control
Effective range 16
How to operate 26, 30
Replacing the battery 40
When you think a malfunction has occurred 59

What to do if...


A tire punctures	P. 745/ P. 747	If you have a flat tire
The engine does not start	P. 762	If the engine will not start
	P. 159	Engine immobilizer system
	P. 770	If the battery is discharged
The shift lever cannot be moved out	P. 764	If the shift lever cannot be shifted from P
The engine coolant temperature gauge enters the red zone	P. 775	If your vehicle overheats
Steam can be seen coming from under the hood		
The key is lost	P. 766	If you lose your keys
The battery runs out	P. 770	If the battery is discharged
The doors cannot be locked	P. 60	Front doors
	P. 67	Siding doors
	P. 82	Back door
The horn begins to sound	P. 162	Alarm
The vehicle is stuck in mud or sand	P. 778	If the vehicle becomes stuck

A warning light or indicator light comes on	P. 729	If a warning light turns on or a warning buzzer sounds...

Instrument cluster

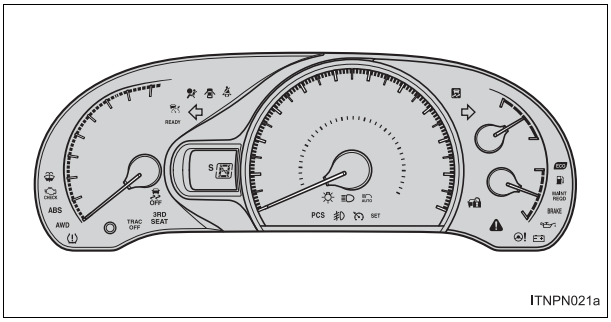

Center display

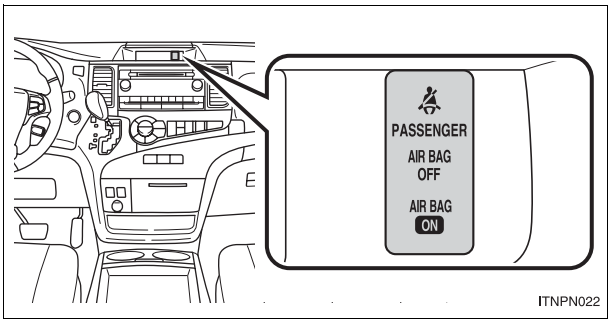

■**Warning lights**



Brake system warning light

or



P. 729



Charging system warning light P. 730



Low engine oil pressure warning light P. 730



Malfunction indicator lamp

or



P. 730



SRS warning light P. 730



“ABS” warning light

or



P. 731



Slip indicator light P. 731



Maintenance required reminder light P. 735



Tire pressure warning light P. 734



Low washer fluid warning light P. 734



Open door warning light P. 733



Driver’s seat belt reminder light P. 733



Front passenger’s seat belt reminder light P. 733



Third seat warning light P. 735



Electric power steering system warning light P. 731



Master warning light P. 733



Low fuel level warning light P. 733



Active torque control 4WD system warning light P. 736



Pre-collision system warning light* P. 731



Cruise control indicator light* P. 732




Radar cruise control indicator light* P. 732



Automatic High Beam indicator light* P. 732

*: The light flashes to indicate a malfunction.

GAS STATION INFORMATION

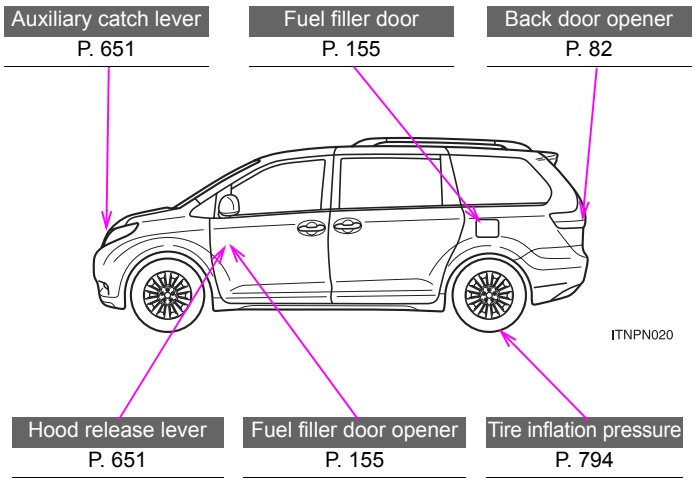

Fuel tank capacity (Reference)	20.9 gal. (79 L, 17.4 Imp.gal.)
Fuel type	Unleaded gasoline with an Octane Rating of 87 (Research Octane Number 91)
Cold tire inflation pressure	P. 794
Engine oil capacity (Drain and refill — reference)	qt. (L, Imp.qt.) 1AR-FE engine / 2GR-FE engine Without filter: 4.2 (4.0, 3.5) / 6.0 (5.7, 5.0) With filter: 4.6 (4.4, 3.9) / 6.4 (6.1, 5.4)
Engine oil type	Toyota Genuine Motor Oil or equivalent Oil grade: P. 788 ILSAC multigrade engine oil Recommended oil viscosity: 0W-20